



Bluetooth Antenna

PCB Ant


specification

Yichip Microelectronics

©2014

Yichip Microelectronics Co., Ltd,
No. 398, Wensan Road, Xihu District, Hangzhou City, Zhejiang
Province, China


ANT5:

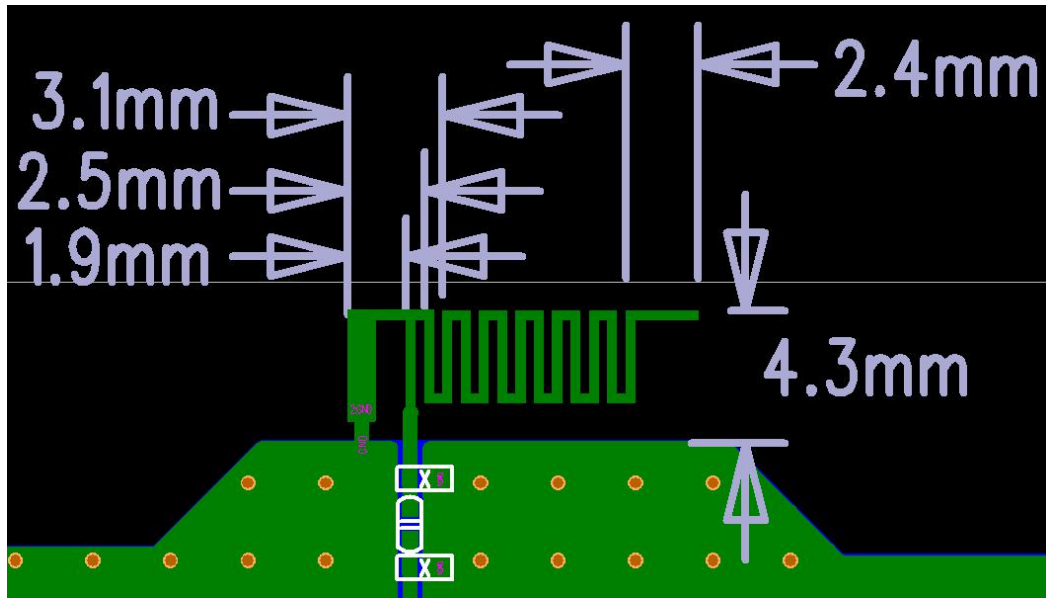


Gian and Efficiency


Frequency (MHz)	Efficiency(%)	Gain(dBi)
2300	34.81	-0.14
2320	38.90	0.50
2340	38.95	1.16
2360	40.11	1.28
2380	39.28	1.80
2400	41.77	2.20
2420	49.71	2.34
2440	50.23	2.58
2460	45.91	2.45
2480	42.46	2.09
2500	41.10	2.01
2520	35.58	0.96
2540	32.43	0.44

3D and 1D Radiation Patterns

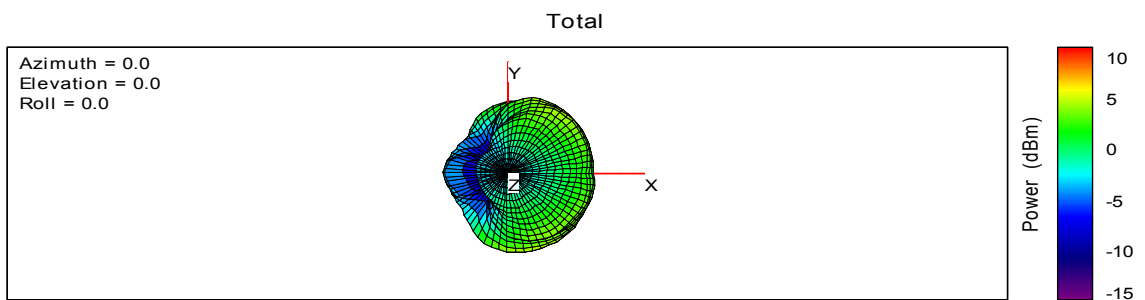


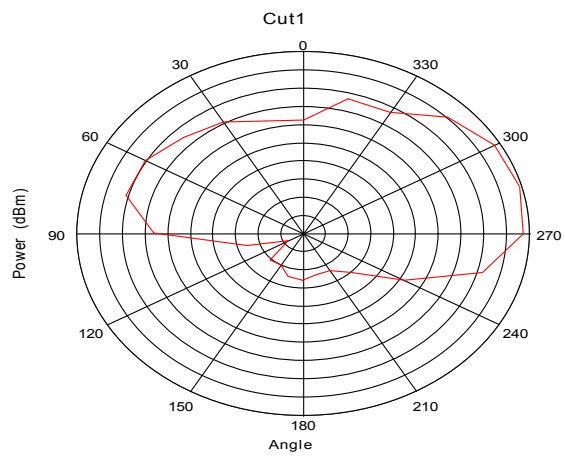

Max: 5
Min: -5
Scale: 1/div

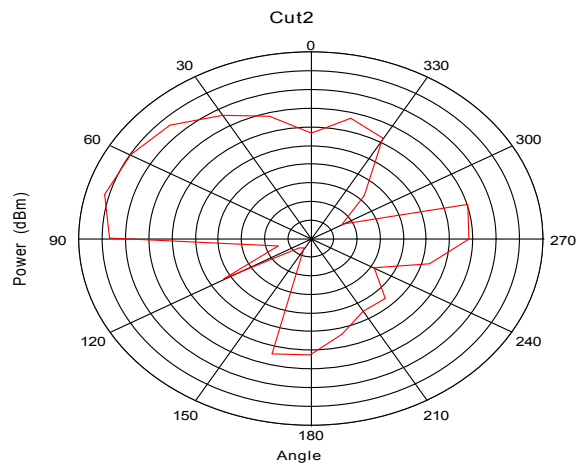

Max: 4
Min: -16
Scale: 2/div

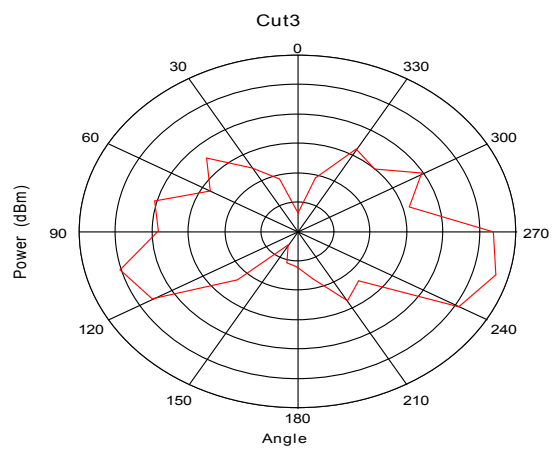

Max: 6
Min: -6
Scale: 2/div

Tester : *Leon Liu*