# RF Test Data for 2.4G Wi-Fi (Conducted Measurements)

| General Description of EUT | |
|---|---|
| **EUT Name:** | Tablet computer |
| **Model:** | SuiPlay0X1 |
| **Sample ID:** | HC-C-202504-0153-01-01-2# |
| **Environmental Conditions** | |
| **Ambient Temperature:** | 23.8℃ |
| **Ambient Humidity:** | 48% |
| **Test Power Supply:** | DC 11.55V |
| **Test Engineer:** | Rick. chen |
| Note: For a more detailed features description, please refer to the report TBR-C-202504-0153-82 | |

# Contents

1: DTS Bandwidth ..... 3
1.1Test Result ..... 3
1.2 Test Graphs ..... 4
2: Occupied Channel Bandwidth ..... 10
2.1 Test Result ..... 10
2.2 Test Graphs ..... 11
3: Maximum conducted output power ..... 17
3.1 Test Result Average ..... 17
4: Maximum power spectral density ..... 19
4.1 Test Result ..... 19
4.2 Test Graphs ..... 21
5: Band edge measurements ..... 27
5.1 Test Result ..... 27
5.2 Test Graphs ..... 28
6: Conducted Spurious Emission ..... 32
6.1 Test Result ..... 32
6.2 Test Graphs ..... 35
7: Duty Cycle ..... 53
7.1 Test Result ..... 53
7.2 Test Graphs ..... 54
8: Emissions in Restricted Bands ..... 60
8.1 Test Result ..... 60
8.2 Test Graphs ..... 65

# 1: DTS Bandwidth

## 1.1Test Result

| TestMode | Ant. | Frequency [MHz] | DTS BW [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|---|---|---|---|---|---|---|---|
| 11B-CDD | Ant1 | 2412 | 8.08 | 2407.96 | 2416.04 | 0.5 | PASS |
| 11B-CDD | Ant2 | 2412 | 9.04 | 2407.48 | 2416.52 | 0.5 | PASS |
| 11B-CDD | Ant1 | 2437 | 10.12 | 2431.92 | 2442.04 | 0.5 | PASS |
| 11B-CDD | Ant2 | 2437 | 10.08 | 2431.96 | 2442.04 | 0.5 | PASS |
| 11B-CDD | Ant1 | 2462 | 10.20 | 2456.88 | 2467.08 | 0.5 | PASS |
| 11B-CDD | Ant2 | 2462 | 10.12 | 2456.92 | 2467.04 | 0.5 | PASS |
| 11G-CDD | Ant1 | 2412 | 15.08 | 2404.44 | 2419.52 | 0.5 | PASS |
| 11G-CDD | Ant2 | 2412 | 16.32 | 2403.84 | 2420.16 | 0.5 | PASS |
| 11G-CDD | Ant1 | 2437 | 13.84 | 2429.44 | 2443.28 | 0.5 | PASS |
| 11G-CDD | Ant2 | 2437 | 15.12 | 2429.44 | 2444.56 | 0.5 | PASS |
| 11G-CDD | Ant1 | 2462 | 15.12 | 2454.44 | 2469.56 | 0.5 | PASS |
| 11G-CDD | Ant2 | 2462 | 16.28 | 2453.84 | 2470.12 | 0.5 | PASS |
| 11N20MIMO | Ant1 | 2412 | 15.08 | 2404.44 | 2419.52 | 0.5 | PASS |
| 11N20MIMO | Ant2 | 2412 | 15.12 | 2404.44 | 2419.56 | 0.5 | PASS |
| 11N20MIMO | Ant1 | 2437 | 15.04 | 2429.44 | 2444.48 | 0.5 | PASS |
| 11N20MIMO | Ant2 | 2437 | 13.88 | 2430.68 | 2444.56 | 0.5 | PASS |
| 11N20MIMO | Ant1 | 2462 | 15.04 | 2454.52 | 2469.56 | 0.5 | PASS |
| 11N20MIMO | Ant2 | 2462 | 15.08 | 2454.44 | 2469.52 | 0.5 | PASS |
| 11N40MIMO | Ant1 | 2422 | 35.04 | 2404.48 | 2439.52 | 0.5 | PASS |
| 11N40MIMO | Ant2 | 2422 | 33.84 | 2405.68 | 2439.52 | 0.5 | PASS |
| 11N40MIMO | Ant1 | 2437 | 33.92 | 2420.68 | 2454.60 | 0.5 | PASS |
| 11N40MIMO | Ant2 | 2437 | 35.12 | 2419.48 | 2454.60 | 0.5 | PASS |
| 11N40MIMO | Ant1 | 2452 | 33.84 | 2435.68 | 2469.52 | 0.5 | PASS |
| 11N40MIMO | Ant2 | 2452 | 35.12 | 2434.40 | 2469.52 | 0.5 | PASS |
| 11AX20MIMO | Ant1 | 2412 | 17.68 | 2402.80 | 2420.48 | 0.5 | PASS |
| 11AX20MIMO | Ant2 | 2412 | 13.88 | 2405.68 | 2419.56 | 0.5 | PASS |
| 11AX20MIMO | Ant1 | 2437 | 17.84 | 2428.12 | 2445.96 | 0.5 | PASS |
| 11AX20MIMO | Ant2 | 2437 | 17.84 | 2428.56 | 2446.40 | 0.5 | PASS |
| 11AX20MIMO | Ant1 | 2462 | 13.84 | 2454.44 | 2468.28 | 0.5 | PASS |
| 11AX20MIMO | Ant2 | 2462 | 15.12 | 2454.44 | 2469.56 | 0.5 | PASS |
| 11AX40MIMO | Ant1 | 2422 | 32.40 | 2407.28 | 2439.68 | 0.5 | PASS |
| 11AX40MIMO | Ant2 | 2422 | 25.76 | 2409.20 | 2434.96 | 0.5 | PASS |
| 11AX40MIMO | Ant1 | 2437 | 31.28 | 2423.24 | 2454.52 | 0.5 | PASS |
| 11AX40MIMO | Ant2 | 2437 | 35.84 | 2419.24 | 2455.08 | 0.5 | PASS |
| 11AX40MIMO | Ant1 | 2452 | 36.00 | 2433.52 | 2469.52 | 0.5 | PASS |
| 11AX40MIMO | Ant2 | 2452 | 30.32 | 2434.40 | 2464.72 | 0.5 | PASS |

## 1.2 Test Graphs

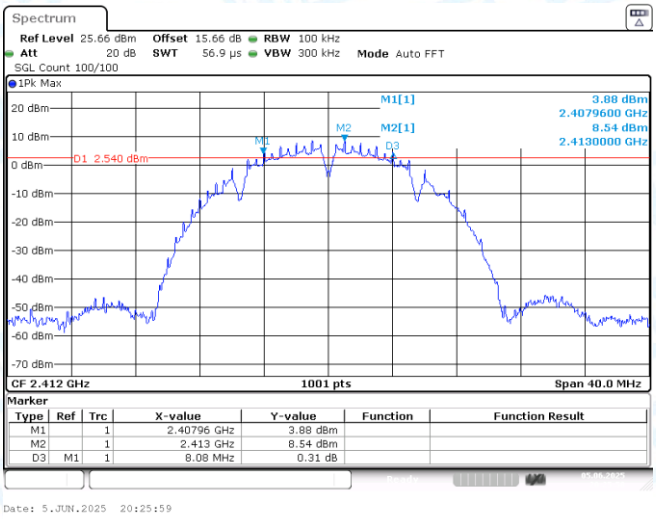


11B-CDD-Ant1-2412-PASS

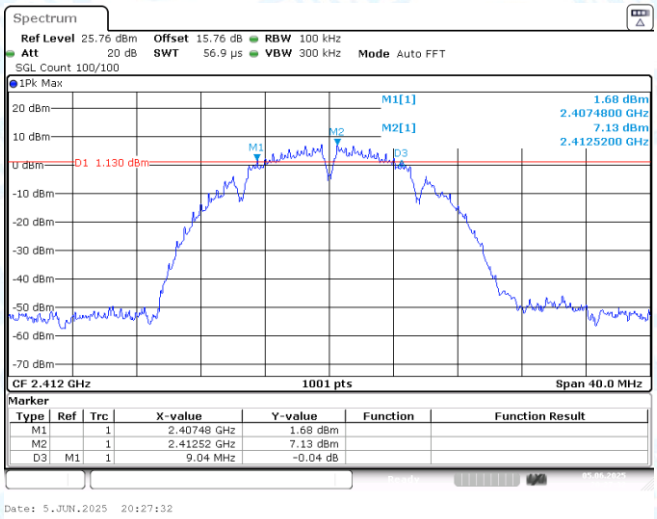


11B-CDD-Ant2-2412-PASS

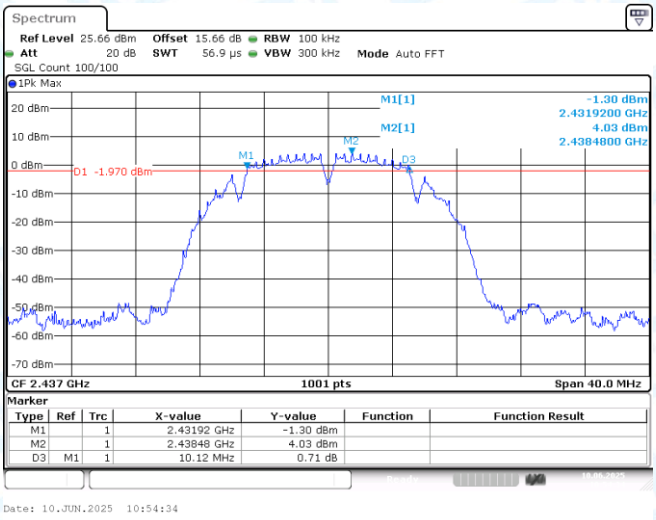


11B-CDD-Ant1-2437-PASS

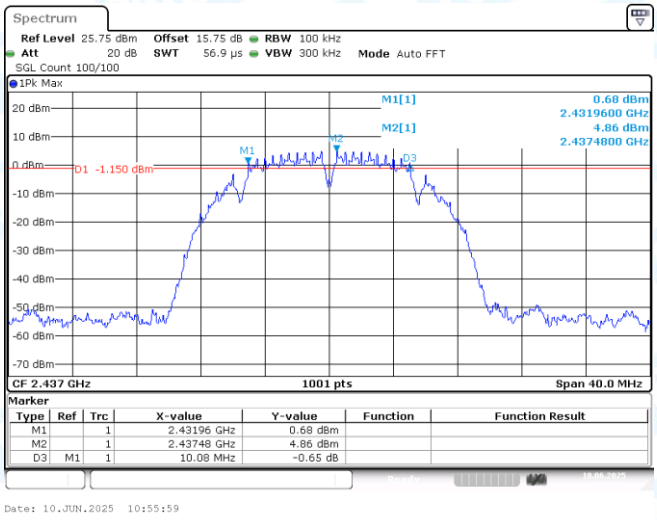


11B-CDD-Ant2-2437-PASS

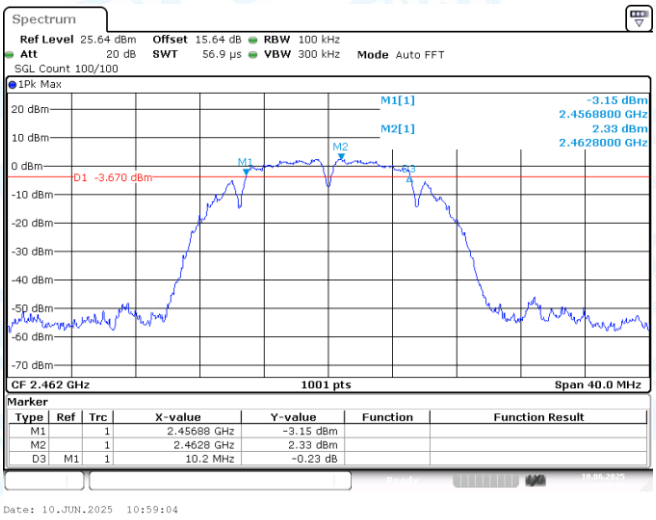


11B-CDD-Ant1-2462-PASS

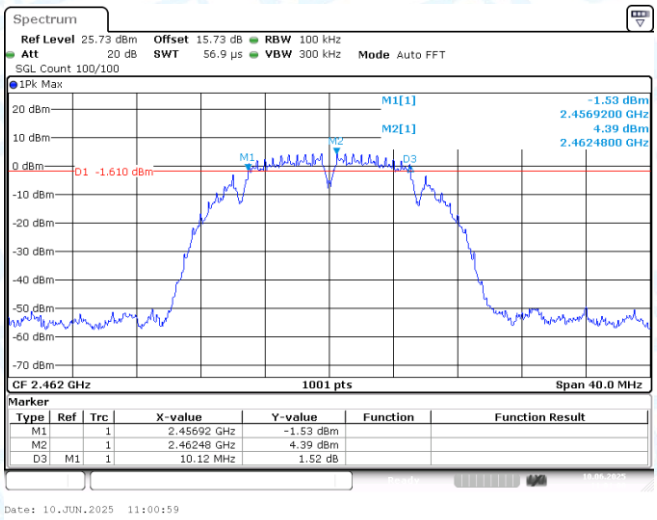


11B-CDD-Ant2-2462-PASS

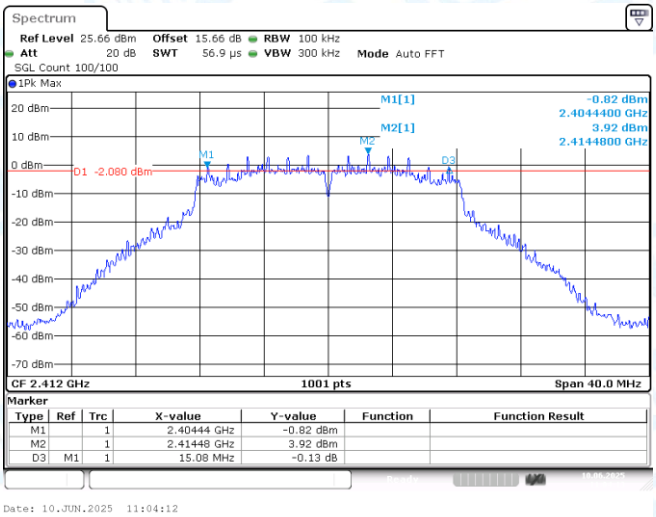


11G-CDD-Ant1-2412-PASS

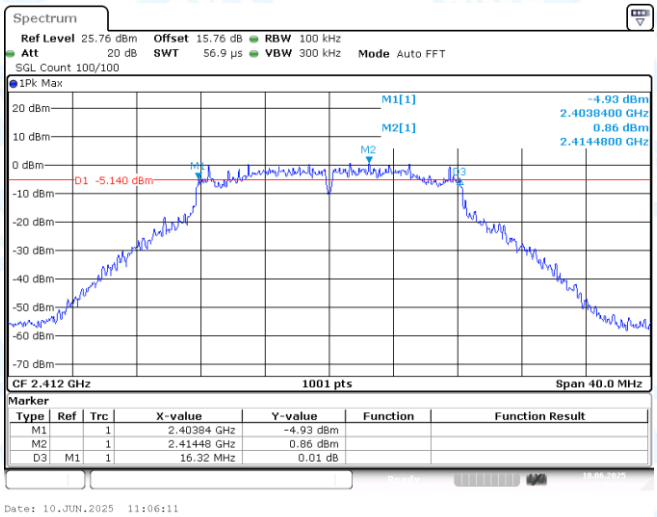


11G-CDD-Ant2-2412-PASS

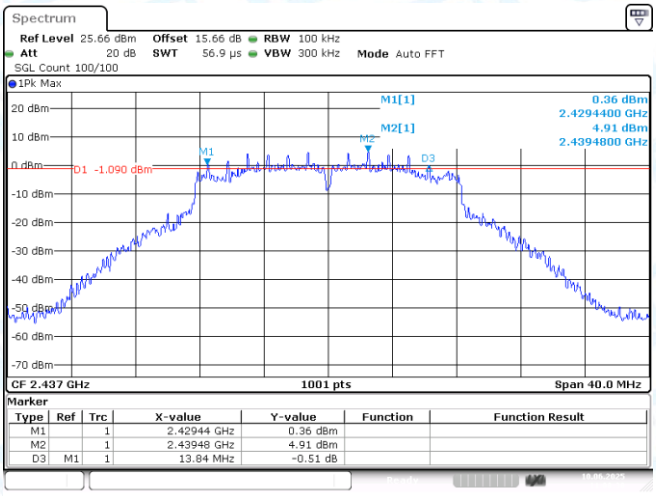


11G-CDD-Ant1-2437-PASS

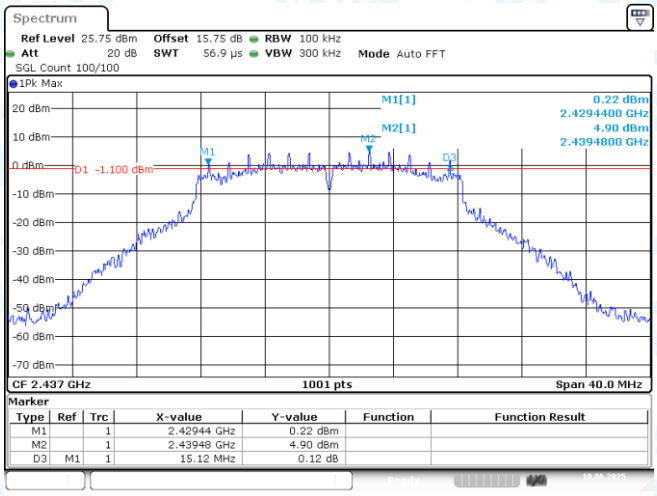


11G-CDD-Ant2-2437-PASS

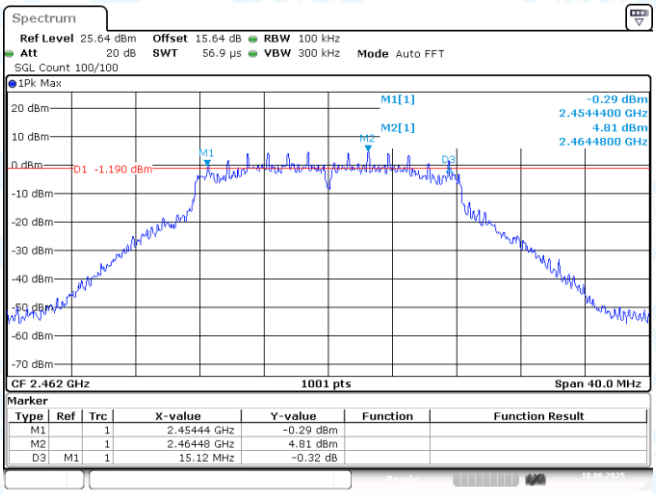


11G-CDD-Ant1-2462-PASS

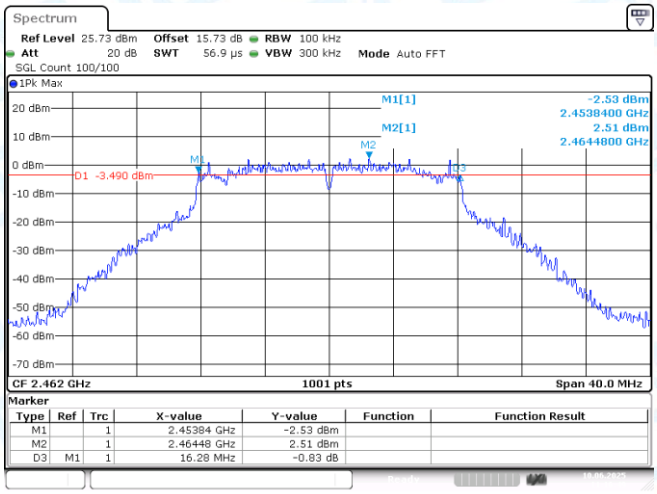


11G-CDD-Ant2-2462-PASS

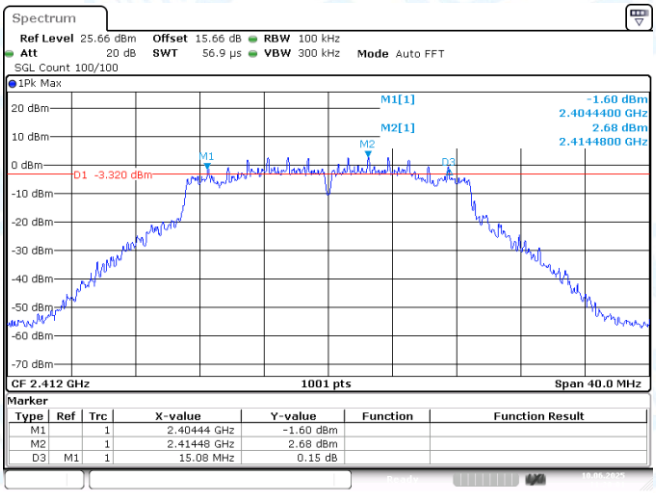


11N20MIMO-Ant1-2412-PASS

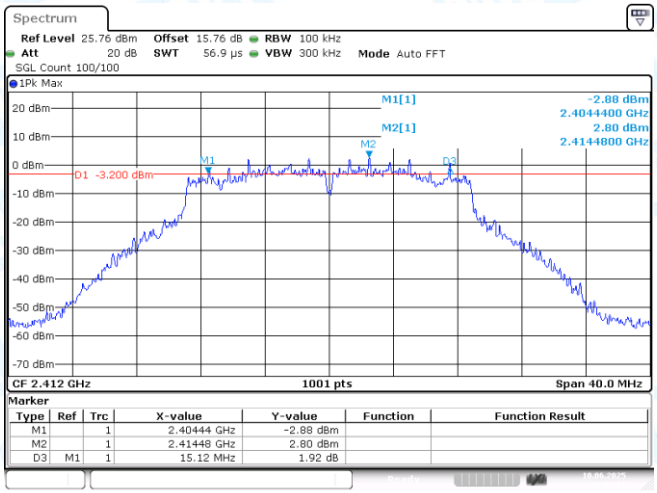


11N20MIMO-Ant2-2412-PASS

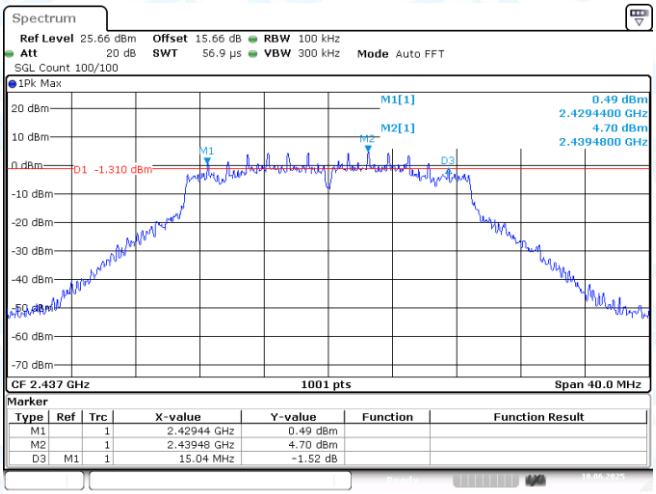


11N20MIMO-Ant1-2437-PASS

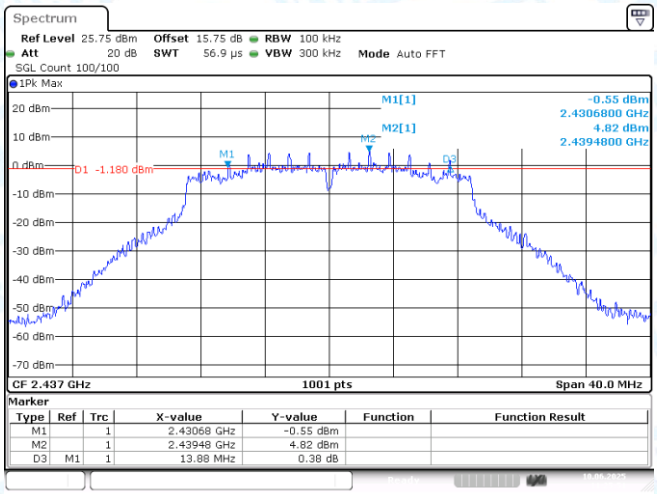


11N20MIMO-Ant2-2437-PASS

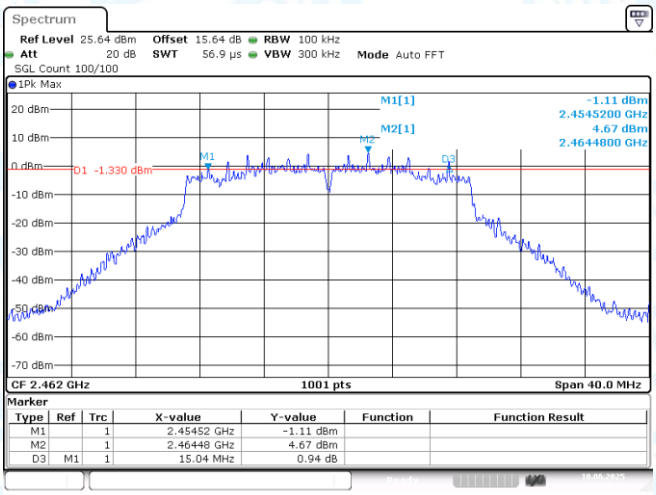


11N20MIMO-Ant1-2462-PASS

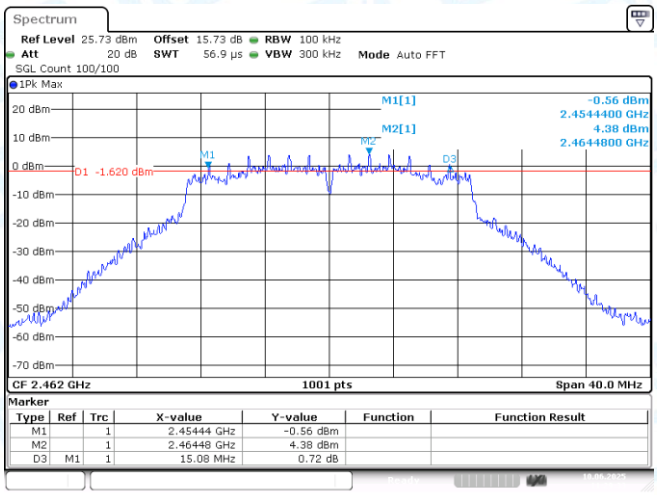


11N20MIMO-Ant2-2462-PASS

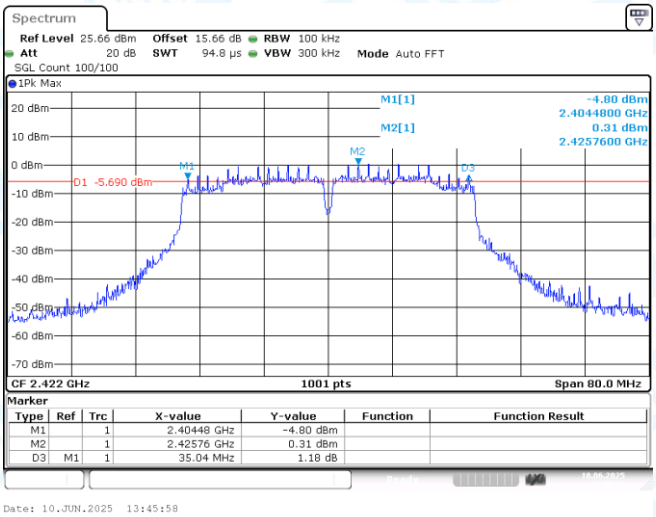


11N40MIMO-Ant1-2422-PASS

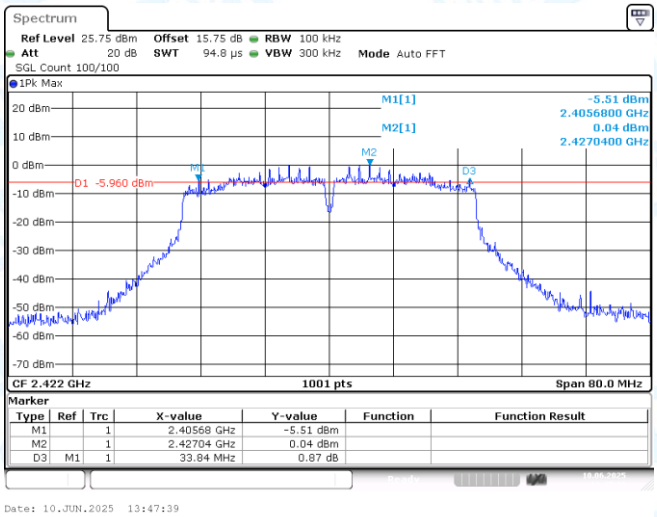


11N40MIMO-Ant2-2422-PASS

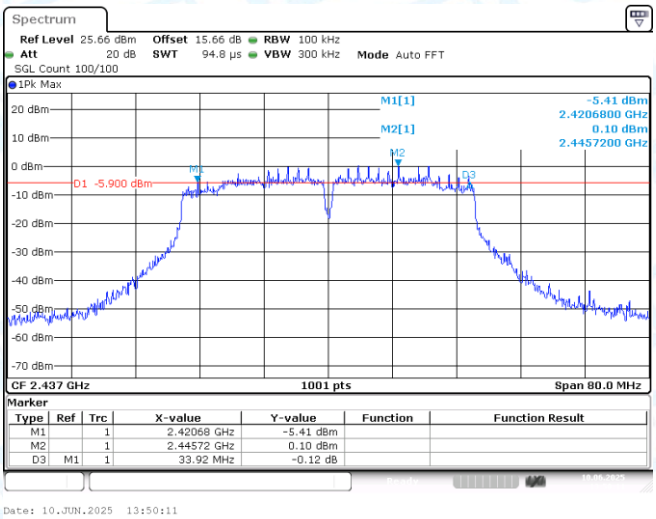


11N40MIMO-Ant1-2437-PASS

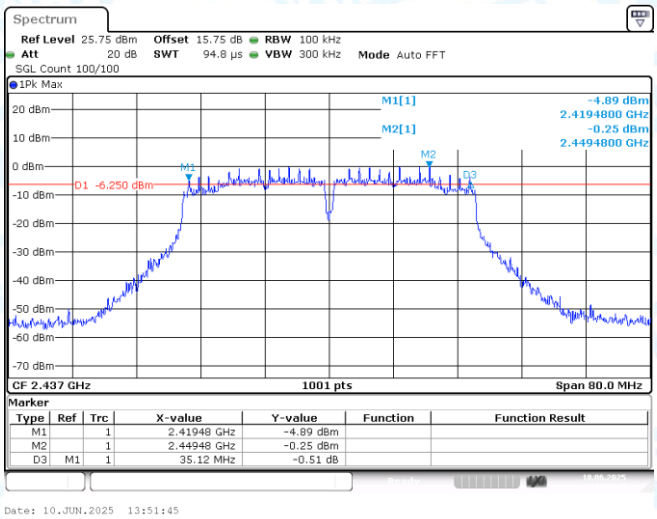


11N40MIMO-Ant2-2437-PASS

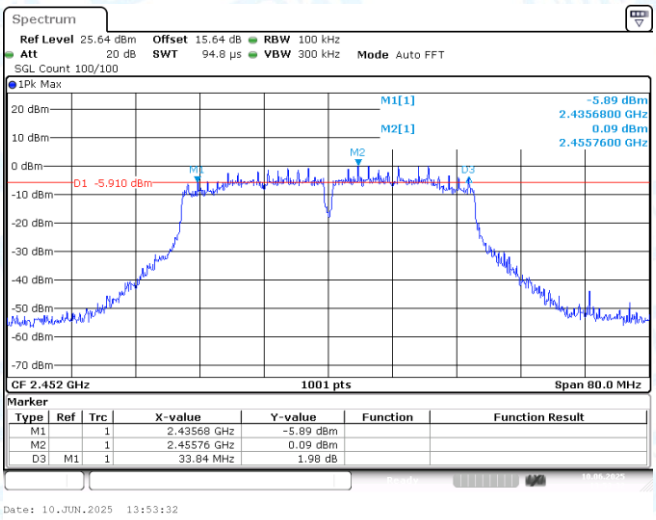


11N40MIMO-Ant1-2452-PASS

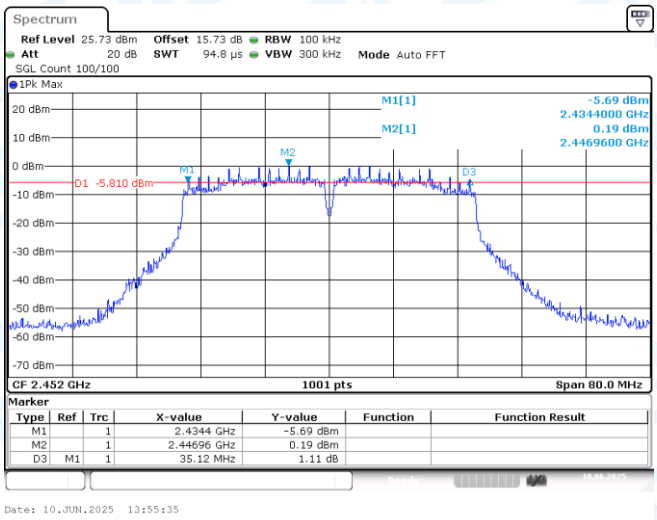


11N40MIMO-Ant2-2452-PASS

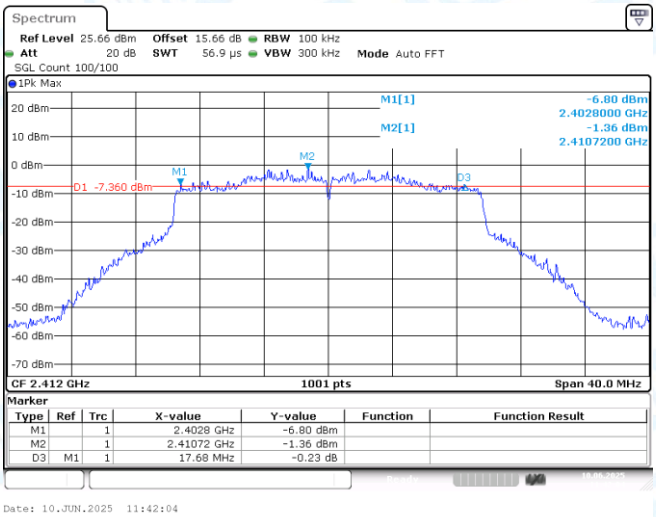


11AX20MIMO-Ant1-2412-PASS

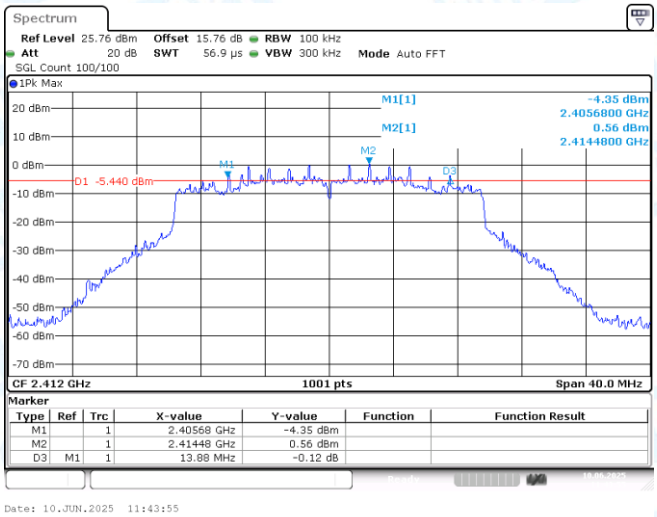


11AX20MIMO-Ant2-2412-PASS

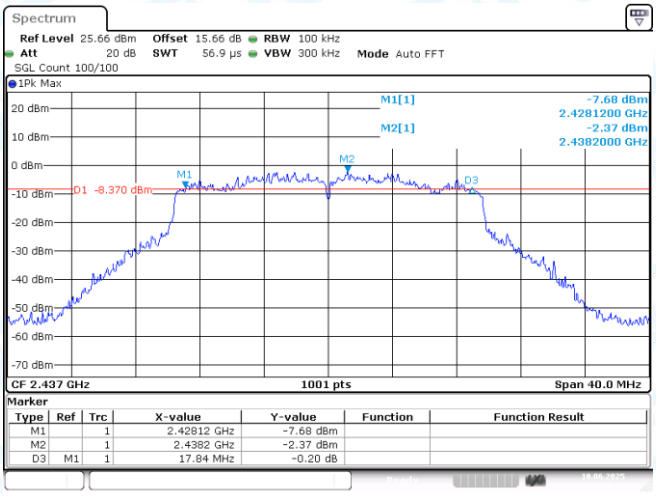


11AX20MIMO-Ant1-2437-PASS

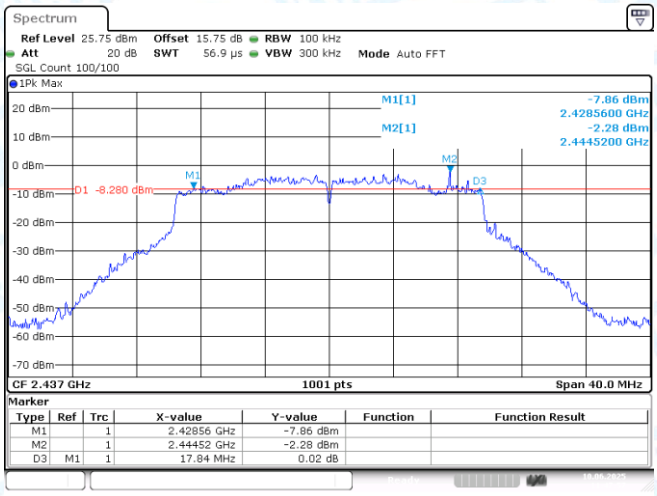


11AX20MIMO-Ant2-2437-PASS

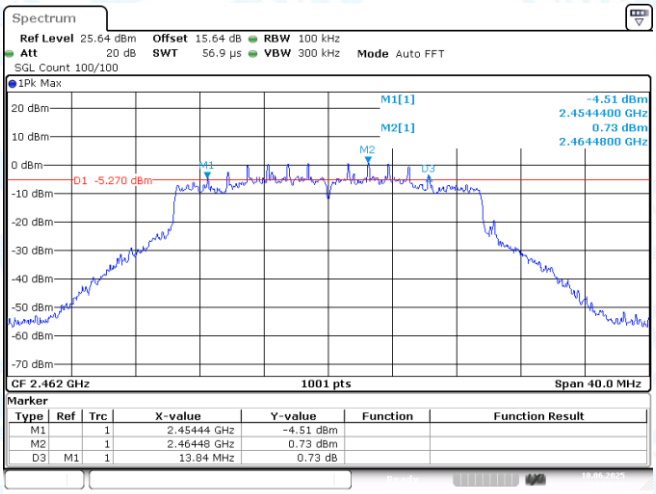


11AX20MIMO-Ant1-2462-PASS

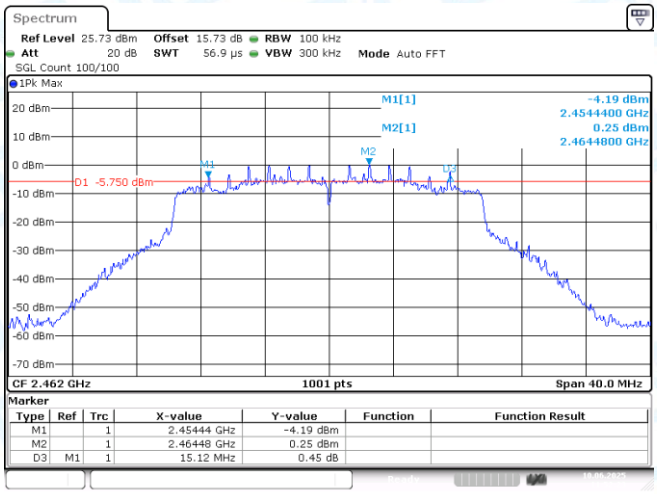


11AX20MIMO-Ant2-2462-PASS

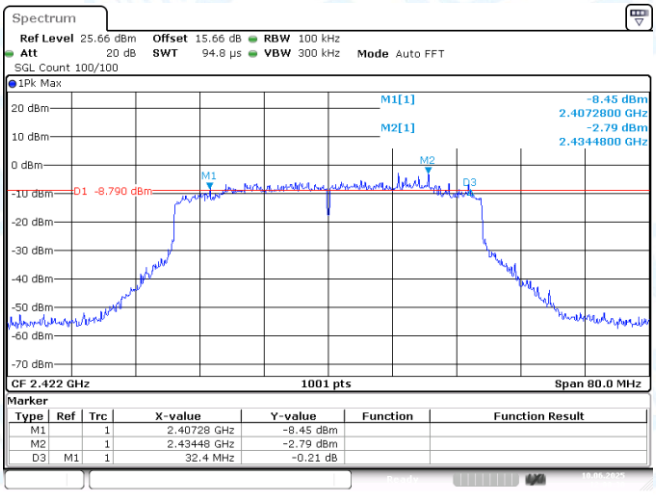


11AX40MIMO-Ant1-2422-PASS

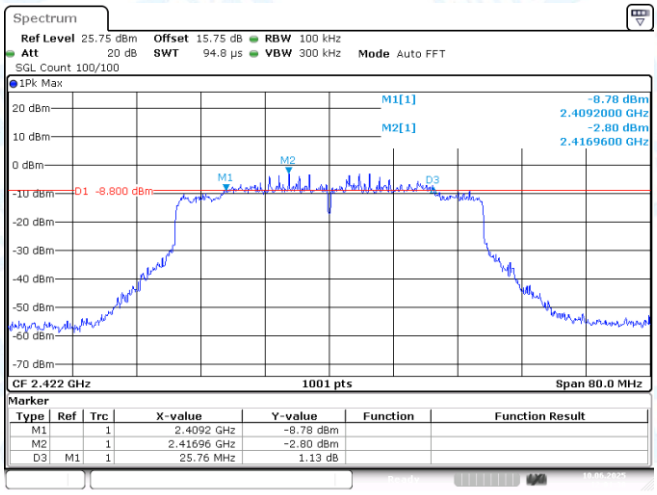


11AX40MIMO-Ant2-2422-PASS

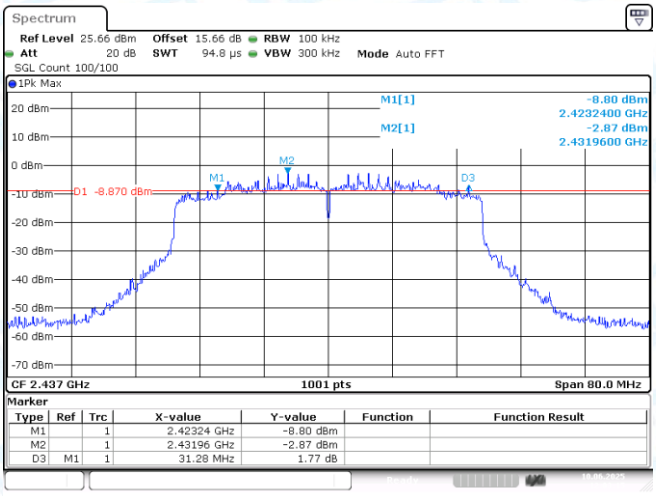


11AX40MIMO-Ant1-2437-PASS

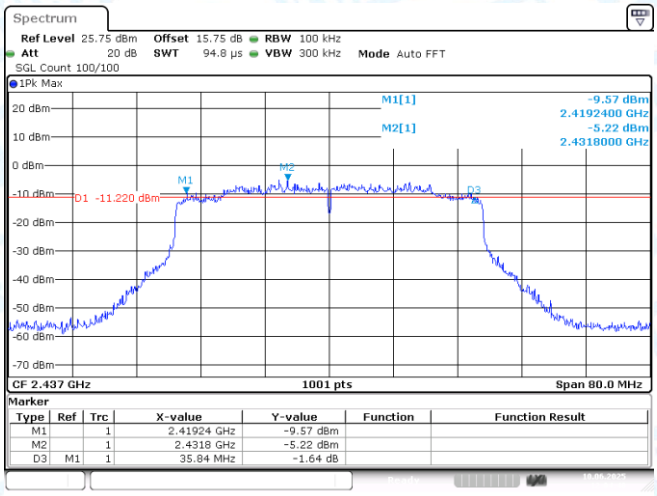


11AX40MIMO-Ant2-2437-PASS

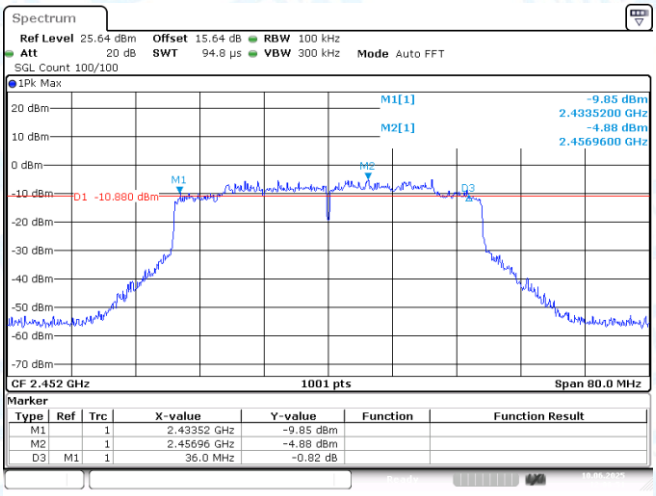


11AX40MIMO-Ant1-2452-PASS

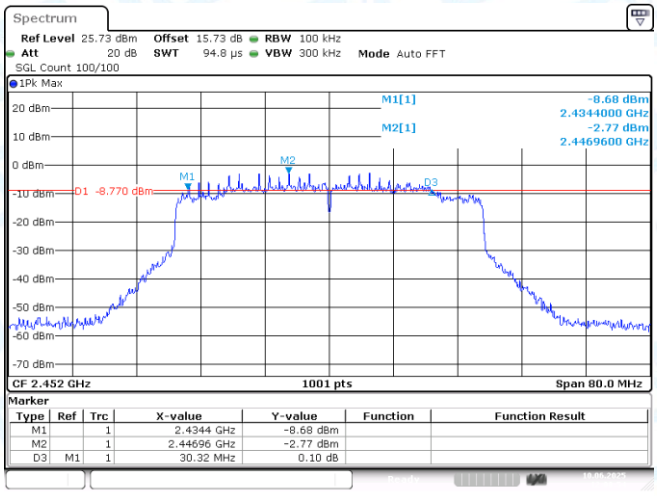


11AX40MIMO-Ant2-2452-PASS

# 2: Occupied Channel Bandwidth

## 2.1 Test Result

| TestMode | Ant. | Channel Frequency[MHz] | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|---|---|---|---|---|---|---|---|
| 11B-CDD | Ant1 | 2412 | 13.506 | 2405.2468 | 2418.7532 | --- | --- |
| 11B-CDD | Ant2 | 2412 | 13.427 | 2405.3267 | 2418.7532 | --- | --- |
| 11B-CDD | Ant1 | 2437 | 13.387 | 2430.2867 | 2443.6733 | --- | --- |
| 11B-CDD | Ant2 | 2437 | 13.387 | 2430.3267 | 2443.7133 | --- | --- |
| 11B-CDD | Ant1 | 2462 | 13.387 | 2455.2867 | 2468.6733 | --- | --- |
| 11B-CDD | Ant2 | 2462 | 13.347 | 2455.3267 | 2468.6733 | --- | --- |
| 11G-CDD | Ant1 | 2412 | 16.863 | 2403.6084 | 2420.4715 | --- | --- |
| 11G-CDD | Ant2 | 2412 | 16.863 | 2403.6084 | 2420.4715 | --- | --- |
| 11G-CDD | Ant1 | 2437 | 17.023 | 2428.4885 | 2445.5115 | --- | --- |
| 11G-CDD | Ant2 | 2437 | 17.183 | 2428.6484 | 2445.8312 | --- | --- |
| 11G-CDD | Ant1 | 2462 | 16.903 | 2453.5285 | 2470.4316 | --- | --- |
| 11G-CDD | Ant2 | 2462 | 16.863 | 2453.6084 | 2470.4715 | --- | --- |
| 11N20MIMO | Ant1 | 2412 | 17.902 | 2402.9291 | 2420.8312 | --- | --- |
| 11N20MIMO | Ant2 | 2412 | 17.942 | 2403.0889 | 2421.0310 | --- | --- |
| 11N20MIMO | Ant1 | 2437 | 17.982 | 2427.9291 | 2445.9111 | --- | --- |
| 11N20MIMO | Ant2 | 2437 | 17.862 | 2428.0889 | 2445.9510 | --- | --- |
| 11N20MIMO | Ant1 | 2462 | 17.942 | 2452.9291 | 2470.8711 | --- | --- |
| 11N20MIMO | Ant2 | 2462 | 18.022 | 2452.9291 | 2470.9510 | --- | --- |
| 11N40MIMO | Ant1 | 2422 | 36.044 | 2404.0180 | 2440.0619 | --- | --- |
| 11N40MIMO | Ant2 | 2422 | 36.044 | 2404.0180 | 2440.0619 | --- | --- |
| 11N40MIMO | Ant1 | 2437 | 36.044 | 2419.1778 | 2455.2218 | --- | --- |
| 11N40MIMO | Ant2 | 2437 | 36.124 | 2418.9381 | 2455.0619 | --- | --- |
| 11N40MIMO | Ant1 | 2452 | 36.044 | 2434.0180 | 2470.0619 | --- | --- |
| 11N40MIMO | Ant2 | 2452 | 36.044 | 2433.9381 | 2469.9820 | --- | --- |
| 11AX20MIMO | Ant1 | 2412 | 18.901 | 2402.5295 | 2421.4306 | --- | --- |
| 11AX20MIMO | Ant2 | 2412 | 18.901 | 2402.5694 | 2421.4705 | --- | --- |
| 11AX20MIMO | Ant1 | 2437 | 18.981 | 2427.4496 | 2446.4306 | --- | --- |
| 11AX20MIMO | Ant2 | 2437 | 18.941 | 2427.5295 | 2446.4705 | --- | --- |
| 11AX20MIMO | Ant1 | 2462 | 18.901 | 2452.5295 | 2471.4306 | --- | --- |
| 11AX20MIMO | Ant2 | 2462 | 19.141 | 2452.4496 | 2471.5904 | --- | --- |
| 11AX40MIMO | Ant1 | 2422 | 37.483 | 2403.3786 | 2440.8611 | --- | --- |
| 11AX40MIMO | Ant2 | 2422 | 37.483 | 2403.2188 | 2440.7013 | --- | --- |
| 11AX40MIMO | Ant1 | 2437 | 37.642 | 2418.2987 | 2455.9411 | --- | --- |
| 11AX40MIMO | Ant2 | 2437 | 37.483 | 2418.2188 | 2455.7013 | --- | --- |
| 11AX40MIMO | Ant1 | 2452 | 37.722 | 2433.2188 | 2470.9411 | --- | --- |
| 11AX40MIMO | Ant2 | 2452 | 37.642 | 2432.9790 | 2470.6214 | --- | --- |

## 2.2 Test Graphs

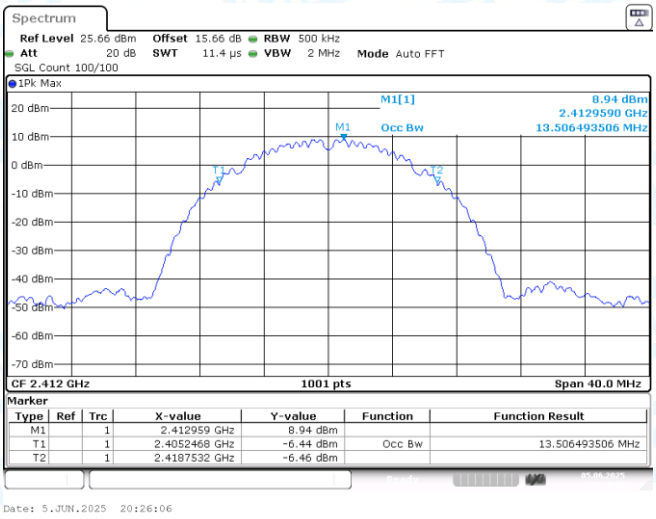


11B-CDD-Ant1-2412

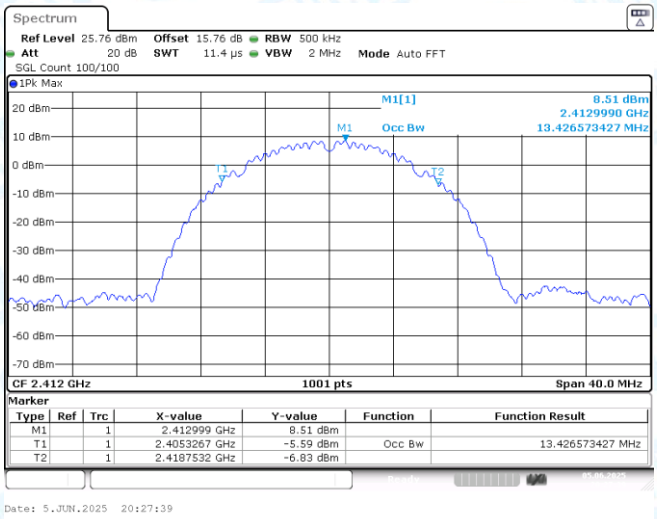


11B-CDD-Ant2-2412

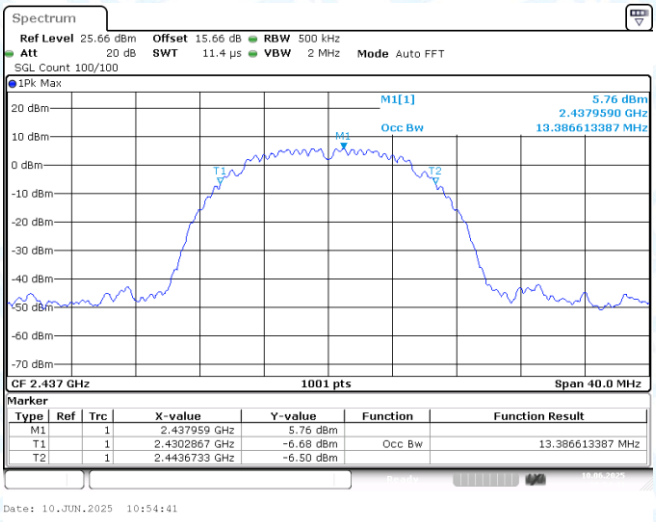


11B-CDD-Ant1-2437

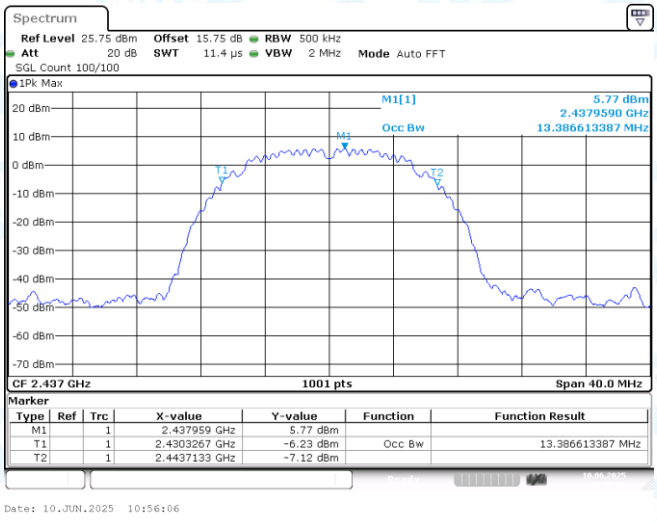


11B-CDD-Ant2-2437

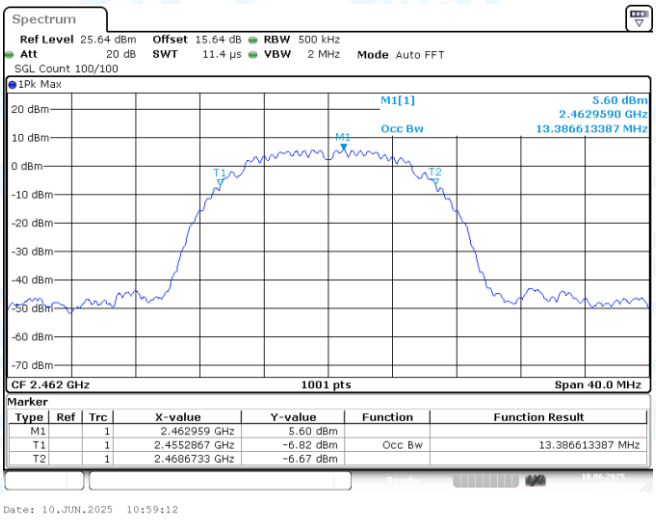


11B-CDD-Ant1-2462

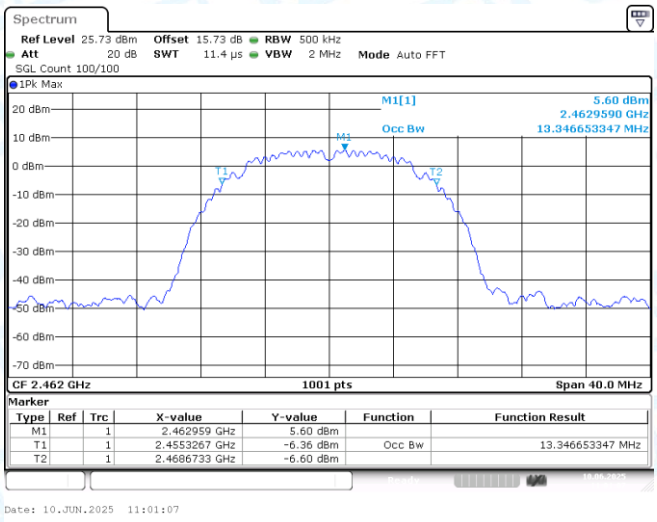


11B-CDD-Ant2-2462

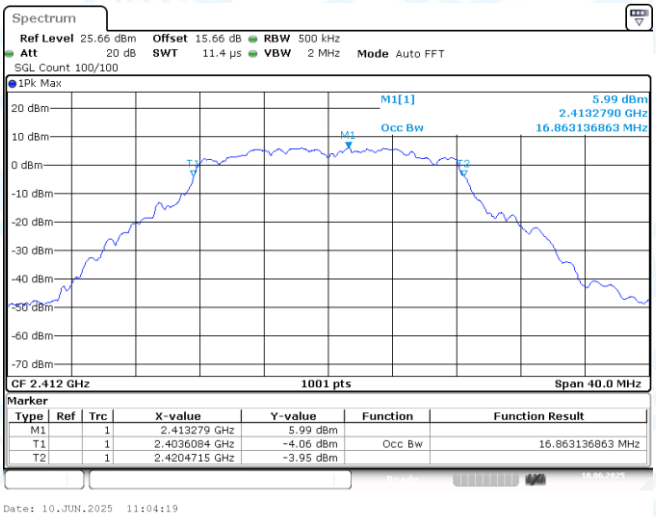


11G-CDD-Ant1-2412

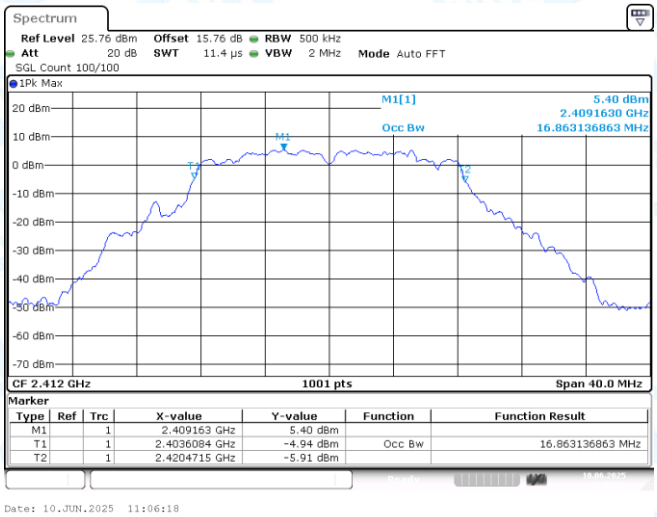


11G-CDD-Ant2-2412

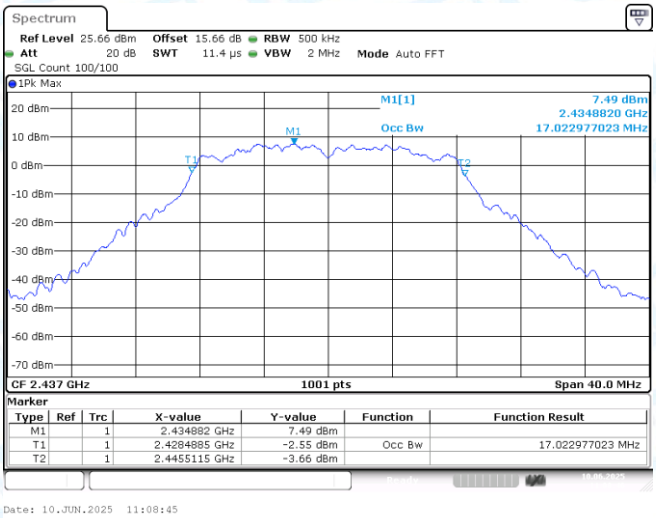


11G-CDD-Ant1-2437

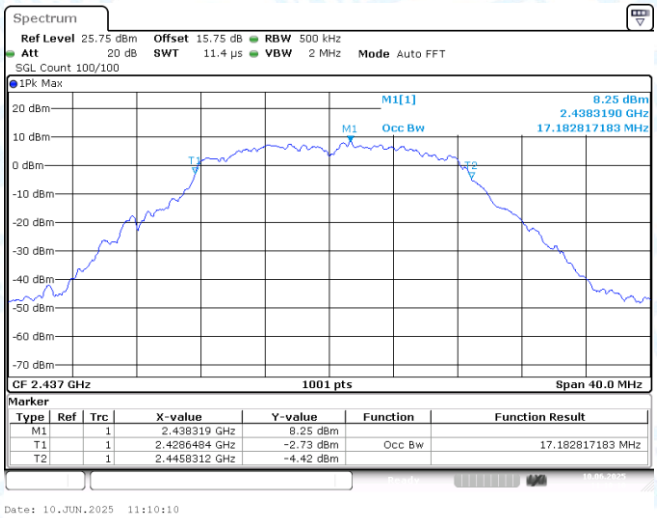


11G-CDD-Ant2-2437

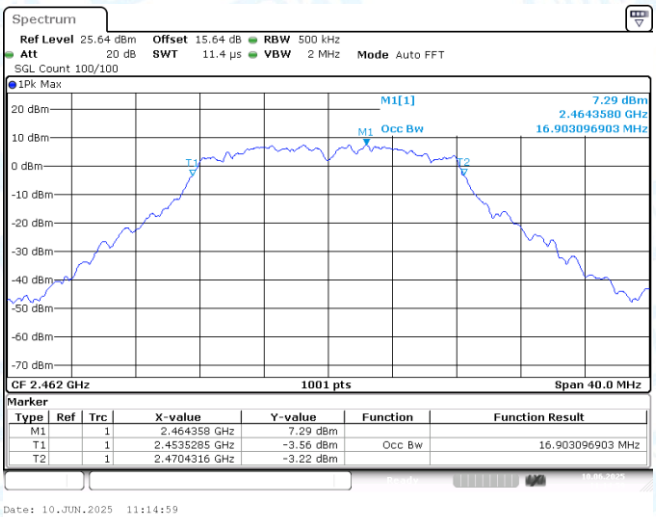


11G-CDD-Ant1-2462

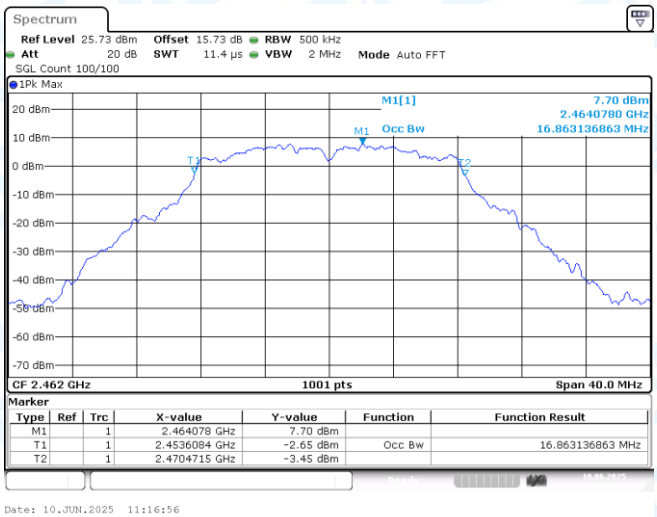


11G-CDD-Ant2-2462

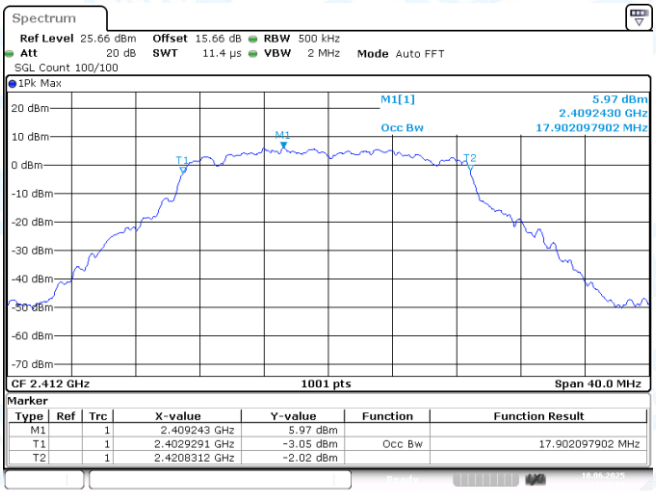


11N20MIMO-Ant1-2412

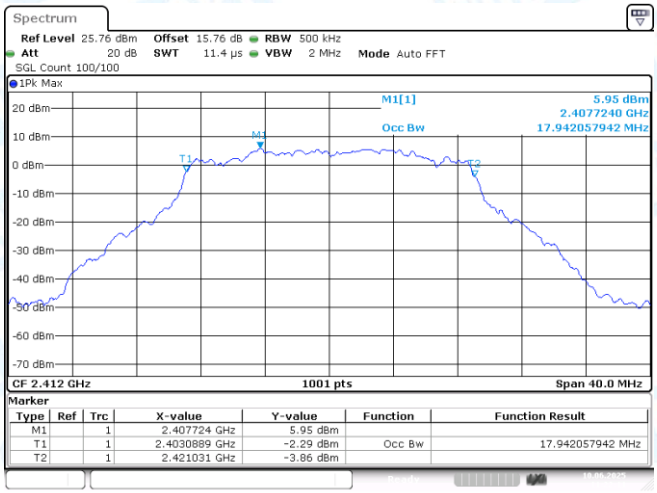


11N20MIMO-Ant2-2412

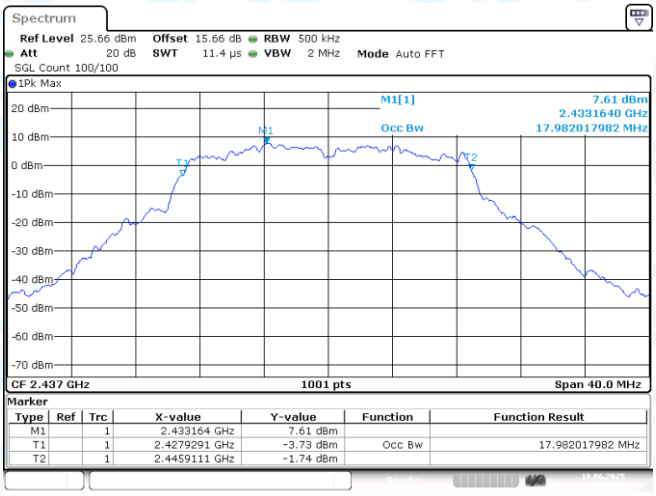


11N20MIMO-Ant1-2437

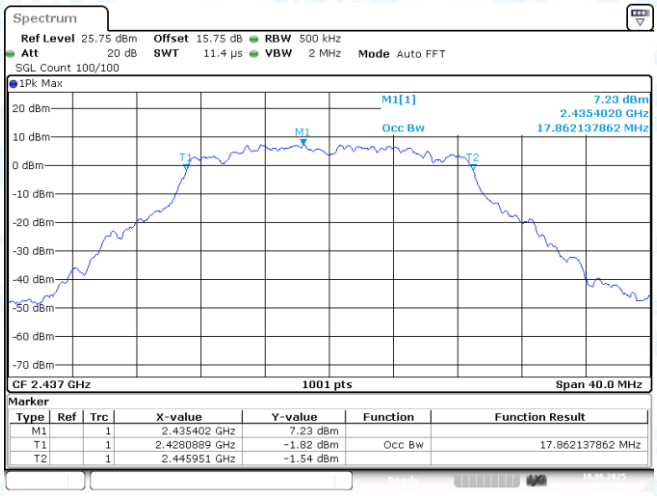


11N20MIMO-Ant2-2437

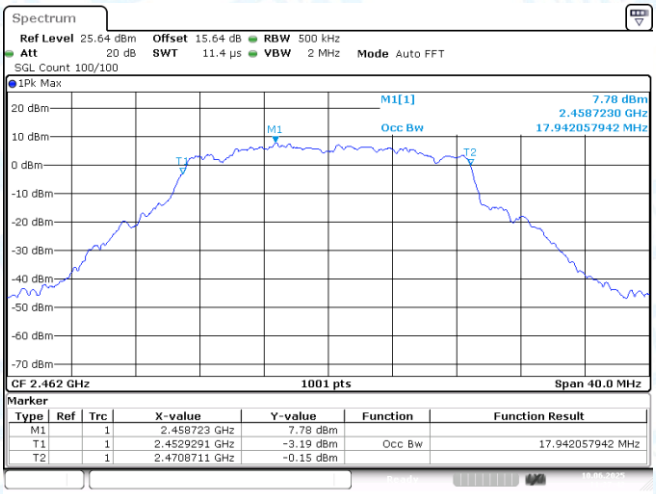


11N20MIMO-Ant1-2462

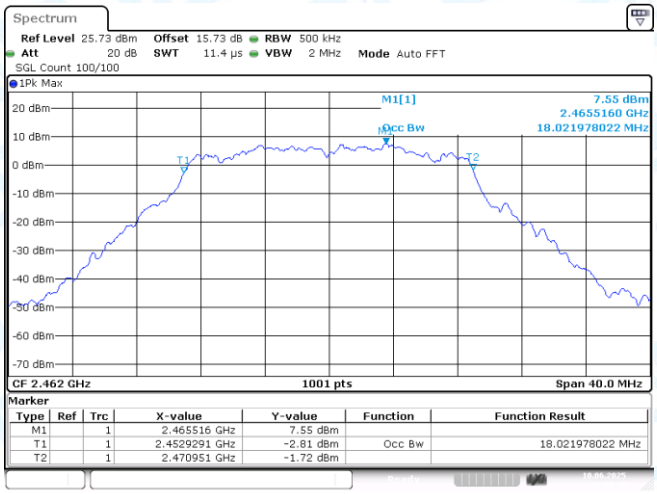


11N20MIMO-Ant2-2462

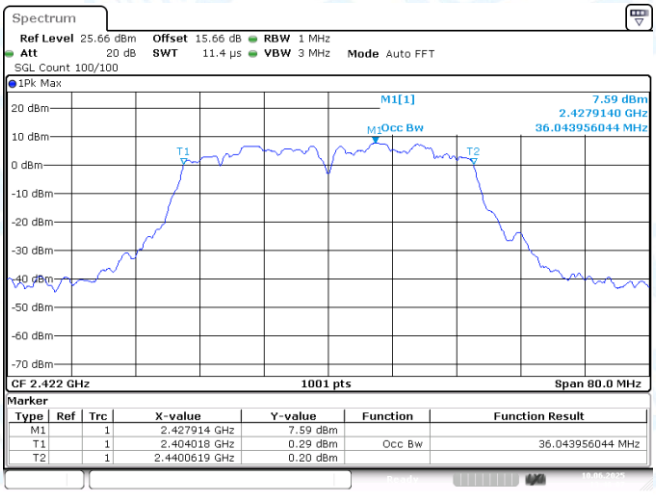


11N40MIMO-Ant1-2422

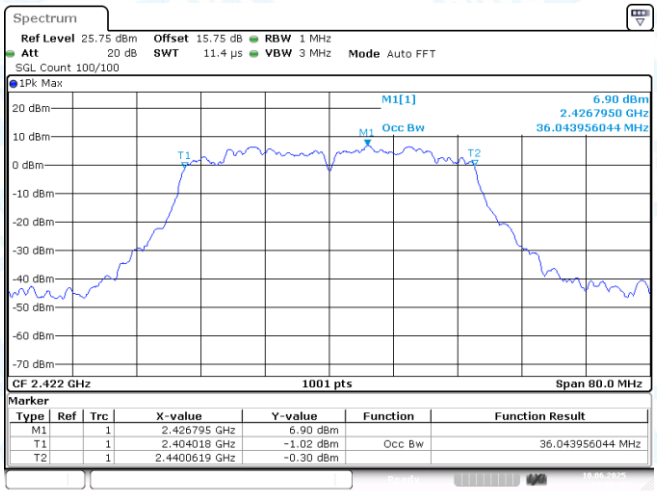


11N40MIMO-Ant2-2422

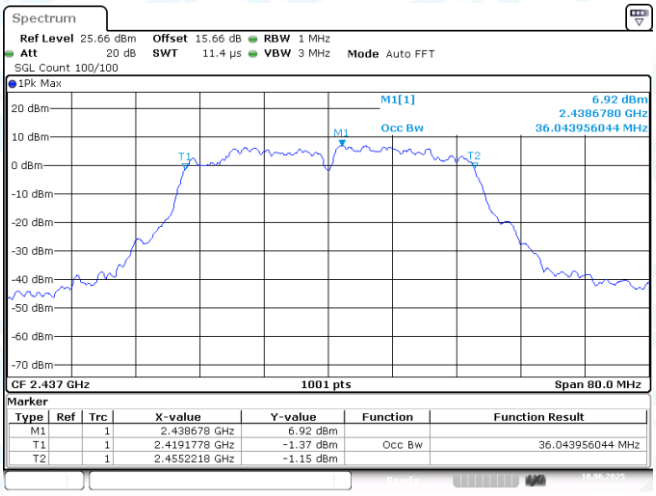


11N40MIMO-Ant1-2437

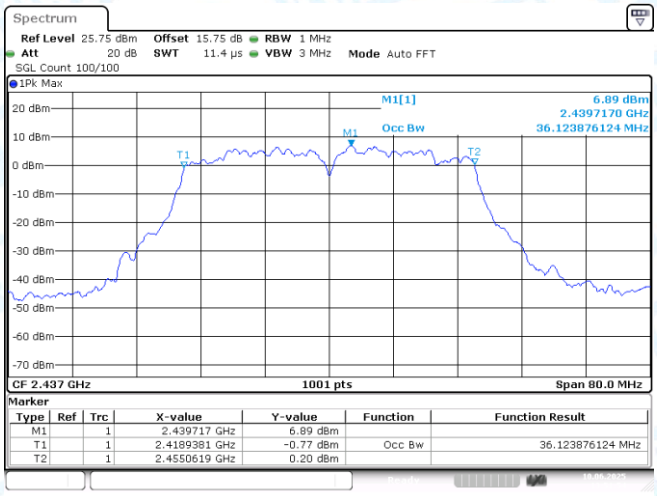


11N40MIMO-Ant2-2437

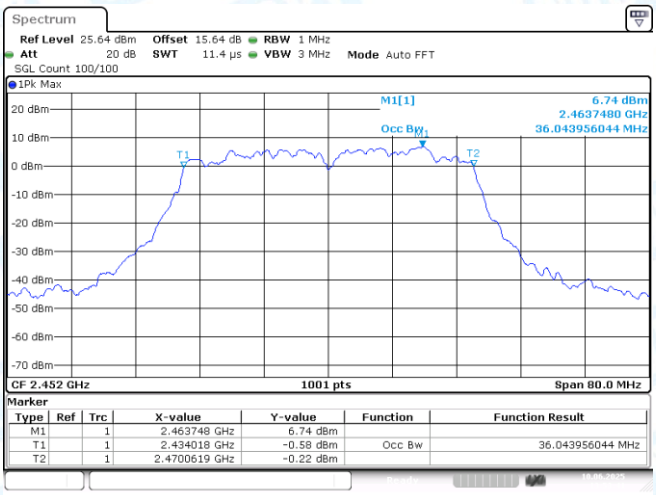


11N40MIMO-Ant1-2452

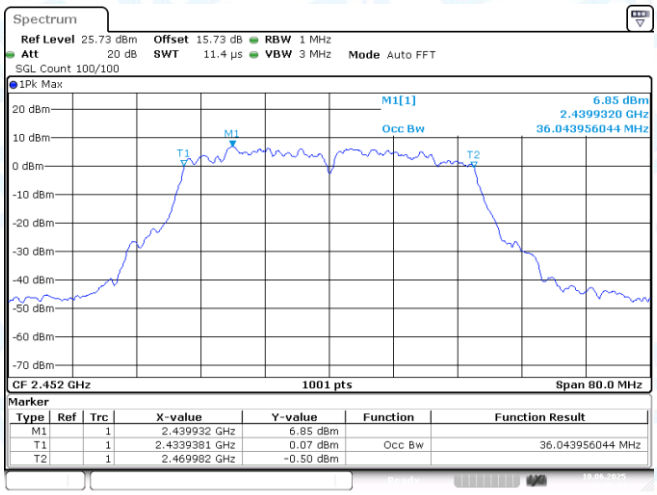


11N40MIMO-Ant2-2452

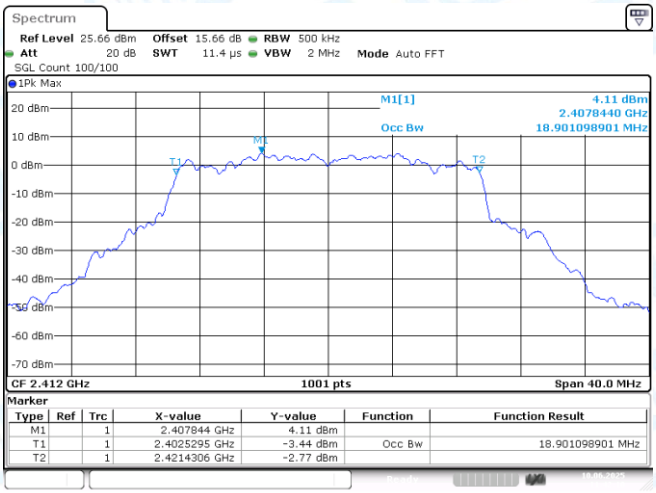


11AX20MIMO-Ant1-2412

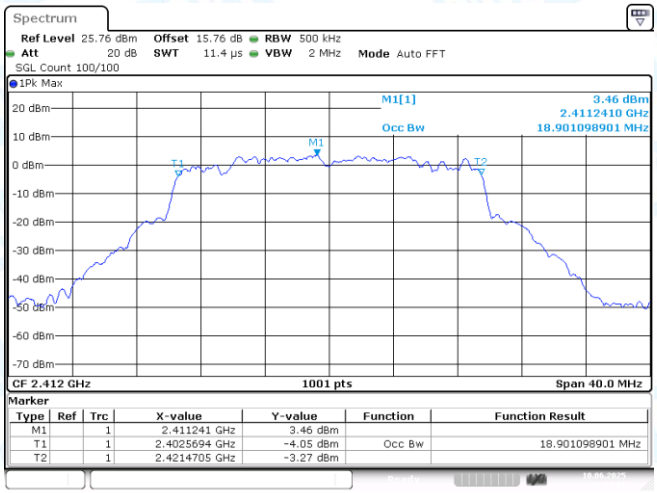


11AX20MIMO-Ant2-2412

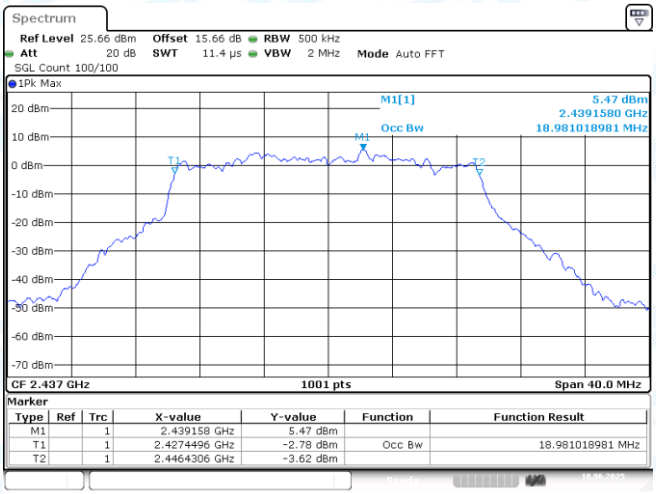


11AX20MIMO-Ant1-2437

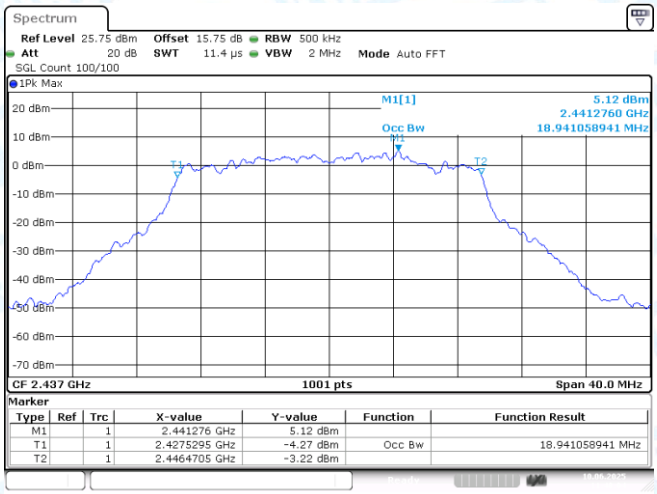


11AX20MIMO-Ant2-2437

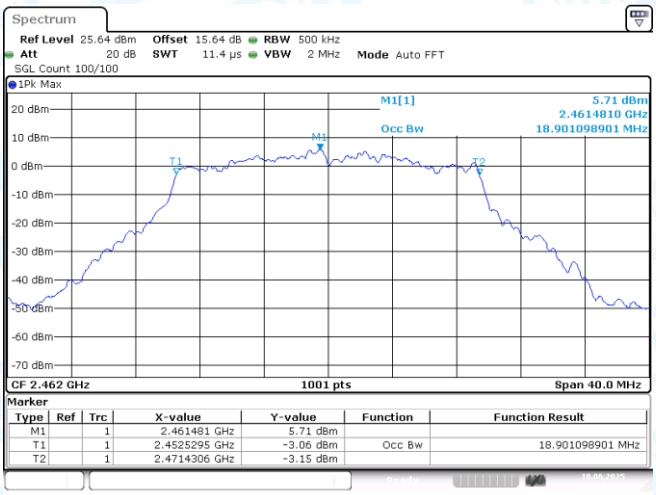


11AX20MIMO-Ant1-2462

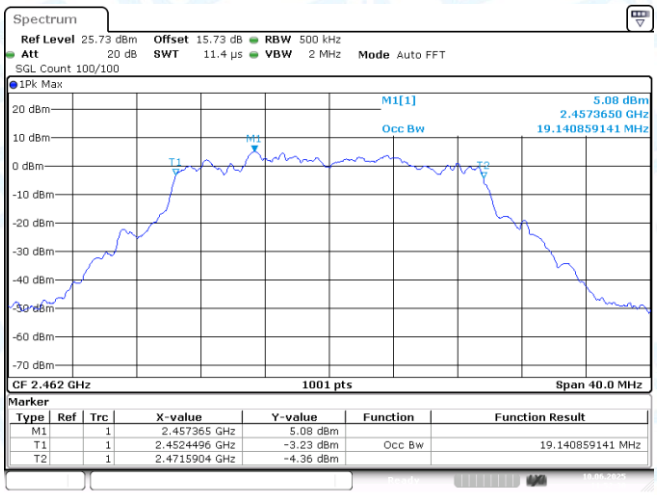


11AX20MIMO-Ant2-2462

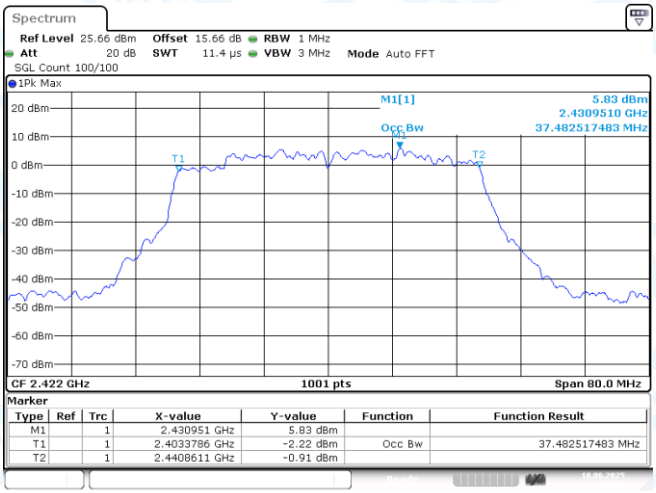


11AX40MIMO-Ant1-2422

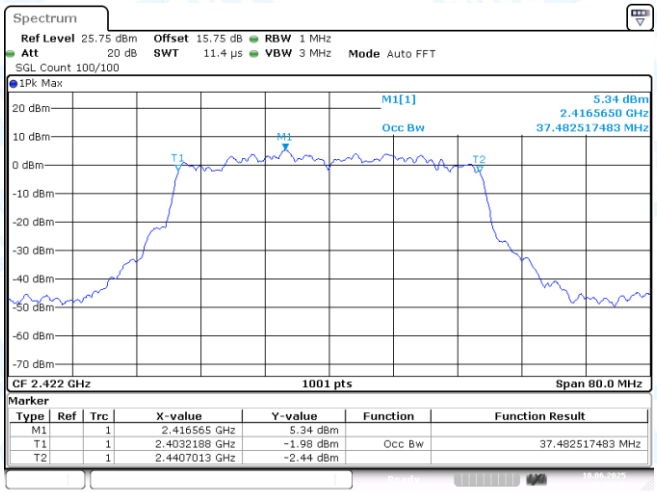


11AX40MIMO-Ant2-2422

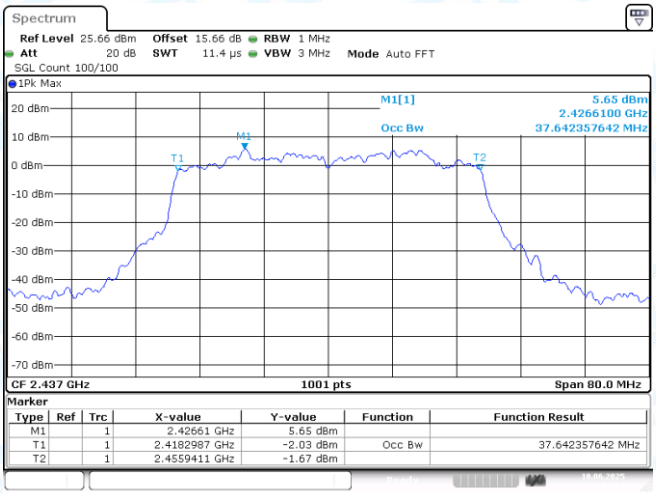


11AX40MIMO-Ant1-2437

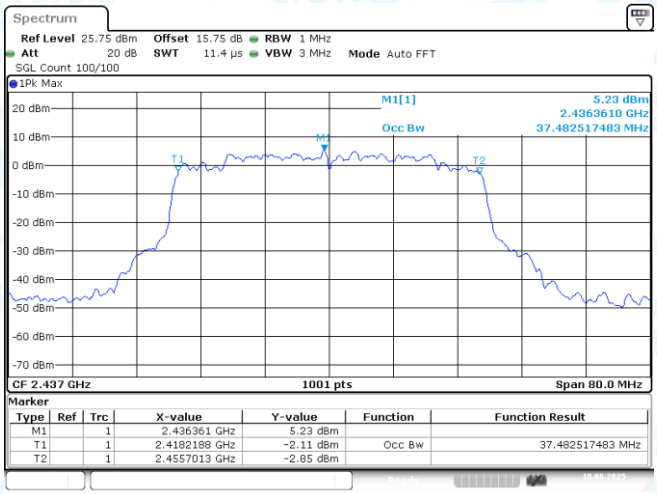


11AX40MIMO-Ant2-2437

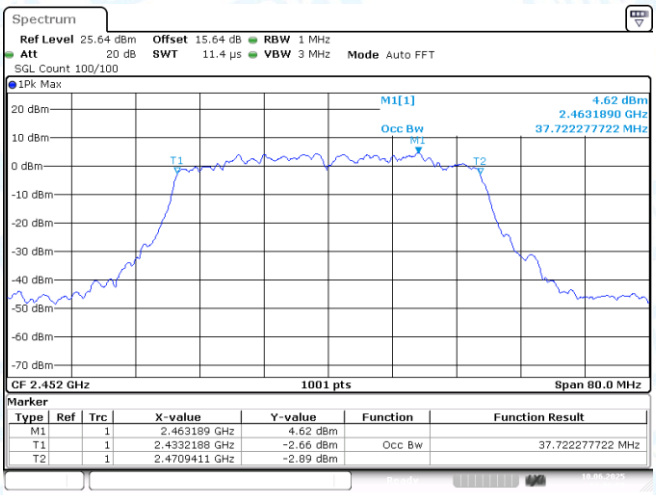


11AX40MIMO-Ant1-2452

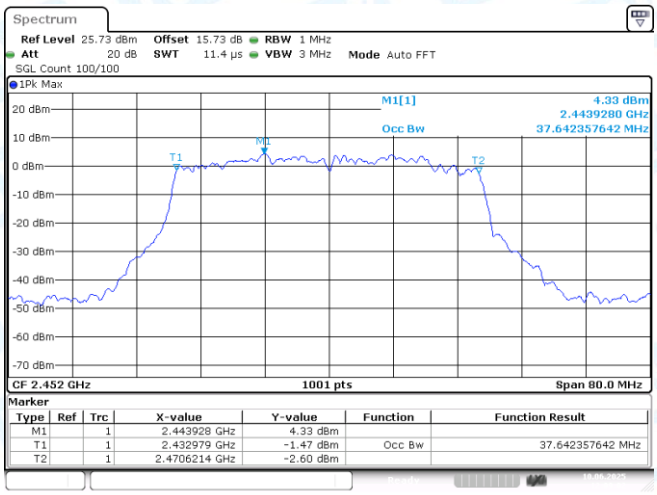


11AX40MIMO-Ant2-2452

# 3: Maximum conducted output power

## 3.1 Test Result Average

| Test Mode | Ant. | Frequency [MHz] | Result [dBm] | Limit [dBm] | Verdict |
|---|---|---|---|---|---|
| 11B-CDD | Ant1 | 2412 | 14.57 | ≤30.00 | PASS |
| 11B-CDD | Ant2 | 2412 | 14.30 | ≤30.00 | PASS |
| 11B-CDD | total | 2412 | 17.45 | ≤30.00 | PASS |
| 11B-CDD | Ant1 | 2437 | 14.35 | ≤30.00 | PASS |
| 11B-CDD | Ant2 | 2437 | 13.41 | ≤30.00 | PASS |
| 11B-CDD | total | 2437 | 16.92 | ≤30.00 | PASS |
| 11B-CDD | Ant1 | 2462 | 14.32 | ≤30.00 | PASS |
| 11B-CDD | Ant2 | 2462 | 14.44 | ≤30.00 | PASS |
| 11B-CDD | total | 2462 | 17.39 | ≤30.00 | PASS |
| 11G-CDD | Ant1 | 2412 | 13.60 | ≤30.00 | PASS |
| 11G-CDD | Ant2 | 2412 | 13.31 | ≤30.00 | PASS |
| 11G-CDD | total | 2412 | 16.47 | ≤30.00 | PASS |
| 11G-CDD | Ant1 | 2437 | 14.89 | ≤30.00 | PASS |
| 11G-CDD | Ant2 | 2437 | 15.08 | ≤30.00 | PASS |
| 11G-CDD | total | 2437 | 18.00 | ≤30.00 | PASS |
| 11G-CDD | Ant1 | 2462 | 14.69 | ≤30.00 | PASS |
| 11G-CDD | Ant2 | 2462 | 14.97 | ≤30.00 | PASS |
| 11G-CDD | total | 2462 | 17.84 | ≤30.00 | PASS |
| 11N20MIMO | Ant1 | 2412 | 13.91 | ≤30.00 | PASS |
| 11N20MIMO | Ant2 | 2412 | 12.83 | ≤30.00 | PASS |
| 11N20MIMO | total | 2412 | 16.41 | ≤30.00 | PASS |
| 11N20MIMO | Ant1 | 2437 | 14.73 | ≤30.00 | PASS |
| 11N20MIMO | Ant2 | 2437 | 14.76 | ≤30.00 | PASS |
| 11N20MIMO | total | 2437 | 17.76 | ≤30.00 | PASS |
| 11N20MIMO | Ant1 | 2462 | 14.94 | ≤30.00 | PASS |
| 11N20MIMO | Ant2 | 2462 | 14.94 | ≤30.00 | PASS |
| 11N20MIMO | total | 2462 | 17.95 | ≤30.00 | PASS |
| 11N40MIMO | Ant1 | 2422 | 12.95 | ≤30.00 | PASS |
| 11N40MIMO | Ant2 | 2422 | 12.81 | ≤30.00 | PASS |
| 11N40MIMO | total | 2422 | 15.89 | ≤30.00 | PASS |
| 11N40MIMO | Ant1 | 2437 | 13.45 | ≤30.00 | PASS |
| 11N40MIMO | Ant2 | 2437 | 13.58 | ≤30.00 | PASS |
| 11N40MIMO | total | 2437 | 16.53 | ≤30.00 | PASS |
| 11N40MIMO | Ant1 | 2452 | 12.69 | ≤30.00 | PASS |
| 11N40MIMO | Ant2 | 2452 | 13.78 | ≤30.00 | PASS |
| 11N40MIMO | total | 2452 | 16.28 | ≤30.00 | PASS |
| 11AX20MIMO | Ant1 | 2412 | 10.78 | ≤30.00 | PASS |
| 11AX20MIMO | Ant2 | 2412 | 10.38 | ≤30.00 | PASS |
| 11AX20MIMO | total | 2412 | 13.59 | ≤30.00 | PASS |
| 11AX20MIMO | Ant1 | 2437 | 10.87 | ≤30.00 | PASS |
| 11AX20MIMO | Ant2 | 2437 | 10.19 | ≤30.00 | PASS |

| | | | | | |
|---|---|---|---|---|---|
| 11AX20MIMO | total | 2437 | 13.55 | ≤30.00 | PASS |
| 11AX20MIMO | Ant1 | 2462 | 10.82 | ≤30.00 | PASS |
| 11AX20MIMO | Ant2 | 2462 | 10.47 | ≤30.00 | PASS |
| 11AX20MIMO | total | 2462 | 13.66 | ≤30.00 | PASS |
| 11AX40MIMO | Ant1 | 2422 | 11.07 | ≤30.00 | PASS |
| 11AX40MIMO | Ant2 | 2422 | 10.84 | ≤30.00 | PASS |
| 11AX40MIMO | total | 2422 | 13.97 | ≤30.00 | PASS |
| 11AX40MIMO | Ant1 | 2437 | 11.25 | ≤30.00 | PASS |
| 11AX40MIMO | Ant2 | 2437 | 10.89 | ≤30.00 | PASS |
| 11AX40MIMO | total | 2437 | 14.08 | ≤30.00 | PASS |
| 11AX40MIMO | Ant1 | 2452 | 10.84 | ≤30.00 | PASS |
| 11AX40MIMO | Ant2 | 2452 | 10.82 | ≤30.00 | PASS |
| 11AX40MIMO | total | 2452 | 13.84 | ≤30.00 | PASS |

Note: The Duty Cycle Factor is compensated in the graph.

# 4: Maximum power spectral density

## 4.1 Test Result

| TestMode | Ant. | Frequency [MHz] | RawData [dBm/3kHz] | DC Factory | Result [dBm/3kHz] | Limit [dBm/3kHz] | Verdict |
|---|---|---|---|---|---|---|---|
| 11B-CDD | Ant1 | 2412 | -16.57 | 0.05 | -16.52 | ≤8.00 | PASS |
| 11B-CDD | Ant2 | 2412 | -16.77 | 0.05 | -16.72 | ≤8.00 | PASS |
| 11B-CDD | total | 2412 | --- | --- | -13.61 | ≤8.00 | PASS |
| 11B-CDD | Ant1 | 2437 | -16.23 | 0.03 | -16.20 | ≤8.00 | PASS |
| 11B-CDD | Ant2 | 2437 | -16.09 | 0.03 | -16.06 | ≤8.00 | PASS |
| 11B-CDD | total | 2437 | --- | --- | -13.12 | ≤8.00 | PASS |
| 11B-CDD | Ant1 | 2462 | -16.46 | 0.03 | -16.43 | ≤8.00 | PASS |
| 11B-CDD | Ant2 | 2462 | -16.03 | 0.03 | -16.00 | ≤8.00 | PASS |
| 11B-CDD | total | 2462 | --- | --- | -13.20 | ≤8.00 | PASS |
| 11G-CDD | Ant1 | 2412 | -17.19 | 0.86 | -16.33 | ≤8.00 | PASS |
| 11G-CDD | Ant2 | 2412 | -18.08 | 1.12 | -16.96 | ≤8.00 | PASS |
| 11G-CDD | total | 2412 | --- | --- | -13.62 | ≤8.00 | PASS |
| 11G-CDD | Ant1 | 2437 | -15.85 | 0.98 | -14.87 | ≤8.00 | PASS |
| 11G-CDD | Ant2 | 2437 | -16.24 | 0.97 | -15.27 | ≤8.00 | PASS |
| 11G-CDD | total | 2437 | --- | --- | -12.06 | ≤8.00 | PASS |
| 11G-CDD | Ant1 | 2462 | -16.62 | 0.85 | -15.77 | ≤8.00 | PASS |
| 11G-CDD | Ant2 | 2462 | -16.36 | 0.87 | -15.49 | ≤8.00 | PASS |
| 11G-CDD | total | 2462 | --- | --- | -12.62 | ≤8.00 | PASS |
| 11N20MIMO | Ant1 | 2412 | -18.01 | 0.89 | -17.12 | ≤8.00 | PASS |
| 11N20MIMO | Ant2 | 2412 | -18.09 | 0.73 | -17.36 | ≤8.00 | PASS |
| 11N20MIMO | total | 2412 | --- | --- | -14.23 | ≤8.00 | PASS |
| 11N20MIMO | Ant1 | 2437 | -17.17 | 0.58 | -16.59 | ≤8.00 | PASS |
| 11N20MIMO | Ant2 | 2437 | -16 | 0.58 | -15.42 | ≤8.00 | PASS |
| 11N20MIMO | total | 2437 | --- | --- | -12.96 | ≤8.00 | PASS |
| 11N20MIMO | Ant1 | 2462 | -17.27 | 0.89 | -16.38 | ≤8.00 | PASS |
| 11N20MIMO | Ant2 | 2462 | -16.92 | 0.59 | -16.33 | ≤8.00 | PASS |
| 11N20MIMO | total | 2462 | --- | --- | -13.34 | ≤8.00 | PASS |
| 11N40MIMO | Ant1 | 2422 | -21.17 | 0.00 | -21.17 | ≤8.00 | PASS |
| 11N40MIMO | Ant2 | 2422 | -20.93 | 0.00 | -20.93 | ≤8.00 | PASS |
| 11N40MIMO | total | 2422 | --- | --- | -18.04 | ≤8.00 | PASS |
| 11N40MIMO | Ant1 | 2437 | -21.26 | 0.57 | -20.69 | ≤8.00 | PASS |
| 11N40MIMO | Ant2 | 2437 | -20.56 | 0.60 | -19.96 | ≤8.00 | PASS |
| 11N40MIMO | total | 2437 | --- | --- | -17.30 | ≤8.00 | PASS |
| 11N40MIMO | Ant1 | 2452 | -21.52 | 0.00 | -21.52 | ≤8.00 | PASS |
| 11N40MIMO | Ant2 | 2452 | -21.11 | 0.84 | -20.27 | ≤8.00 | PASS |
| 11N40MIMO | total | 2452 | --- | --- | -17.84 | ≤8.00 | PASS |
| 11AX20MIMO | Ant1 | 2412 | -22.67 | 0.11 | -22.56 | ≤8.00 | PASS |
| 11AX20MIMO | Ant2 | 2412 | -22.83 | 0.10 | -22.73 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2412 | --- | --- | -19.63 | ≤8.00 | PASS |
| 11AX20MIMO | Ant1 | 2437 | -22.68 | 0.11 | -22.57 | ≤8.00 | PASS |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 11AX20MIMO | Ant2 | 2437 | -23.34 | 0.00 | -23.34 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2437 | --- | --- | -19.93 | ≤8.00 | PASS |
| 11AX20MIMO | Ant1 | 2462 | -22.79 | 0.11 | -22.68 | ≤8.00 | PASS |
| 11AX20MIMO | Ant2 | 2462 | -23.29 | 0.11 | -23.18 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2462 | --- | --- | -19.91 | ≤8.00 | PASS |
| 11AX40MIMO | Ant1 | 2422 | -25.58 | 0.11 | -25.47 | ≤8.00 | PASS |
| 11AX40MIMO | Ant2 | 2422 | -25.89 | 0.18 | -25.71 | ≤8.00 | PASS |
| 11AX40MIMO | total | 2422 | --- | --- | -22.58 | ≤8.00 | PASS |
| 11AX40MIMO | Ant1 | 2437 | -25.92 | 0.11 | -25.81 | ≤8.00 | PASS |
| 11AX40MIMO | Ant2 | 2437 | -25.84 | 0.11 | -25.73 | ≤8.00 | PASS |
| 11AX40MIMO | total | 2437 | --- | --- | -22.76 | ≤8.00 | PASS |
| 11AX40MIMO | Ant1 | 2452 | -25.59 | 0.11 | -25.48 | ≤8.00 | PASS |
| 11AX40MIMO | Ant2 | 2452 | -25.5 | 0.16 | -25.34 | ≤8.00 | PASS |
| 11AX40MIMO | total | 2452 | --- | --- | -22.40 | ≤8.00 | PASS |

Note: The Duty Cycle Factor is compensated in the graph.

## 4.2 Test Graphs

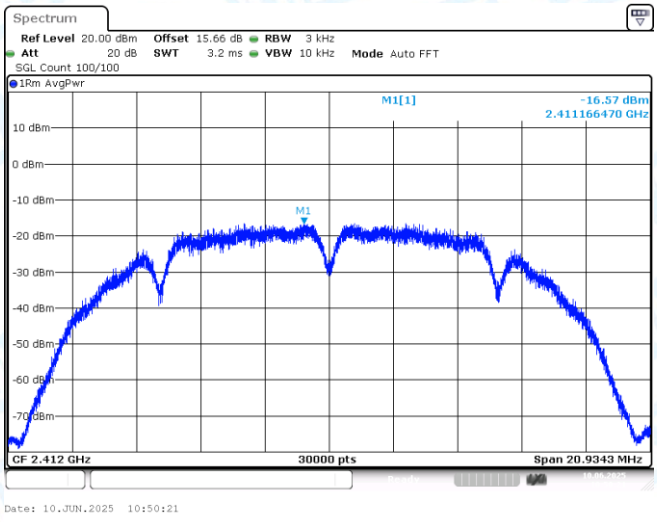


11B-CDD-Ant1-2412-PASS

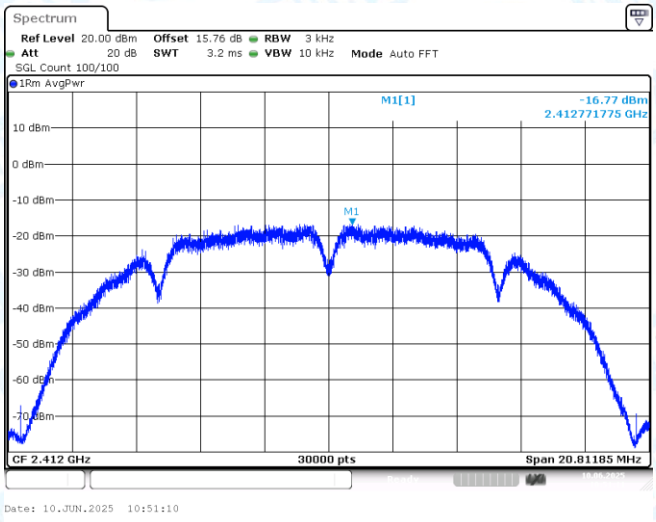


11B-CDD-Ant2-2412-PASS

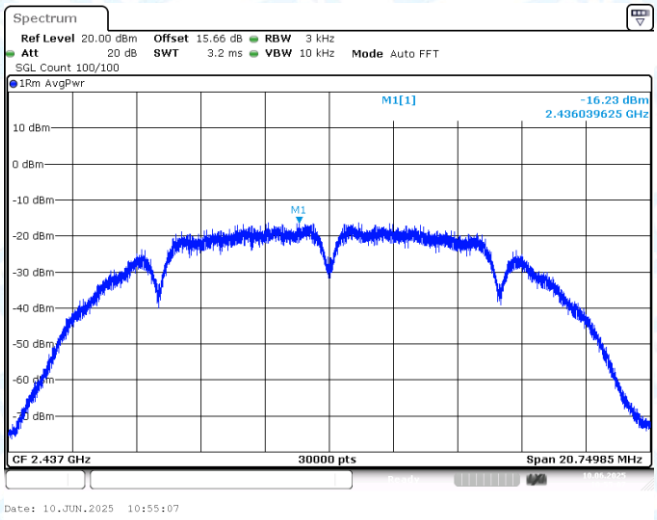


11B-CDD-Ant1-2437-PASS

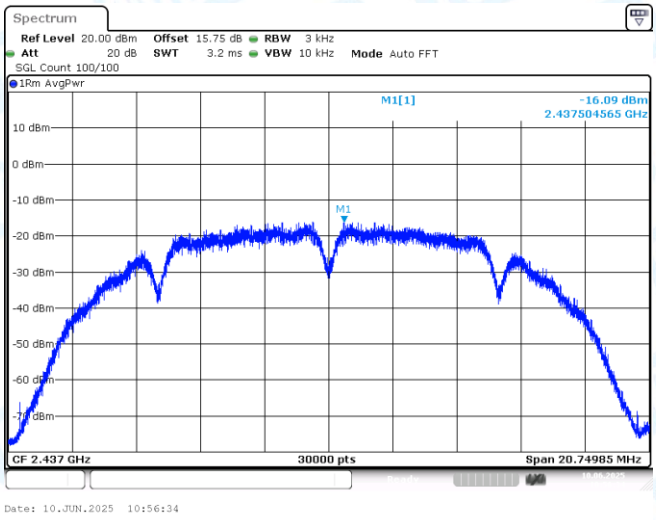


11B-CDD-Ant2-2437-PASS

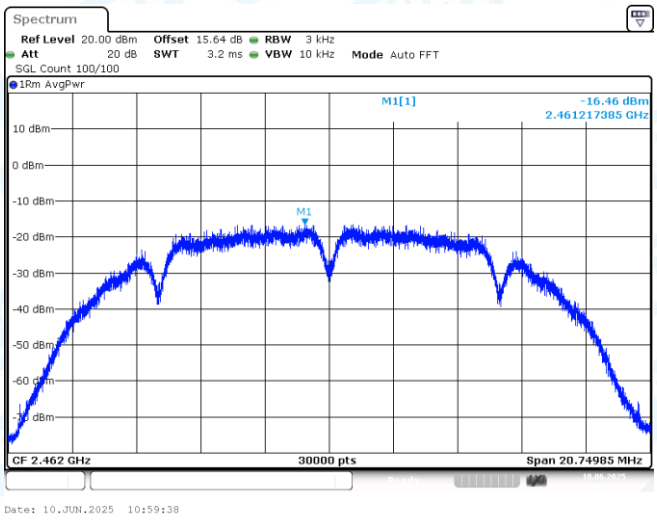


11B-CDD-Ant1-2462-PASS

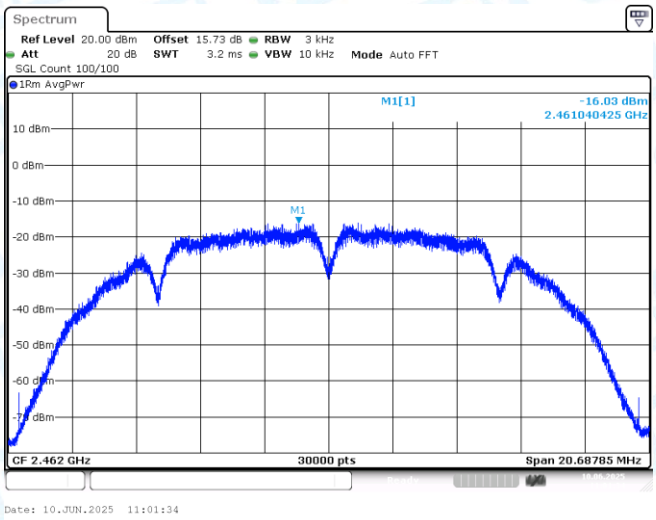


11B-CDD-Ant2-2462-PASS

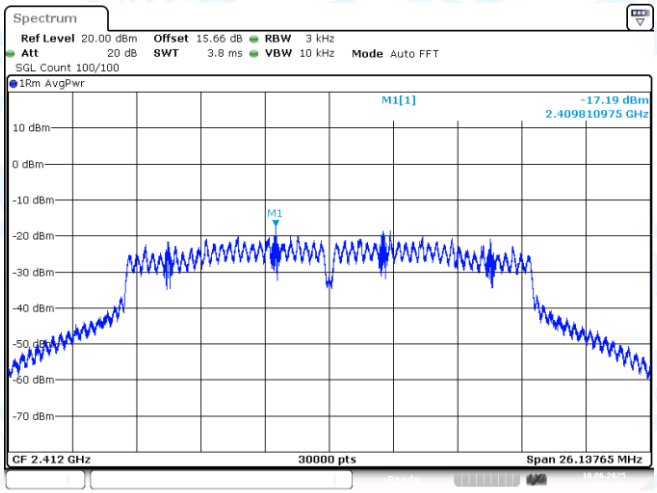


11G-CDD-Ant1-2412-PASS

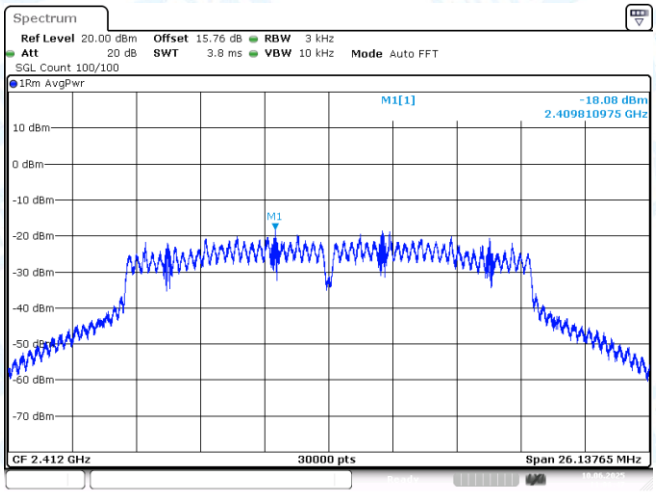


11G-CDD-Ant2-2412-PASS

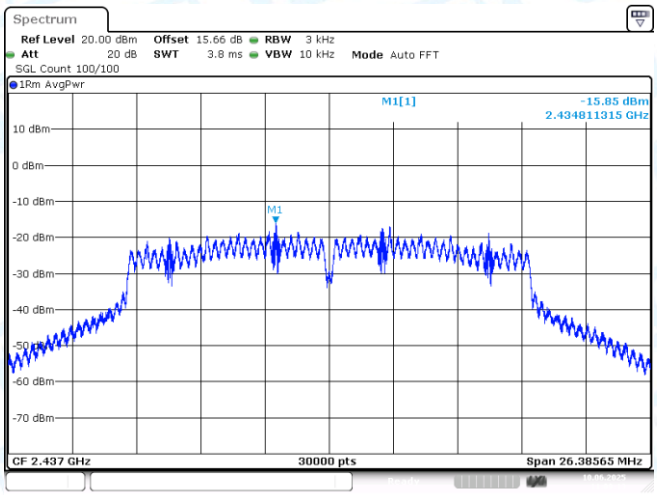


11G-CDD-Ant1-2437-PASS

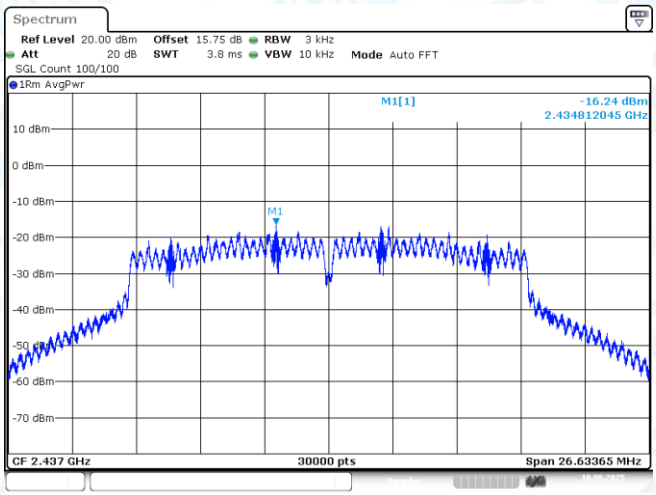


11G-CDD-Ant2-2437-PASS

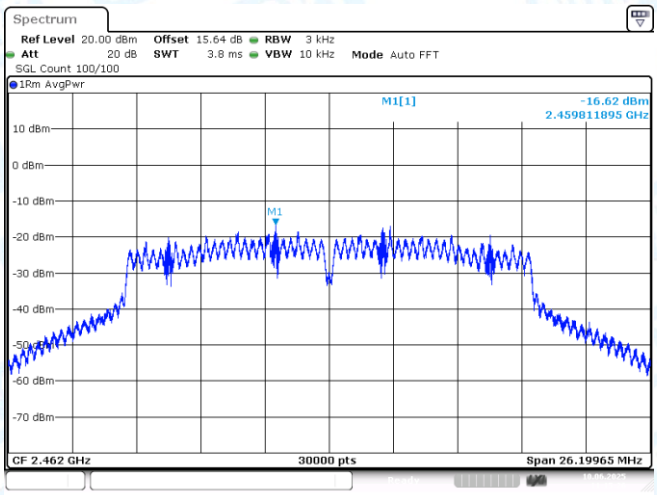


11G-CDD-Ant1-2462-PASS

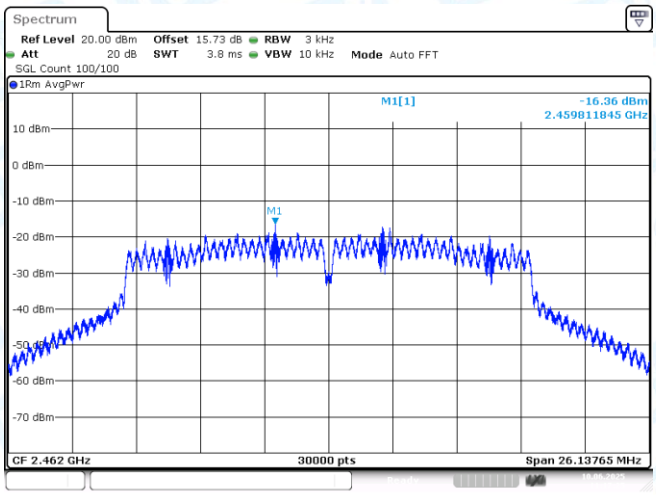


11G-CDD-Ant2-2462-PASS

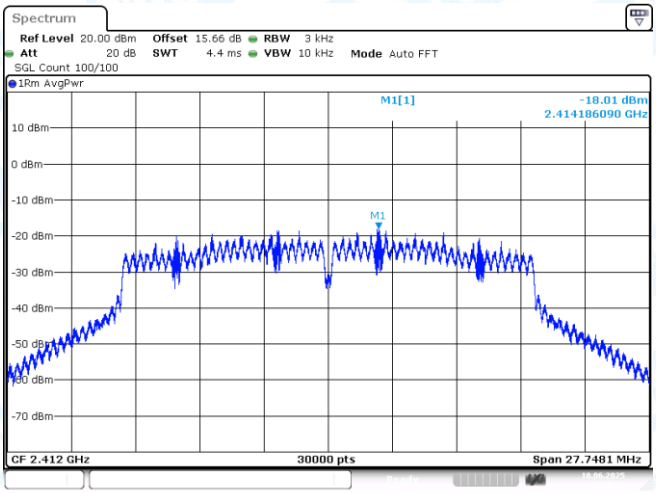


11N20MIMO-Ant1-2412-PASS

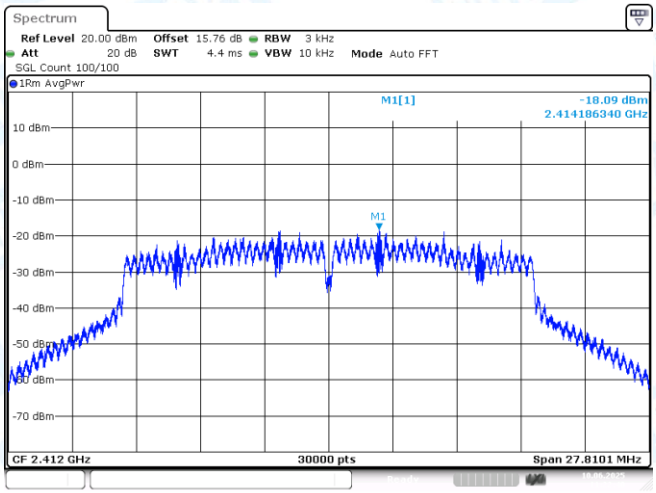


11N20MIMO-Ant2-2412-PASS

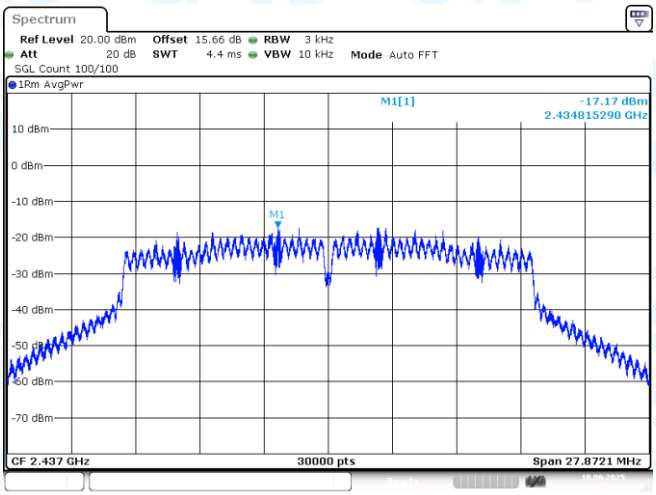


11N20MIMO-Ant1-2437-PASS

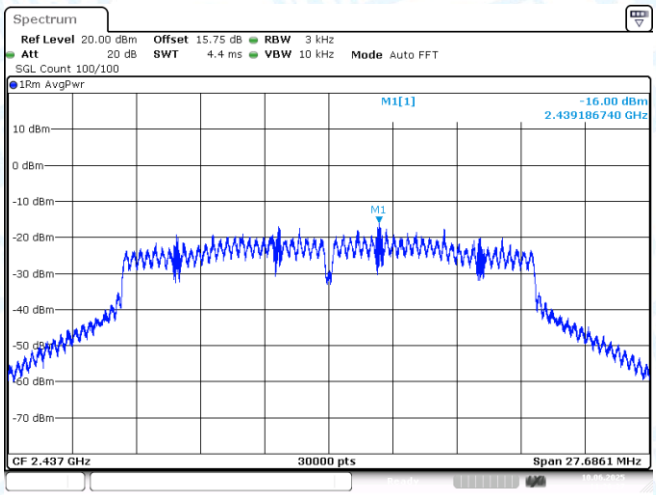


11N20MIMO-Ant2-2437-PASS

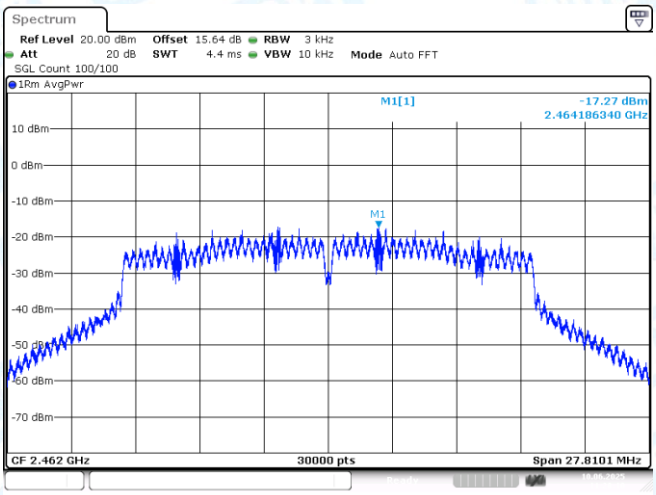


11N20MIMO-Ant1-2462-PASS

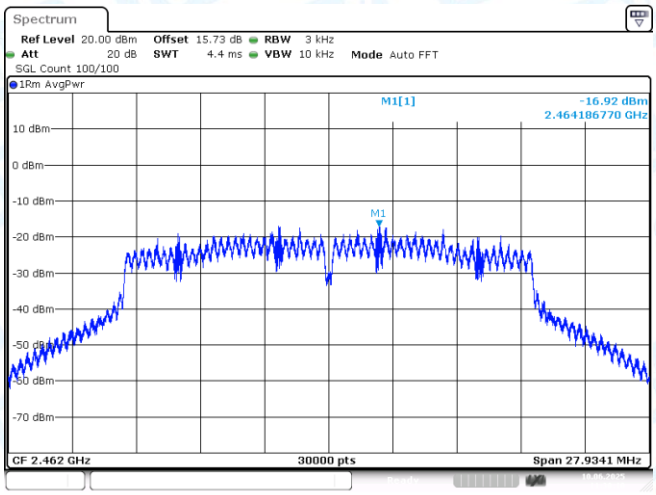


11N20MIMO-Ant2-2462-PASS

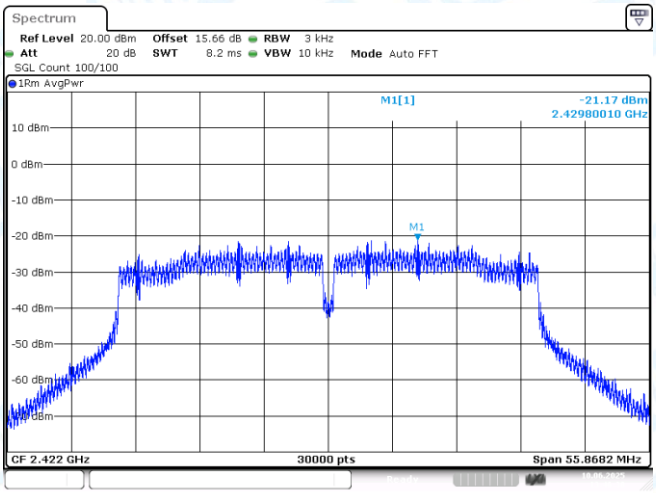


11N40MIMO-Ant1-2422-PASS

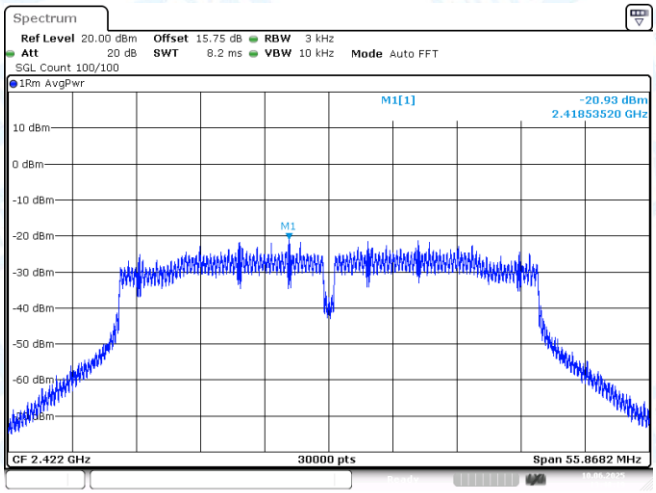


11N40MIMO-Ant2-2422-PASS

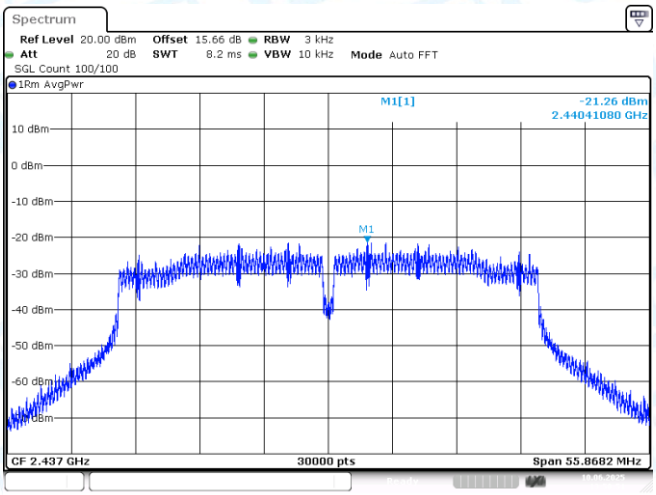


11N40MIMO-Ant1-2437-PASS

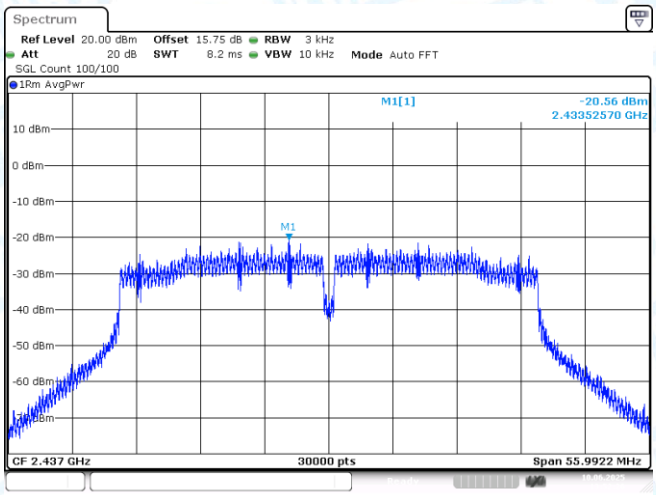


11N40MIMO-Ant2-2437-PASS

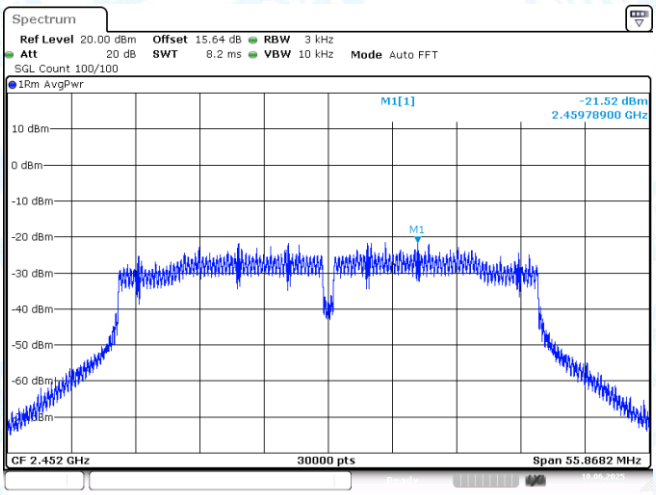


11N40MIMO-Ant1-2452-PASS

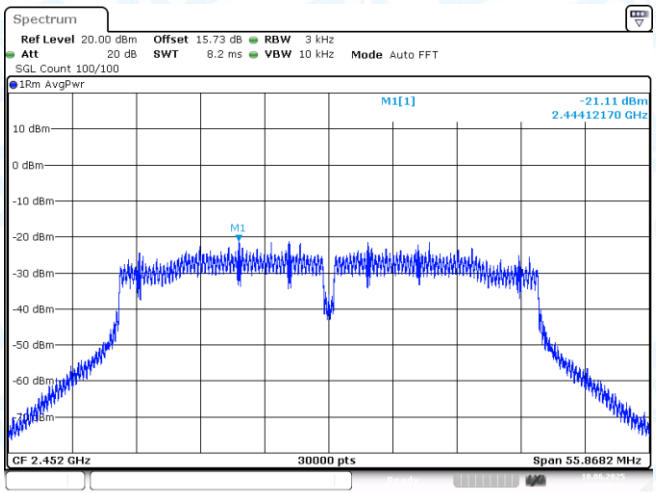


11N40MIMO-Ant2-2452-PASS

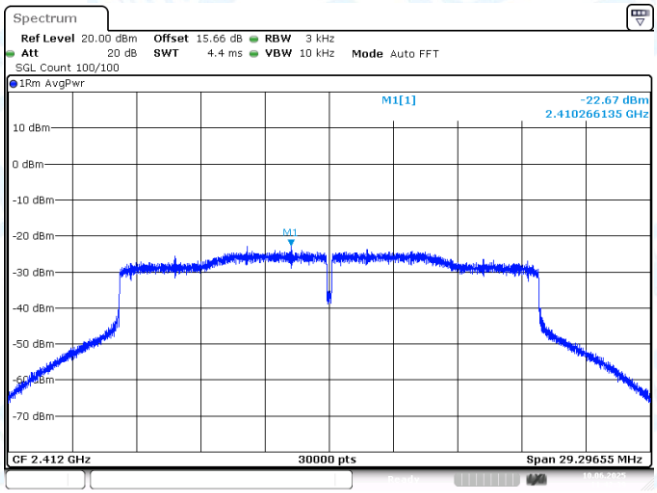


11AX20MIMO-Ant1-2412-PASS

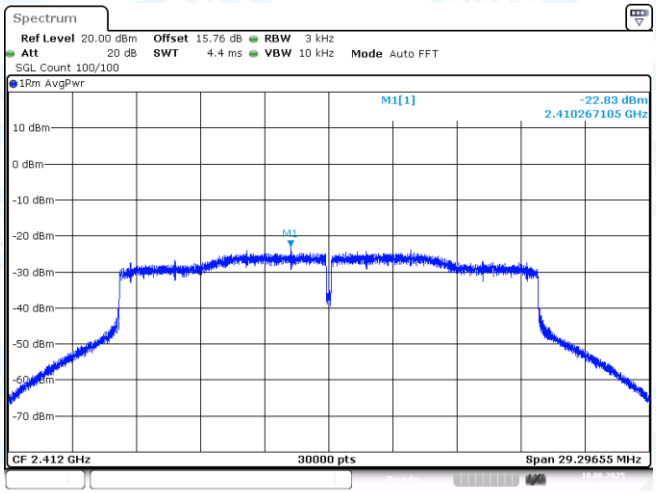


11AX20MIMO-Ant2-2412-PASS

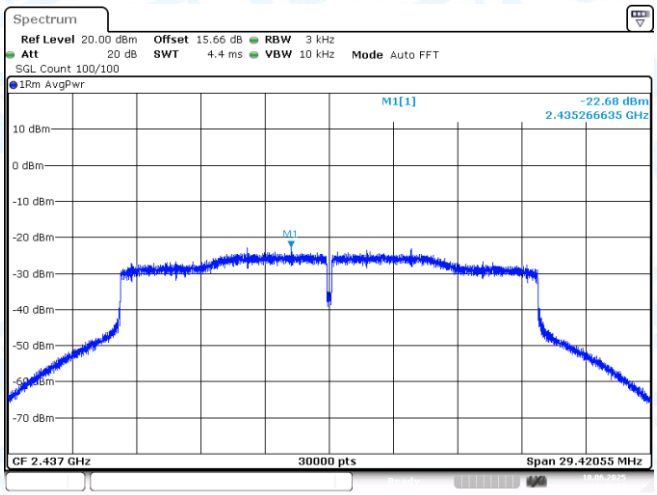


11AX20MIMO-Ant1-2437-PASS

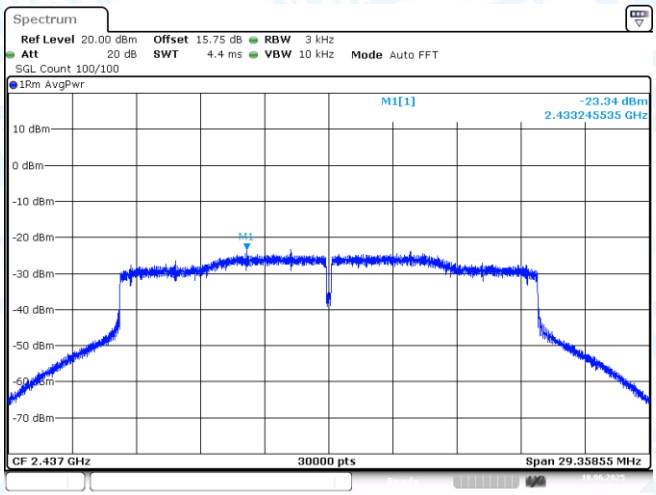


11AX20MIMO-Ant2-2437-PASS

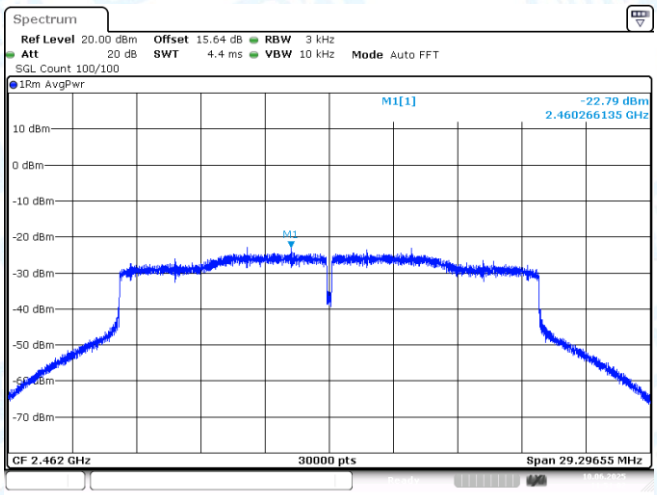


11AX20MIMO-Ant1-2462-PASS

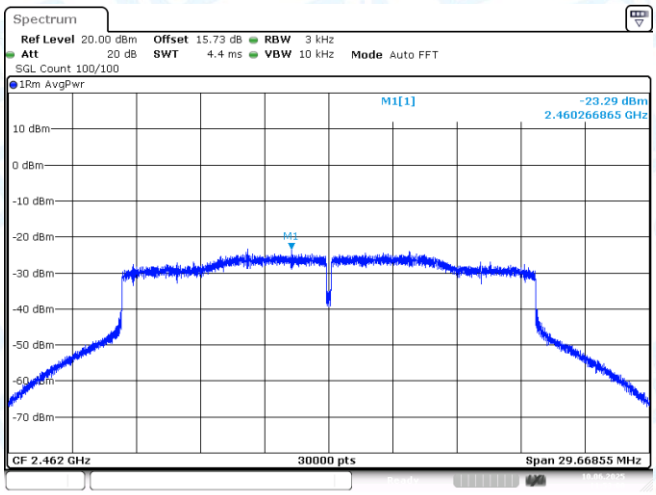


11AX20MIMO-Ant2-2462-PASS