


Case No. : <u>GTS20260605008-4-12</u>	
Ambient Condition: <u>23</u> °C, <u>51</u> %RH	
According Standard: ■Part15E	
Test Date: <u>2026-7.01 2026.8.15</u>	Test Engineer: <u>Evan ouyang</u>

Appendix D.1: Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.440	5170.320	5189.760	---	---
		5200	19.360	5190.400	5209.760	---	---
		5240	19.240	5230.440	5249.680	---	---
11N20SISO	Ant1	5180	20.640	5169.640	5190.280	---	---
		5200	20.360	5189.840	5210.200	---	---
		5240	20.360	5229.800	5250.160	---	---
11N40SISO	Ant1	5190	39.680	5170.160	5209.840	---	---
		5230	40.160	5209.920	5250.080	---	---
11AC20SISO	Ant1	5180	20.440	5169.840	5190.280	---	---
		5200	20.280	5189.920	5210.200	---	---
		5240	20.440	5229.760	5250.200	---	---
11AC40SISO	Ant1	5190	40.160	5169.920	5210.080	---	---
		5230	39.840	5210.160	5250.000	---	---
11AX20SISO	Ant1	5180	21.040	5169.480	5190.520	---	---
		5200	21.160	5189.480	5210.640	---	---
		5240	20.920	5229.480	5250.400	---	---
11AX40SISO	Ant1	5190	40.480	5169.760	5210.240	---	---
		5230	40.720	5209.680	5250.400	---	---

Test Graphs

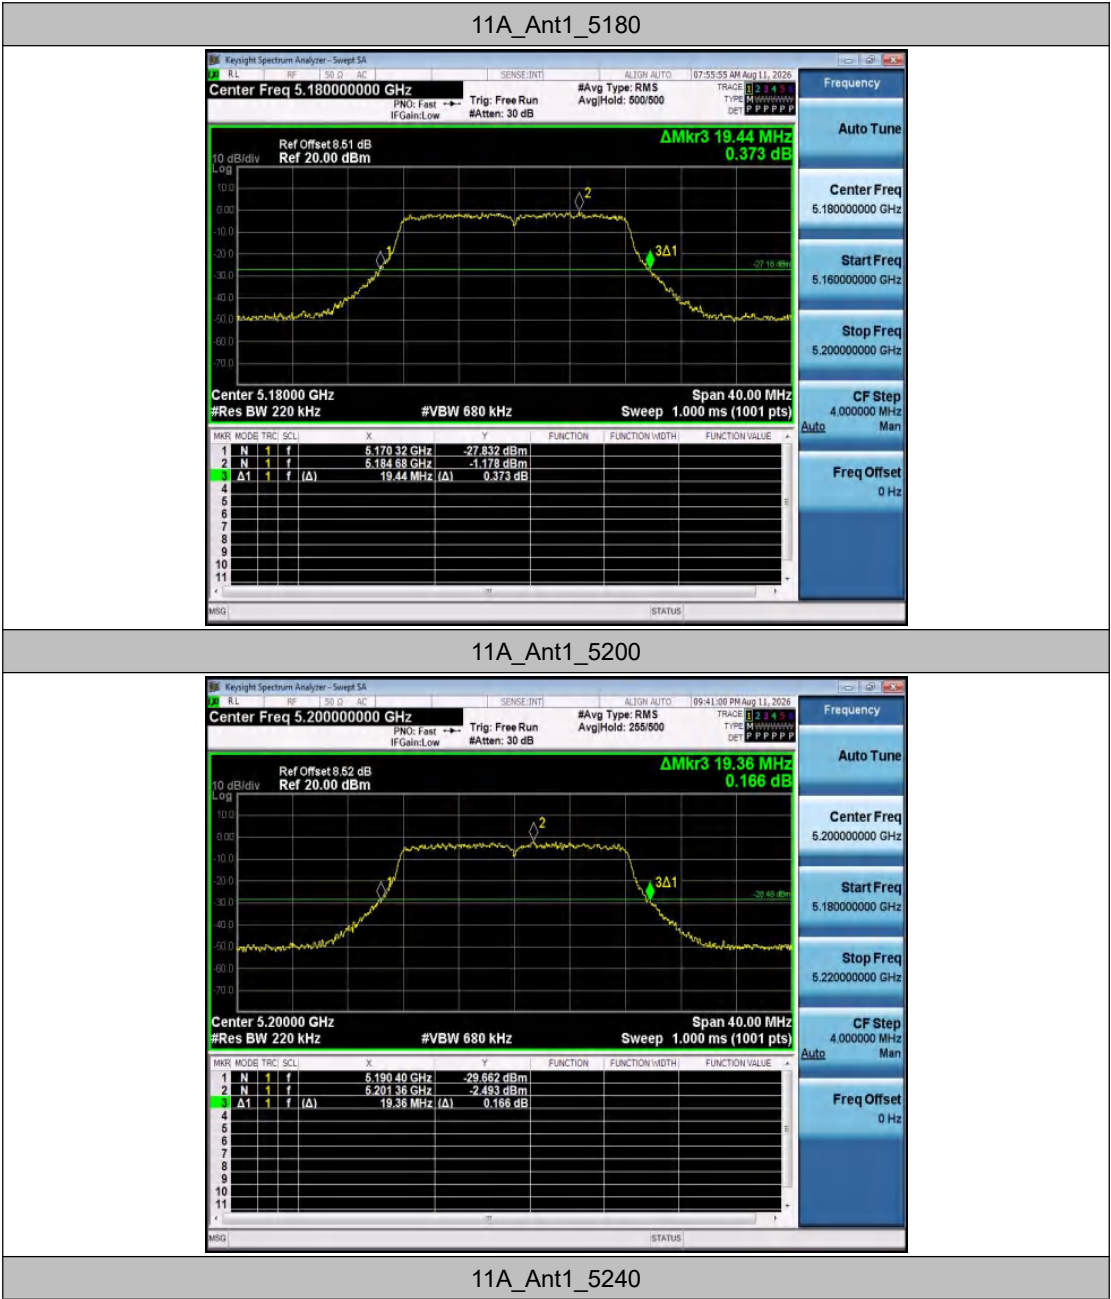



11N20SISO_Ant1_5180



11N20SISO_Ant1_5200







11AC20SISO_Ant1_5180



11AC20SISO_Ant1_5200







11AX20SISO_Ant1_5180



11AX20SISO_Ant1_5200







Appendix D.2: Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.601	5171.7098	5188.3108	---	---
		5200	16.589	5191.7152	5208.3042	---	---
		5240	16.569	5231.7094	5248.2784	---	---
11N20SISO	Ant1	5180	17.748	5171.1478	5188.8958	---	---
		5200	17.717	5191.1462	5208.8632	---	---
		5240	17.723	5231.1382	5248.8612	---	---
11N40SISO	Ant1	5190	36.197	5171.9580	5208.1550	---	---
		5230	36.210	5211.8985	5248.1085	---	---
11AC20SISO	Ant1	5180	17.720	5171.1428	5188.8628	---	---
		5200	17.713	5191.1610	5208.8740	---	---
		5240	17.747	5231.1400	5248.8870	---	---
11AC40SISO	Ant1	5190	36.153	5171.9661	5208.1191	---	---
		5230	36.214	5211.9120	5248.1260	---	---
11AX20SISO	Ant1	5180	19.025	5170.5004	5189.5254	---	---
		5200	19.005	5190.5026	5209.5076	---	---
		5240	19.038	5230.4830	5249.5210	---	---
11AX40SISO	Ant1	5190	37.929	5171.0745	5209.0035	---	---
		5230	37.870	5211.0547	5248.9247	---	---

Test Graphs

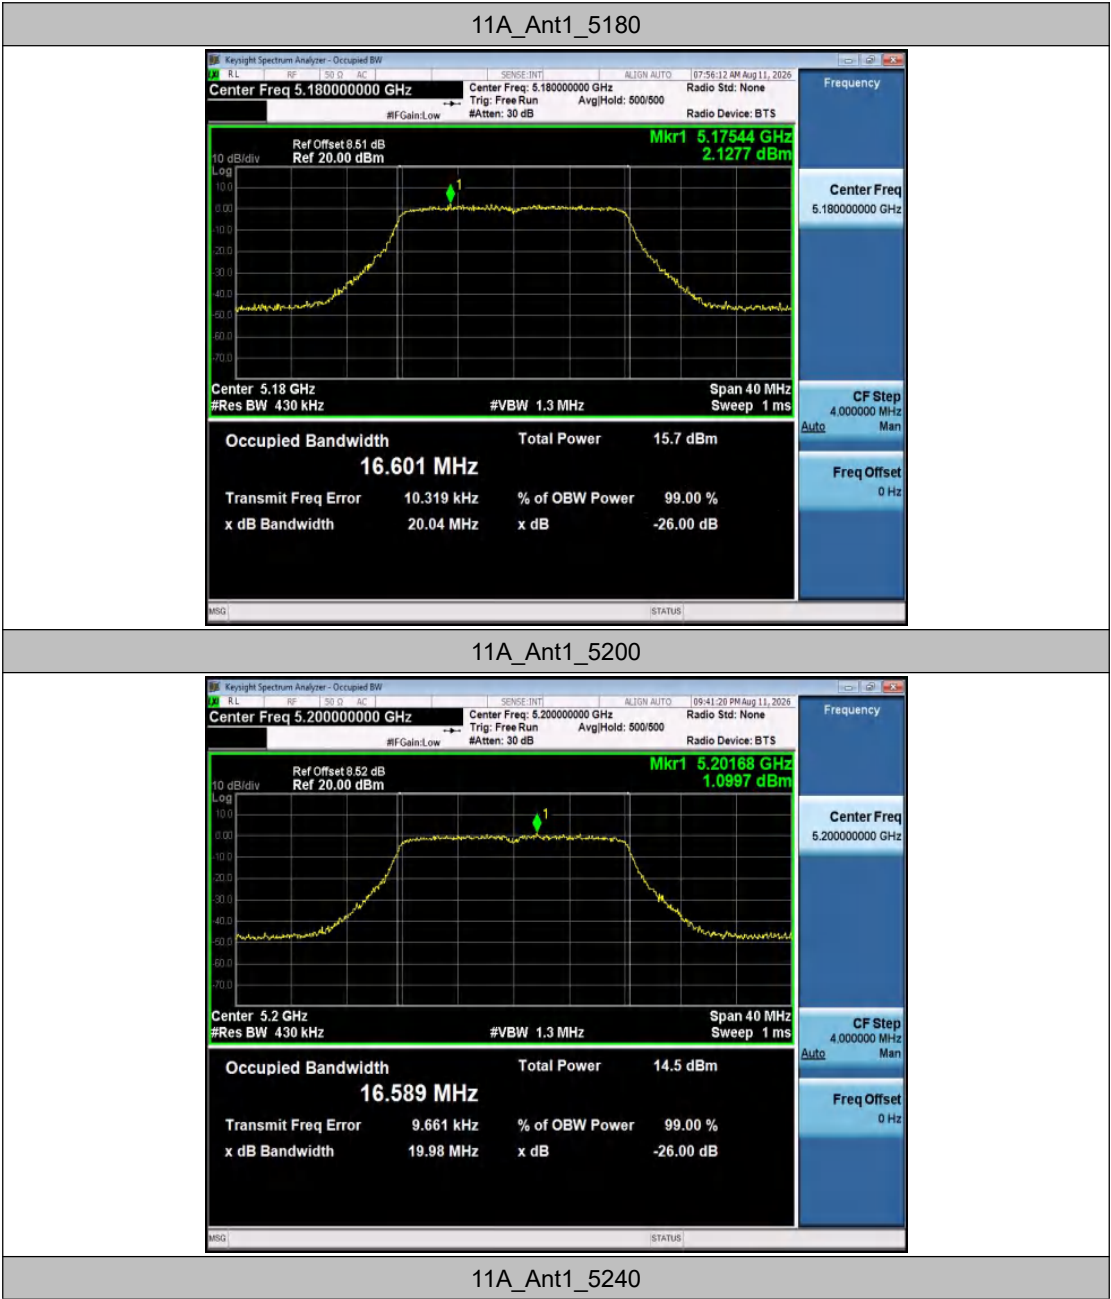


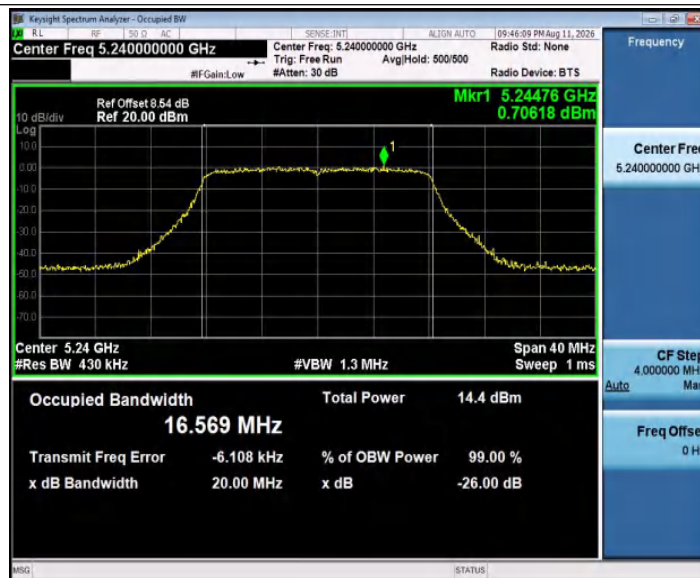



11N20SISO_Ant1_5180



11N20SISO_Ant1_5200

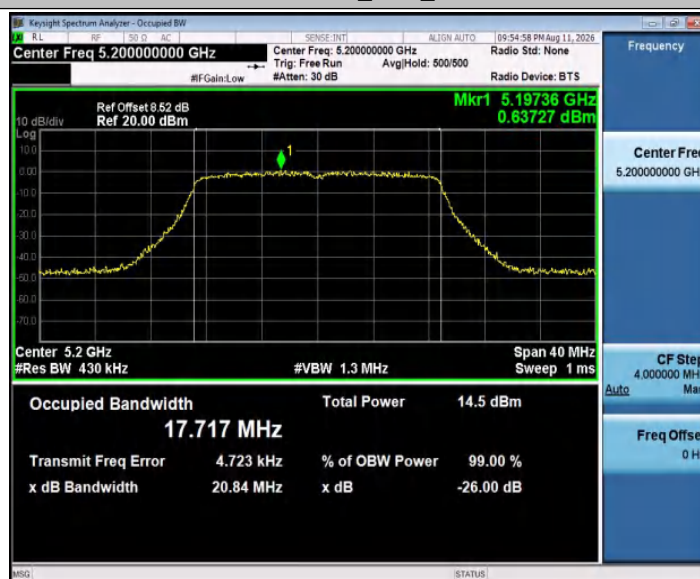

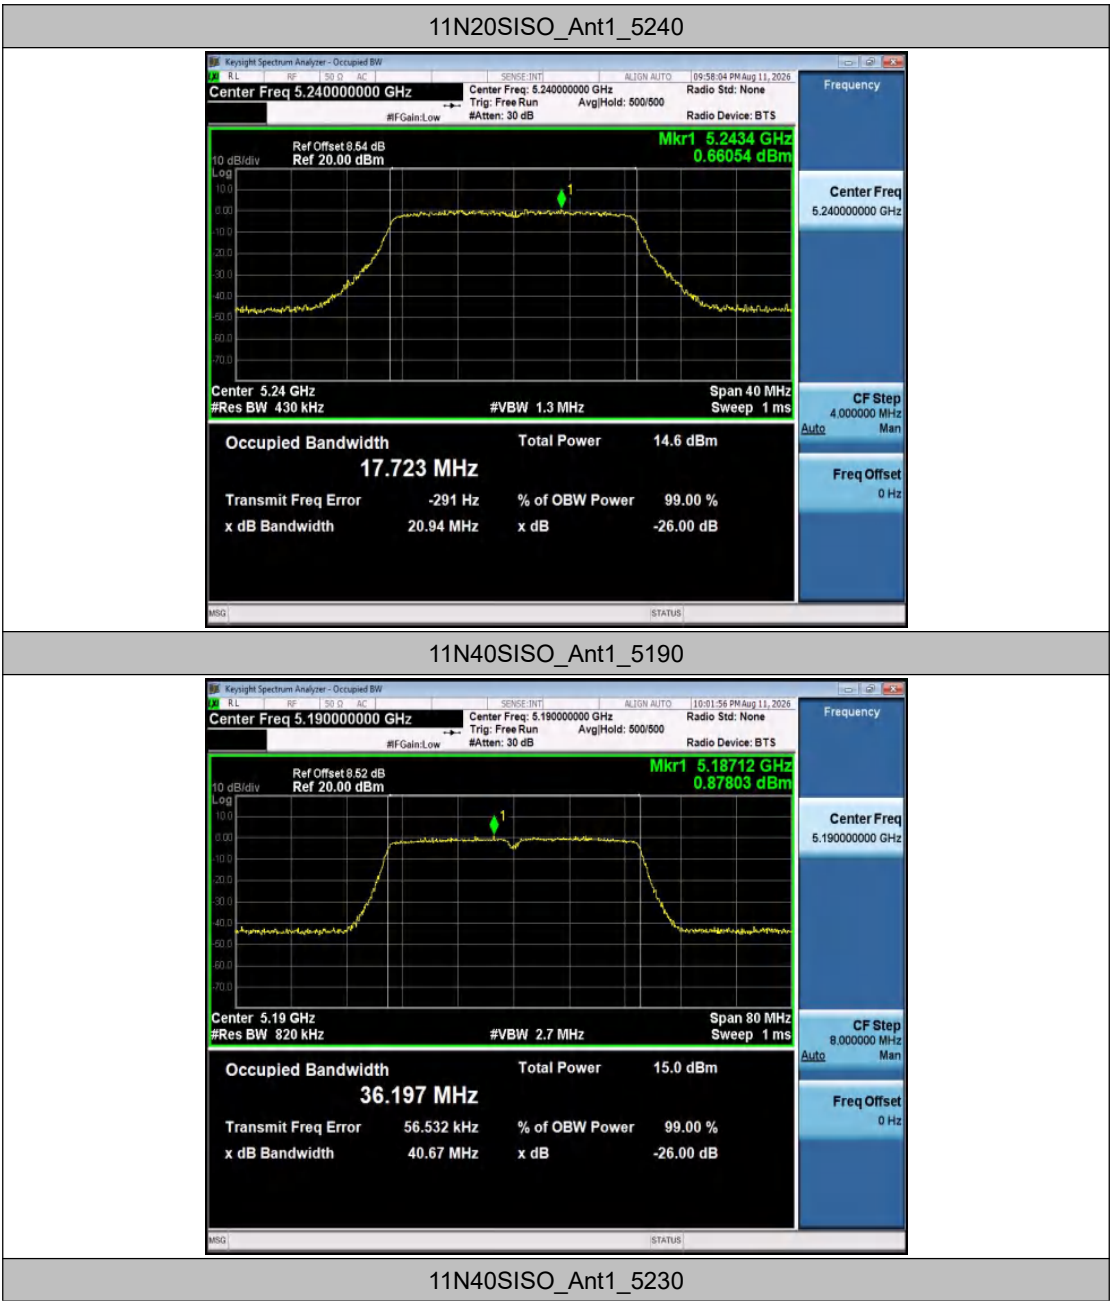


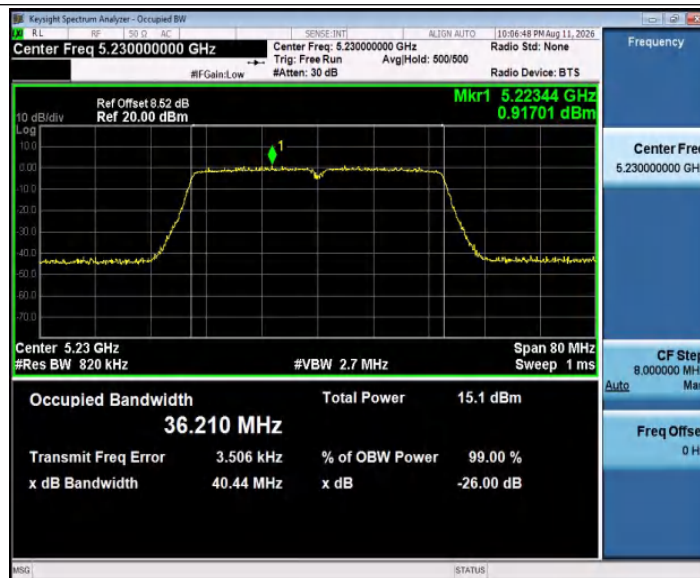



11AC20SISO_Ant1_5180




11AC20SISO_Ant1_5200

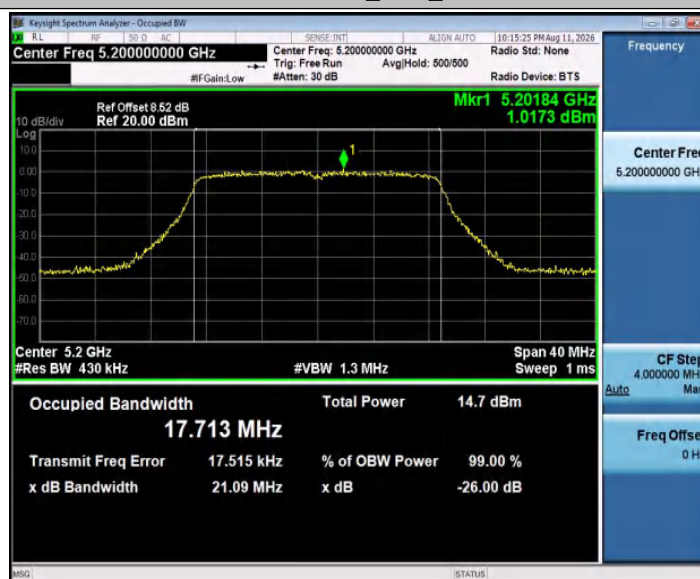

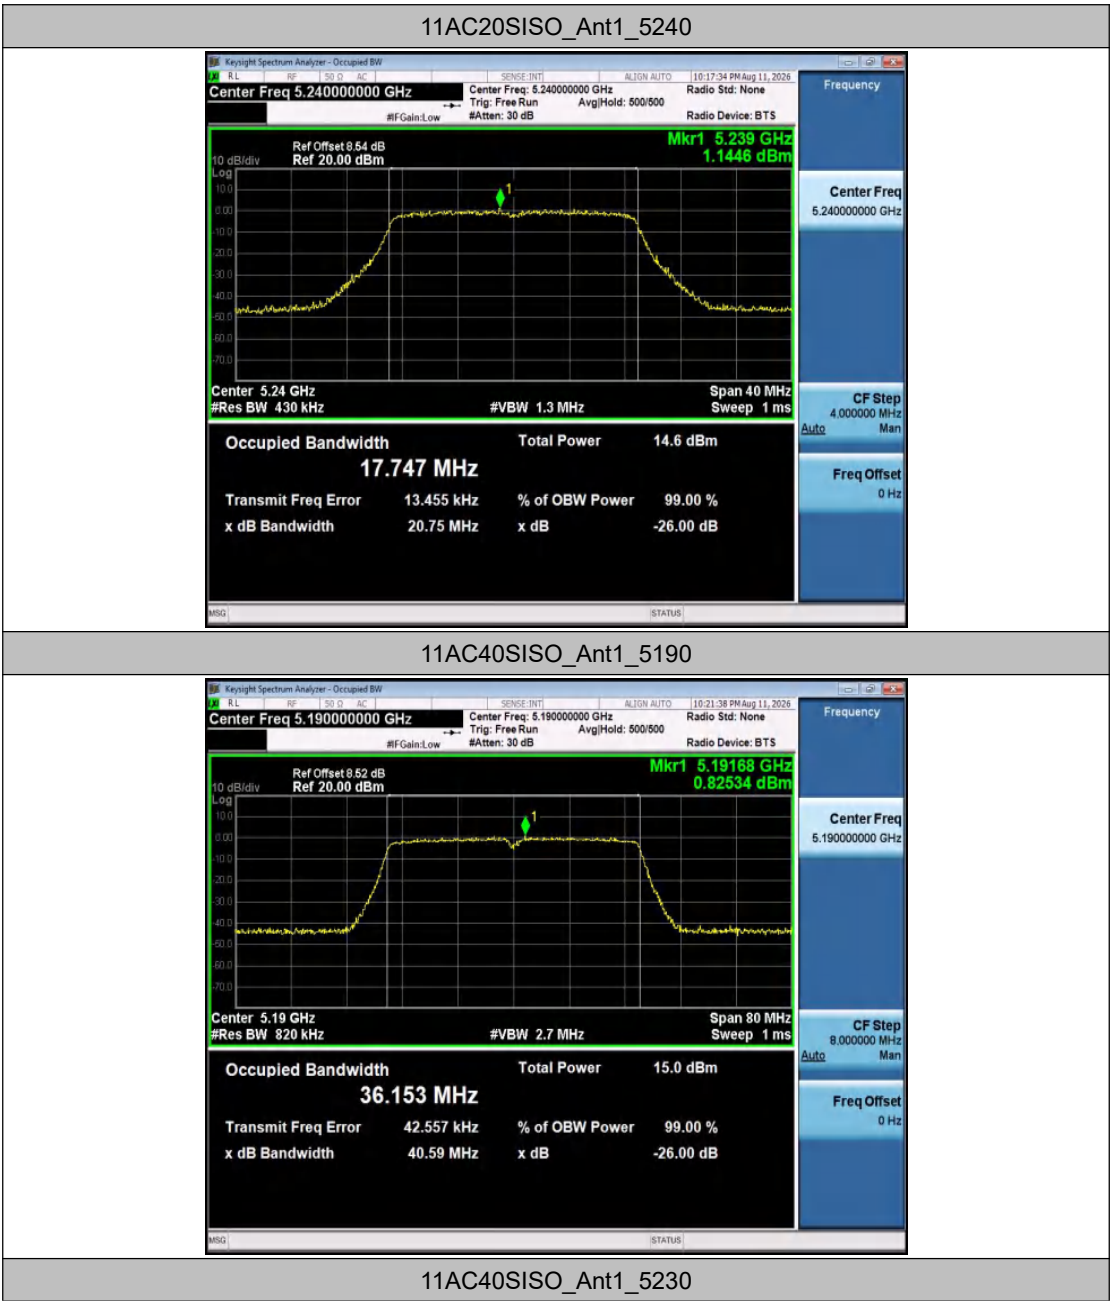


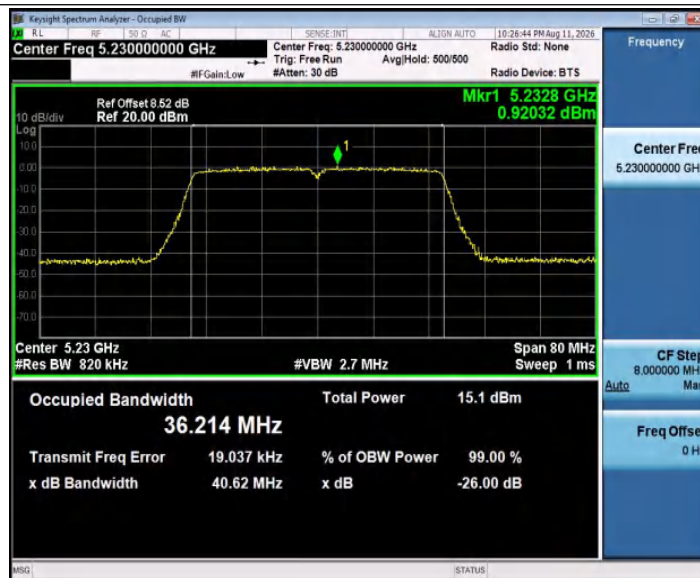


11AX20SISO_Ant1_5180

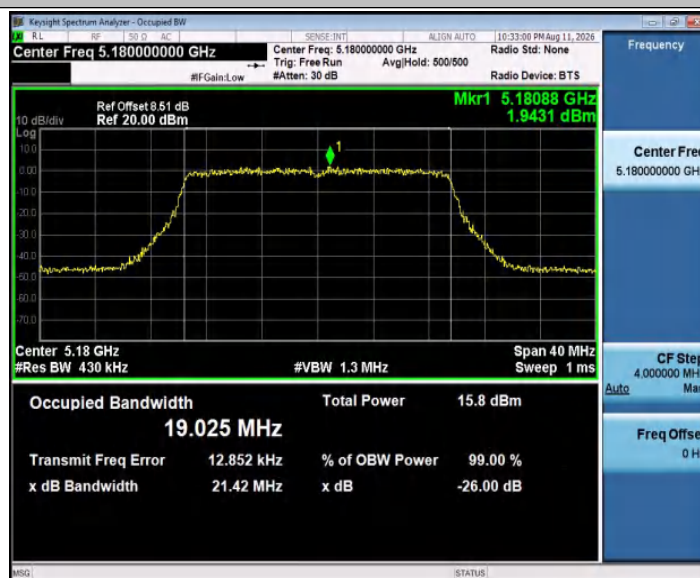

11AX20SISO_Ant1_5200

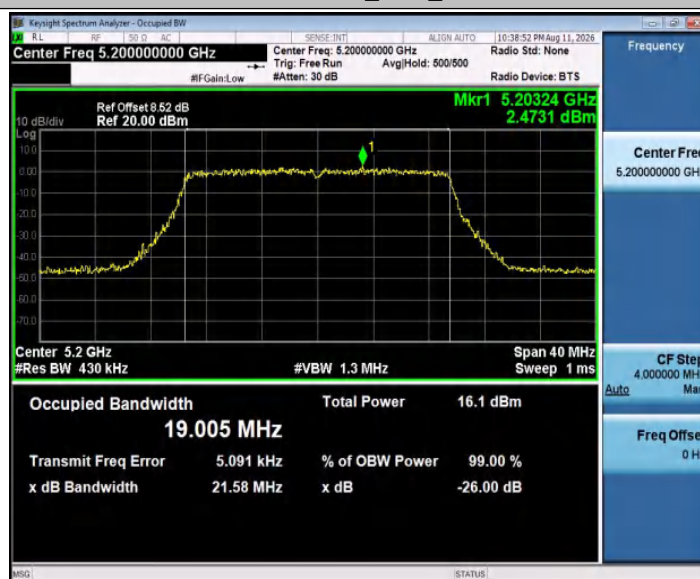


11AX20SISO_Ant1_5240

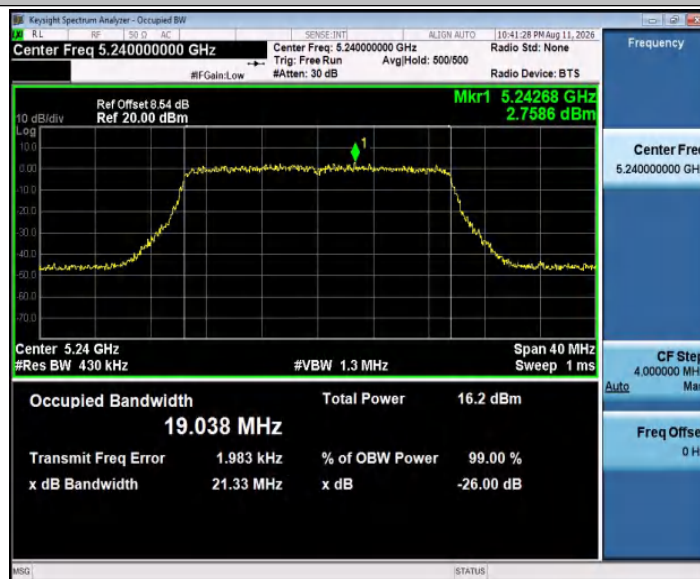

11AX40SISO_Ant1_5190



11AX40SISO_Ant1_5230

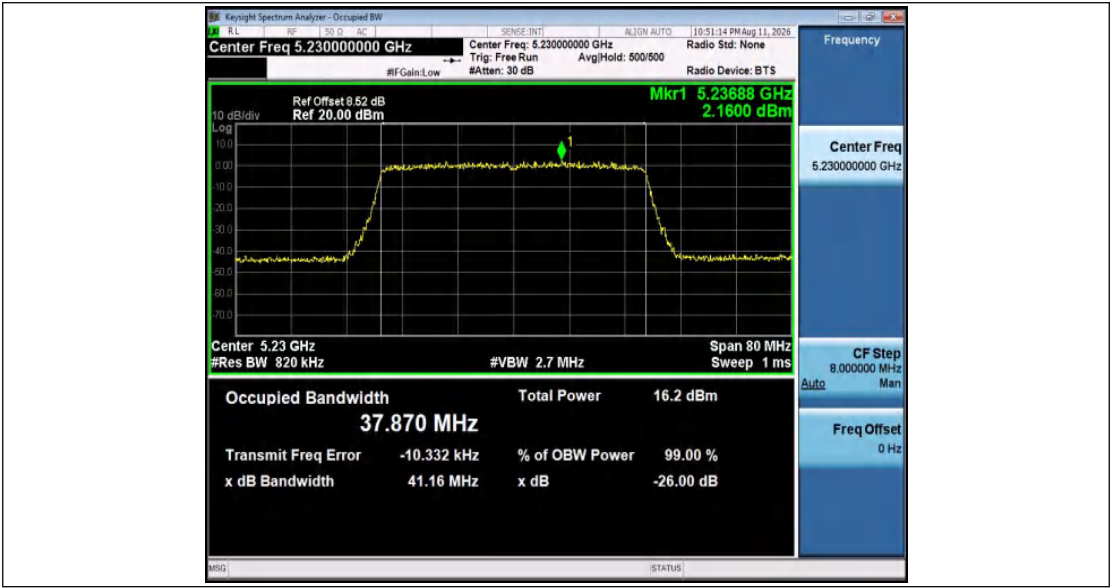



Appendix D.3: Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
11A	Ant1	5180	2.09	2.11	99.05	0.04	0.48
		5200	2.10	2.12	99.06	0.04	0.48
		5240	2.09	2.11	99.05	0.04	0.48
11N20SISO	Ant1	5180	5.40	5.42	99.63	0.02	0.19
		5200	5.40	5.42	99.63	0.02	0.19
		5240	5.40	5.42	99.63	0.02	0.19
11N40SISO	Ant1	5190	5.20	5.22	99.62	0.02	0.19
		5230	5.19	5.21	99.62	0.02	0.19
11AC20SISO	Ant1	5180	5.40	5.42	99.63	0.02	0.19
		5200	5.40	5.42	99.63	0.02	0.19
		5240	5.40	5.42	99.63	0.02	0.19
11AC40SISO	Ant1	5190	5.20	5.22	99.62	0.02	0.19
		5230	5.20	5.22	99.62	0.02	0.19
11AX20SISO	Ant1	5180	5.41	5.43	99.63	0.02	0.18
		5200	5.41	5.43	99.63	0.02	0.18
		5240	5.42	5.44	99.63	0.02	0.18
11AX40SISO	Ant1	5190	4.10	4.12	99.51	0.02	0.24
		5230	4.11	4.12	99.76	0.01	0.24

Test Graphs

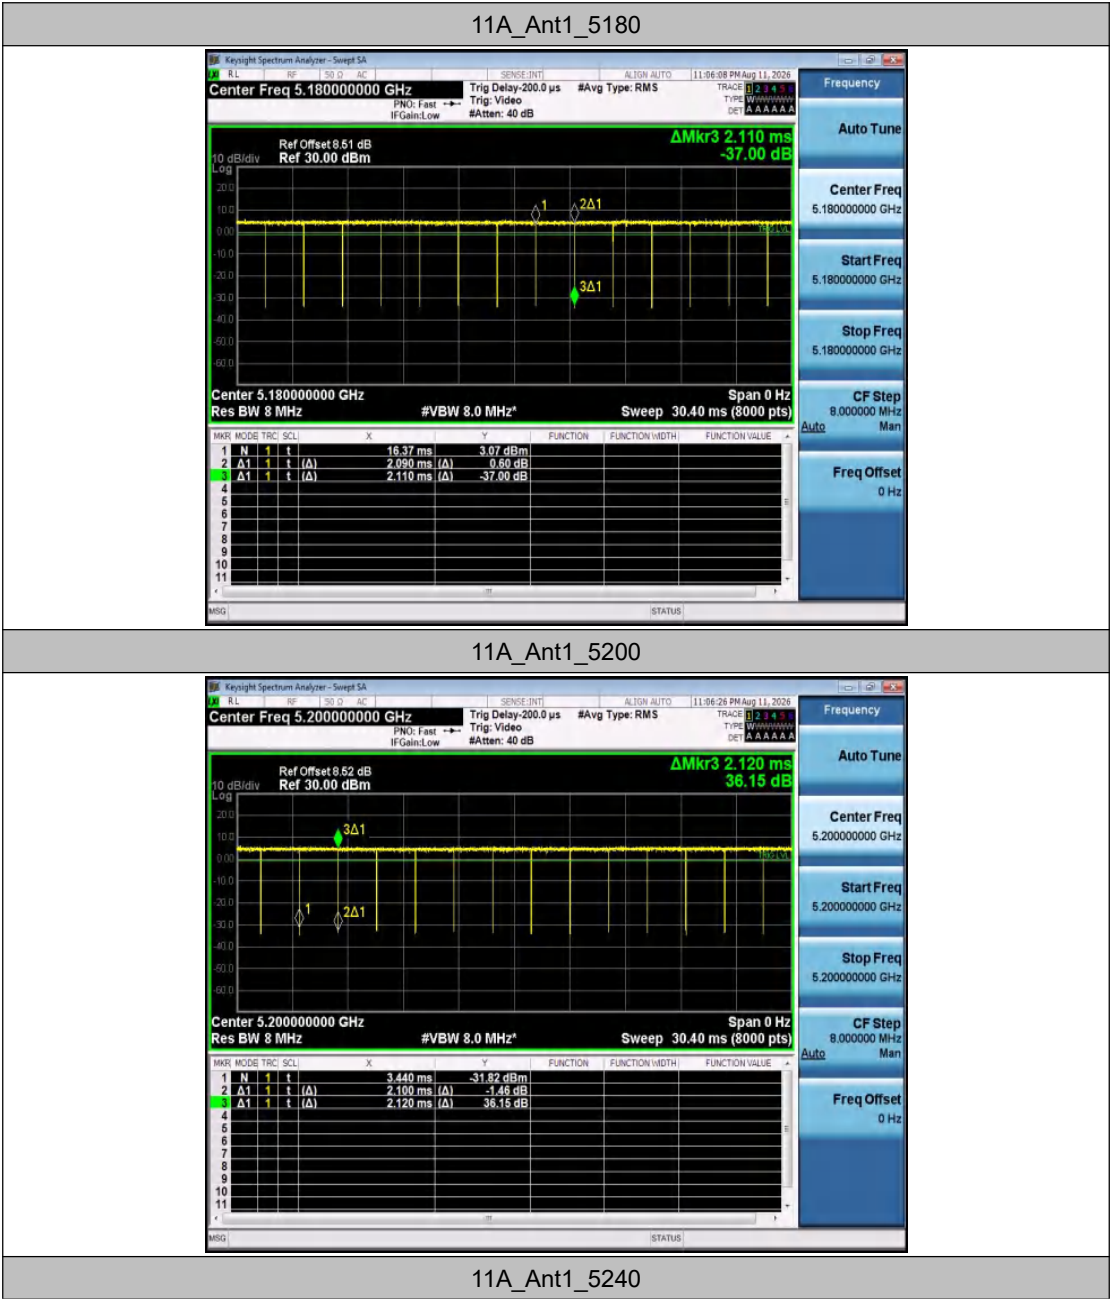


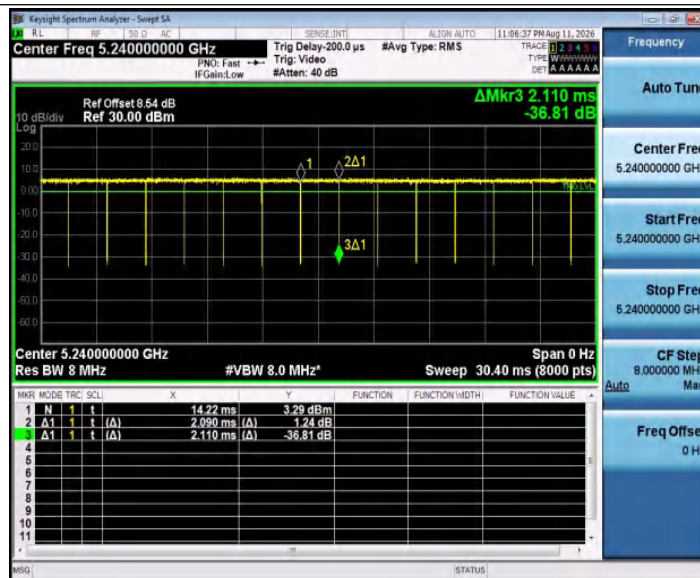


11N20SISO_Ant1_5180




11N20SISO_Ant1_5200

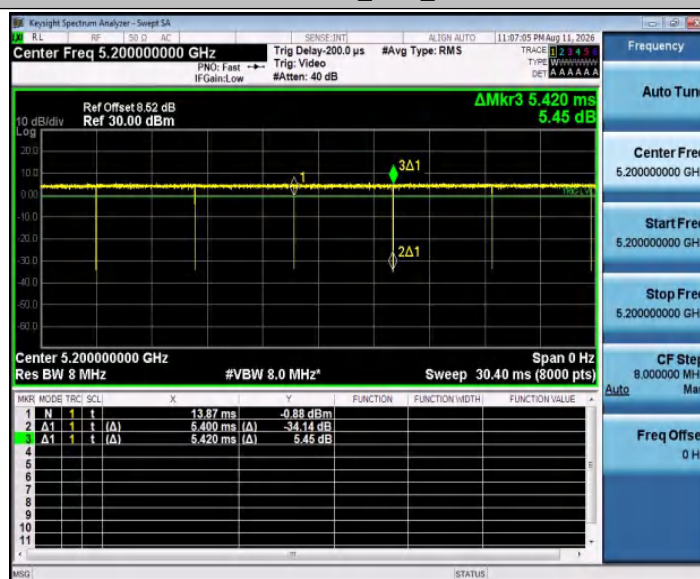



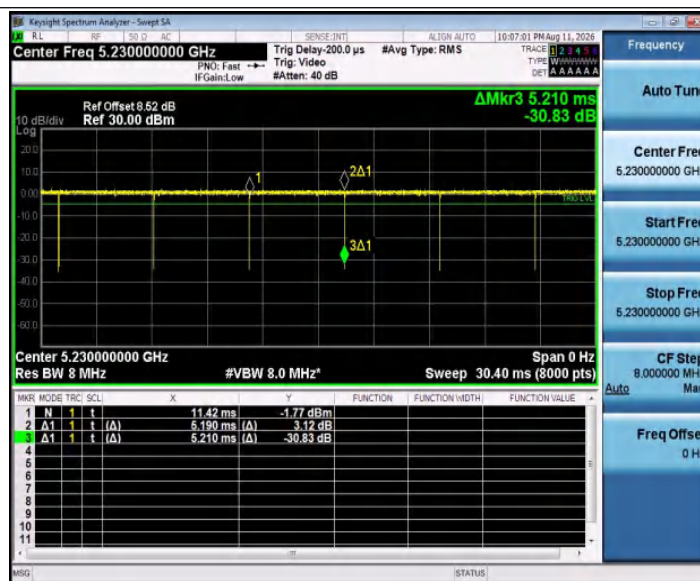


11AC20SISO_Ant1_5180

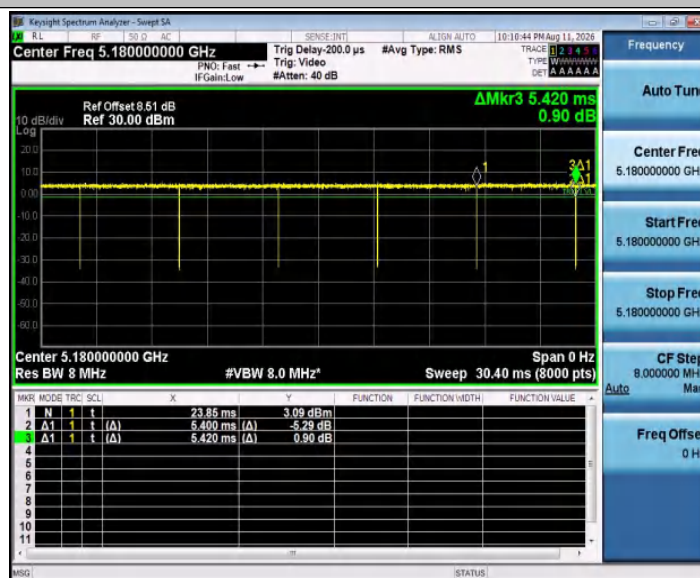


11AC20SISO_Ant1_5200



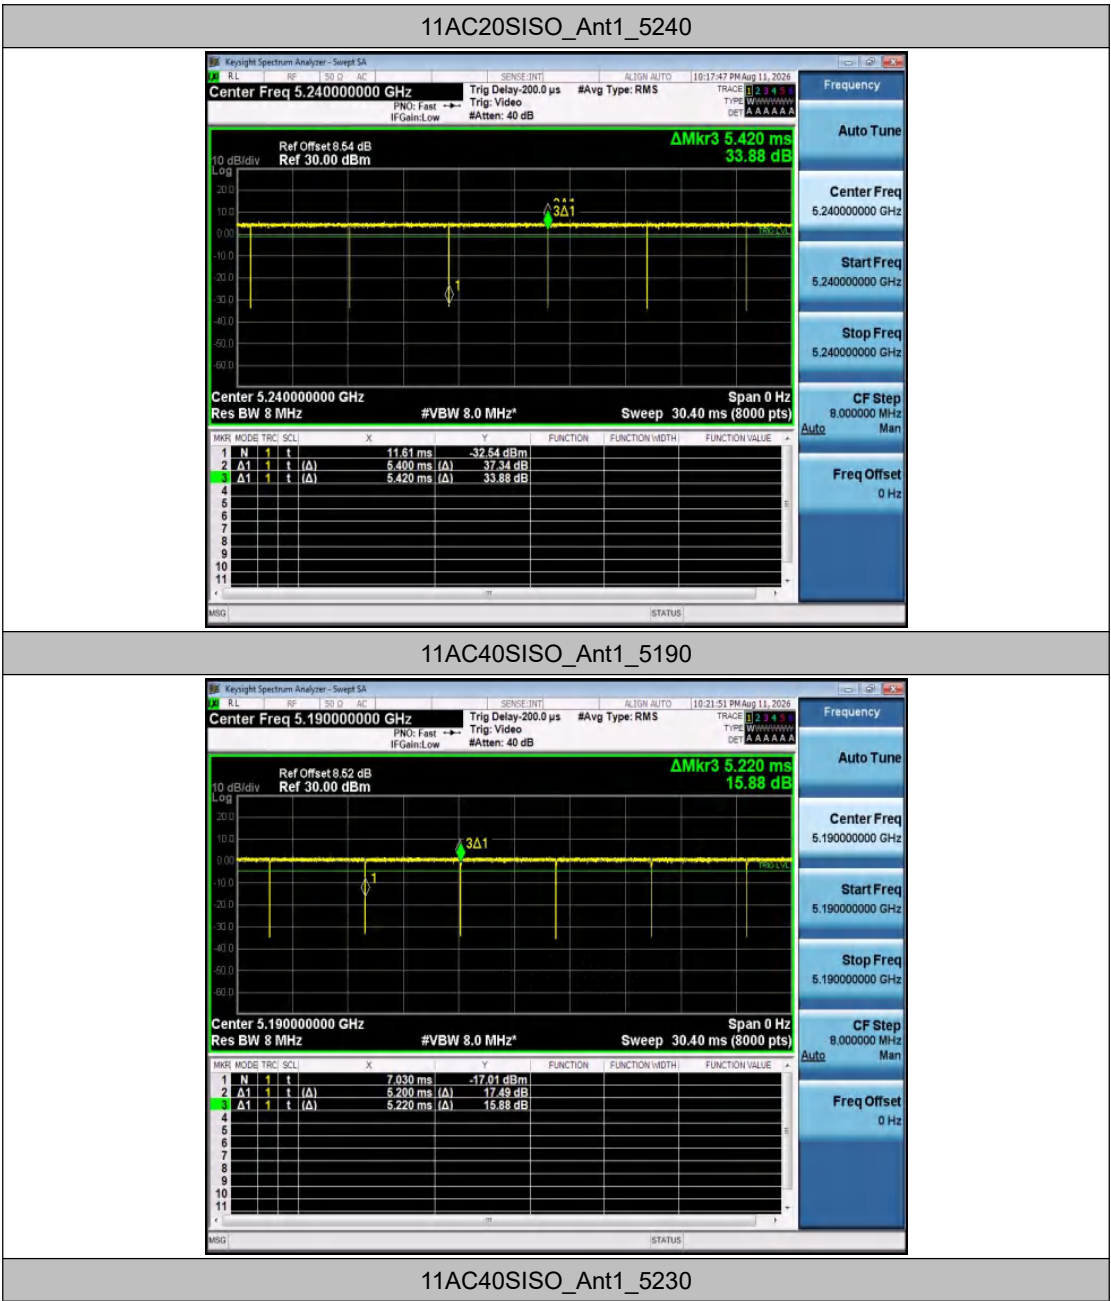





11AX20SISO_Ant1_5180

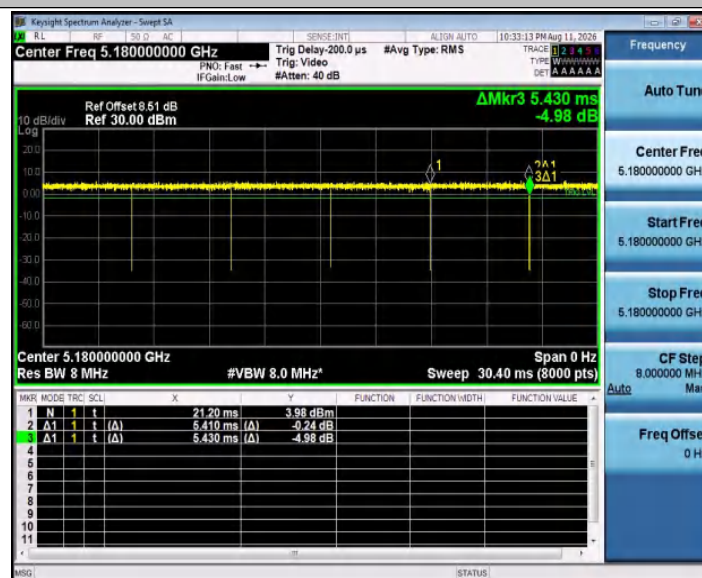

11AX20SISO_Ant1_5200



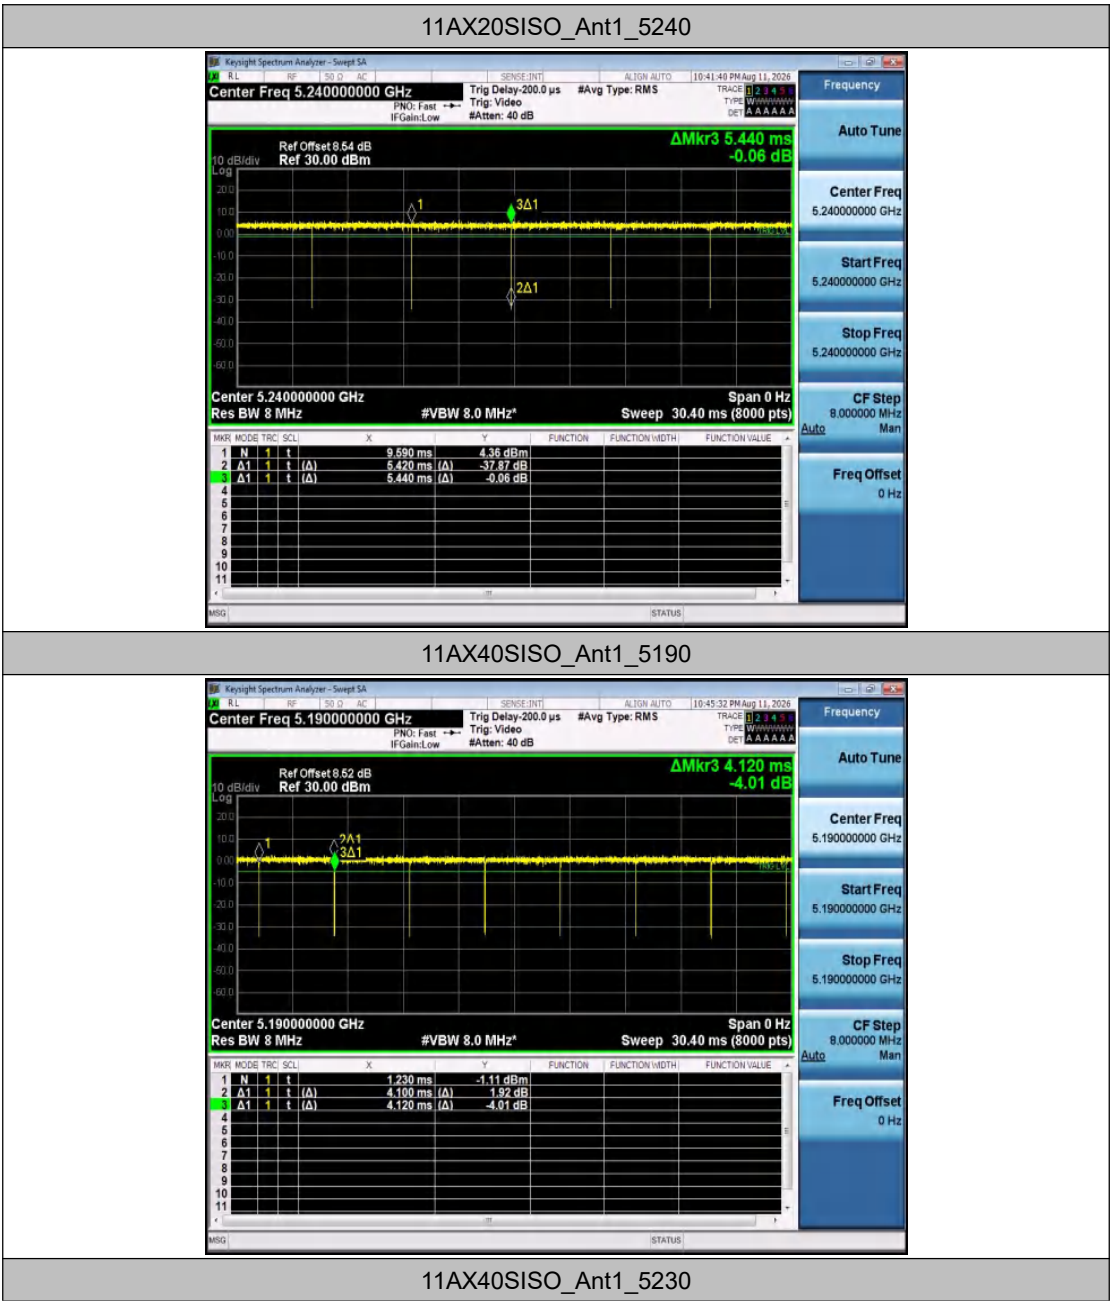

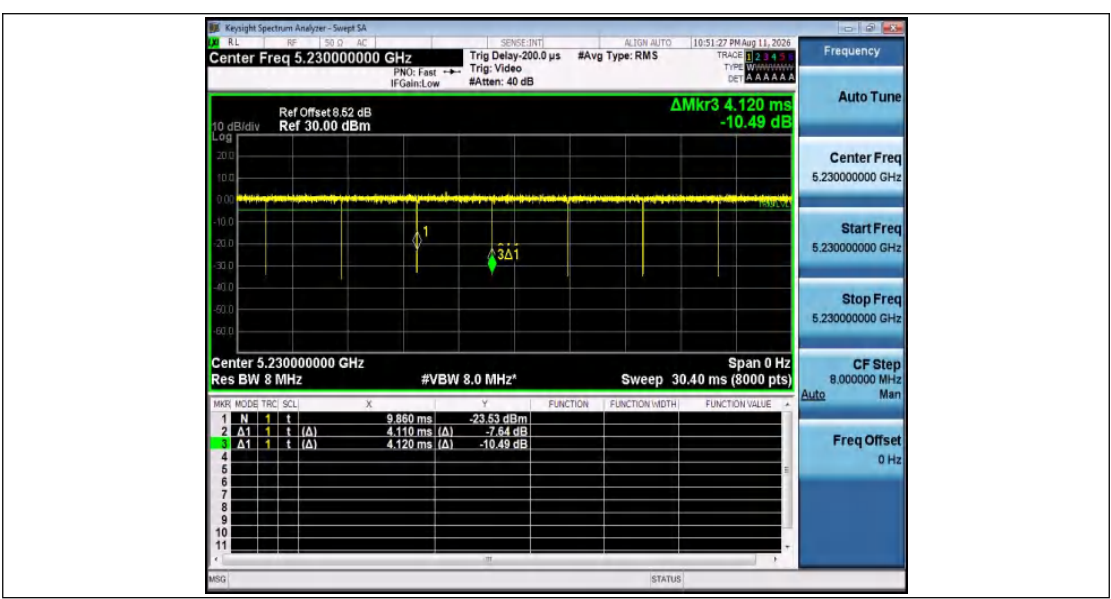

Appendix D.4: Maximum conducted output power

Test Result Channel Power

Test Mode	Antenna	Freq(MHz)	Channel Powert [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	8.79	99.05	0.04	8.83	≤23.98	PASS
		5200	7.58	99.06	0.04	7.62	≤23.98	PASS
		5240	7.52	99.05	0.04	7.56	≤23.98	PASS
11N20SISO	Ant1	5180	7.33	99.63	0.02	7.35	≤23.98	PASS
		5200	7.52	99.63	0.02	7.54	≤23.98	PASS
		5240	7.68	99.70	0.01	7.69	≤23.98	PASS
11N40SISO	Ant1	5190	7.53	99.62	0.02	7.55	≤23.98	PASS
		5230	7.65	99.62	0.02	7.67	≤23.98	PASS
11AC20SISO	Ant1	5180	7.46	99.63	0.02	7.48	≤23.98	PASS
		5200	7.65	99.63	0.02	7.67	≤23.98	PASS
		5240	7.72	99.63	0.02	7.74	≤23.98	PASS
11AC40SISO	Ant1	5190	7.54	99.62	0.02	7.56	≤23.98	PASS
		5230	7.68	99.62	0.02	7.70	≤23.98	PASS
11AX20SISO	Ant1	5180	7.44	99.63	0.02	7.46	≤23.98	PASS
		5200	7.67	99.63	0.02	7.69	≤23.98	PASS
		5240	7.77	99.63	0.02	7.79	≤23.98	PASS
11AX40SISO	Ant1	5190	7.44	99.51	0.02	7.46	≤23.98	PASS
		5230	7.54	99.76	0.01	7.55	≤23.98	PASS


Appendix D.5: Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	-2.79	≤ 11.00	PASS
		5200	-3.94	≤ 11.00	PASS
		5240	-3.89	≤ 11.00	PASS
11N20SISO	Ant1	5180	-4.40	≤ 11.00	PASS
		5200	-4.33	≤ 11.00	PASS
		5240	-4.03	≤ 11.00	PASS
11N40SISO	Ant1	5190	-6.98	≤ 11.00	PASS
		5230	-7.02	≤ 11.00	PASS
11AC20SISO	Ant1	5180	-4.34	≤ 11.00	PASS
		5200	-4.15	≤ 11.00	PASS
		5240	-4.06	≤ 11.00	PASS
11AC40SISO	Ant1	5190	-7.03	≤ 11.00	PASS
		5230	-7.00	≤ 11.00	PASS
11AX20SISO	Ant1	5180	-4.65	≤ 11.00	PASS
		5200	-4.42	≤ 11.00	PASS
		5240	-4.29	≤ 11.00	PASS
11AX40SISO	Ant1	5190	-7.33	≤ 11.00	PASS
		5230	-7.43	≤ 11.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

Test Graphs

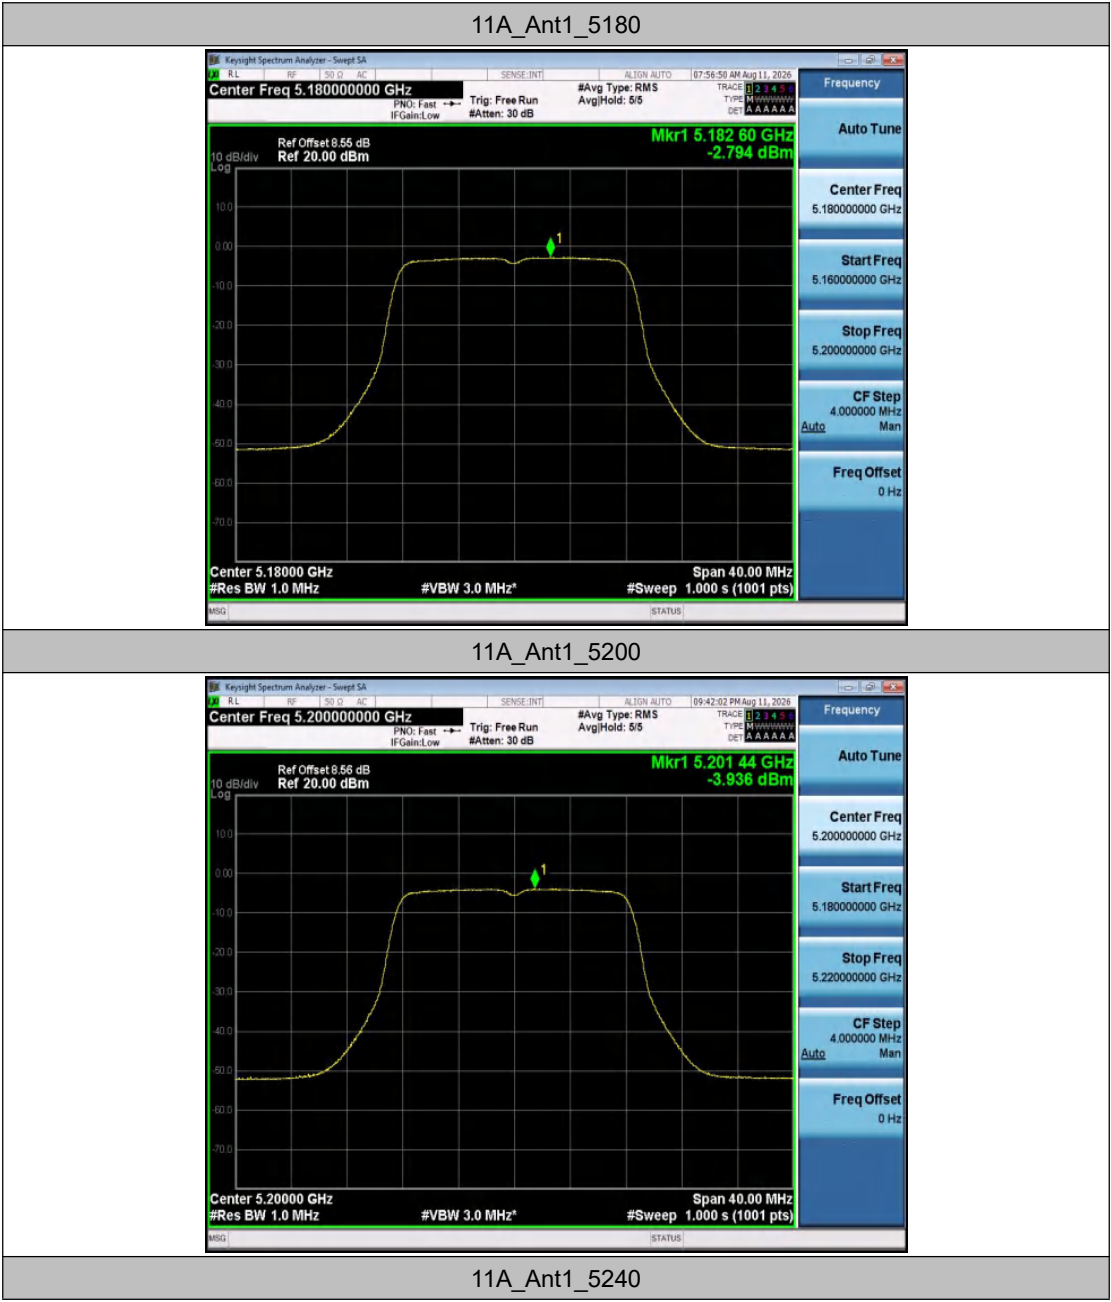



11N20SISO_Ant1_5180



11N20SISO_Ant1_5200



11N20SISO_Ant1_5240



11N40SISO_Ant1_5190



11N40SISO_Ant1_5230



11AC20SISO_Ant1_5180



11AC20SISO_Ant1_5200



11AC20SISO_Ant1_5240



11AC40SISO_Ant1_5190



11AC40SISO_Ant1_5230



11AX20ISO_Ant1_5180



11AX20ISO_Ant1_5200



11AX20SISO_Ant1_5240



11AX40SISO_Ant1_5190




11AX40SISO_Ant1_5230




Appendix D.6: Band edge measurements


TestMode	Antenna	ChName	Freq(MHz)	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-38.38	≤ -27	PASS
		High	5240	-39.03	≤ -27	PASS
11N20SISO	Ant1	Low	5180	-38.58	≤ -27	PASS
		High	5240	-39.03	≤ -27	PASS
11N40SISO	Ant1	Low	5190	-38.41	≤ -27	PASS
		High	5230	-38.13	≤ -27	PASS
11AC20SISO	Ant1	Low	5180	-38.38	≤ -27	PASS
		High	5240	-38.69	≤ -27	PASS
11AC40SISO	Ant1	Low	5190	-37.88	≤ -27	PASS
		High	5230	-38.71	≤ -27	PASS
11AX20SISO	Ant1	Low	5180	-37.94	≤ -27	PASS
		High	5240	-39.15	≤ -27	PASS
11AX40SISO	Ant1	Low	5190	-38.39	≤ -27	PASS
		High	5230	-38.98	≤ -27	PASS

Test Graphs

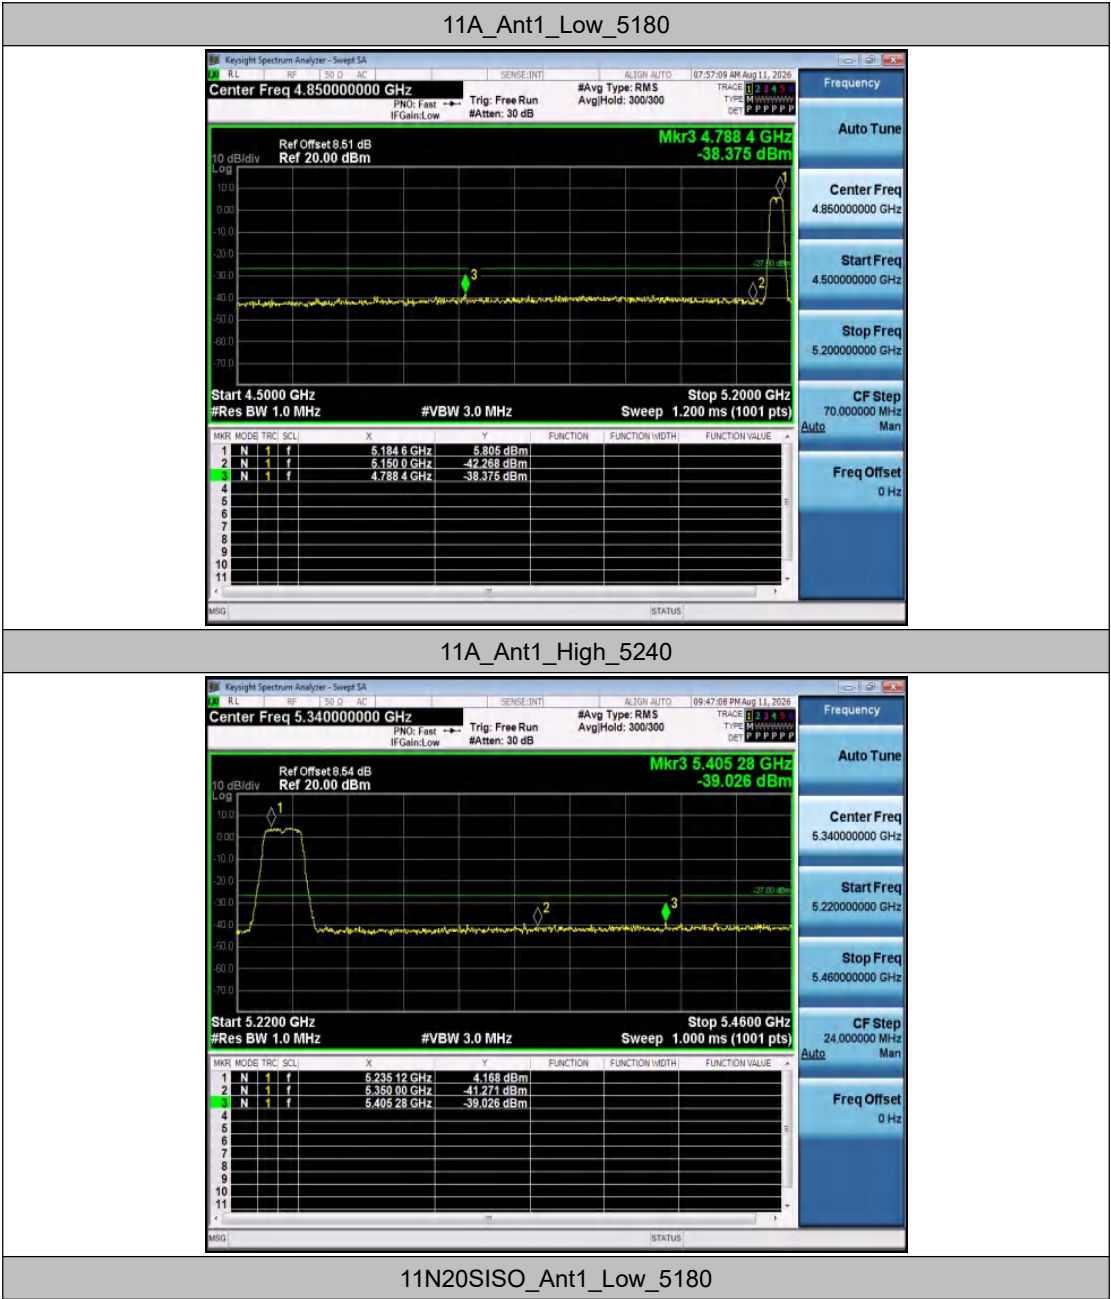


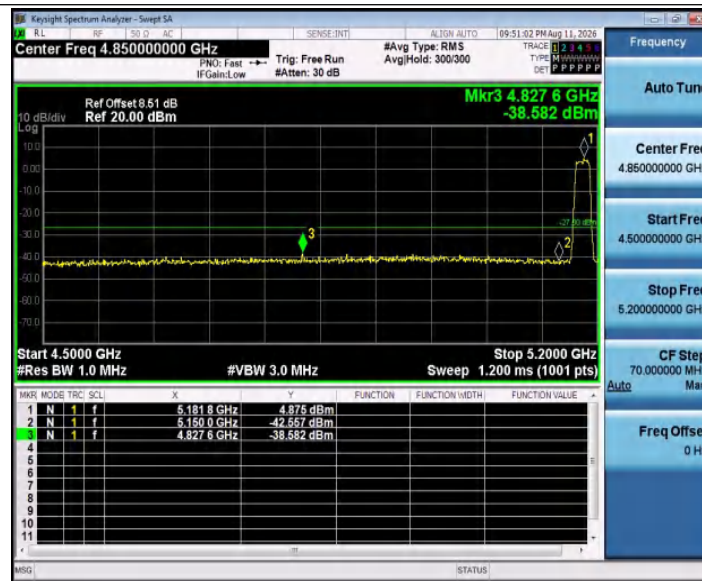



11N20SISO_Ant1_High_5240

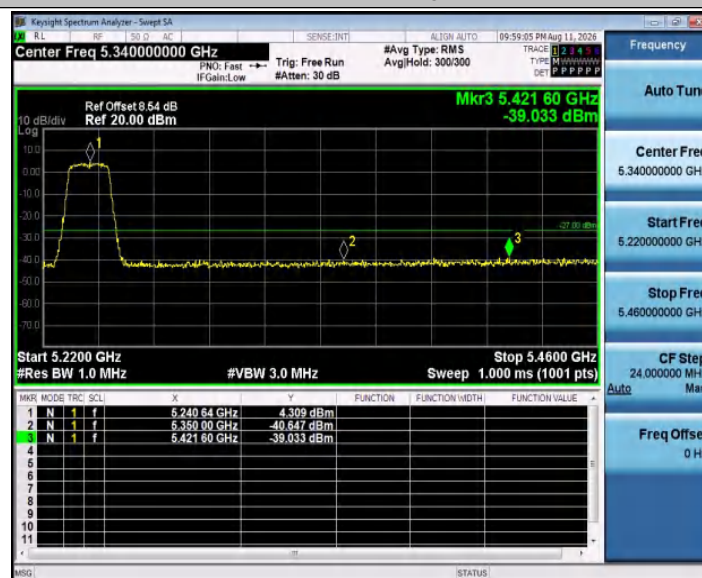

11N40SISO_Ant1_Low_5190

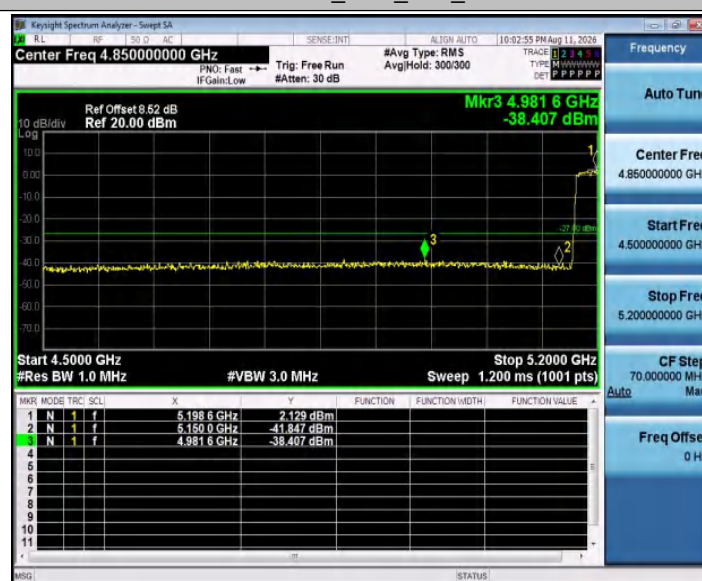

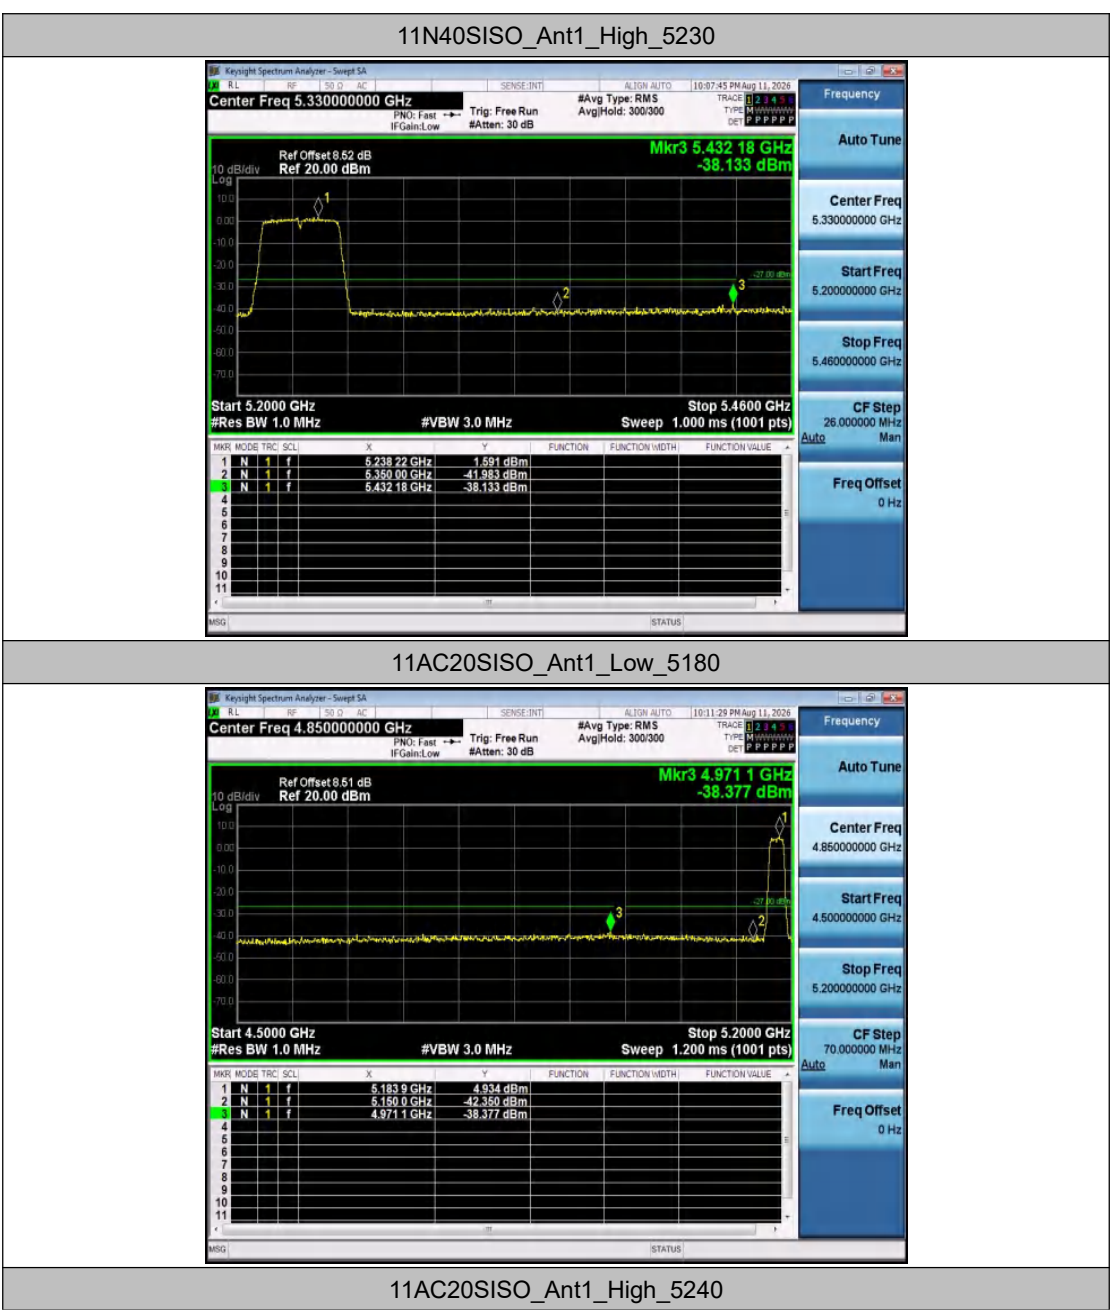


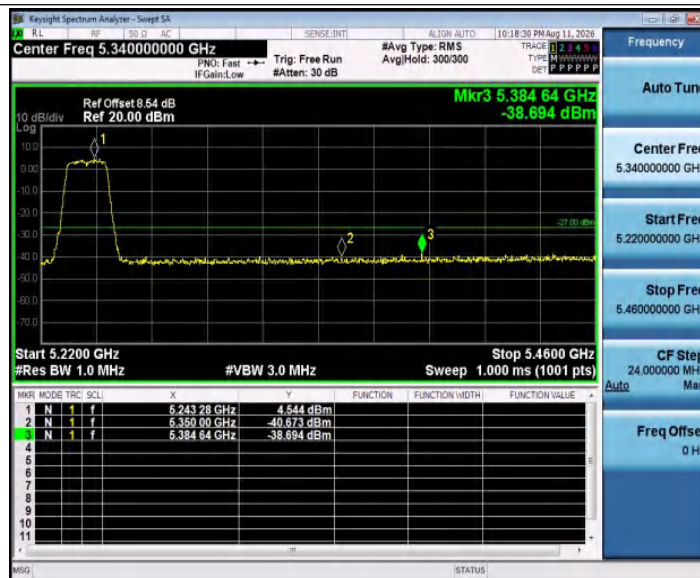



11AC40SISO_Ant1_Low_5190



11AC40SISO_Ant1_High_5230

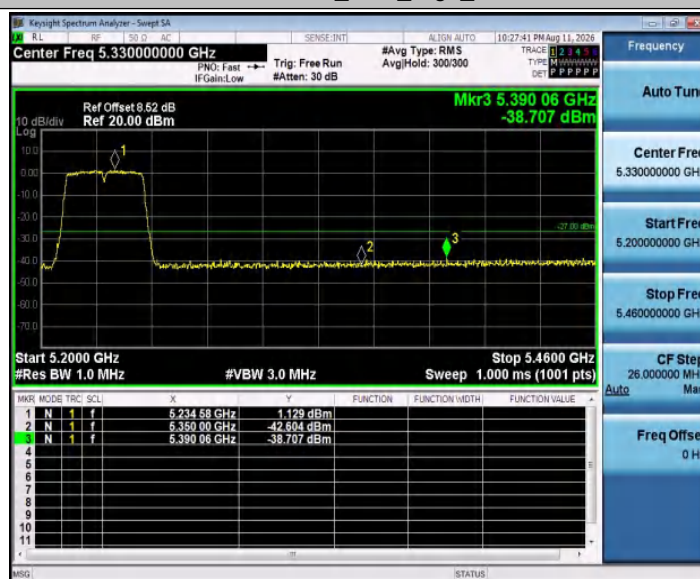

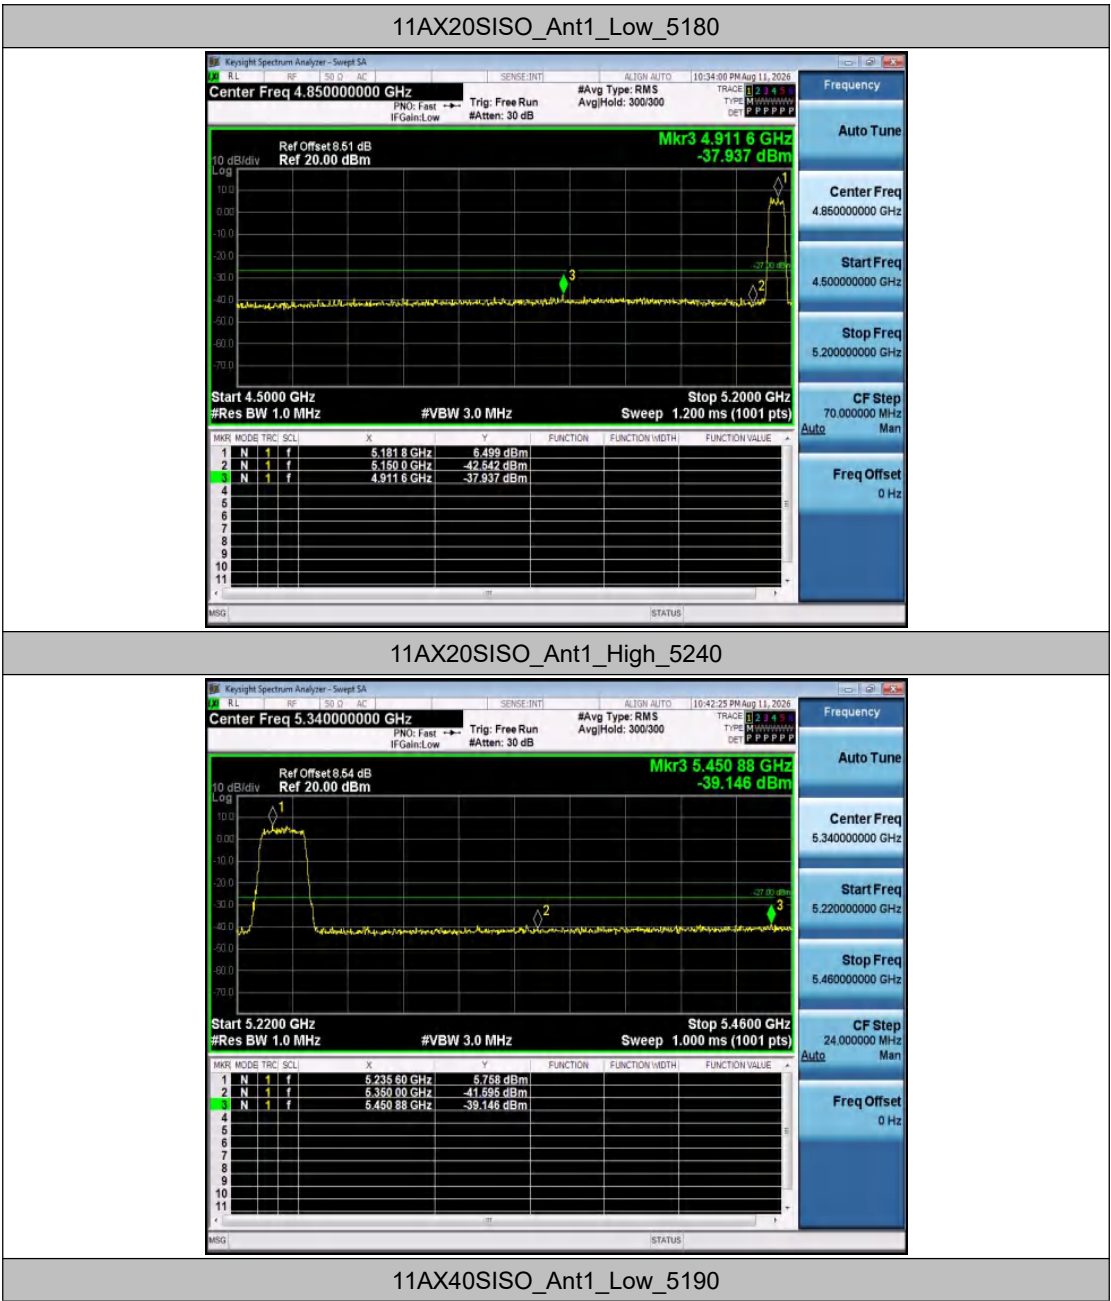

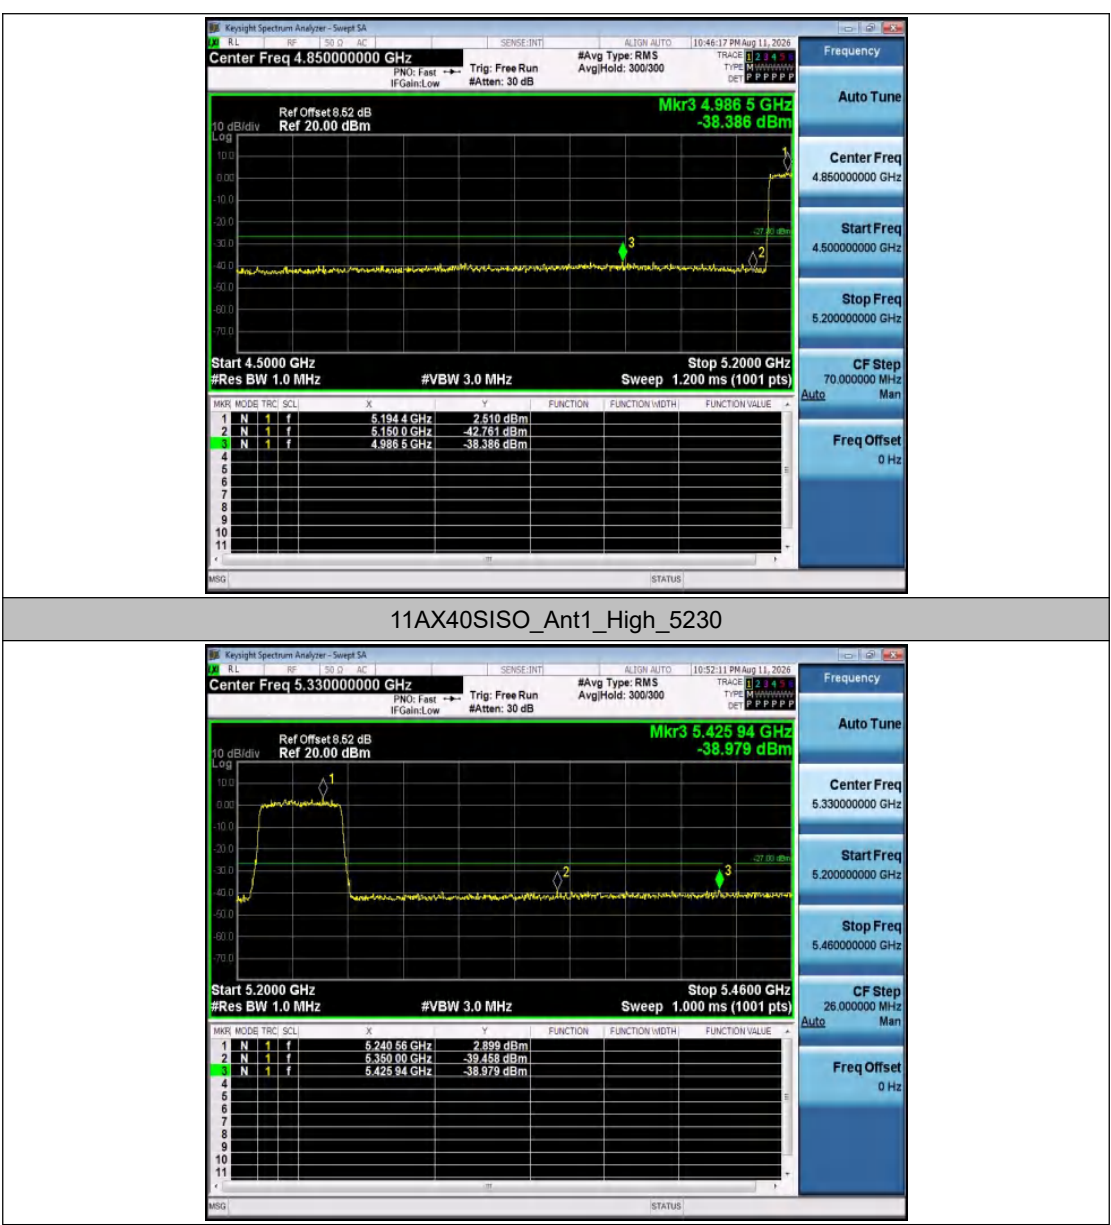

Appendix D.7: Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	Max. Fre [MHz]	Max. Level [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	30~5140	2726.72	-47.74	≤-27	PASS
			5360~27000	26839.86	-38.79	≤-27	PASS
		5200	30~5140	3178.1	-48.1	≤-27	PASS
			5360~27000	25565.27	-39.28	≤-27	PASS
		5240	30~5140	2419.27	-48.25	≤-27	PASS
			5360~27000	24894.43	-39.18	≤-27	PASS
11N20SISO	Ant1	5180	30~5140	2416.54	-47.75	≤-27	PASS
			5360~27000	24834.56	-39.05	≤-27	PASS
		5200	30~5140	5013.78	-47.33	≤-27	PASS
			5360~27000	23527.5	-38.76	≤-27	PASS
		5240	30~5140	2415.86	-47.81	≤-27	PASS
			5360~27000	24872.07	-38.45	≤-27	PASS
11N40SISO	Ant1	5190	30~5140	3274.68	-47.76	≤-27	PASS
			5360~27000	24271.2	-38.18	≤-27	PASS
		5230	30~5140	3169.58	-47.74	≤-27	PASS
			5360~27000	26912	-38.53	≤-27	PASS
11AC20SISO	Ant1	5180	30~5140	3293.08	-47.78	≤-27	PASS
			5360~27000	26761.24	-38.29	≤-27	PASS
		5200	30~5140	2689.24	-48.12	≤-27	PASS
			5360~27000	26808.13	-38.01	≤-27	PASS
		5240	30~5140	2526.41	-47.99	≤-27	PASS
			5360~27000	24764.59	-38.93	≤-27	PASS
11AC40SISO	Ant1	5190	30~5140	2671.87	-47.84	≤-27	PASS
			5360~27000	24241.62	-38.15	≤-27	PASS
		5230	30~5140	2683.62	-47.44	≤-27	PASS
			5360~27000	25618.65	-38.61	≤-27	PASS
11AX20SISO	Ant1	5180	30~5140	5058.92	-47.69	≤-27	PASS
			5360~27000	24239.46	-38.88	≤-27	PASS
		5200	30~5140	3173.67	-47.44	≤-27	PASS
			5360~27000	25189.45	-38.09	≤-27	PASS
		5240	30~5140	4933.73	-47.71	≤-27	PASS
			5360~27000	25255.09	-37.9	≤-27	PASS
11AX40SISO	Ant1	5190	30~5140	5107.3	-48.12	≤-27	PASS
			5360~27000	24264.7	-38.42	≤-27	PASS
		5230	30~5140	2617.53	-46.76	≤-27	PASS
			5360~27000	23550.58	-38.38	≤-27	PASS

Test Graphs

11A_Ant1_5180_30~5140



11A_Ant1_5180_5360~27000




11A_Ant1_5200_30~5140



11A_Ant1_5200_5360~27000



11A_Ant1_5240_30~5140

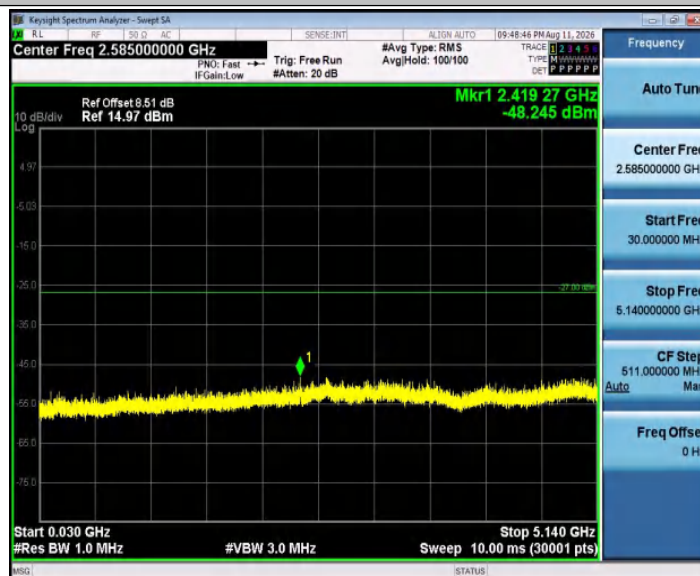

11A_Ant1_5240_5360~27000



11N20SISO_Ant1_5180_30~5140



11N20SISO_Ant1_5180_5360~27000




11N20SISO_Ant1_5200_30~5140



11N20SISO_Ant1_5200_5360~27000



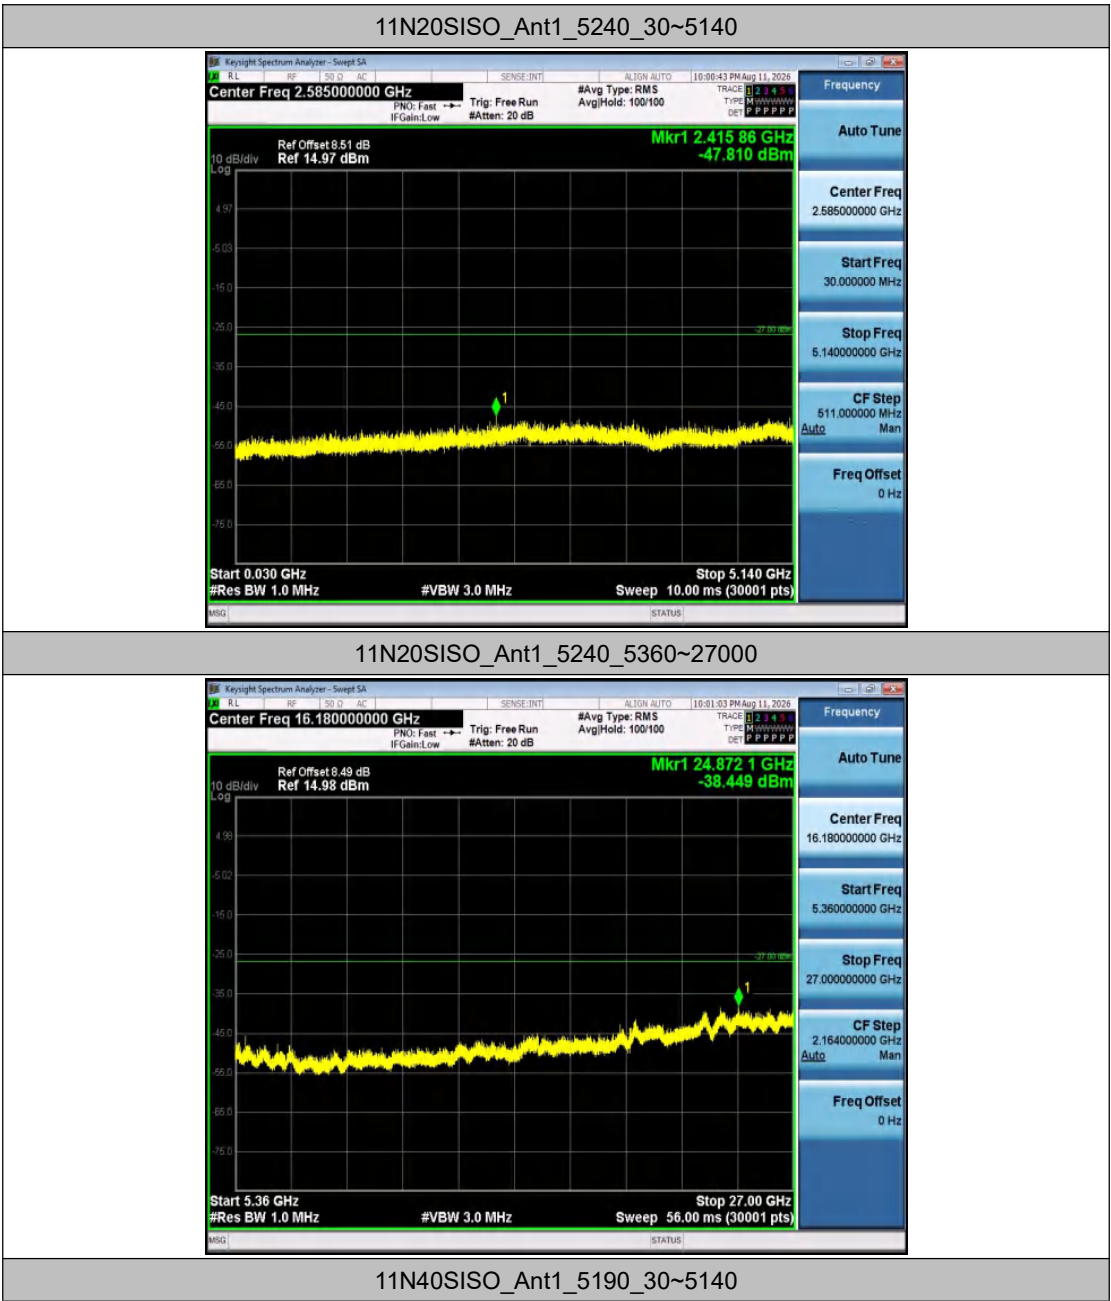




11N40SISO_Ant1_5190_5360~27000




11N40SISO_Ant1_5230_30~5140

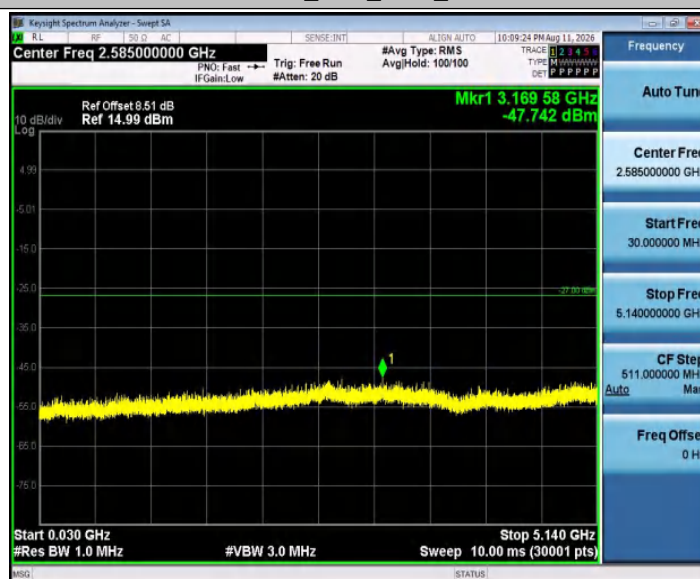

11N40SISO_Ant1_5230_5360~27000




11AC20SISO_Ant1_5180_30~5140

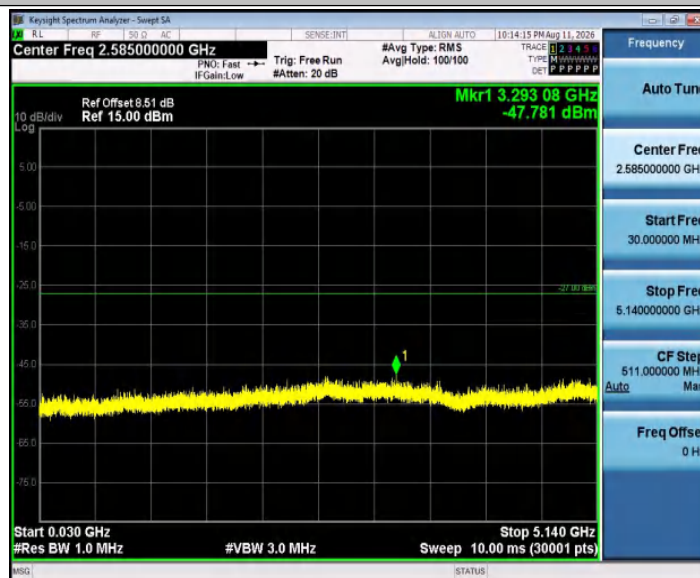

11AC20SISO_Ant1_5180_5360~27000



11AC20SISO_Ant1_5200_30~5140

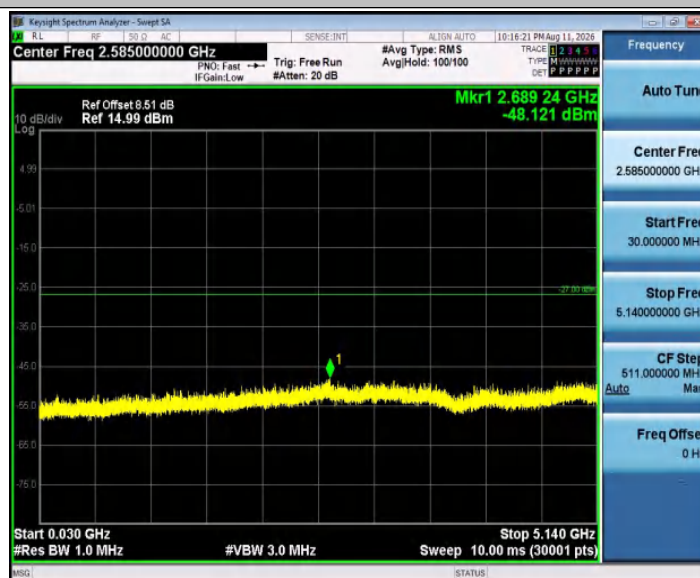

11AC20SISO_Ant1_5200_5360~27000




11AC20SISO_Ant1_5240_30~5140



11AC20SISO_Ant1_5240_5360~27000




11AC40SISO_Ant1_5190_30~5140

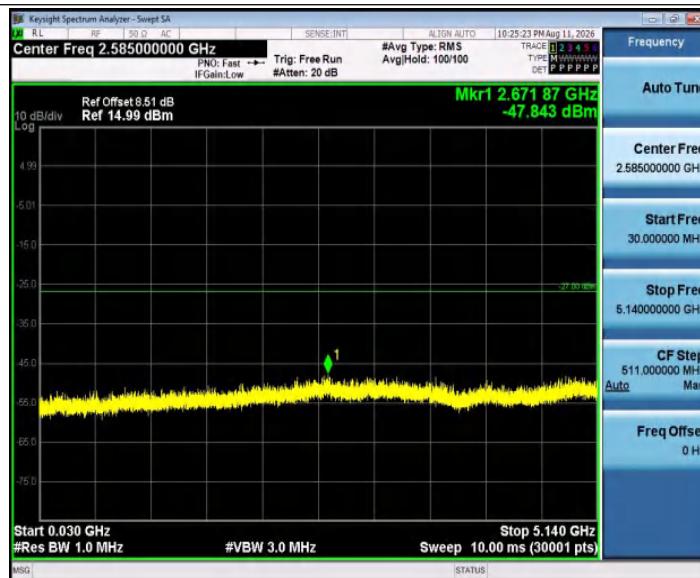

11AC40SISO_Ant1_5190_5360~27000



11AC40SISO_Ant1_5230_30~5140

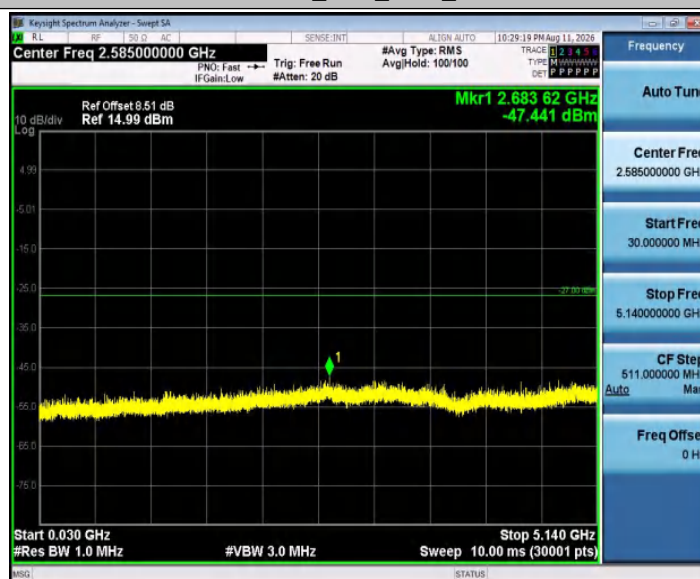

11AC40SISO_Ant1_5230_5360~27000



11AX20SISO_Ant1_5180_30~5140



11AX20SISO_Ant1_5180_5360~27000




11AX20SISO_Ant1_5200_30~5140



11AX20SISO_Ant1_5200_5360~27000



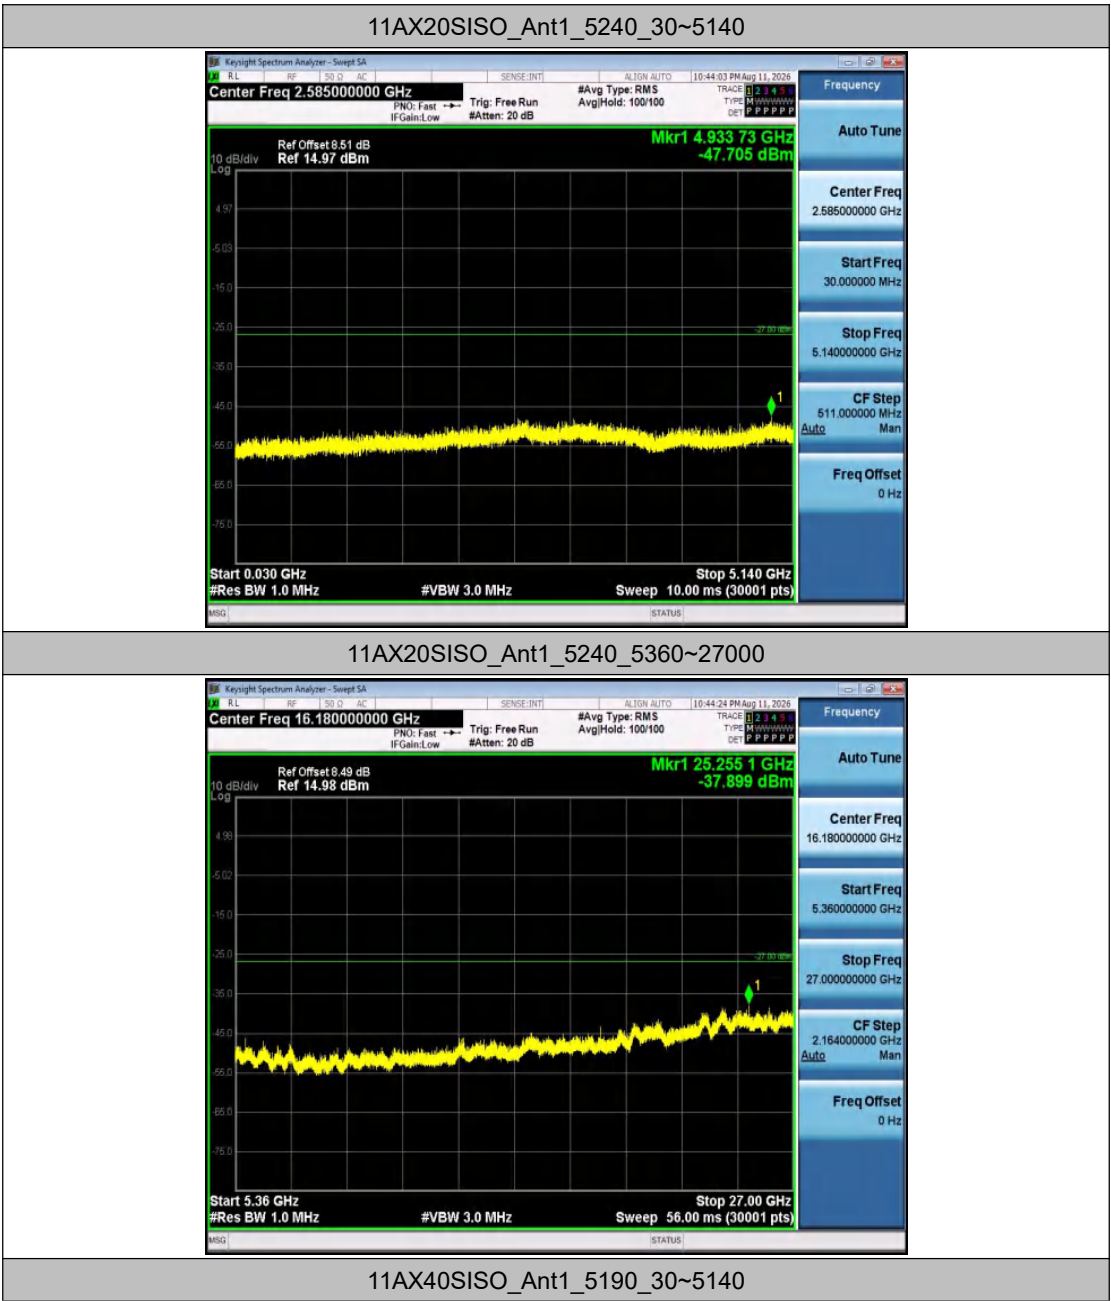





11AX40SISO_Ant1_5190_5360~27000



11AX40SISO_Ant1_5230_30~5140

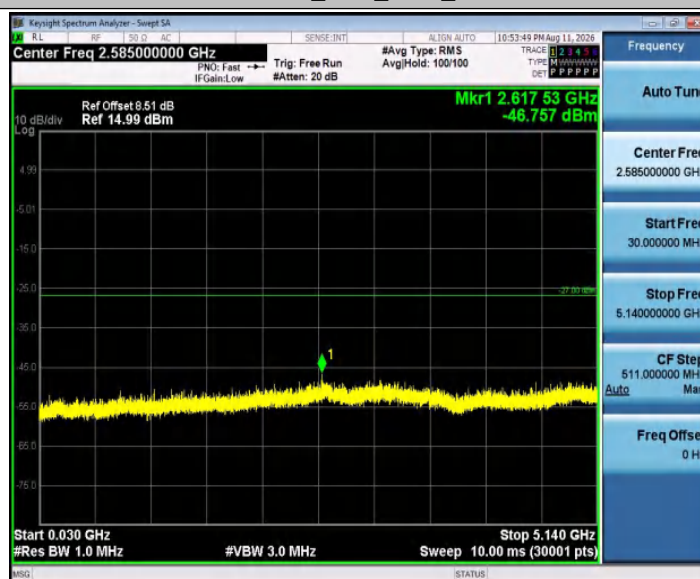

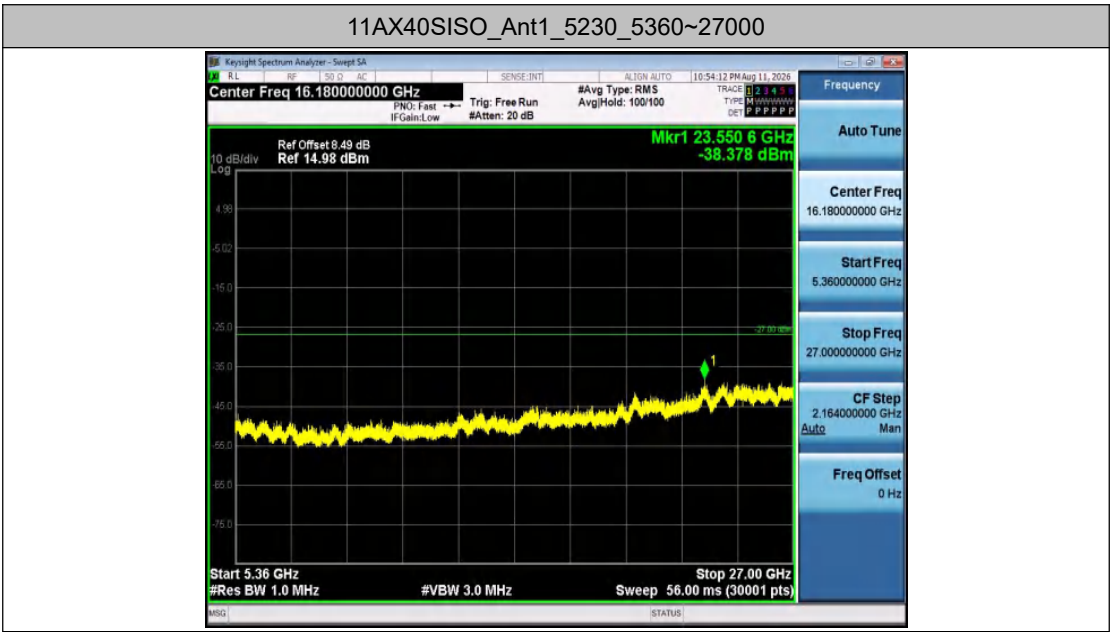

Appendix D.8: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11A	Ant1	Low	5180	AV	4500.000	-49.36	≤-41.20	45.84	≤54	PASS
				AV	4942.400	-47.08	≤-41.20	48.12	≤54	PASS
				AV	5150.000	-48.48	≤-41.20	46.72	≤54	PASS
				Peak	4500.000	-45.4	≤-21.20	49.80	≤74	PASS
				Peak	5010.300	-37.65	≤-21.20	57.55	≤74	PASS
				Peak	5150.000	-41.09	≤-21.20	54.11	≤74	PASS
		High	5240	AV	5350.000	-48.67	≤-41.20	46.53	≤54	PASS
				AV	5454.000	-47.74	≤-41.20	47.46	≤54	PASS
				AV	5460.000	-47.77	≤-41.20	47.43	≤54	PASS
				Peak	5350.000	-45.89	≤-21.20	49.31	≤74	PASS
				Peak	5431.440	-38.73	≤-21.20	56.47	≤74	PASS
				Peak	5460.000	-42.71	≤-21.20	52.49	≤74	PASS
11N20SI SO	Ant1	Low	5180	AV	4500.000	-49.75	≤-41.20	45.45	≤54	PASS
				AV	4945.200	-47.45	≤-41.20	47.75	≤54	PASS
				AV	5150.000	-48.86	≤-41.20	46.34	≤54	PASS
				Peak	4500.000	-43.39	≤-21.20	51.81	≤74	PASS
				Peak	4983.000	-37.96	≤-21.20	57.24	≤74	PASS
				Peak	5150.000	-44.83	≤-21.20	50.37	≤74	PASS
		High	5240	AV	5350.000	-48.28	≤-41.20	46.92	≤54	PASS
				AV	5458.080	-47.36	≤-41.20	47.84	≤54	PASS
				AV	5460.000	-47.39	≤-41.20	47.81	≤54	PASS
				Peak	5350.000	-42.5	≤-21.20	52.70	≤74	PASS
				Peak	5457.360	-38.41	≤-21.20	56.79	≤74	PASS
				Peak	5460.000	-40.8	≤-21.20	54.40	≤74	PASS
11N40SI SO	Ant1	Low	5190	AV	4500.000	-49.35	≤-41.20	45.85	≤54	PASS
				AV	4943.800	-47.06	≤-41.20	48.14	≤54	PASS
				AV	5150.000	-48.49	≤-41.20	46.71	≤54	PASS
				Peak	4500.000	-42.2	≤-21.20	53.00	≤74	PASS
				Peak	4948.700	-37.23	≤-21.20	57.97	≤74	PASS
				Peak	5150.000	-42.03	≤-21.20	53.17	≤74	PASS
		High	5230	AV	5350.000	-48.16	≤-41.20	47.04	≤54	PASS
				AV	5454.540	-47.32	≤-41.20	47.88	≤54	PASS
				AV	5460.000	-47.38	≤-41.20	47.82	≤54	PASS
				Peak	5350.000	-42.77	≤-21.20	52.43	≤74	PASS
				Peak	5404.880	-37.45	≤-21.20	57.75	≤74	PASS
				Peak	5460.000	-41.7	≤-21.20	53.50	≤74	PASS
11AC20S	Ant1	Low	5180	AV	4500.000	-49.34	≤-41.20	45.86	≤54	PASS


ISO				AV	4945.900	-47.07	≤-41.20	48.13	≤54	PASS
				AV	5150.000	-48.46	≤-41.20	46.74	≤54	PASS
				Peak	4500.000	-45.88	≤-21.20	49.32	≤74	PASS
				Peak	5133.500	-37.98	≤-21.20	57.22	≤74	PASS
				Peak	5150.000	-41.35	≤-21.20	53.85	≤74	PASS
		High	5240	AV	5350.000	-48.21	≤-41.20	46.99	≤54	PASS
				AV	5457.360	-47.29	≤-41.20	47.91	≤54	PASS
				AV	5460.000	-47.36	≤-41.20	47.84	≤54	PASS
				Peak	5350.000	-42.62	≤-21.20	52.58	≤74	PASS
				Peak	5450.160	-37.91	≤-21.20	57.29	≤74	PASS
				Peak	5460.000	-42.7	≤-21.20	52.50	≤74	PASS
11AC40S ISO	Ant1	Low	5190	AV	4500.000	-49.34	≤-41.20	45.86	≤54	PASS
				AV	4943.100	-47.02	≤-41.20	48.18	≤54	PASS
				AV	5150.000	-48.42	≤-41.20	46.78	≤54	PASS
				Peak	4500.000	-44.03	≤-21.20	51.17	≤74	PASS
				Peak	4829.700	-37.98	≤-21.20	57.22	≤74	PASS
				Peak	5150.000	-42.34	≤-21.20	52.86	≤74	PASS
		High	5230	AV	5350.000	-48.14	≤-41.20	47.06	≤54	PASS
				AV	5454.540	-47.29	≤-41.20	47.91	≤54	PASS
				AV	5460.000	-47.36	≤-41.20	47.84	≤54	PASS
				Peak	5350.000	-43.34	≤-21.20	51.86	≤74	PASS
				Peak	5398.640	-38.09	≤-21.20	57.11	≤74	PASS
				Peak	5460.000	-41.24	≤-21.20	53.96	≤74	PASS
11AX20S ISO	Ant1	Low	5180	AV	4500.000	-49.3	≤-41.20	45.90	≤54	PASS
				AV	4941.000	-47.04	≤-41.20	48.16	≤54	PASS
				AV	5150.000	-48.44	≤-41.20	46.76	≤54	PASS
				Peak	4500.000	-41.33	≤-21.20	53.87	≤74	PASS
				Peak	5015.900	-37.85	≤-21.20	57.35	≤74	PASS
				Peak	5150.000	-43.4	≤-21.20	51.80	≤74	PASS
		High	5240	AV	5350.000	-48.17	≤-41.20	47.03	≤54	PASS
				AV	5457.360	-47.26	≤-41.20	47.94	≤54	PASS
				AV	5460.000	-47.31	≤-41.20	47.89	≤54	PASS
				Peak	5350.000	-43.07	≤-21.20	52.13	≤74	PASS
				Peak	5427.600	-38.46	≤-21.20	56.74	≤74	PASS
				Peak	5460.000	-44.82	≤-21.20	50.38	≤74	PASS
11AX40S ISO	Ant1	Low	5190	AV	4500.000	-49.33	≤-41.20	45.87	≤54	PASS
				AV	4941.000	-47.04	≤-41.20	48.16	≤54	PASS
				AV	5150.000	-48.44	≤-41.20	46.76	≤54	PASS
				Peak	4500.000	-43.2	≤-21.20	52.00	≤74	PASS
				Peak	4957.800	-36.45	≤-21.20	58.75	≤74	PASS
				Peak	5150.000	-41.13	≤-21.20	54.07	≤74	PASS
		High	5230	AV	5350.000	-48.11	≤-41.20	47.09	≤54	PASS
				AV	5458.180	-47.3	≤-41.20	47.90	≤54	PASS

				AV	5460.000	-47.35	≤-41.20	47.85	≤54	PASS
				Peak	5350.000	-41.49	≤-21.20	53.71	≤74	PASS
				Peak	5433.480	-37.17	≤-21.20	58.03	≤74	PASS
				Peak	5460.000	-43.19	≤-21.20	52.01	≤74	PASS

Note:


1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. For transmitters operating in 5150-5350 GHz band and 5470-5725 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

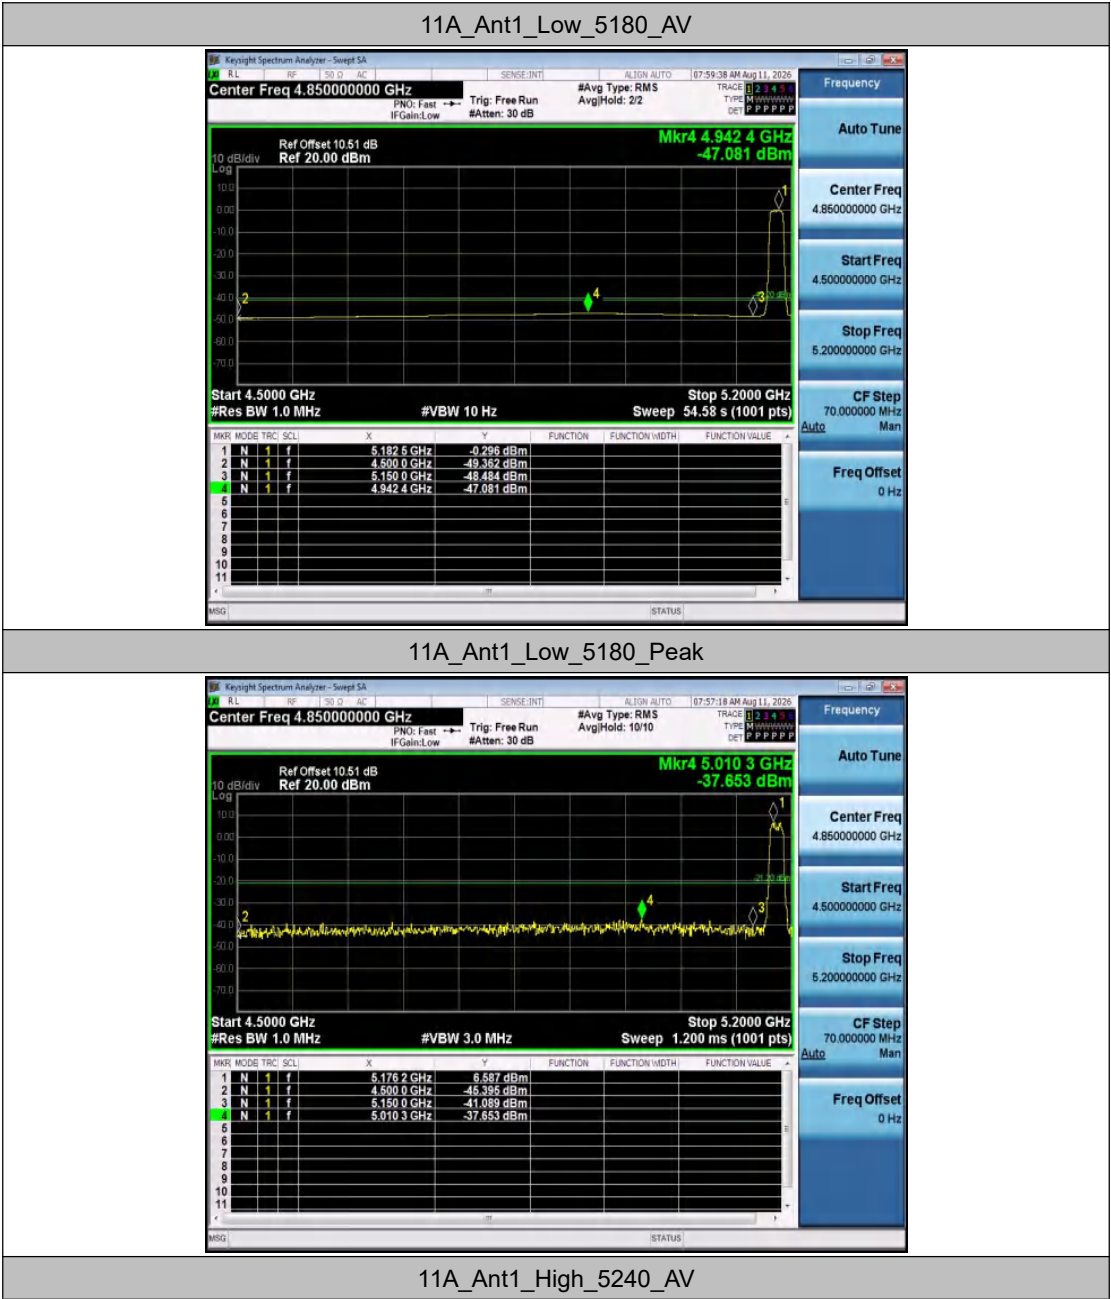





11A_Ant1_High_5240_Peak

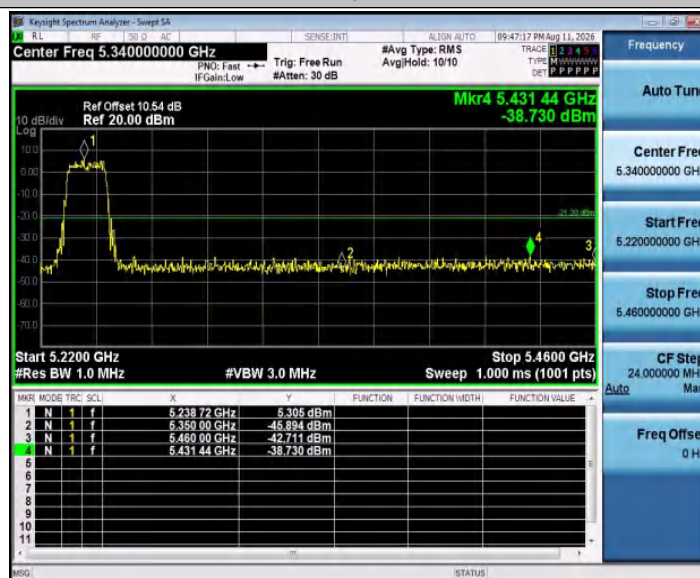

11N20SISO_Ant1_Low_5180_AV



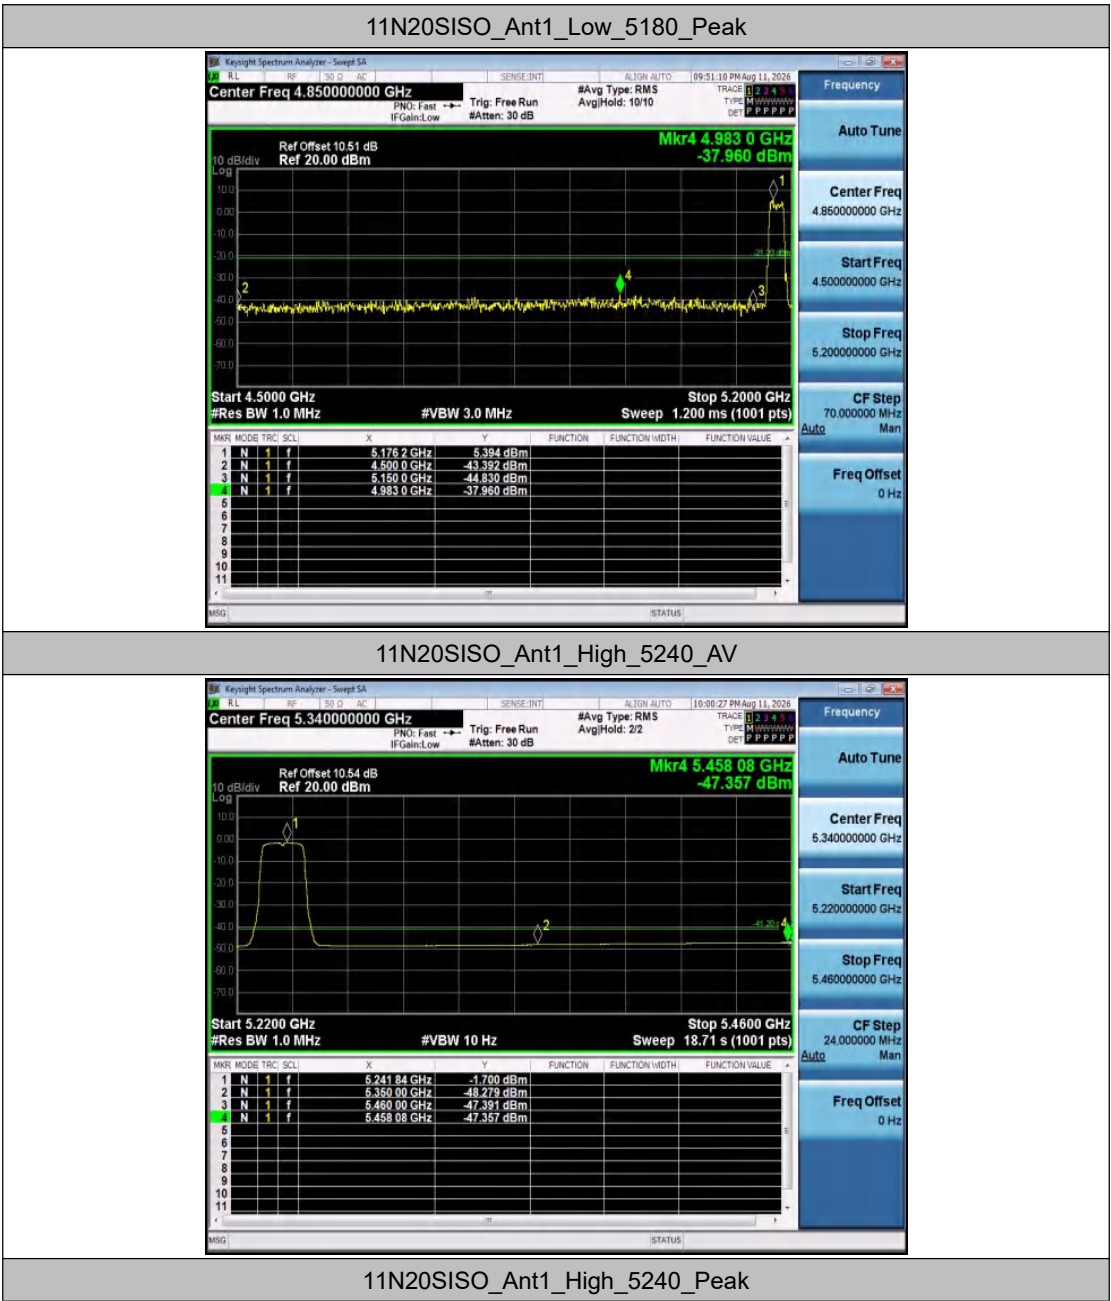


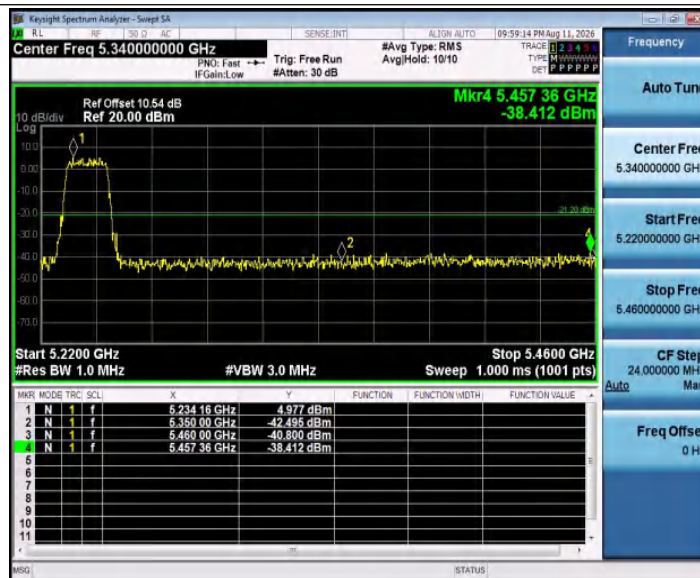


11N40SISO_Ant1_Low_5190_AV



11N40SISO_Ant1_Low_5190_Peak

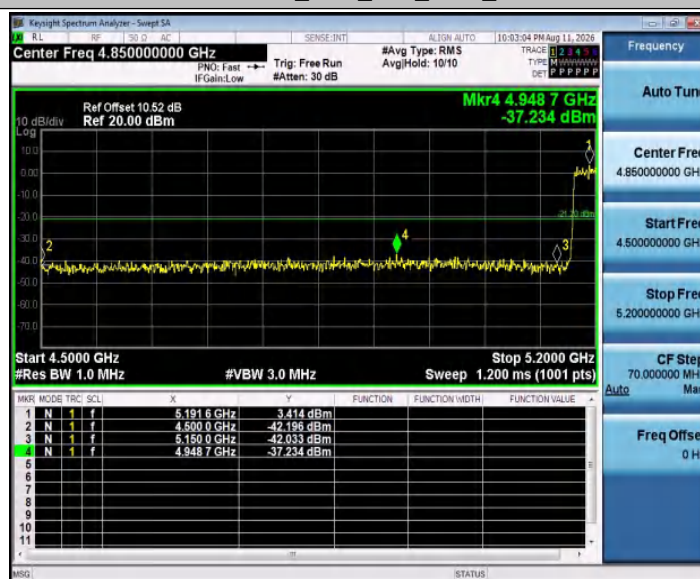

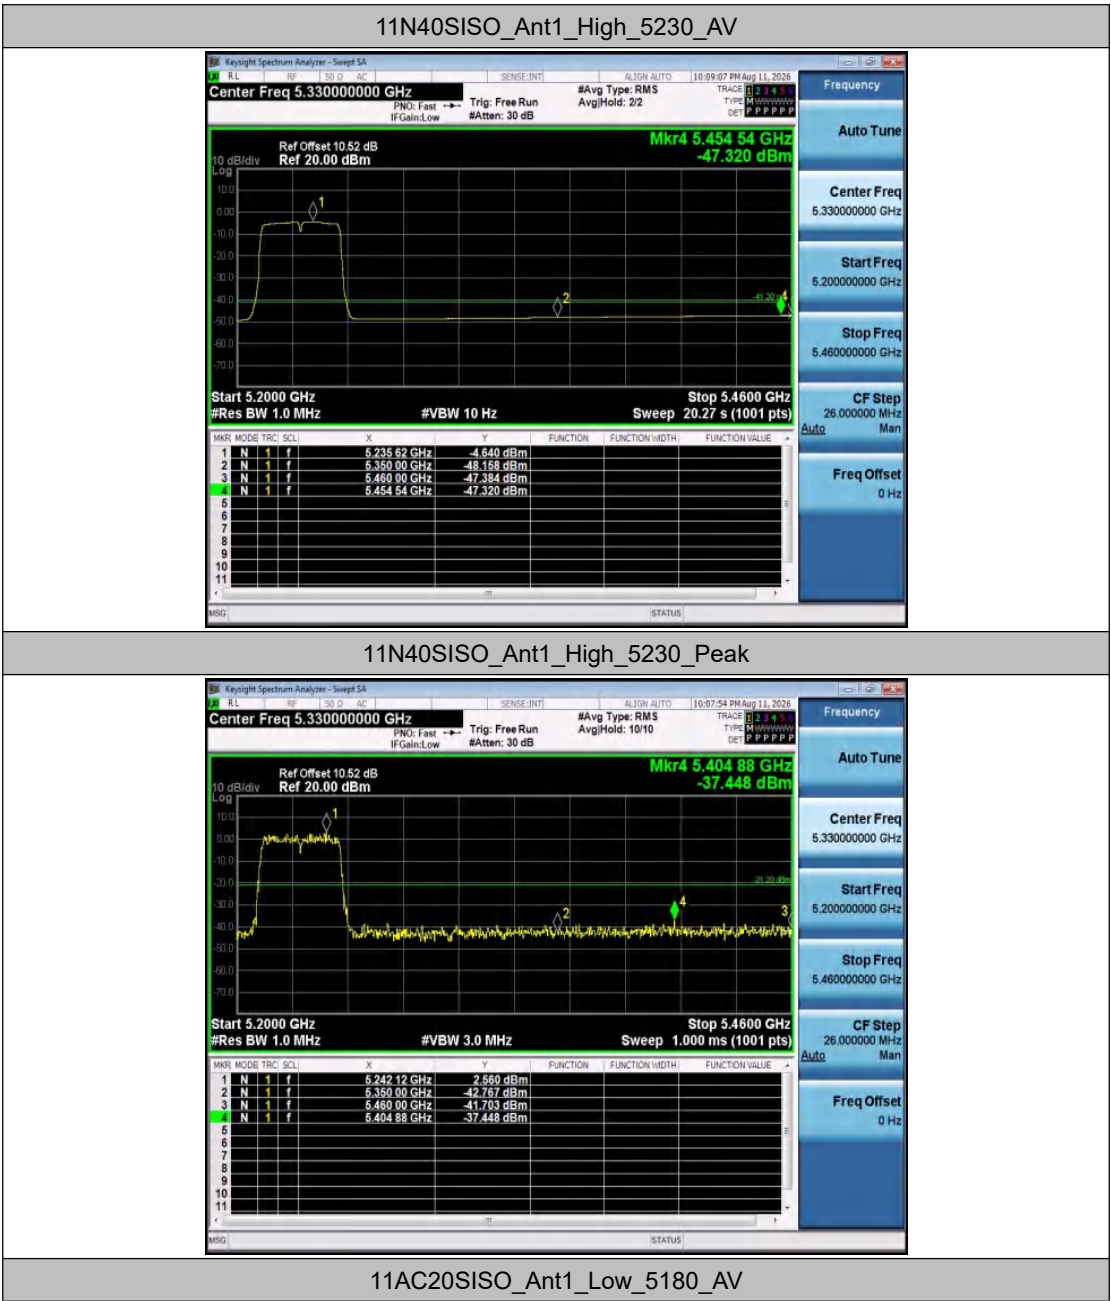





11AC20SISO_Ant1_Low_5180_Peak



11AC20SISO_Ant1_High_5240_AV



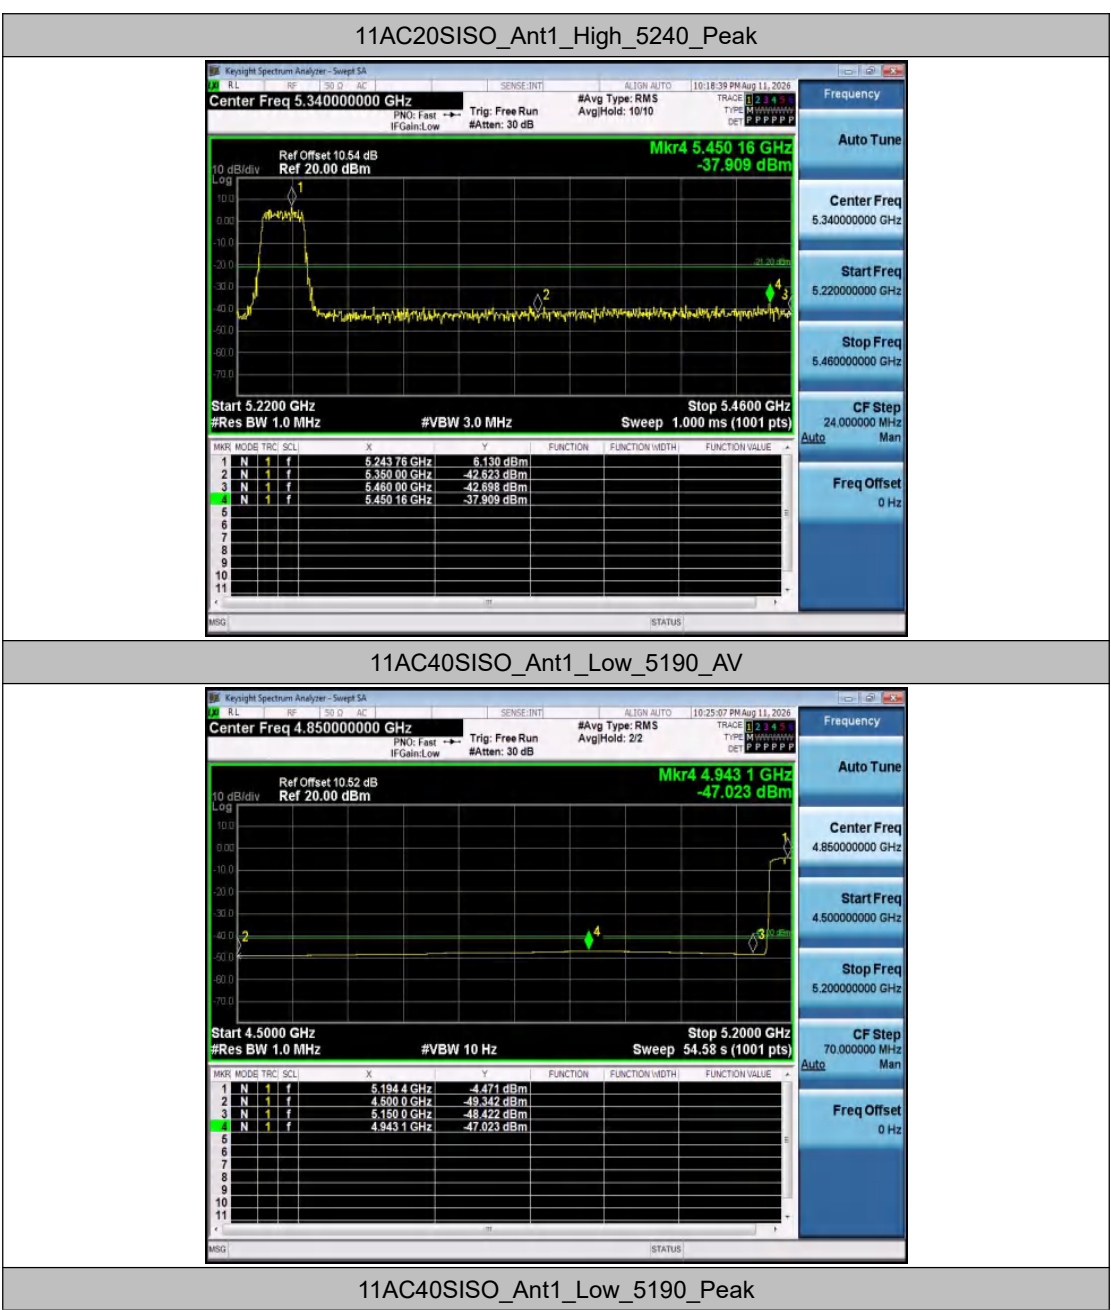


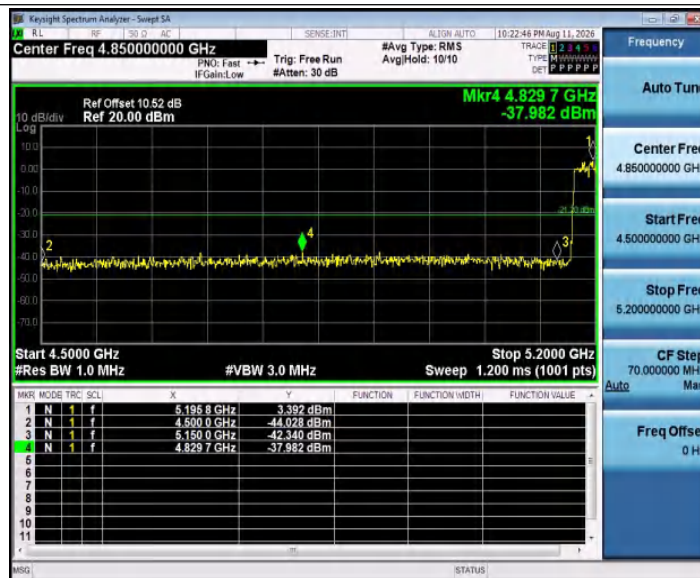


11AC40SISO_Ant1_High_5230_AV



11AC40SISO_Ant1_High_5230_Peak

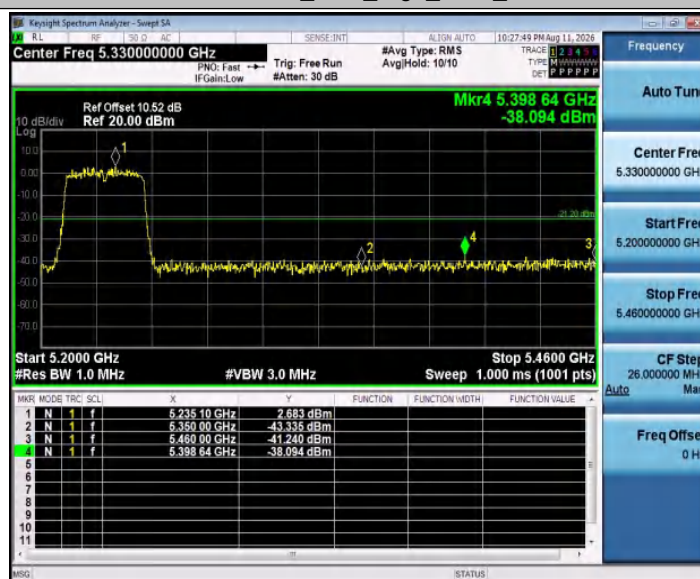

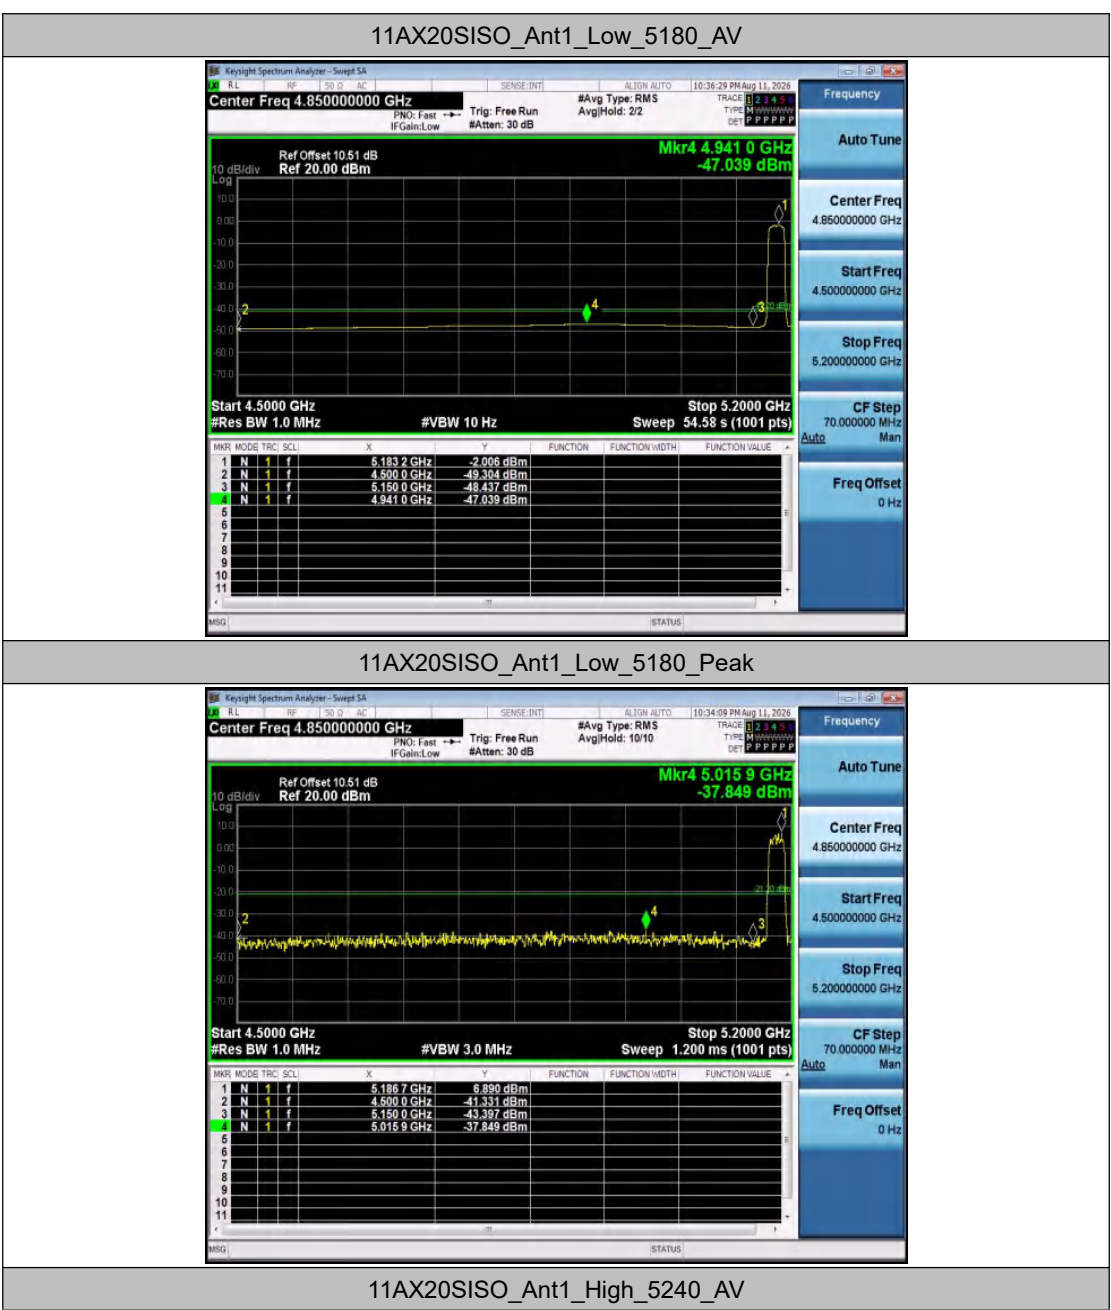


11AX20SISO_Ant1_Low_5180_Peak

Frequency


Auto Tune

Center Freq
4.850000000 GHzStart Freq
4.500000000 GHzStop Freq
5.200000000 GHzCF Step
70.000000 MHz
Auto ManFreq Offset
0 Hz

11AX20SISO_Ant1_High_5240_AV

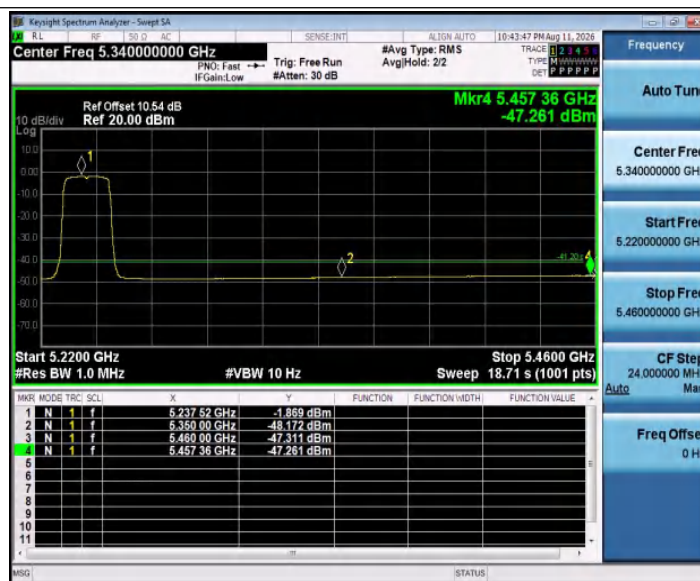

11AX20SISO_Ant1_High_5240_Peak

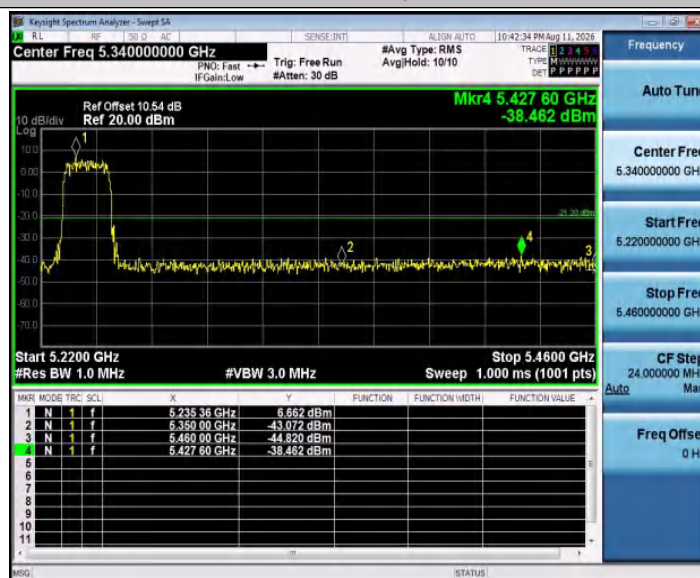

11AX40SISO_Ant1_Low_5190_AV

