

RF Test Data for Bluetooth (Conducted Measurements)

General Description of EUT	
Product Name:	Wireless headphones
Test Model:	CERAMICS Ultra
Sample ID:	HC-C-202508-0228-01-01-2#
Environmental Conditions	
Temperature:	23.8℃
Relative Humidity:	48%
Test Voltage:	DC 3.7V
Test Engineer:	Lily. zhang
Note: For a more detailed features description, please refer to the report TBR-C-202508-0228-4 The report only show the worst case data.	

Contents

1.	Dwell Time	3
2.	Duty Cycle	9
3.	Maximum Conducted Output Power	15
4.	-20dB Bandwidth	27
5.	Occupied Channel Bandwidth	33
6.	Band Edge	39
7.	Band Edge(Hopping)	46
8.	Conducted RF Spurious Emission	53
9.	Restrict Band	63
10.	Carrier Frequencies Separation	70
11.	Number of Hopping Channel	73


1. Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.383	122.56	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.639	262.24	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.886	307.84	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.391	125.12	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.633	261.28	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.891	308.373	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.392	125.44	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.641	262.56	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.892	308.48	31600	400	Pass


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)

Test Graphs


Dwell NVNT 1-DH1 2441MHz Ant1

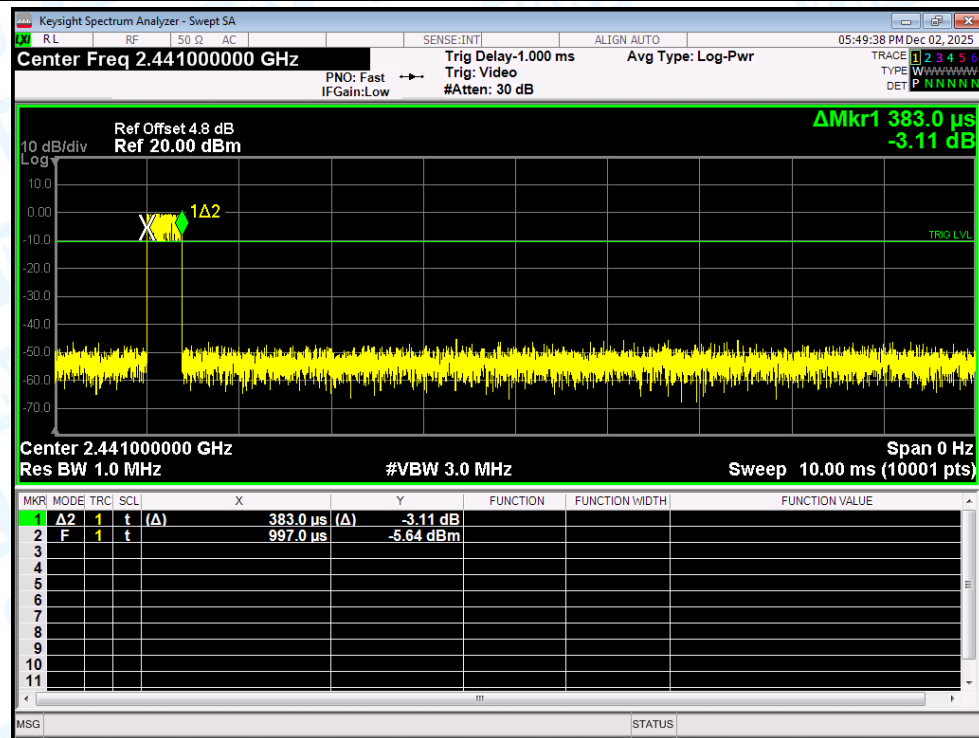


Dwell NVNT 1-DH3 2441MHz Ant1

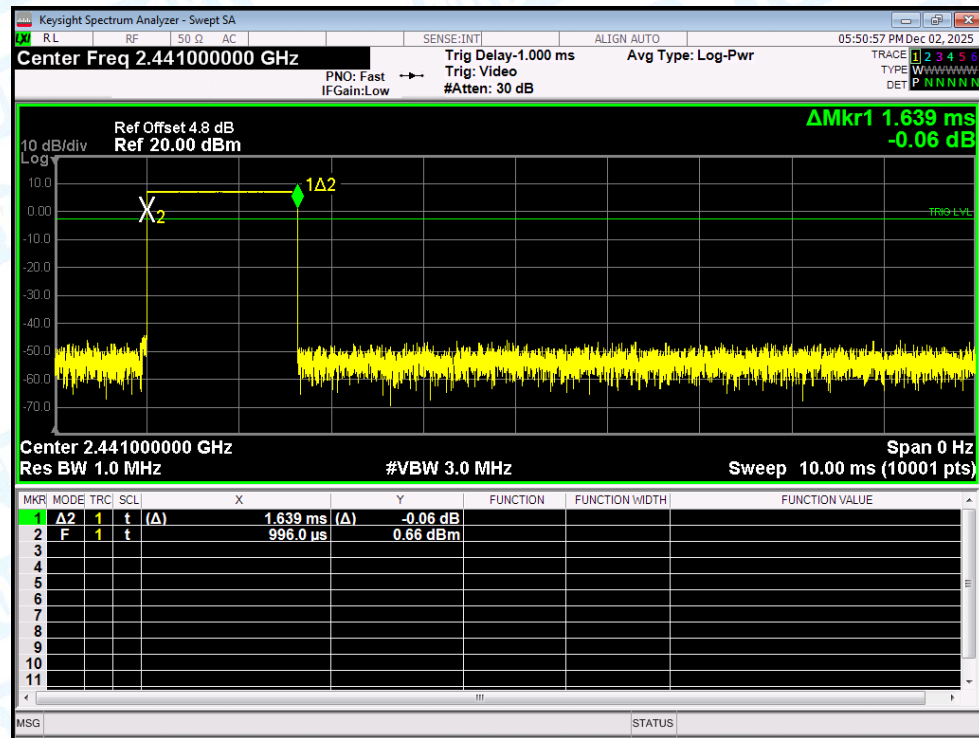


Dwell NVNT 1-DH5 2441MHz Ant1

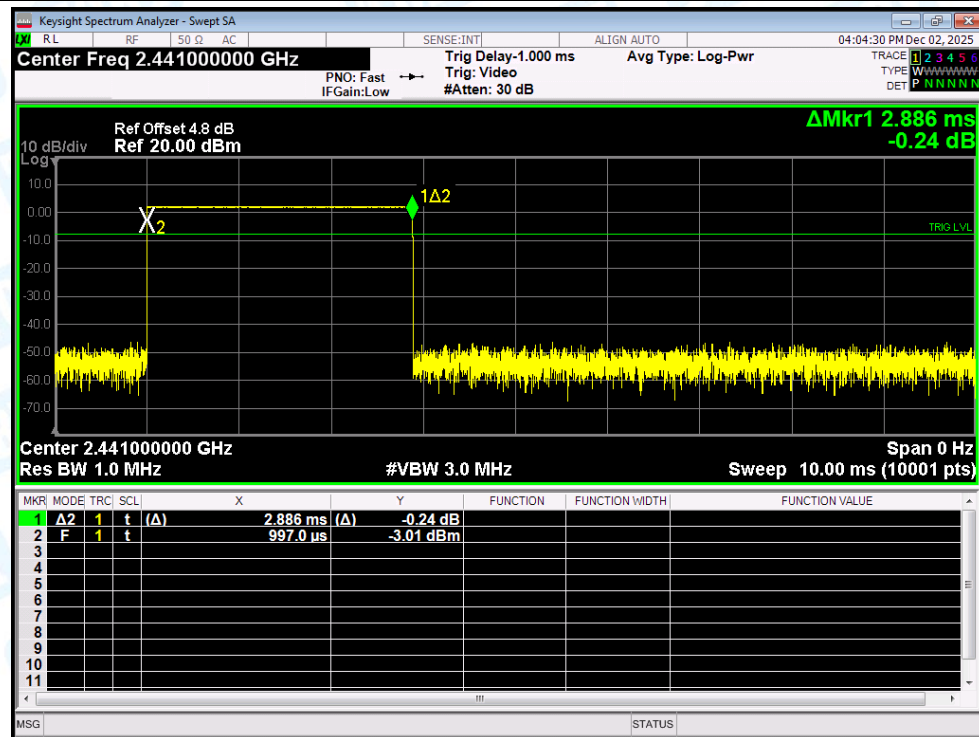


Dwell NVNT 2-DH1 2441MHz Ant1

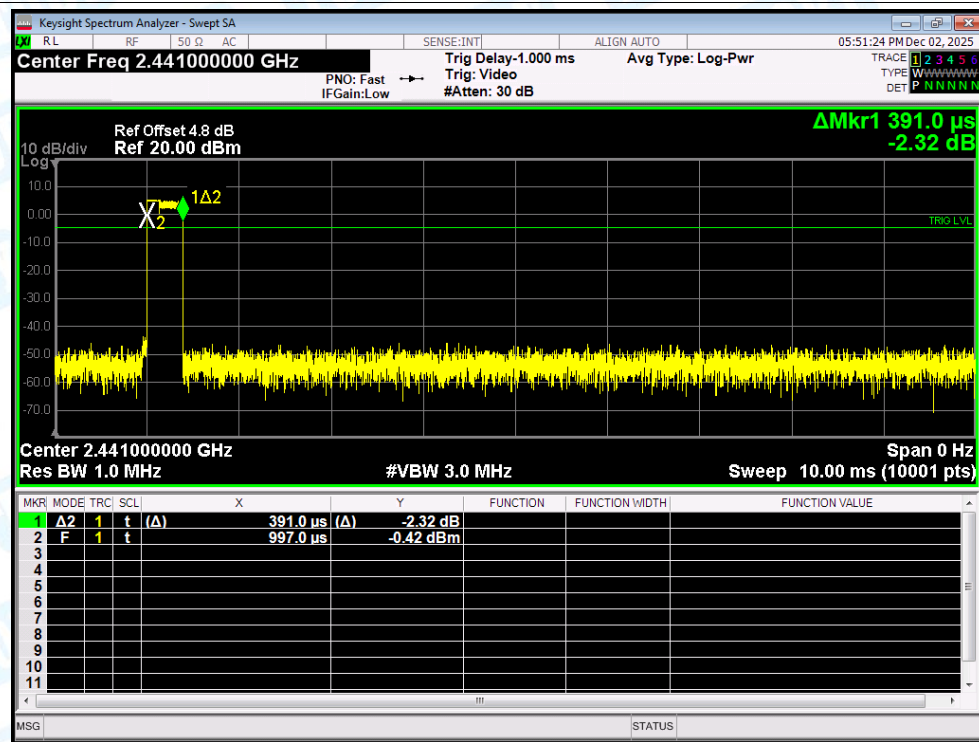


Dwell NVNT 2-DH3 2441MHz Ant1

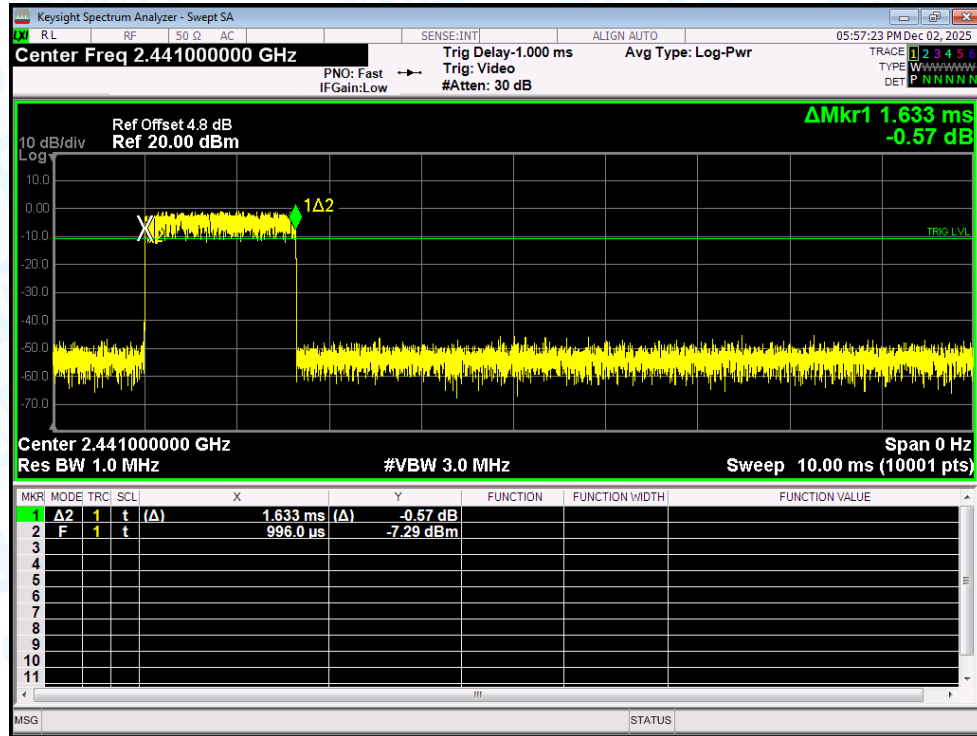


Dwell NVNT 2-DH5 2441MHz Ant1

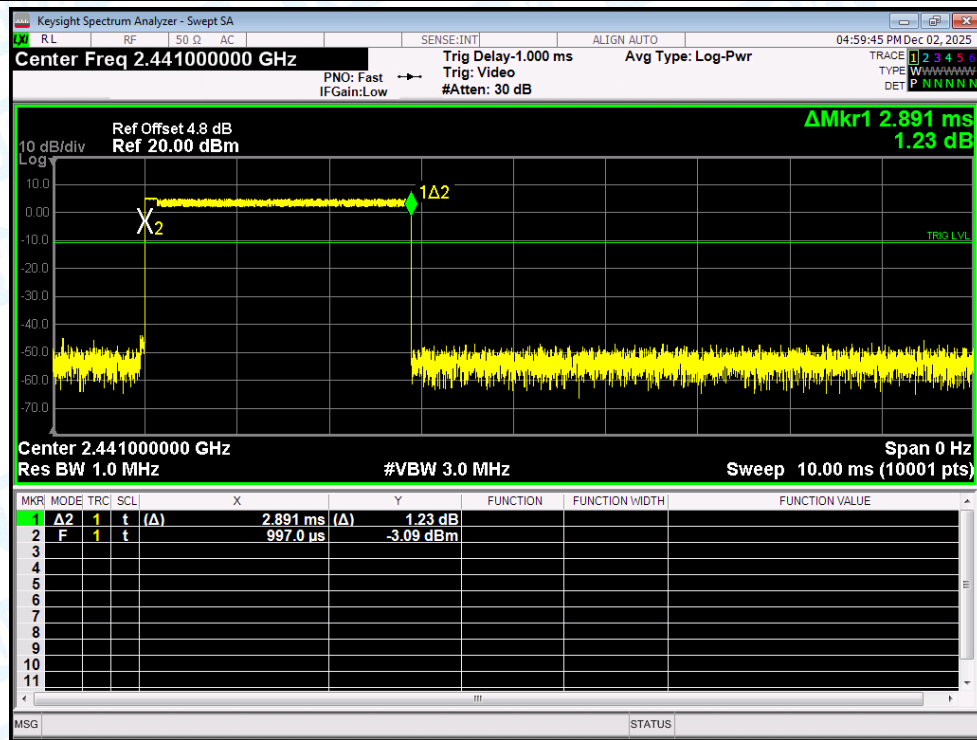


Dwell NVNT 3-DH1 2441MHz Ant1

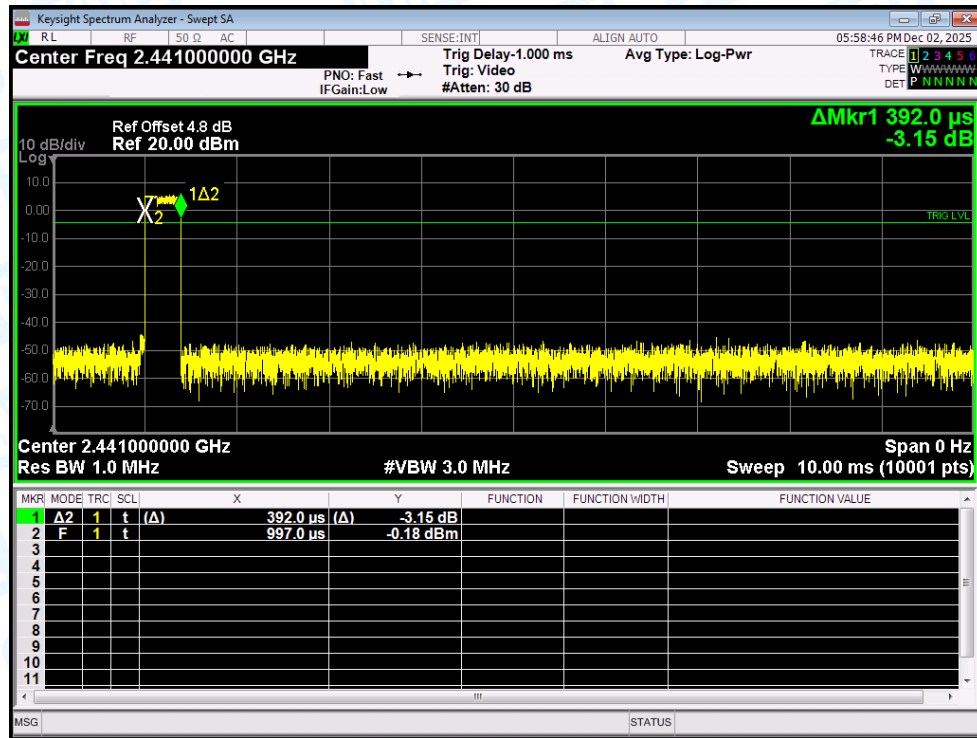

Dwell NVNT 3-DH3 2441MHz Ant1

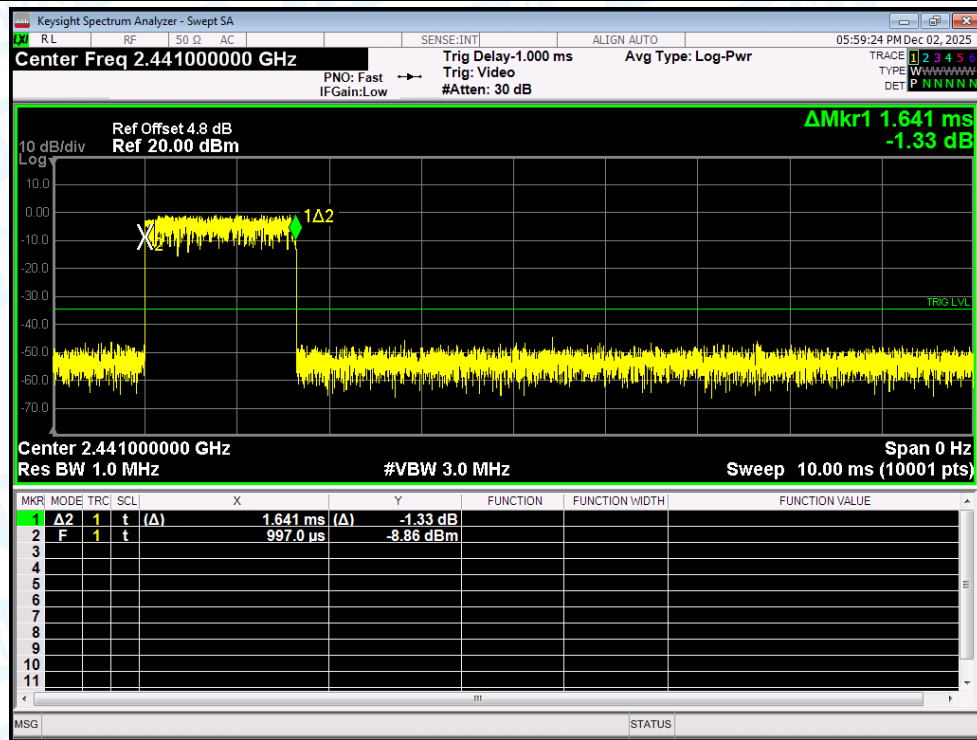

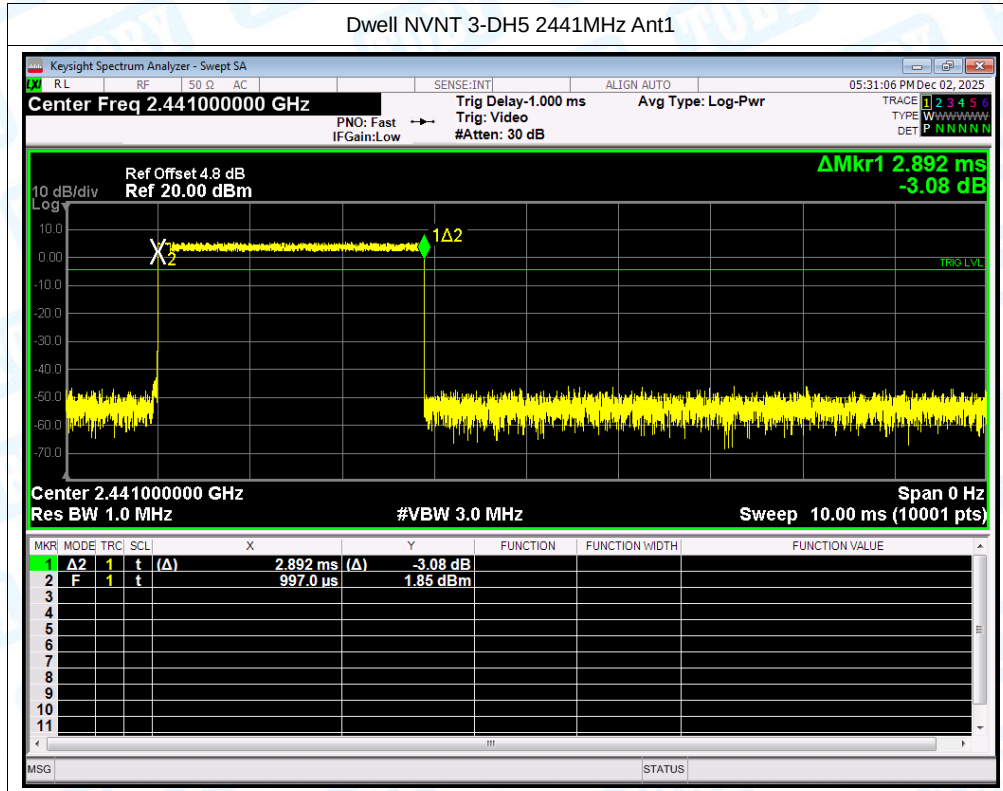


2. Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	29.82	5.25	0.35
NVNT	1-DH5	2441	Ant1	29.82	5.25	0.35
NVNT	1-DH5	2480	Ant1	29.82	5.25	0.35
NVNT	2-DH5	2402	Ant1	29.82	5.25	0.35
NVNT	2-DH5	2441	Ant1	29.86	5.25	0.35
NVNT	2-DH5	2480	Ant1	29.93	5.24	0.34
NVNT	3-DH5	2402	Ant1	29.86	5.25	0.35
NVNT	3-DH5	2441	Ant1	29.86	5.25	0.35
NVNT	3-DH5	2480	Ant1	29.93	5.24	0.34


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)

Test Graphs


Duty Cycle NVNT 1-DH5 2402MHz Ant1

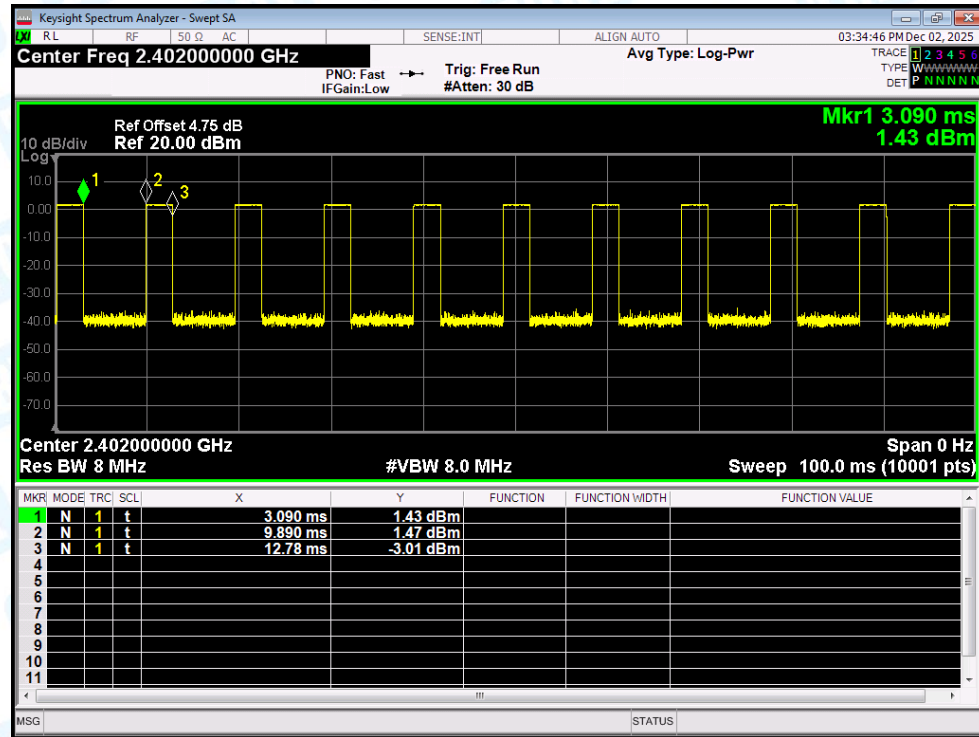


Duty Cycle NVNT 1-DH5 2441MHz Ant1

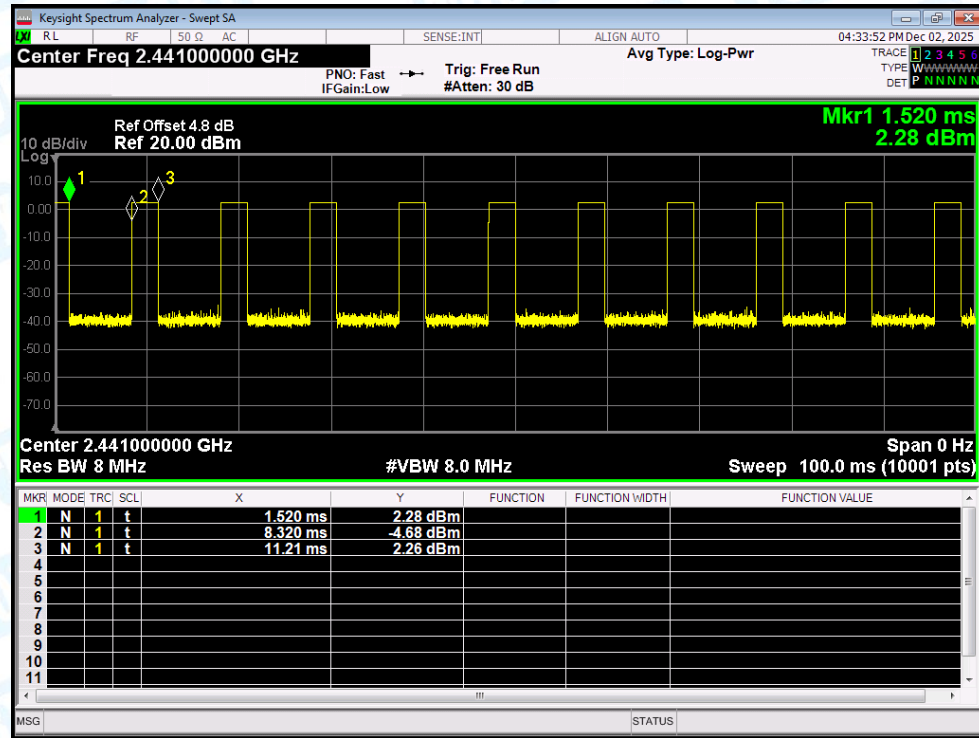


Duty Cycle NVNT 1-DH5 2480MHz Ant1

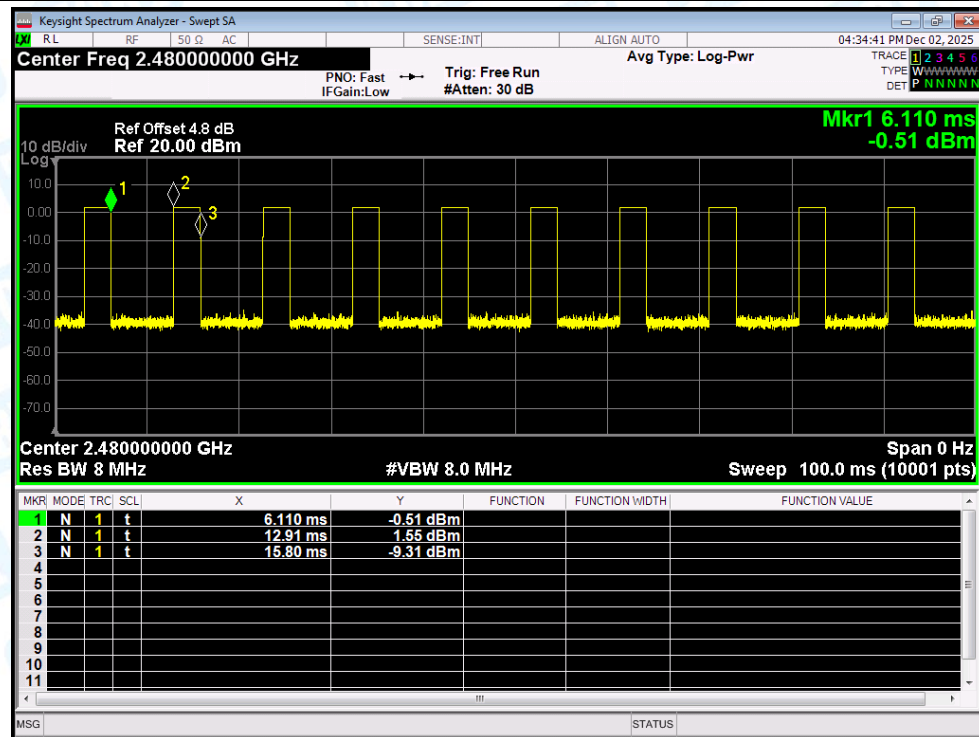


Duty Cycle NVNT 2-DH5 2402MHz Ant1

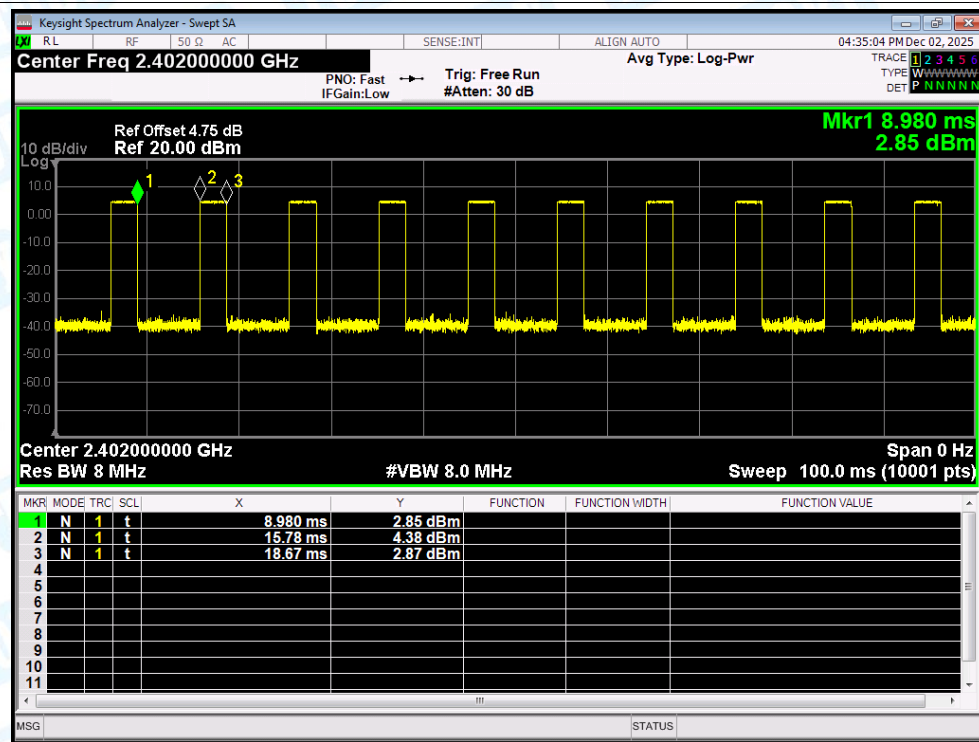


Duty Cycle NVNT 2-DH5 2441MHz Ant1

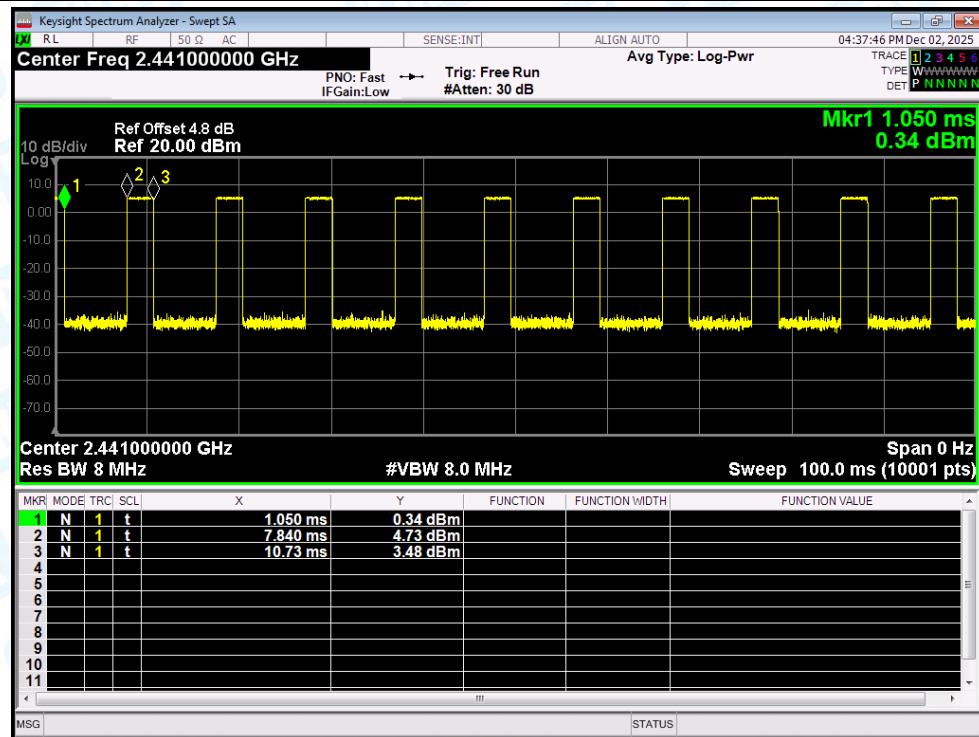


Duty Cycle NVNT 2-DH5 2480MHz Ant1

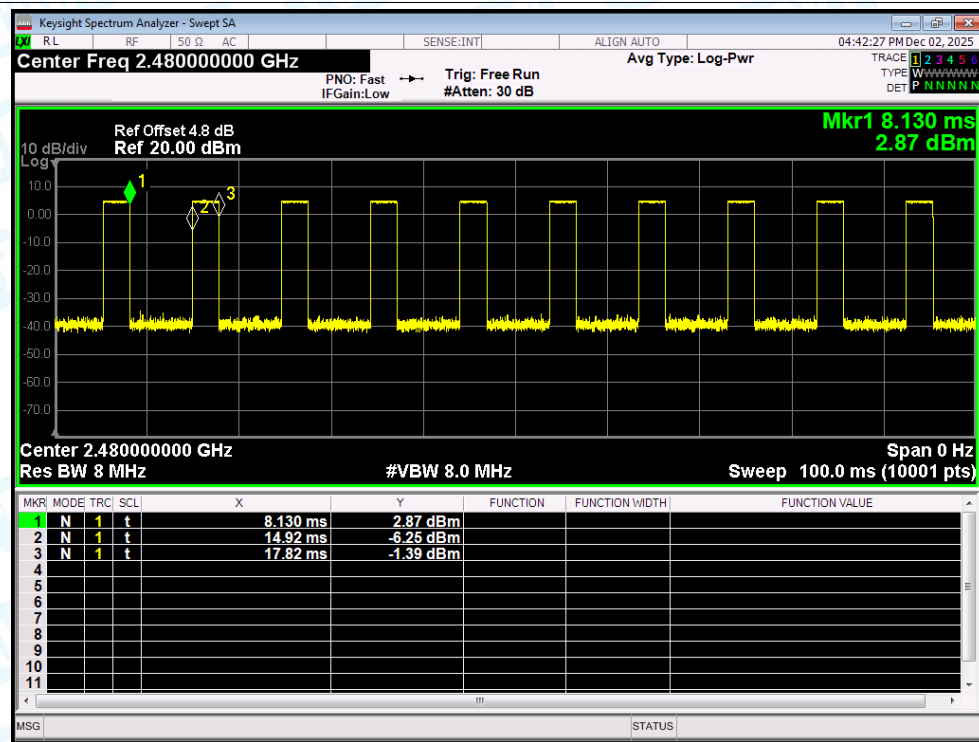


Duty Cycle NVNT 3-DH5 2402MHz Ant1

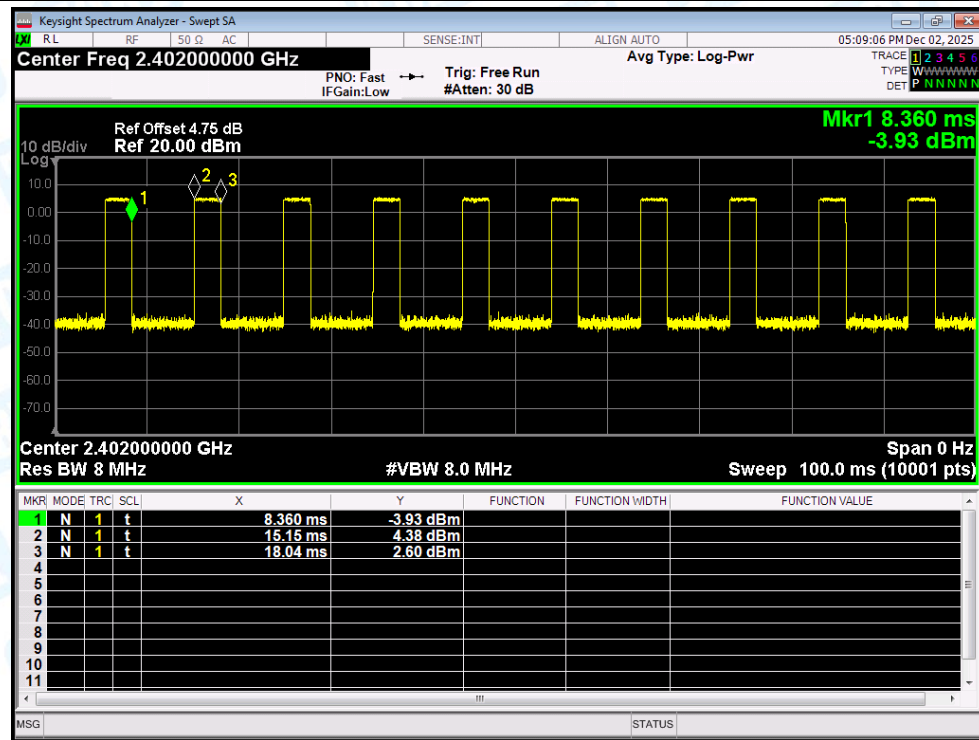

Duty Cycle NVNT 3-DH5 2441MHz Ant1

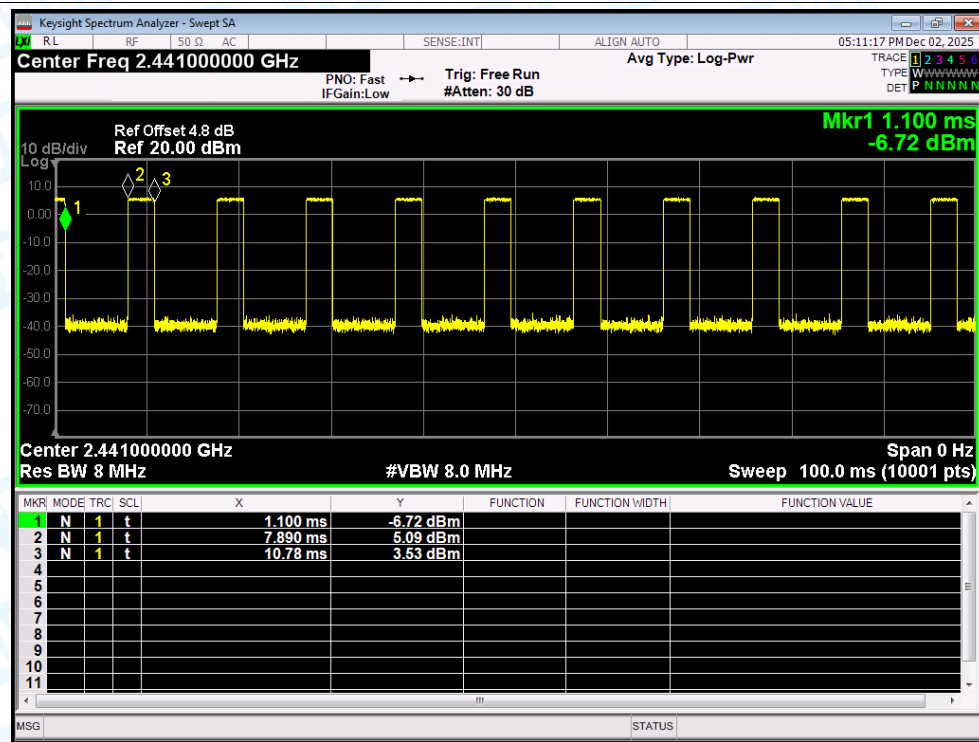

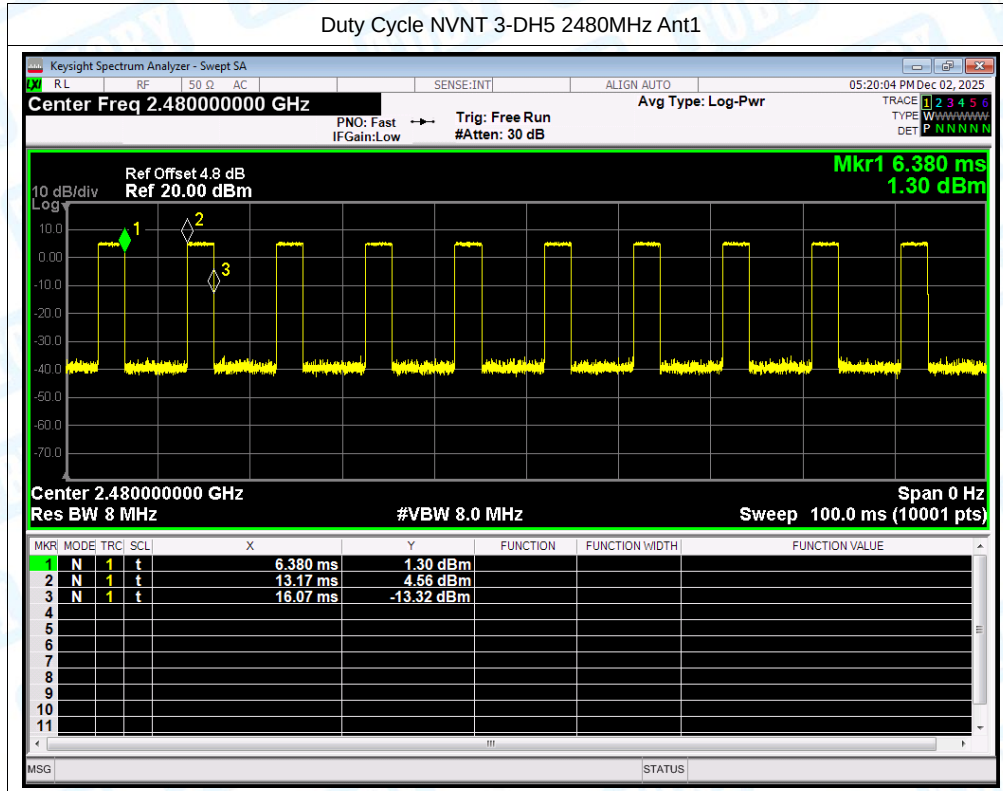


3. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	6.323	21	Pass
NVNT	1-DH5	2441	Ant1	6.915	21	Pass
NVNT	1-DH5	2480	Ant1	6.526	21	Pass
NVNT	2-DH5	2402	Ant1	4.636	21	Pass
NVNT	2-DH5	2441	Ant1	5.231	21	Pass
NVNT	2-DH5	2480	Ant1	4.732	21	Pass
NVNT	3-DH5	2402	Ant1	5.018	21	Pass
NVNT	3-DH5	2441	Ant1	5.775	21	Pass
NVNT	3-DH5	2480	Ant1	5.221	21	Pass


Only showed the worst mode test data. (Right Earphone)

Test Graphs


Power NVNT 1-DH5 2402MHz Ant1

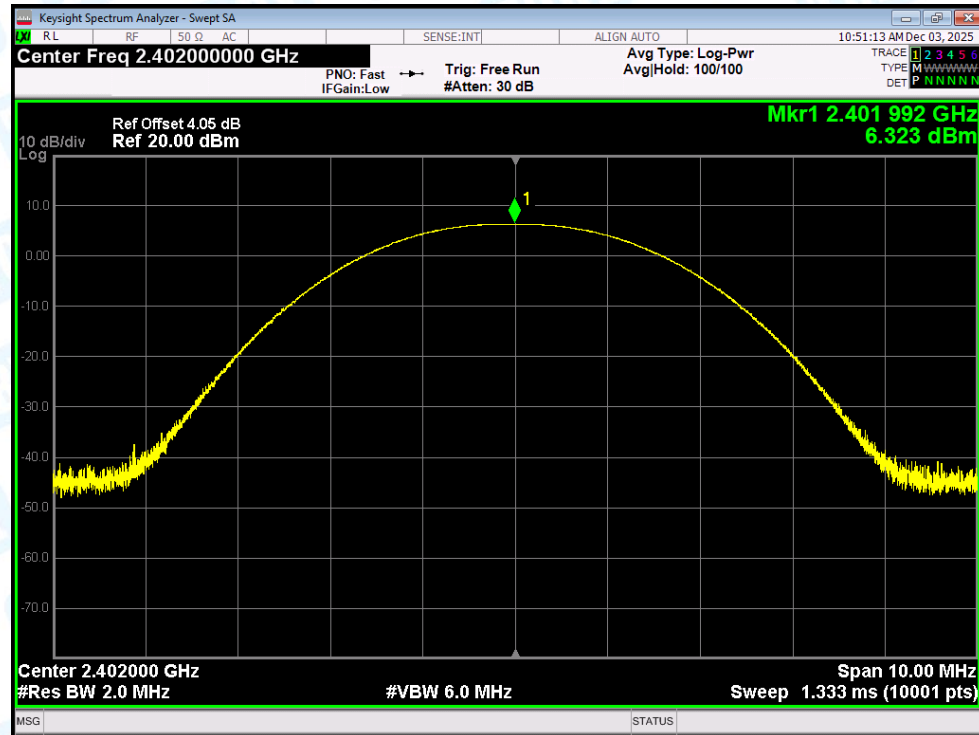


Power NVNT 1-DH5 2441MHz Ant1

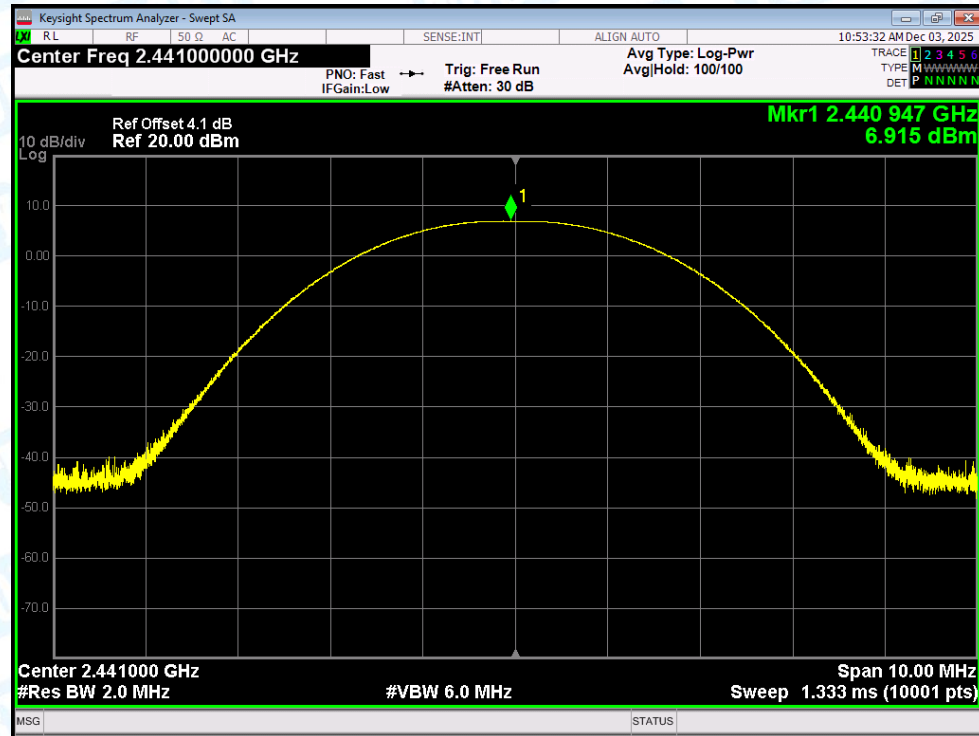


Power NVNT 1-DH5 2480MHz Ant1

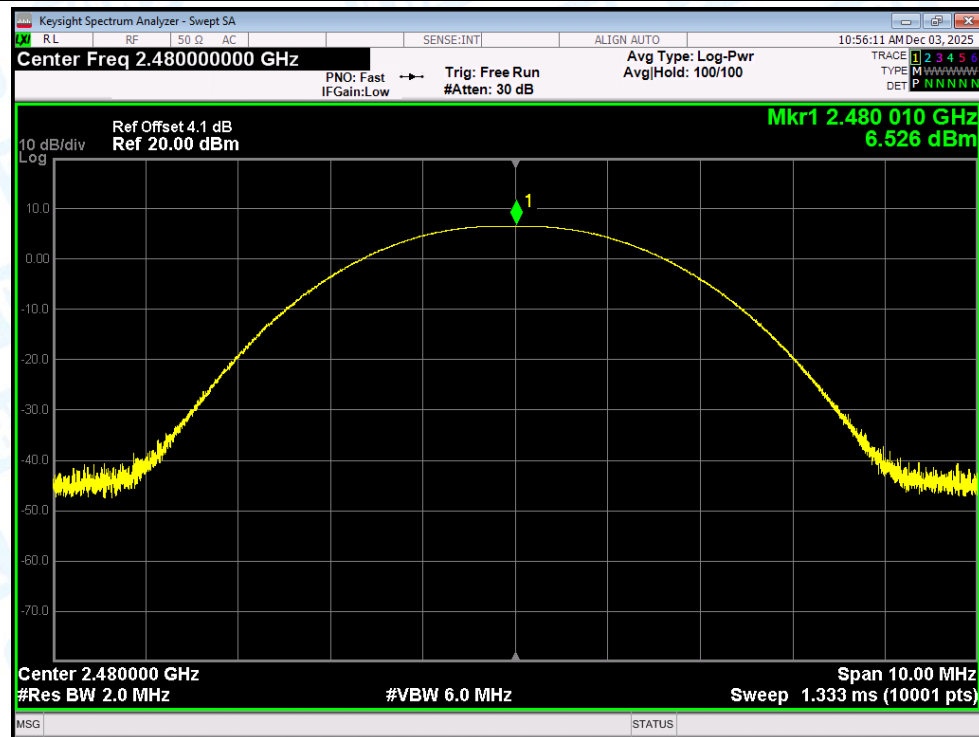


Power NVNT 2-DH5 2402MHz Ant1

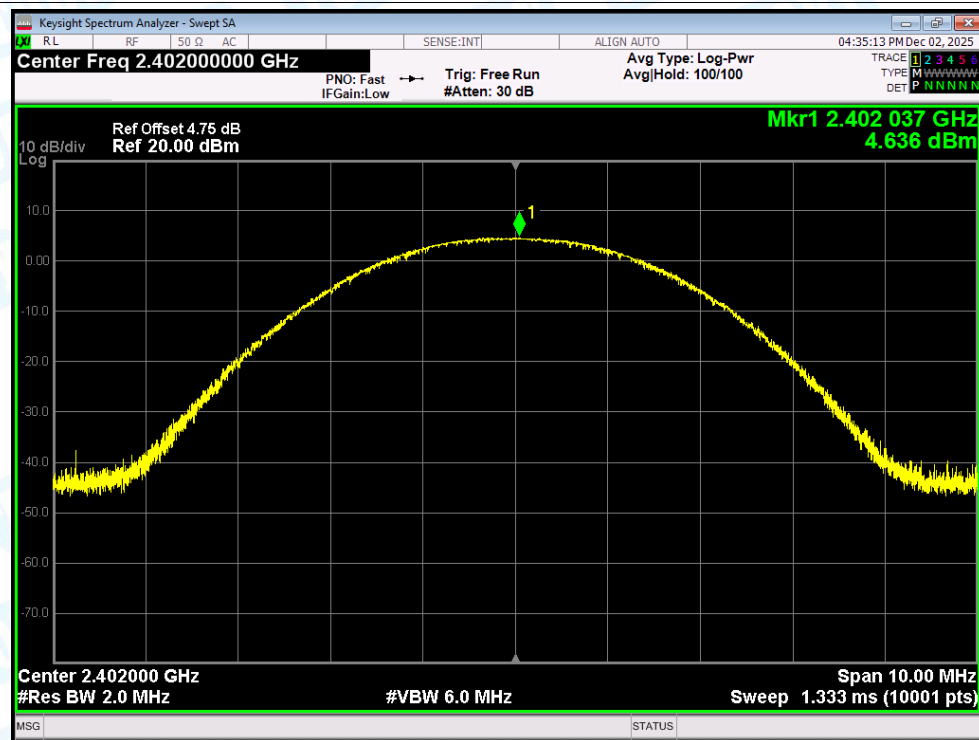


Power NVNT 2-DH5 2441MHz Ant1

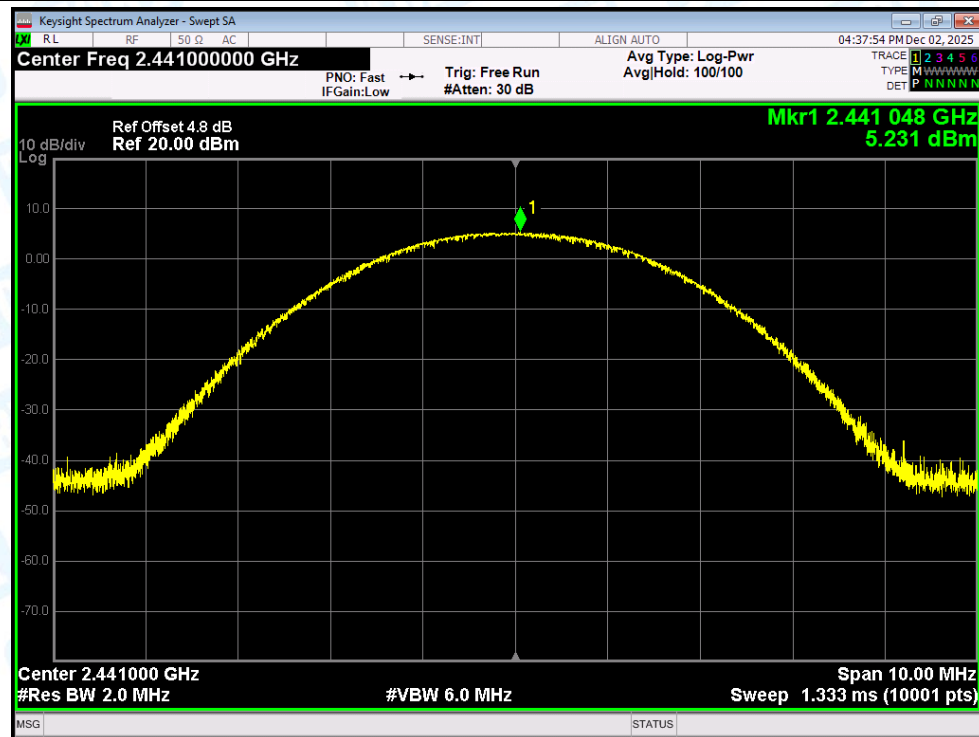


Power NVNT 2-DH5 2480MHz Ant1

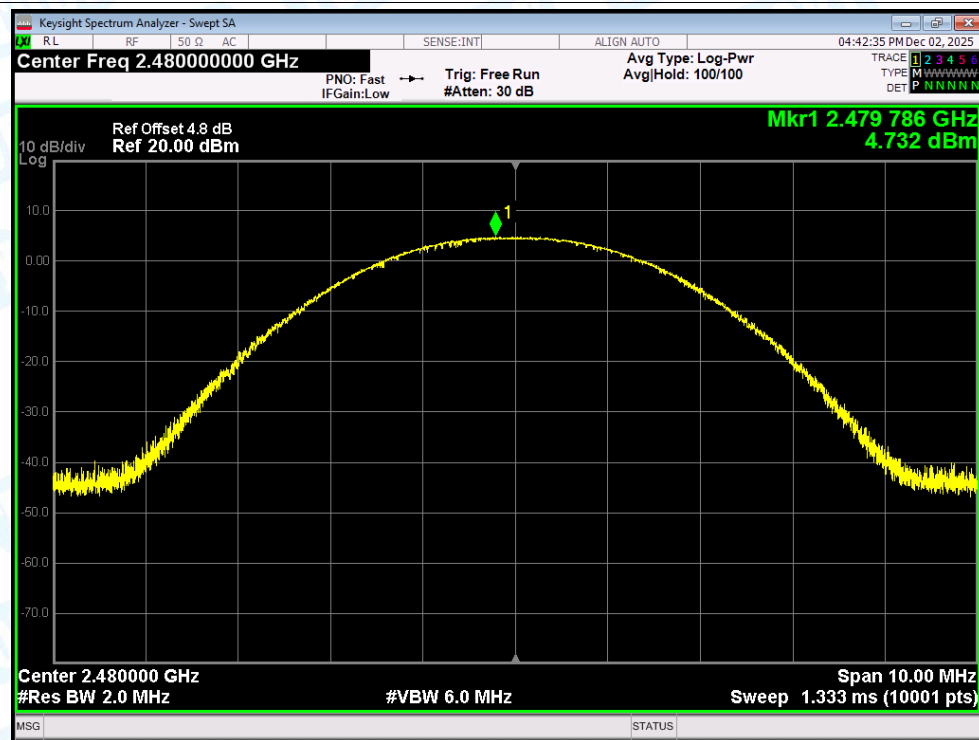


Power NVNT 3-DH5 2402MHz Ant1

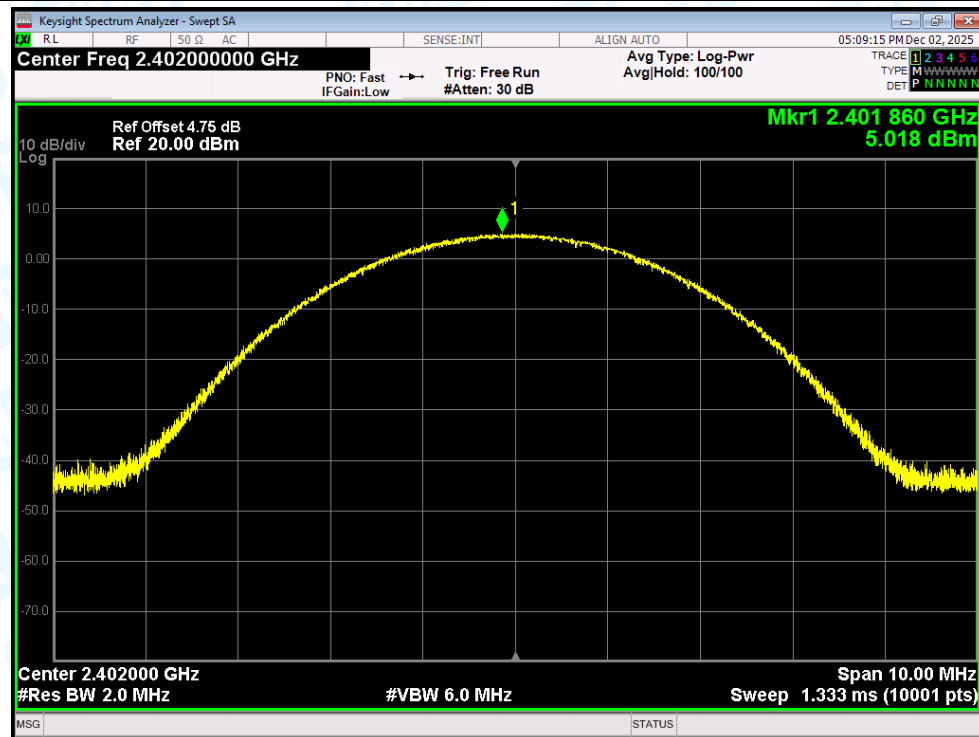

Power NVNT 3-DH5 2441MHz Ant1

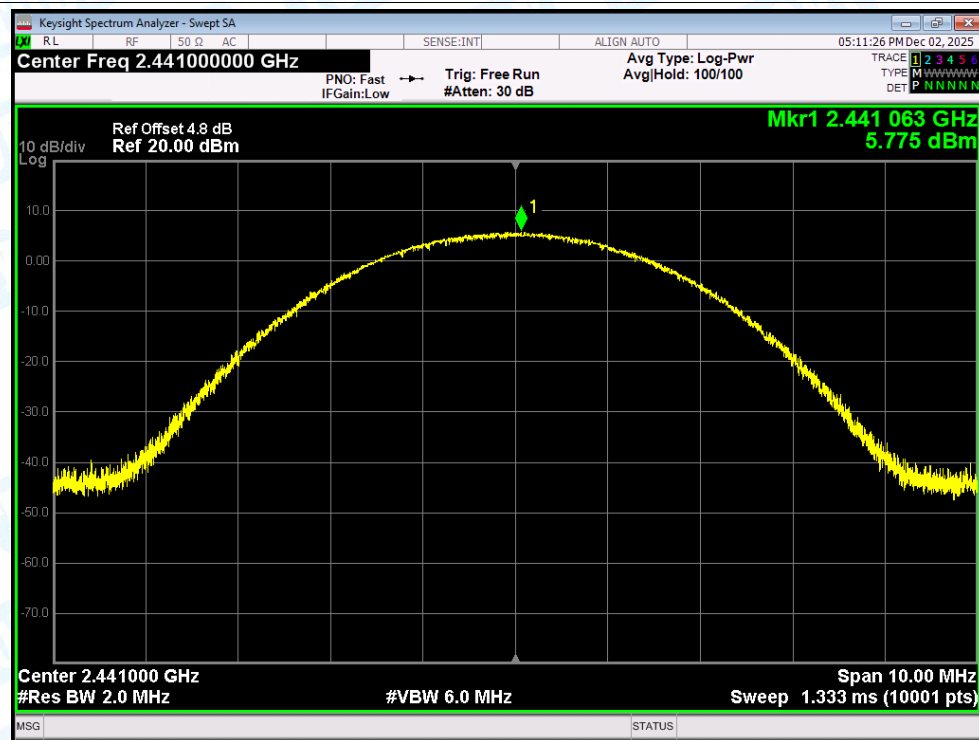

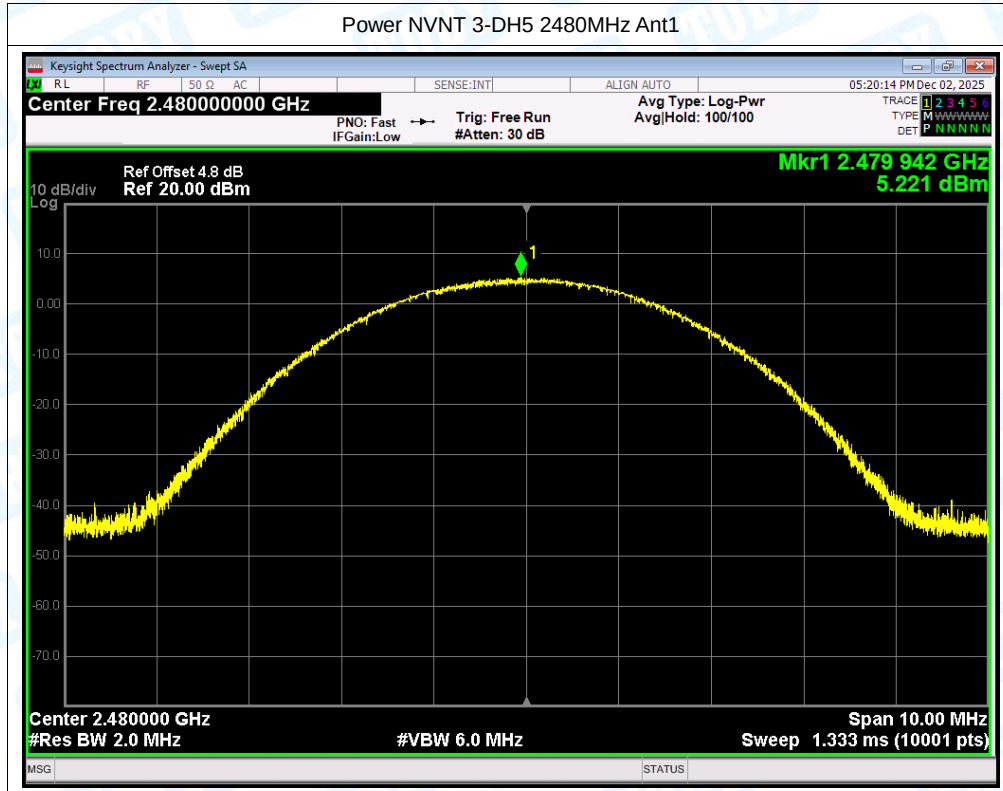


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	6.516	21	Pass
NVNT	1-DH5	2441	Ant1	7.134	21	Pass
NVNT	1-DH5	2480	Ant1	6.718	21	Pass
NVNT	2-DH5	2402	Ant1	5.203	21	Pass
NVNT	2-DH5	2441	Ant1	5.867	21	Pass
NVNT	2-DH5	2480	Ant1	5.333	21	Pass
NVNT	3-DH5	2402	Ant1	5.45	21	Pass
NVNT	3-DH5	2441	Ant1	6.313	21	Pass
NVNT	3-DH5	2480	Ant1	5.834	21	Pass


Only showed the worst mode test data. (Left Earphone)

Test Graphs


Power NVNT 1-DH5 2402MHz Ant1

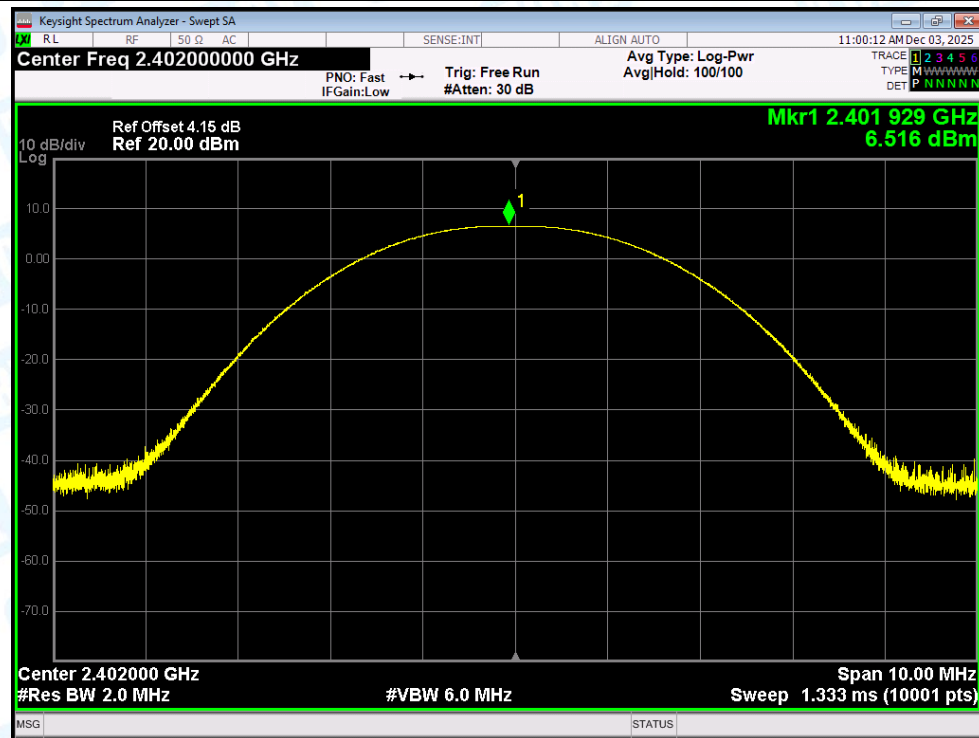


Power NVNT 1-DH5 2441MHz Ant1

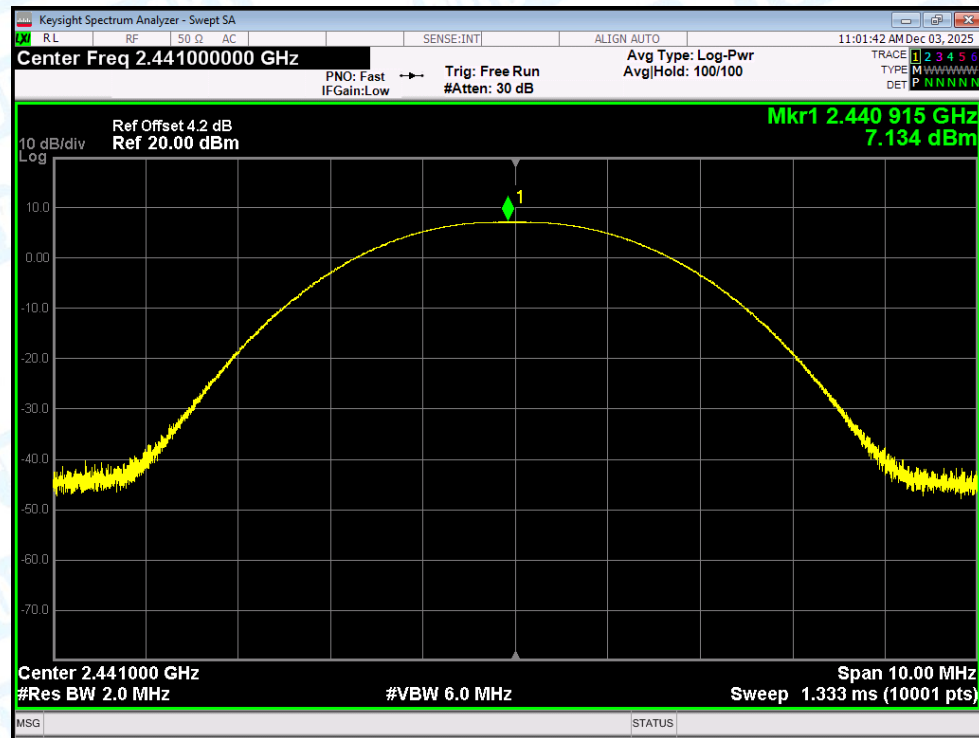


Power NVNT 1-DH5 2480MHz Ant1

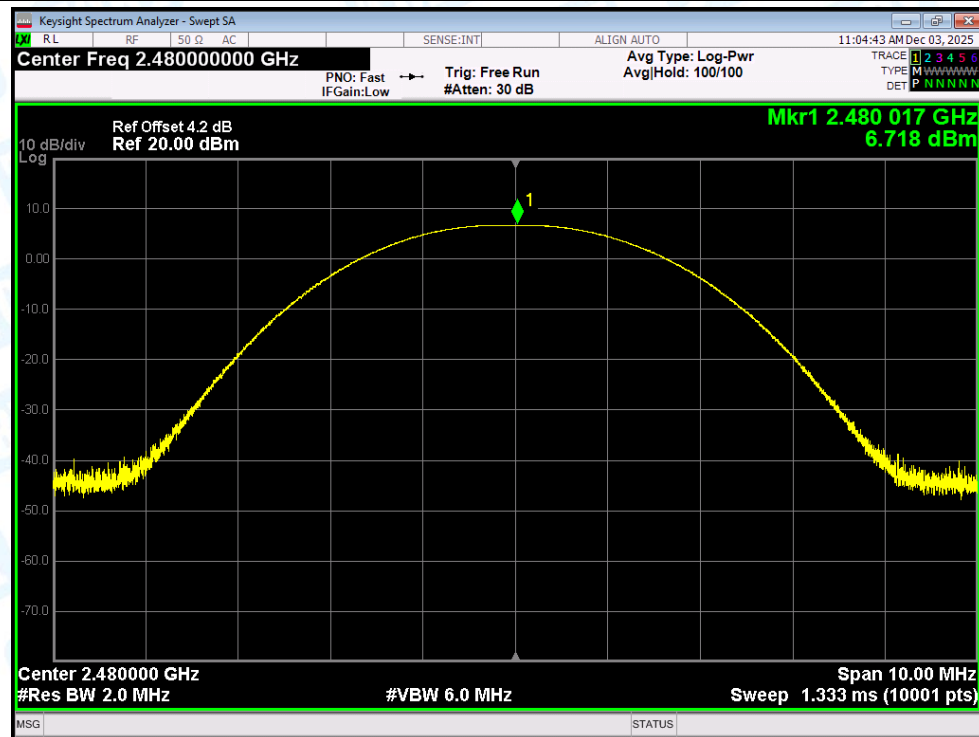


Power NVNT 2-DH5 2402MHz Ant1

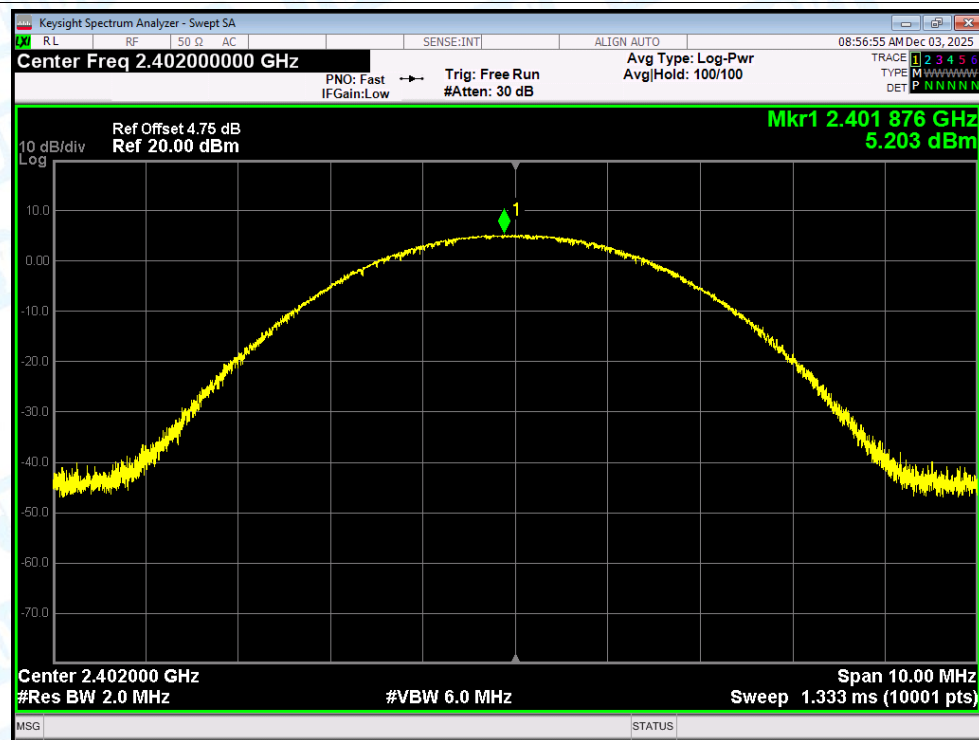


Power NVNT 2-DH5 2441MHz Ant1

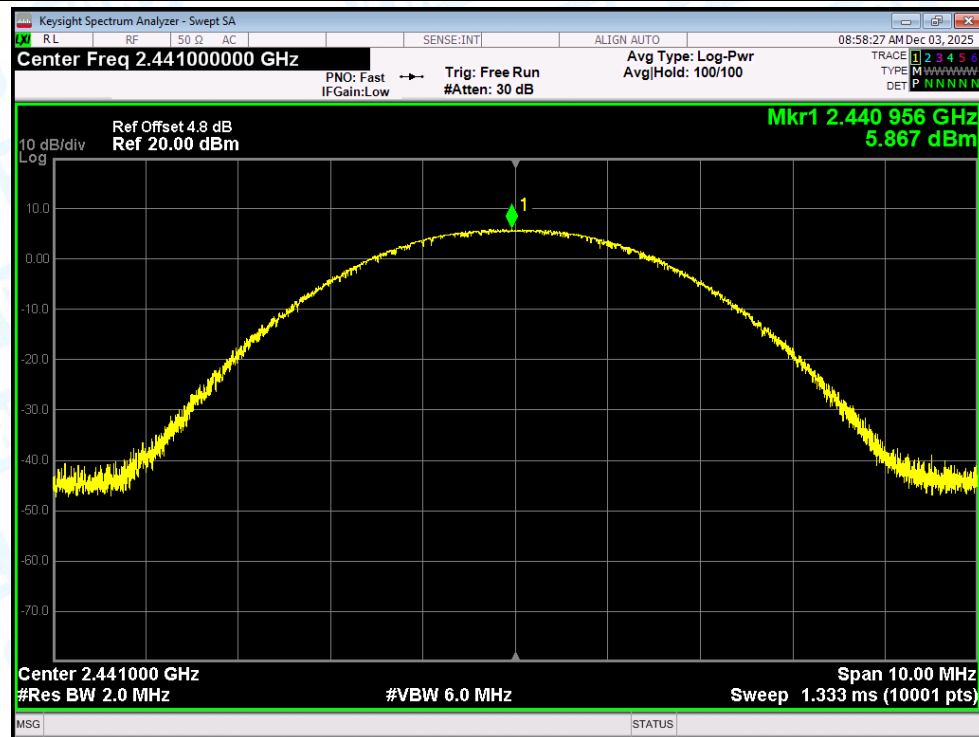


Power NVNT 2-DH5 2480MHz Ant1

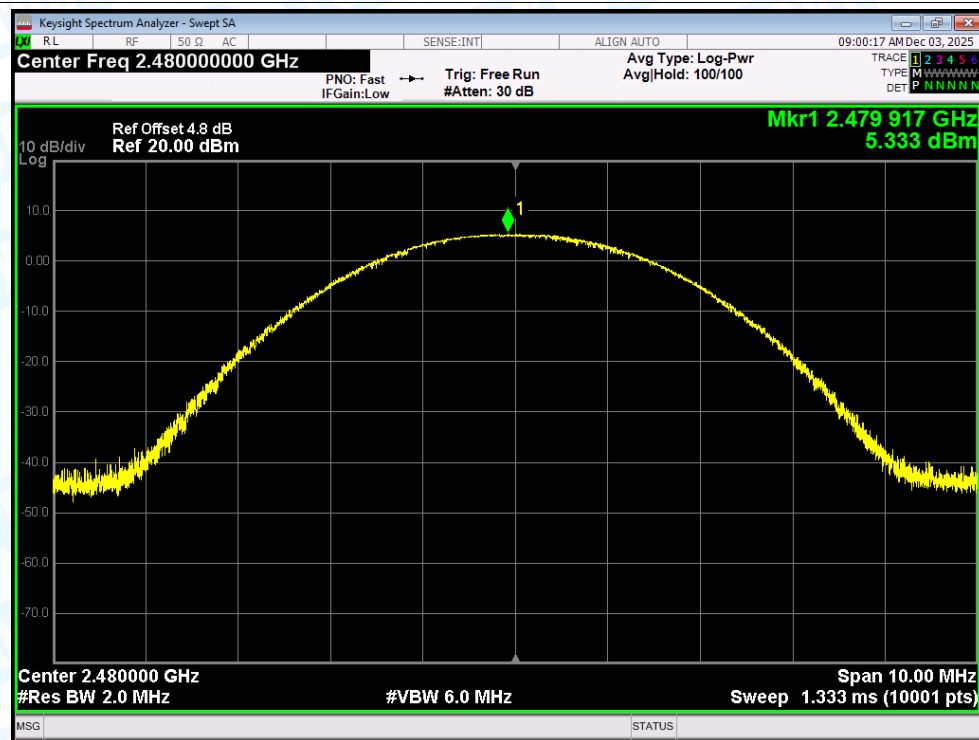


Power NVNT 3-DH5 2402MHz Ant1

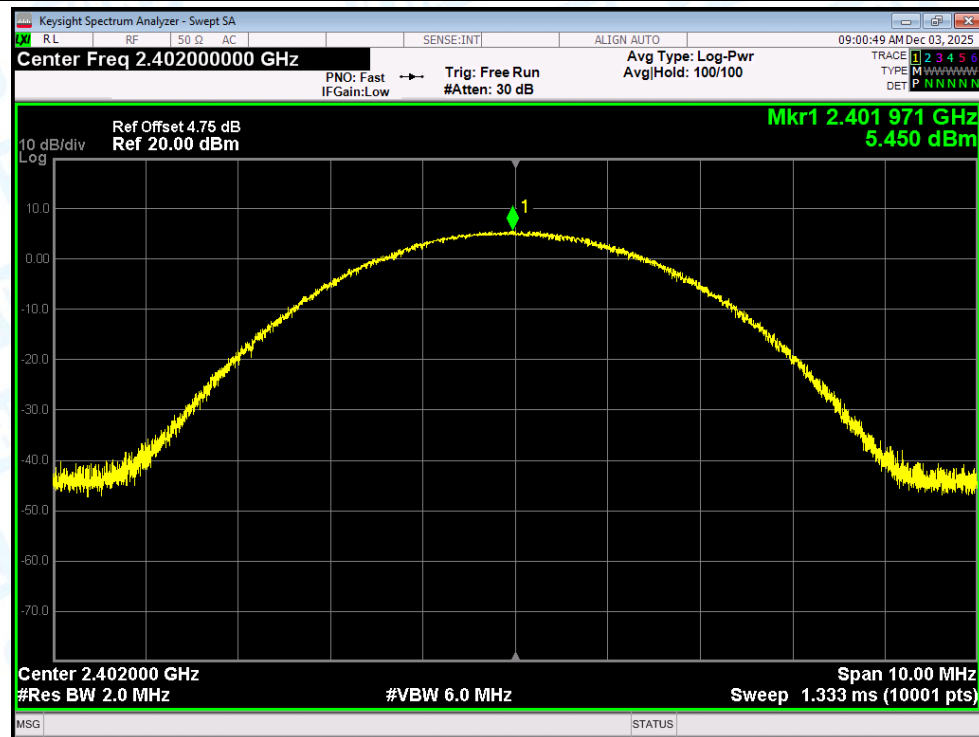

Power NVNT 3-DH5 2441MHz Ant1

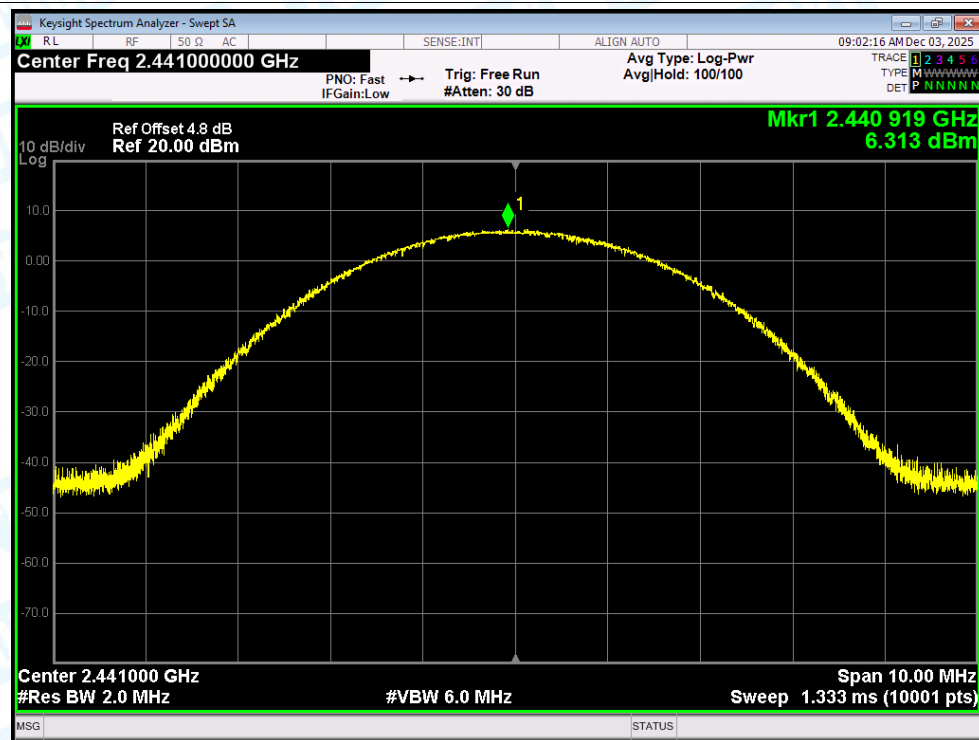

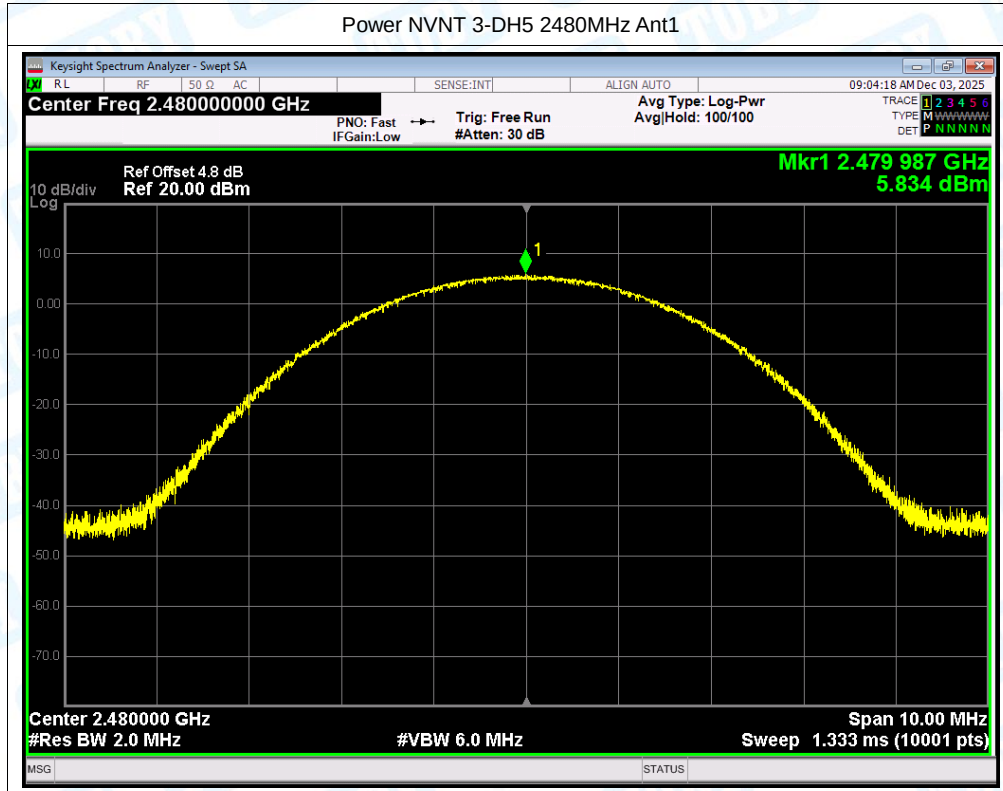


4. -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.97	----	Pass
NVNT	1-DH5	2441	Ant1	0.96	----	Pass
NVNT	1-DH5	2480	Ant1	0.98	----	Pass
NVNT	2-DH5	2402	Ant1	1.24	----	Pass
NVNT	2-DH5	2441	Ant1	1.25	----	Pass
NVNT	2-DH5	2480	Ant1	1.26	----	Pass
NVNT	3-DH5	2402	Ant1	1.26	----	Pass
NVNT	3-DH5	2441	Ant1	1.3	----	Pass
NVNT	3-DH5	2480	Ant1	1.28	----	Pass


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)

Test Graphs


-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

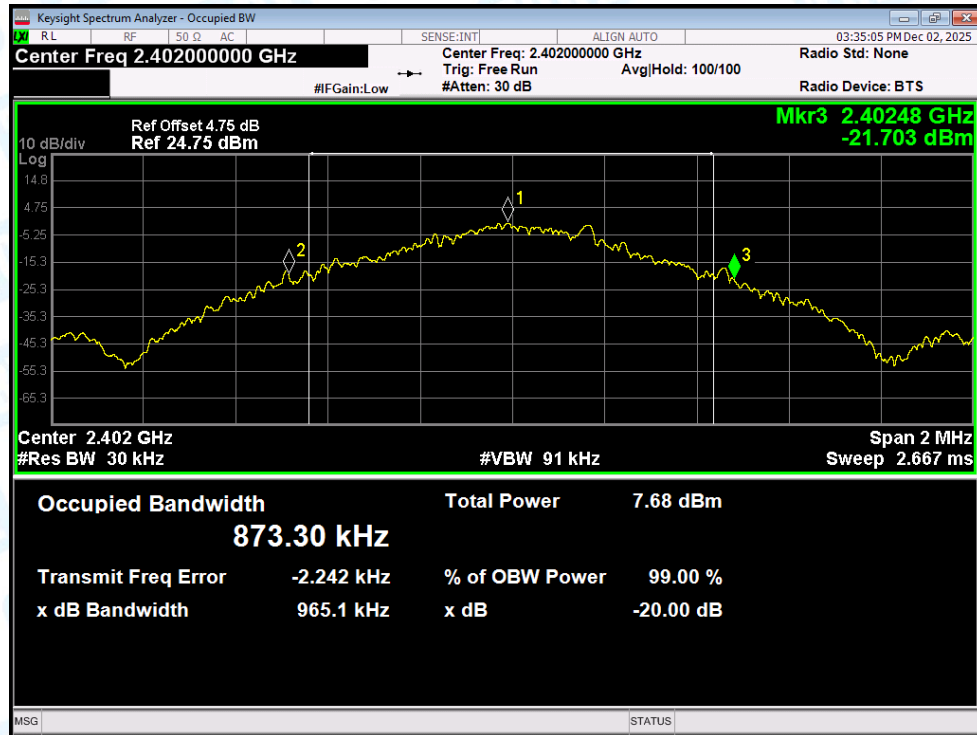


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

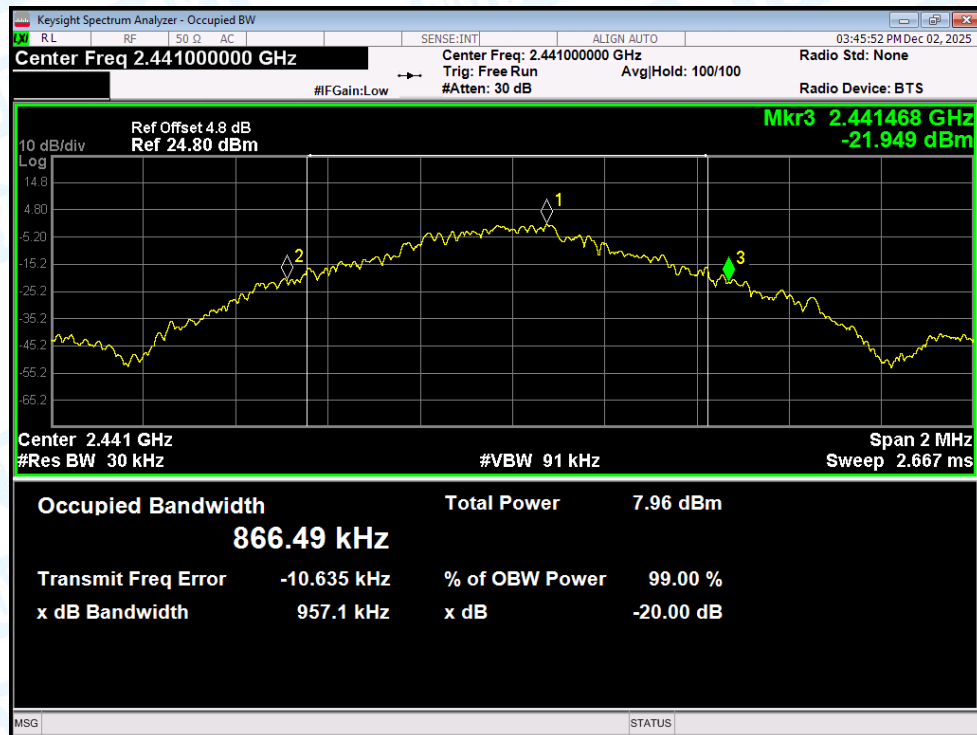


-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

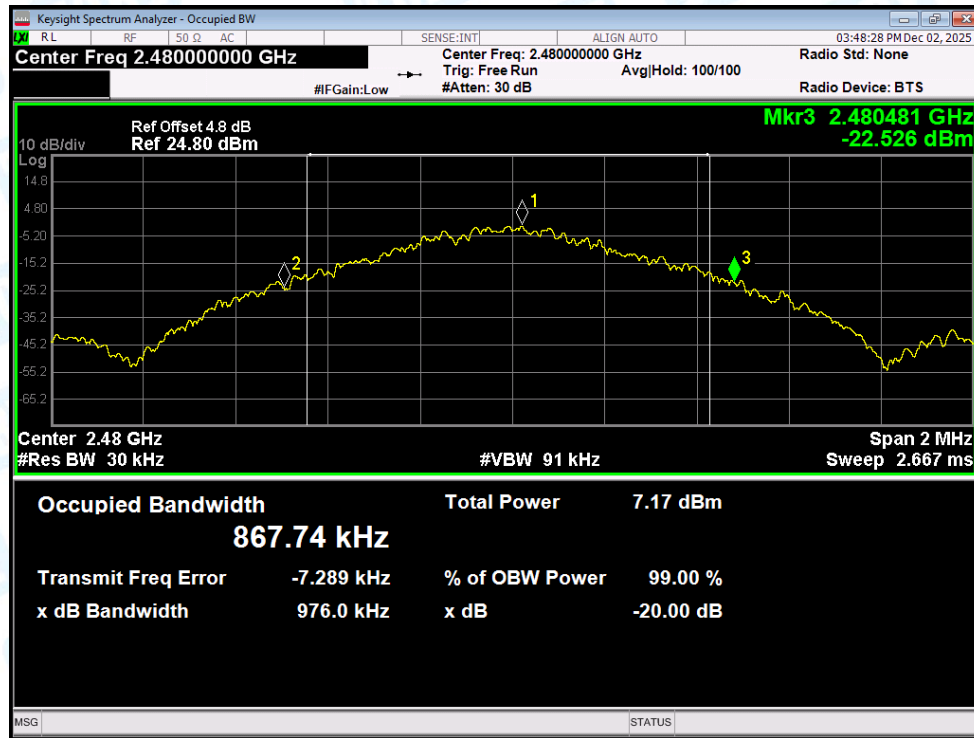


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

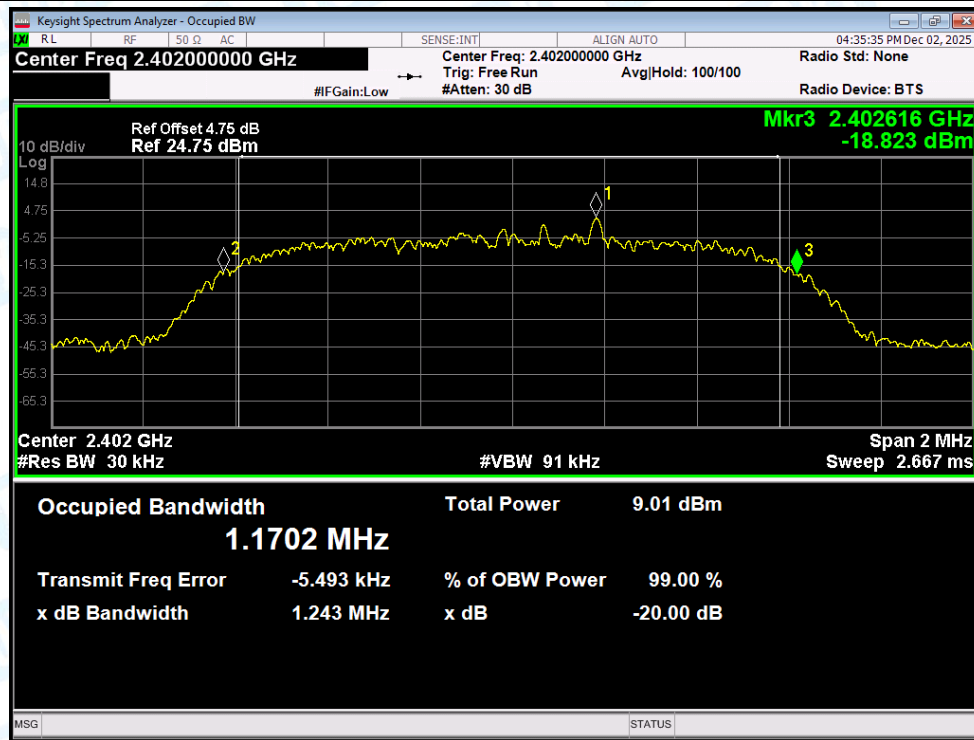


-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

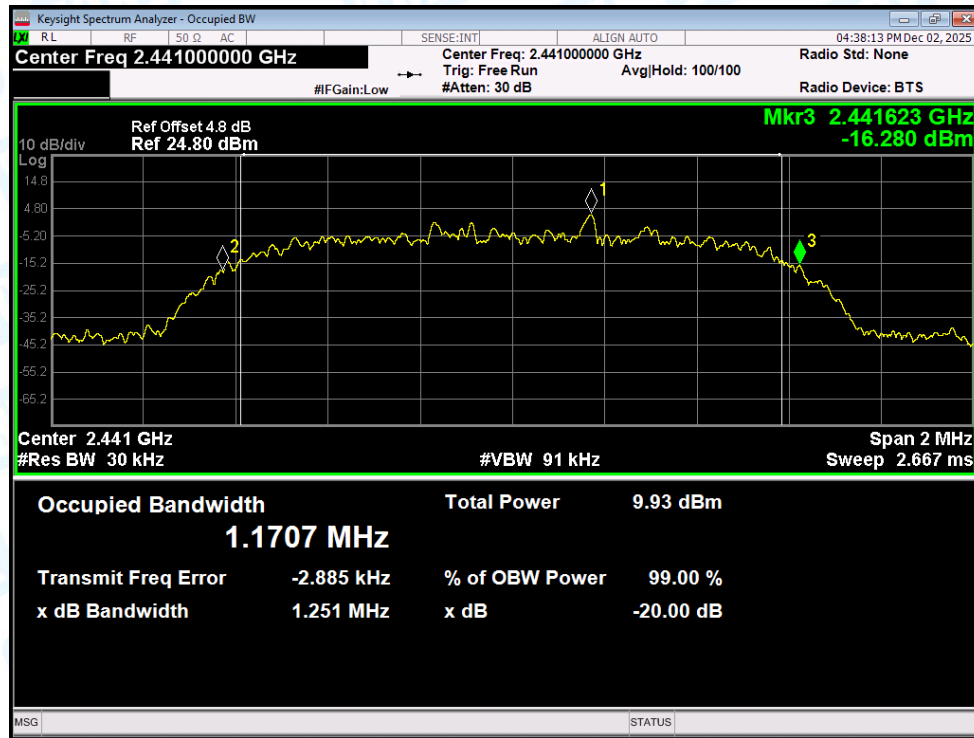


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

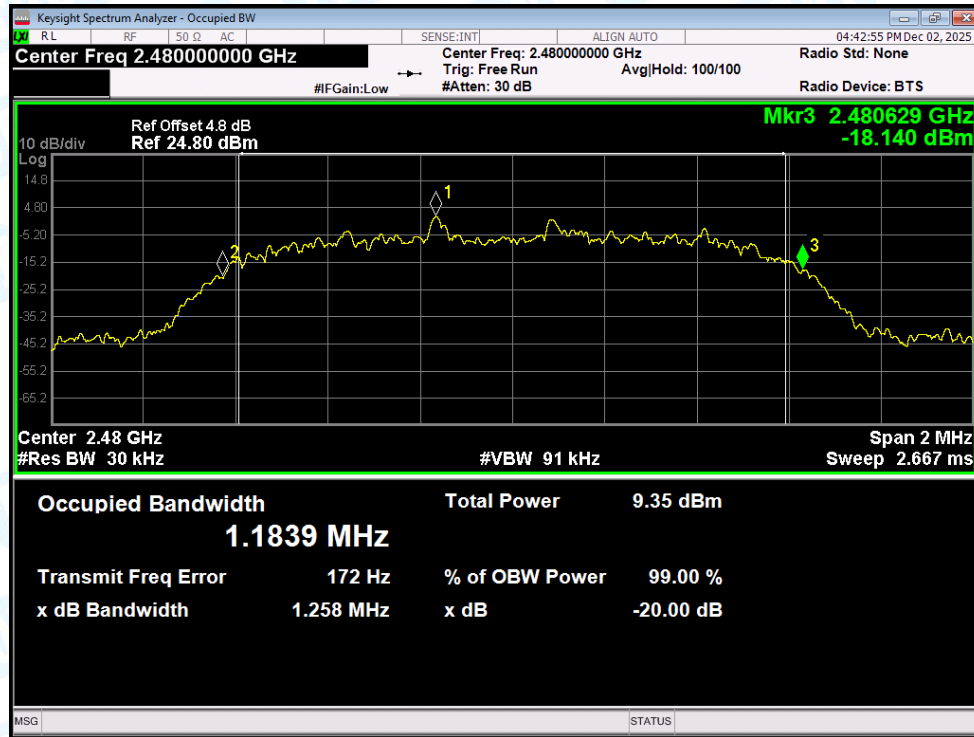


-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

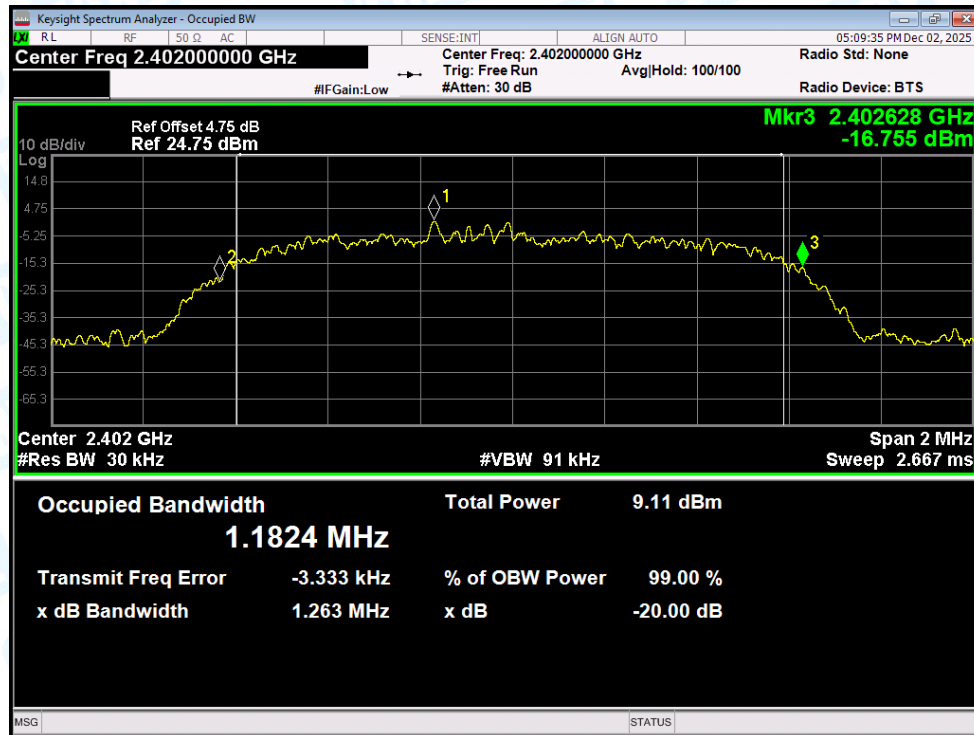

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

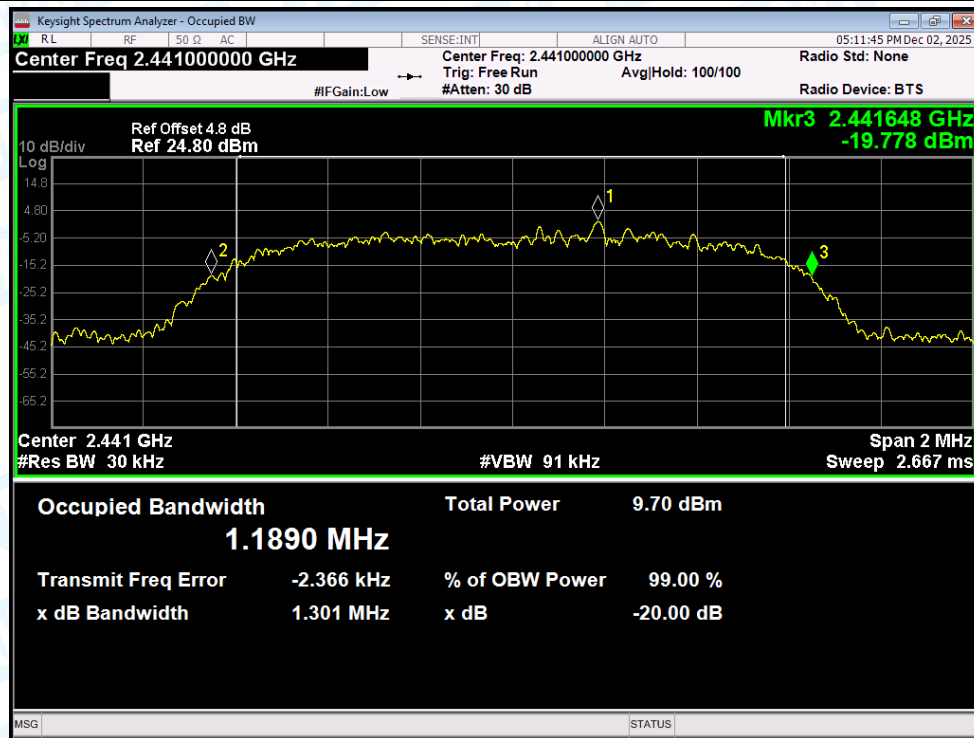

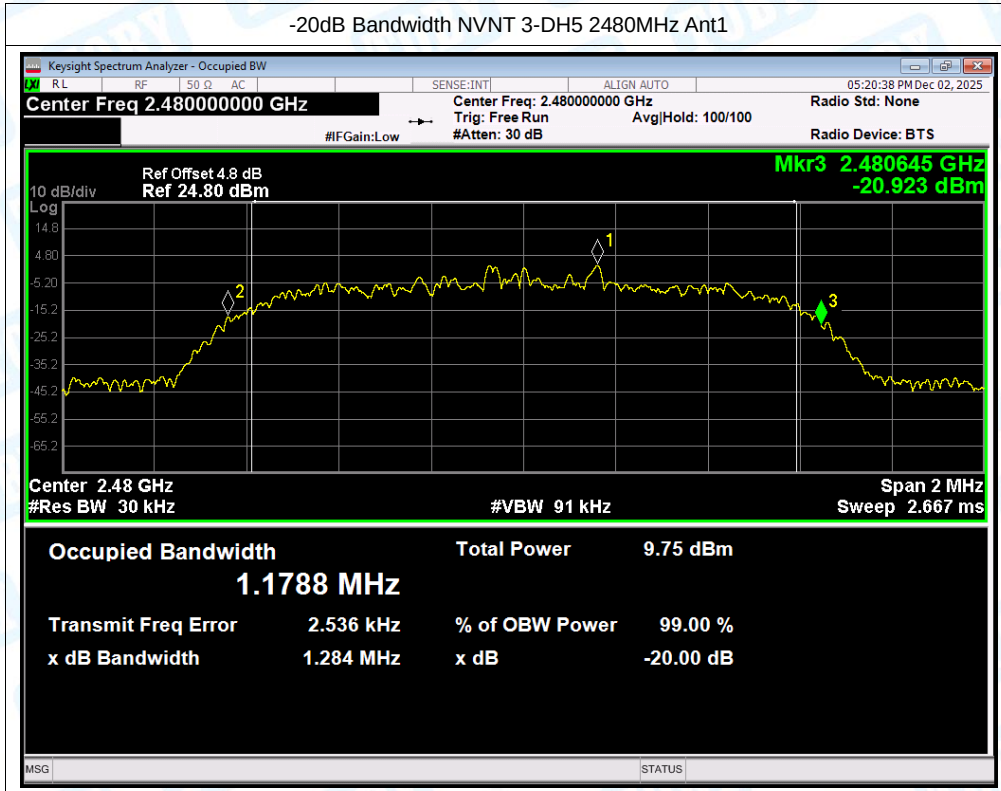


5. Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.864
NVNT	1-DH5	2441	Ant1	0.875
NVNT	1-DH5	2480	Ant1	0.874
NVNT	2-DH5	2402	Ant1	1.181
NVNT	2-DH5	2441	Ant1	1.162
NVNT	2-DH5	2480	Ant1	1.152
NVNT	3-DH5	2402	Ant1	1.18
NVNT	3-DH5	2441	Ant1	1.186
NVNT	3-DH5	2480	Ant1	1.204


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)

Test Graphs


OBW NVNT 1-DH5 2402MHz Ant1

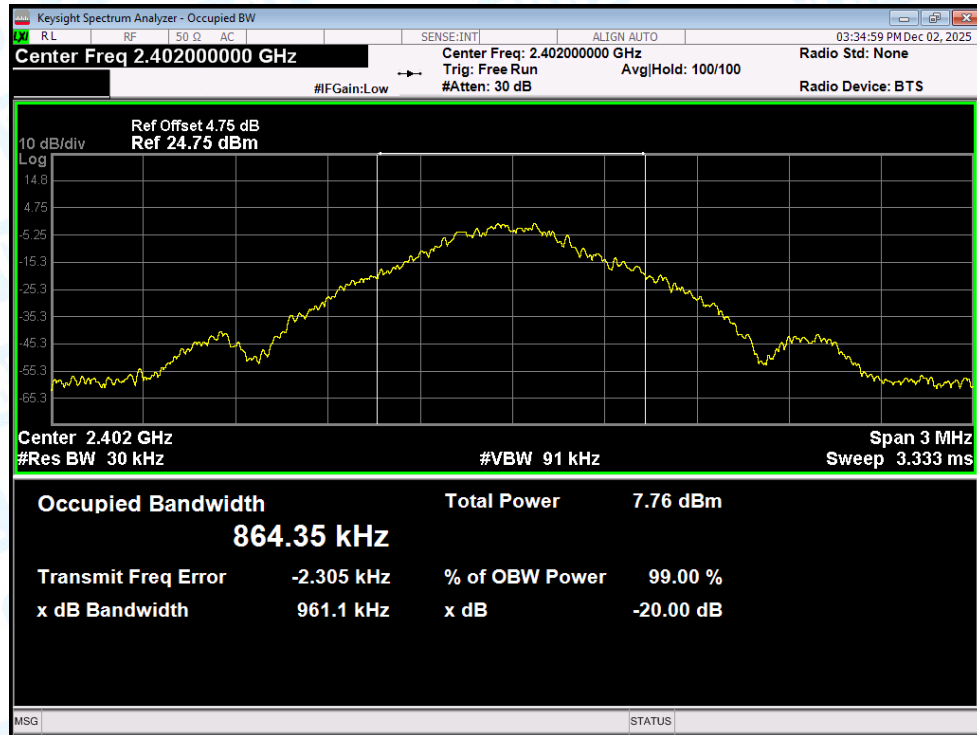


OBW NVNT 1-DH5 2441MHz Ant1

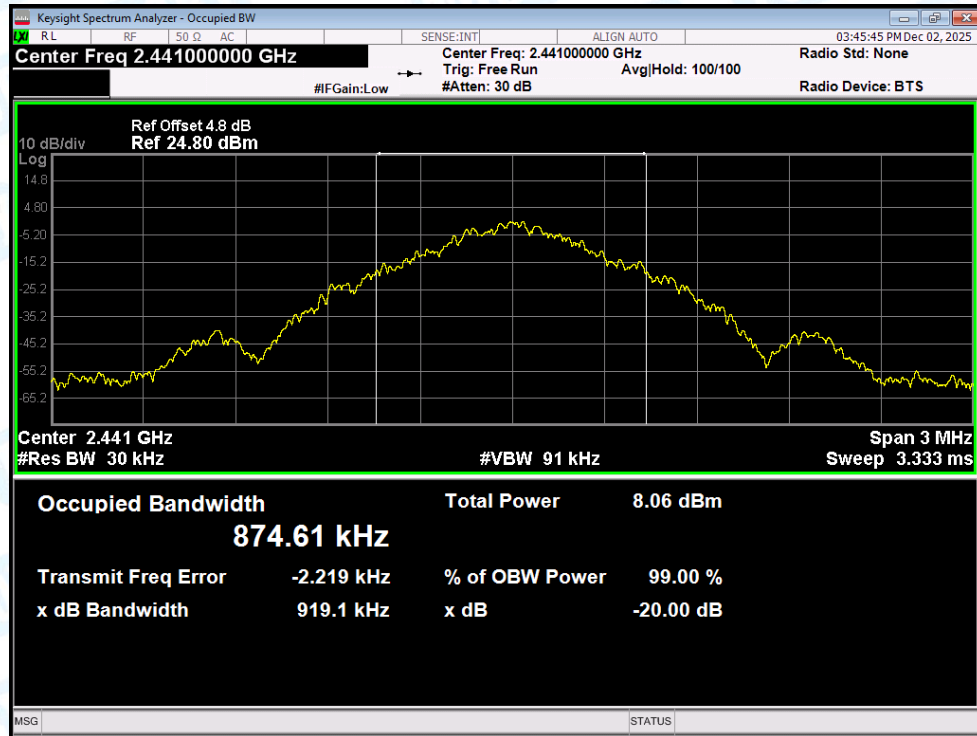


OBW NVNT 1-DH5 2480MHz Ant1

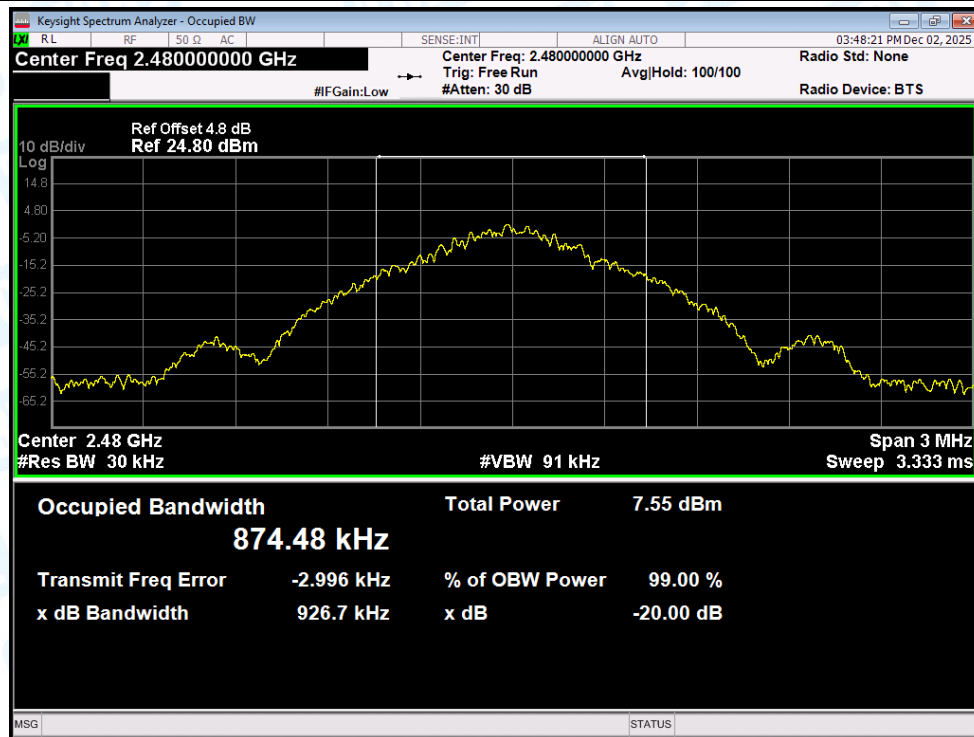


OBW NVNT 2-DH5 2402MHz Ant1

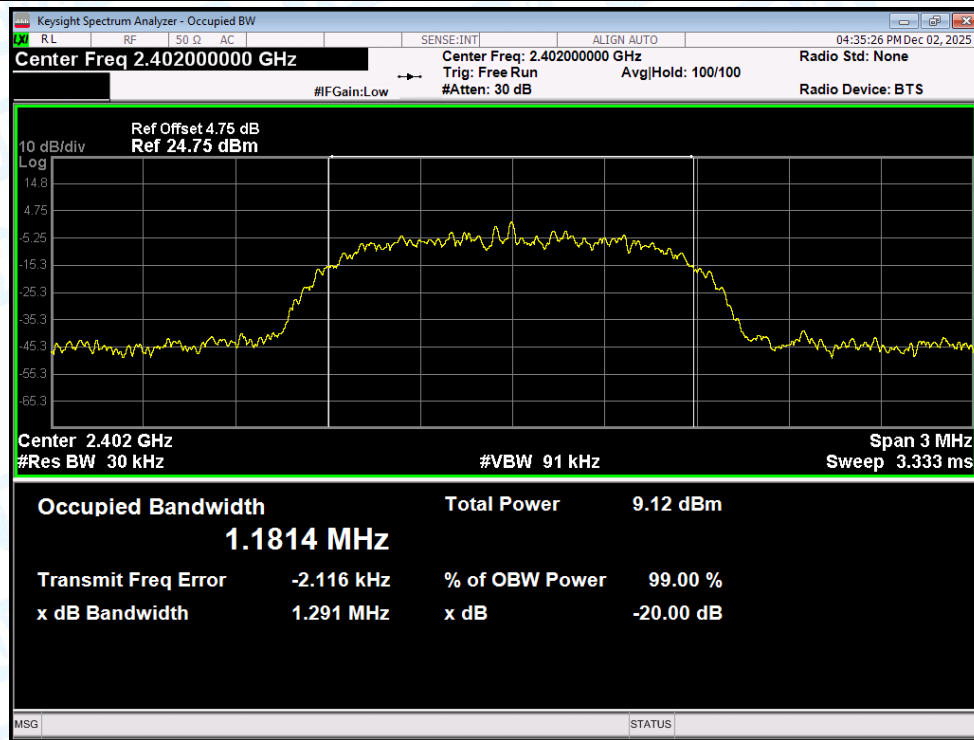


OBW NVNT 2-DH5 2441MHz Ant1

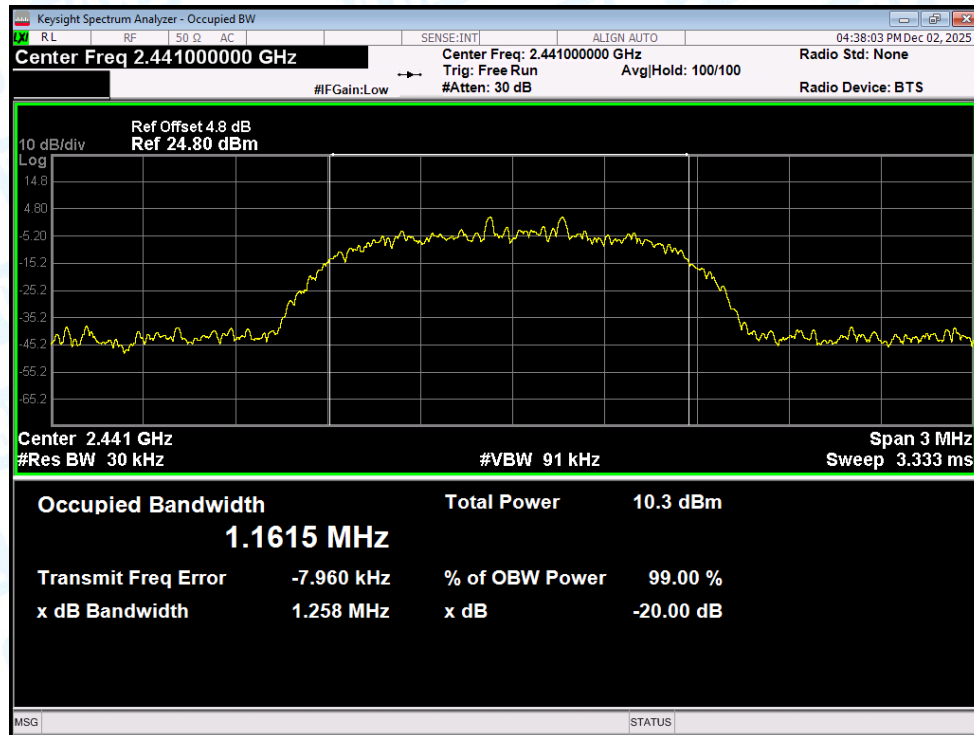


OBW NVNT 2-DH5 2480MHz Ant1

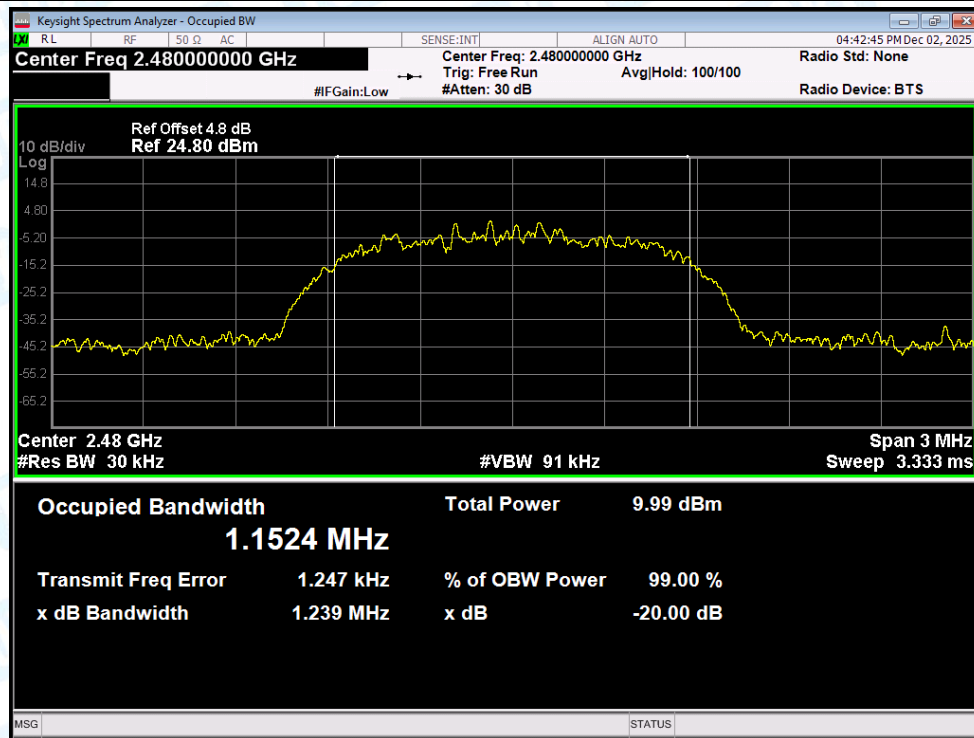


OBW NVNT 3-DH5 2402MHz Ant1

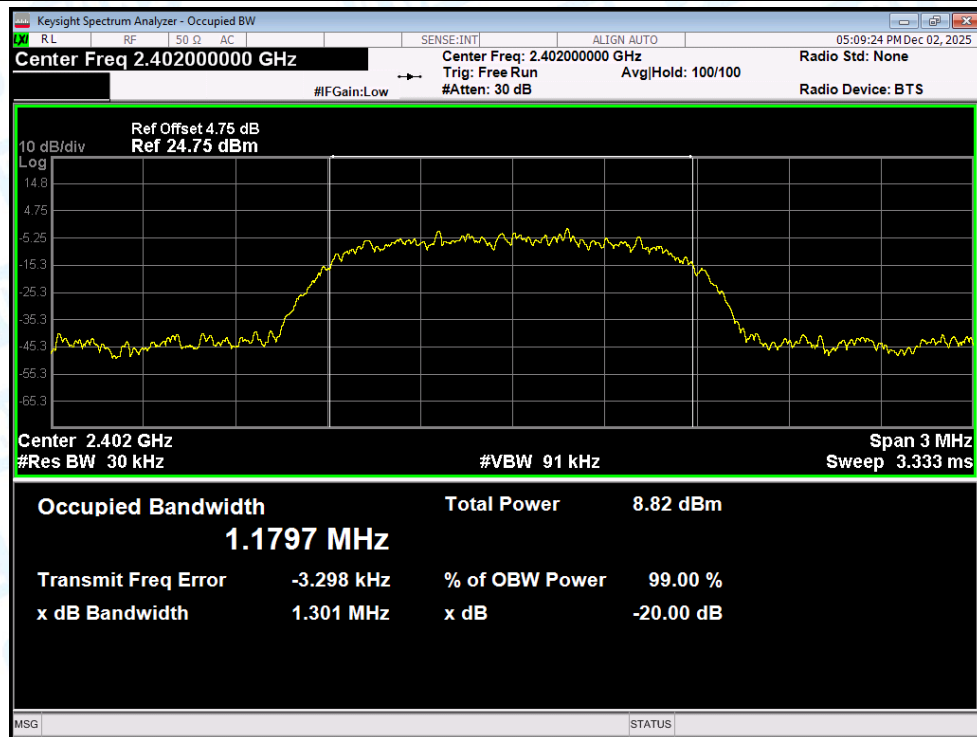

OBW NVNT 3-DH5 2441MHz Ant1

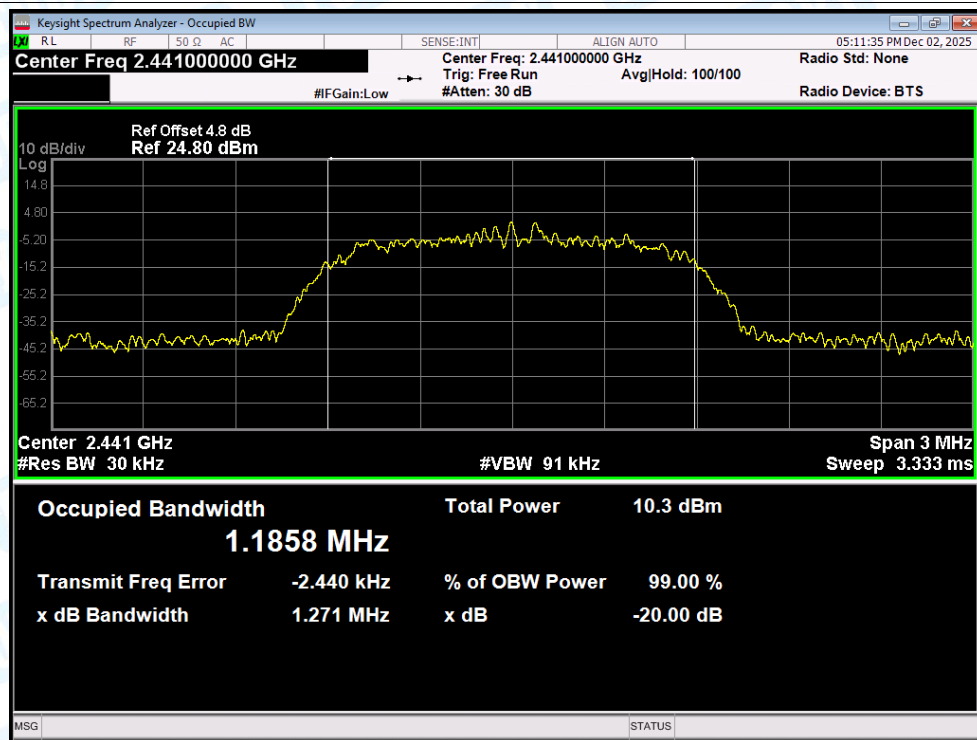

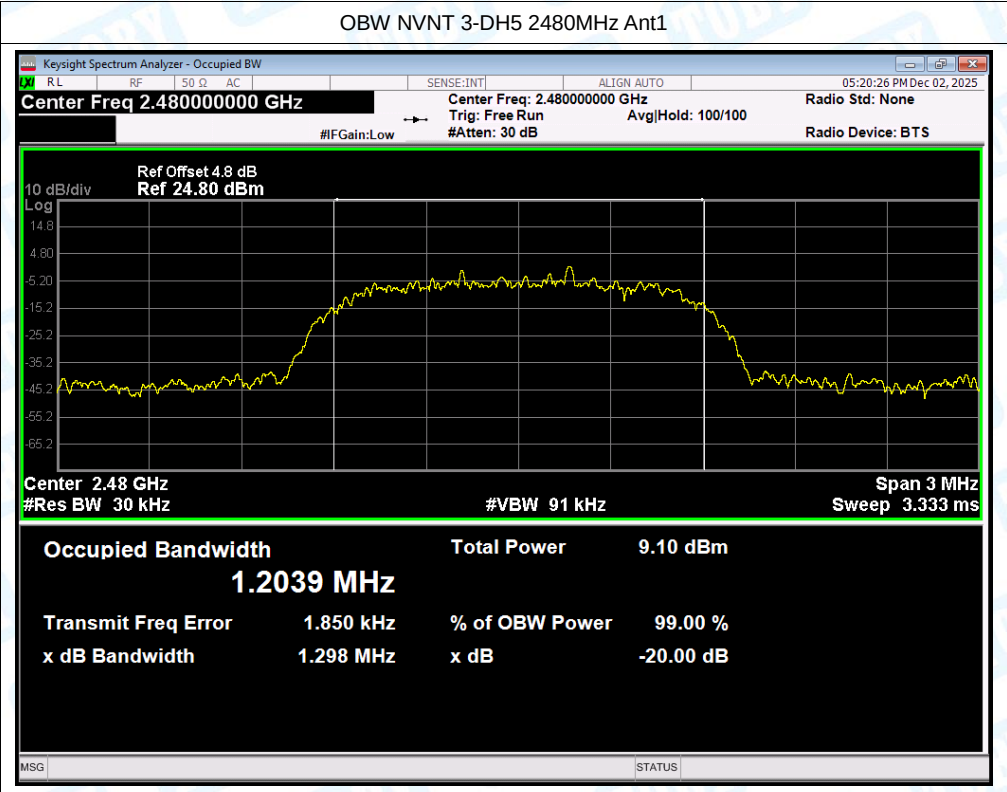


6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-55.13	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-53.69	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-57.23	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-56.51	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-55.25	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-55.89	-20	Pass


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)

Test Graphs


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

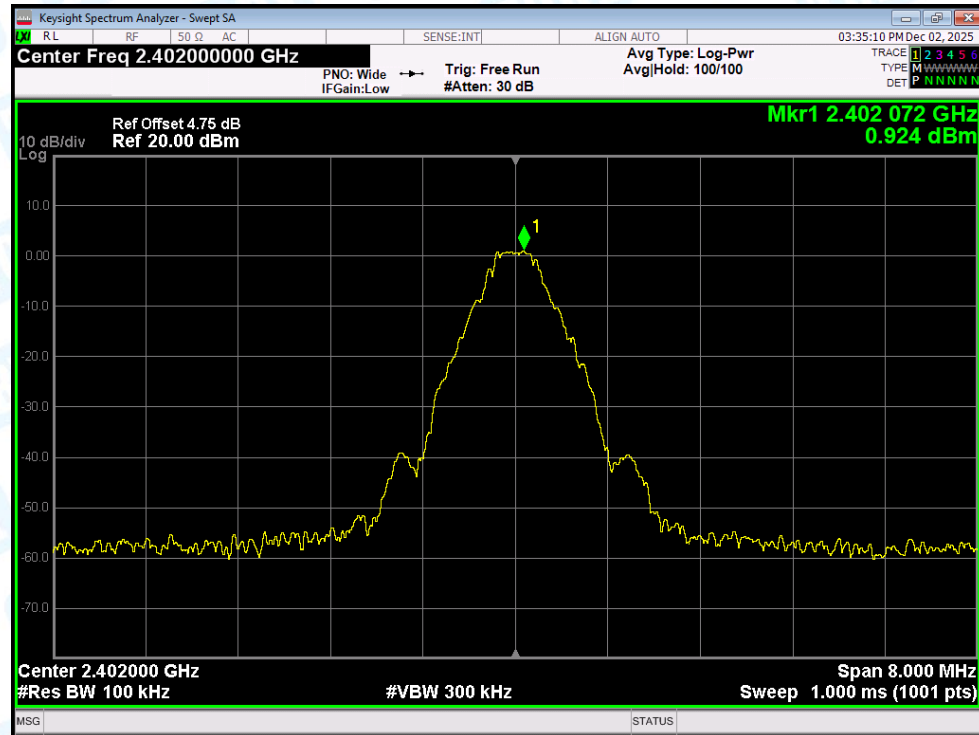


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

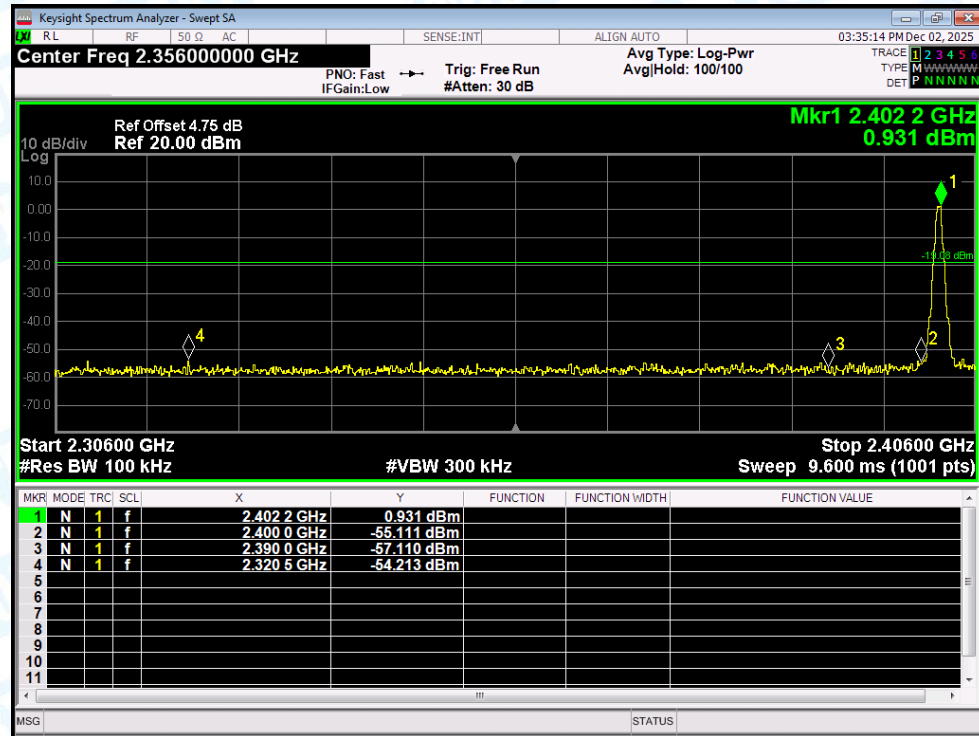


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

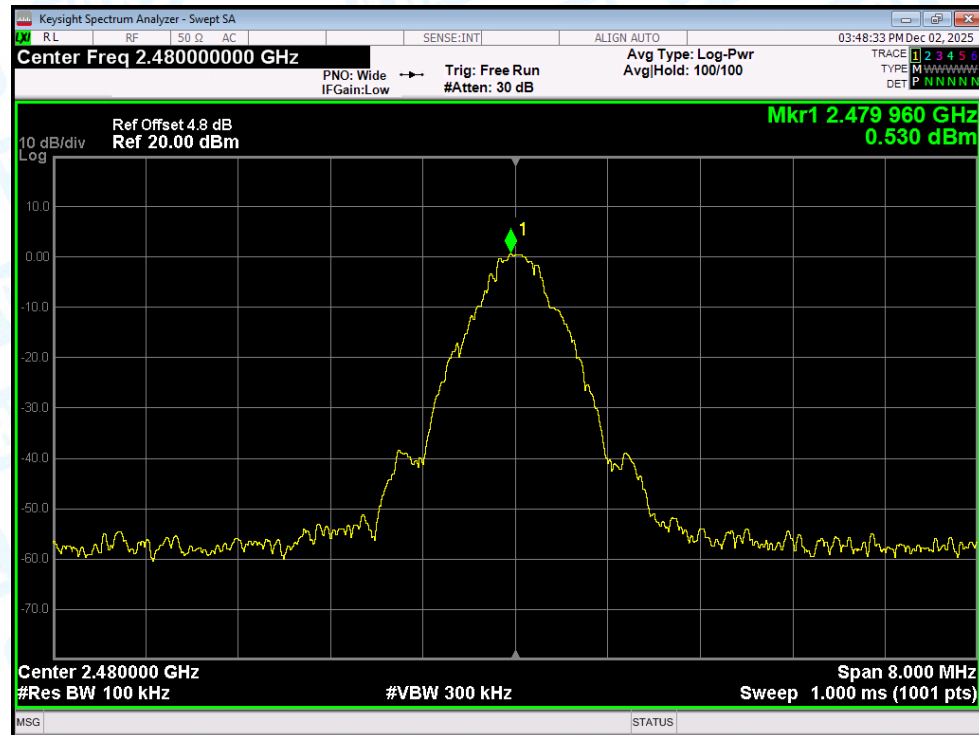


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

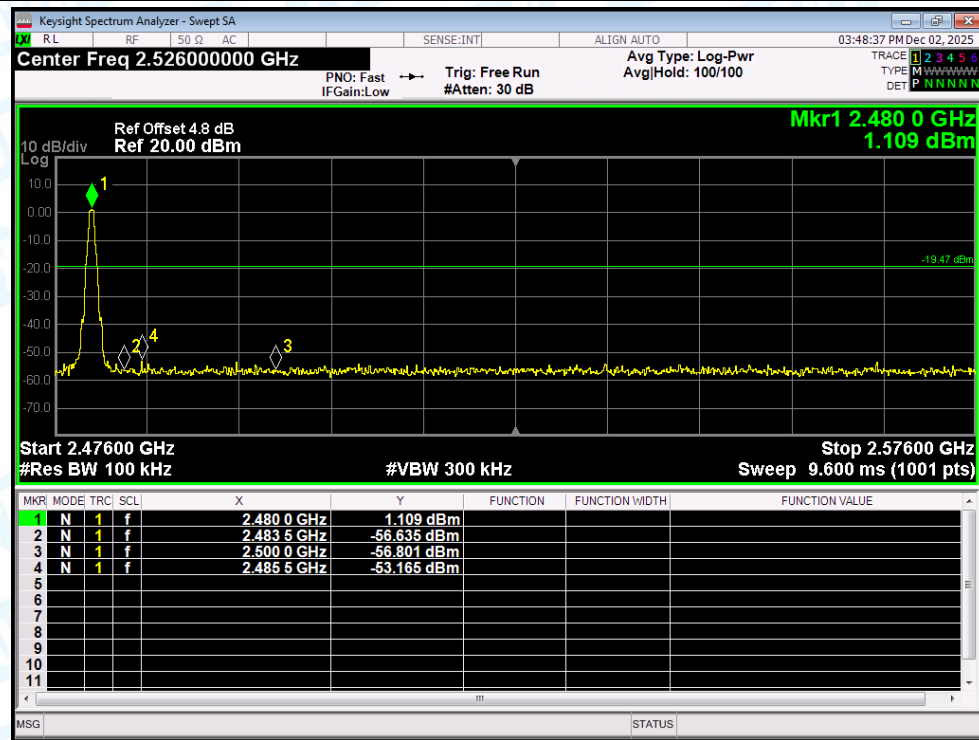


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

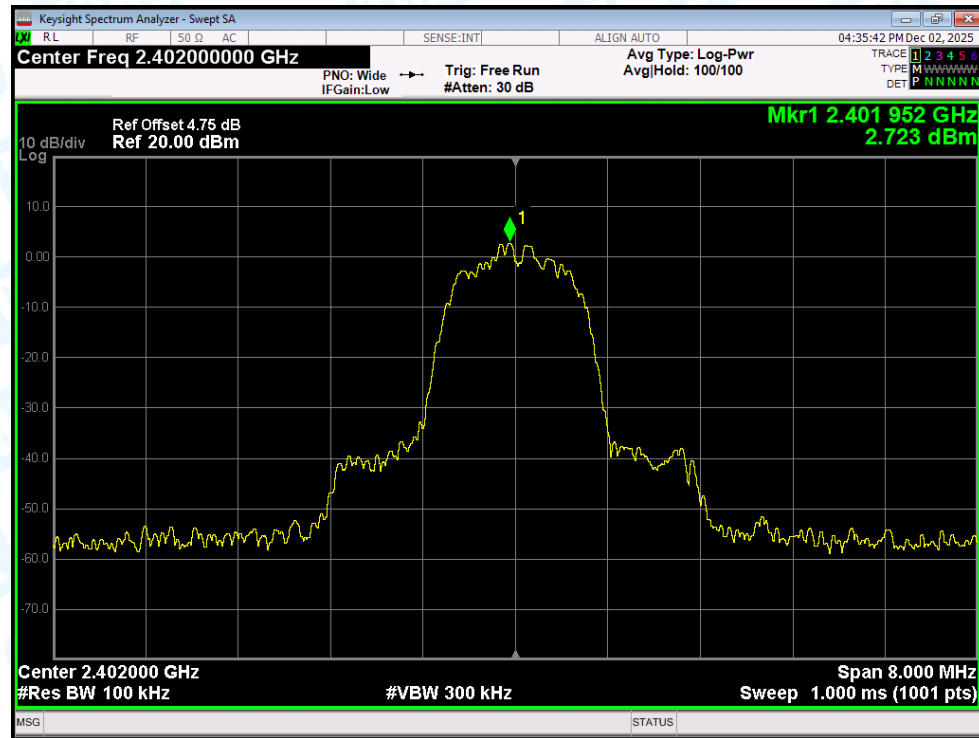


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

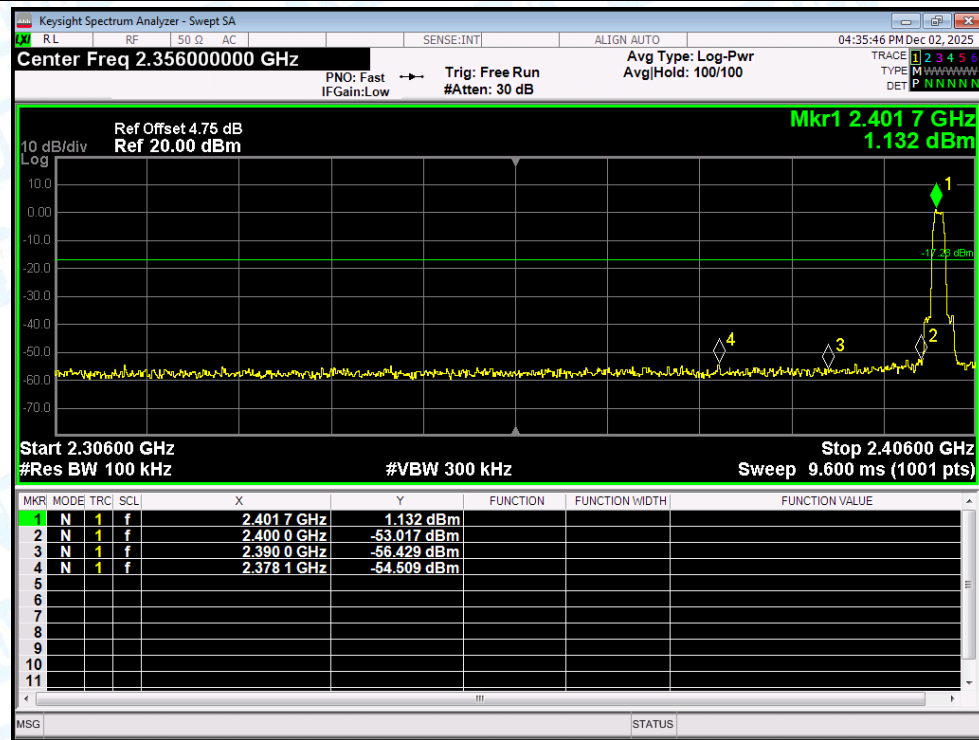


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

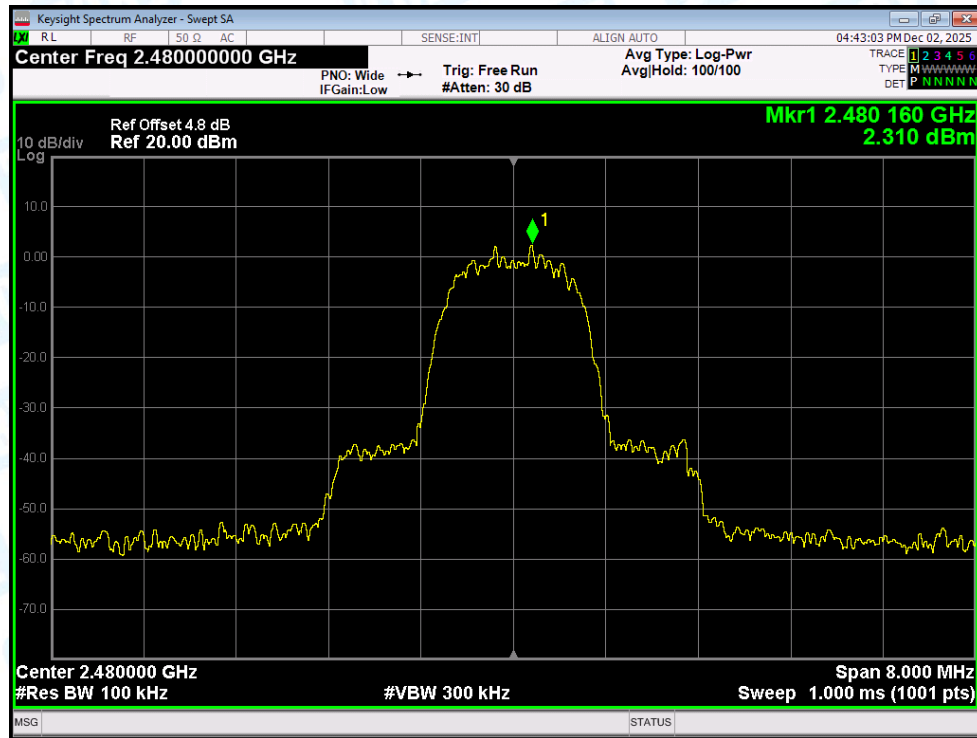


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

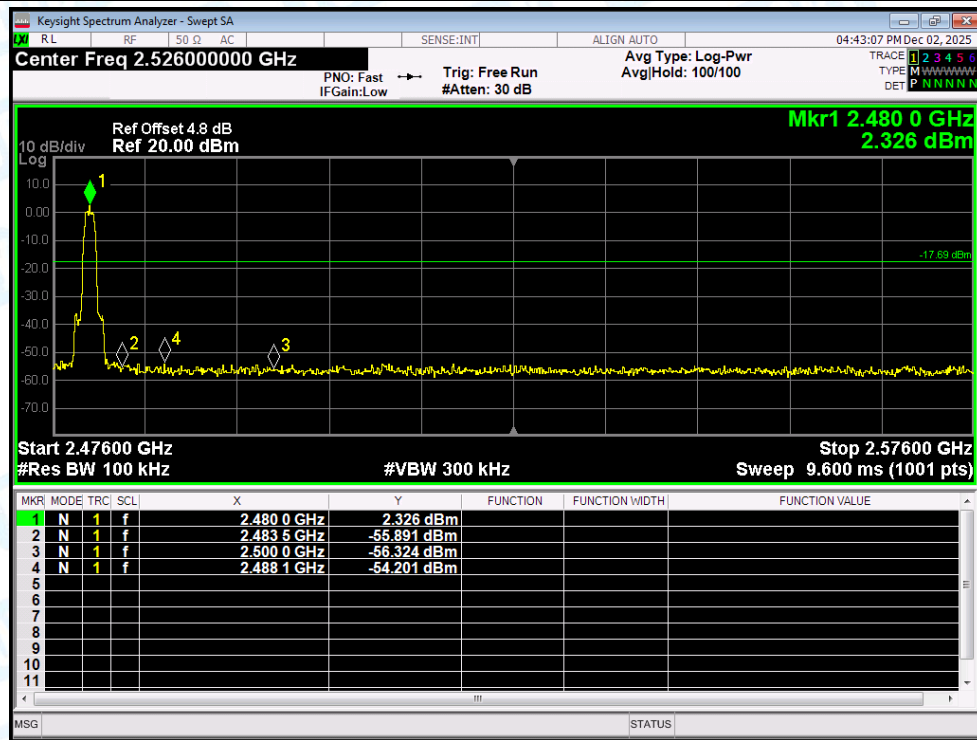


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

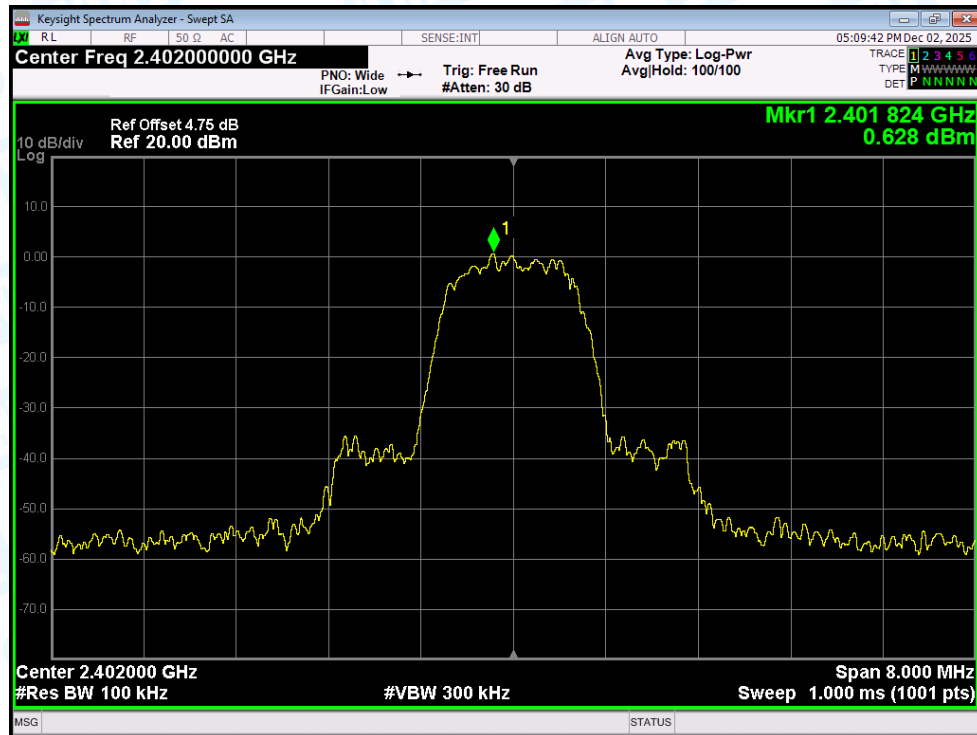


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

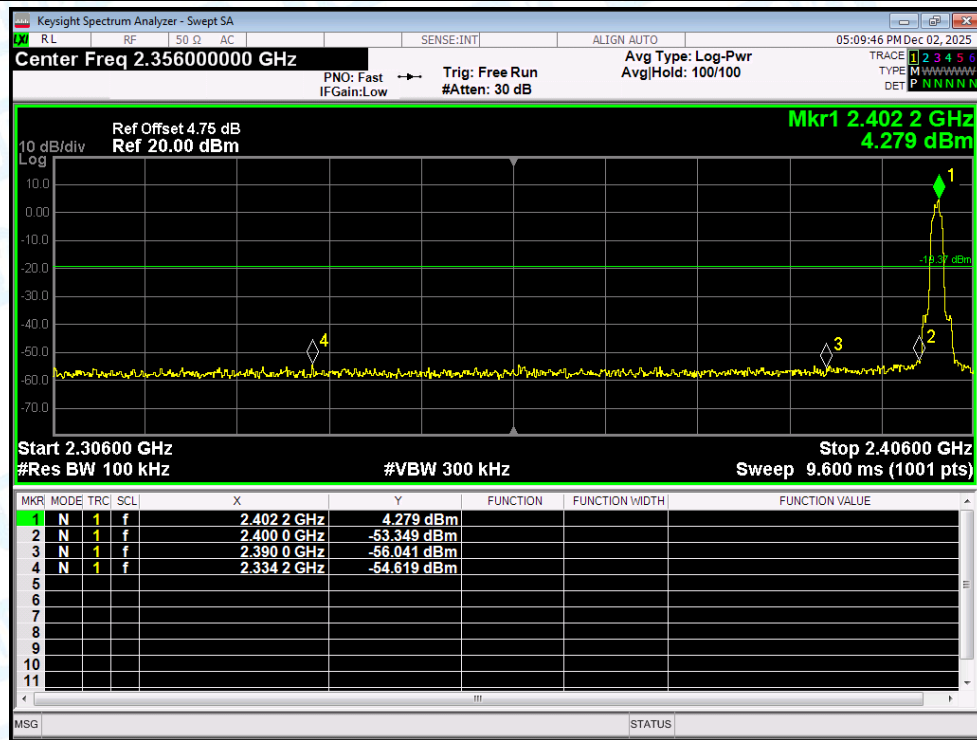

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

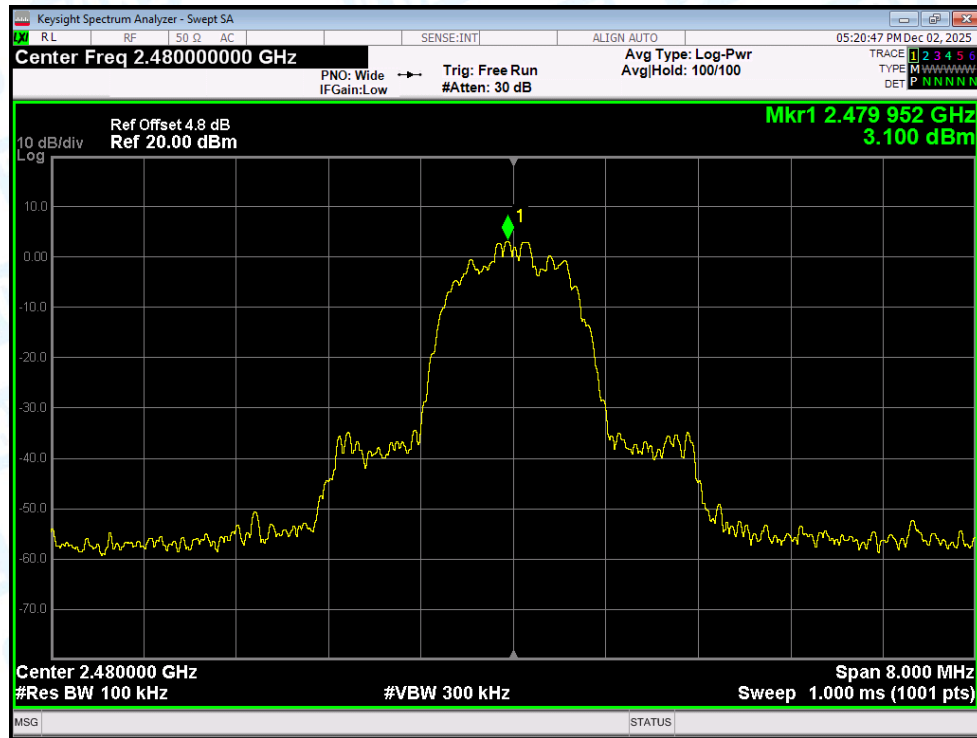

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

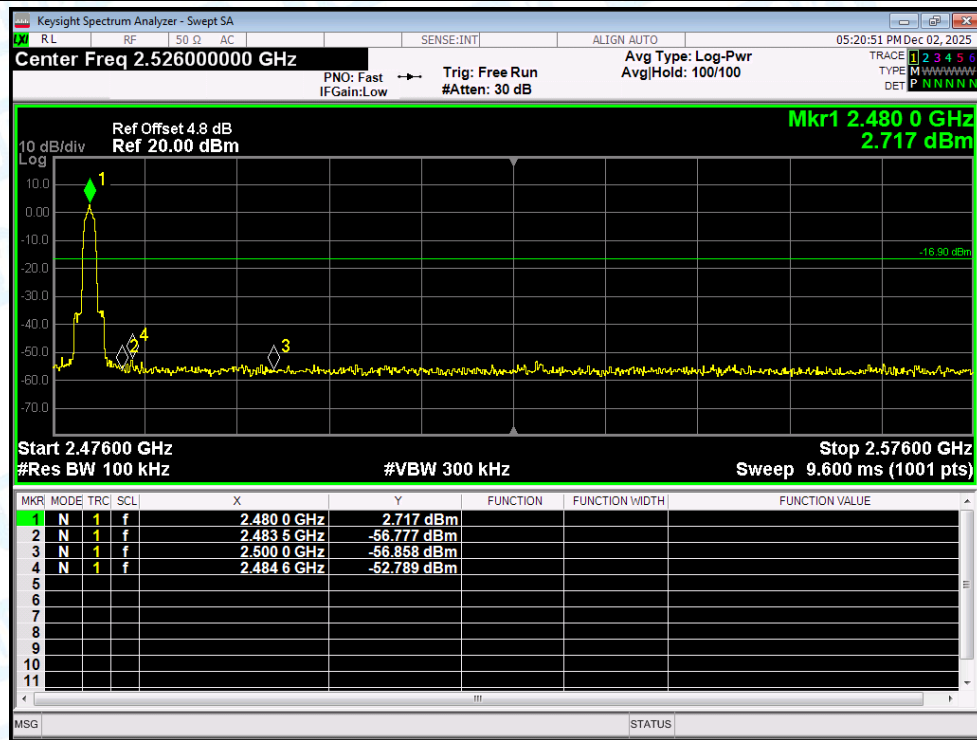

7. Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-54.63	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-54.65	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-57.77	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-53.47	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-57.33	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-54.79	-20	Pass


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)



Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

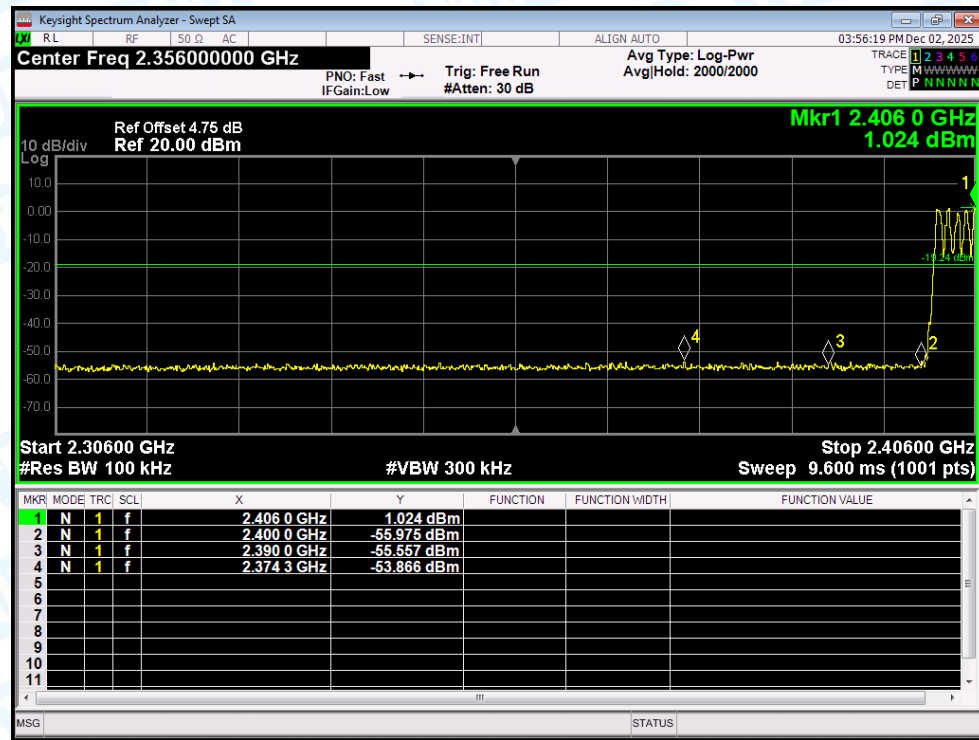


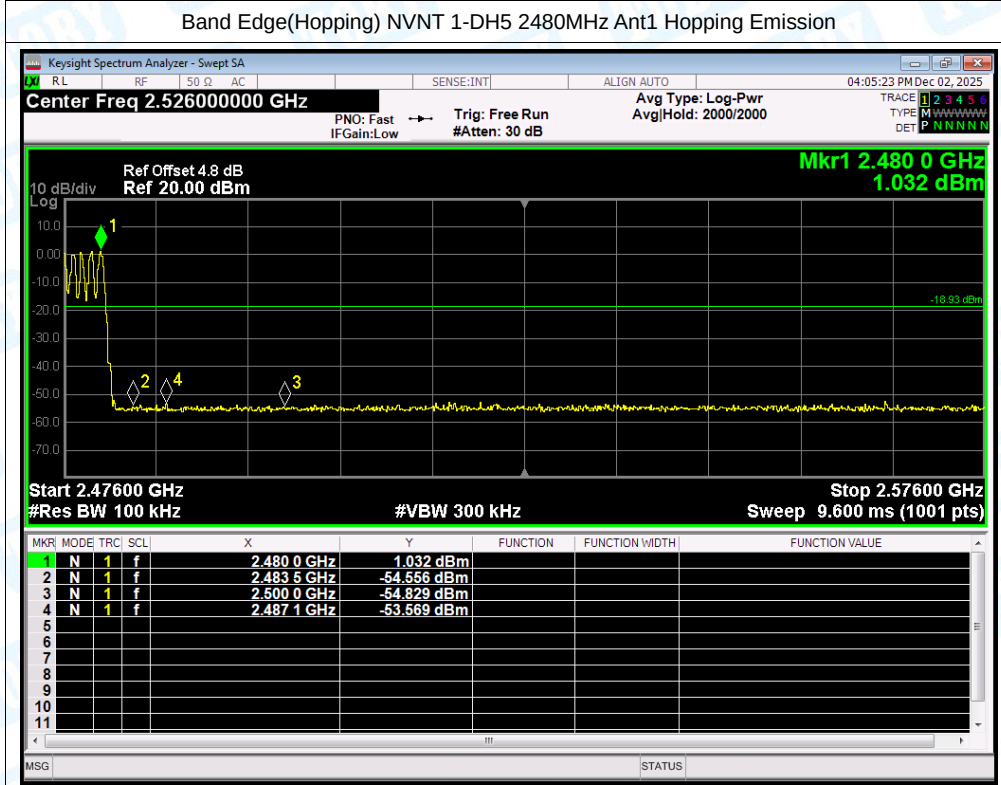
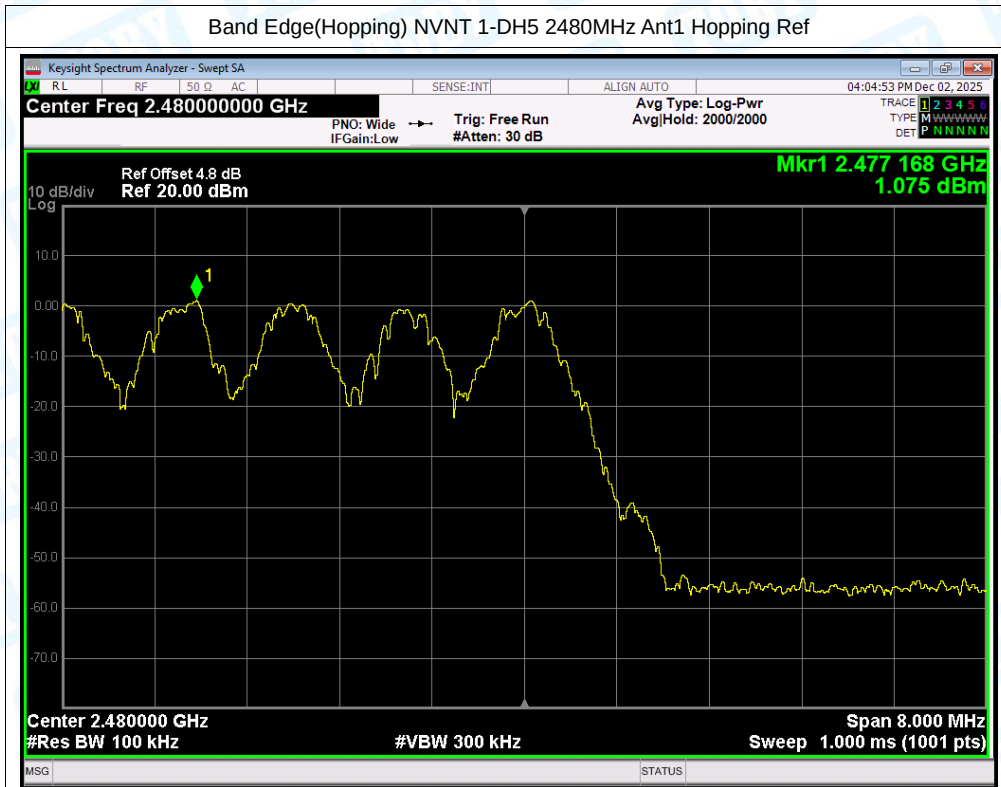


Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

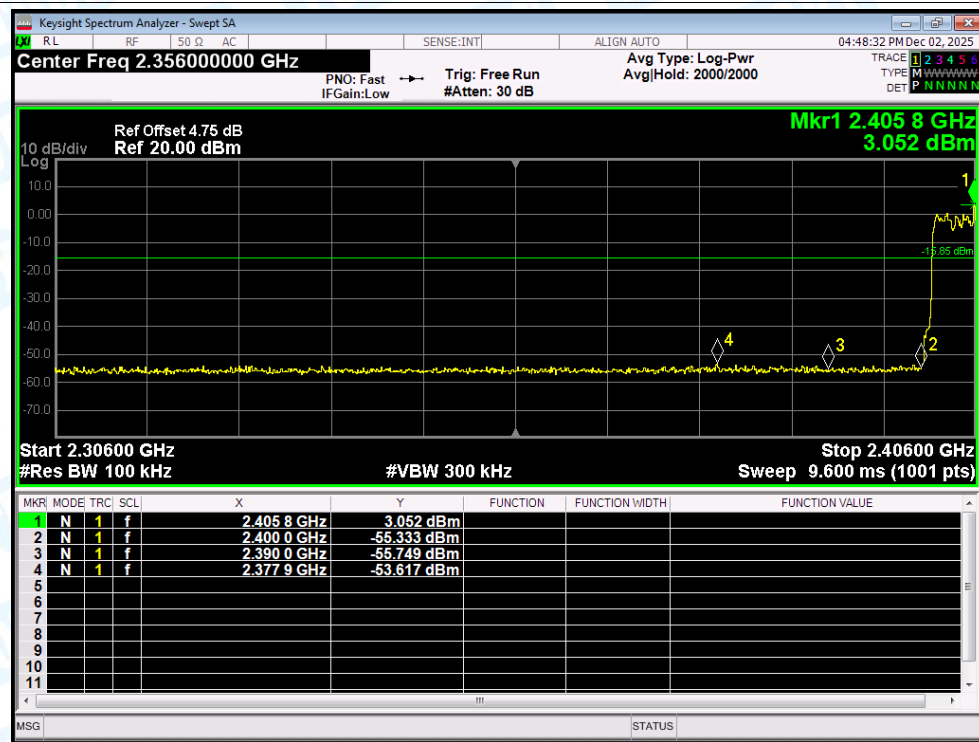


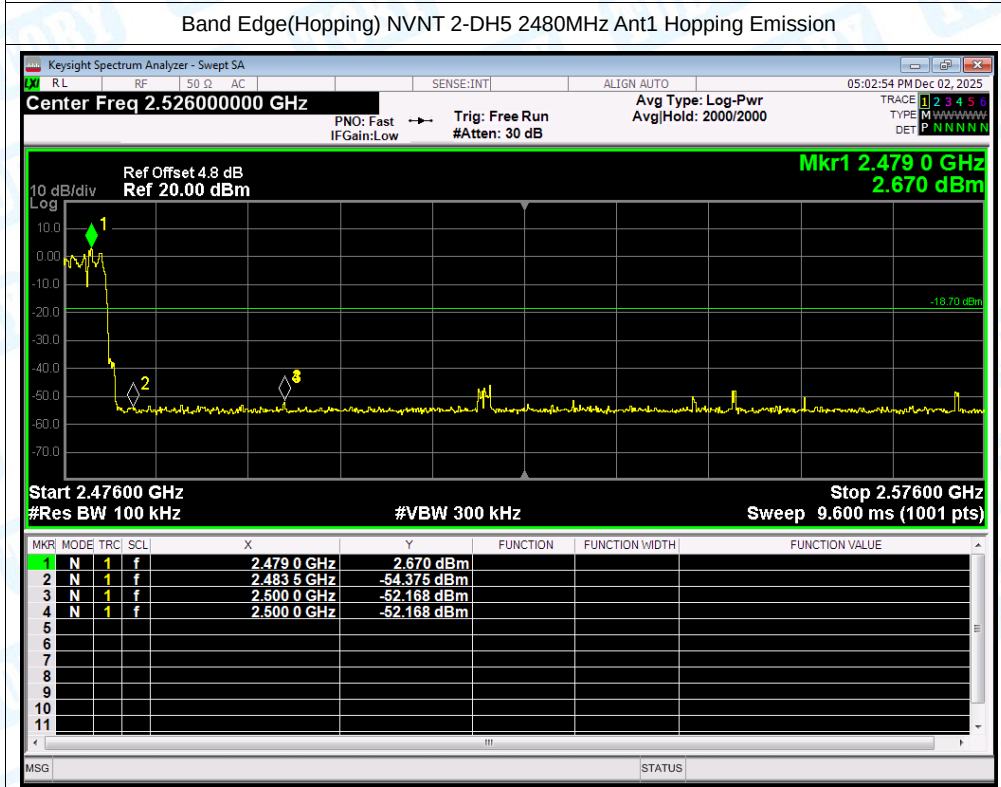
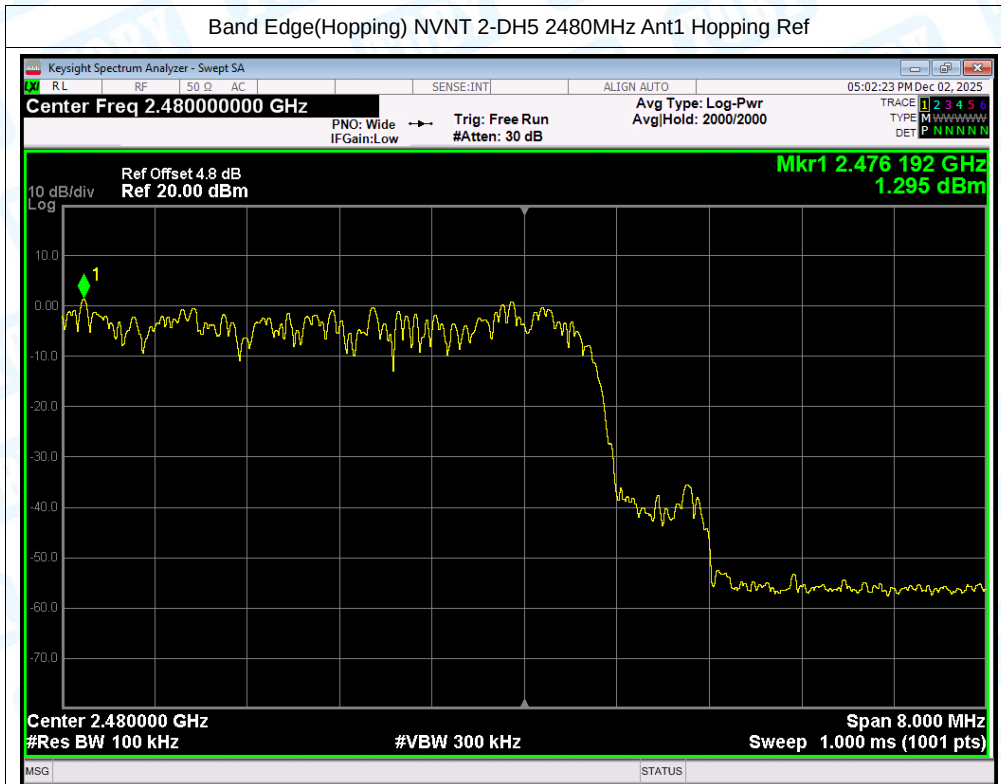


Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

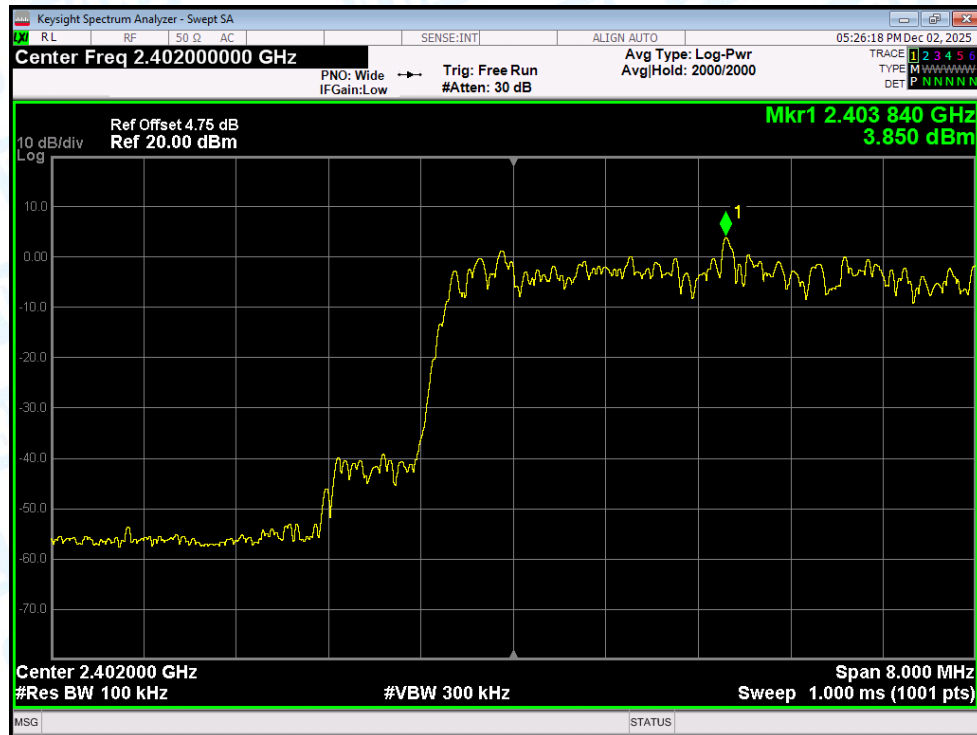

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

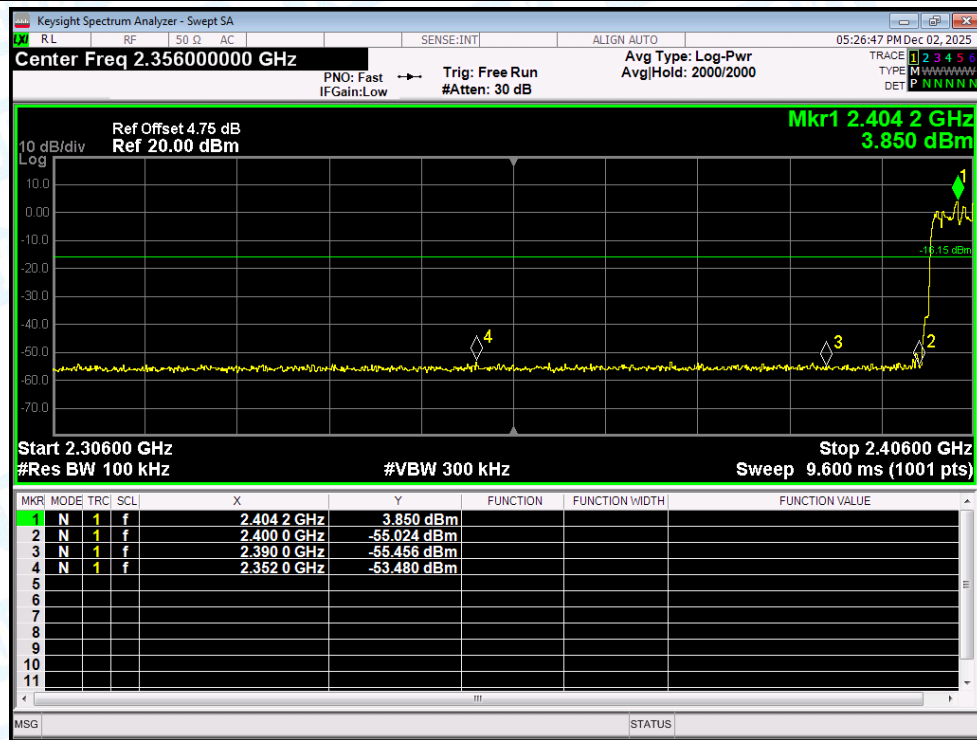

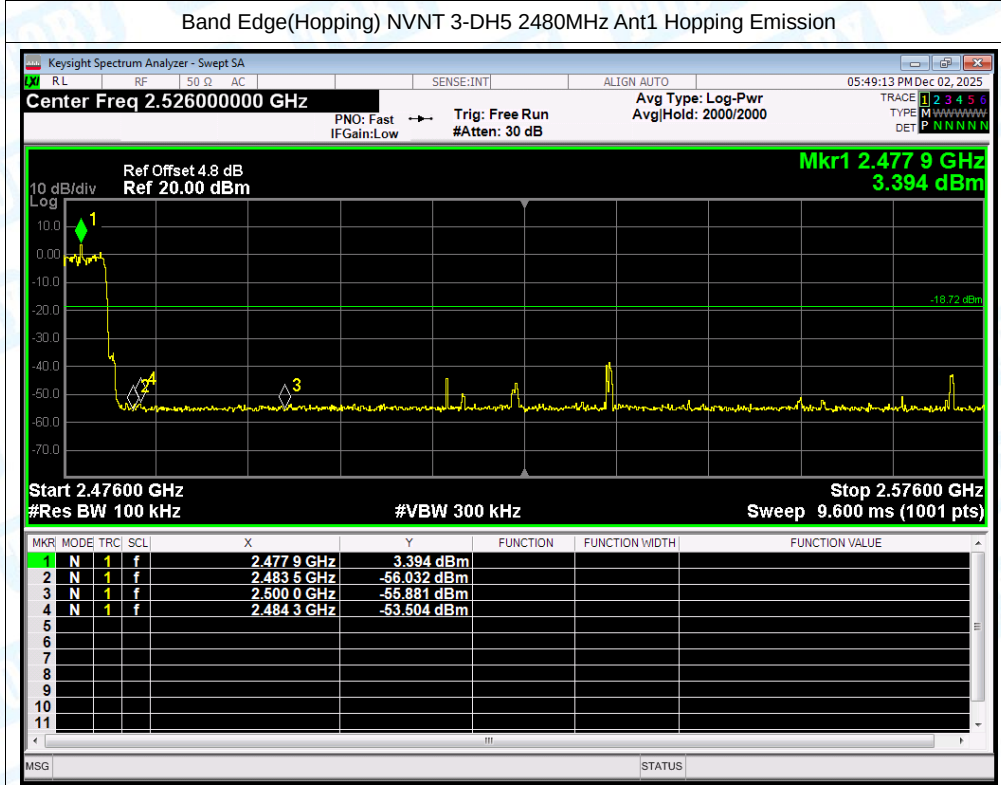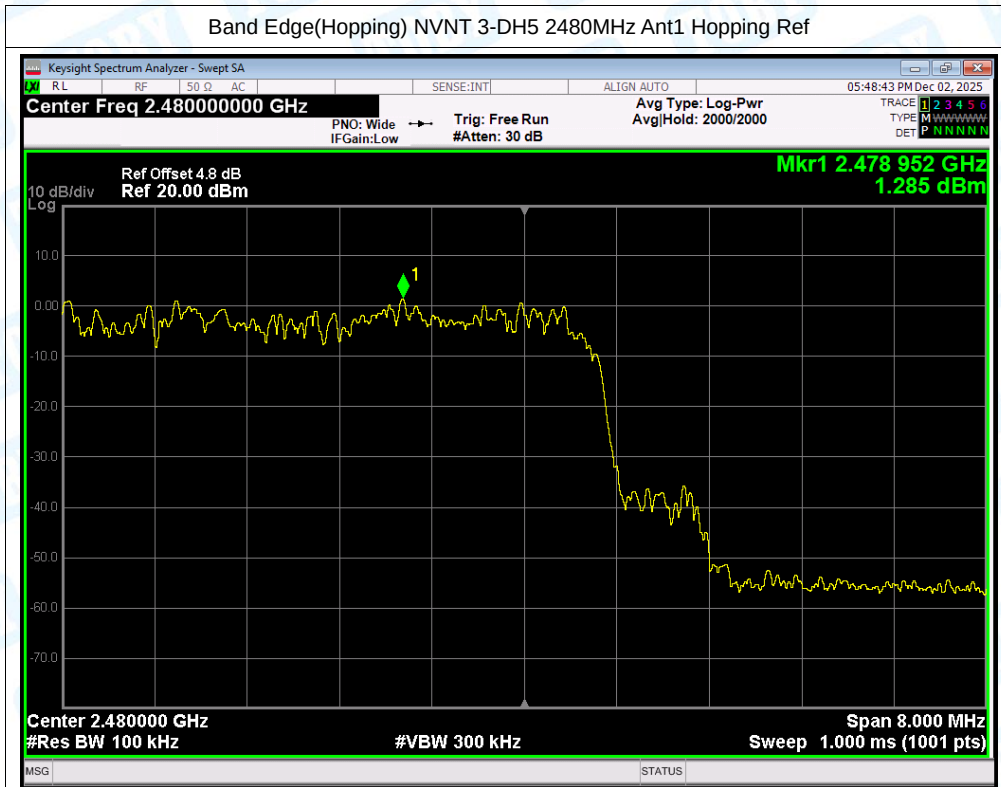


8. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-50.5	-20	Pass
NVNT	1-DH5	2441	Ant1	-50.47	-20	Pass
NVNT	1-DH5	2480	Ant1	-50.28	-20	Pass
NVNT	2-DH5	2402	Ant1	-52.42	-20	Pass
NVNT	2-DH5	2441	Ant1	-52.61	-20	Pass
NVNT	2-DH5	2480	Ant1	-52.55	-20	Pass
NVNT	3-DH5	2402	Ant1	-52.2	-20	Pass
NVNT	3-DH5	2441	Ant1	-52.13	-20	Pass
NVNT	3-DH5	2480	Ant1	-52.71	-20	Pass


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)

Test Graphs


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

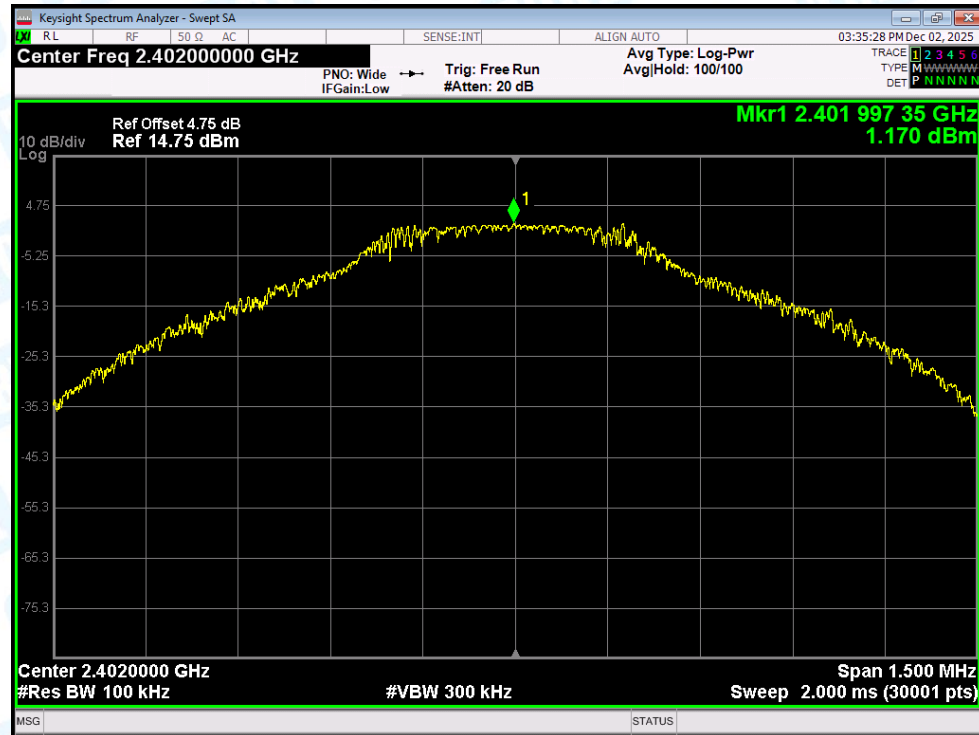


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

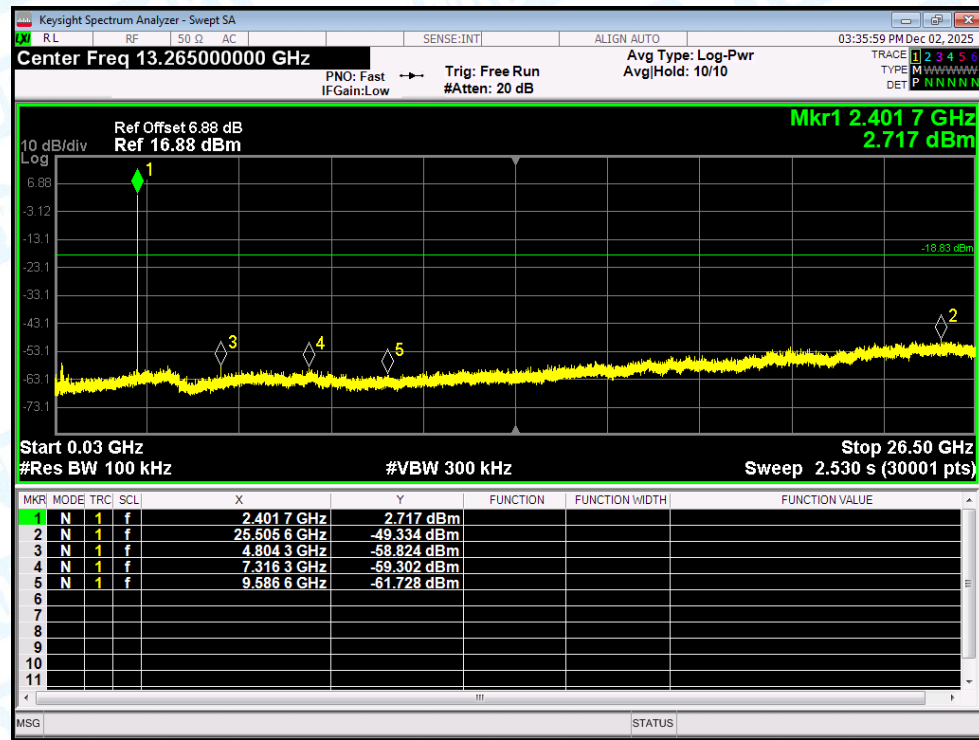


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

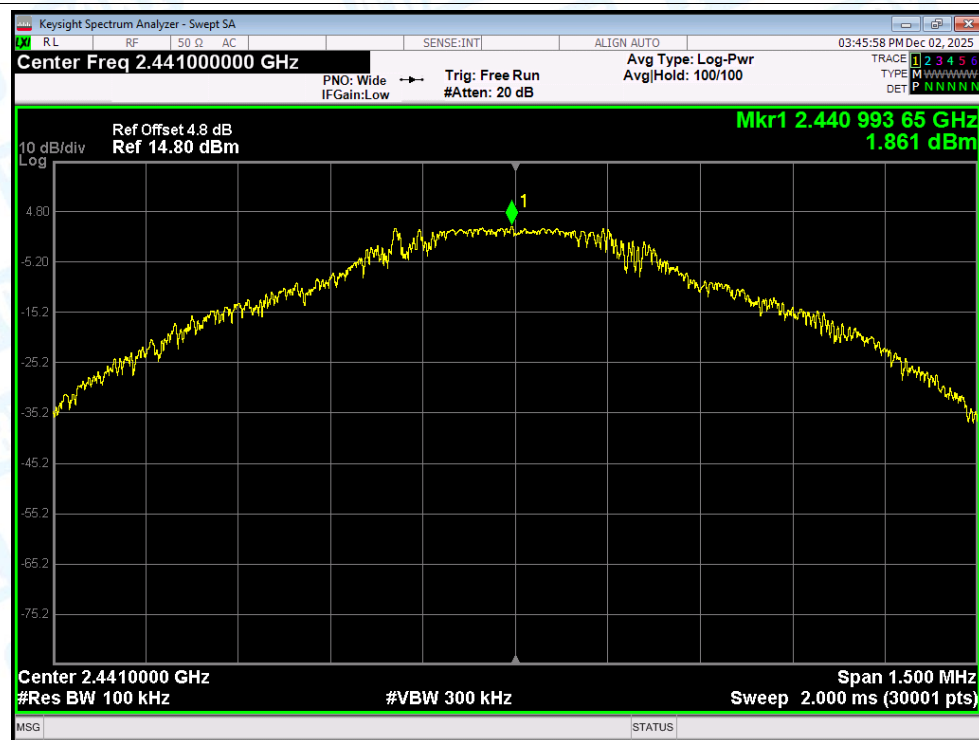


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

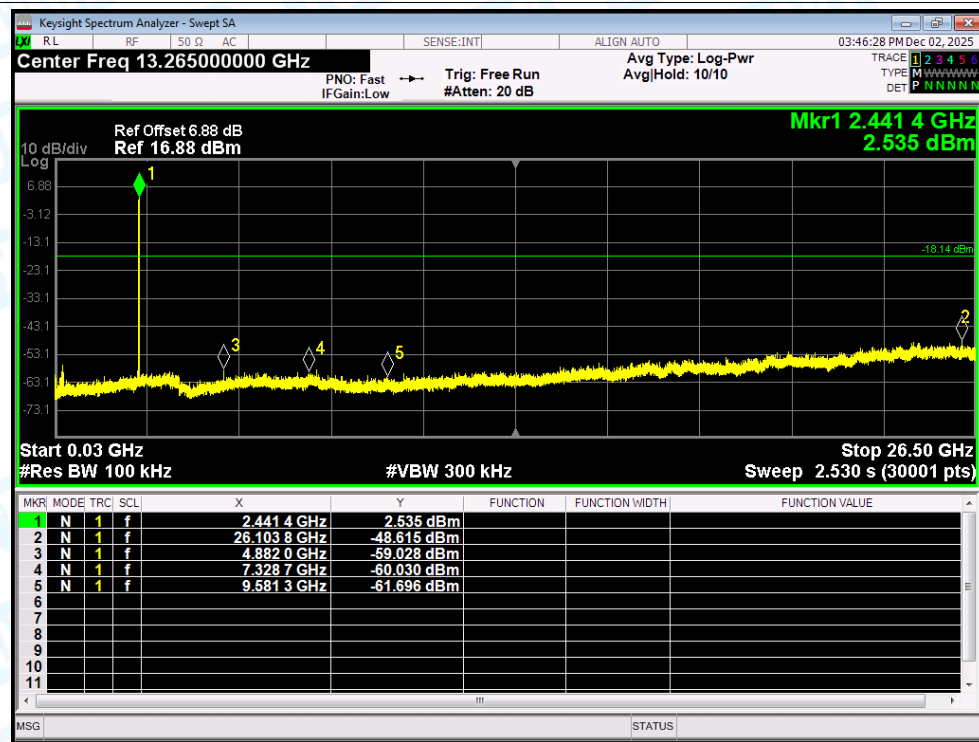


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

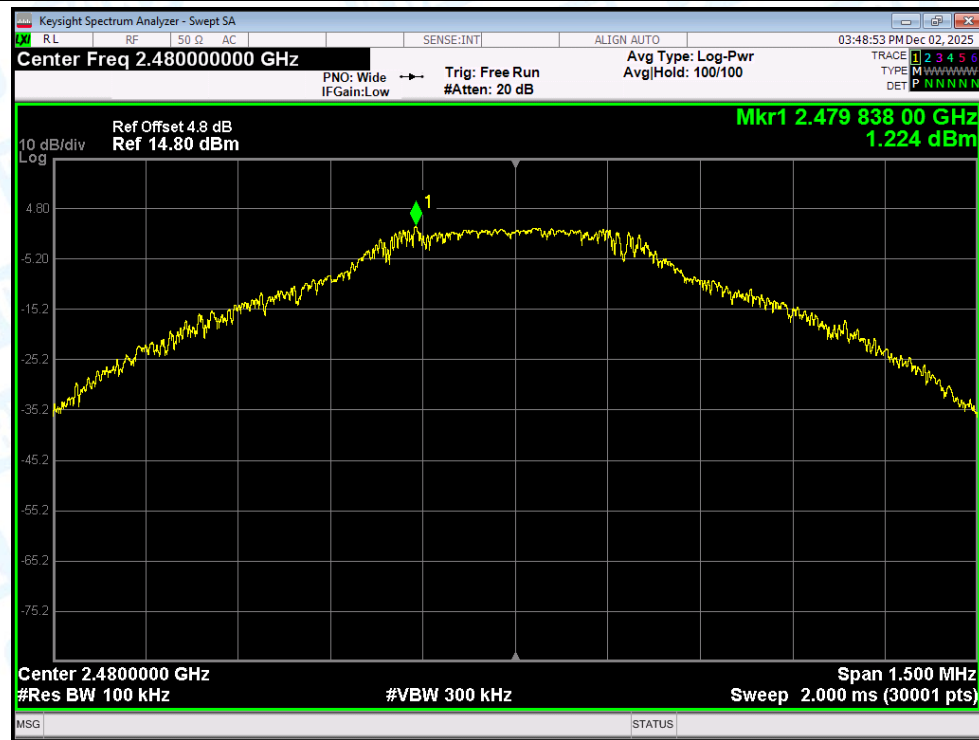


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

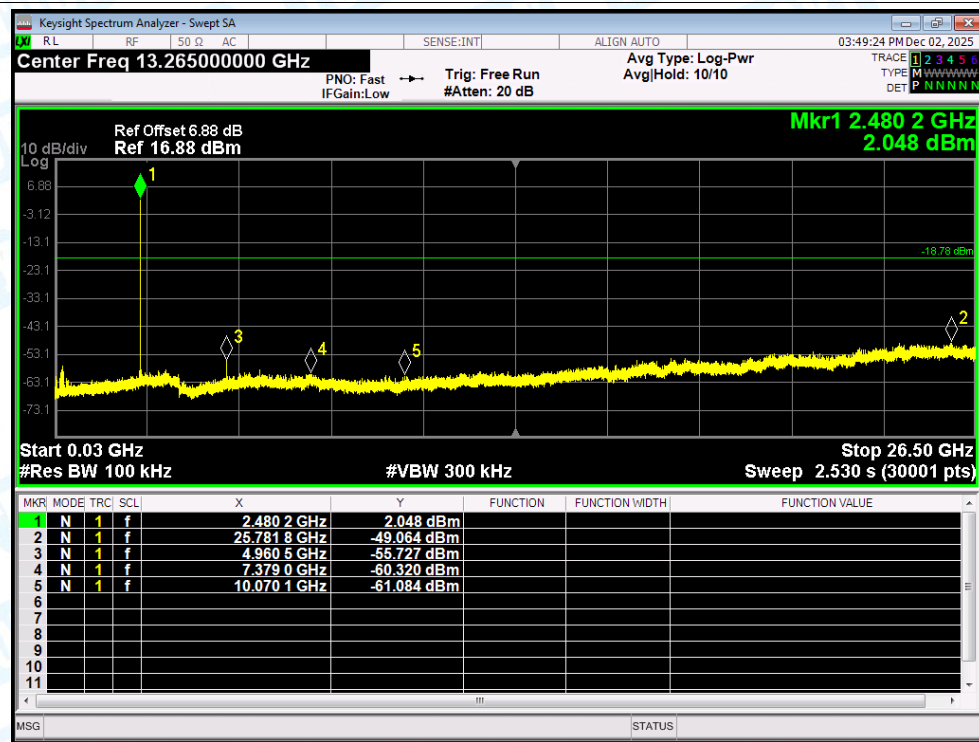


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

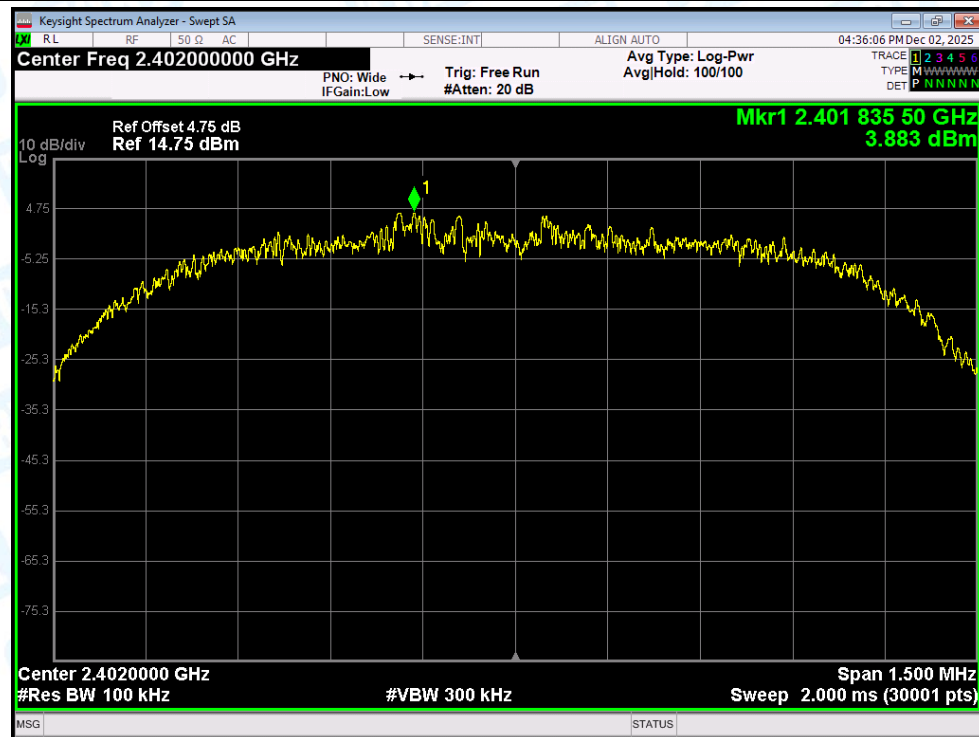


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

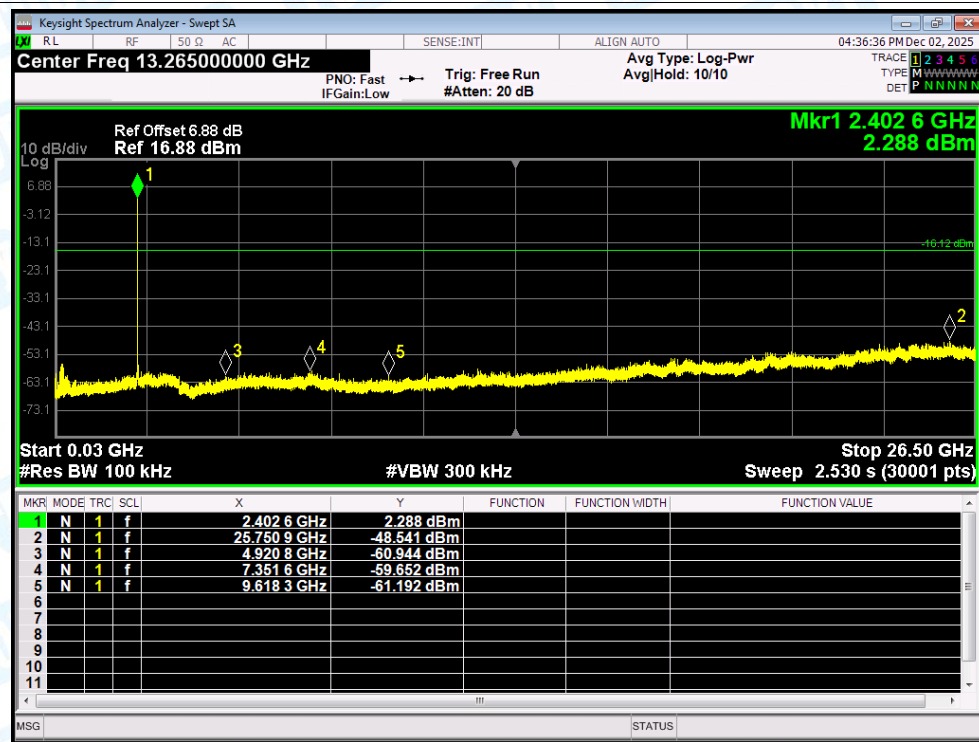


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

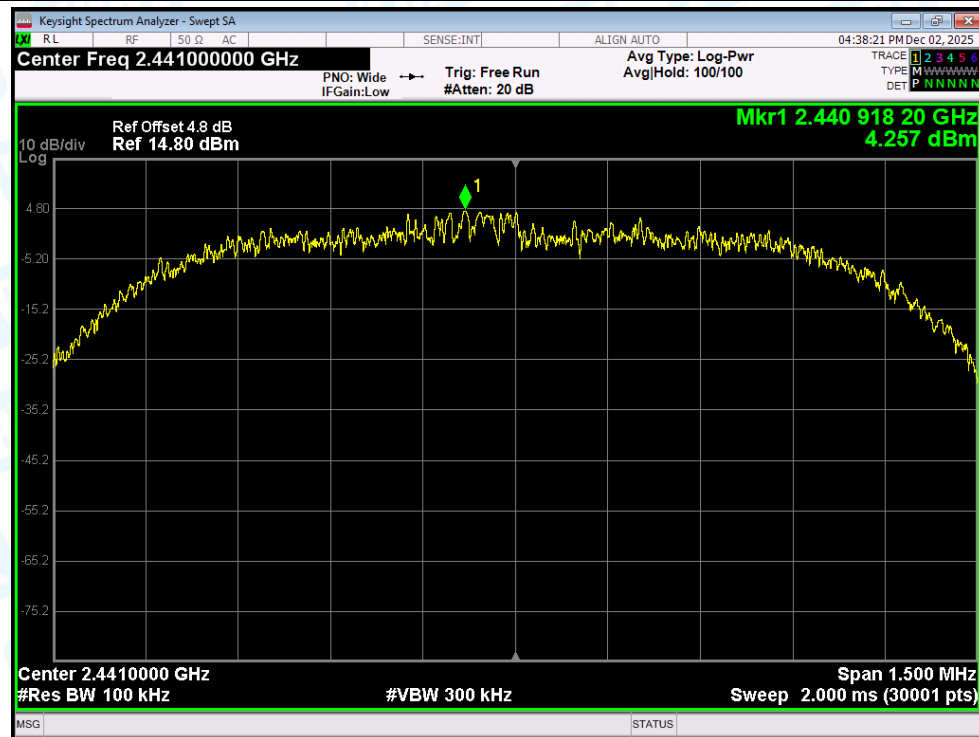


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

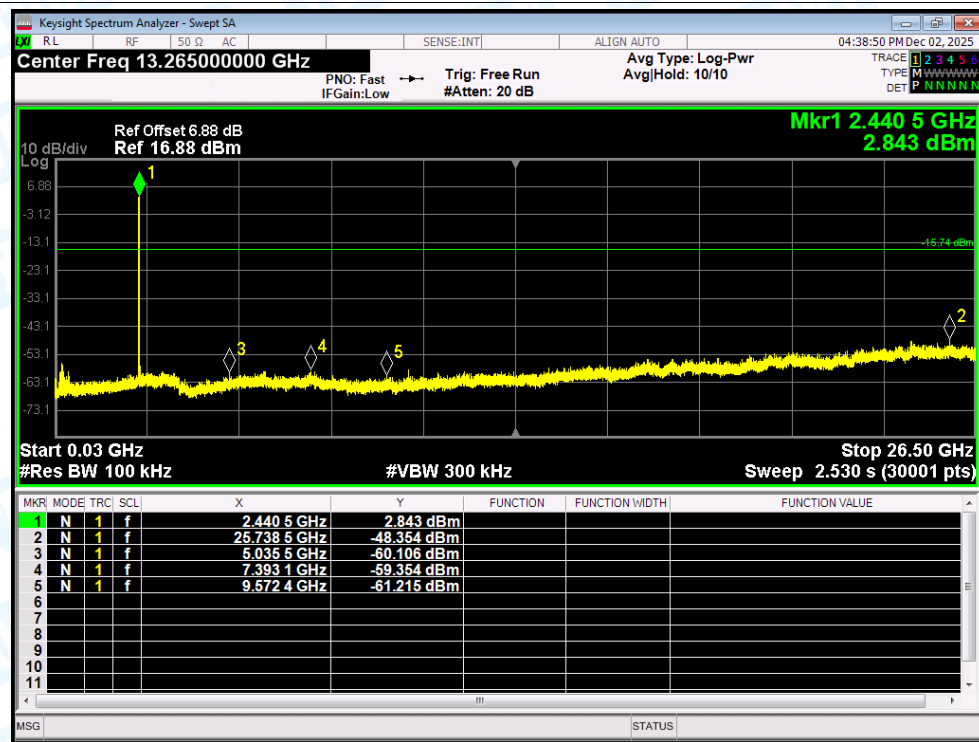


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

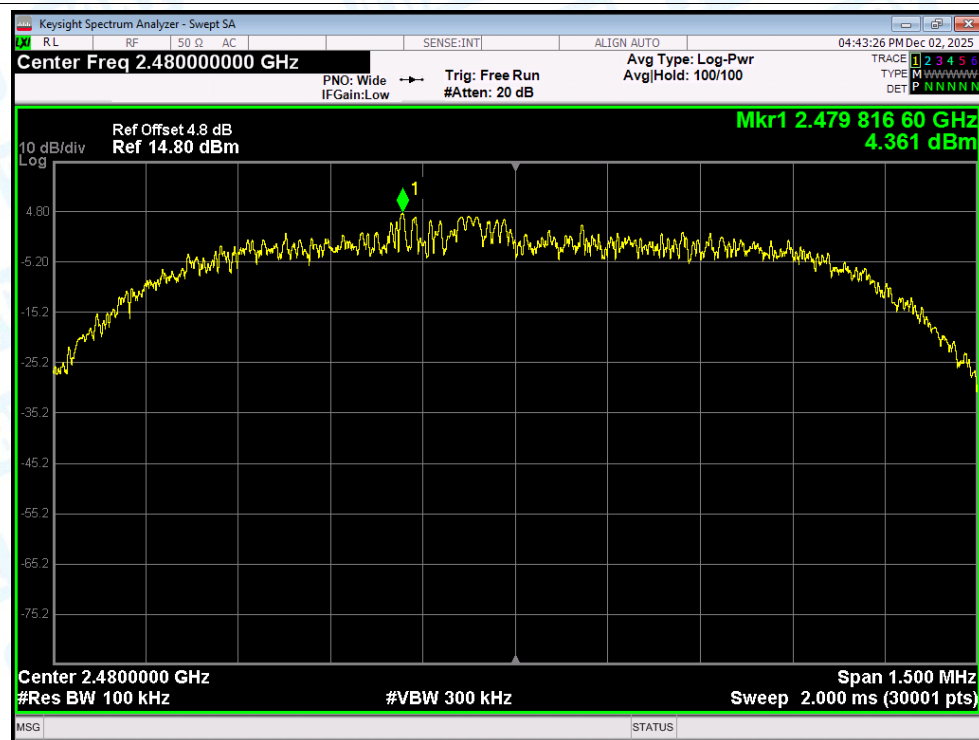


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

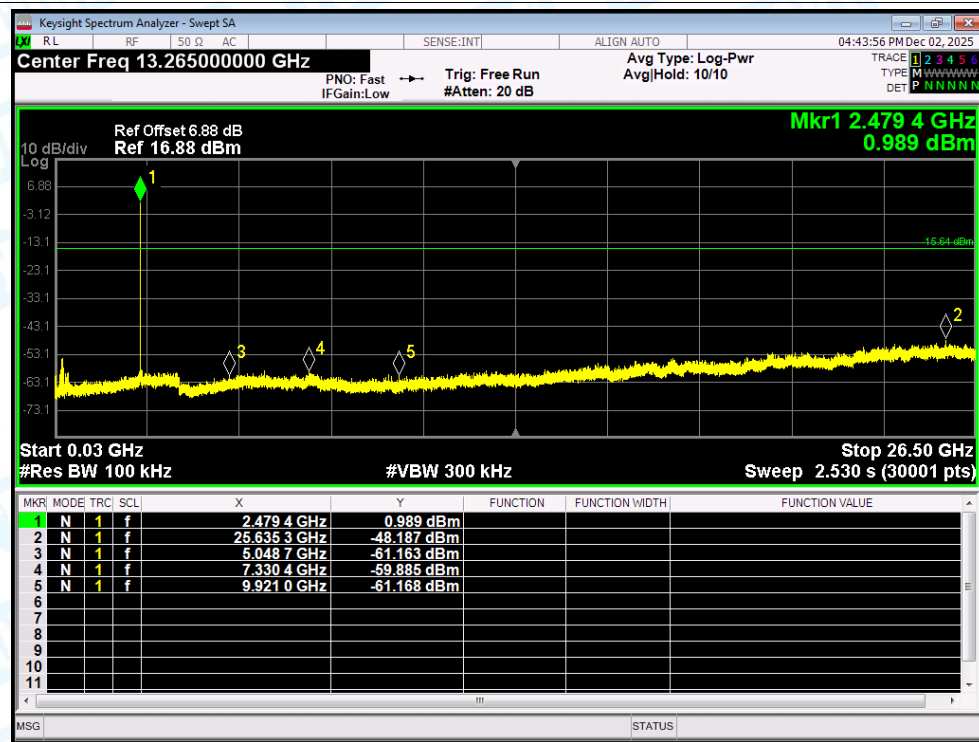


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

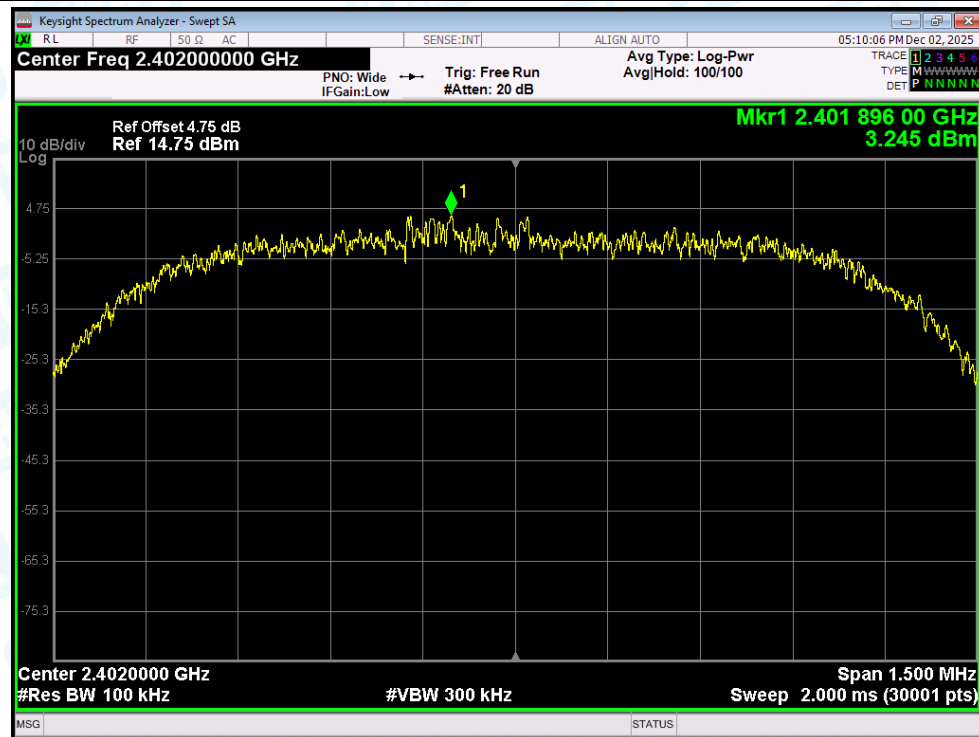


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

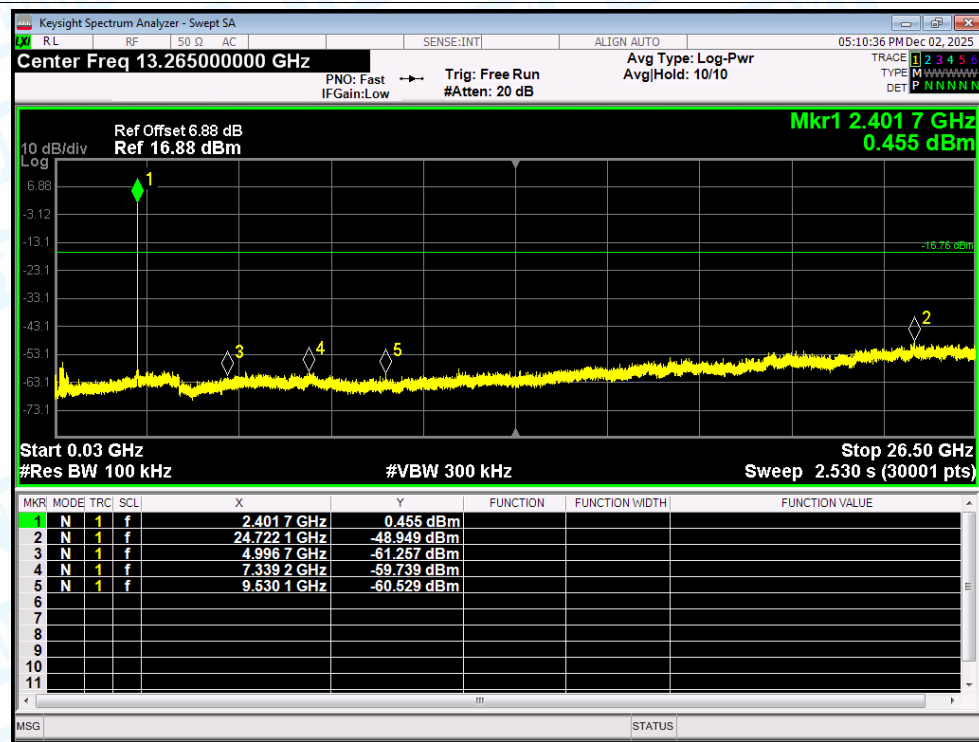


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

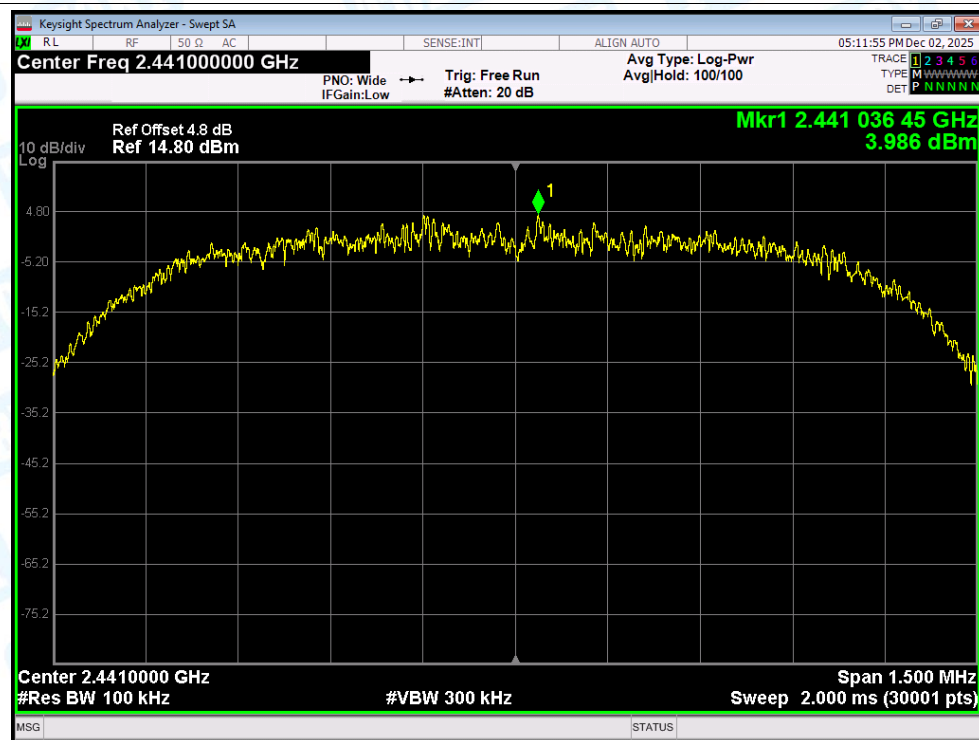


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

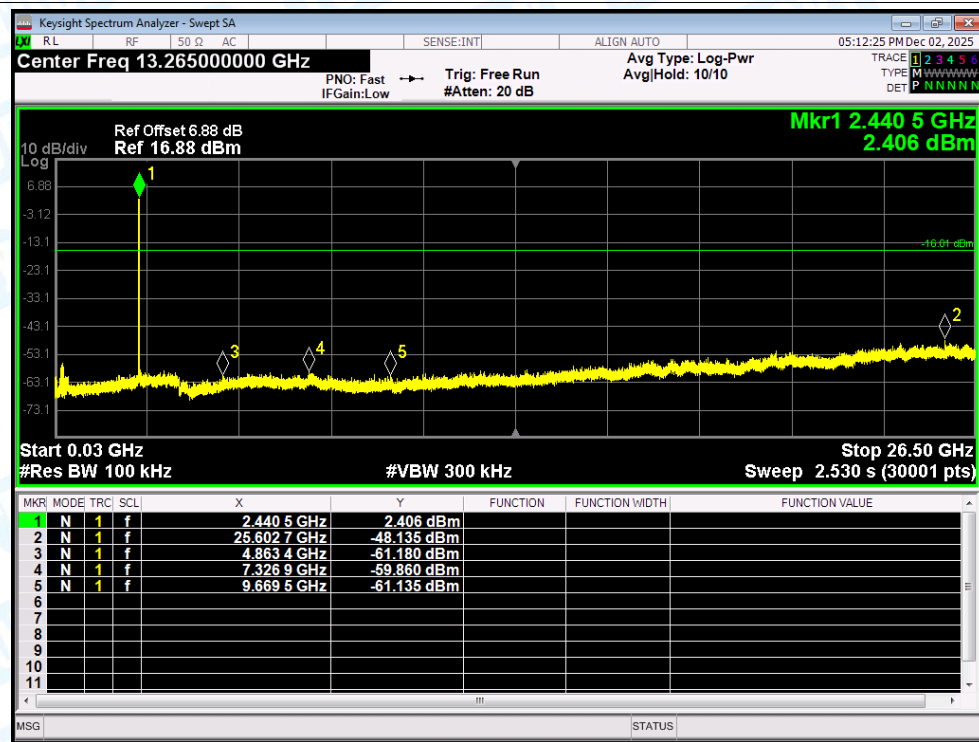

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

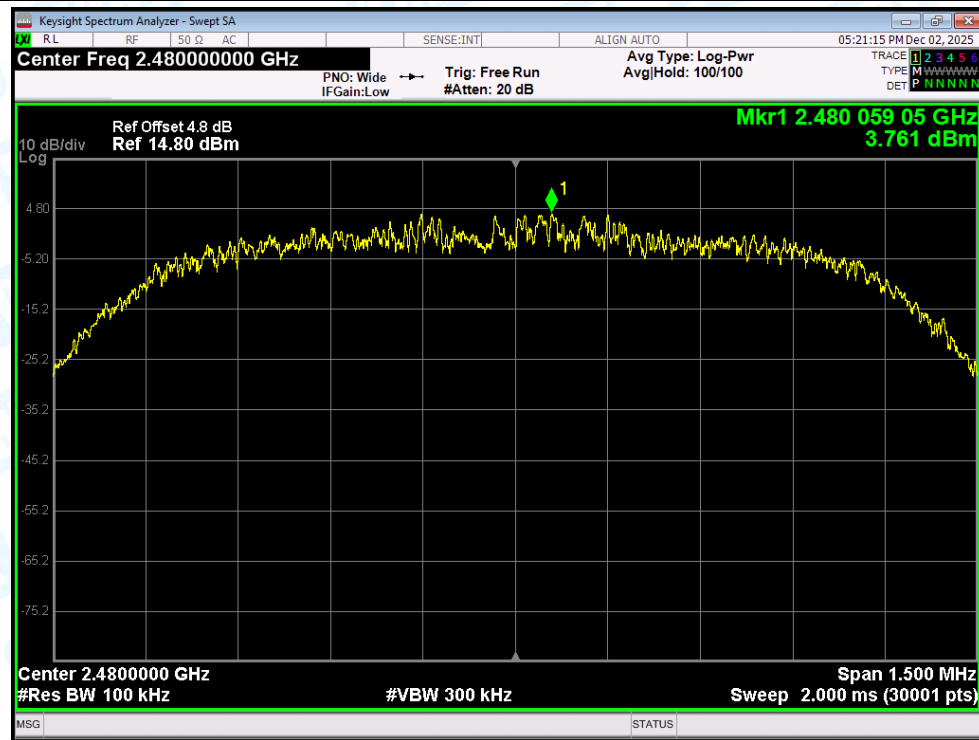

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

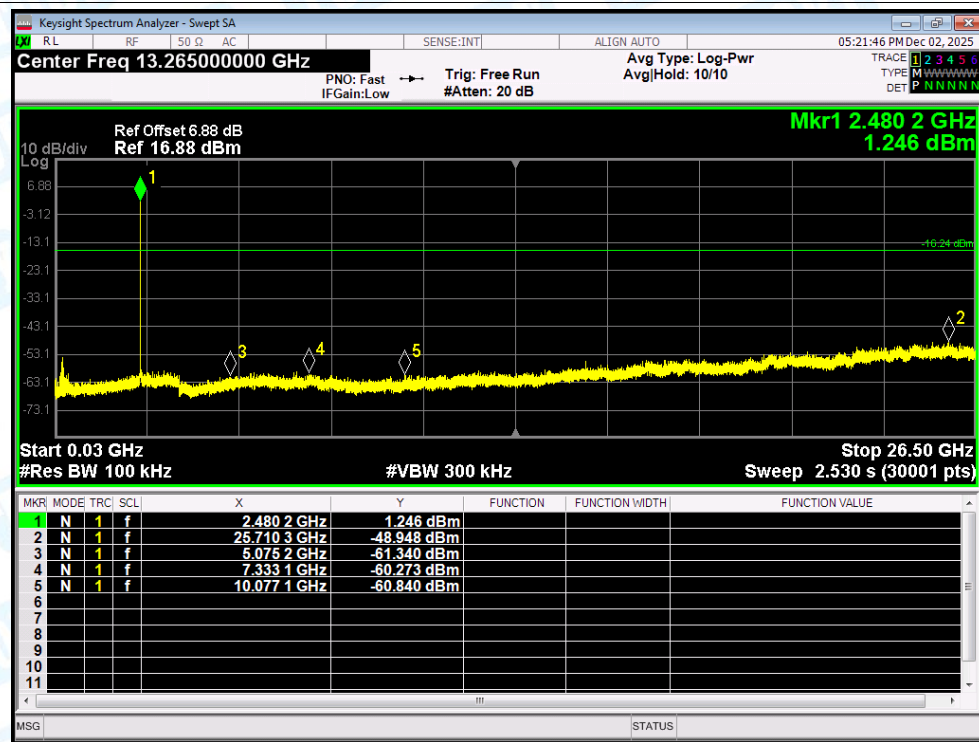


9. Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-48.34	2	-	48.92	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-56.29	2	5.25	46.22	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2331.888	-45.02	2	-	52.24	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2368.368	-55.19	2	5.25	47.32	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-47.42	2	-	49.84	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-55.72	2	5.25	46.79	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-46.49	2	-	50.77	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-55.21	2	5.39	47.44	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2497.528	-44.24	2	-	53.02	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2499.064	-54.43	2	5.39	48.22	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-46.61	2	-	50.65	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-55.38	2	5.39	47.27	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-48.96	2	-	48.3	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-56.28	2	5.25	46.23	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2340.624	-44.62	2	-	52.64	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2388.048	-54.92	2	5.25	47.59	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-47.64	2	-	49.62	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-55.65	2	5.25	46.86	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-45.8	2	-	51.46	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-54.58	2	5.24	47.92	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.656	-44.06	2	-	53.2	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2484.184	-53.97	2	5.24	48.53	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-48.04	2	-	49.22	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-54.62	2	5.24	47.88	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-49.66	2	-	47.6	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-56.37	2	5.25	46.14	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2387.856	-44.65	2	-	52.61	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2366.736	-54.94	2	5.25	47.57	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-46.72	2	-	50.54	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-55.68	2	5.25	46.83	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-44.93	2	-	52.33	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-55.03	2	5.24	47.47	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.8	-43.39	2	-	53.87	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.728	-54.3	2	5.24	48.2	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-47.43	2	-	49.83	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-54.95	2	5.24	47.55	Average	54	Pass


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)

Test Graphs


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

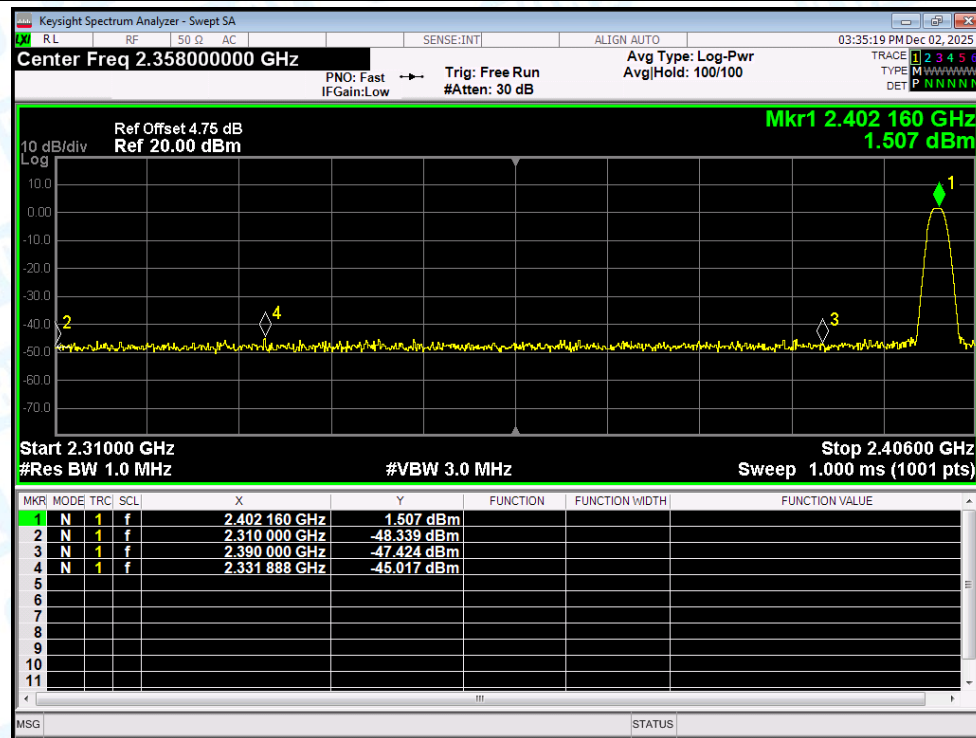


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

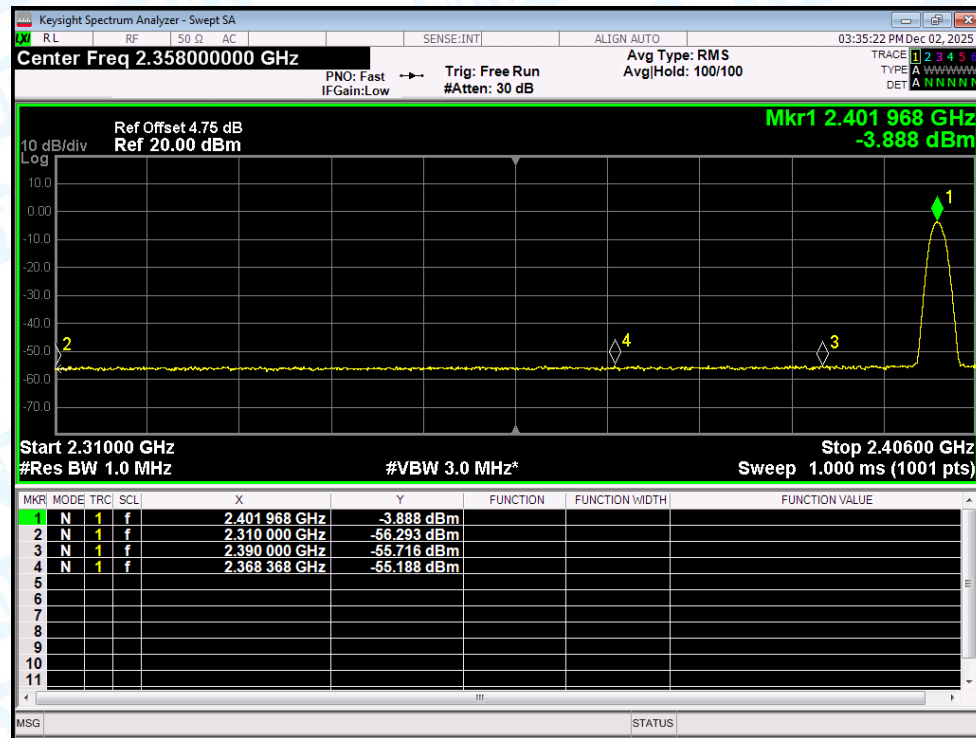


Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

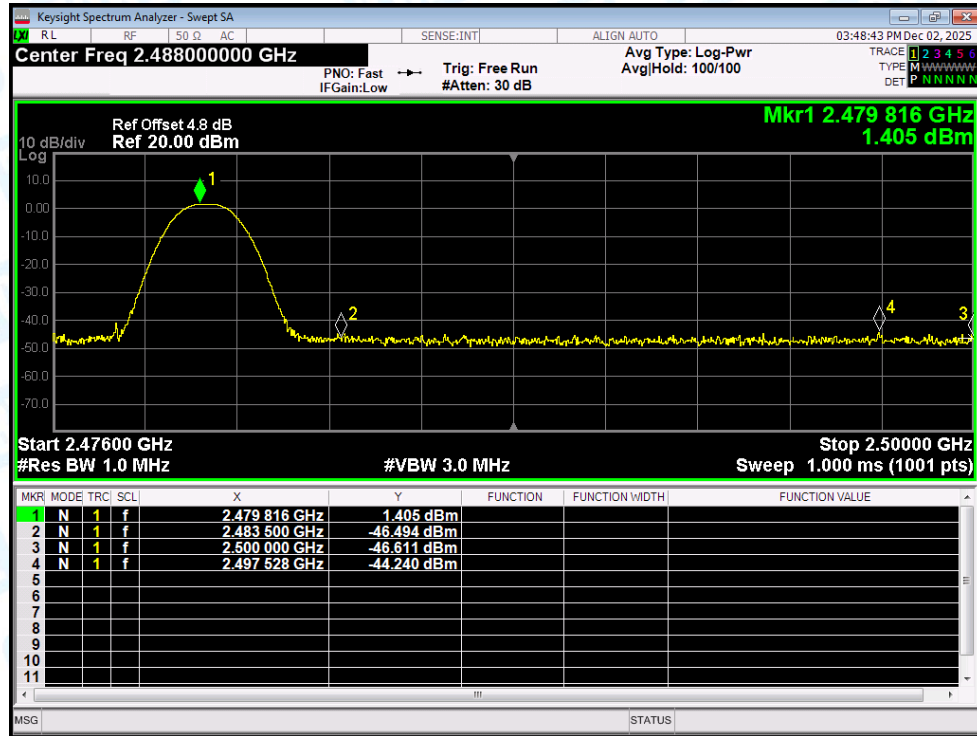


Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

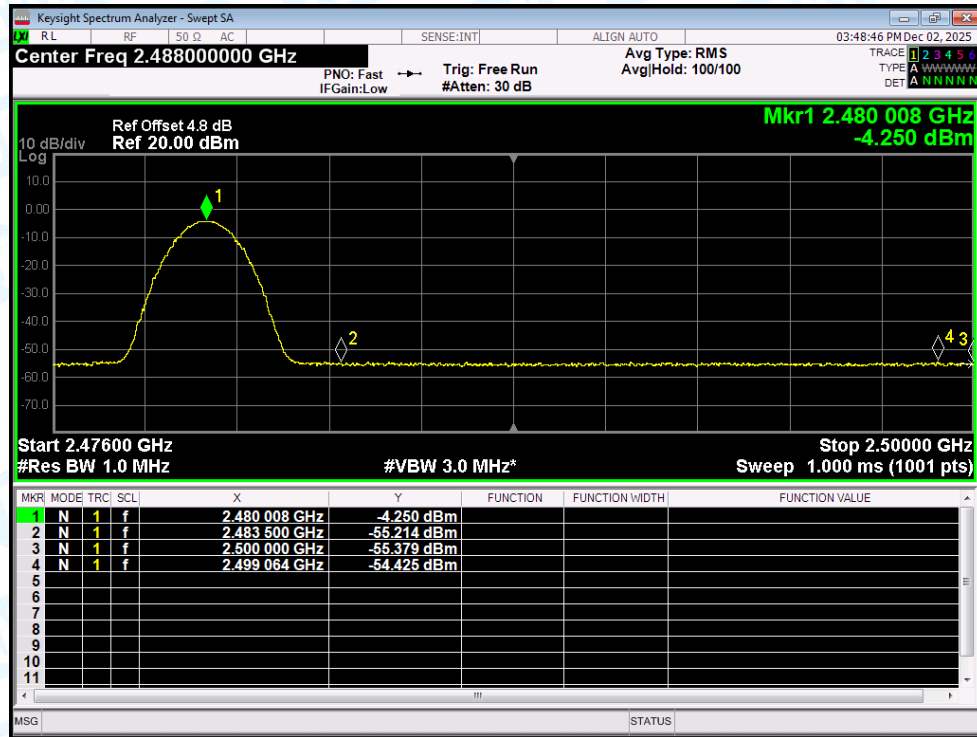


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

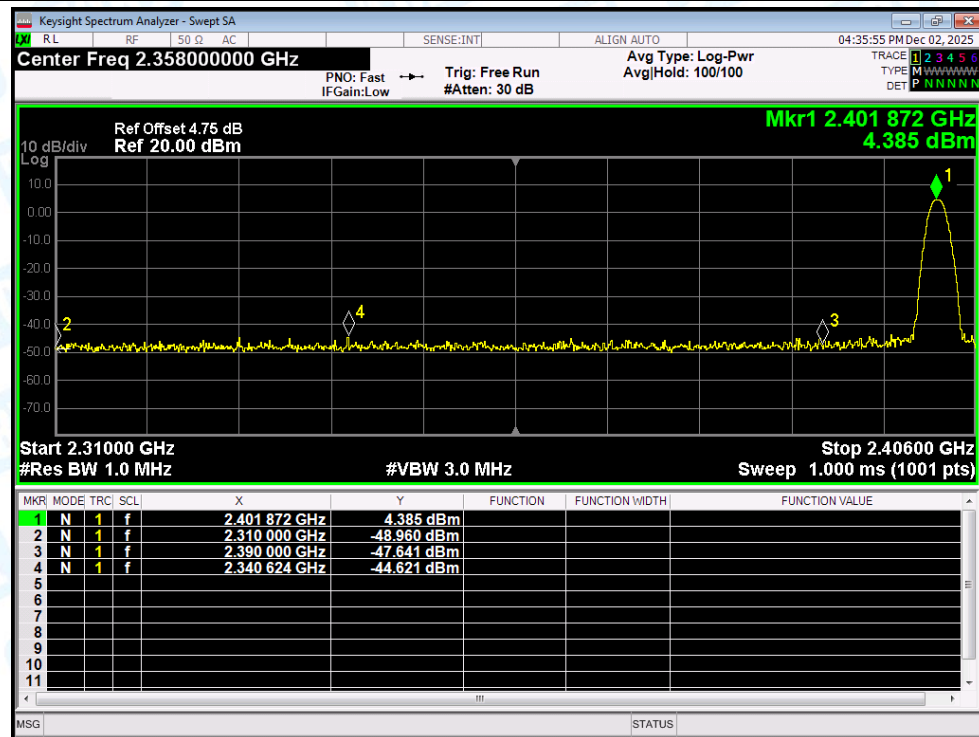


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

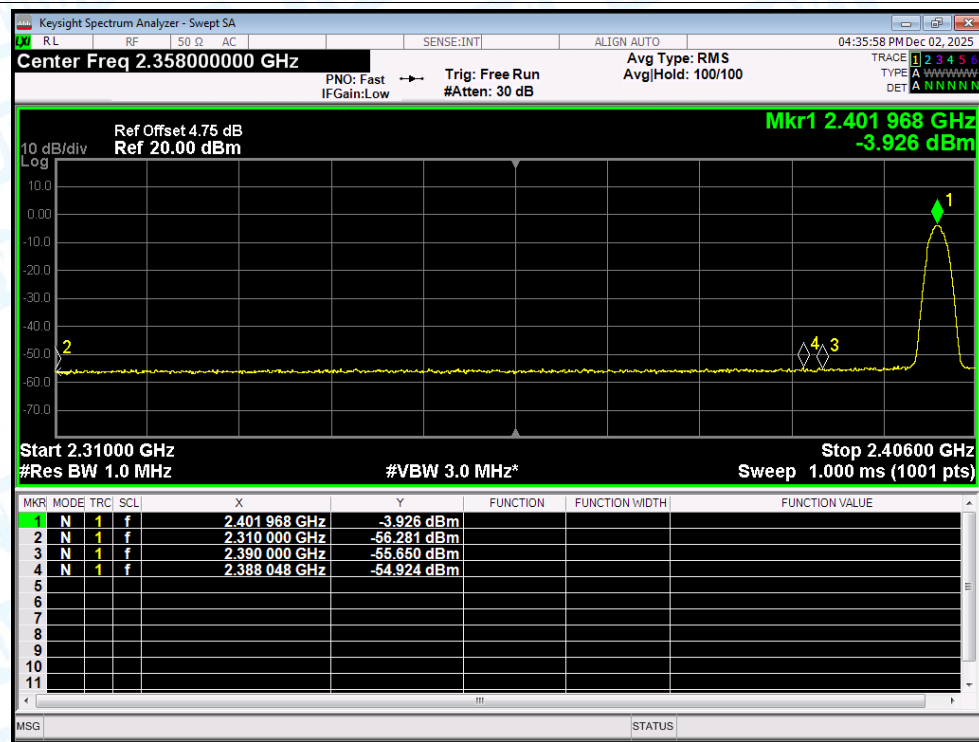


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

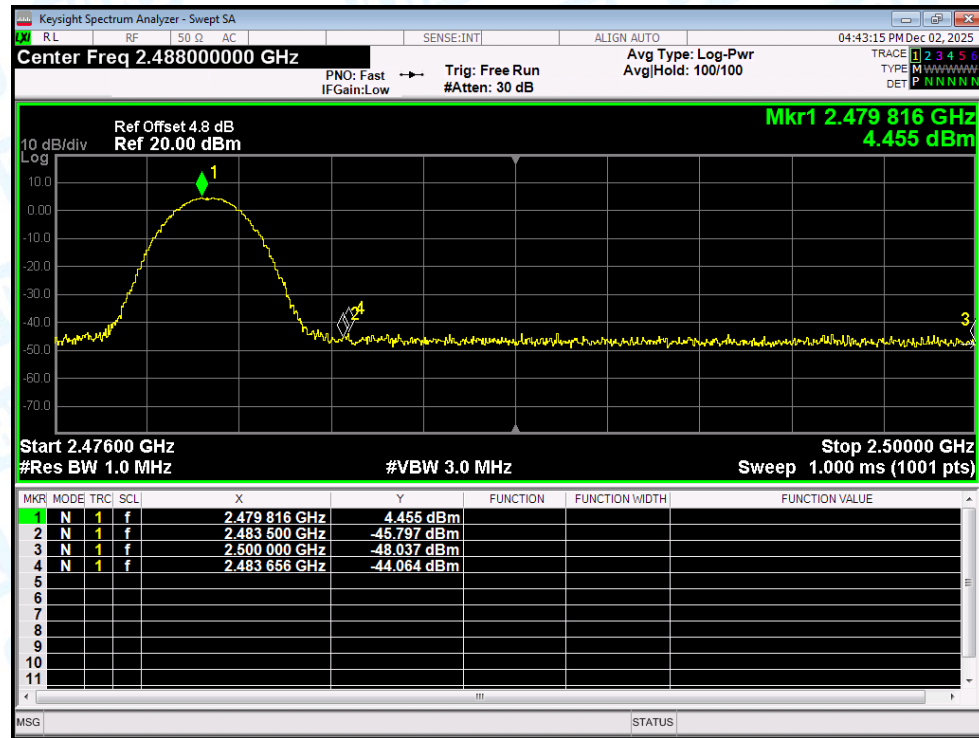


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

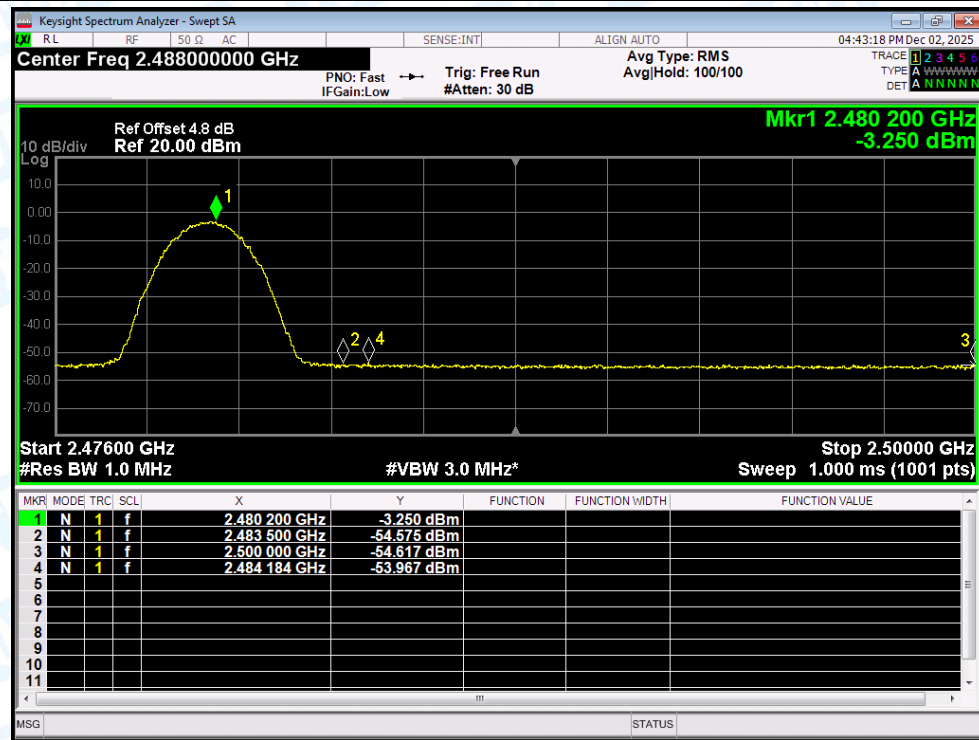


Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

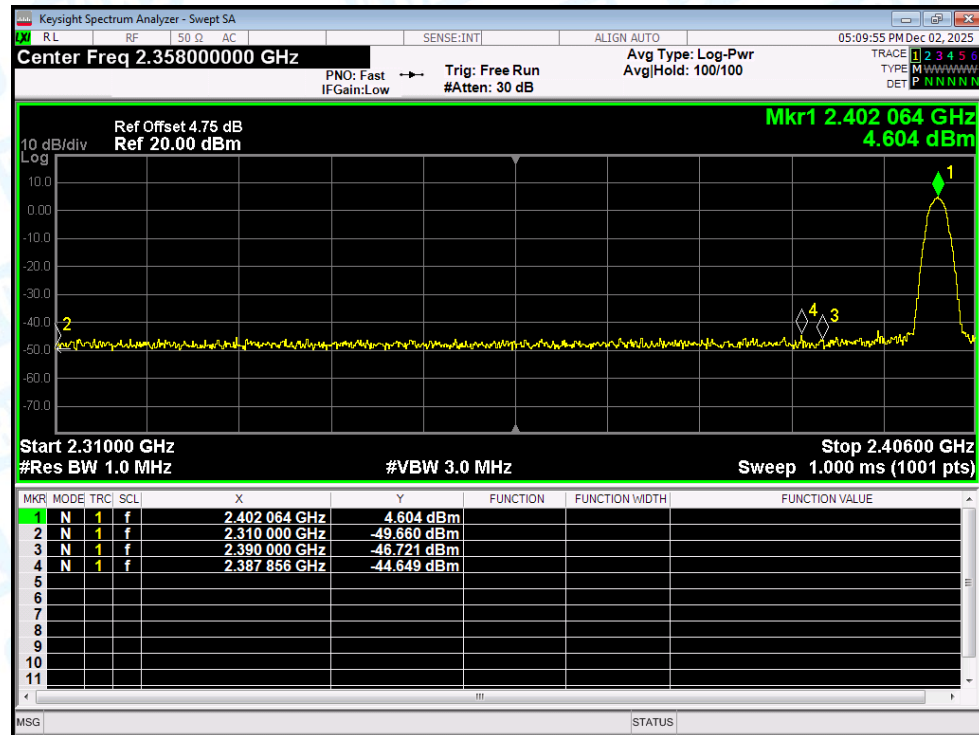


Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

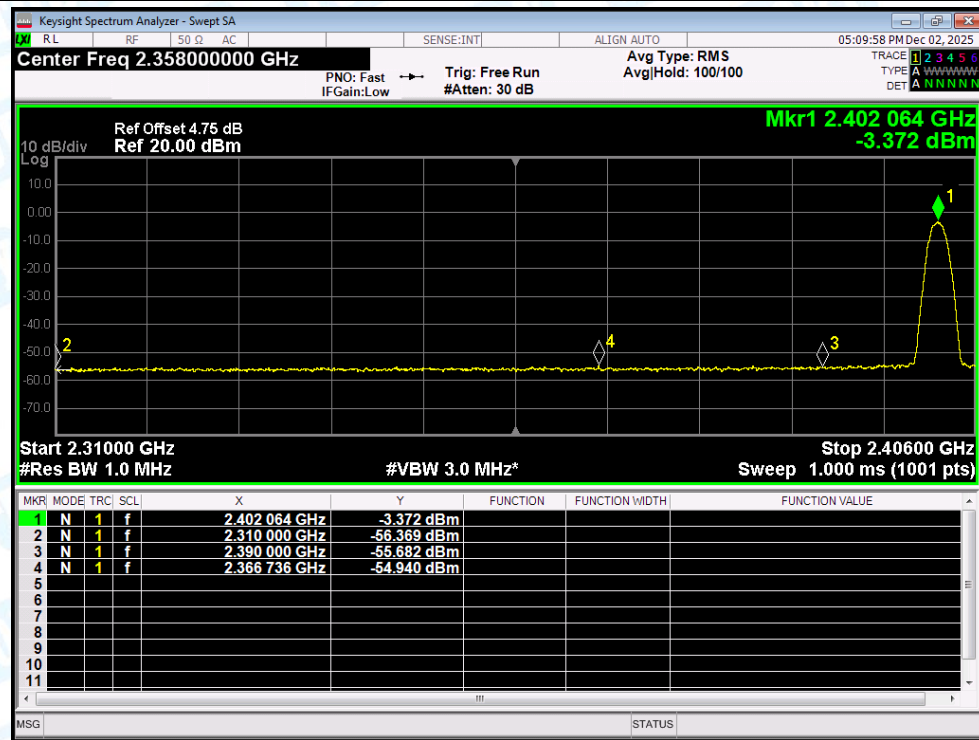

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

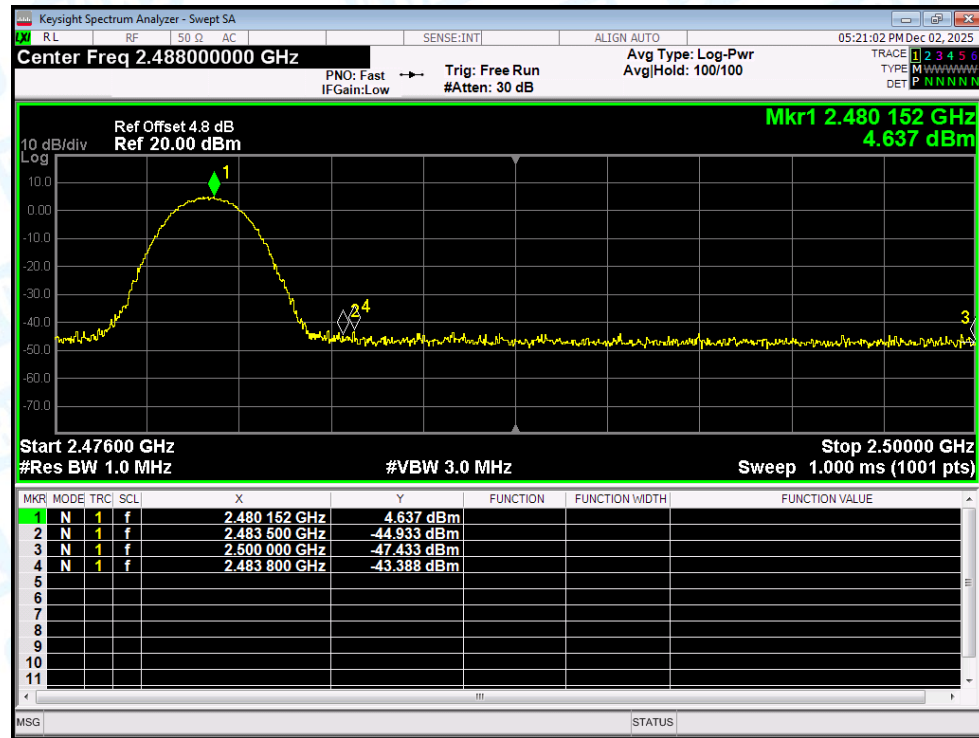

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

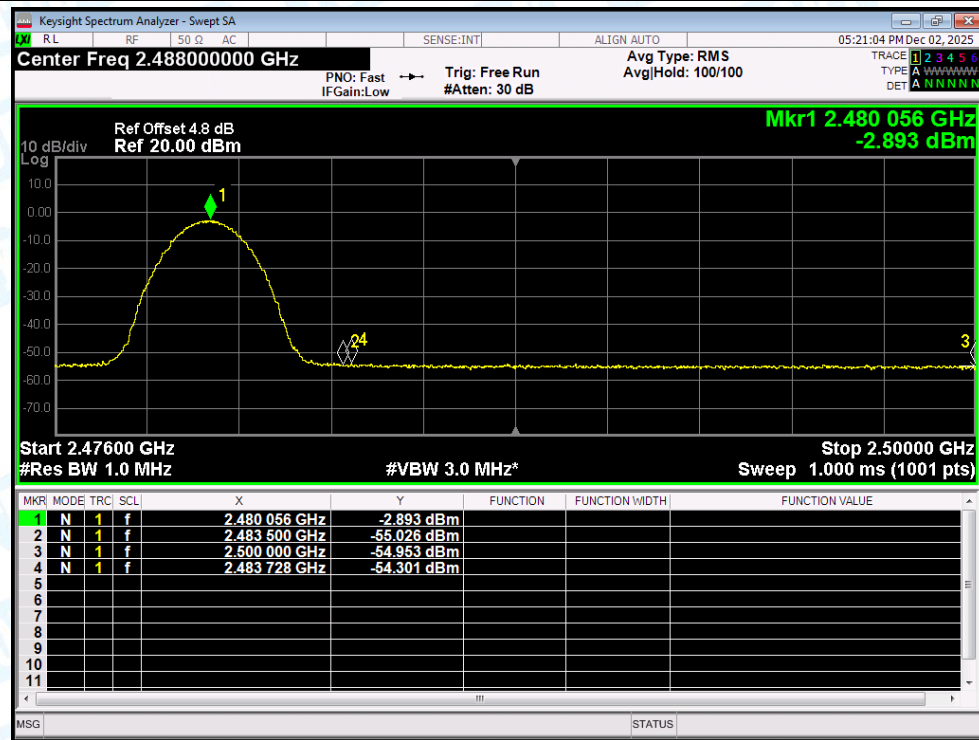


10. Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2441.044	2441.983	0.939	0.653	Pass
NVNT	2-DH5	Ant1	2440.981	2441.986	1.005	0.84	Pass
NVNT	3-DH5	Ant1	2441.005	2442.004	0.999	0.867	Pass


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)


Test Graphs

CFS NVNT 1-DH5 2441MHz Ant1

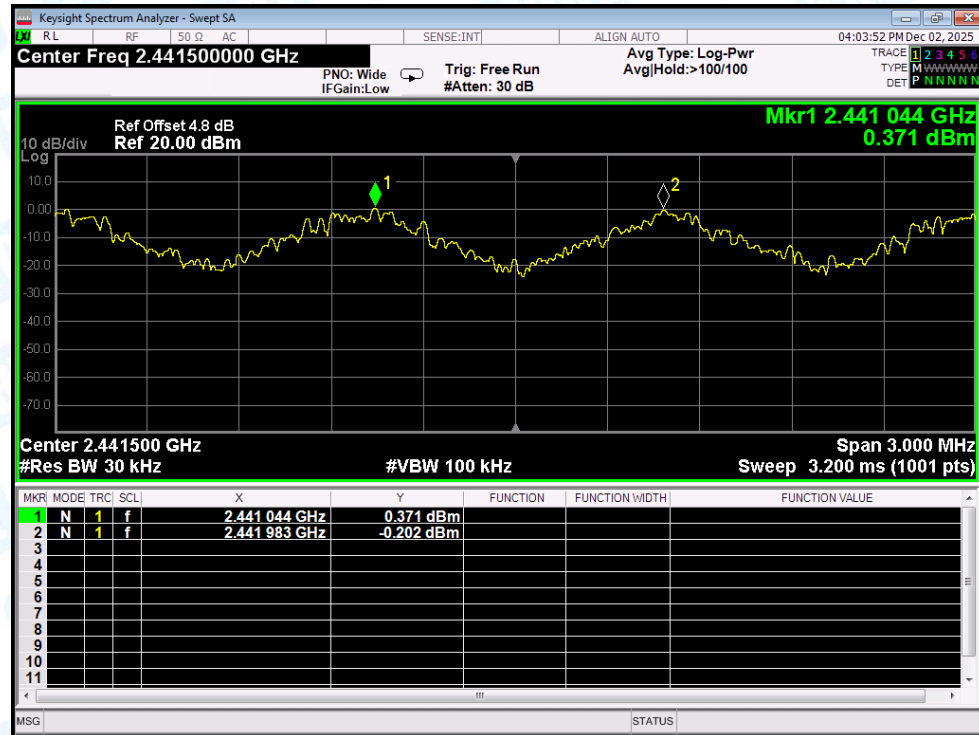

CFS NVNT 2-DH5 2441MHz Ant1

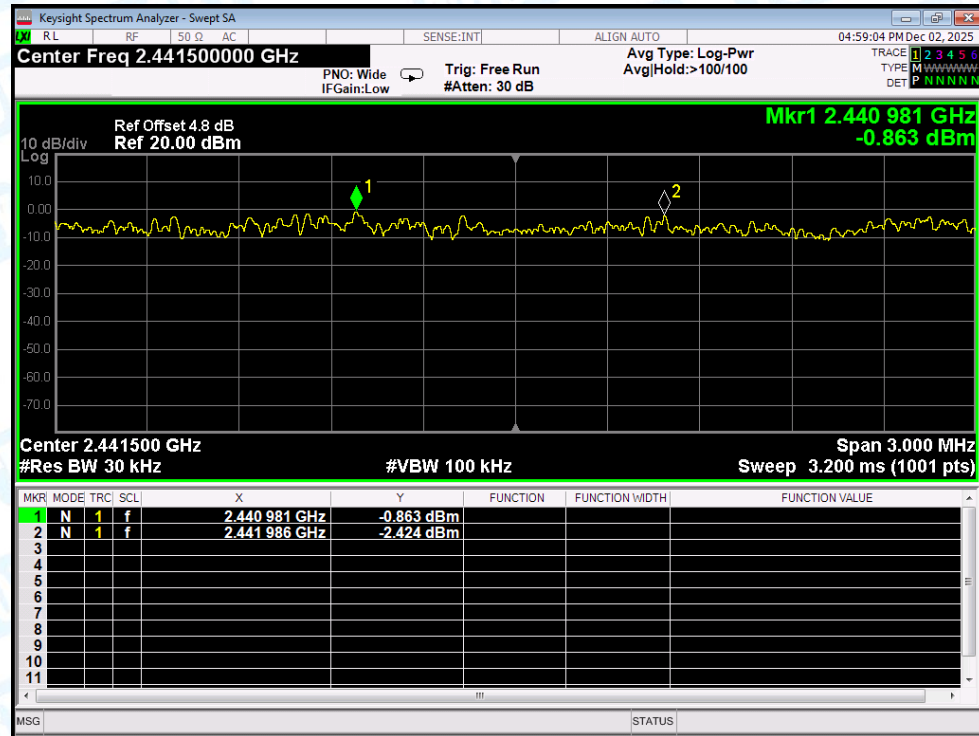

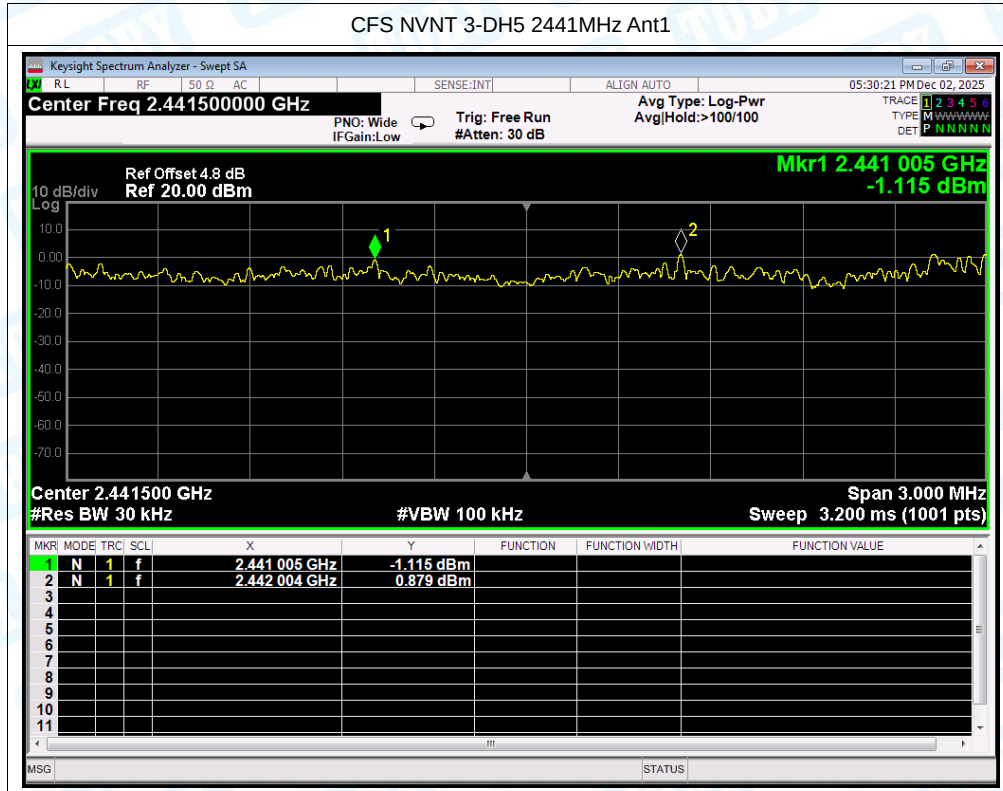


11. Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass


Both headphones were tested, and only the worst mode was recorded.(Left Earphone)


Test Graphs

Hopping No. NVNT 1-DH5 2441MHz Ant1

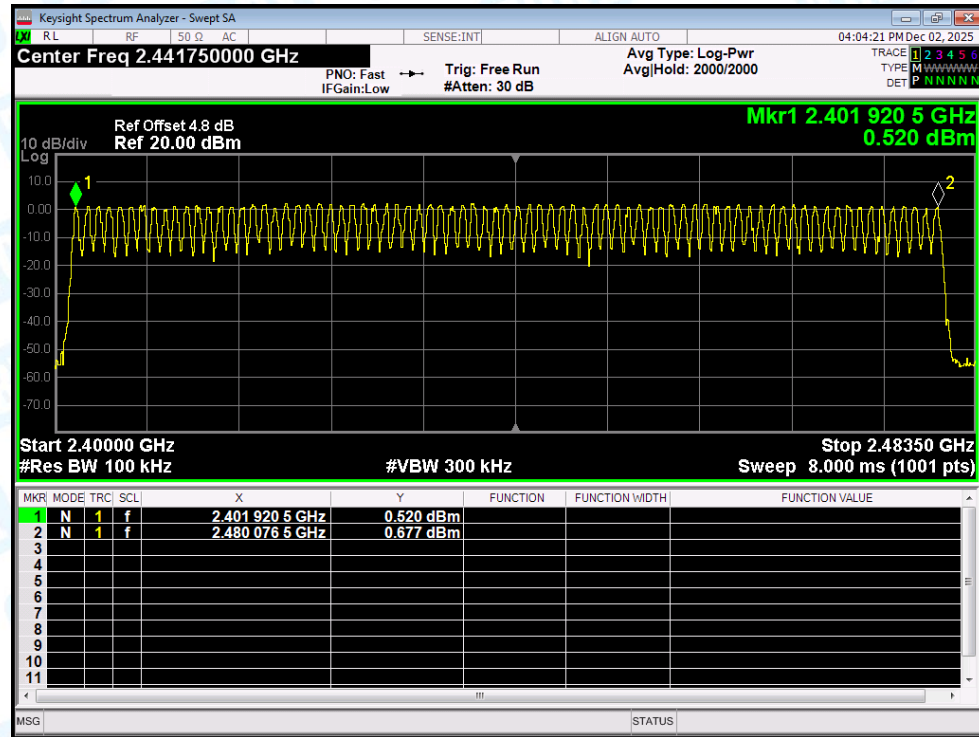

Hopping No. NVNT 2-DH5 2441MHz Ant1

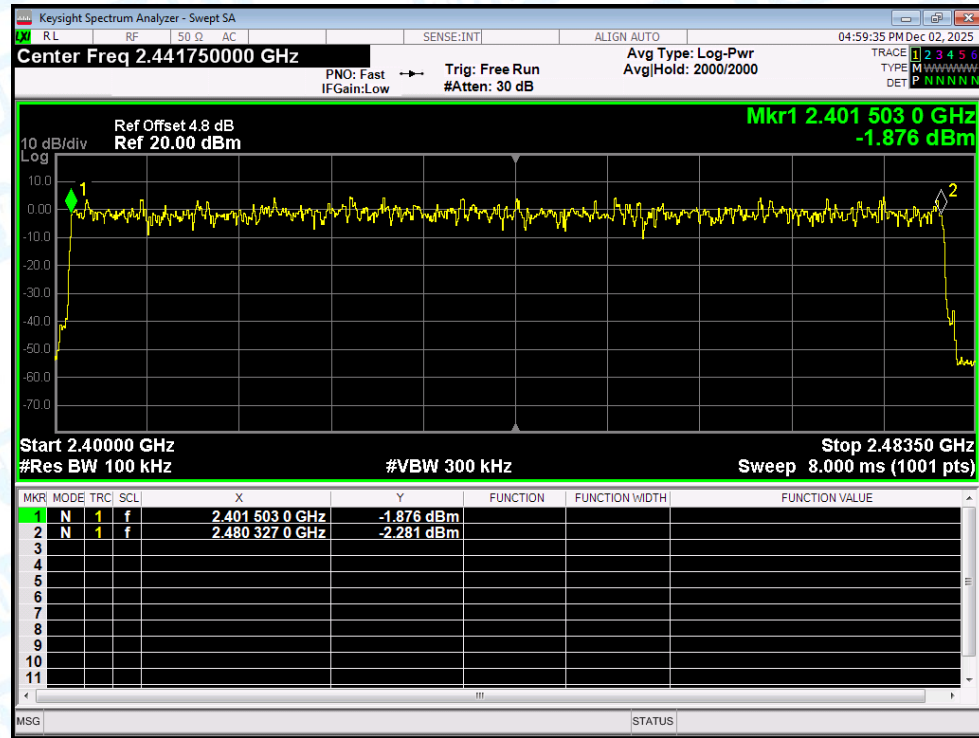

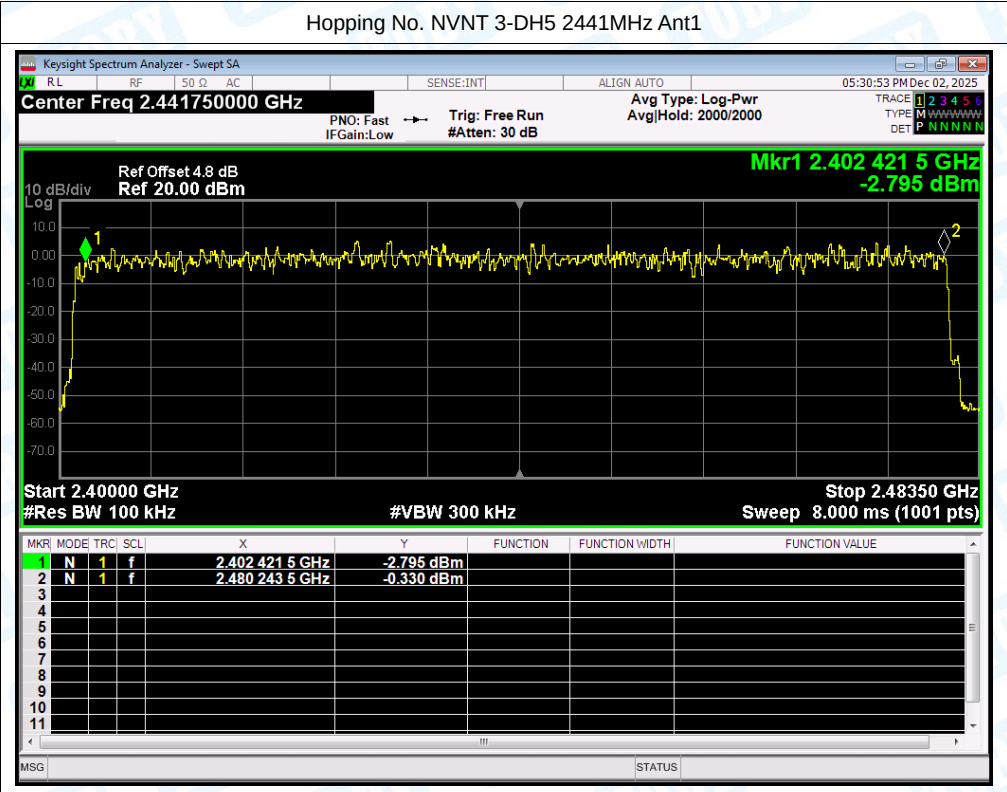

-----END OF THE REPORT-----