




FCC Radio Test Report

FCC ID: 2BS4O-ZT242

This report concerns: Original Grant

Project No. : 2602C087
Equipment : True Wireless Bluetooth Earbuds
Brand Name : 1) NOBIS
 2) JUOVI
Model Name : 1) N3921, N3922, N3923, N3924, N3925
 2) J3921, J3922, J3923, J3924, J3925
Applicant : SVVR Limited
Address : 19H Maxgrand plaza No.3 Tai Yau Street San Po Kong, Kowloon, HongKong
Manufacturer : SVVR Limited
Address : 19H Maxgrand plaza No.3 Tai Yau Street San Po Kong, Kowloon, HongKong
Factory : Shenzhen Zowee Smart Manufacturing Co., Ltd.
Address : ROOM101, 201, 401, 501, 601 of No.1 Factory Building, No. 149, Second Industrial Road, Tangxiachong Community, Yanluo Street, Bao'an District, Shenzhen City, Guangdong Province, P.R.China
Date of Receipt : Feb. 05, 2026
Date of Test : Feb. 06, 2026 ~ Mar. 25, 2026
Issued Date : Apr. 13, 2026
Test Sample : Engineering Sample No.: DG920260205303 for AC power line conducted emissions, DG920260205303 and DG92026030668 radiated, DG920260205302 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : 
Chella Zheng

Approved by : 
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5 SUPPORT UNITS	15
3.6 CUSTOMER INFORMATION DESCRIPTION	16
4 . AC POWER LINE CONDUCTED EMISSIONS	17
4.1 LIMIT	17
4.2 TEST PROCEDURE	17
4.3 DEVIATION FROM TEST STANDARD	17
4.4 TEST SETUP	18
4.5 EUT OPERATING CONDITIONS	18
4.6 TEST RESULTS	18
5 . RADIATED EMISSIONS	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM TEST STANDARD	21
5.4 TEST SETUP	21
5.5 EUT OPERATING CONDITIONS	23
5.6 TEST RESULT - 9 KHZ TO 30 MHZ	23
5.7 TEST RESULT - 30 MHZ TO 1000 MHZ	23
5.8 TEST RESULT - ABOVE 1000 MHZ	23
6 . BANDWIDTH	24
6.1 LIMIT	24
6.2 TEST PROCEDURE	24

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	24
6.4 TEST SETUP	24
6.5 EUT OPERATION CONDITIONS	24
6.6 TEST RESULTS	24
7 . MAXIMUM OUTPUT POWER	25
7.1 LIMIT	25
7.2 TEST PROCEDURE	25
7.3 DEVIATION FROM STANDARD	25
7.4 TEST SETUP	25
7.5 EUT OPERATION CONDITIONS	25
7.6 TEST RESULTS	25
8 . CONDUCTED SPURIOUS EMISSION	26
8.1 LIMIT	26
8.2 TEST PROCEDURE	26
8.3 DEVIATION FROM STANDARD	27
8.4 TEST SETUP	27
8.5 EUT OPERATION CONDITIONS	27
8.6 TEST RESULTS	27
9 . POWER SPECTRAL DENSITY	28
9.1 LIMIT	28
9.2 TEST PROCEDURE	28
9.3 DEVIATION FROM STANDARD	28
9.4 TEST SETUP	28
9.5 EUT OPERATION CONDITIONS	28
9.6 TEST RESULTS	28
10 . MEASUREMENT INSTRUMENTS LIST	29
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	38
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	41
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	46
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	49
APPENDIX E - BANDWIDTH	98
APPENDIX F - MAXIMUM OUTPUT POWER	107

Table of Contents

Page

APPENDIX G - CONDUCTED SPURIOUS EMISSION

112

APPENDIX H - POWER SPECTRAL DENSITY

121

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2602C087	R00	Original Report.	Mar. 31, 2026	Invalid
BTL-FCCP-1-2602C087	R01	This report only added a verification date for the active loop antenna on page 29. It is a revision of the report BTL-FCCP-1-2602C087 R00. This is a newly released report, replacing the BTL-FCCP-1-2602C087 R00 report.	Apr. 13, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable to this device.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

1# For Radiated Emissions-Above 18000 MHz test item:

The test facilities used to collect the test data in this report is at the location of Radiated Emissions Above 18GHz Items: Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

2# For others test items:

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U_i (dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

Test Site	Method	Measurement Frequency Range	U_i (dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U_i (dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U_i (dB)
DGDLCB03 (3m)	CISPR	1GHz ~ 6GHz	4.16
		6GHz ~ 18GHz	4.74

Test Site	Method	Measurement Frequency Range	U_i (dB)
DGGDCB01 (1m)	CISPR	18GHz ~ 40GHz	4.30

B. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.75 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	2.1 dB
Conducted Bandedge Emission	1.7 dB
Power Spectral Density	1.8 dB
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	22°C	51%	DC 5V	Hayden Chen
Radiated Emissions -9 kHz to 30 MHz	23°C	44%	DC 5V	Hayden Chen
Radiated Emissions -30 MHz to 1000 MHz	23°C	45%	DC 5V	Torin Long
Radiated Emissions -Above 1000 MHz	23°C	41%	DC 5V	Torin Long
	23°C	41%	DC 5V	Torin Long
	24°C	41%	DC 5V	Ilya zhang
Bandwidth	24°C	52%	DC 5V	Jay Wei
Maximum Output Power	24°C	52%	DC 5V	Jay Wei
Conducted Spurious Emission	24°C	52%	DC 5V	Jay Wei
Power Spectral Density	24°C	52%	DC 5V	Jay Wei

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	True Wireless Bluetooth Earbuds
Brand Name	1) NOBIS 2) JUOVI
Test Model	2) J3921
Model Name	1) N3921, N3922, N3923, N3924, N3925 2) J3921, J3922, J3923, J3924, J3925
Model Difference(s)	Only differ in brand name and model name.
Hardware Version	Charge Case: V1.0 Earphone: V1.0
Software Version	Charging Case: V1.0.6 Earphone: V1.0.3
Power Source	Charging Case: 1# DC voltage supplied from AC adapter. (Supports Unit) 2# Supplied from Li-ion Polymer Battery. Model: YJ111530 Earphone: 1# Supplied from Charging Case. 2# Supplied from Lithium-ion Polymer Rechargeable Cell. Model: CH1154AA
Power Rating	Charging Case: 1# 5V $\overline{\text{---}}$ 400mA 2# DC 3.85V / 500mAh Earphone: 1# 5V $\overline{\text{---}}$ 110mA (X2) 2# DC 3.85V 60mAh 0.231Wh
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps, 2Mbps, 500kbps(S=2), 125kbps(S=8)
Max. Output Power	Left Earphone: 2Mbps: 8.54 dBm (0.0071 W) Right Earphone: 2Mbps: 8.50 dBm (0.0071 W)

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)
1	SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD	S2B4BB1F1B09 300	Chip	N/A	1.73 (Left)
	SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD	S2B4BB1F1B09 400	Chip	N/A	1.95 (Right)

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_500kbps(S=2) Channel 00/19/39
Mode 4	TX Mode_125kbps(S=8) Channel 00/19/39
Mode 5	TX Mode_2Mbps Channel 39
Mode 6	TX Mode_1Mbps Channel 00
Mode 7	TX Mode_1Mbps Channel 39

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 5	TX Mode_2Mbps Channel 39

Radiated emissions test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 5	TX Mode_2Mbps Channel 39

Radiated emissions test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_500kbps(S=2) Channel 00/19/39
Mode 4	TX Mode_125kbps(S=8) Channel 00/19/39

Radiated emissions test - 1 GHz - 18 GHz_ For Worst case	
Final Test Mode	Description
Mode 6	TX Mode_1Mbps Channel 00_For Right Earphone
Mode 7	TX Mode_1Mbps Channel 39_For Left Earphone

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_500kbps(S=2) Channel 00/19/39
Mode 4	TX Mode_125kbps(S=8) Channel 00/19/39

Note:

- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the 2Mbps Channel 39 is found to be the worst case and recorded.
- (3) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (4) For radiated emission 1 GHz - 18GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is recorded in this report.

3.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Left Earphone


Test Software Version	BQB.exe		
Frequency (MHz)	2402	2440	2480
1Mbps	0x7F	0x7F	0x7F
2Mbps	0x7F	0x7F	0x7F
500kbps(S=2)	0x7F	0x7F	0x7F
125kbps(S=8)	0x7F	0x7F	0x7F

Right Earphone


Test Software Version	BQB.exe		
Frequency (MHz)	2402	2440	2480
1Mbps	0x7F	0x7F	0x7F
2Mbps	0x7F	0x7F	0x7F
500kbps(S=2)	0x7F	0x7F	0x7F
125kbps(S=8)	0x7F	0x7F	0x7F

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


AC power line conducted emissions test

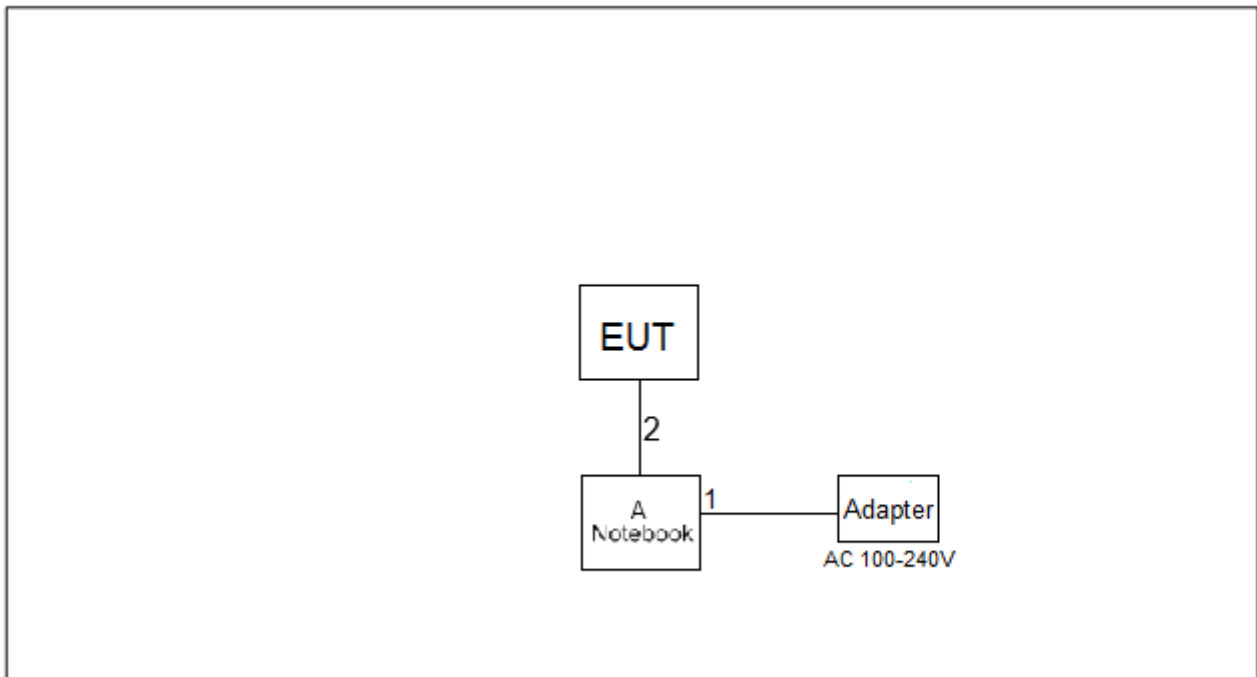

For Radiated emissions test_ Below 1GHz

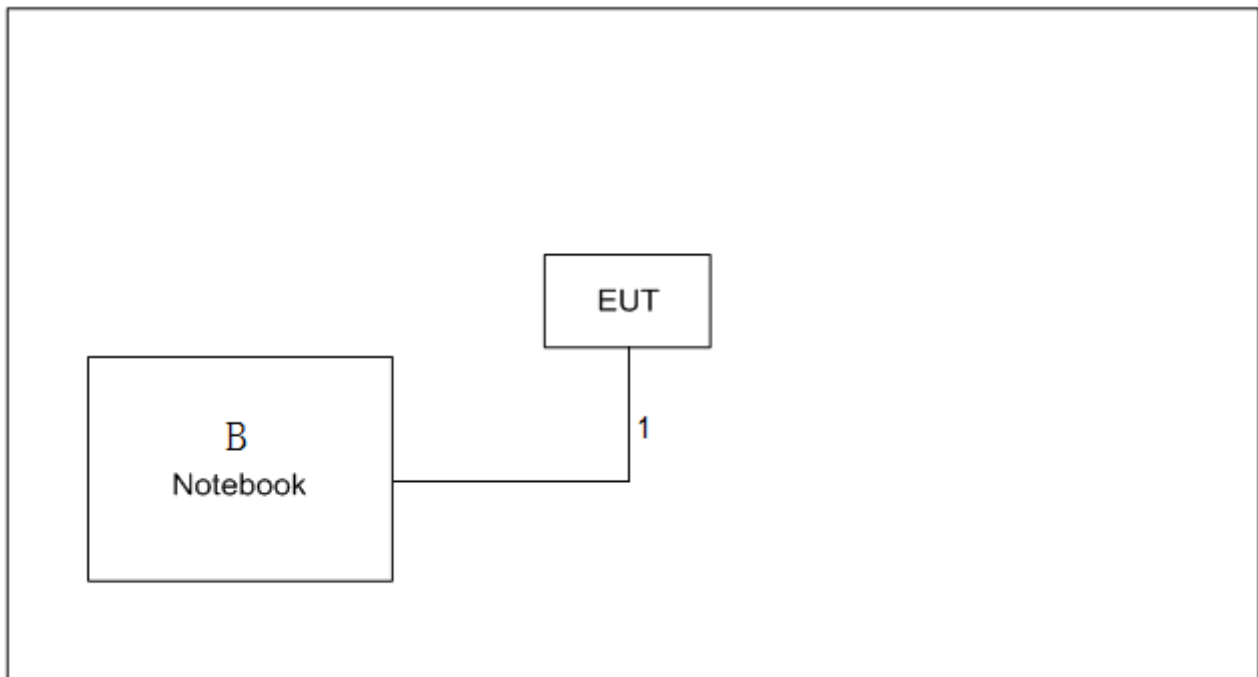

For Radiated emissions test_ Above 1GHz

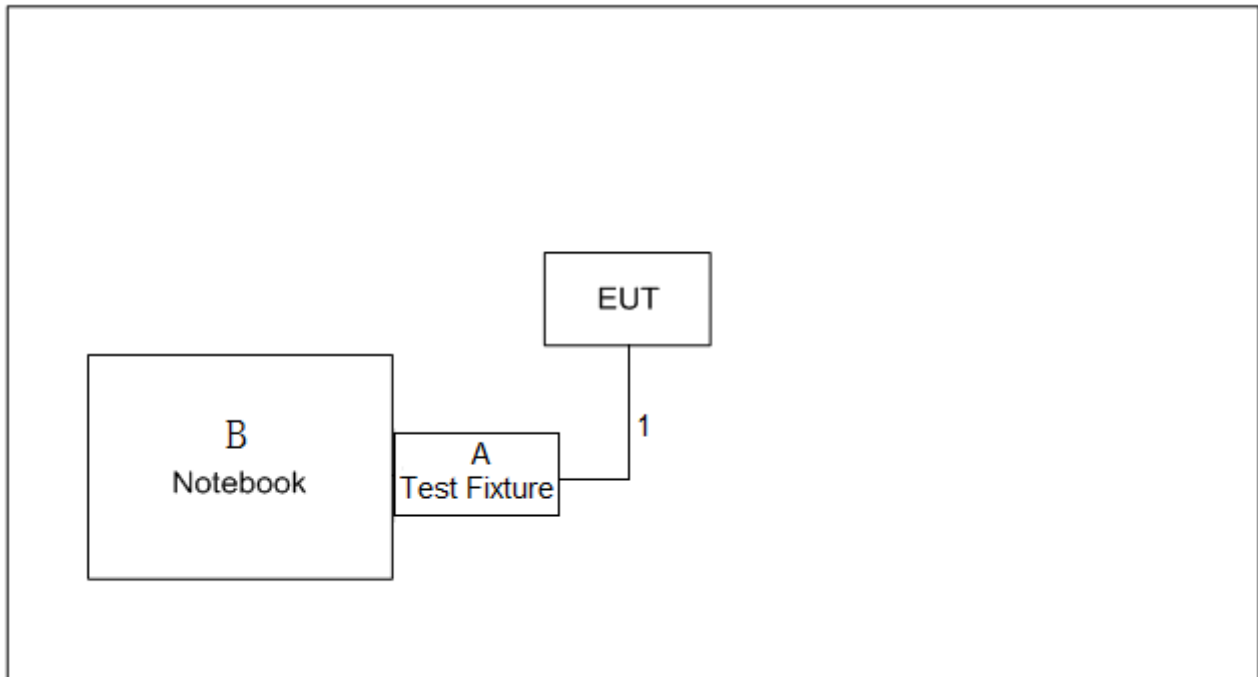

3.5 SUPPORT UNITS

AC power line conducted emissions test

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Lenovo	V310-14IK8	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	USB Cable	NO	NO	1m

For Radiated emissions test_ Below 1GHz

Item	Equipment	Brand	Model No.	Series No.
B	Notebook	HUAWEI	KLVG-16	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Data Cable	NO	NO	0.2m

For Radiated emissions test_ Above 1GHz

Item	Equipment	Brand	Model No.	Series No.
A	Test Fixture	N/A	N/A	N/A
B	Notebook	HUAWEI	KLVG-16	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Data Cable	NO	NO	0.2m

3.6 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. Part of the cable losses (1.0 dB) are provided by the manufacturer, while the other parts of the cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value - Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

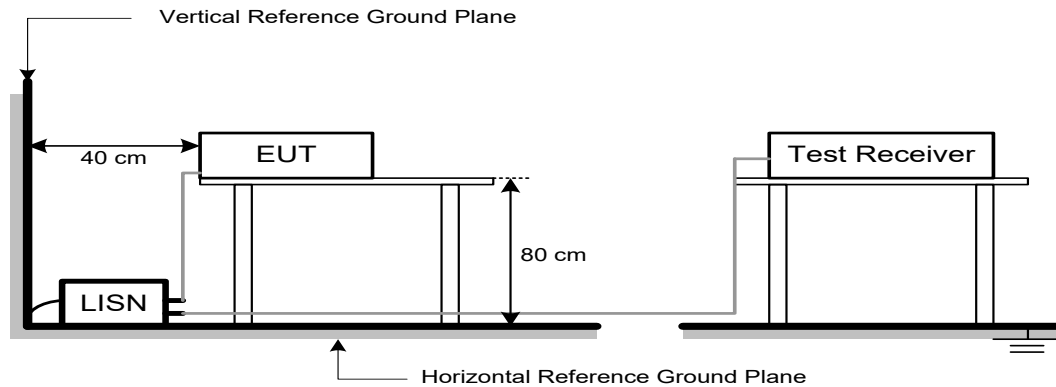

4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) , then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

Note:

(1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

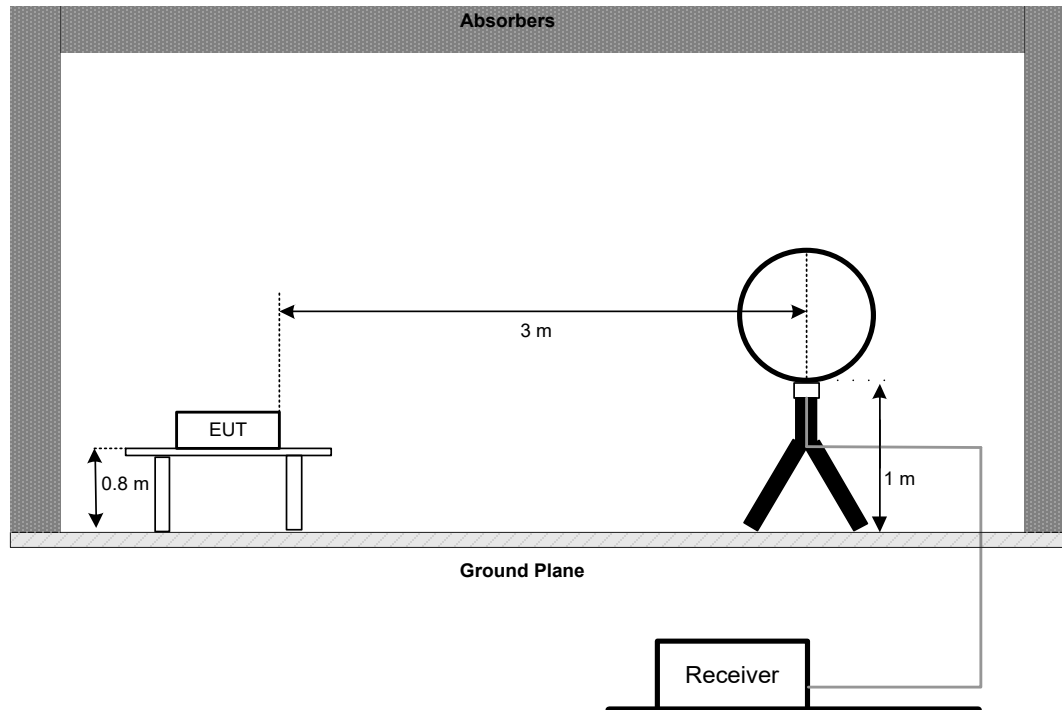


30 MHz to 1 GHz

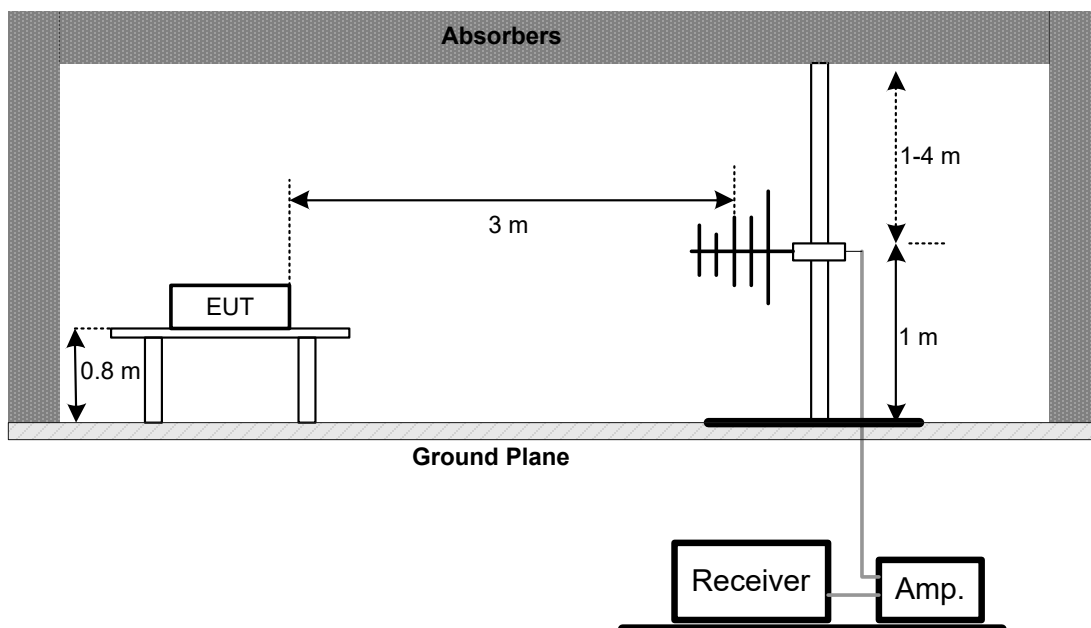

**Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)**

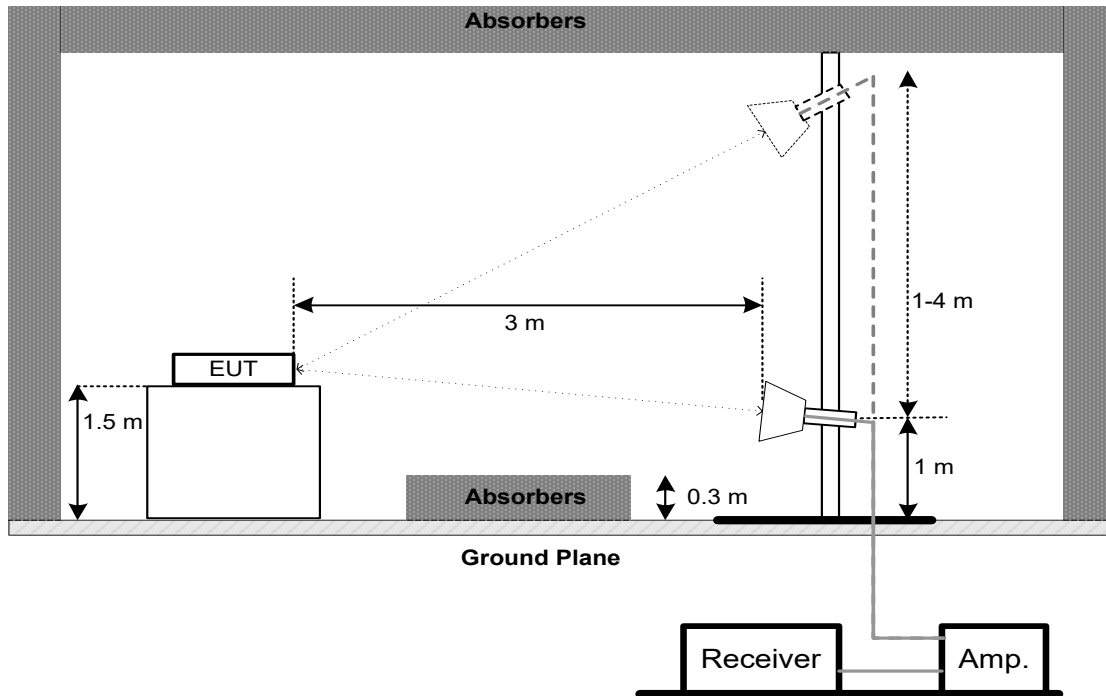

Harmonic(18 GHz to 26.5 GHz)

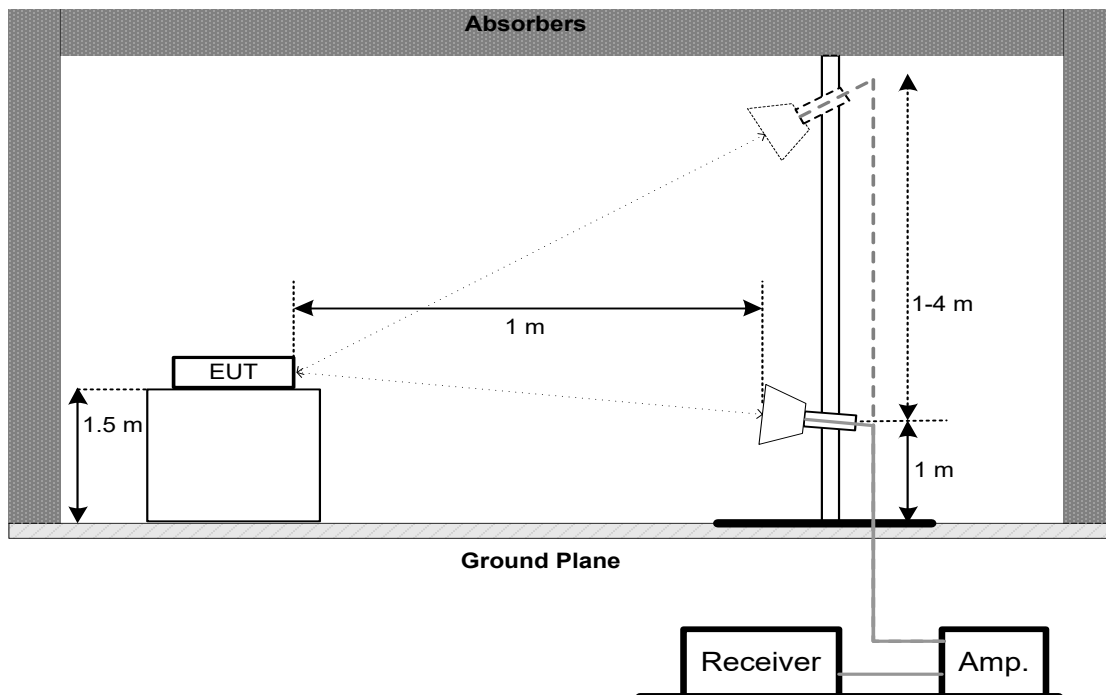

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

5.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span	$>$ Measurement Bandwidth
RBW	shall be in the range of 1% to 5% of the OBW but not less than 100 kHz
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSION

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For Reference Level:

Spectrum Parameters	Setting
Span	≥ 1.5 times the bandwidth.
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Band edge:


Spectrum Parameters	Setting
Start Frequency	2300 MHz
Stop Frequency	2690 MHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Harmonic:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP**8.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	1.5 times the DTS bandwidth
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions (Test Date: Feb. 27, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL_RE_System	BTL	BTL_RE_System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz (Test Date: Feb. 26, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01,2026~ Feb. 28, 2027
2	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 30 MHz to 1 GHz (Test Date: Feb. 25, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 07,2026
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 07, 2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 1 GHz - 18 GHz (Test Date: Mar. 06, 2026 ~ Mar. 16, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 17, 2026
3	Double-Ridged Waveguide Horn Antennas	ETS	3117-PA	00 224172	Sep. 12, 2026
4	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Feb. 01, 2027
5	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Feb. 01, 2027
6	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Feb. 01, 2027
7	966 Chamber room	CM	9*6*6	N/A	May 18, 2026
8	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
9	Filter	STI	STI15-9912	N/A	May 27, 2026
10	Positioning Controller	MF	MF-7802	N/A	N/A
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 18 GHz (Test Date: Mar. 16, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Jul. 25, 2026
2	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980911	Jun. 05, 2026
3	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	0 1046	Jul. 18, 2026
4	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-2M	N/A	Jan. 06, 2027
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MMRA-6M	N/A	Jan. 06, 2027
6	Positioning Controller	MF	MF-7802	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	May 18, 2026

Bandwidth & Maximum Output Power & Power Spectral Density & Conducted Spurious Emission (Test Date: Feb. 24, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 27, 2026
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



10.1. EUT TEST PHOTO

AC Power Line Conducted Emissions Test Photos





Radiated Emissions Test Photos

9 kHz to 30 MHz

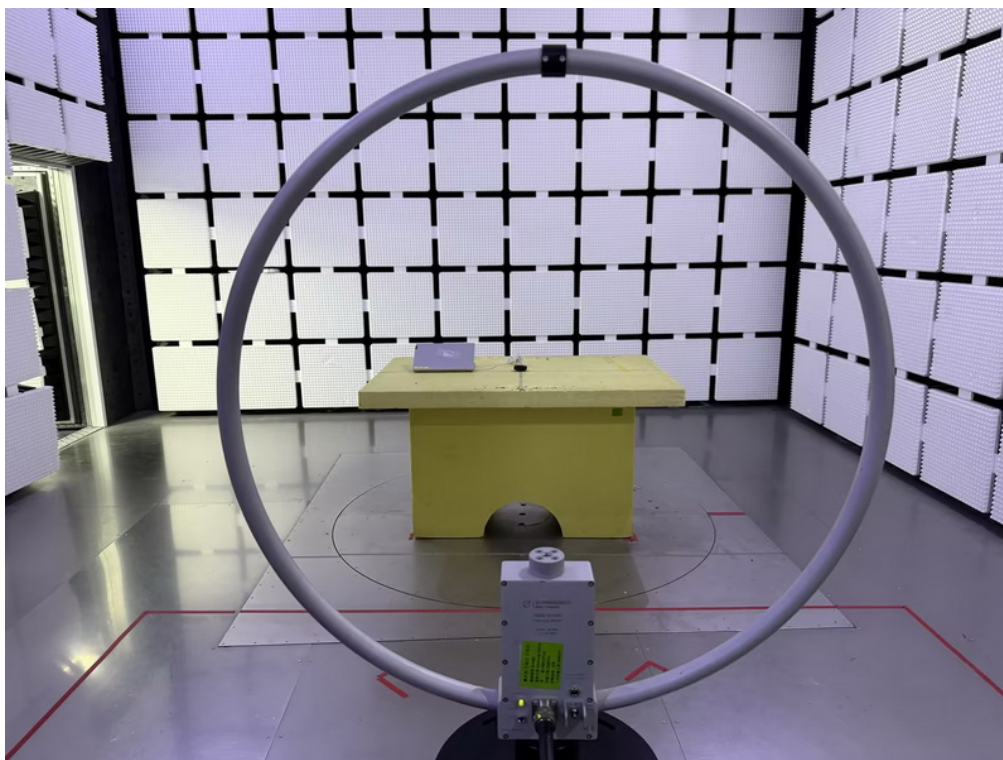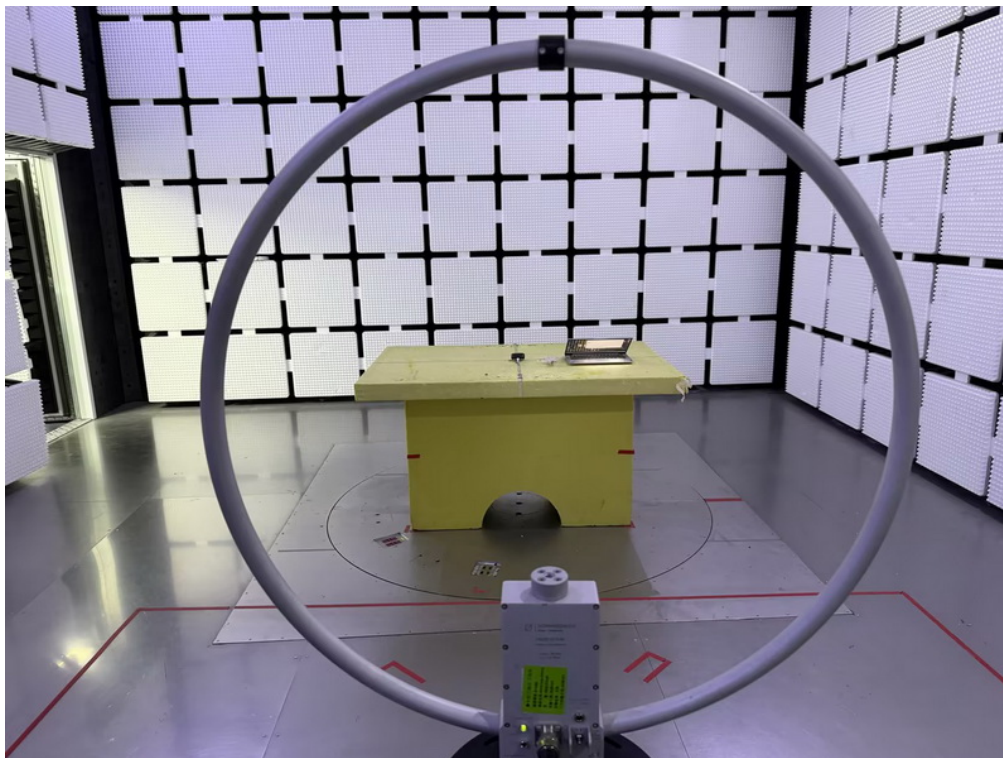



Radiated Emissions Test Photos



30 MHz to 1000 MHz

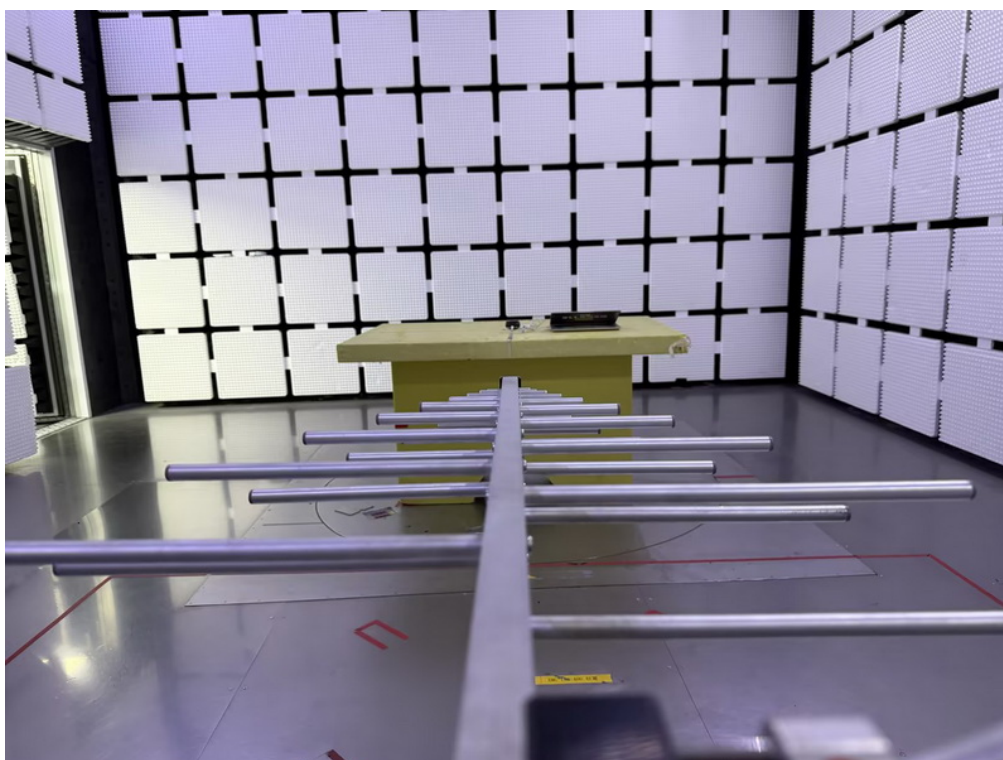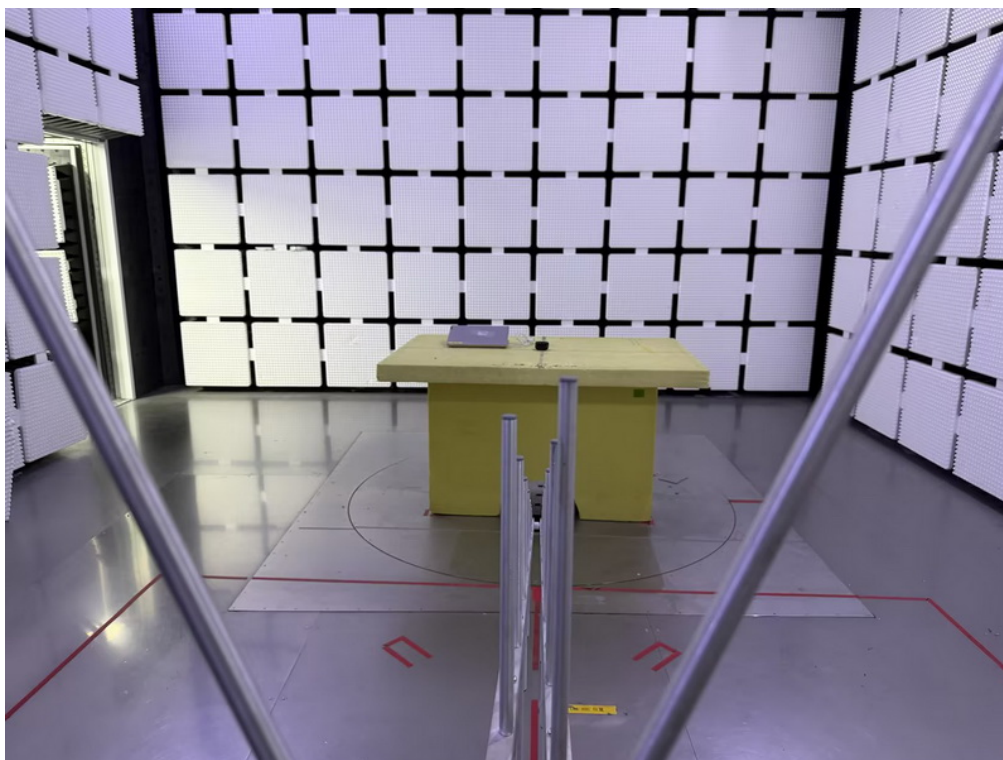

Radiated Emissions Test Photos



Band edge & Harmonic(1 GHz to 18 GHz)

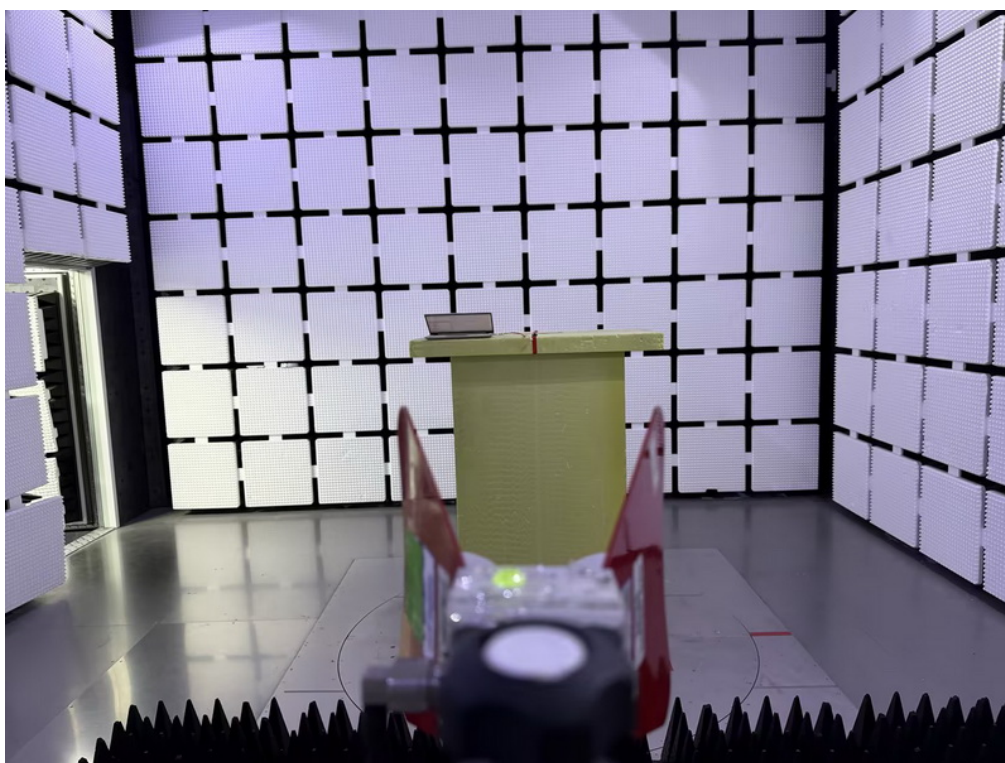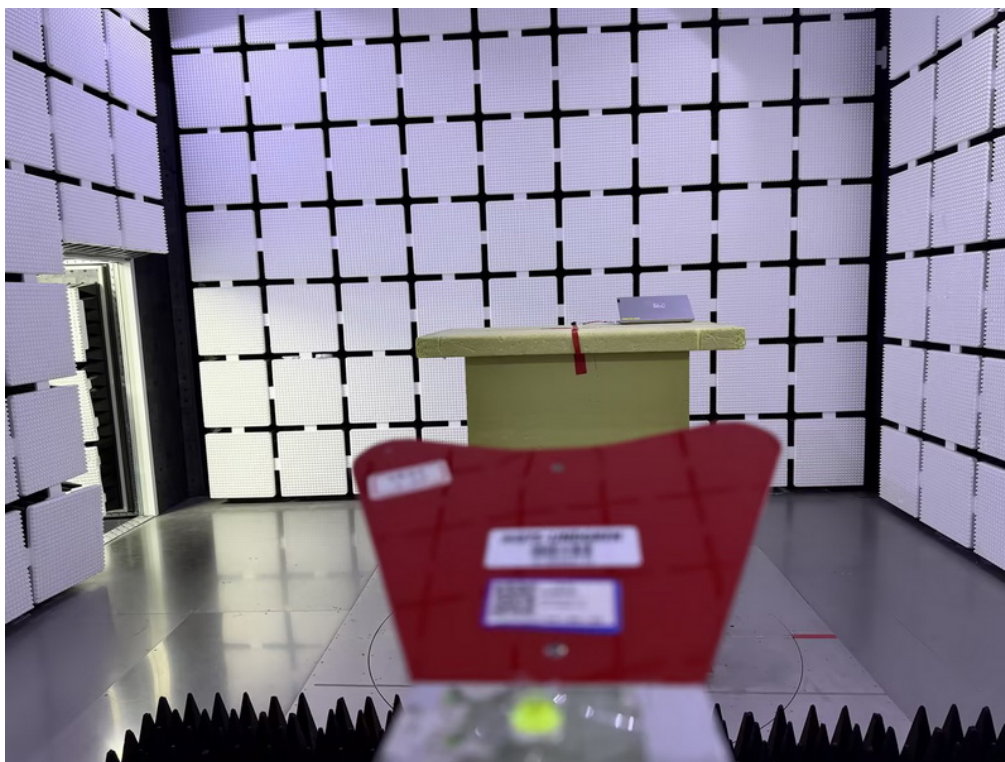

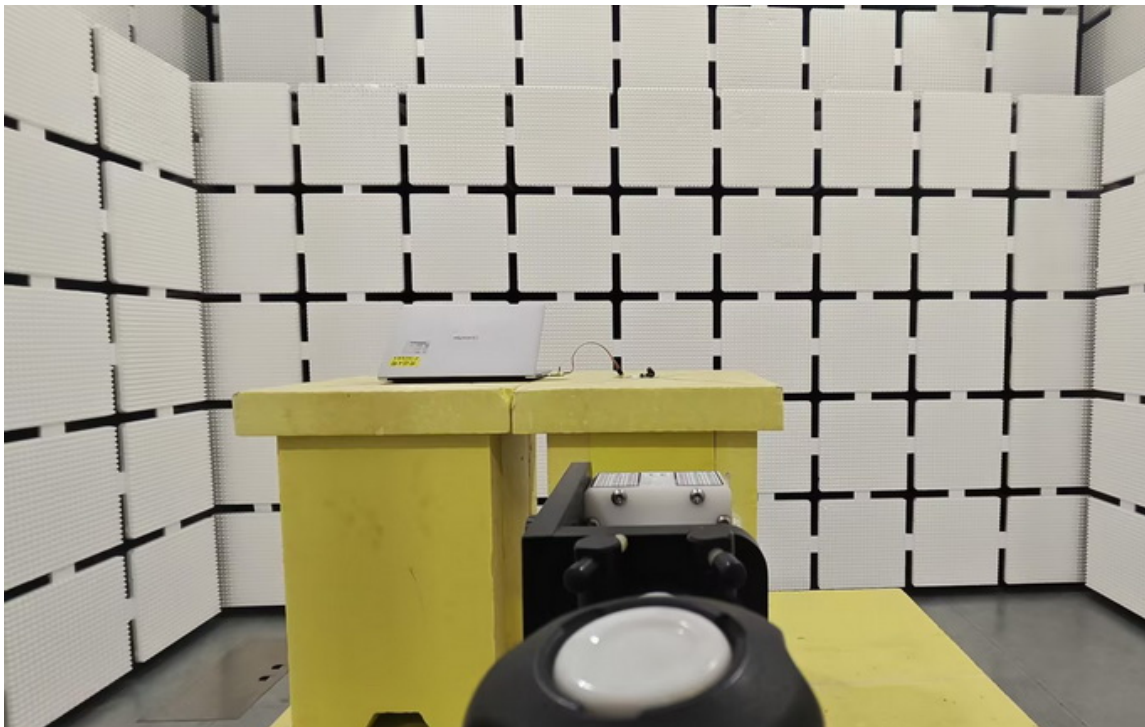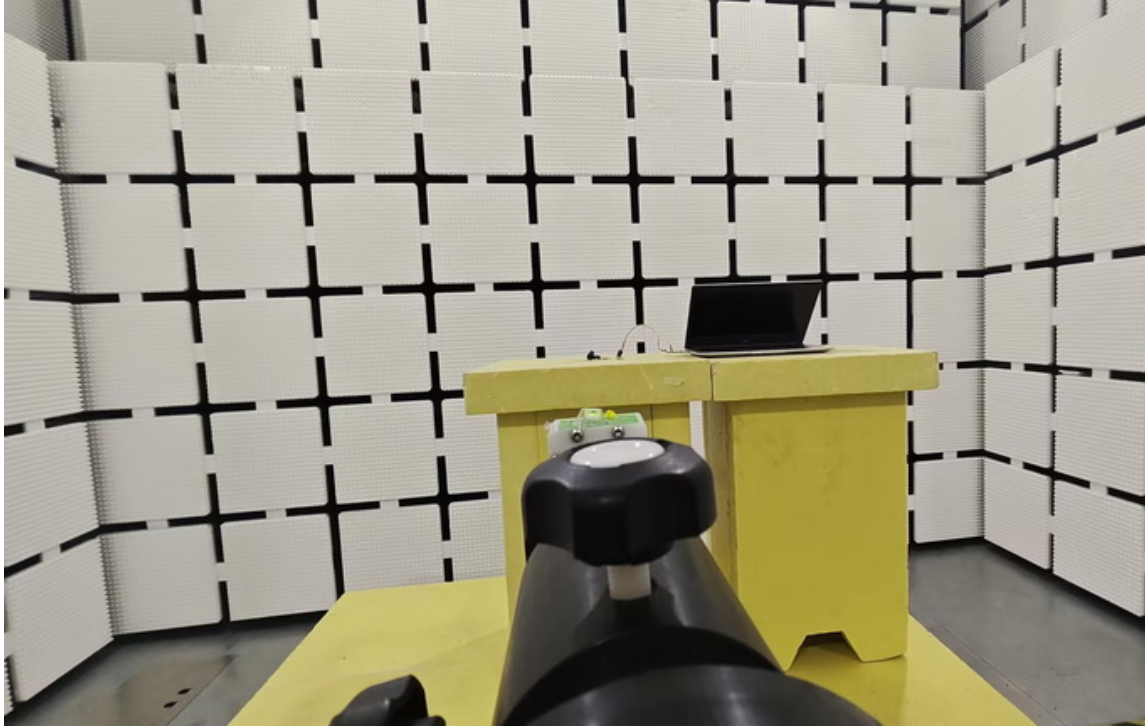Radiated Emissions Test Photos**Harmonic(18 GHz to 26.5 GHz)**


Right Earphone**Left Earphone**

Conducted Test Photos

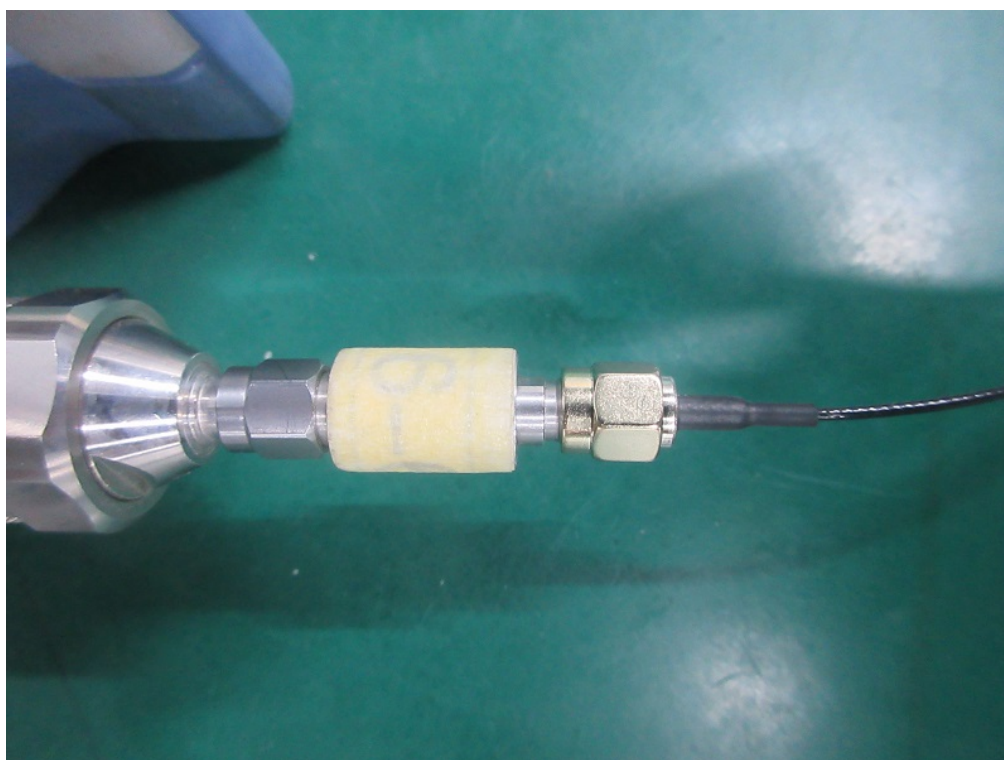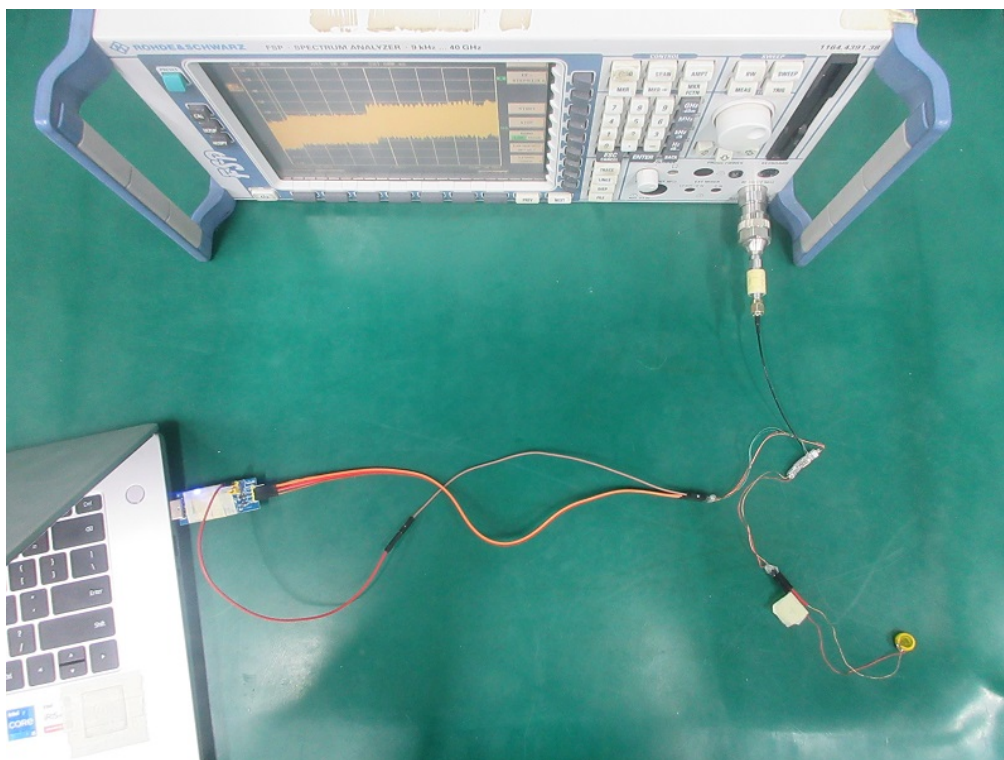

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode Channel 39 _2Mbps	Phase	Line
-----------	---------------------------	-------	------

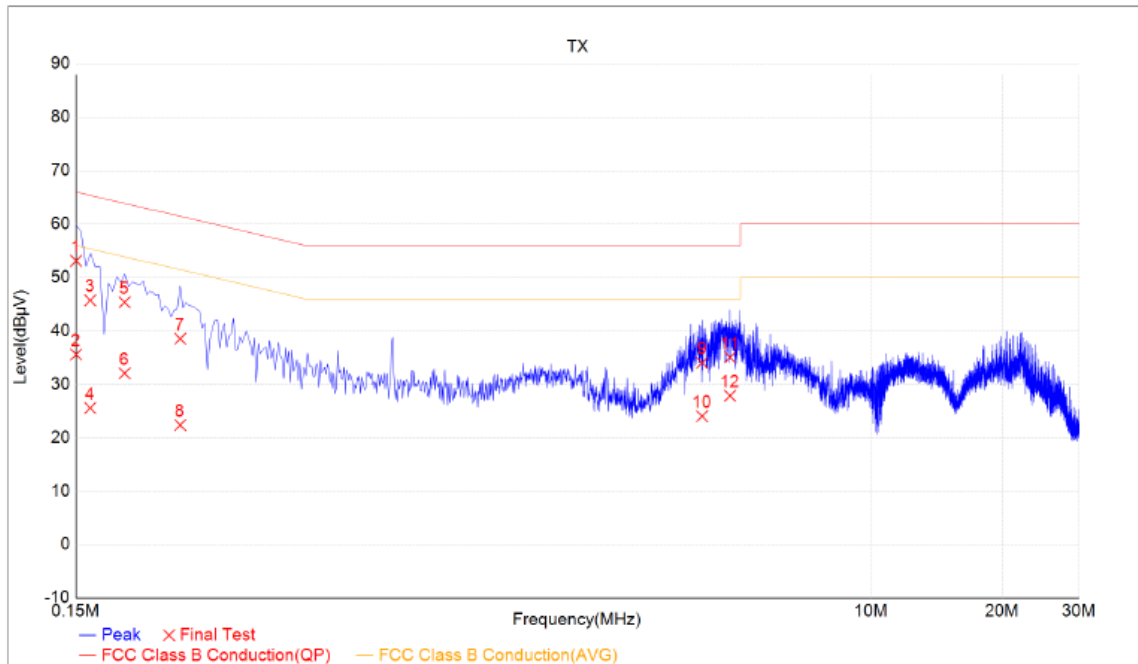


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
*	1	0.15	42.75	10.36	53.12	66	-12.88	QP	
	2	0.15	25.23	10.36	35.6	56	-20.4	AVG	
	3	0.1616	35.36	10.37	45.73	65.36	-19.63	QP	
	4	0.1616	15.19	10.37	25.57	55.36	-29.79	AVG	
	5	0.1938	34.98	10.4	45.38	63.86	-18.49	QP	
	6	0.1938	21.68	10.4	32.08	53.86	-21.78	AVG	
	7	0.2581	28.12	10.43	38.55	61.5	-22.95	QP	
	8	0.2581	11.97	10.43	22.39	51.5	-29.1	AVG	
	9	4.0821	23.15	10.88	34.03	56	-21.97	QP	
	10	4.0821	13.14	10.88	24.03	46	-21.97	AVG	
	11	4.7302	23.98	11.07	35.05	56	-20.95	QP	
	12	4.7302	16.79	11.07	27.86	46	-18.14	AVG	

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

Test Mode	TX Mode Channel 39 _2Mbps	Phase	Neutral
-----------	---------------------------	-------	---------

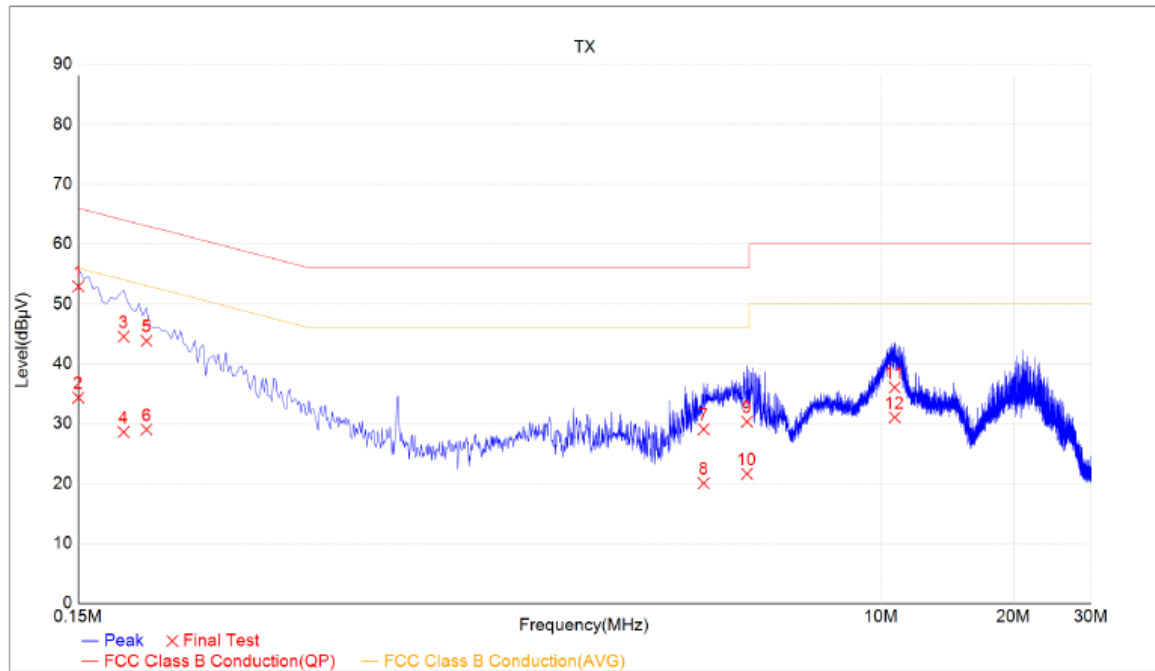

Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
*	1	0.15	42.52	10.42	52.94	66	-13.06	QP	
	2	0.15	23.93	10.42	34.35	56	-21.65	AVG	
	3	0.19	34.13	10.44	44.56	64.04	-19.48	QP	
	4	0.19	18.19	10.44	28.63	54.04	-25.41	AVG	
	5	0.2143	33.4	10.44	43.84	63.05	-19.21	QP	
	6	0.2143	18.61	10.44	29.05	53.05	-23.99	AVG	
	7	3.9377	18.19	10.9	29.09	56	-26.91	QP	
	8	3.9377	9.17	10.9	20.07	46	-25.93	AVG	
	9	4.9424	19.15	11.2	30.35	56	-25.65	QP	
	10	4.9424	10.44	11.2	21.64	46	-24.36	AVG	
	11	10.7141	24.01	12.07	36.08	60	-23.92	QP	
	12	10.7141	19	12.07	31.07	50	-18.93	AVG	


REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode Channel 39_2Mbps	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

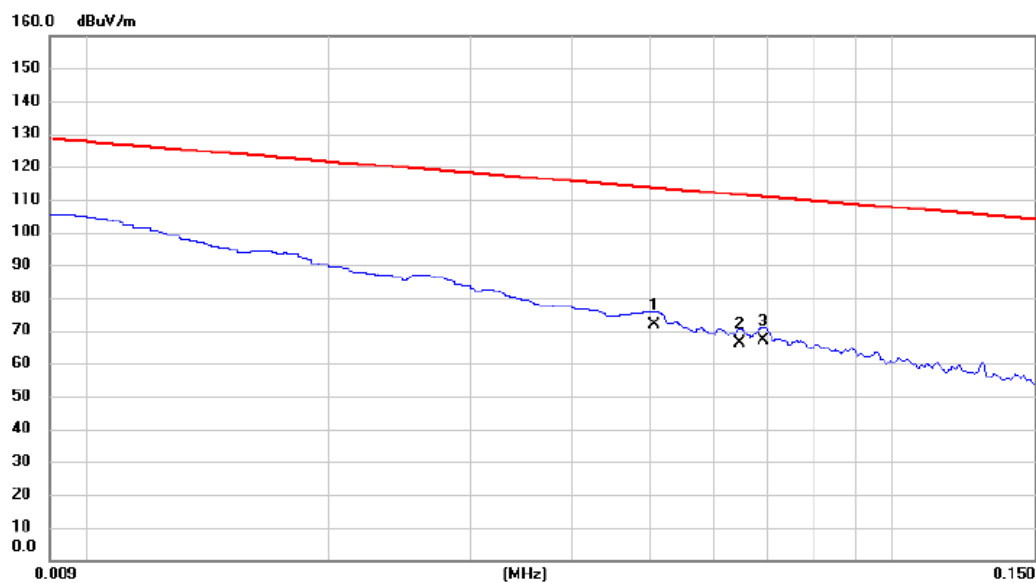


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.051	51.71	20.14	71.85	113.50	-41.65	AVG	
2		0.065	46.25	20.14	66.39	111.40	-45.01	AVG	
3		0.069	46.89	20.14	67.03	110.80	-43.77	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode Channel 39_2Mbps	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

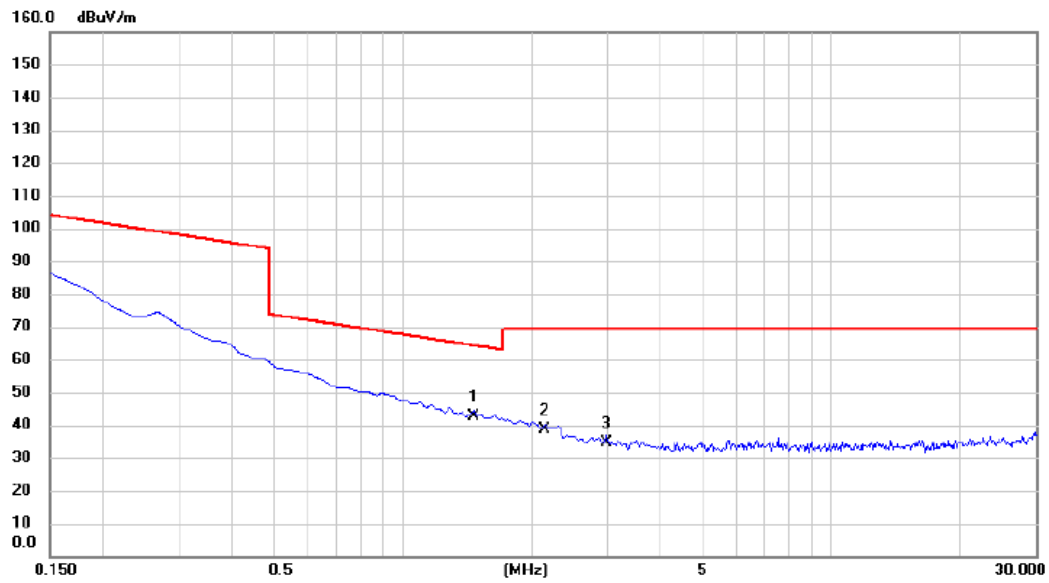


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	1.463	22.71	20.00	42.71	64.30	-21.59	QP	
2		2.150	18.39	20.02	38.41	69.54	-31.13	QP	
3		2.986	14.52	20.07	34.59	69.54	-34.95	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode Channel 39_2Mbps	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

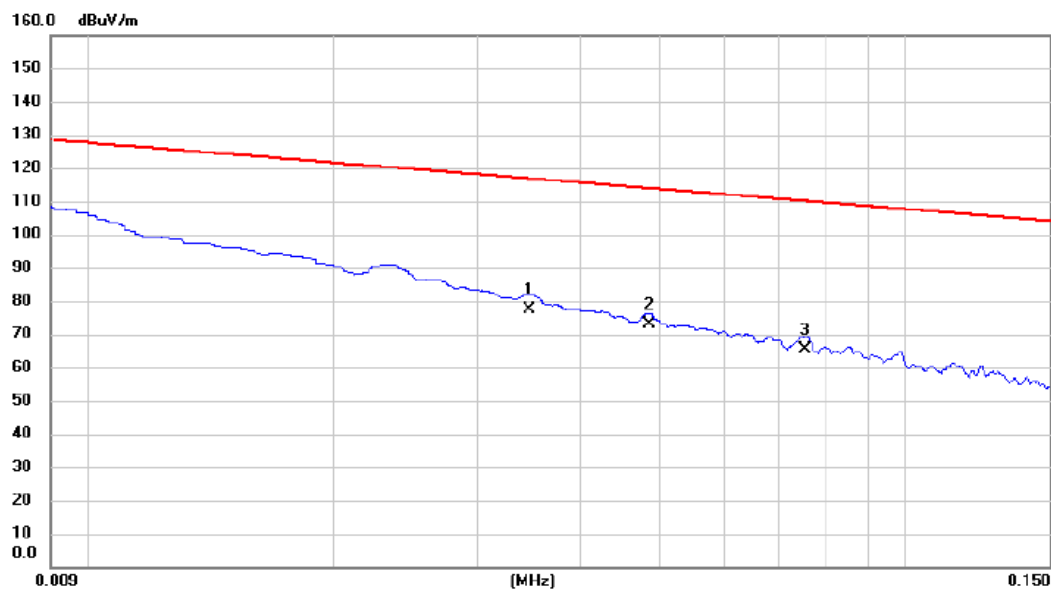


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.035	57.14	20.14	77.28	116.80	-39.52	AVG	
2		0.049	52.91	20.14	73.05	113.89	-40.84	AVG	
3		0.075	45.35	20.14	65.49	110.06	-44.57	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode Channel 39_2Mbps	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

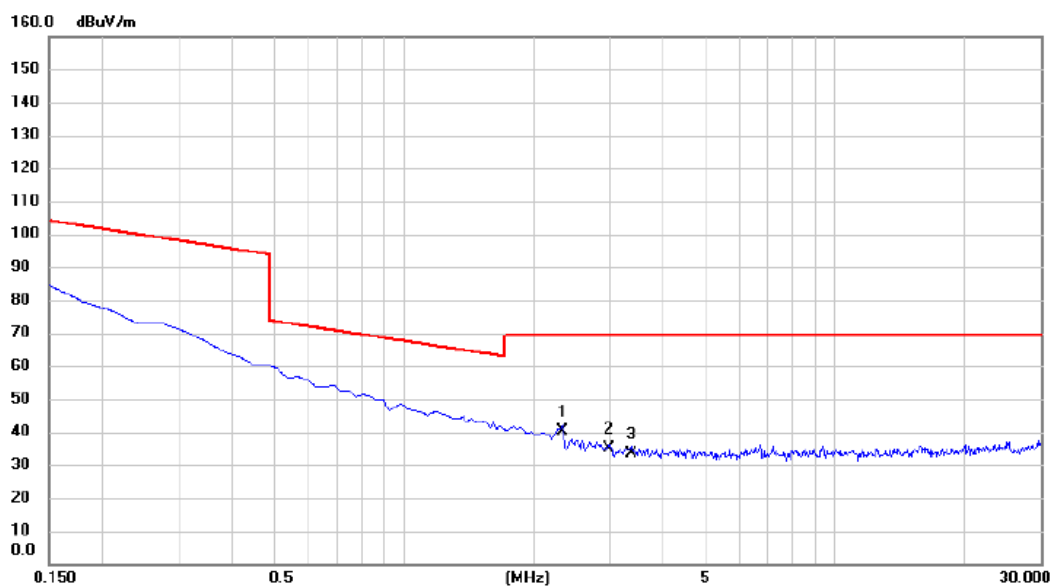

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2.329	20.14	20.03	40.17	69.54	-29.37	QP	
2	2.994	14.95	20.07	35.02	69.54	-34.52	QP	
3	3.374	13.37	20.09	33.46	69.54	-36.08	QP	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode Channel 39_2Mbps	Polarization	Vertical
-----------	--------------------------	--------------	----------

80 dBuV/m

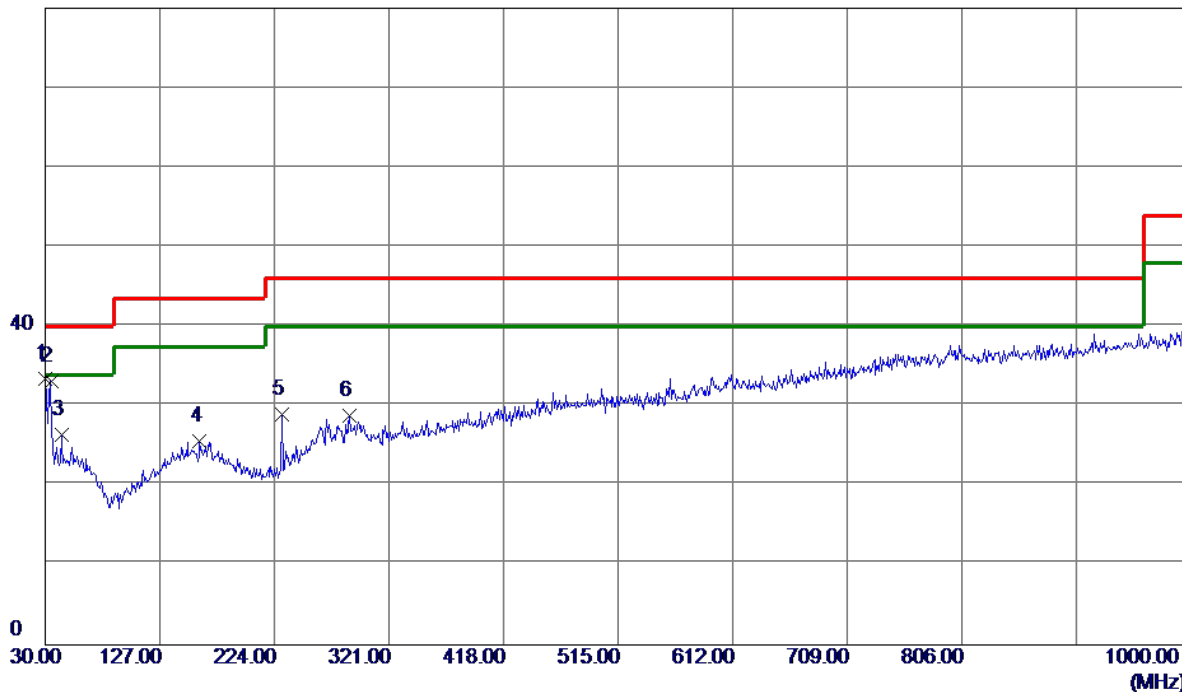

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	30.0000	44.81	-11.44	33.37	40.00	-6.63	Peak	
2	34.8500	45.44	-12.34	33.10	40.00	-6.90	Peak	
3	43.5800	37.80	-11.41	26.39	40.00	-13.61	Peak	
4	160.9500	36.26	-10.70	25.56	43.52	-17.96	Peak	
5	230.7900	41.75	-12.83	28.92	46.02	-17.10	Peak	
6	288.0200	38.86	-10.05	28.81	46.02	-17.21	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode Channel 39_2Mbps	Polarization	Horizontal
-----------	--------------------------	--------------	------------

80 dBuV/m

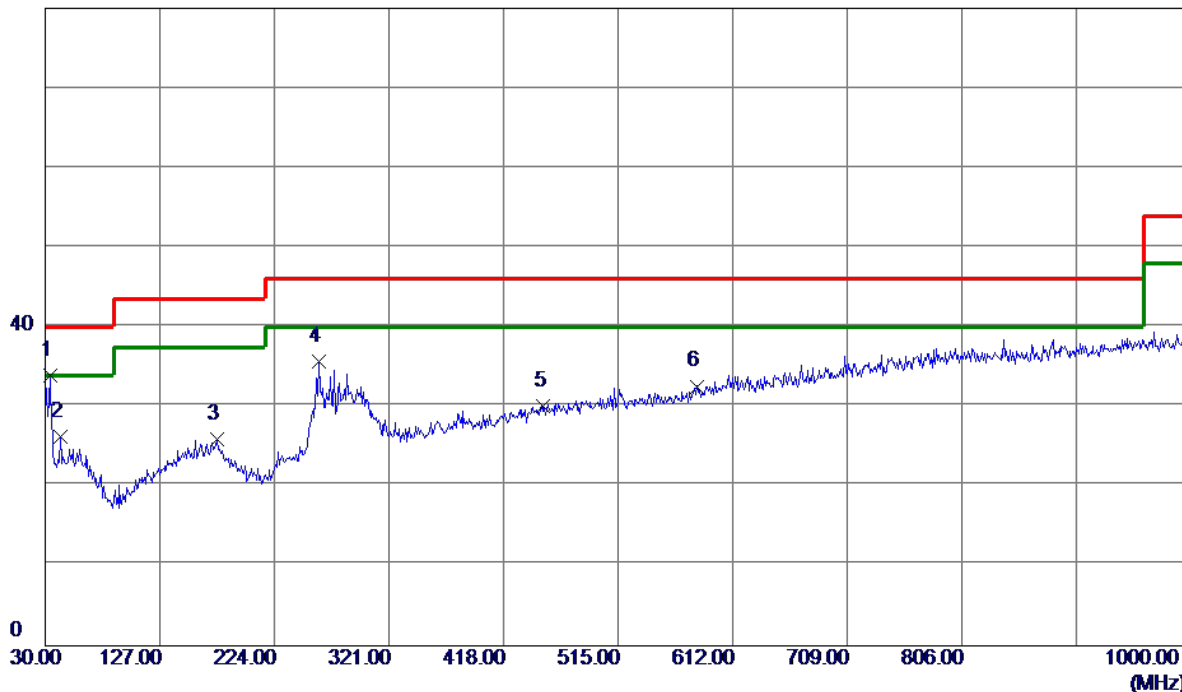

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	33.8800	46.41	-12.43	33.98	40.00	-6.02	Peak	
2	42.6100	37.80	-11.50	26.30	40.00	-13.70	Peak	
3	175.5000	37.36	-11.38	25.98	43.52	-17.54	Peak	
4	261.8299	46.68	-11.05	35.63	46.02	-10.39	Peak	
5	451.9500	36.05	-6.03	30.02	46.02	-16.00	Peak	
6	581.9300	36.24	-3.68	32.56	46.02	-13.46	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Left Earphone

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

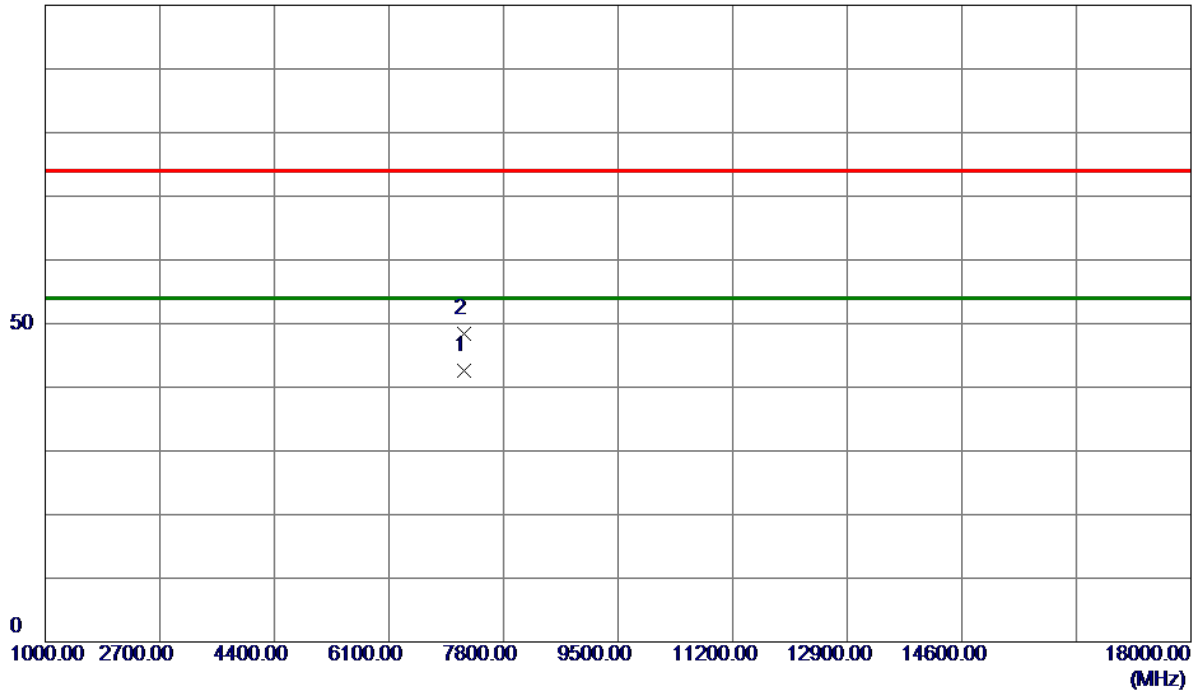

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7206.0000	32.77	9.81	42.58	54.00	-11.42	AVG	
2	7206.1000	38.56	9.81	48.37	74.00	-25.63	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

130 dBuV/m

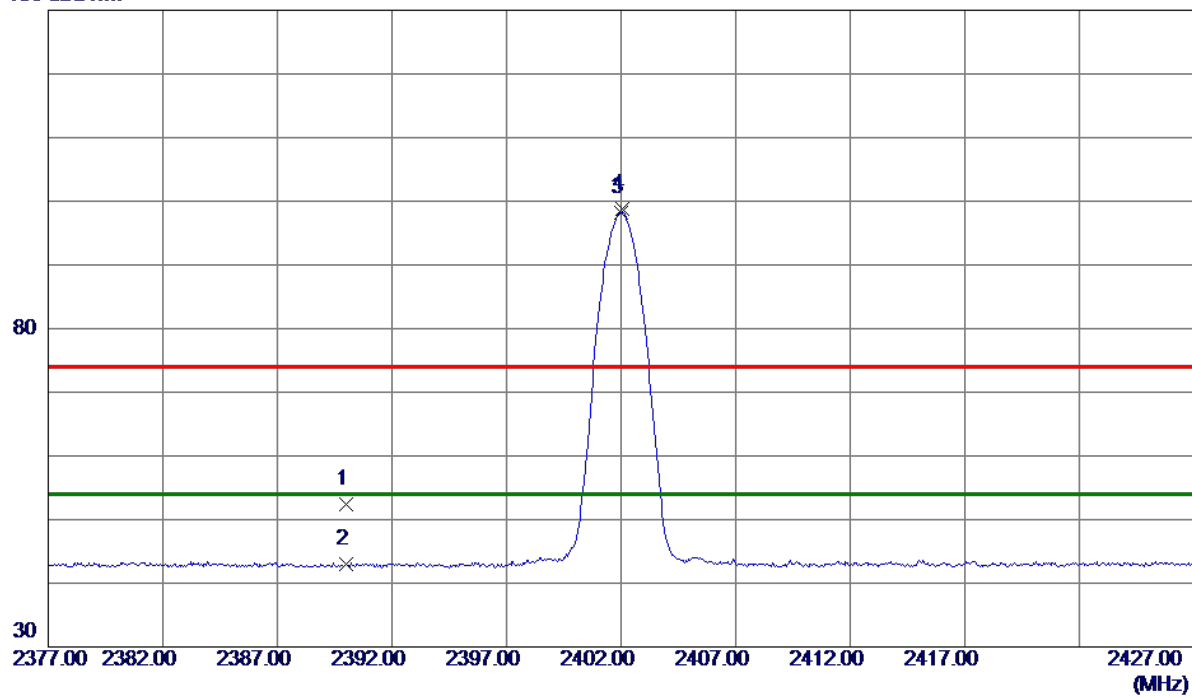

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	39.40	12.98	52.38	74.00	-21.62	Peak	
2	2390.0000	30.07	12.98	43.05	54.00	-10.95	AVG	
3 *	2402.0000	85.15	13.04	98.19	54.00	44.19	AVG	No Limit
4	2402.0500	85.85	13.04	98.89	74.00	24.89	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

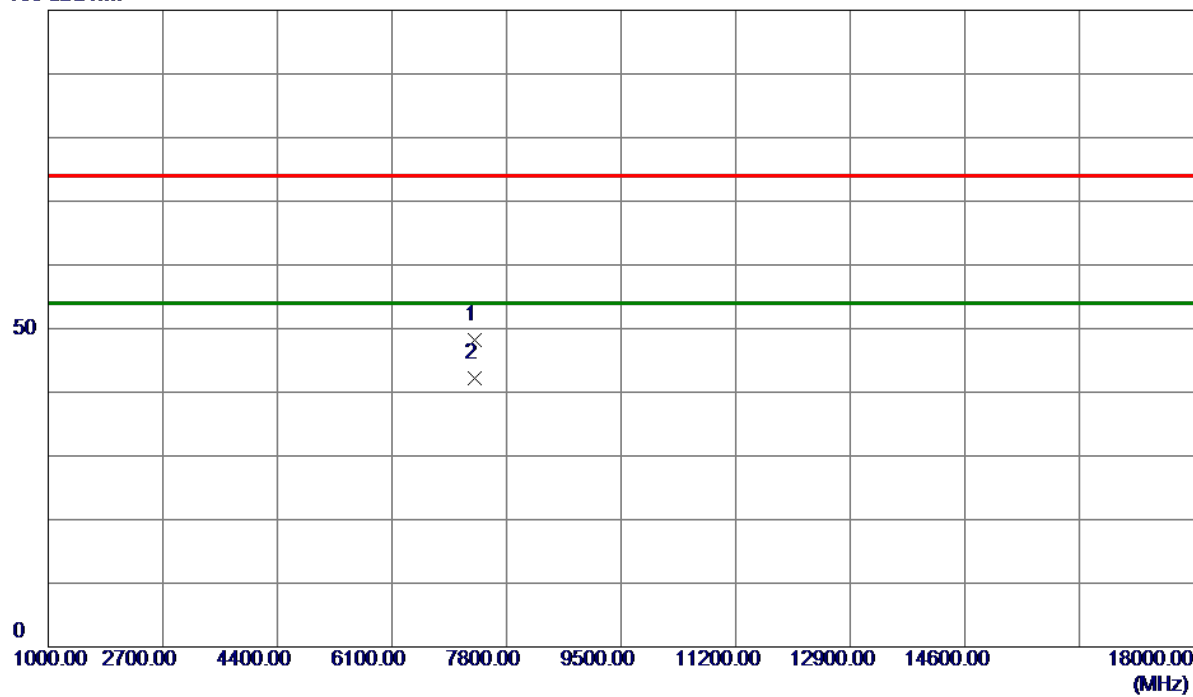


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7319.7200	38.36	9.75	48.11	74.00	-25.89	Peak	
2 *	7319.9800	32.38	9.75	42.13	54.00	-11.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

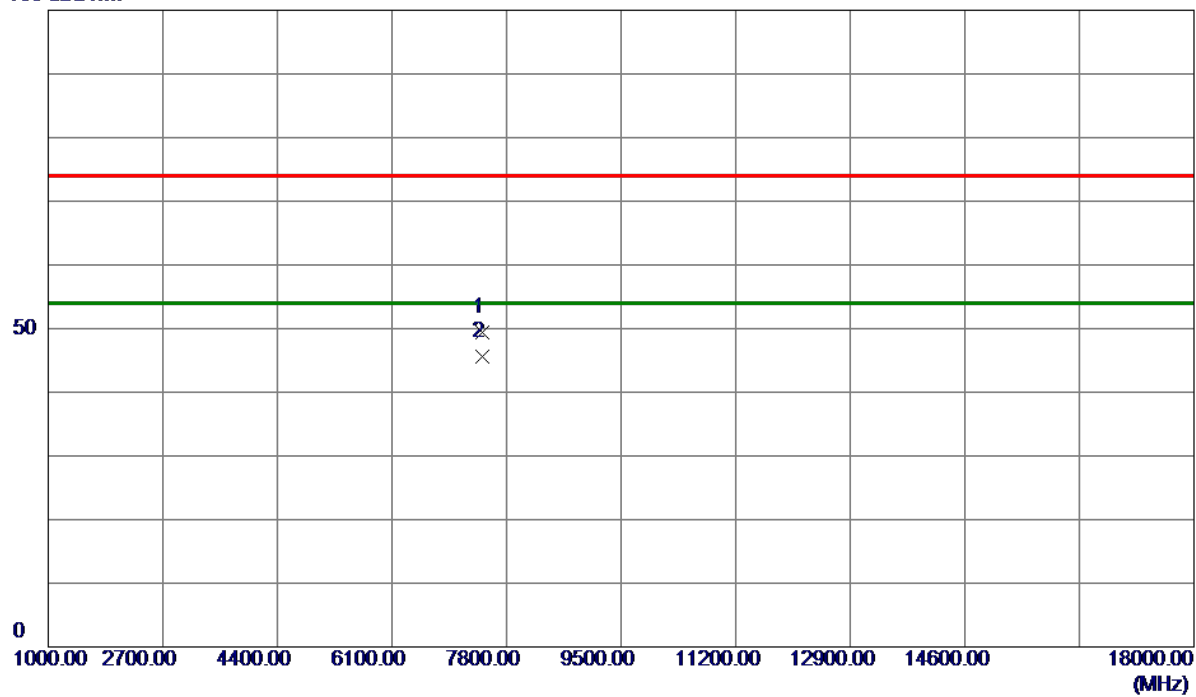


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.6000	39.72	9.69	49.41	74.00	-24.59	Peak	
2 *	7439.9800	35.85	9.69	45.54	54.00	-8.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

130 dBuV/m

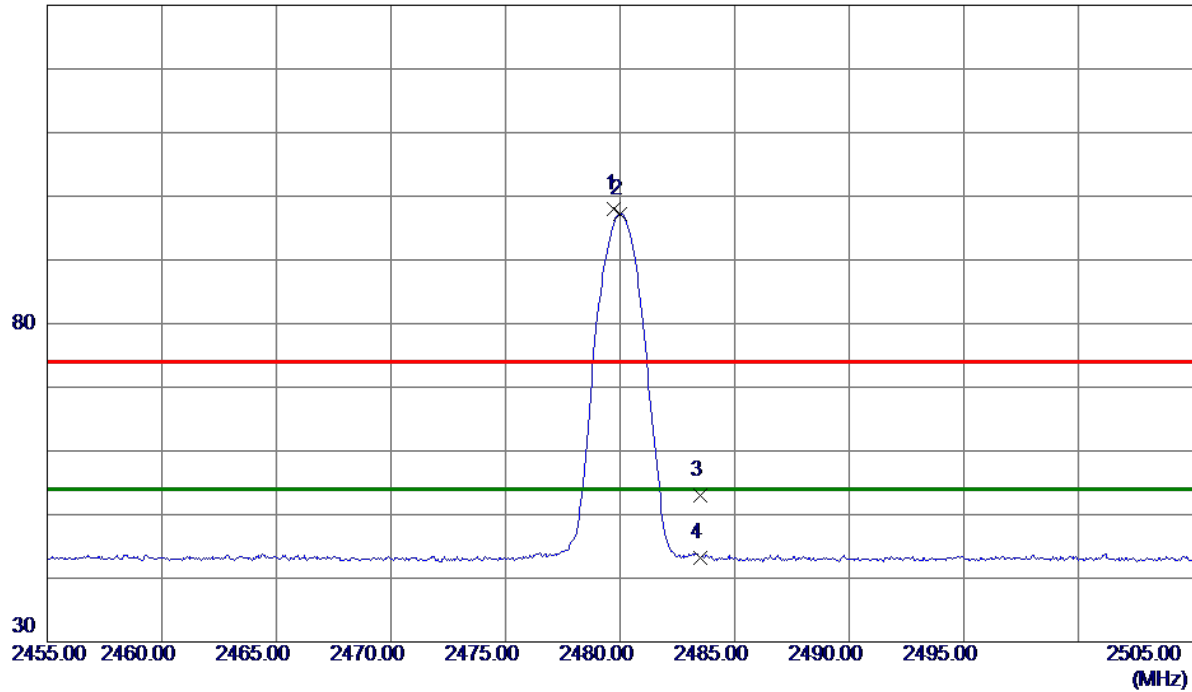

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.7500	84.49	13.44	97.93	74.00	23.93	Peak	No Limit
2 *	2480.0000	83.82	13.44	97.26	54.00	43.26	AVG	No Limit
3	2483.5000	39.54	13.46	53.00	74.00	-21.00	Peak	
4	2483.5000	29.82	13.46	43.28	54.00	-10.72	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

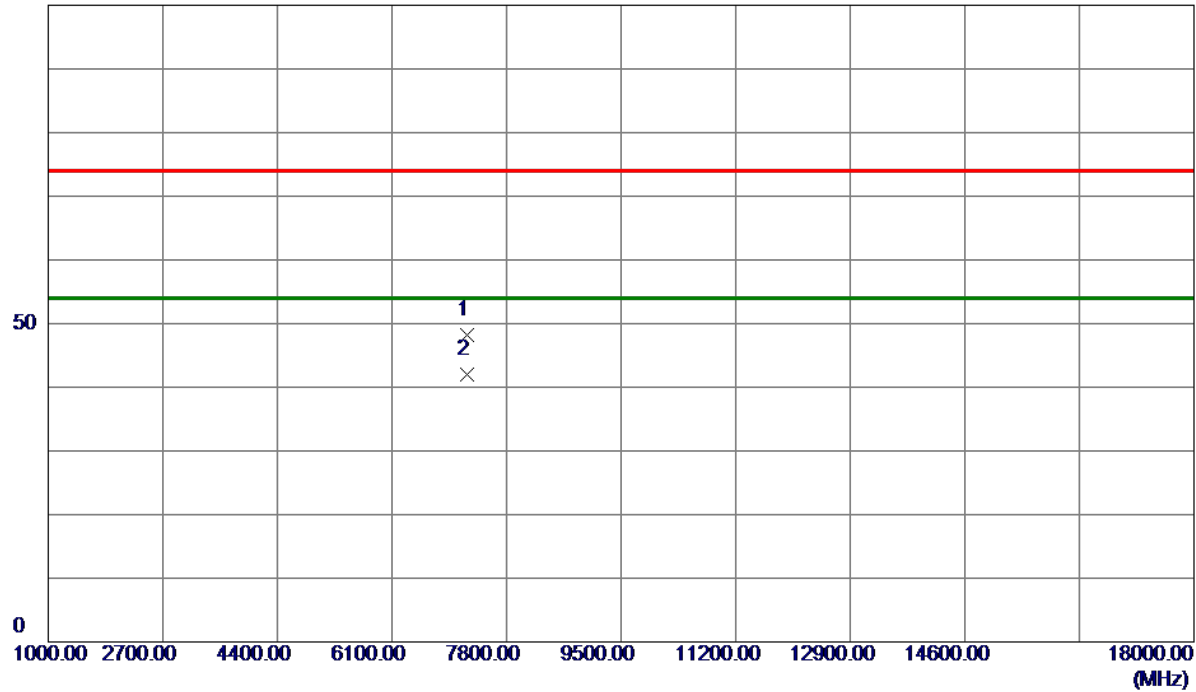


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7205.4200	38.47	9.81	48.28	74.00	-25.72	Peak	
2 *	7206.2200	32.17	9.81	41.98	54.00	-12.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_2Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

130 dBuV/m

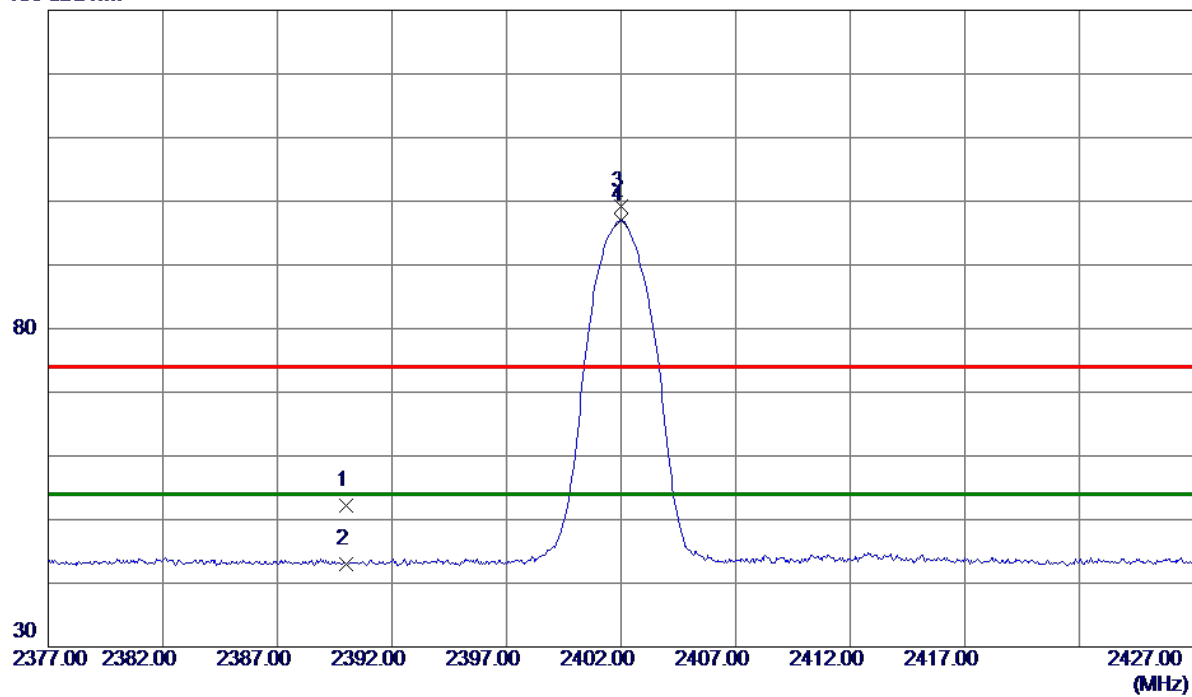

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	39.14	12.98	52.12	74.00	-21.88	Peak	
2	2390.0000	29.94	12.98	42.92	54.00	-11.08	AVG	
3	2402.0000	86.12	13.04	99.16	74.00	25.16	Peak	No Limit
4 *	2402.0000	83.94	13.04	96.98	54.00	42.98	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

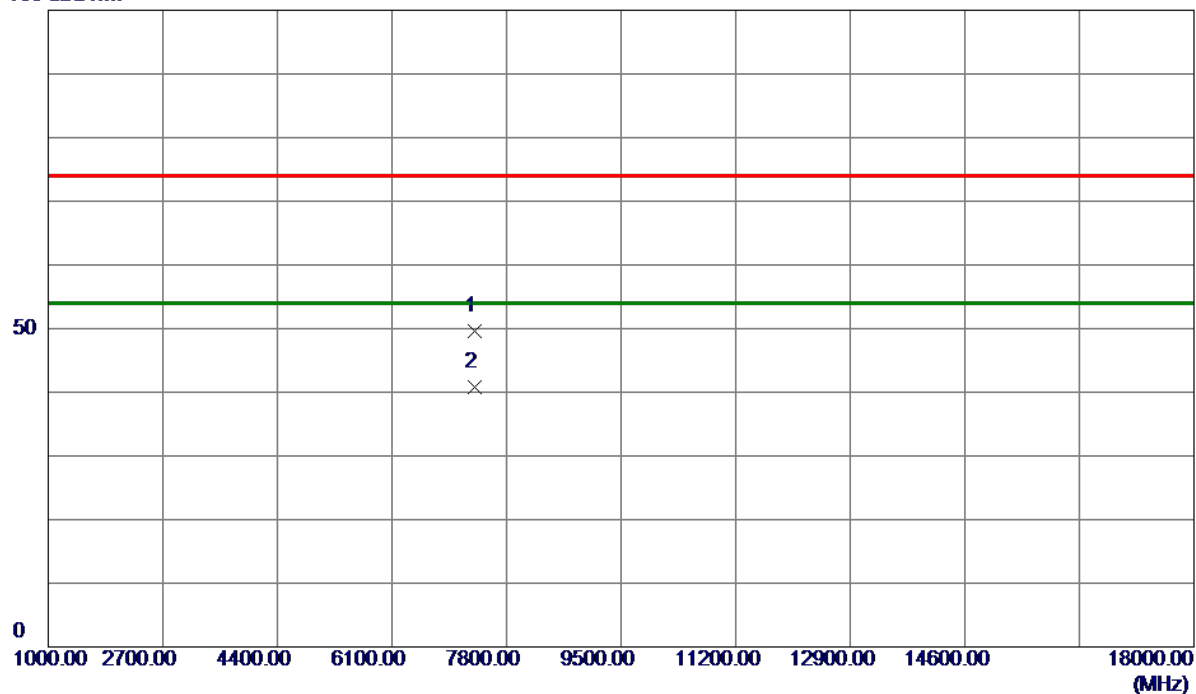


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7320.0200	39.83	9.75	49.58	74.00	-24.42	Peak	
2 *	7320.3200	31.08	9.75	40.83	54.00	-13.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

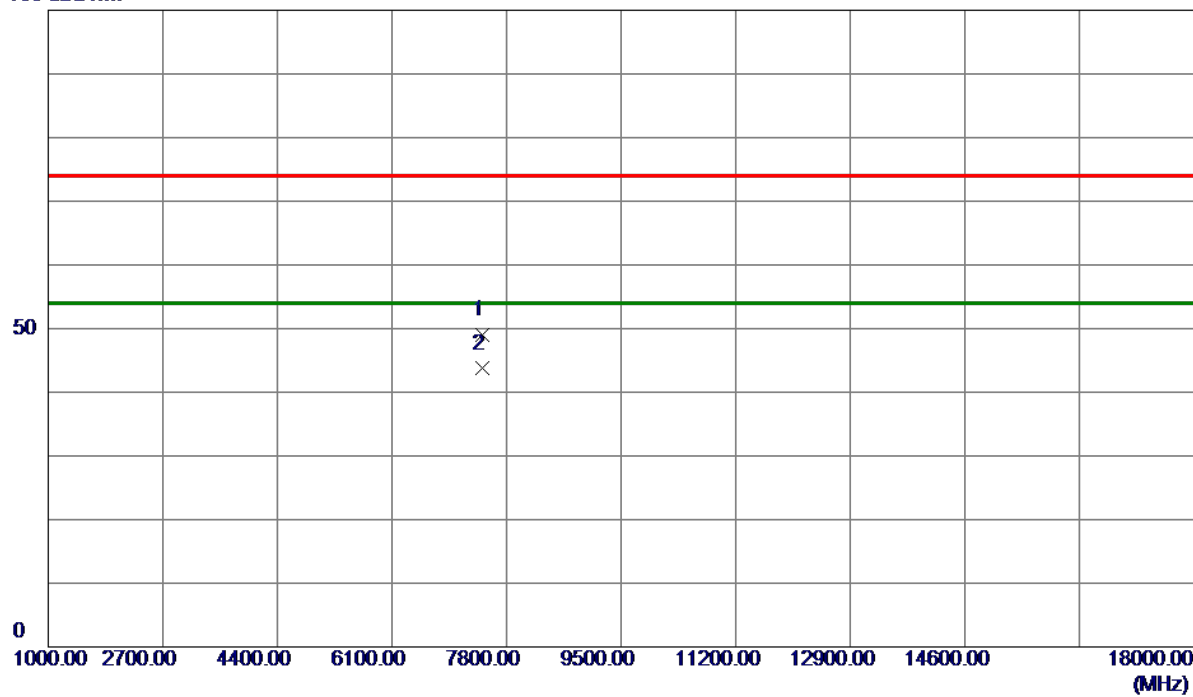


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7440.2200	39.29	9.69	48.98	74.00	-25.02	Peak	
2 *	7440.2600	34.01	9.69	43.70	54.00	-10.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

130 dBuV/m

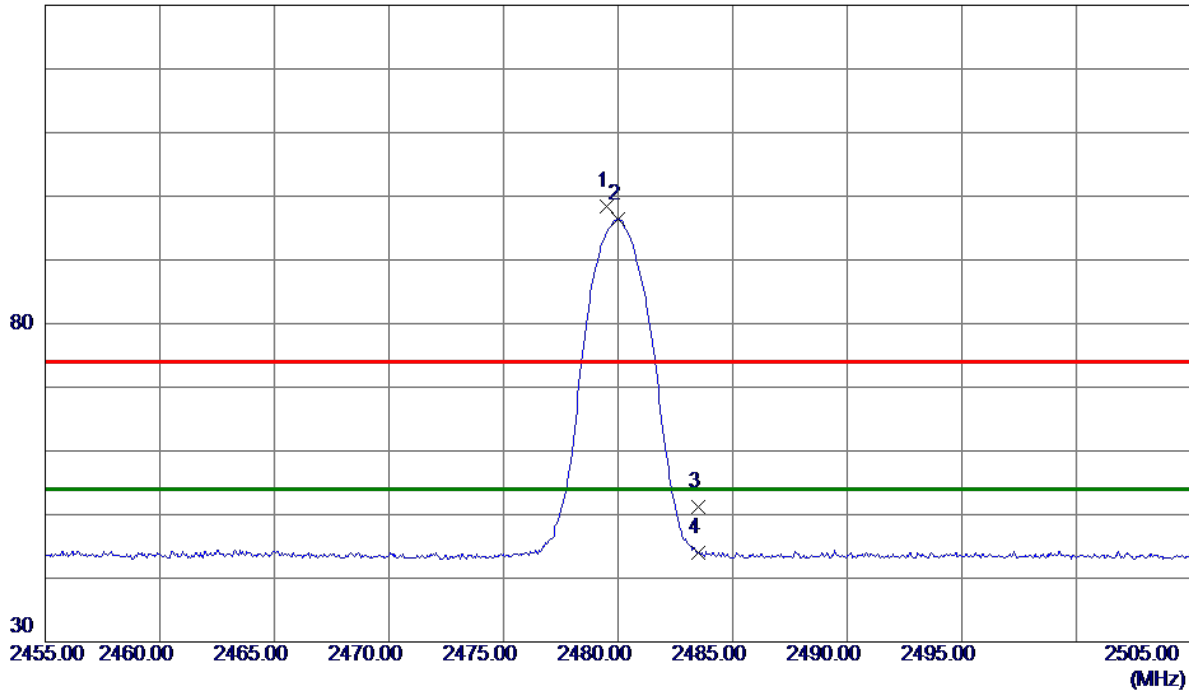

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.5000	85.03	13.44	98.47	74.00	24.47	Peak	No Limit
2 *	2480.0000	82.95	13.44	96.39	54.00	42.39	AVG	No Limit
3	2483.5000	37.77	13.46	51.23	74.00	-22.77	Peak	
4	2483.5000	30.50	13.46	43.96	54.00	-10.04	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_500kbps(S=2)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

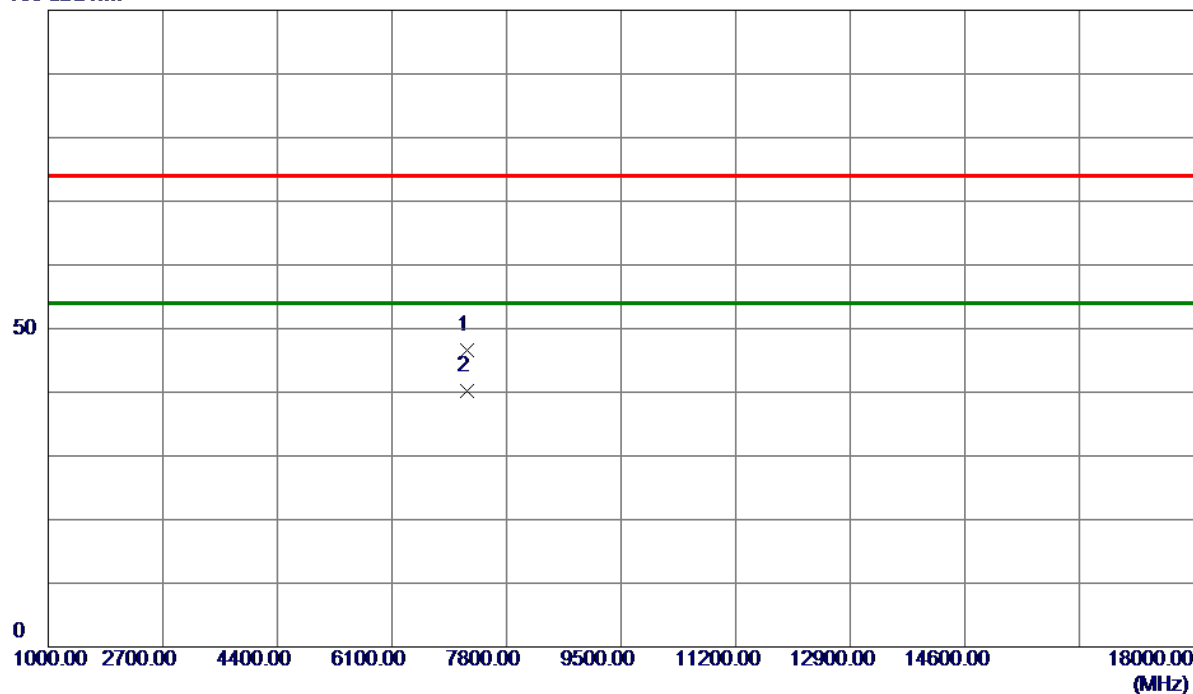


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7205.0400	36.71	9.81	46.52	74.00	-27.48	Peak	
2 *	7209.9800	30.42	9.81	40.23	54.00	-13.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_500kbps(S=2)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

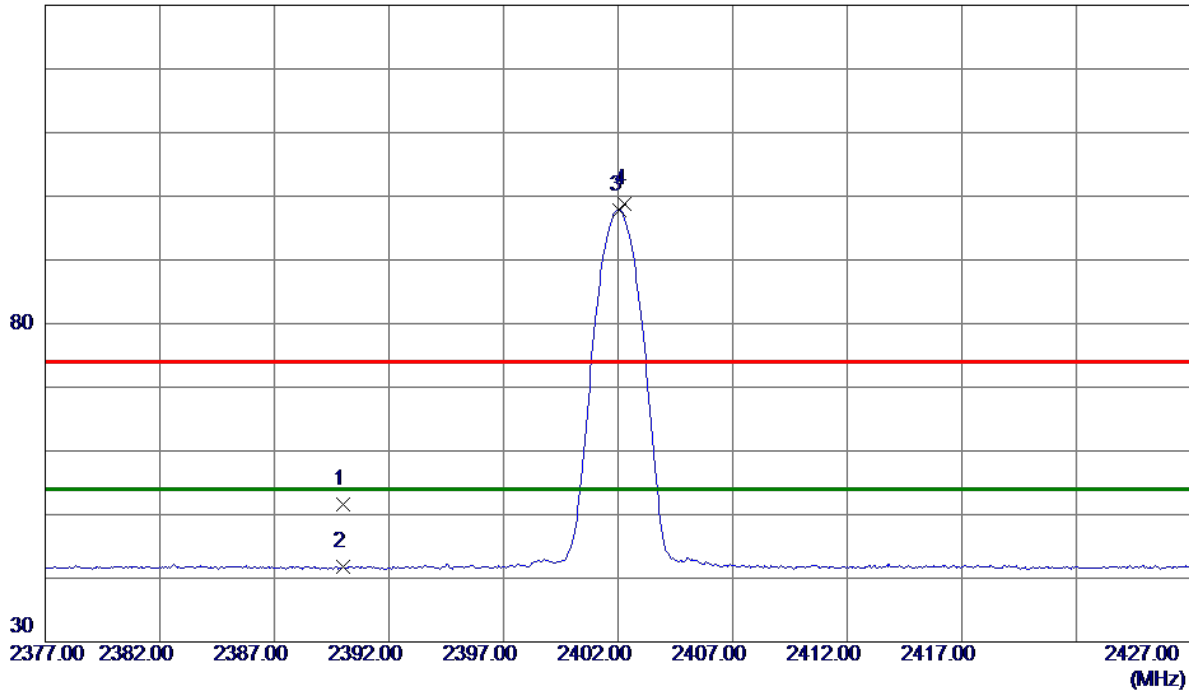

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	38.67	12.98	51.65	74.00	-22.35	Peak	
2	2390.0000	28.80	12.98	41.78	54.00	-12.22	AVG	
3 *	2402.0500	84.85	13.04	97.89	54.00	43.89	AVG	No Limit
4	2402.3000	85.67	13.05	98.72	74.00	24.72	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_500kbps(S=2)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

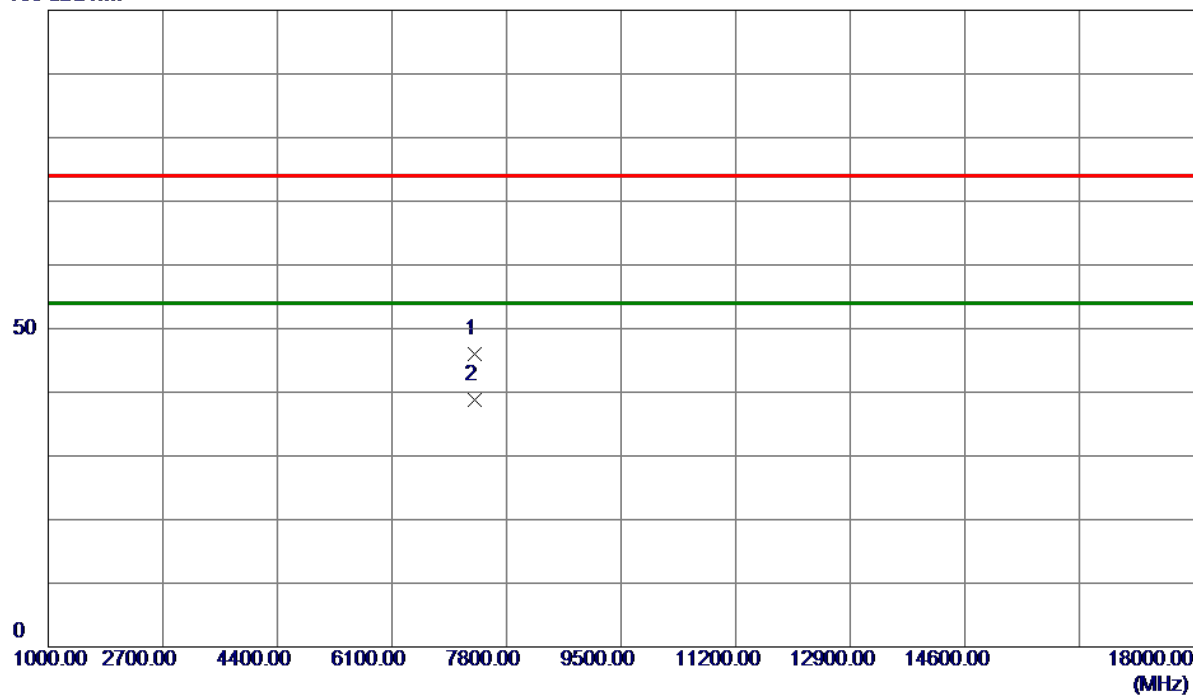

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7319.5200	36.29	9.75	46.04	74.00	-27.96	Peak	
2 *	7320.0800	28.98	9.75	38.73	54.00	-15.27	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_500kbps(S=2)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

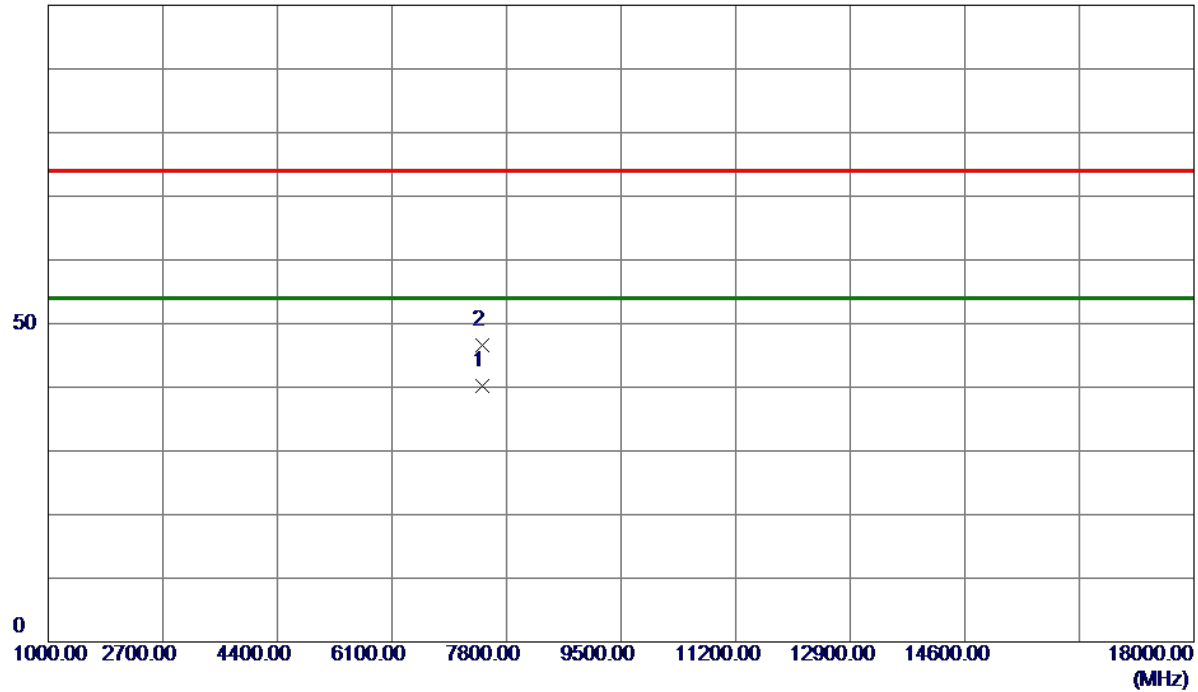

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7439.9600	30.55	9.69	40.24	54.00	-13.76	AVG	
2	7440.0200	36.85	9.69	46.54	74.00	-27.46	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_500kbps(S=2)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

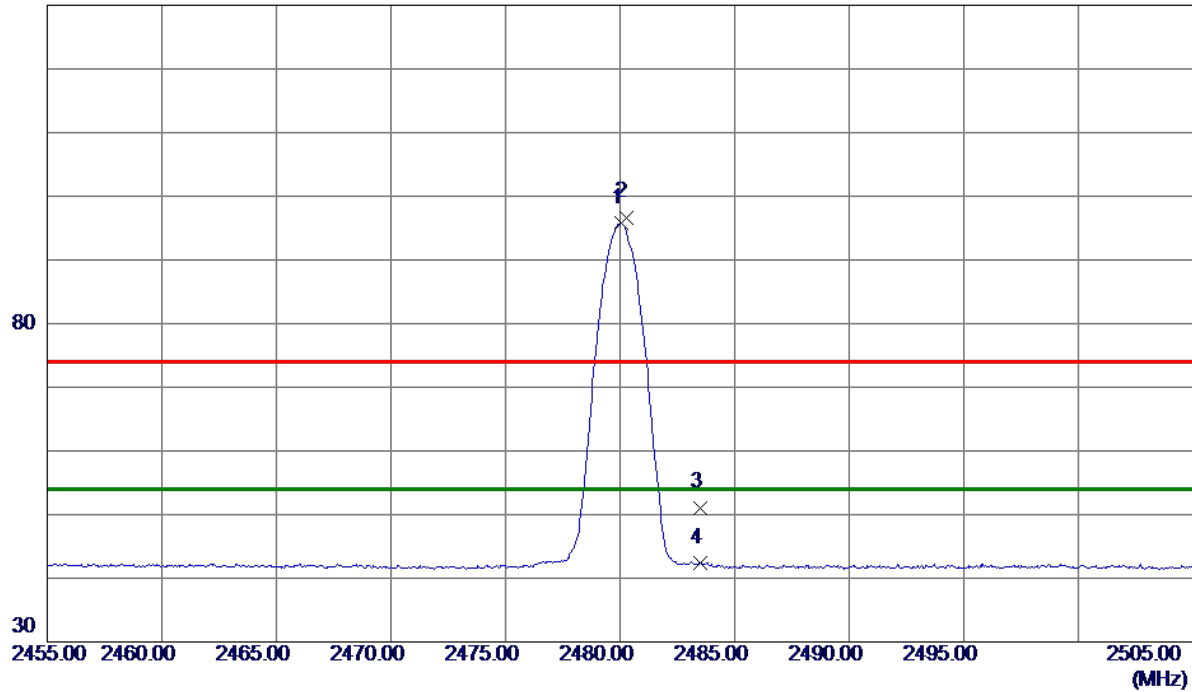

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.0500	82.38	13.44	95.82	54.00	41.82	AVG	No Limit
2	2480.2500	83.26	13.44	96.70	74.00	22.70	Peak	No Limit
3	2483.5000	37.64	13.46	51.10	74.00	-22.90	Peak	
4	2483.5000	28.90	13.46	42.36	54.00	-11.64	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_125kbps(S=8)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

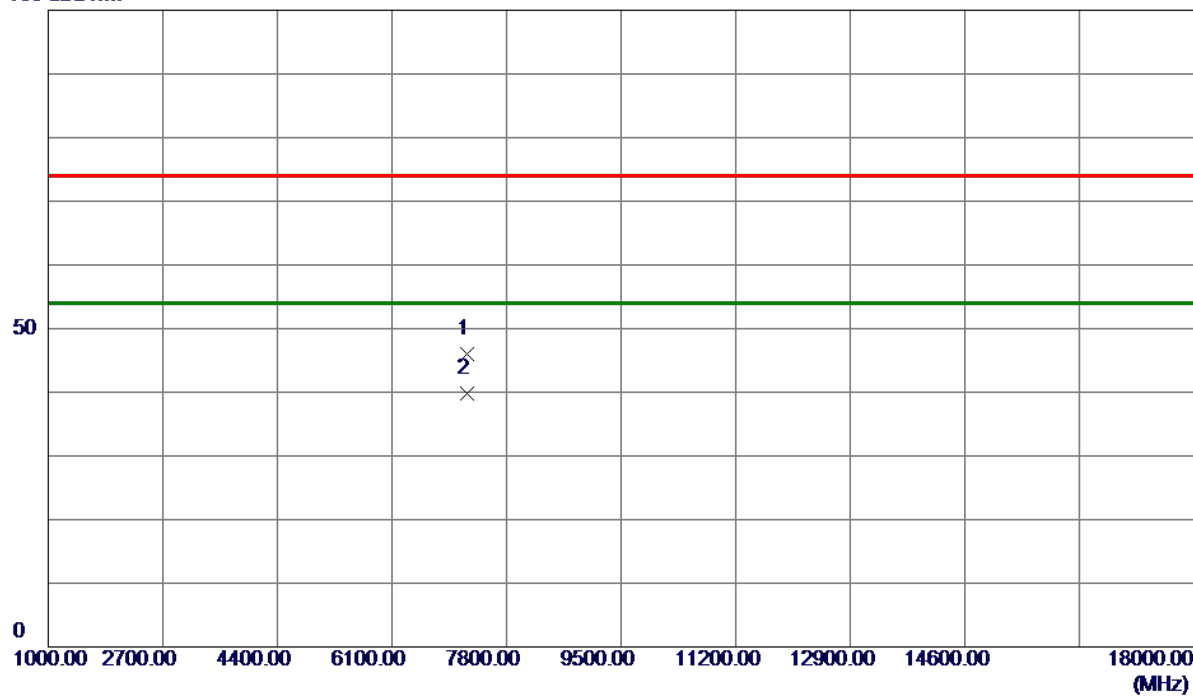


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7205.8800	36.23	9.81	46.04	74.00	-27.96	Peak	
2 *	7206.0400	29.90	9.81	39.71	54.00	-14.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_125kbps(S=8)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

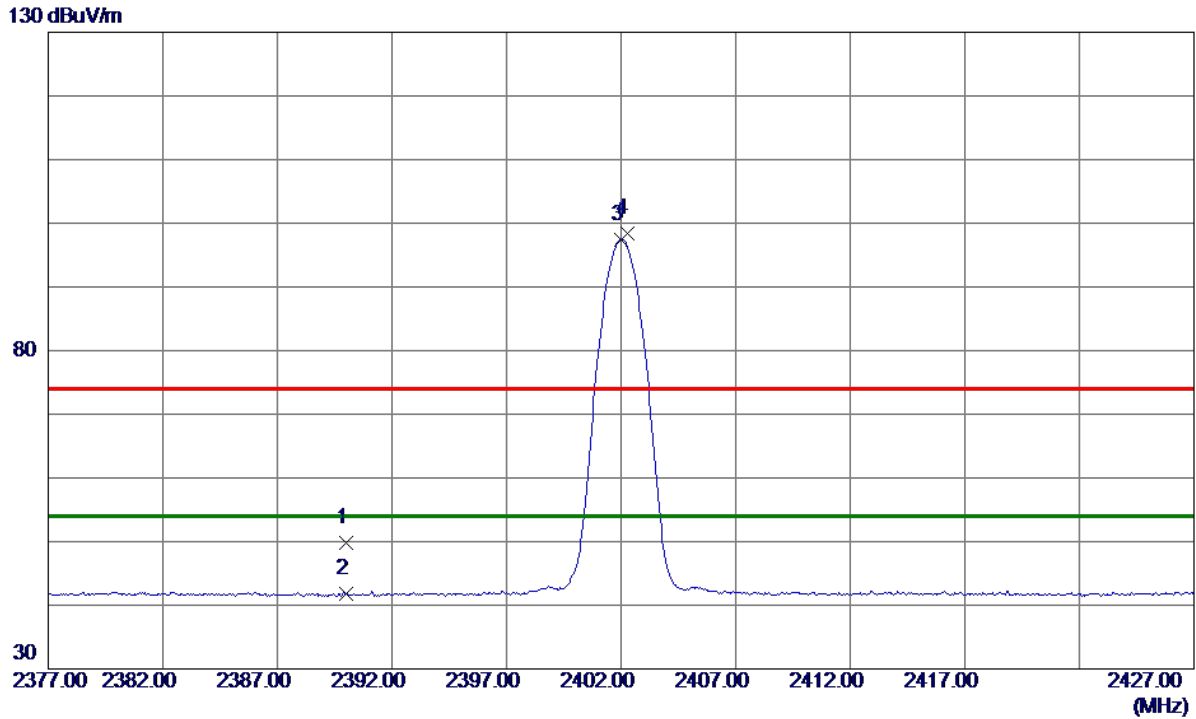

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	36.86	12.98	49.84	74.00	-24.16	Peak	
2	2390.0000	28.80	12.98	41.78	54.00	-12.22	AVG	
3 *	2402.0000	84.44	13.04	97.48	54.00	43.48	AVG	No Limit
4	2402.2500	85.43	13.05	98.48	74.00	24.48	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_125kbps(S=8)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

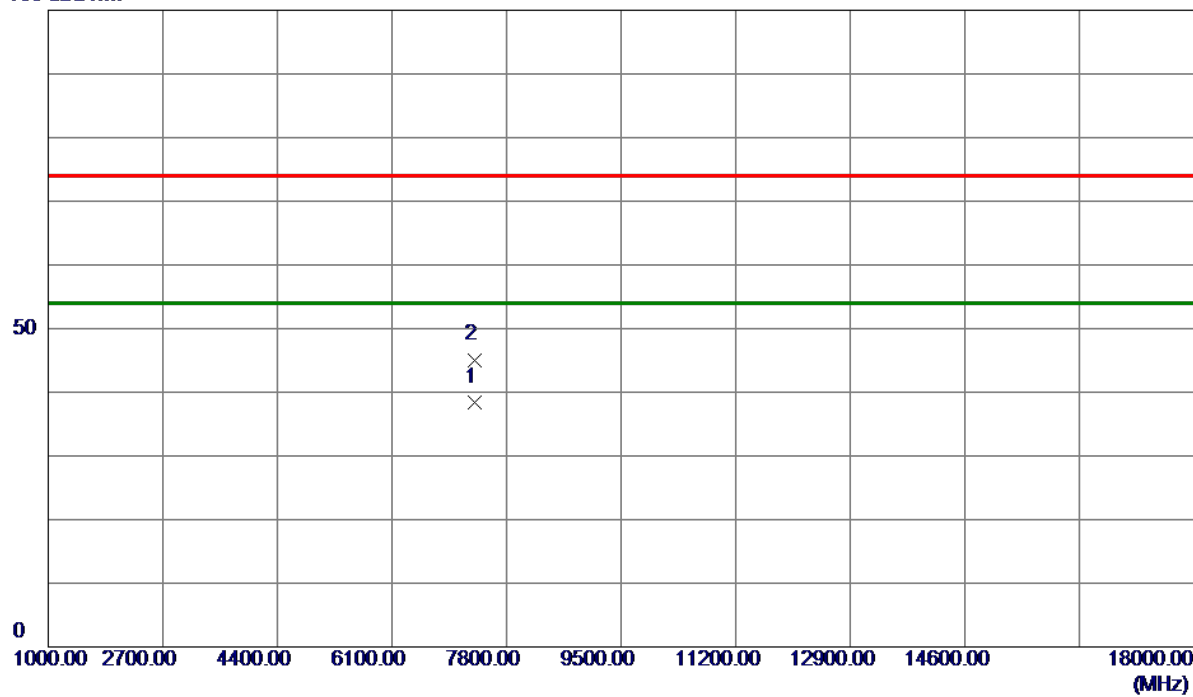

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7319.8600	28.58	9.75	38.33	54.00	-15.67	AVG	
2	7319.9400	35.35	9.75	45.10	74.00	-28.90	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_125kbps(S=8)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

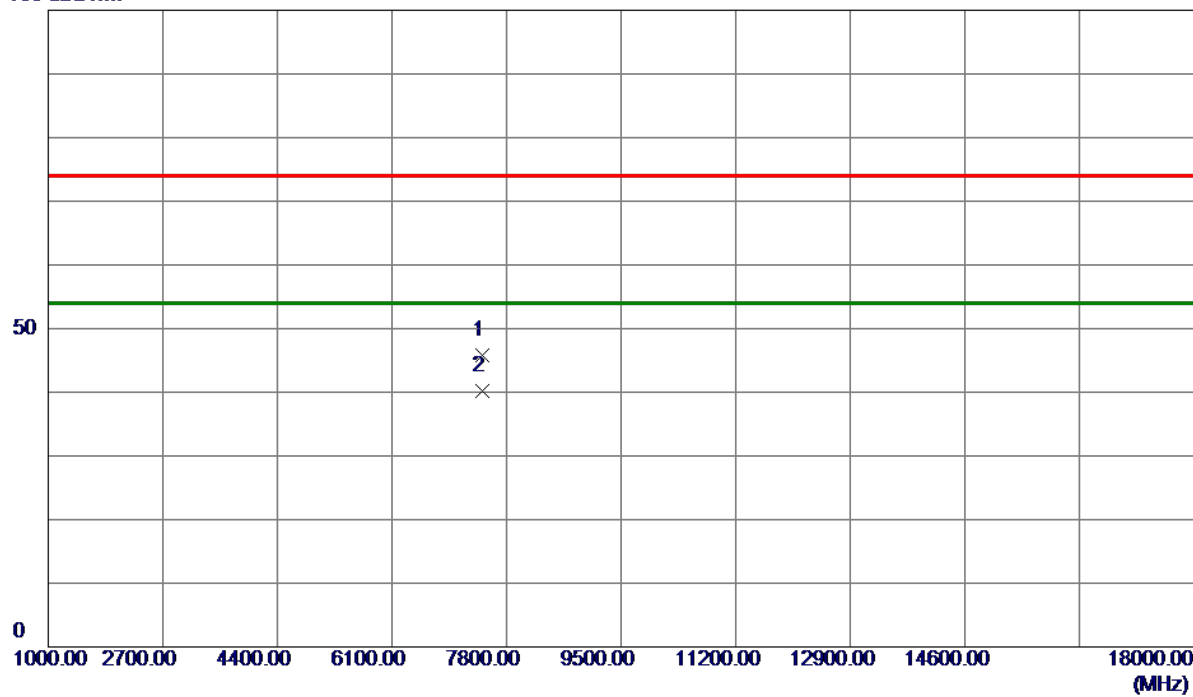

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.7000	36.05	9.69	45.74	74.00	-28.26	Peak	
2 *	7440.0200	30.43	9.69	40.12	54.00	-13.88	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_125kbps(S=8)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

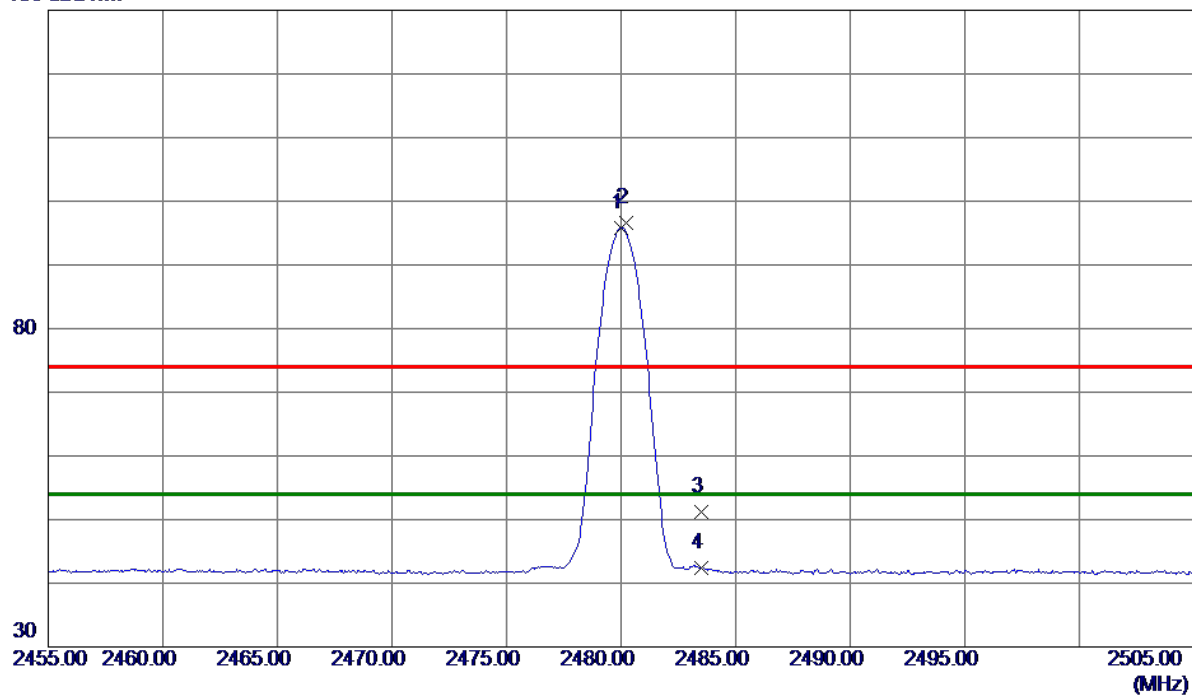

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2480.0000	82.40	13.44	95.84	54.00	41.84	AVG	No Limit
2	2480.2000	83.19	13.44	96.63	74.00	22.63	Peak	No Limit
3	2483.5000	37.82	13.46	51.28	74.00	-22.72	Peak	
4	2483.5000	28.98	13.46	42.44	54.00	-11.56	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

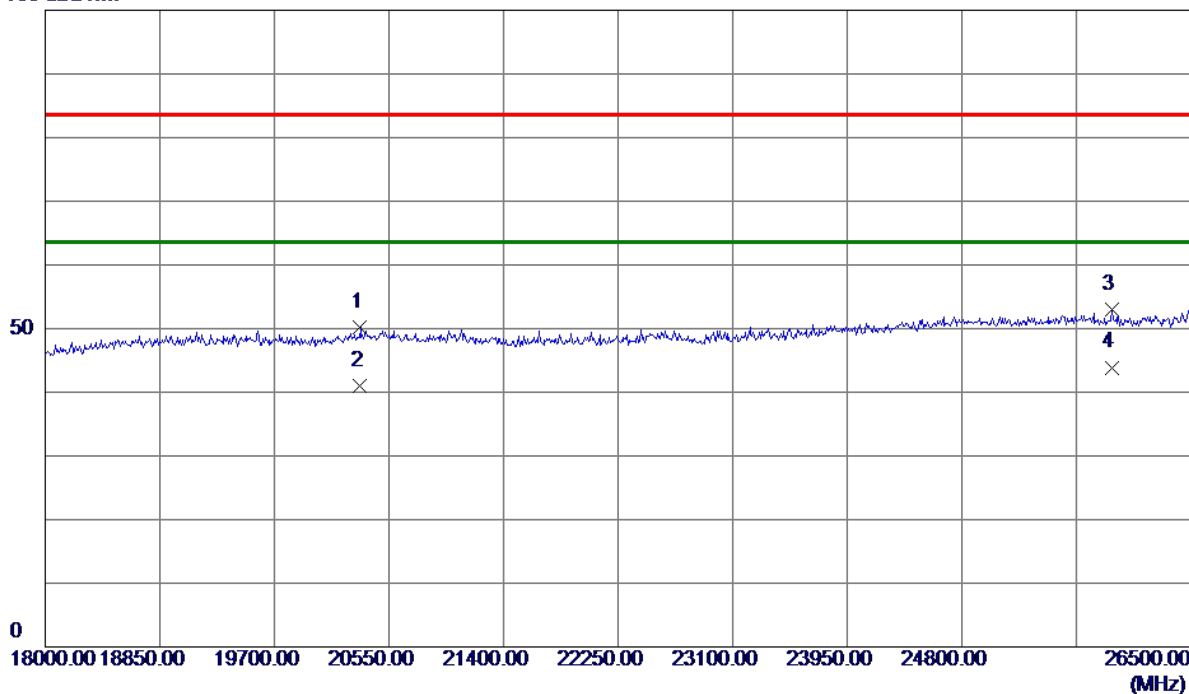

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	20337.5000	47.99	2.17	50.16	83.50	-33.34	Peak	
2	20337.5000	38.86	2.17	41.03	63.50	-22.47	AVG	
3	25913.5000	44.41	8.60	53.01	83.50	-30.49	Peak	
4 *	25913.5000	35.30	8.60	43.90	63.50	-19.60	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

100 dBuV/m

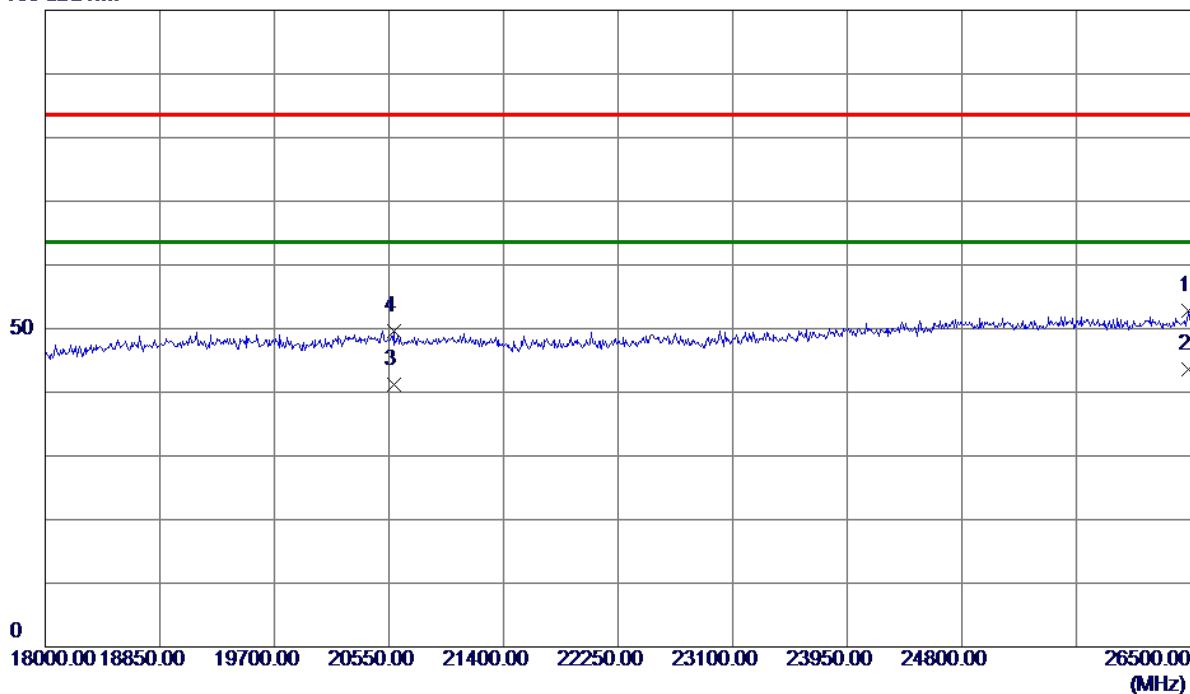

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	26483.0000	44.28	8.51	52.79	83.50	-30.71	Peak	
2 *	26483.0000	35.05	8.51	43.56	63.50	-19.94	AVG	
3	20584.0000	38.66	2.55	41.21	63.50	-22.29	AVG	
4	20584.0000	47.08	2.55	49.63	83.50	-33.87	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Worst Case:

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

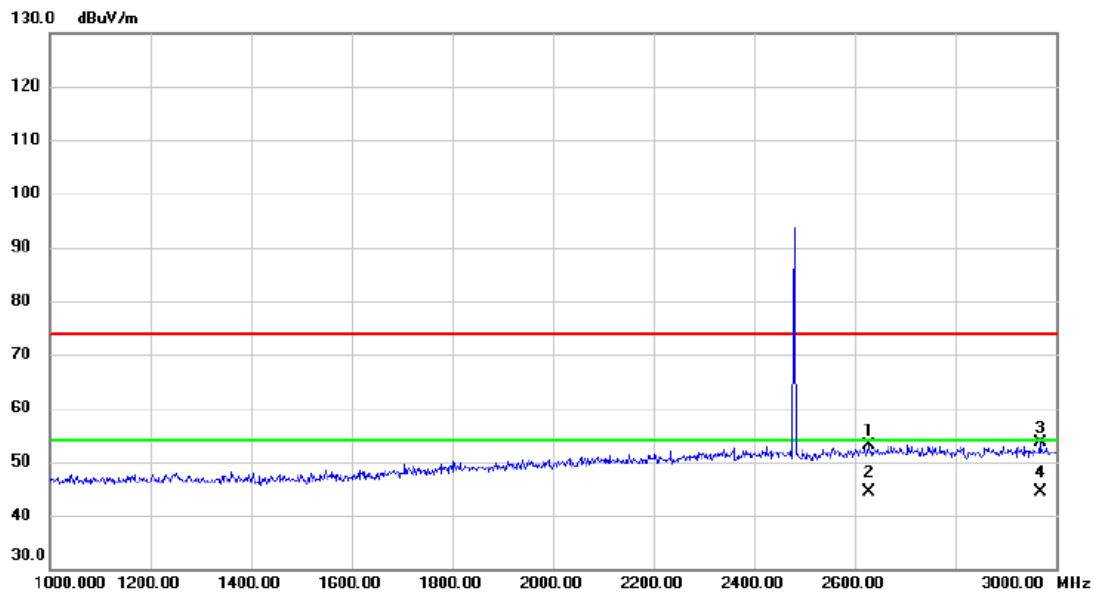

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2628.000	39.51	13.71	53.22	74.00	-20.78	peak	
2	*	2628.000	30.79	13.71	44.50	54.00	-9.50	AVG	
3		2968.000	39.47	14.16	53.63	74.00	-20.37	peak	
4		2968.000	30.12	14.16	44.28	54.00	-9.72	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Worst Case:

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

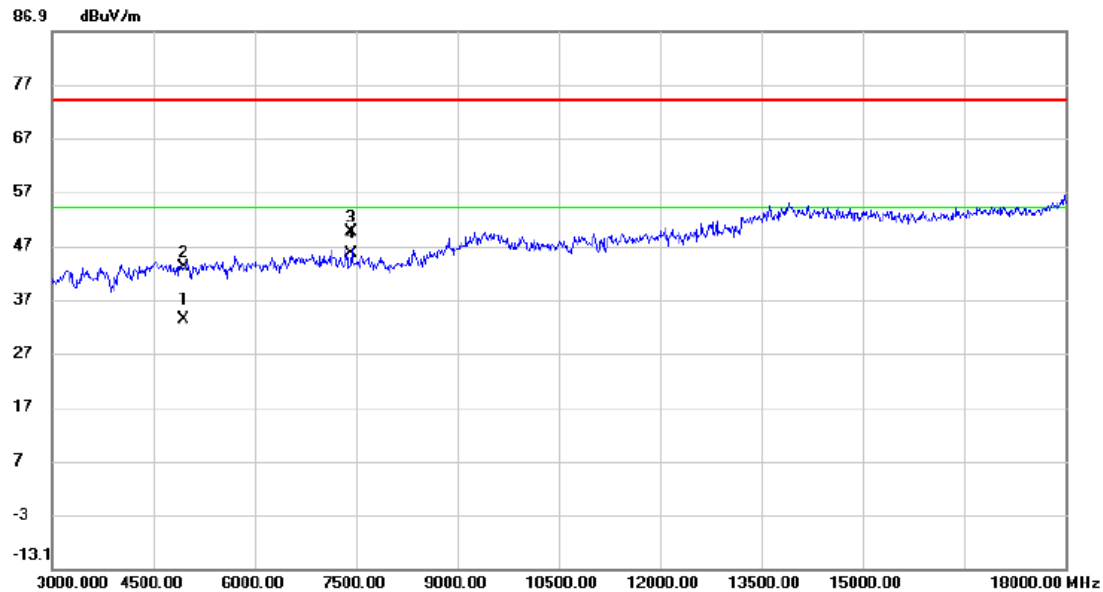

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4954.220	26.60	6.58	33.18	54.00	-20.82	AVG	
2		4958.000	36.33	6.59	42.92	74.00	-31.08	peak	
3		7439.600	39.72	9.69	49.41	74.00	-24.59	peak	
4	*	7439.980	35.85	9.69	45.54	54.00	-8.46	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Right Earphone

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

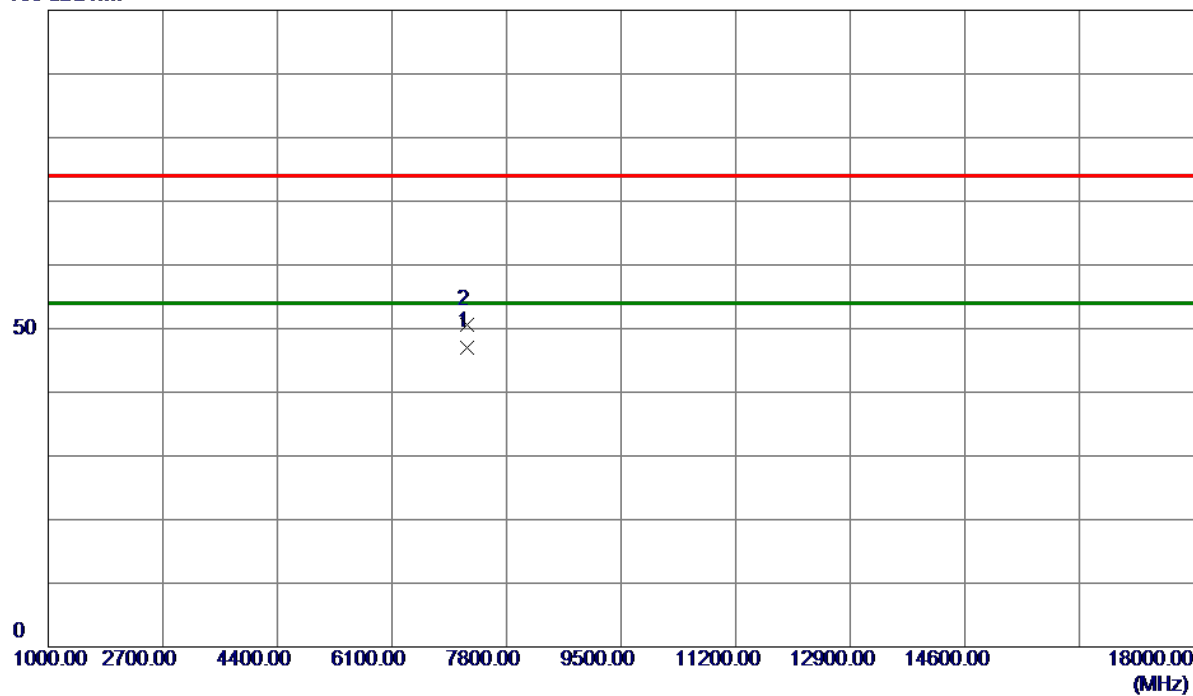

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7206.1000	37.29	9.81	47.10	54.00	-6.90	AVG	
2	7206.1800	40.79	9.81	50.60	74.00	-23.40	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

130 dBuV/m

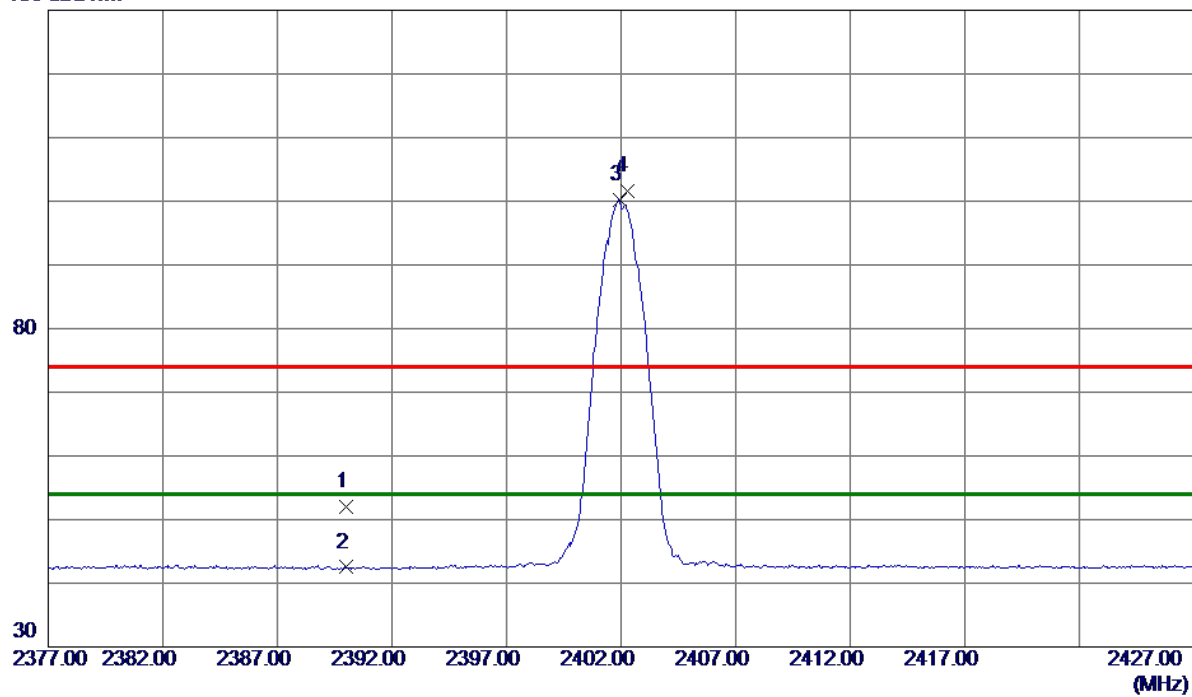

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	39.02	12.98	52.00	74.00	-22.00	Peak	
2	2390.0000	29.52	12.98	42.50	54.00	-11.50	AVG	
3 *	2401.9500	87.19	13.04	100.23	54.00	46.23	AVG	No Limit
4	2402.2500	88.53	13.05	101.58	74.00	27.58	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

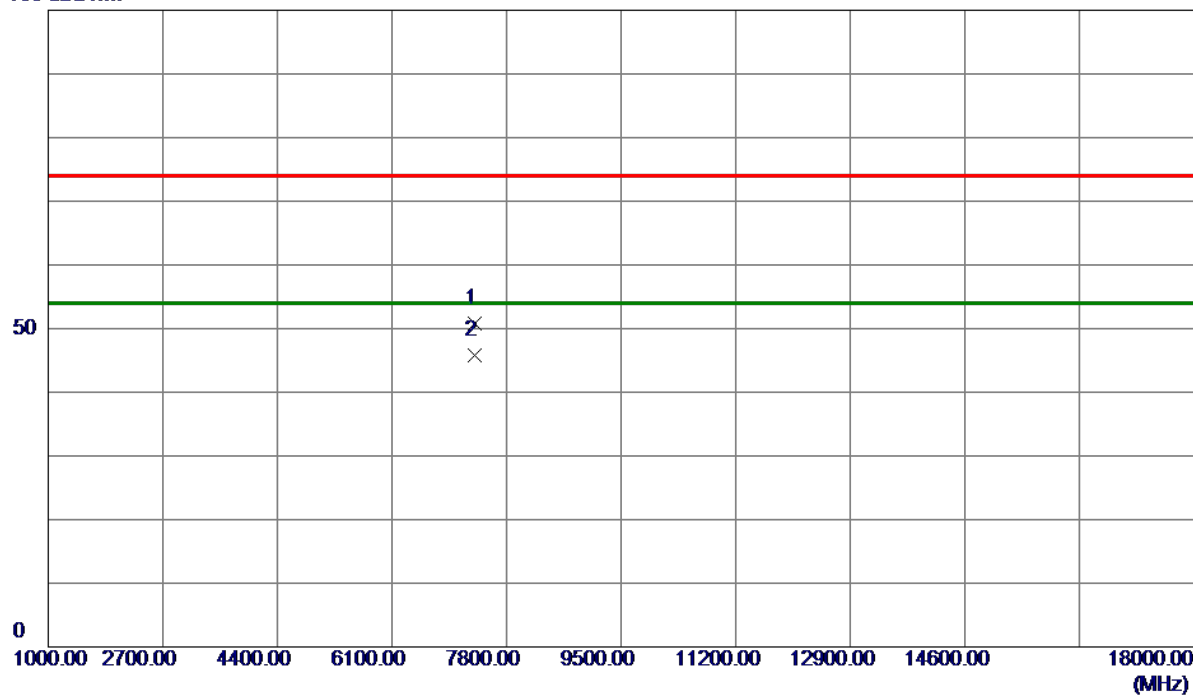


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7319.9400	41.01	9.75	50.76	74.00	-23.24	Peak	
2 *	7320.1000	36.09	9.75	45.84	54.00	-8.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

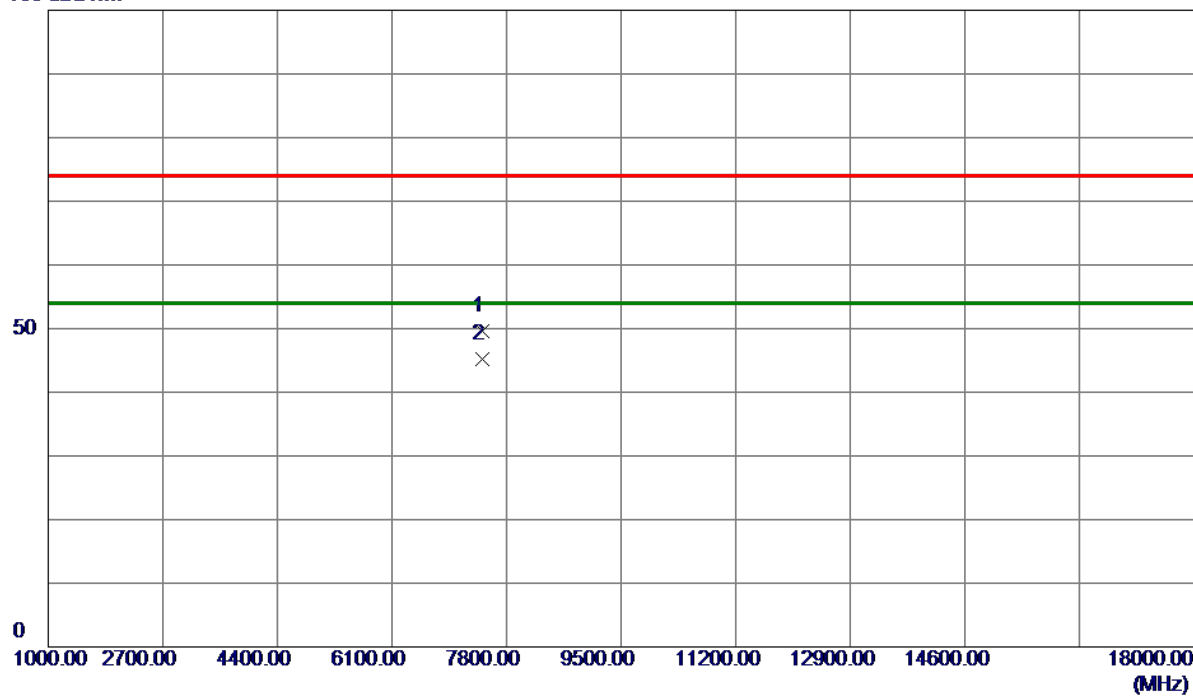


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.8600	39.96	9.69	49.65	74.00	-24.35	Peak	
2 *	7440.0000	35.43	9.69	45.12	54.00	-8.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_1Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

130 dBuV/m

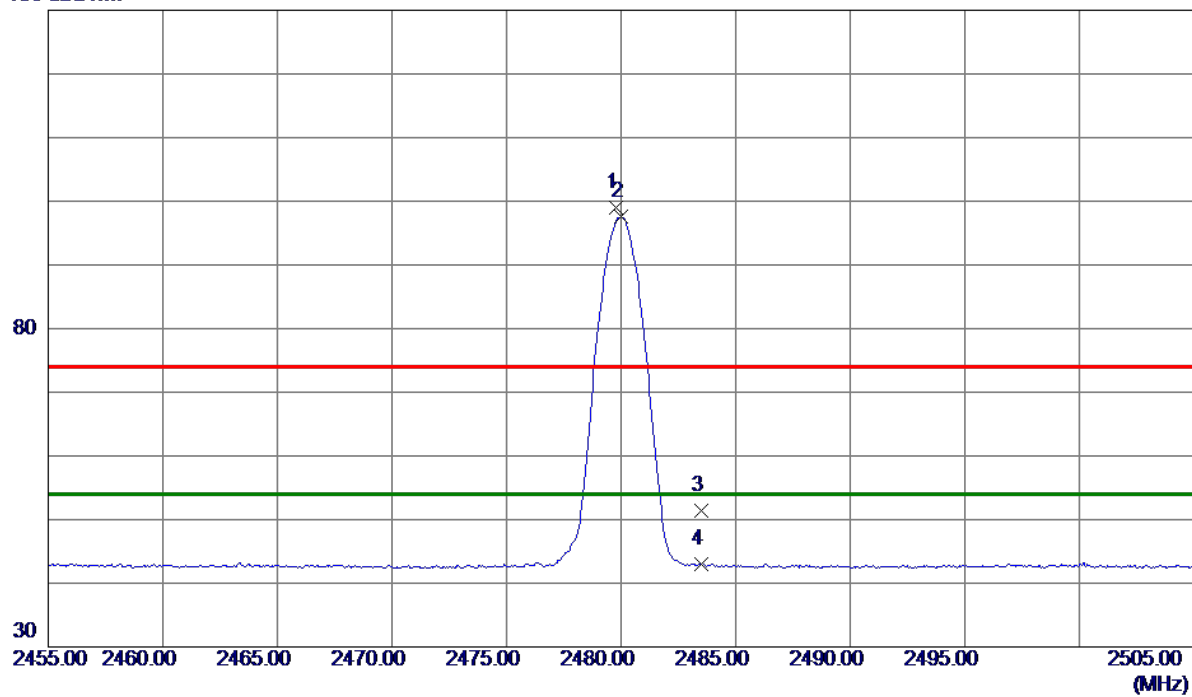

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8000	85.53	13.44	98.97	74.00	24.97	Peak	No Limit
2 *	2480.0000	84.14	13.44	97.58	54.00	43.58	AVG	No Limit
3	2483.5000	37.95	13.46	51.41	74.00	-22.59	Peak	
4	2483.5000	29.51	13.46	42.97	54.00	-11.03	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

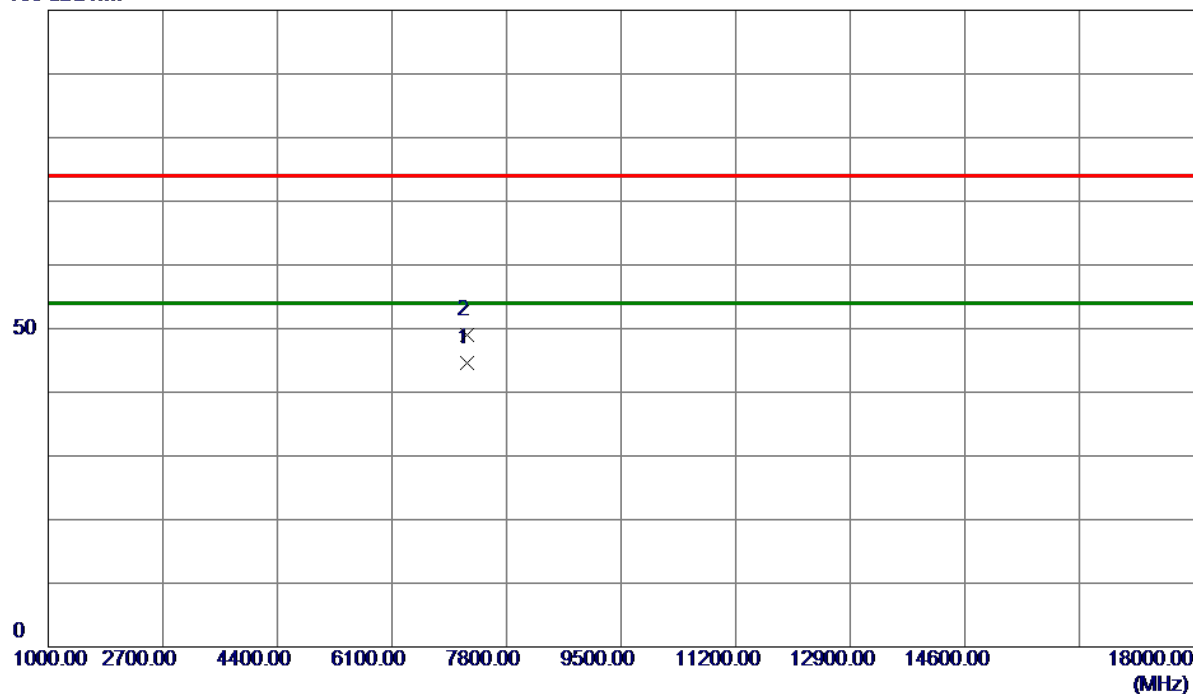

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7206.1400	34.70	9.81	44.51	54.00	-9.49	AVG	
2	7206.2400	39.22	9.81	49.03	74.00	-24.97	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_2Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

130 dBuV/m

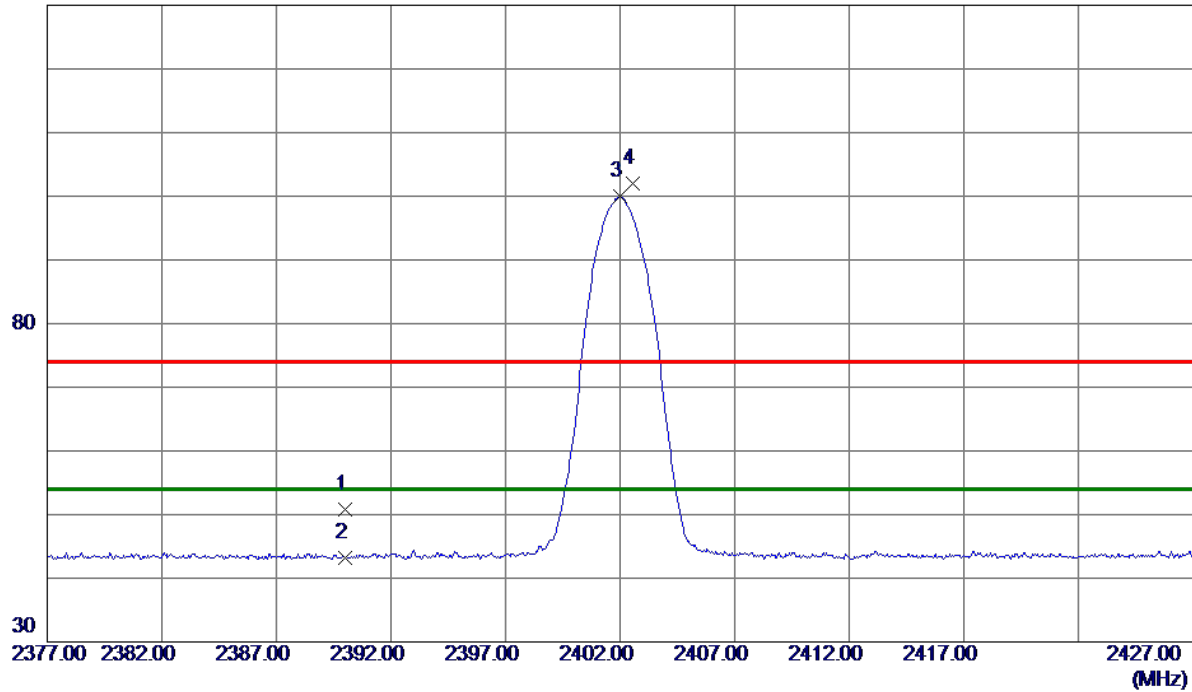

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	37.91	12.98	50.89	74.00	-23.11	Peak	
2	2390.0000	30.20	12.98	43.18	54.00	-10.82	AVG	
3 *	2402.0000	86.87	13.04	99.91	54.00	45.91	AVG	No Limit
4	2402.5500	88.89	13.05	101.94	74.00	27.94	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

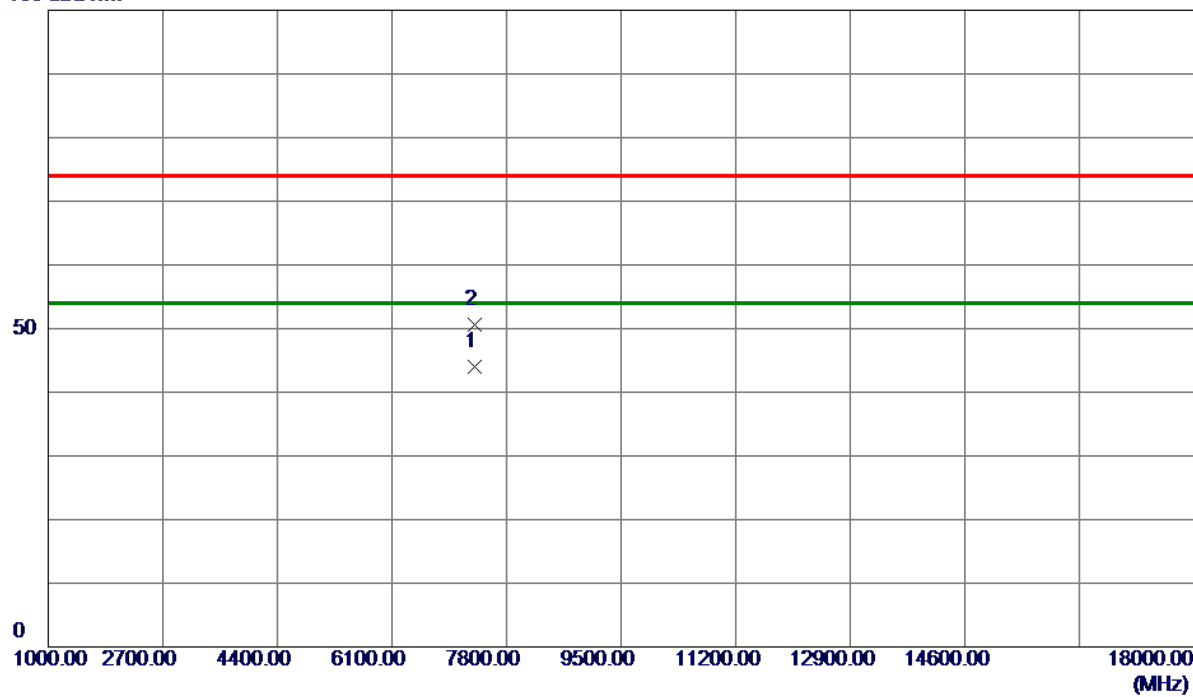


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7320.0600	34.33	9.75	44.08	54.00	-9.92	AVG	
2	7320.0800	40.90	9.75	50.65	74.00	-23.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

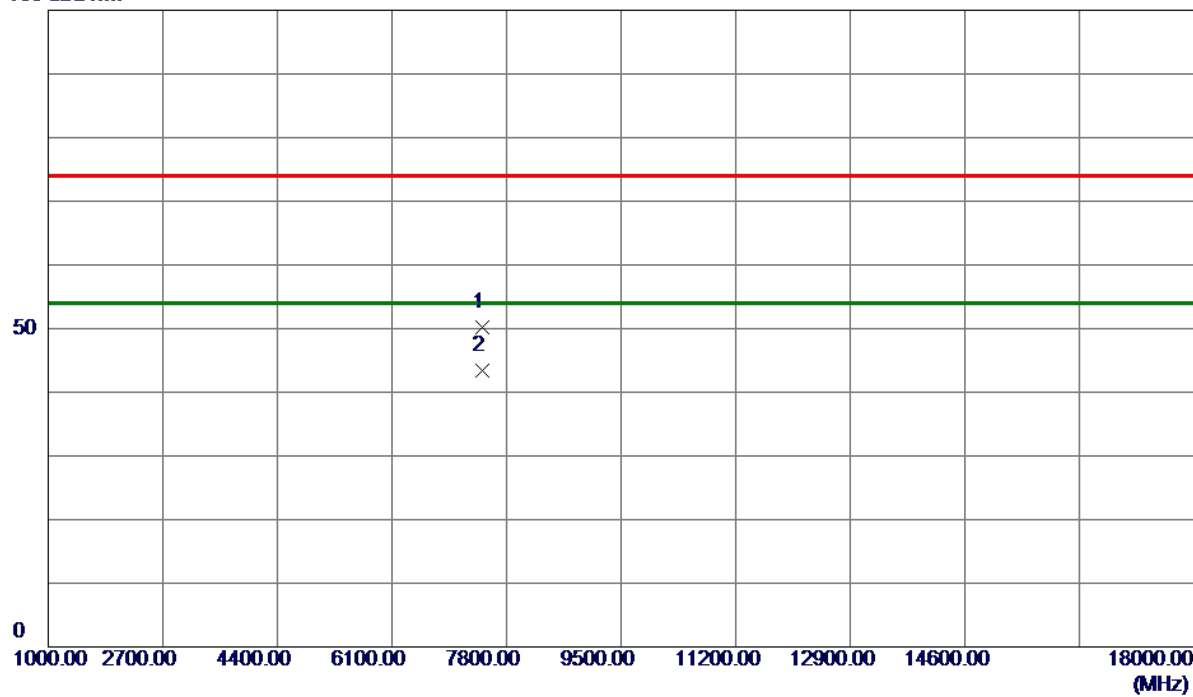

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.9200	40.55	9.69	50.24	74.00	-23.76	Peak	
2 *	7440.2200	33.73	9.69	43.42	54.00	-10.58	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

130 dBuV/m

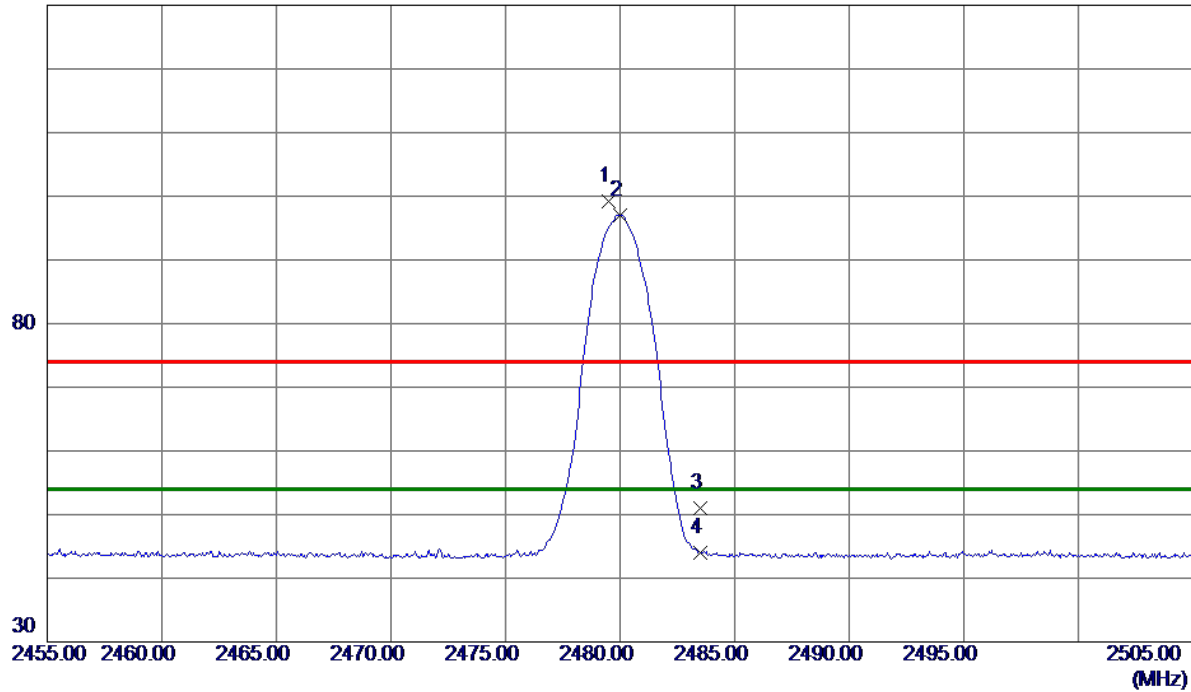

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.5000	85.74	13.44	99.18	74.00	25.18	Peak	No Limit
2 *	2480.0000	83.65	13.44	97.09	54.00	43.09	AVG	No Limit
3	2483.5000	37.47	13.46	50.93	74.00	-23.07	Peak	
4	2483.5000	30.48	13.46	43.94	54.00	-10.06	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_500kbps(S=2)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

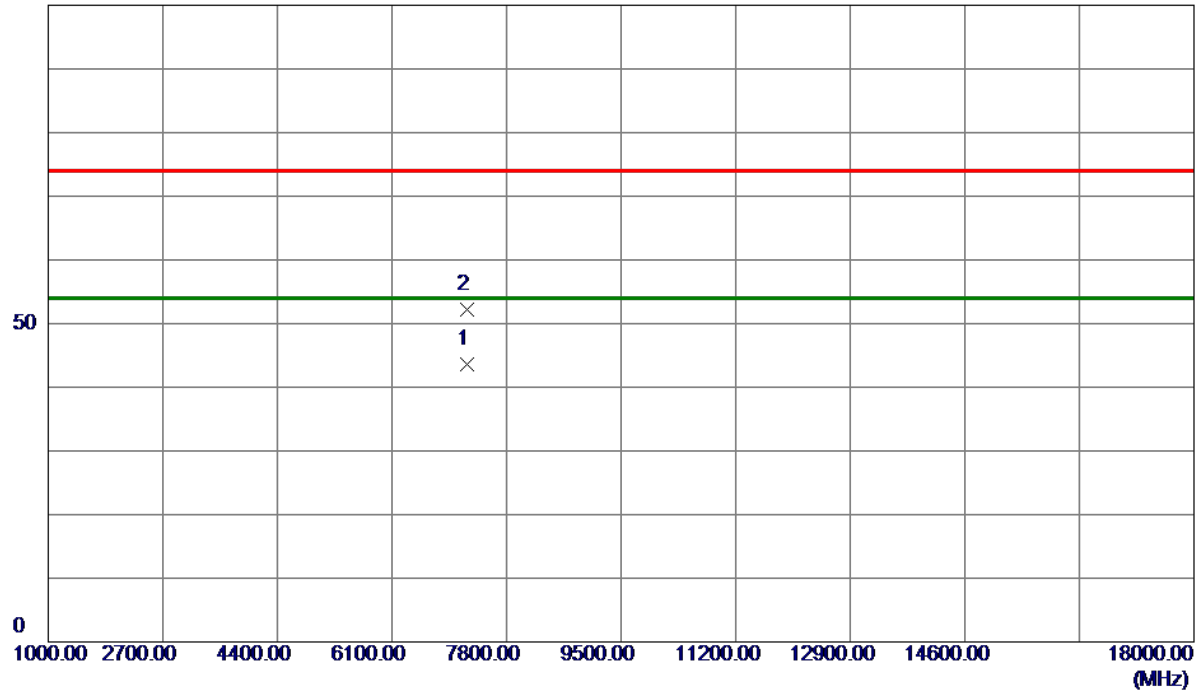


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7205.9600	33.77	9.81	43.58	54.00	-10.42	AVG	
2	7206.2000	42.38	9.81	52.19	74.00	-21.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_500kbps(S=2)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

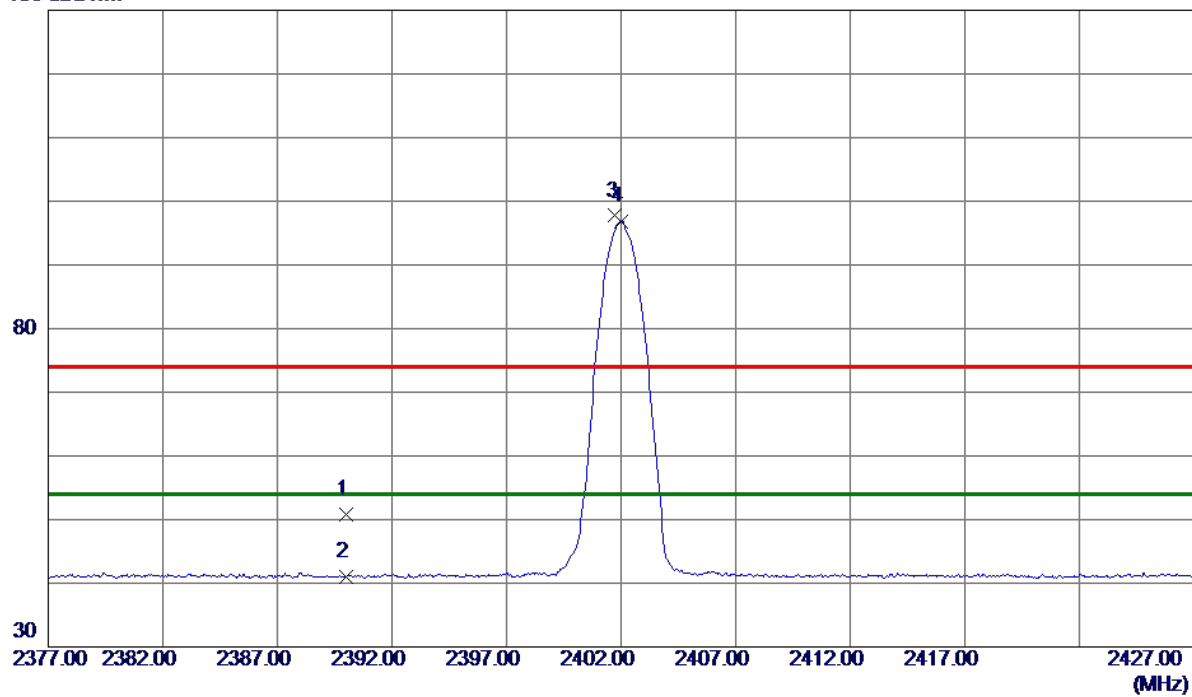

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	37.85	12.98	50.83	74.00	-23.17	Peak	
2	2390.0000	28.10	12.98	41.08	54.00	-12.92	AVG	
3	2401.7500	84.66	13.04	97.70	74.00	23.70	Peak	No Limit
4 *	2402.0000	83.83	13.04	96.87	54.00	42.87	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_500kbps(S=2)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

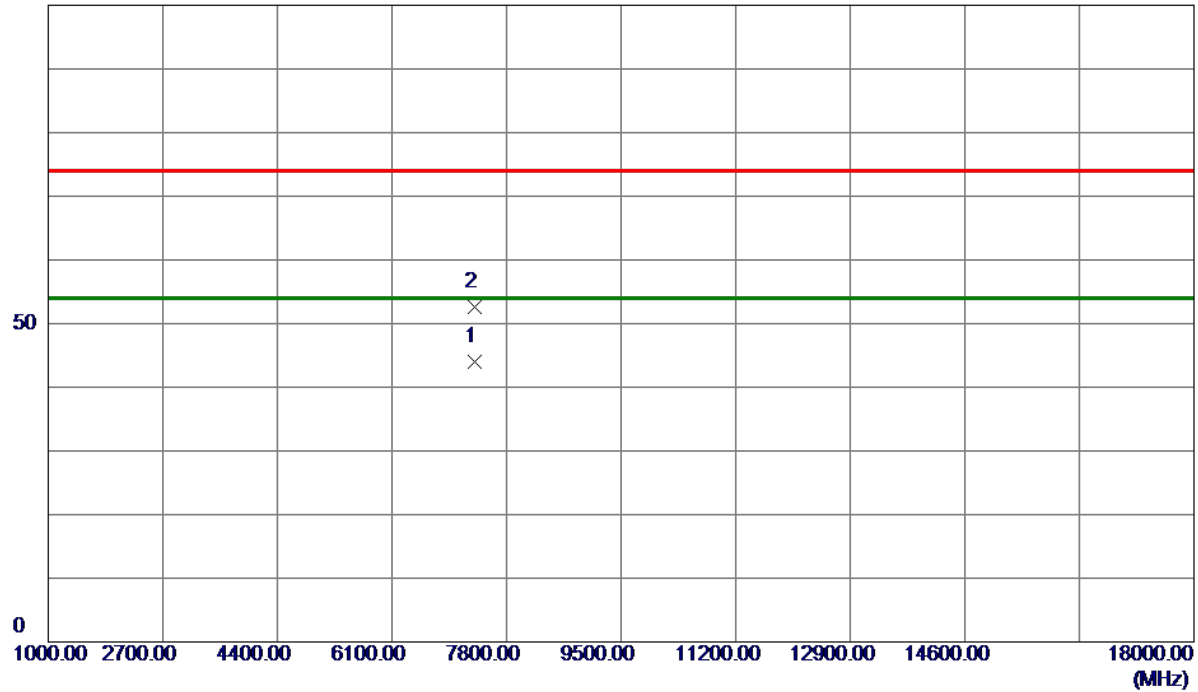

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7320.1800	34.30	9.75	44.05	54.00	-9.95	AVG	
2	7320.2400	42.79	9.75	52.54	74.00	-21.46	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_500kbps(S=2)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

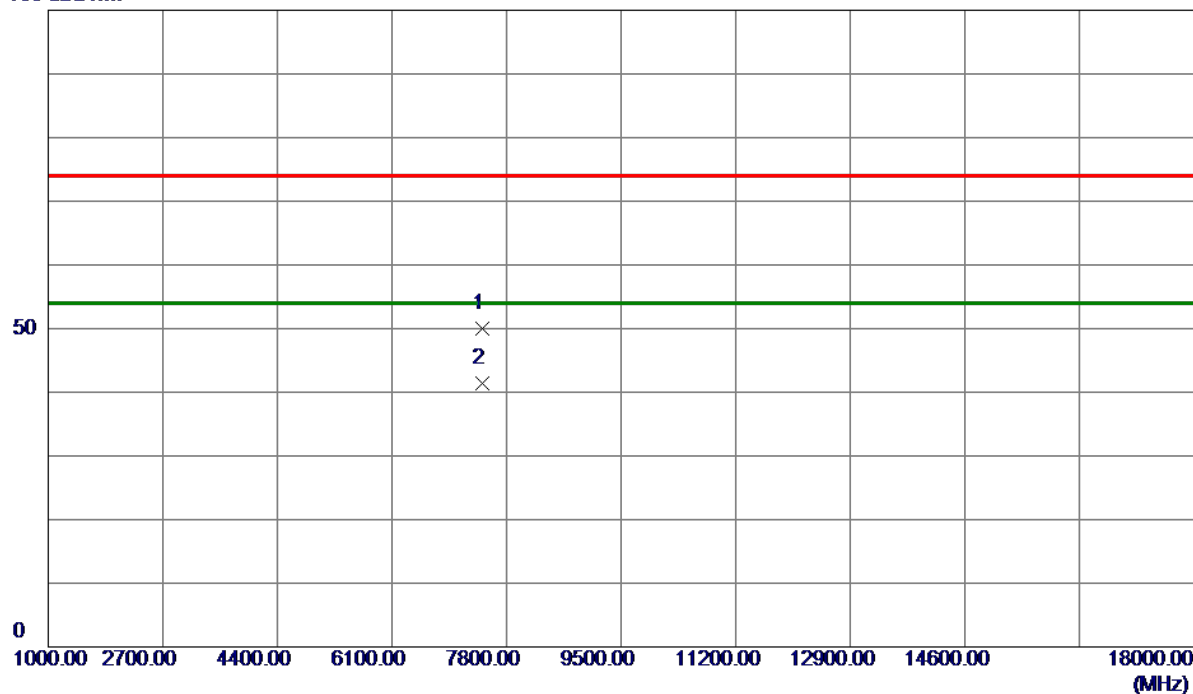

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.9600	40.36	9.69	50.05	74.00	-23.95	Peak	
2 *	7440.0000	31.80	9.69	41.49	54.00	-12.51	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_500kbps(S=2)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

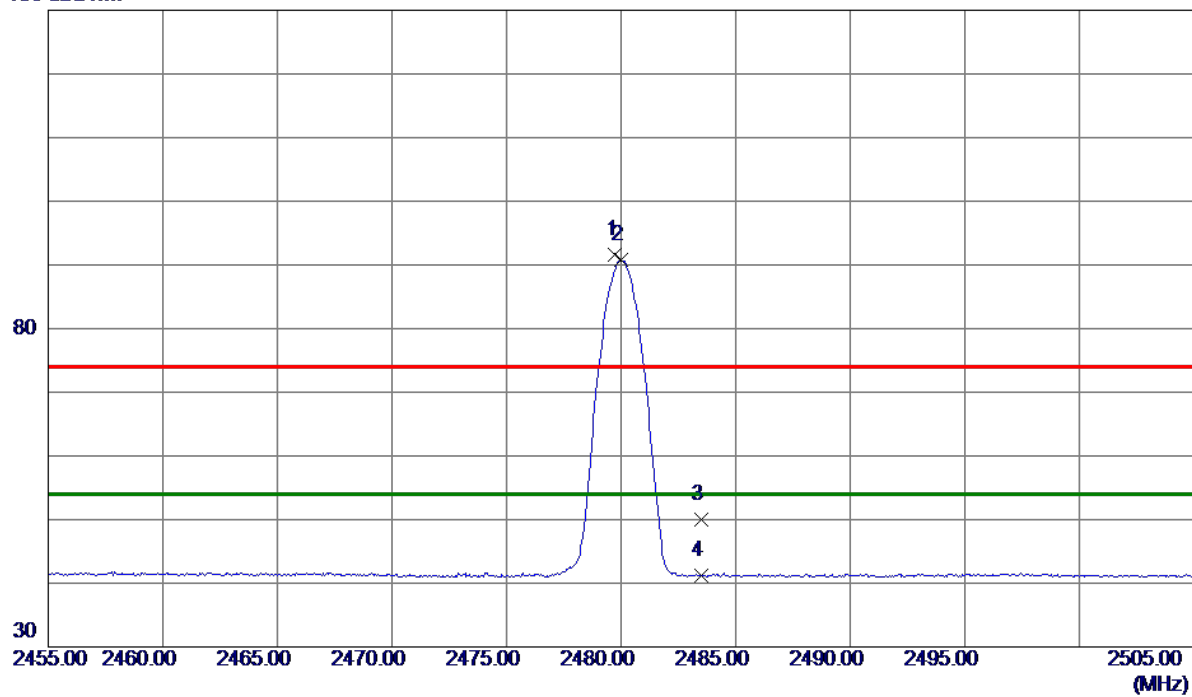

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.7500	78.07	13.44	91.51	74.00	17.51	Peak	No Limit
2 *	2480.0000	77.27	13.44	90.71	54.00	36.71	AVG	No Limit
3	2483.5000	36.56	13.46	50.02	74.00	-23.98	Peak	
4	2483.5000	27.78	13.46	41.24	54.00	-12.76	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_125kbps(S=8)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

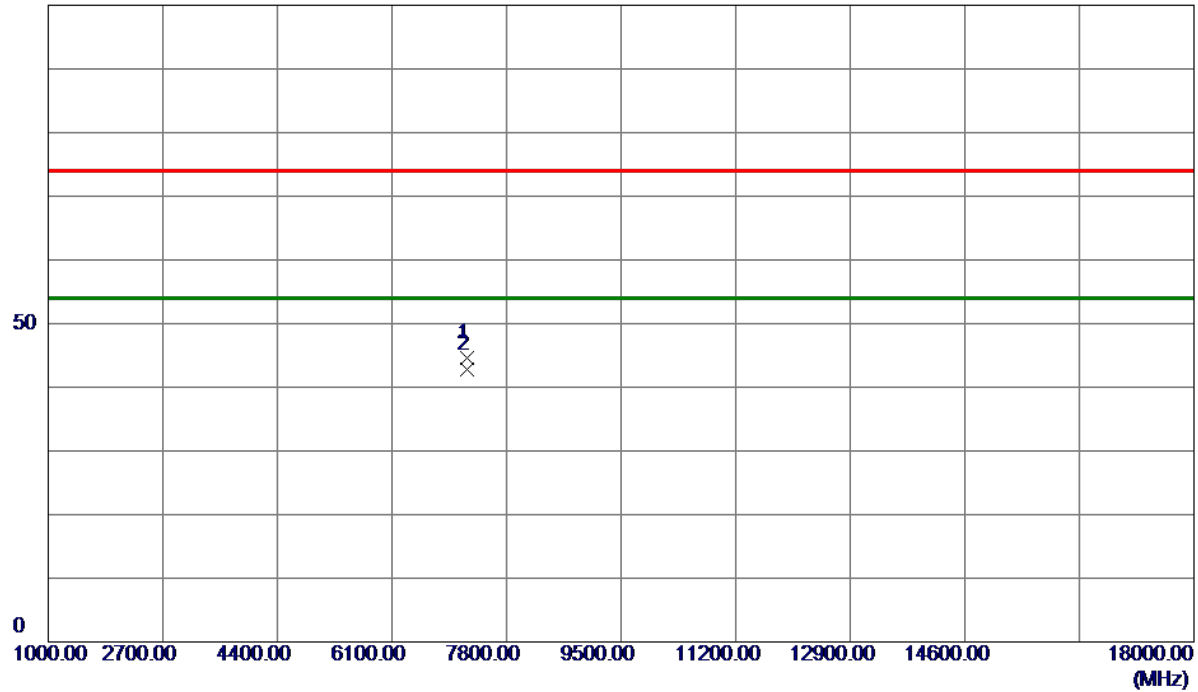


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7205.8800	34.74	9.81	44.55	74.00	-29.45	Peak	
2 *	7206.1200	33.05	9.81	42.86	54.00	-11.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz_CH00_125kbps(S=8)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

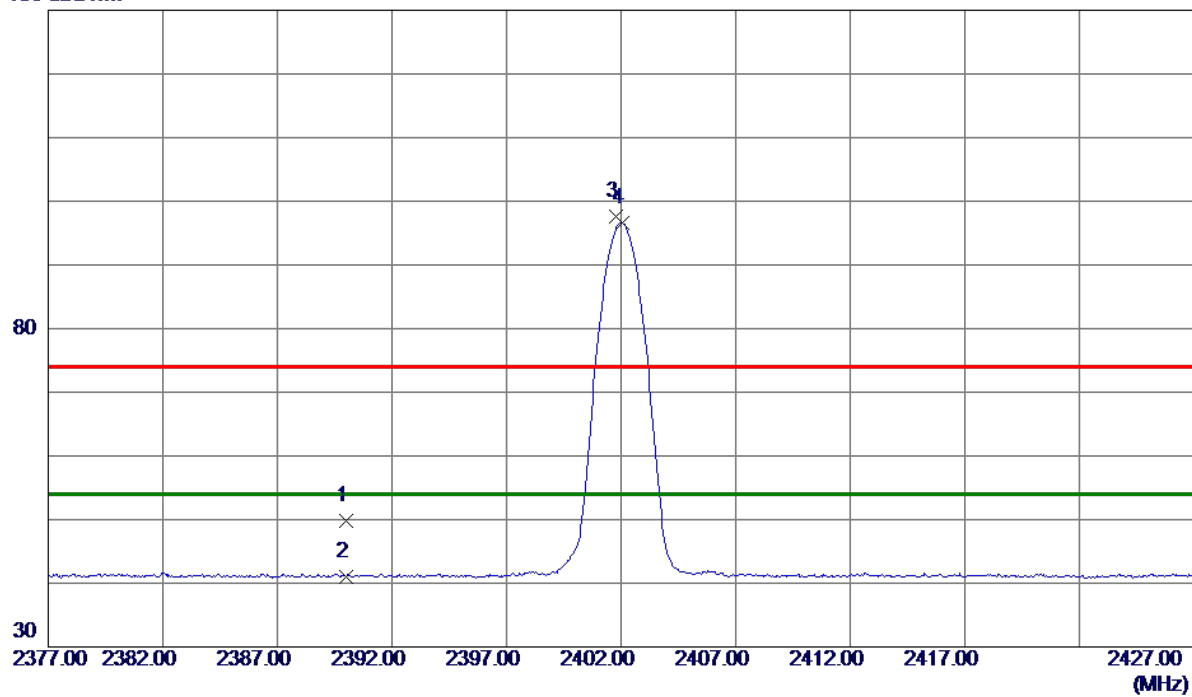

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	36.90	12.98	49.88	74.00	-24.12	Peak	
2	2390.0000	28.11	12.98	41.09	54.00	-12.91	AVG	
3	2401.8000	84.53	13.04	97.57	74.00	23.57	Peak	No Limit
4 *	2402.0500	83.53	13.04	96.57	54.00	42.57	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz_CH19_ 125kbps(S=8)	Polarization	Vertical
-----------	--------------------------------	--------------	----------

100 dBuV/m

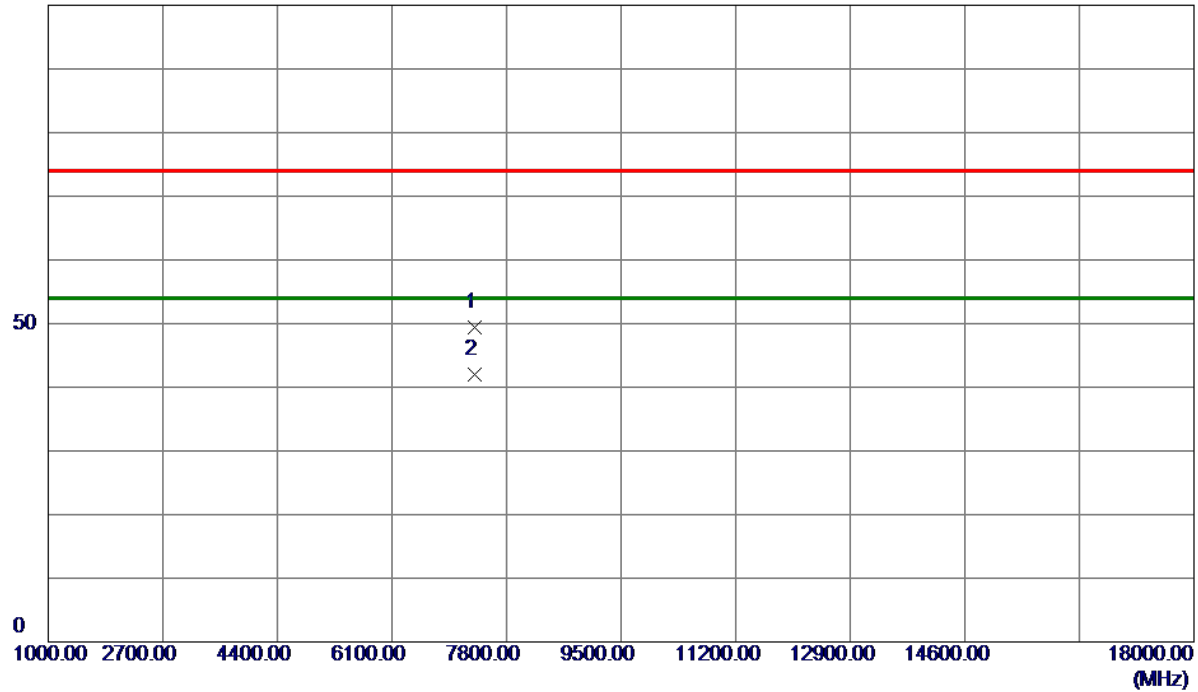

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7319.8800	39.66	9.75	49.41	74.00	-24.59	Peak	
2 *	7320.0200	32.27	9.75	42.02	54.00	-11.98	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_125kbps(S=8)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

100 dBuV/m

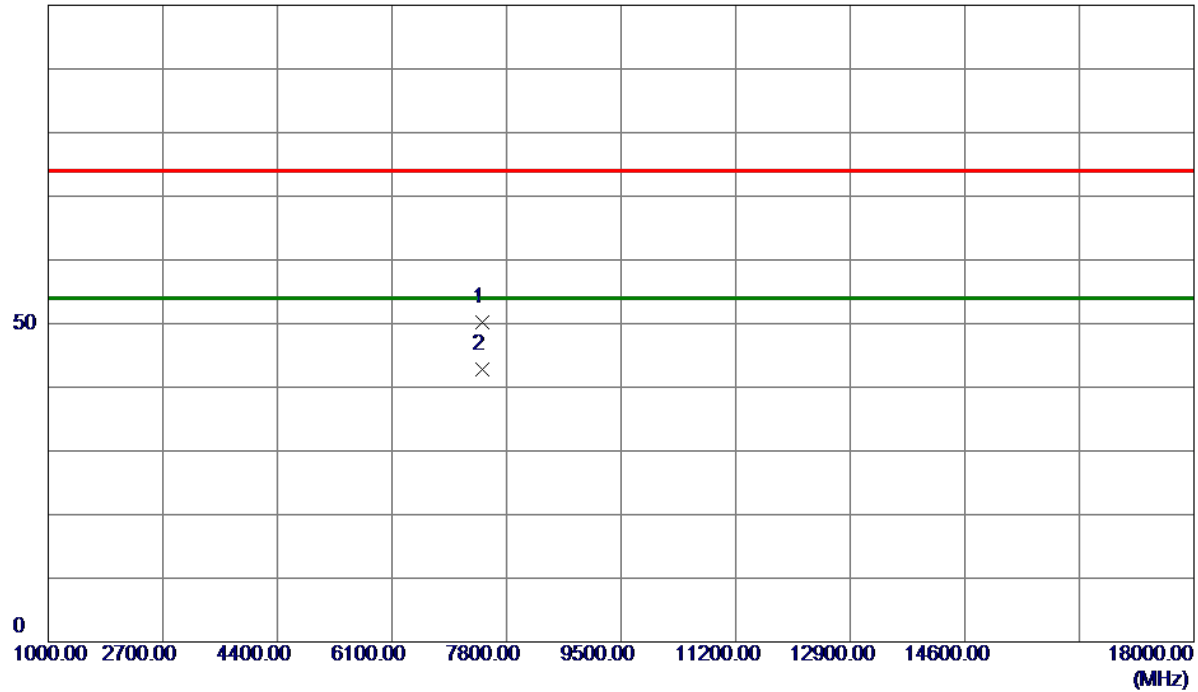

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7439.8800	40.42	9.69	50.11	74.00	-23.89	Peak	
2 *	7439.9400	33.14	9.69	42.83	54.00	-11.17	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_125kbps(S=8)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

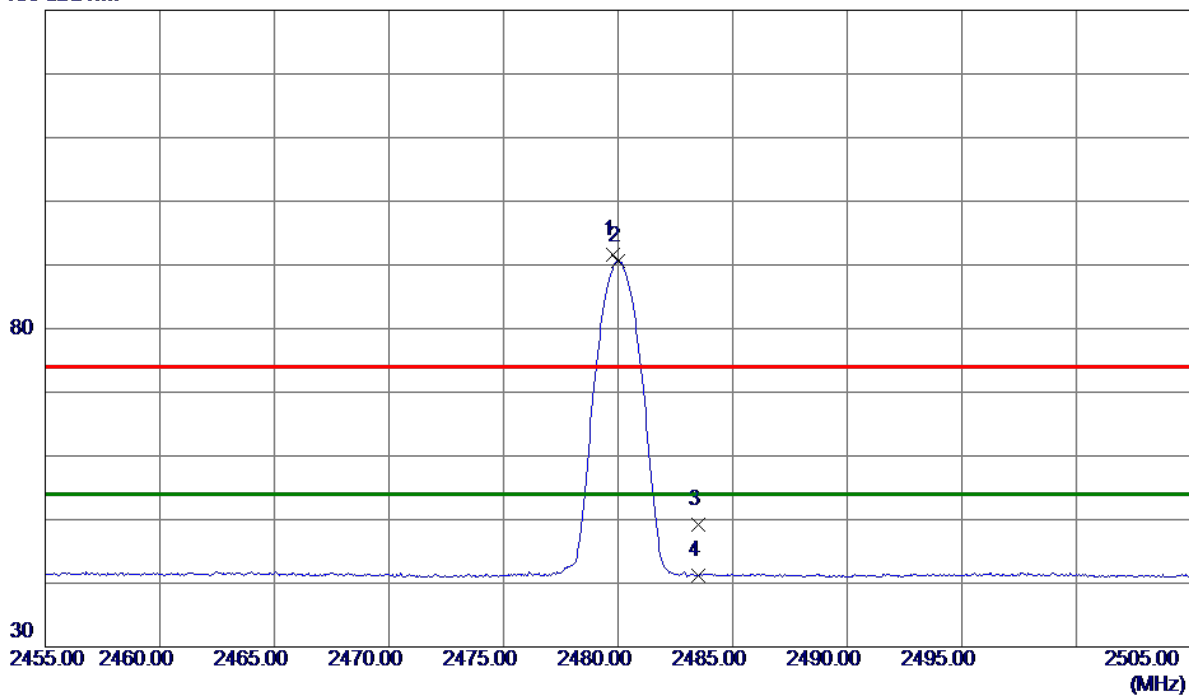

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2479.8000	78.09	13.44	91.53	74.00	17.53	Peak	No Limit
2 *	2480.0000	77.11	13.44	90.55	54.00	36.55	AVG	No Limit
3	2483.5000	35.73	13.46	49.19	74.00	-24.81	Peak	
4	2483.5000	27.71	13.46	41.17	54.00	-12.83	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

100 dBuV/m

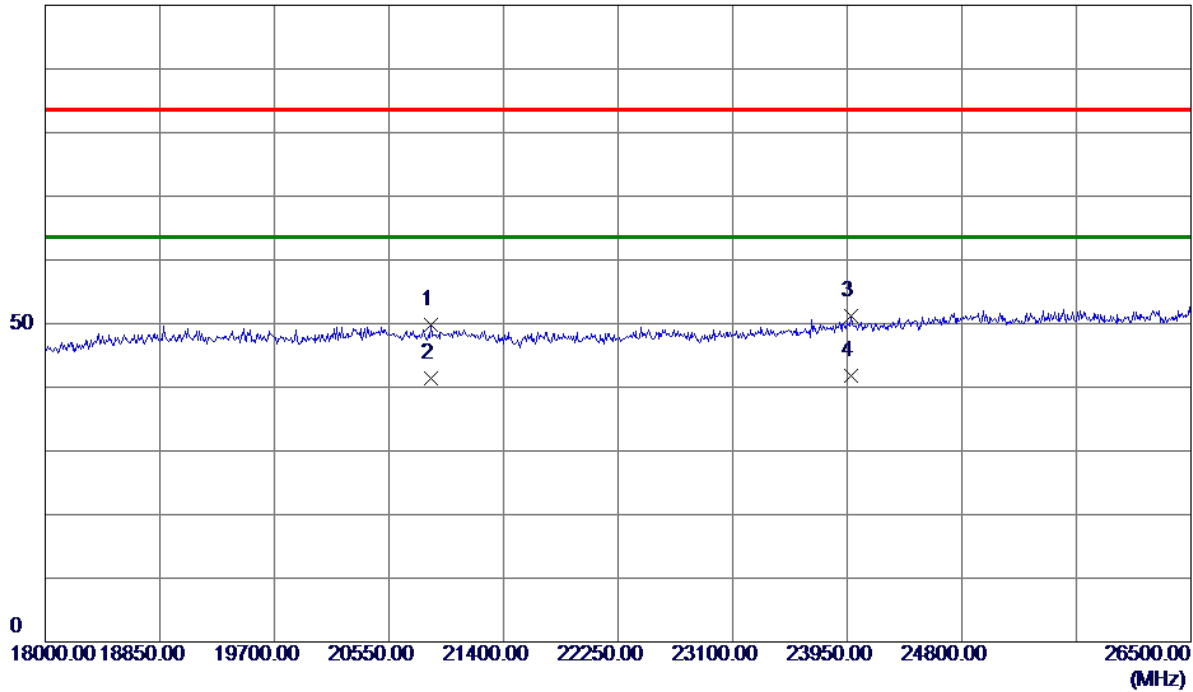

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	20864.5000	47.16	2.57	49.73	83.50	-33.77	Peak	
2	20864.5000	38.80	2.57	41.37	63.50	-22.13	AVG	
3	23975.5000	44.92	6.26	51.18	83.50	-32.32	Peak	
4 *	23975.5000	35.56	6.26	41.82	63.50	-21.68	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz_CH39_2Mbps	Polarization	Horizontal
-----------	------------------------	--------------	------------

100 dBuV/m

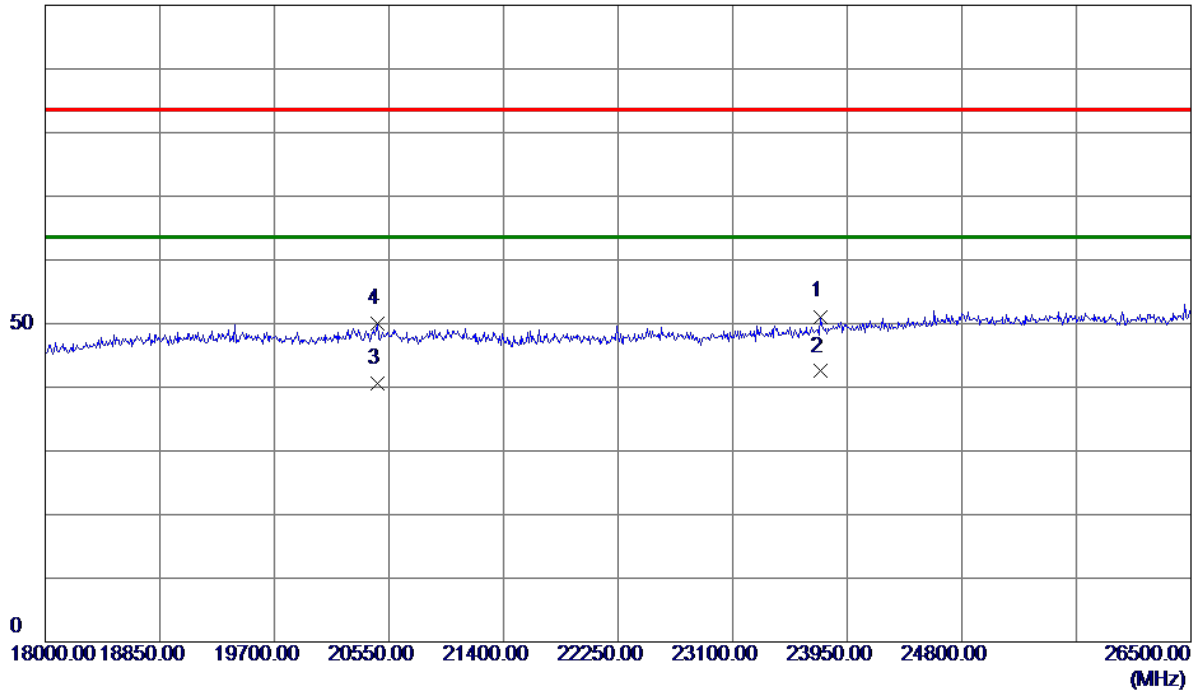

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	23754.5000	45.26	5.84	51.10	83.50	-32.40	Peak	
2 *	23754.5000	36.66	5.84	42.50	63.50	-21.00	AVG	
3	20465.0000	38.13	2.46	40.59	63.50	-22.91	AVG	
4	20465.0000	47.60	2.46	50.06	83.50	-33.44	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Worst Case:

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

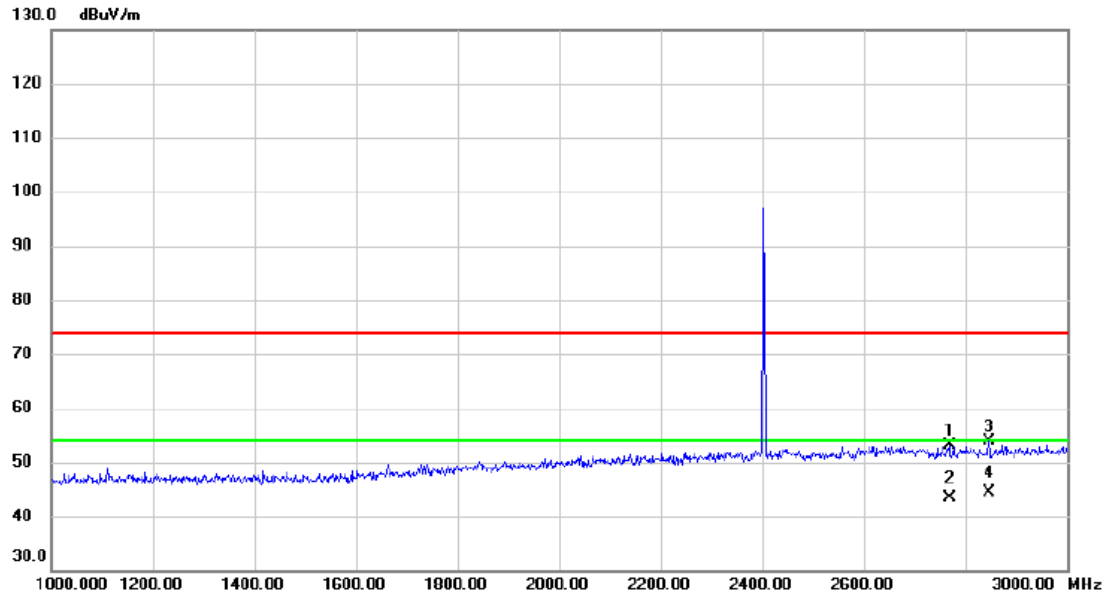

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2768.000	39.34	13.89	53.23	74.00	-20.77	peak	
2		2768.000	29.59	13.89	43.48	54.00	-10.52	AVG	
3		2846.000	39.80	14.00	53.80	74.00	-20.20	peak	
4 *		2846.000	30.47	14.00	44.47	54.00	-9.53	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Worst Case:

Test Mode	TX 2402 MHz_CH00_1Mbps	Polarization	Vertical
-----------	------------------------	--------------	----------

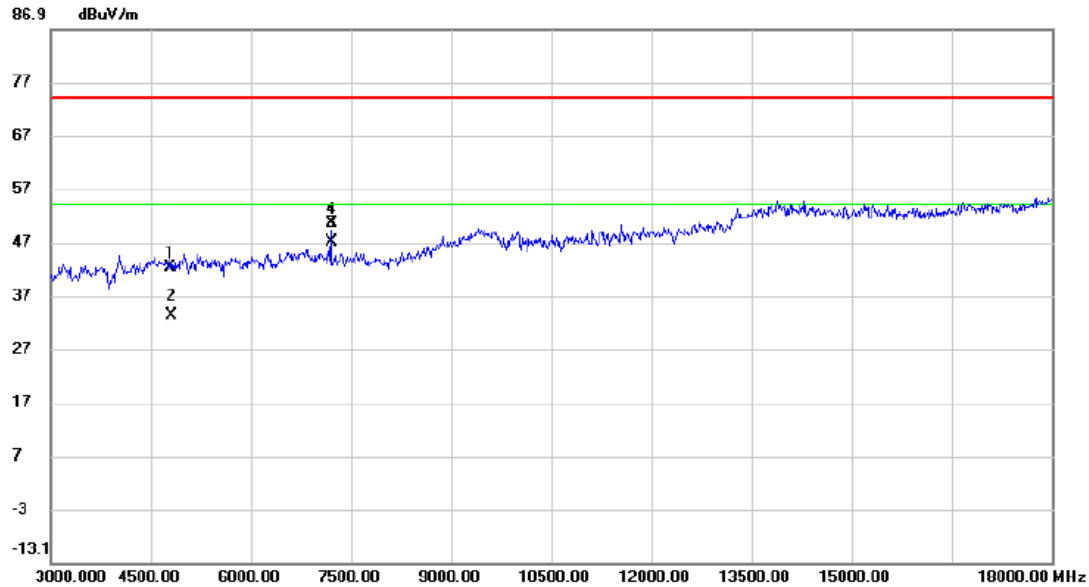

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4799.380	35.66	6.61	42.27	74.00	-31.73	peak	
2		4811.920	26.63	6.62	33.25	54.00	-20.75	AVG	
3	*	7206.100	37.30	9.80	47.10	54.00	-6.90	AVG	
4		7206.180	40.80	9.80	50.60	74.00	-23.40	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

Left Earphone

Test Mode	TX Mode_1Mbps
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.672	1.032	0.5	Pass
19	2440	0.680	1.032	0.5	Pass
39	2480	0.680	1.032	0.5	Pass

CH00

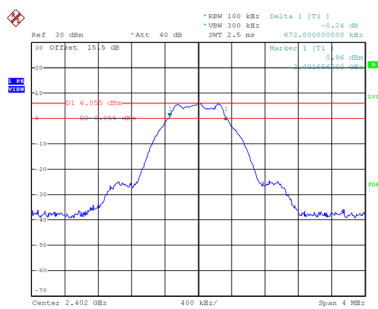


Date: 24.FEB.2026 14:06:37

CH19
6 dB Bandwidth

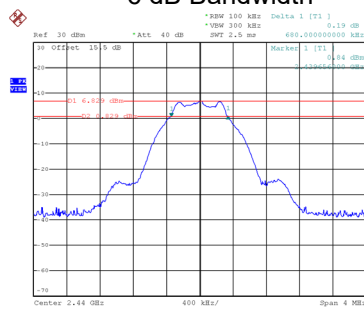


Date: 24.FEB.2026 14:08:33

CH39

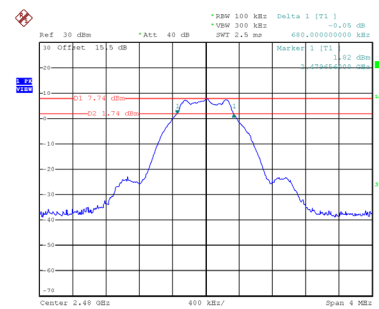


Date: 24.FEB.2026 14:10:10


99 % Occupied Bandwidth

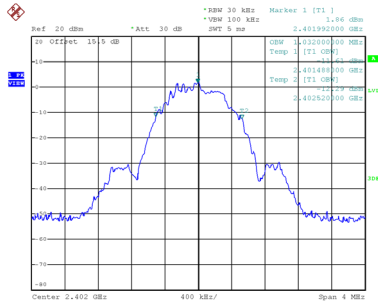

Date: 24.FEB.2026 14:06:47

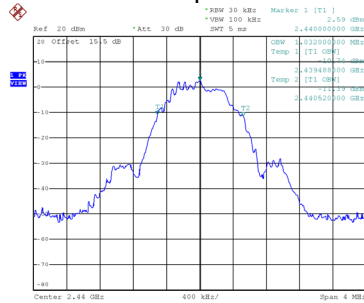

Date: 24.FEB.2026 14:08:44

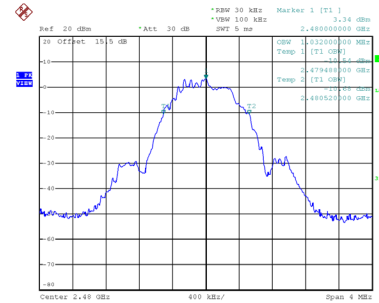


Date: 24.FEB.2026 14:10:20

Test Mode	TX Mode_2Mbps
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	1.168	2.032	0.5	Pass
19	2440	1.160	2.032	0.5	Pass
39	2480	1.160	2.032	0.5	Pass

CH00

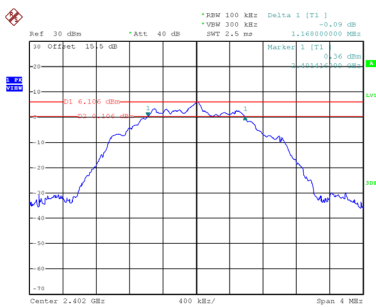


Date: 24.FEB.2026 14:12:05

CH19
6 dB Bandwidth

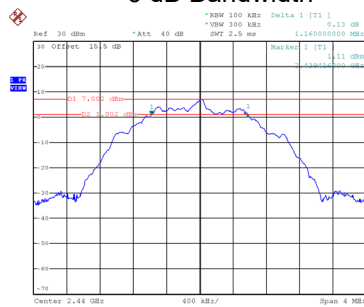


Date: 24.FEB.2026 14:15:05

CH39

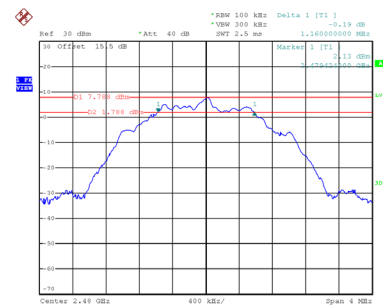


Date: 24.FEB.2026 14:17:08


99 % Occupied Bandwidth

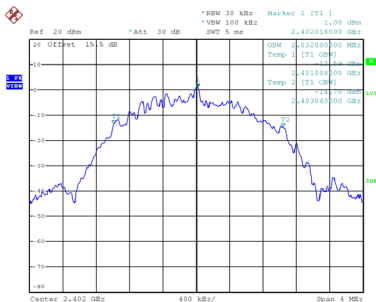

Date: 24.FEB.2026 14:12:16

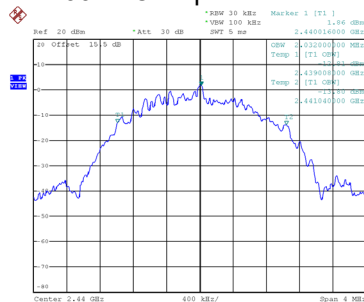

Date: 24.FEB.2026 14:15:16

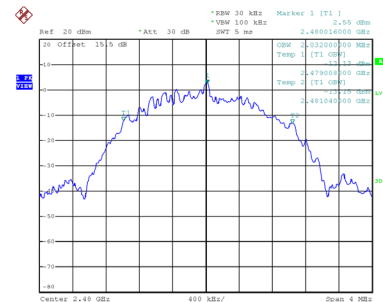


Date: 24.FEB.2026 14:17:19


Test Mode	TX Mode_500kbps(S=2)
-----------	----------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.664	1.016	0.5	Pass
19	2440	0.664	1.016	0.5	Pass
39	2480	0.664	1.016	0.5	Pass

CH00

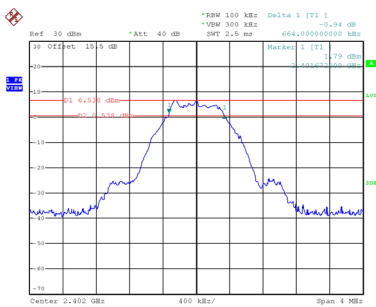


Date: 24.FEB.2026 14:19:31

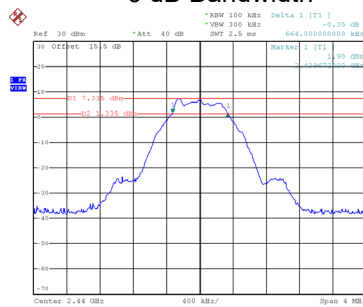CH19
6 dB Bandwidth


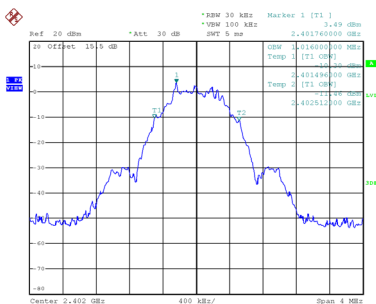
Date: 24.FEB.2026 14:20:58

CH39

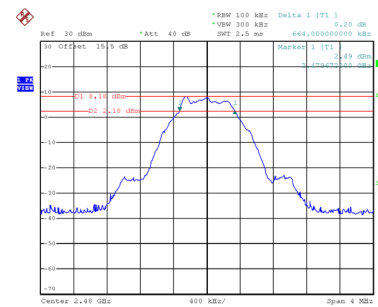


Date: 24.FEB.2026 14:22:26


99 % Occupied Bandwidth



Date: 24.FEB.2026 14:19:42

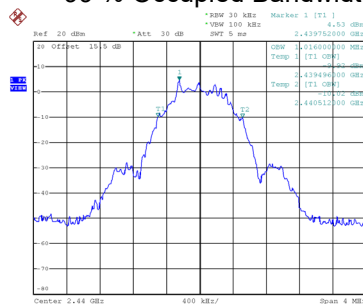

Date: 24.FEB.2026 14:21:09

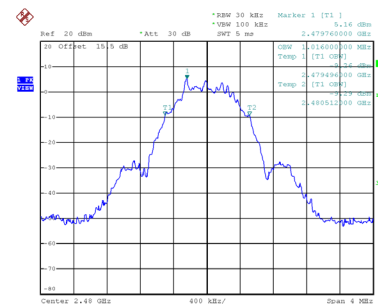


Date: 24.FEB.2026 14:22:37


Test Mode	TX Mode_125kbps(S=8)
-----------	----------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.632	1.048	0.5	Pass
19	2440	0.632	1.048	0.5	Pass
39	2480	0.632	1.048	0.5	Pass

CH00

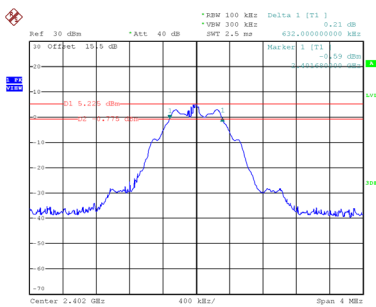


Date: 24.FEB.2026 14:24:06

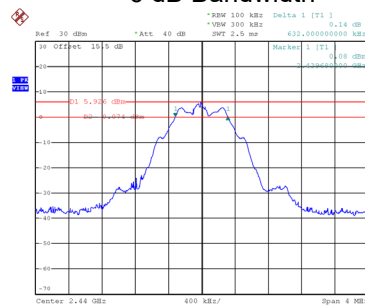CH19
6 dB Bandwidth


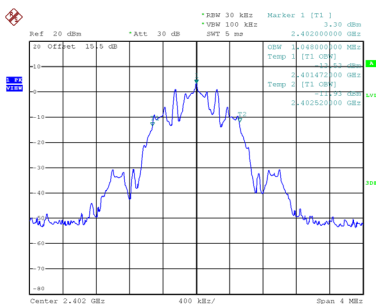
Date: 24.FEB.2026 14:26:01

CH39

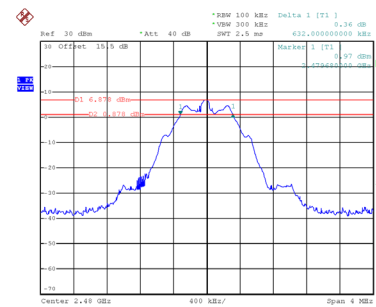


Date: 24.FEB.2026 14:28:03


99 % Occupied Bandwidth



Date: 24.FEB.2026 14:24:16

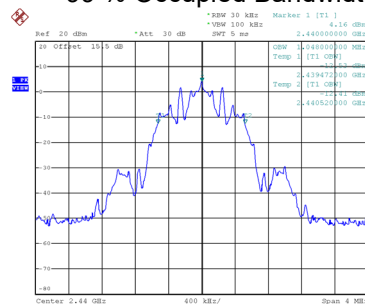

Date: 24.FEB.2026 14:26:12

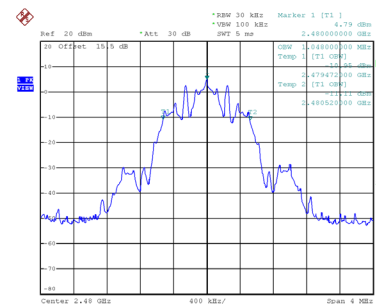


Date: 24.FEB.2026 14:28:14

Right Earphone

Test Mode	TX Mode_1Mbps
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.672	1.032	0.5	Pass
19	2440	0.680	1.040	0.5	Pass
39	2480	0.680	1.032	0.5	Pass

CH00

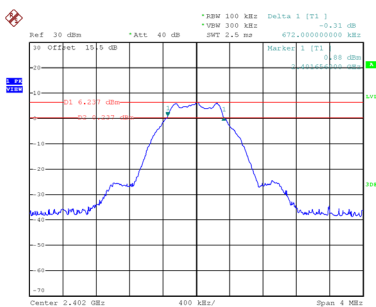


Date: 24.FEB.2026 13:27:52

CH19
6 dB Bandwidth

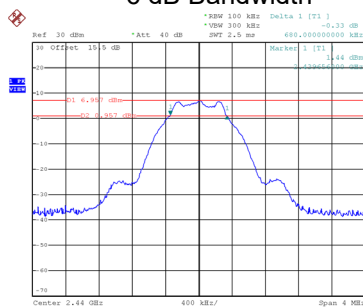


Date: 24.FEB.2026 13:30:19

CH39

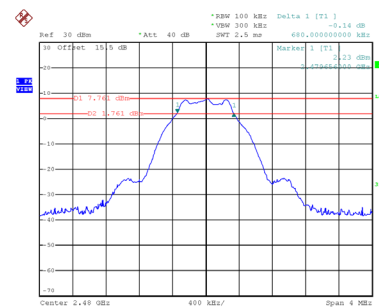


Date: 24.FEB.2026 13:32:10


99 % Occupied Bandwidth

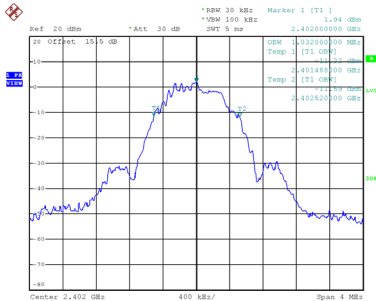

Date: 24.FEB.2026 13:28:02

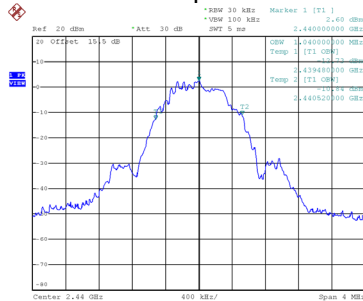

Date: 24.FEB.2026 13:30:30

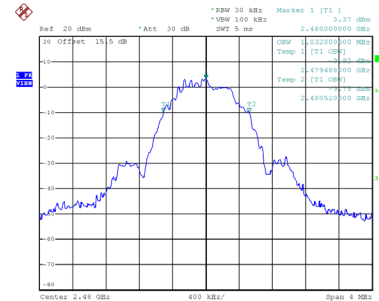

Date: 24.FEB.2026 13:32:21