

Quick Start Guide




K-SPEAKER
K66

BLUETOOTH 4" WEATHER RATED SPEAKER AND AMPLIFIER SYSTEM



KSPEAKER



DYNAMIC LIFE, PLEASING TO THE EAR



WHAT'S IN THE BOX



Remote ControlX2



Bracket ClaspX4



Bracket HolderX2



Bracket GasketX4



Cable TiesX2



Safety SlingX2



U-BoltX2



ScrewsX4



**M6X1 M4X1
M3X1**



**Hexagonal
WrenchX1**




Power CordX1



Nylon tieX20

WIRING

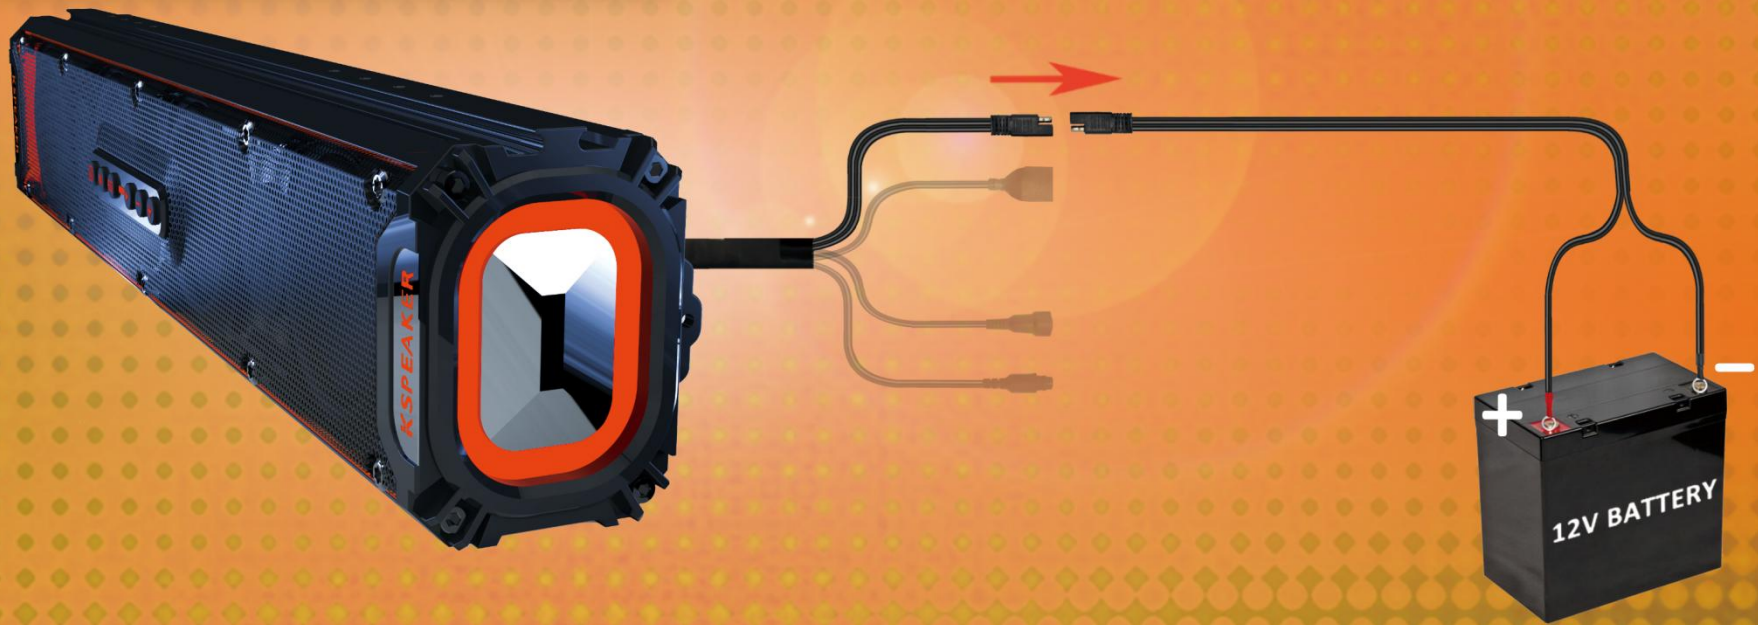

CONTROL



1. Power on/off.

2. Mode switching key:

Short press for Bluetooth/USB/AUX-IN mode switch,
Long press for RGB light mode switch.

3. EQ switch: Rock/Pop/Jazz/Standard 4 EQ mode.

4. Indicator representing the mode:

Bluetooth-Blue light,
USB-port-Orange light,
AUX-IN-Purple light.


5. Quickly switch Bluetooth modes.

Press "BT" button to enter Bluetooth pairing mode,
the mode indicator shows blue and flashing, then
open the Bluetooth function of the phone, search for
Bluetooth devices "K66/K66PULS/K66MAX", click to
connect, after the success of the blue mode indicator
will be lit. At this time, you can open your cell phone
music player software to play music.

6. Short press up to select song,
Long press to reduce volume.


7. Short press down to select song,
Long press to increase volume.

REMOTE

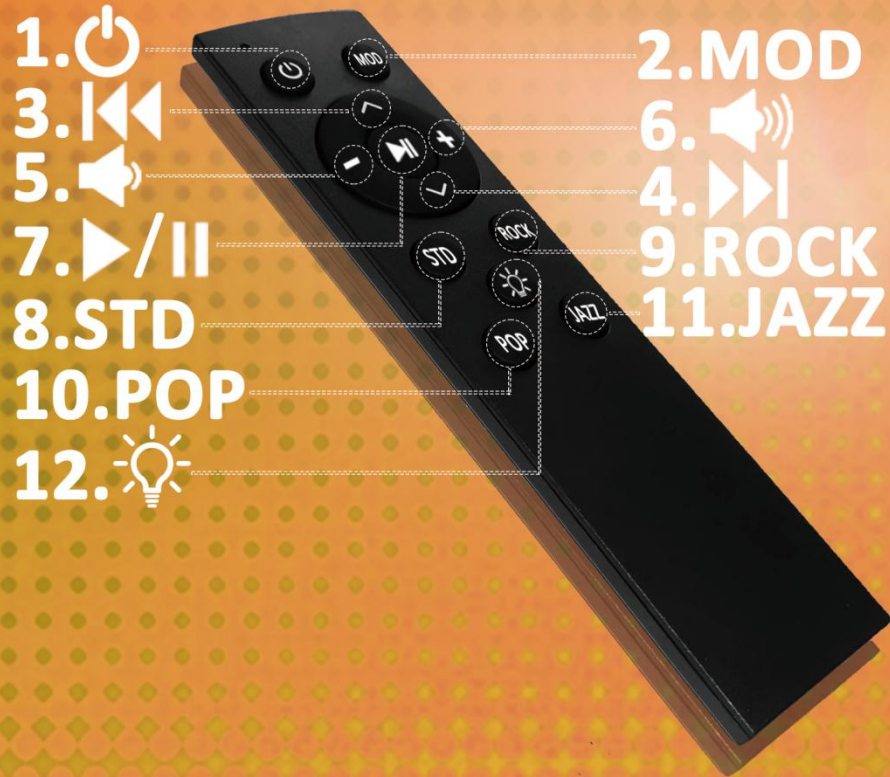

1. Power: Controlling the main unit switch.
2. Mode switching key:
Short press for Bluetooth/USB/AUX-IN mode switch;
Pay attention to the mode indicator light:
Bluetooth-Blue light,
USB-port-Orange light,
AUX-IN-Purple light.
3. Prve: Play the previous song.
4. Next: Play the next song.
5. VOl-: Turn down the volume output.
6. VOl+: Turn up the volume output.
7. Play/Stop:
Bluetooth/USB mode press to pause/play;
AUX-IN mode press to mute.
8. EQ-Standard model.
9. EQ-Rock model.
10. EQ-Pop model.
11. EQ-Jazz mode.
12. Short press to convert RGB light mode,
Long press to turn off RGB light,
Double click to turn on RGB light.

INTERFACE

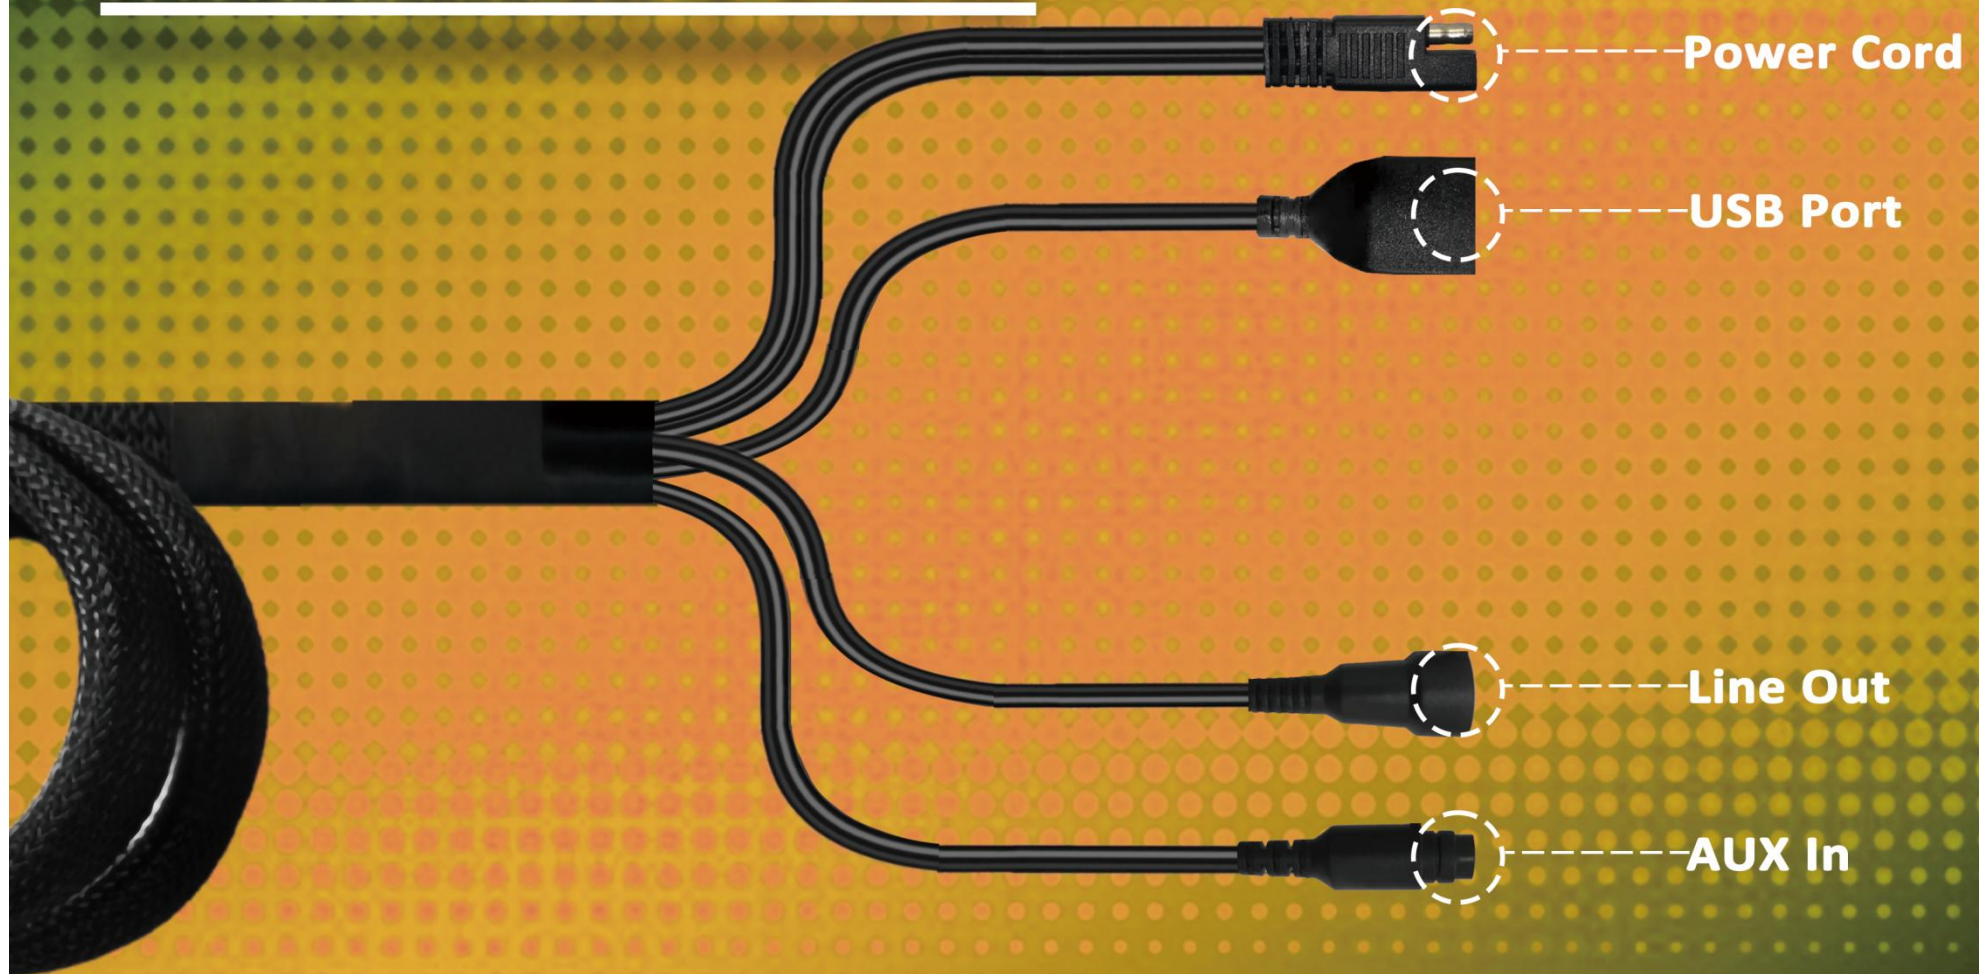

INSTALL





TECHNICAL PARAMETERS

Operating voltage-----10.5V-16V

Standby current-----<3mA

THD-----<1%

Maximum Current Draw-----8A/16A(PLUS)/20A(MAX)

S/N----->80dB

Frequency response -----60Hz-20kHz/45Hz-20kHz(PLUS/MAX)

Bluetooth connection distance----->32.8ft(10m)

RCA-OUT-----<45Hz-20kHz



The logo for KSPEAKER, featuring an orange stylized 'K' icon followed by the word 'KSPEAKER' in white uppercase letters.

KSPEAKER

A cinematic winter scene at night. In the center, a bright campfire burns, casting a warm orange glow. Four people in winter gear are sitting in a circle on the snow, facing the fire. To the right, a dark-colored SUV with its headlights on is parked in the snow. The background is a dark forest of snow-covered evergreen trees. The entire scene is filled with a soft, out-of-focus bokeh of light particles, giving it a magical, ethereal feel.

DYNAMIC LIFE, PLEASING TO THE EAR

www.Kspekaer.com

**If you have any issues or are unsatisfied
with the product, please contact us at**

VIP@KSPEAKER.COM

**Unauthorized returns without prior
contact will not be eligible for a refund.**

FCC Warning:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.