



03 Peak-to-Average Ratio

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Result (dB)	high Limit (dB)	Verdict
Band41(2535-2655)	5	40065	1	#0	QPSK	9.61	13	PASS
Band41(2535-2655)	5	40065	1	#0	16QAM	8.56	13	PASS
Band41(2535-2655)	5	40640	1	#0	QPSK	7.98	13	PASS
Band41(2535-2655)	5	40640	1	#0	16QAM	7.08	13	PASS
Band41(2535-2655)	5	41215	1	#0	QPSK	8.21	13	PASS
Band41(2535-2655)	5	41215	1	#0	16QAM	8.07	13	PASS
Band41(2535-2655)	10	40090	1	#0	QPSK	9.53	13	PASS
Band41(2535-2655)	10	40090	1	#0	16QAM	9.46	13	PASS
Band41(2535-2655)	10	40640	1	#0	QPSK	9.48	13	PASS
Band41(2535-2655)	10	40640	1	#0	16QAM	8.34	13	PASS
Band41(2535-2655)	10	41190	1	#0	QPSK	8.30	13	PASS
Band41(2535-2655)	10	41190	1	#0	16QAM	9.75	13	PASS
Band41(2535-2655)	15	40115	1	#0	QPSK	9.69	13	PASS
Band41(2535-2655)	15	40115	1	#0	16QAM	9.62	13	PASS
Band41(2535-2655)	15	40640	1	#0	QPSK	8.05	13	PASS
Band41(2535-2655)	15	40640	1	#0	16QAM	7.49	13	PASS
Band41(2535-2655)	15	41165	1	#0	QPSK	7.88	13	PASS
Band41(2535-2655)	15	41165	1	#0	16QAM	9.56	13	PASS
Band41(2535-2655)	20	40140	1	#0	QPSK	9.41	13	PASS
Band41(2535-2655)	20	40140	1	#0	16QAM	7.57	13	PASS
Band41(2535-2655)	20	40640	1	#0	QPSK	8.70	13	PASS
Band41(2535-2655)	20	40640	1	#0	16QAM	10.63	13	PASS
Band41(2535-2655)	20	41140	1	#0	QPSK	9.33	13	PASS
Band41(2535-2655)	20	41140	1	#0	16QAM	9.45	13	PASS


Band41(2535-2655) 16QAM BW=10MHz Channel=40090 RB Size=1 Position=#0

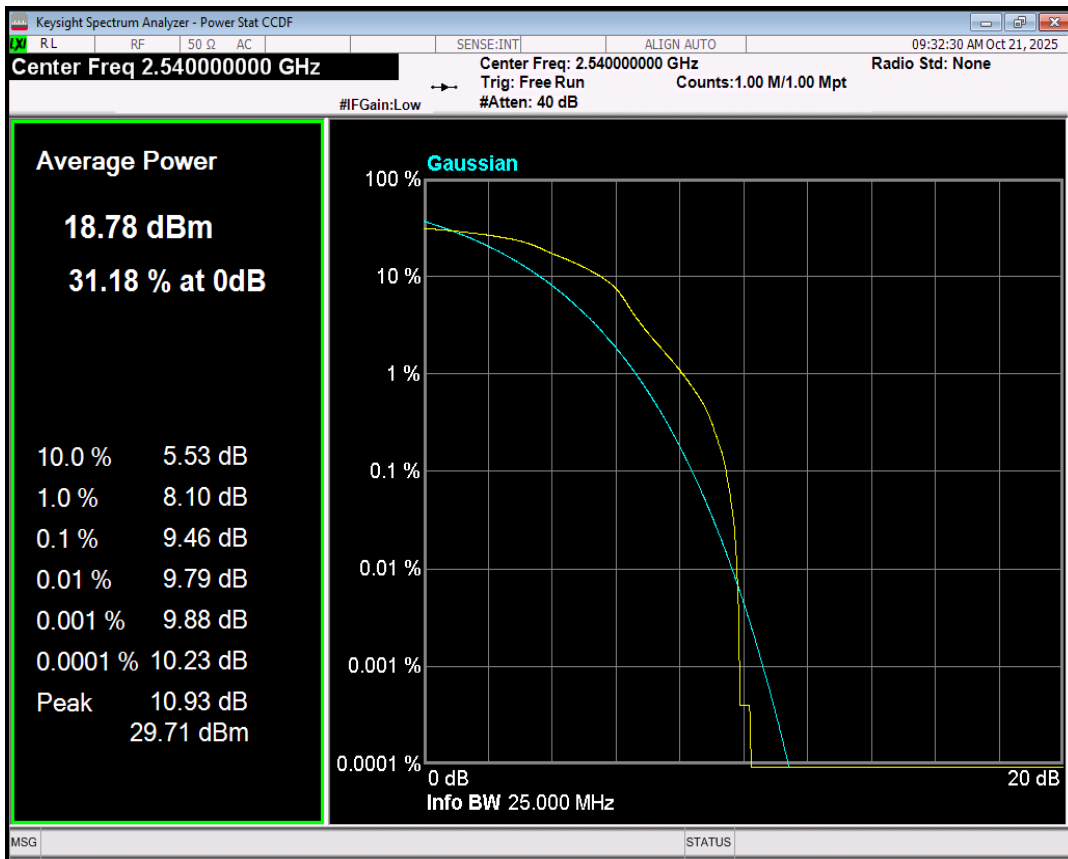


Band41(2535-2655) 16QAM BW=10MHz Channel=40640 RB Size=1 Position=#0

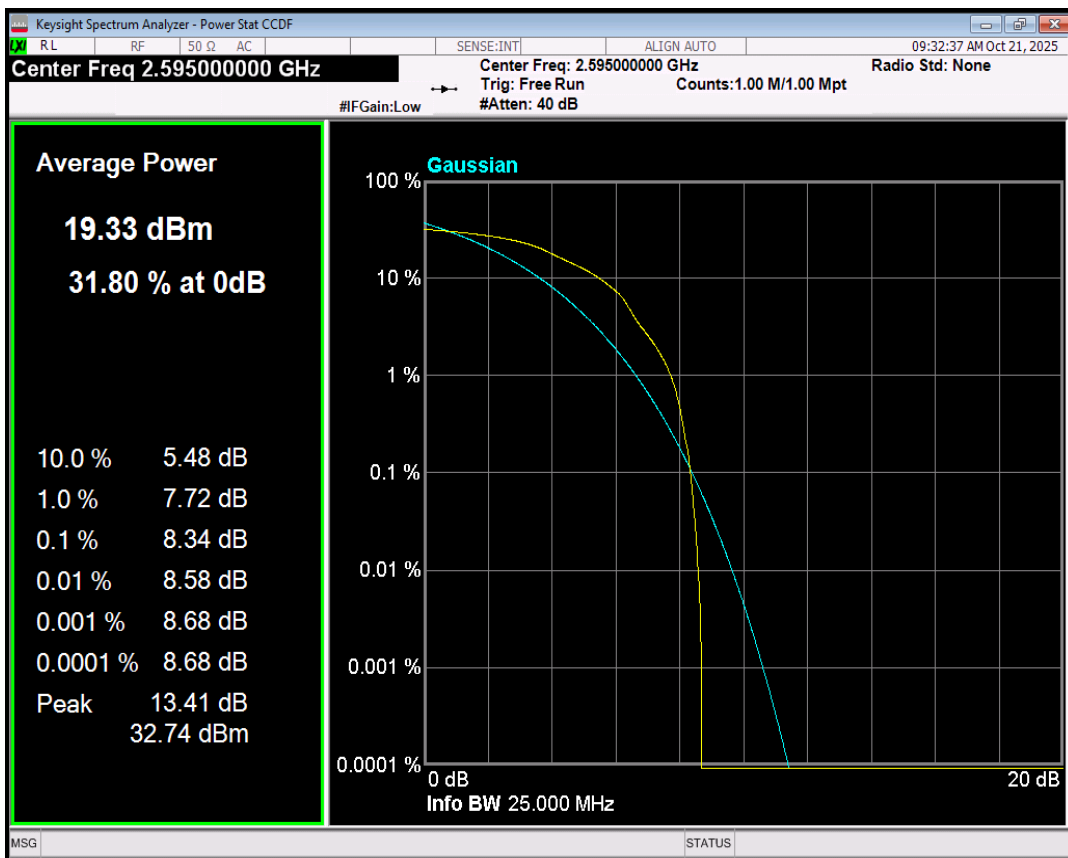


Band41(2535-2655) 16QAM BW=10MHz Channel=41190 RB Size=1 Position=#0

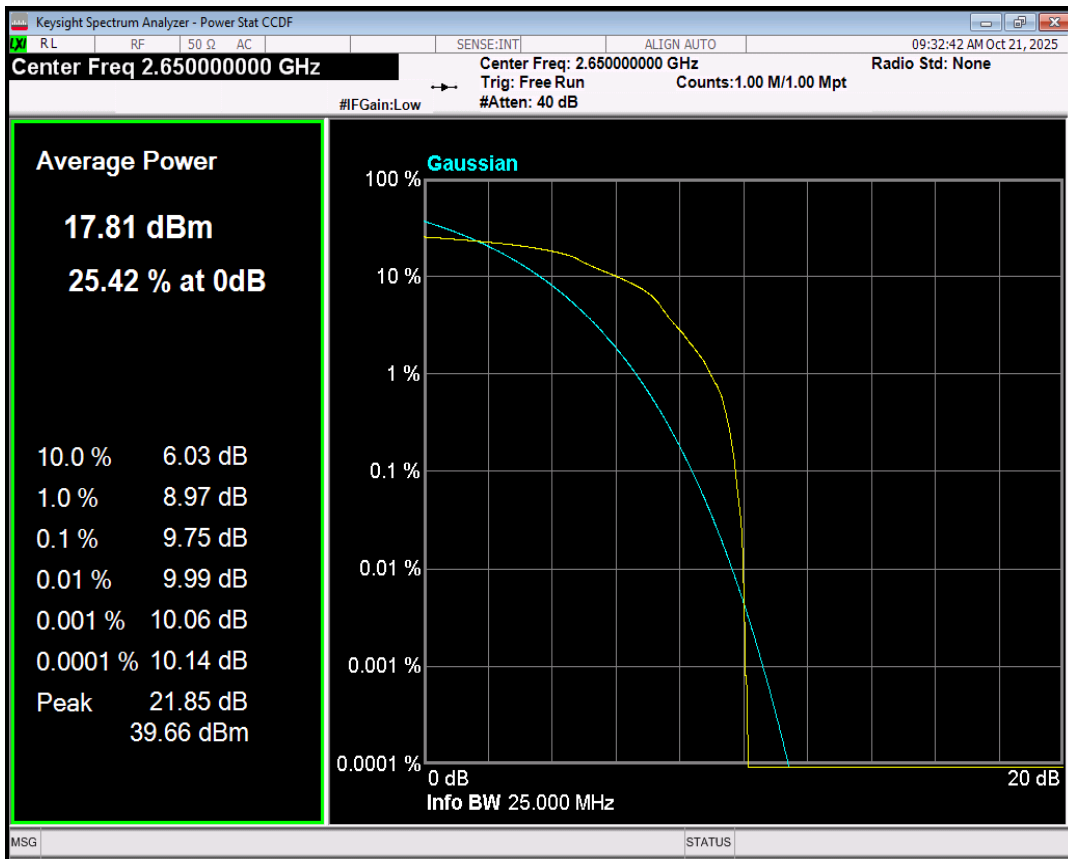


Band41(2535-2655) 16QAM BW=15MHz Channel=40115 RB Size=1 Position=#0

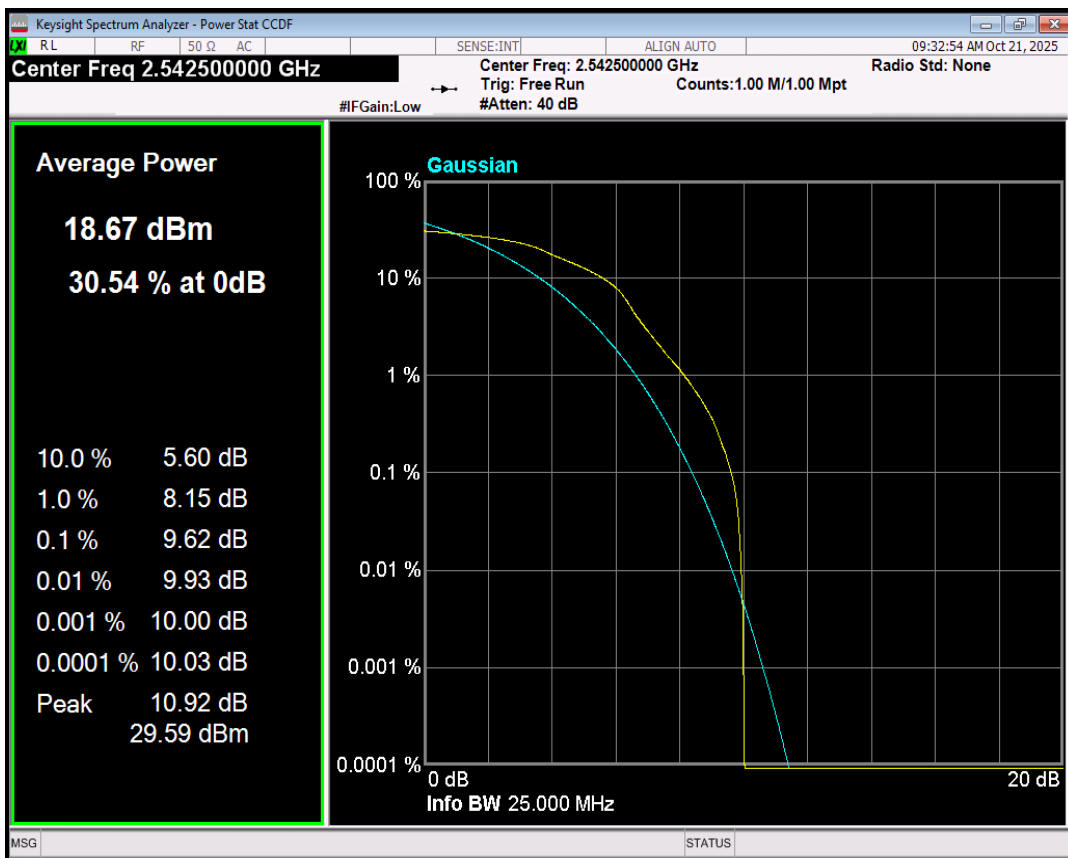


Band41(2535-2655) 16QAM BW=15MHz Channel=40640 RB Size=1 Position=#0

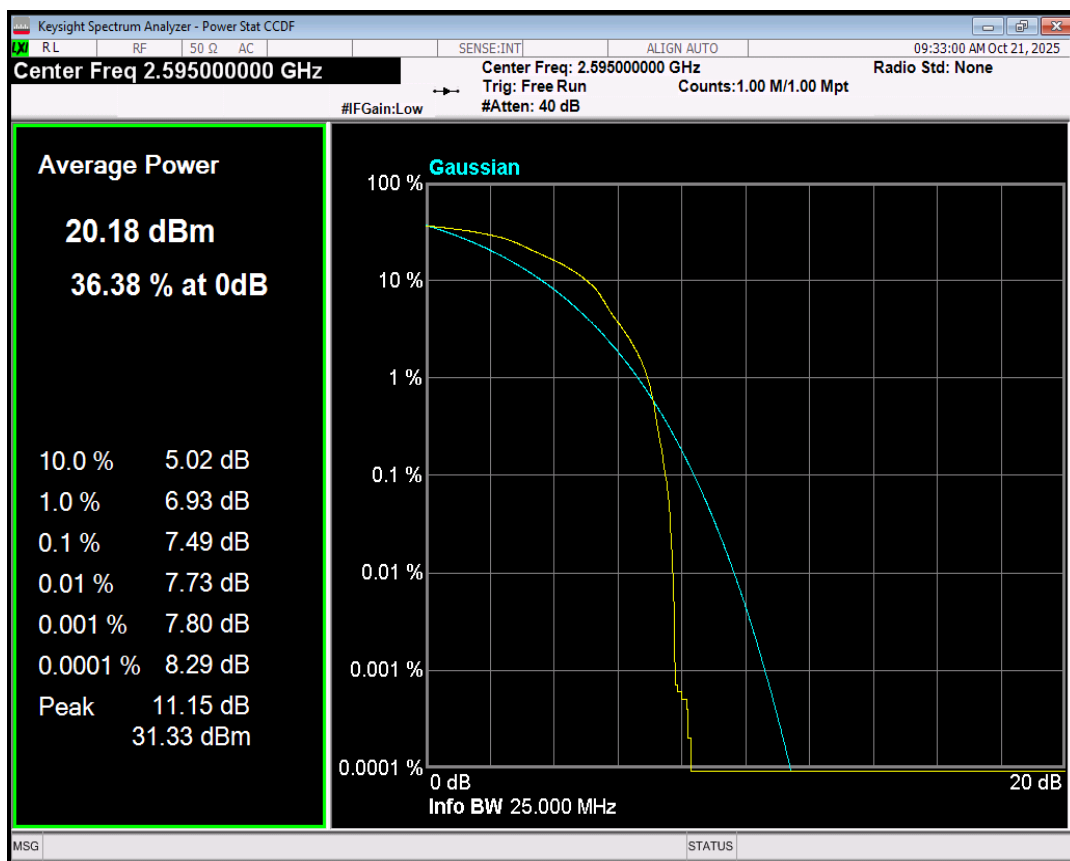


Band41(2535-2655) 16QAM BW=15MHz Channel=41165 RB Size=1 Position=#0

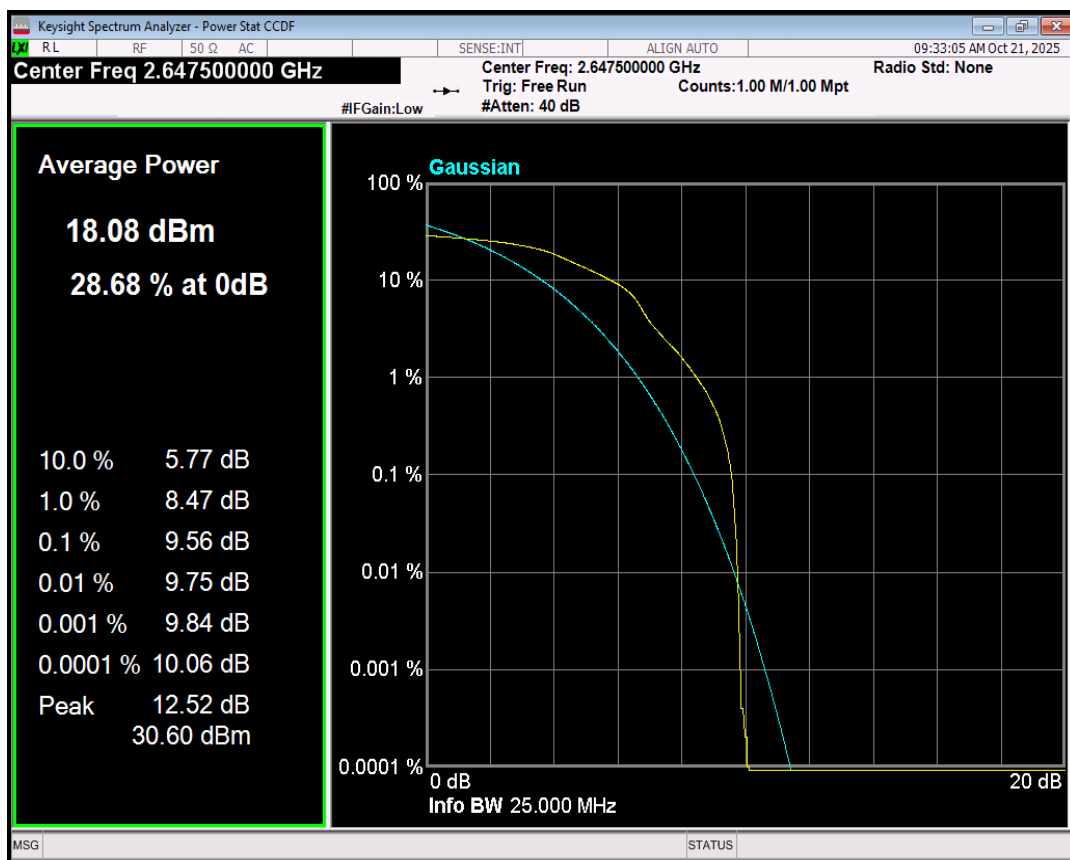


Band41(2535-2655) 16QAM BW=20MHz Channel=40140 RB Size=1 Position=#0

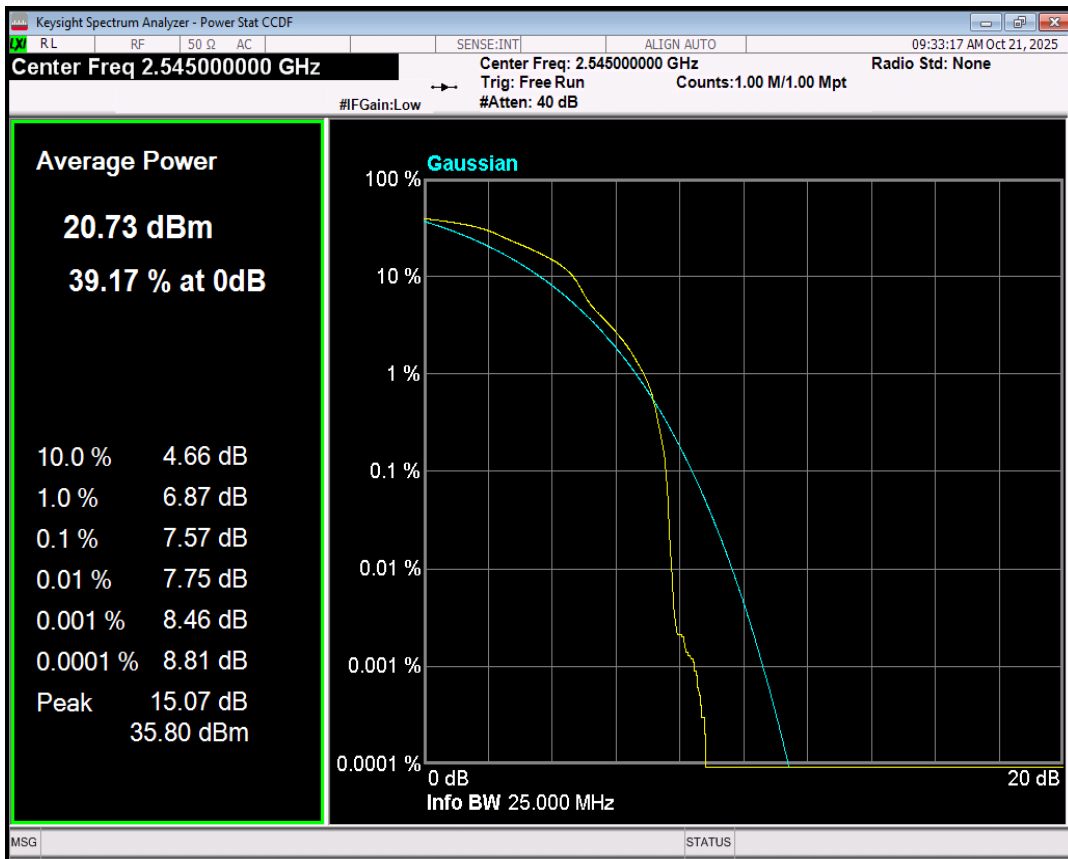


Band41(2535-2655) 16QAM BW=20MHz Channel=40640 RB Size=1 Position=#0

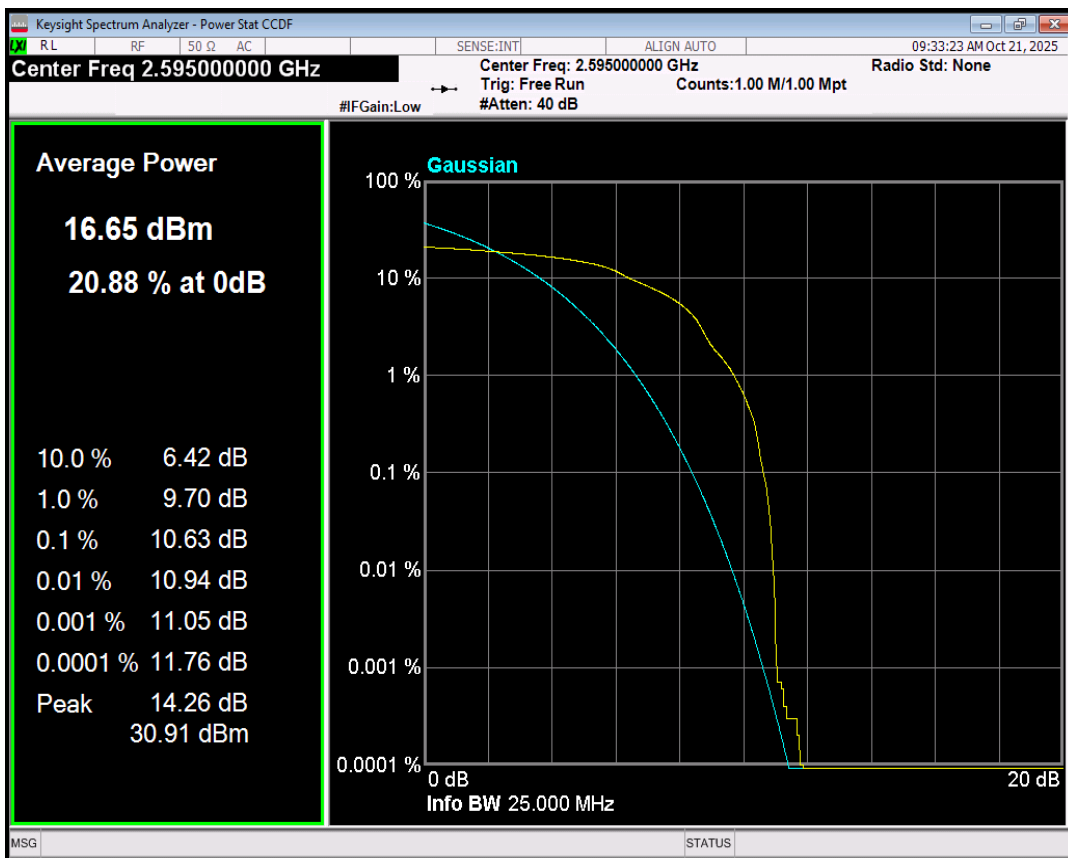


Band41(2535-2655) 16QAM BW=20MHz Channel=41140 RB Size=1 Position=#0

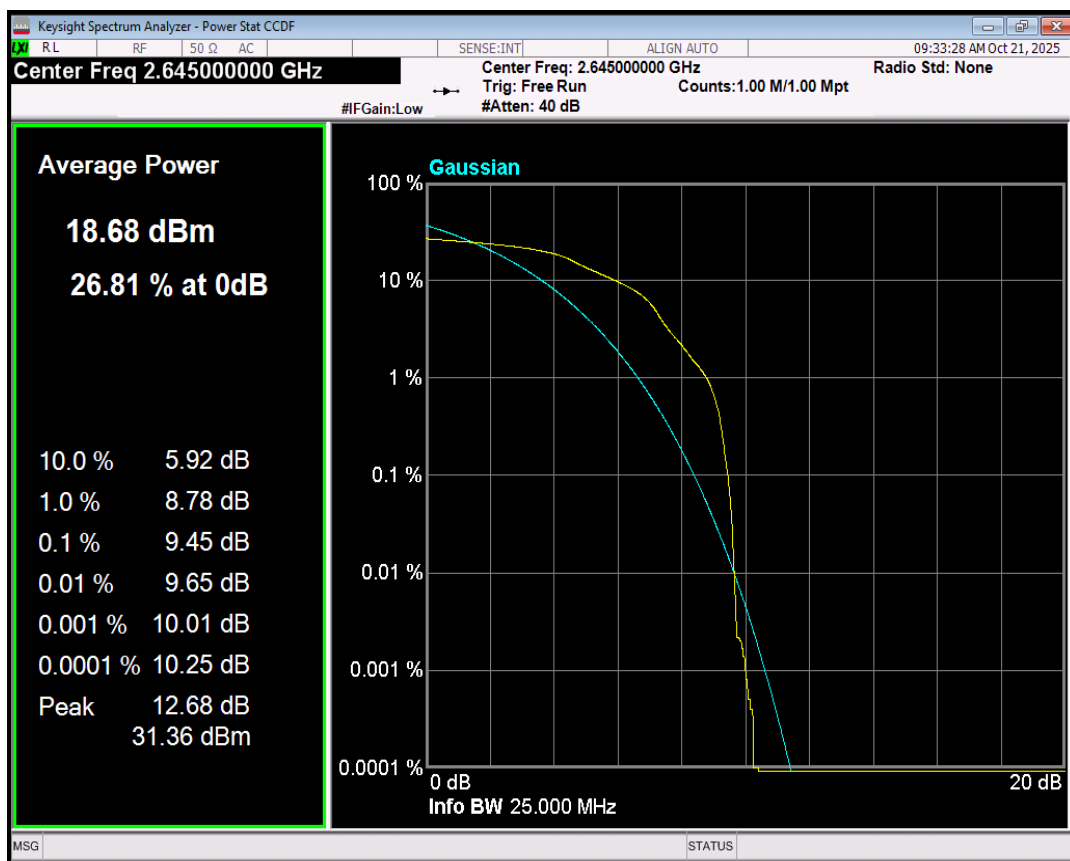


Band41(2535-2655) 16QAM BW=5MHz Channel=40640 RB Size=1 Position=#0

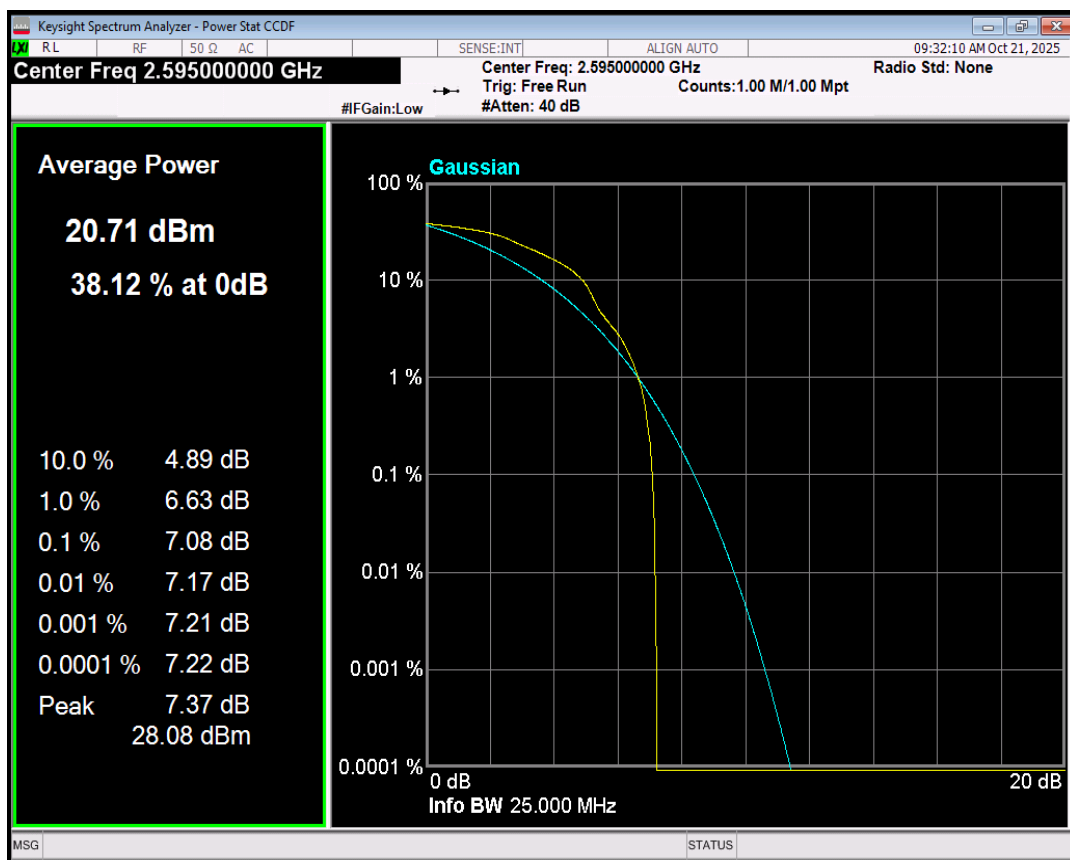


Band41(2535-2655) 16QAM BW=5MHz Channel=41215 RB Size=1 Position=#0

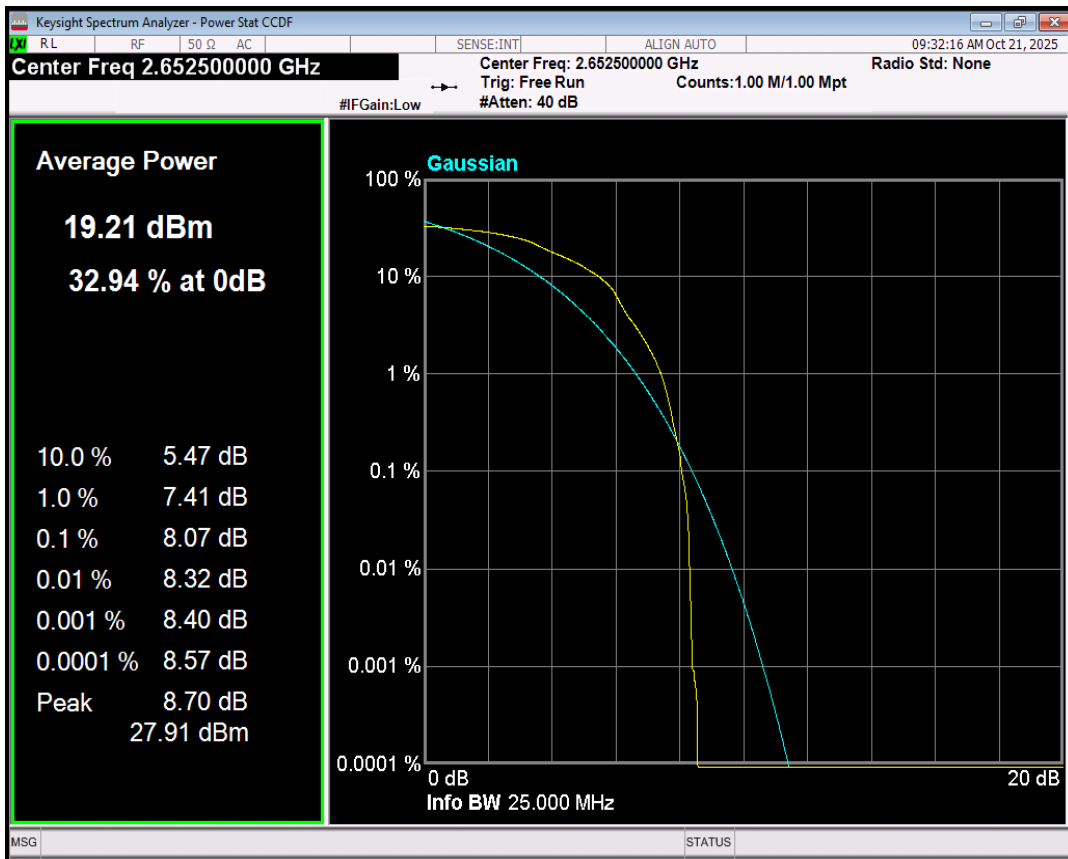


Band41(2535-2655) 16QAM BW=5MHz Channel=40065 RB Size=1 Position=#0

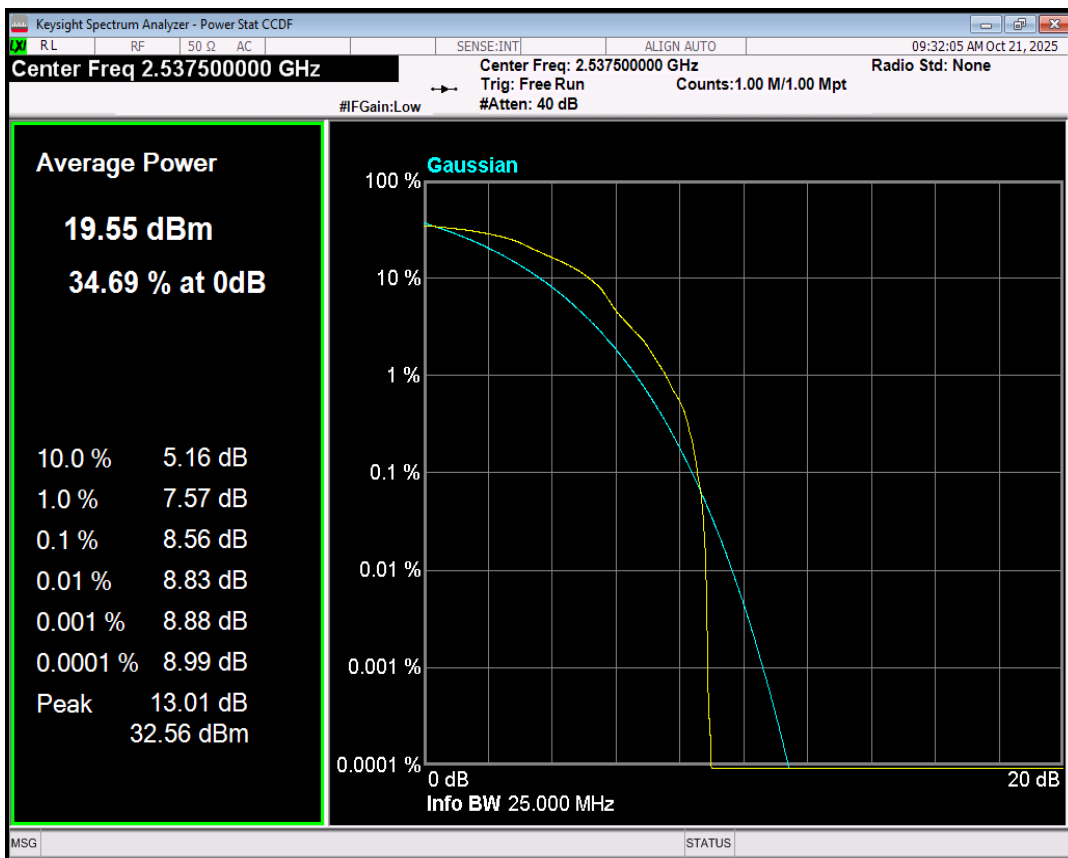


Band41(2535-2655) QPSK BW=10MHz Channel=40090 RB Size=1 Position=#0

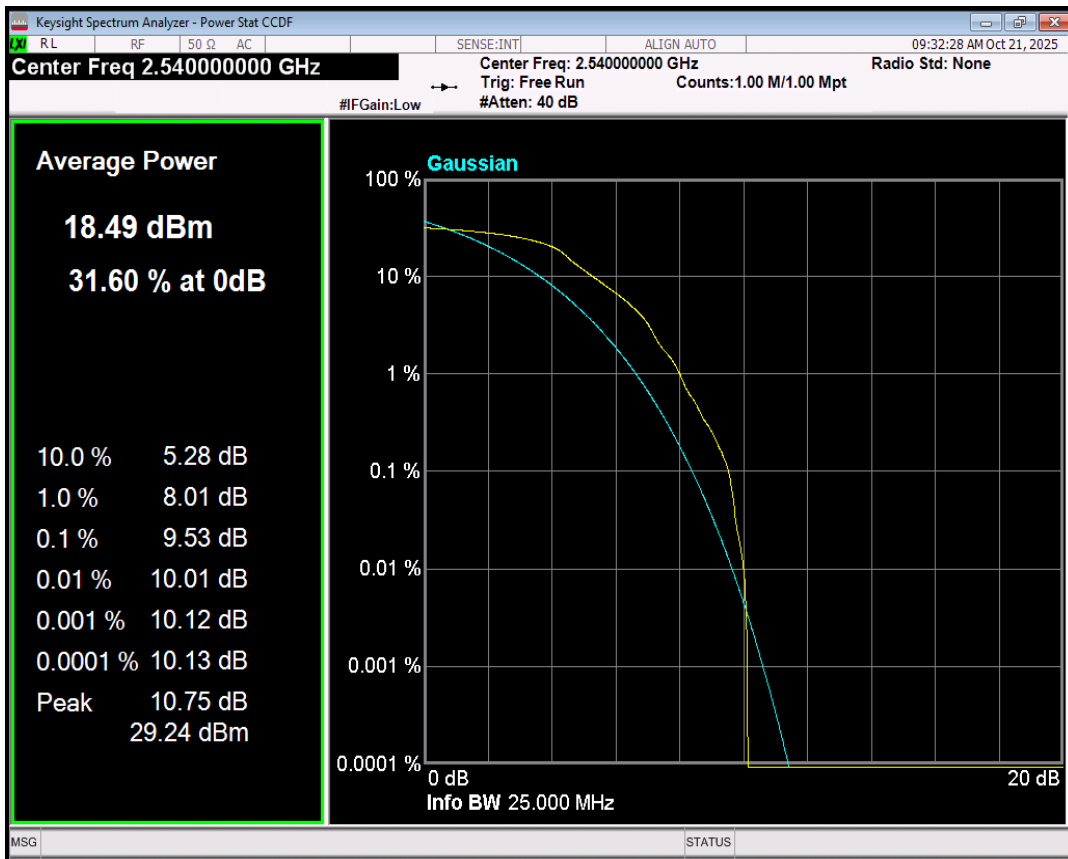


Band41(2535-2655) QPSK BW=10MHz Channel=40640 RB Size=1 Position=#0

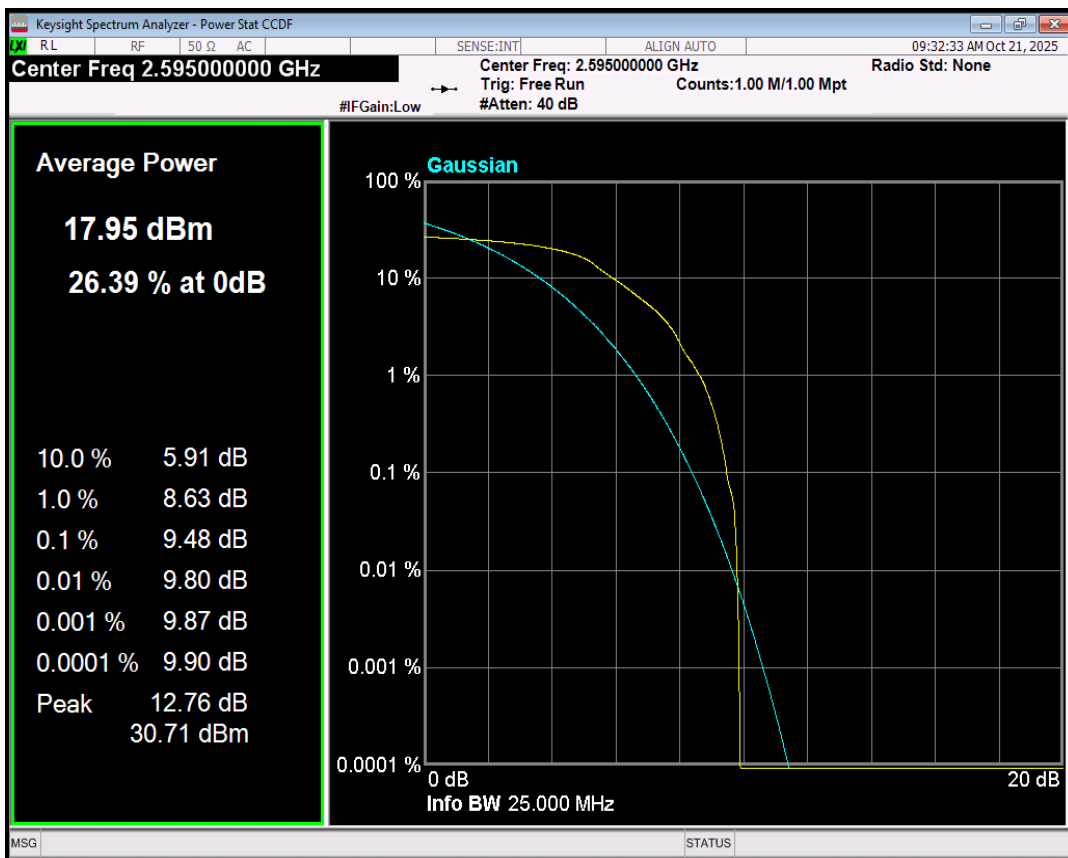


Band41(2535-2655) QPSK BW=10MHz Channel=41190 RB Size=1 Position=#0

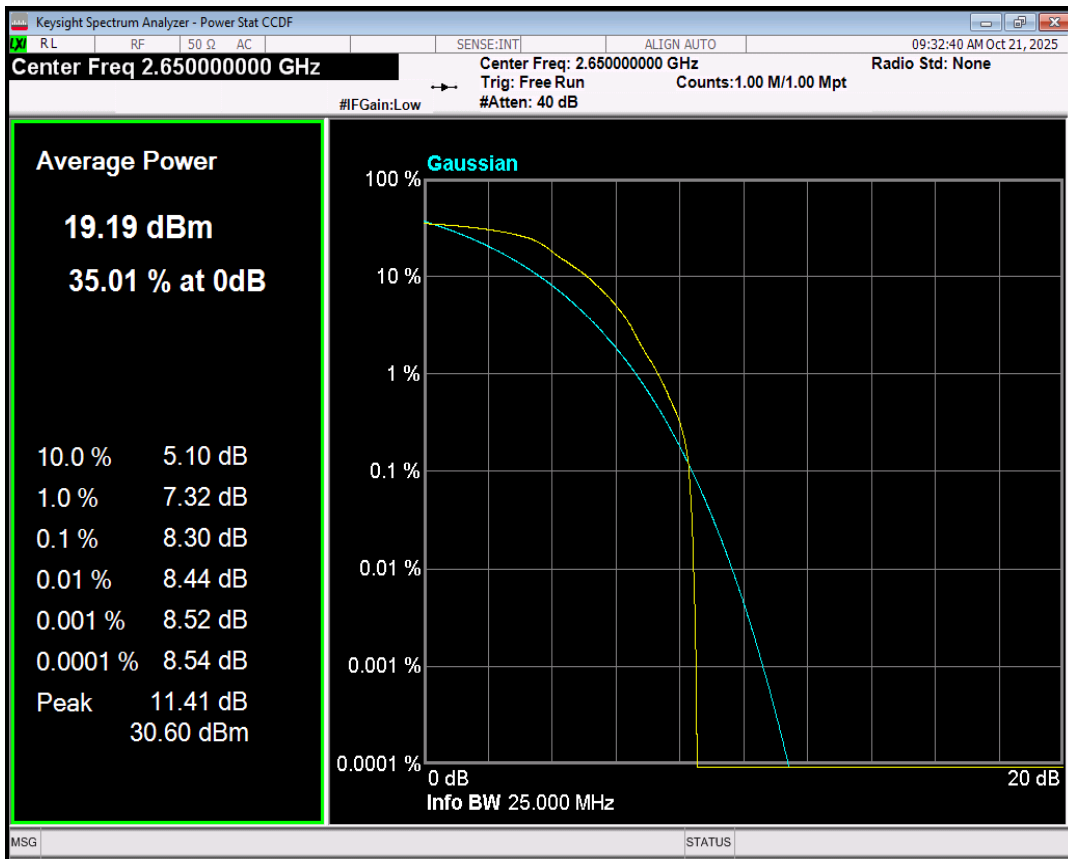


Band41(2535-2655) QPSK BW=15MHz Channel=40115 RB Size=1 Position=#0

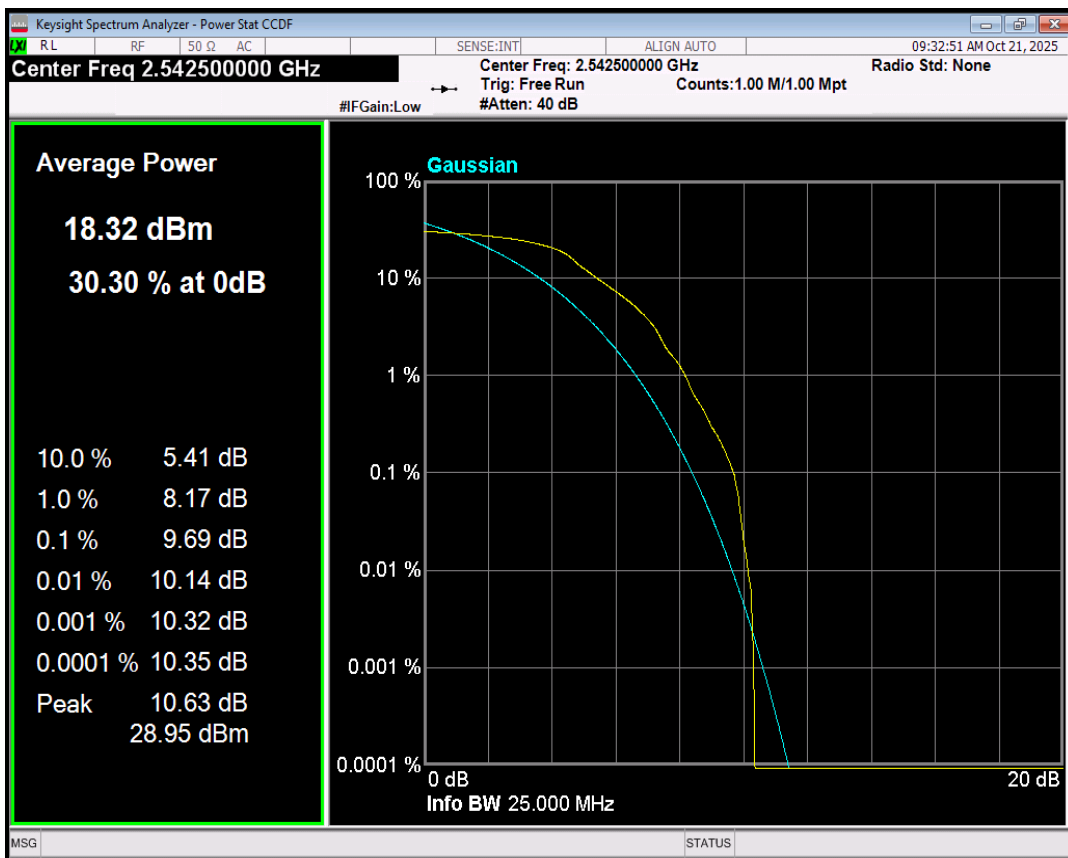


Band41(2535-2655) QPSK BW=15MHz Channel=40640 RB Size=1 Position=#0

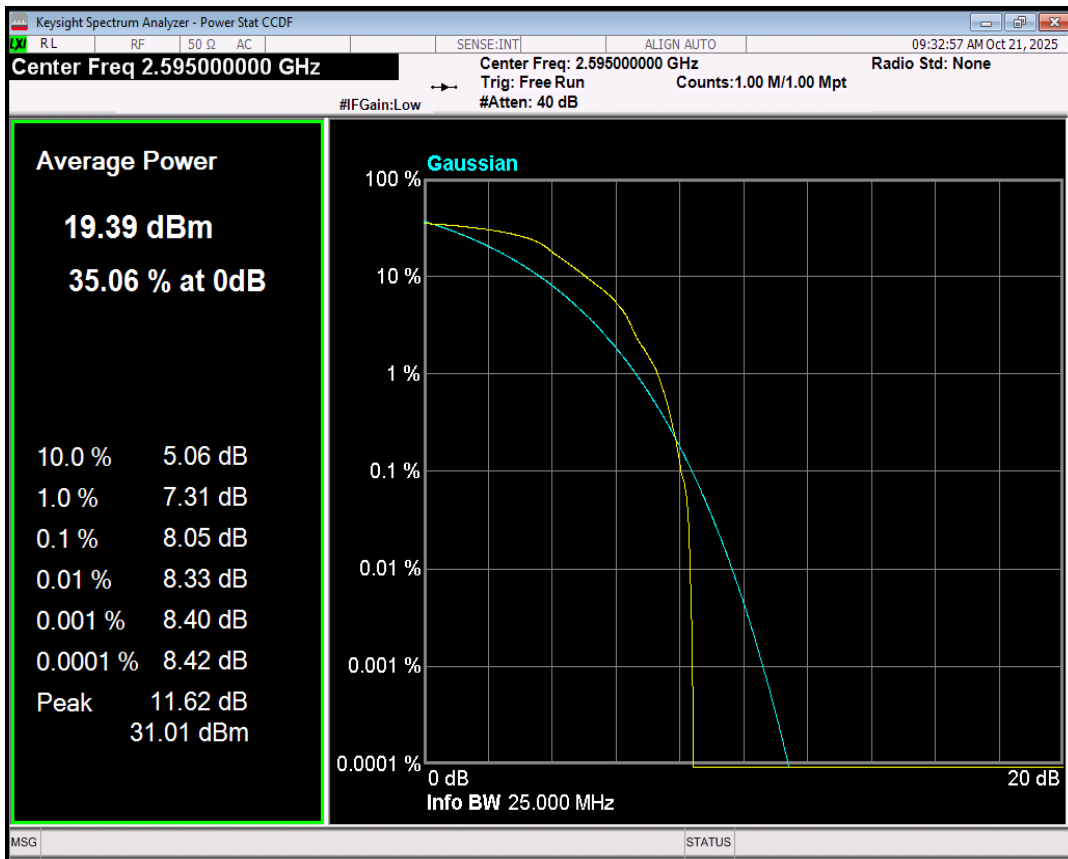


Band41(2535-2655) QPSK BW=15MHz Channel=41165 RB Size=1 Position=#0

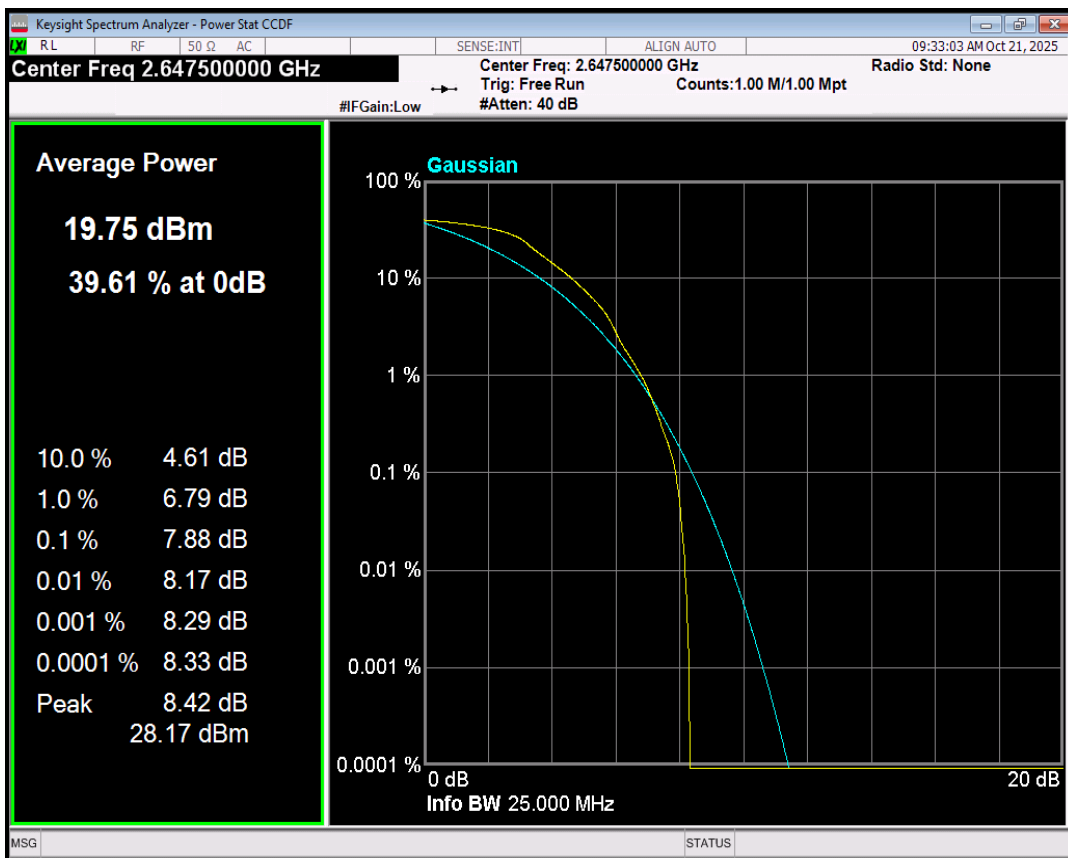


Band41(2535-2655) QPSK BW=20MHz Channel=40140 RB Size=1 Position=#0

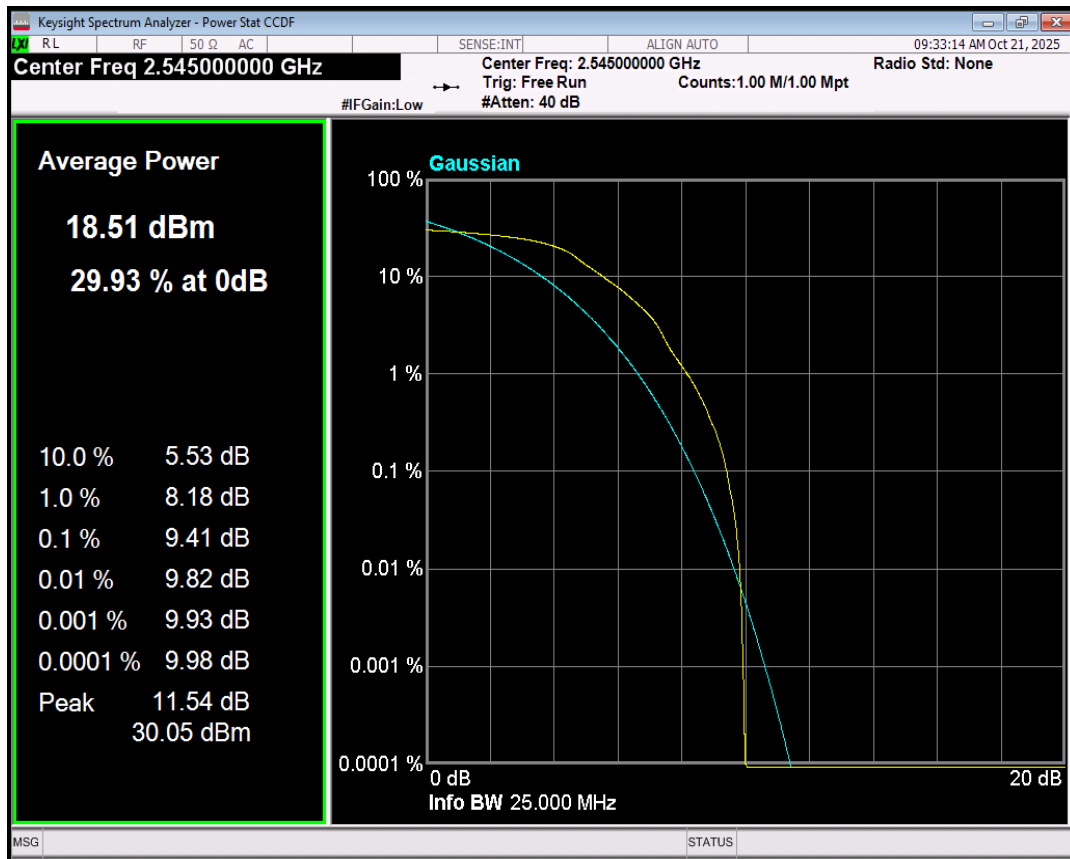


Band41(2535-2655) QPSK BW=20MHz Channel=40640 RB Size=1 Position=#0

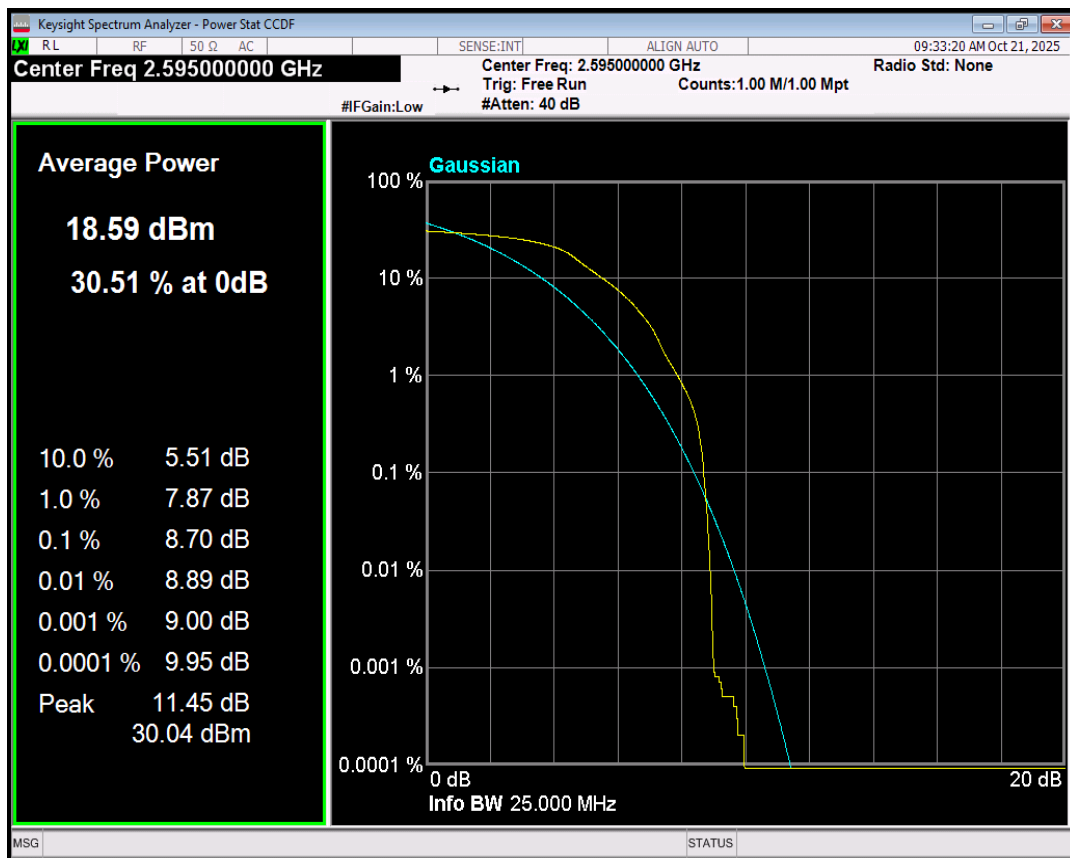


Band41(2535-2655) QPSK BW=20MHz Channel=41140 RB Size=1 Position=#0

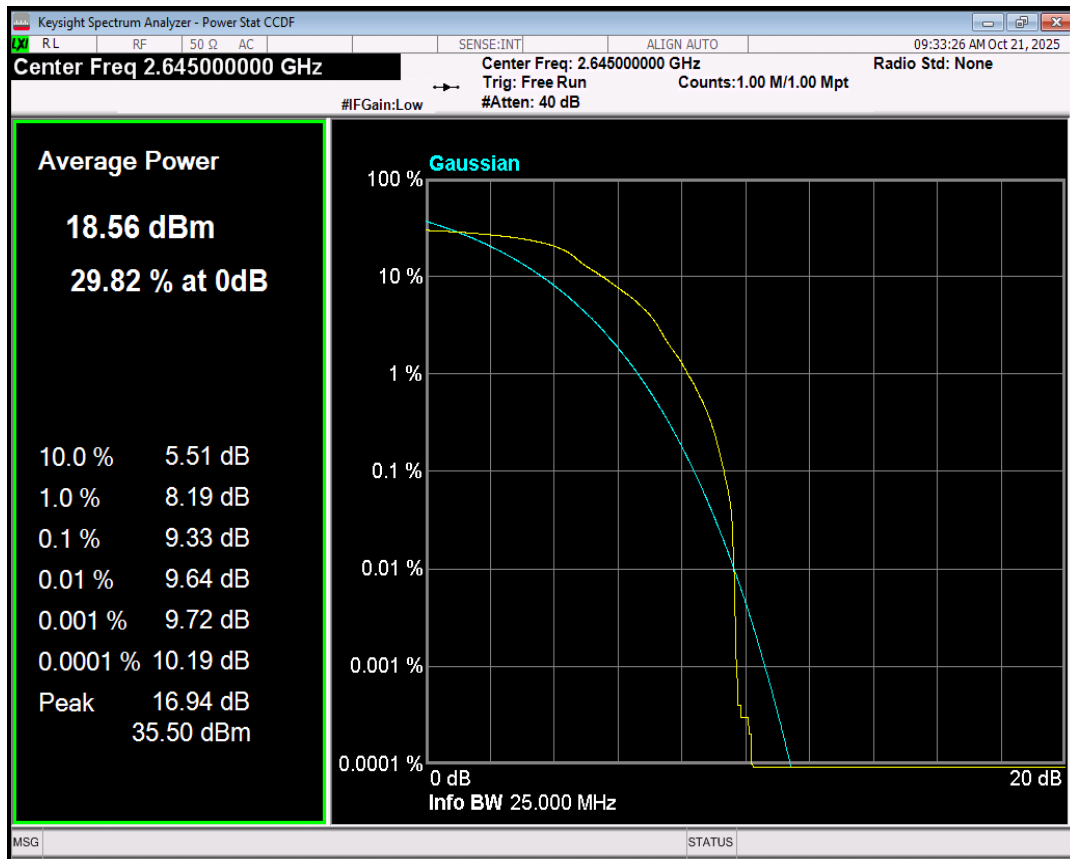


Band41(2535-2655) QPSK BW=5MHz Channel=40065 RB Size=1 Position=#0

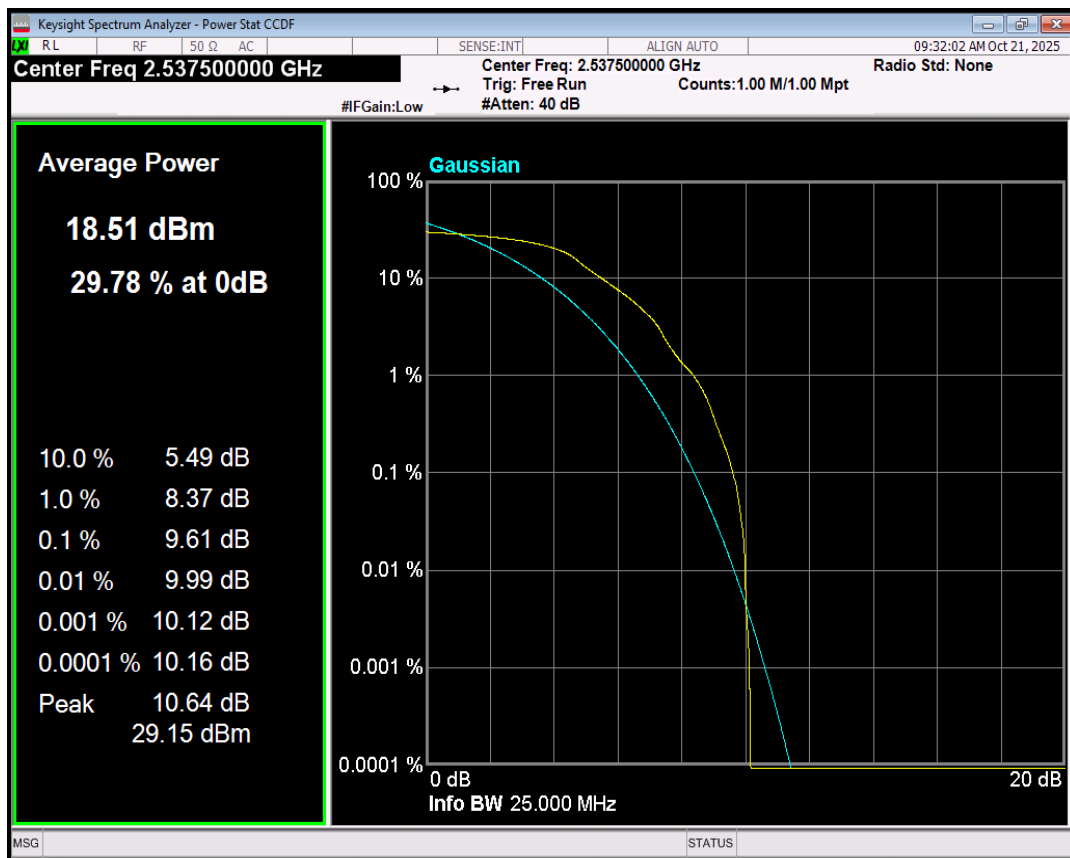

Band41(2535-2655) QPSK BW=5MHz Channel=40640 RB Size=1 Position=#0

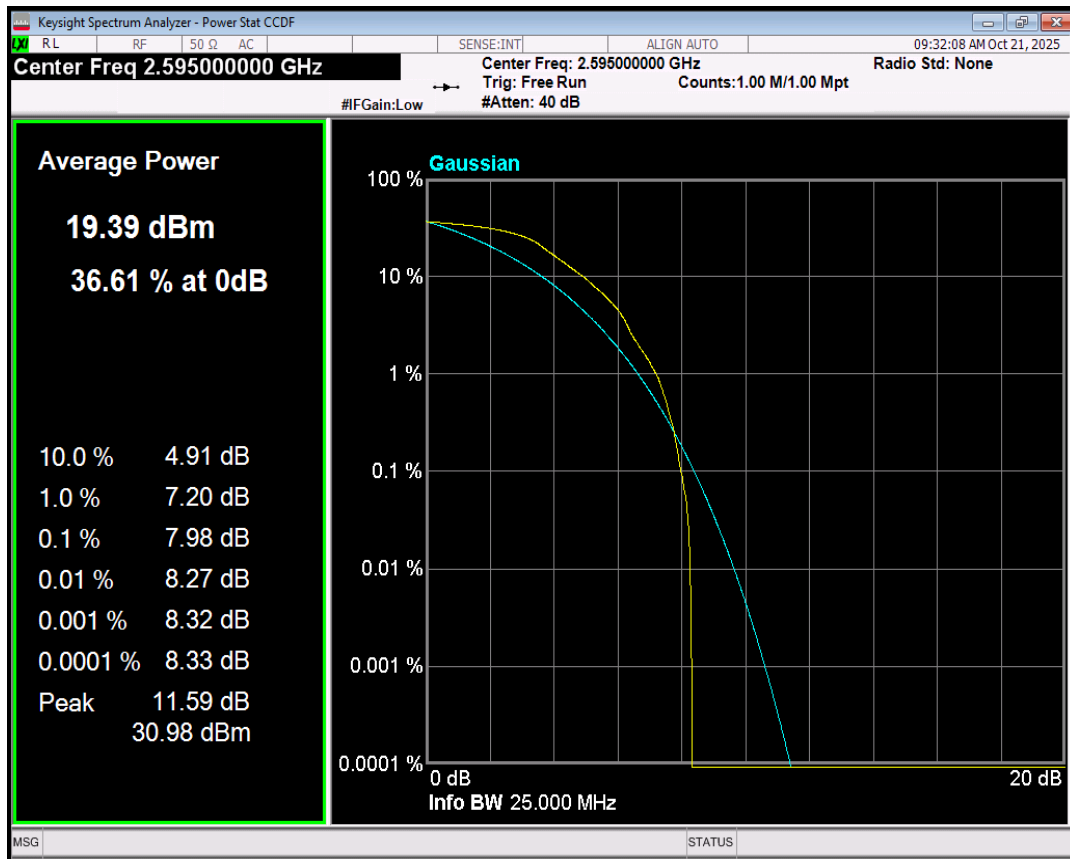


Band41(2535-2655) QPSK BW=5MHz Channel=41215 RB Size=1 Position=#0

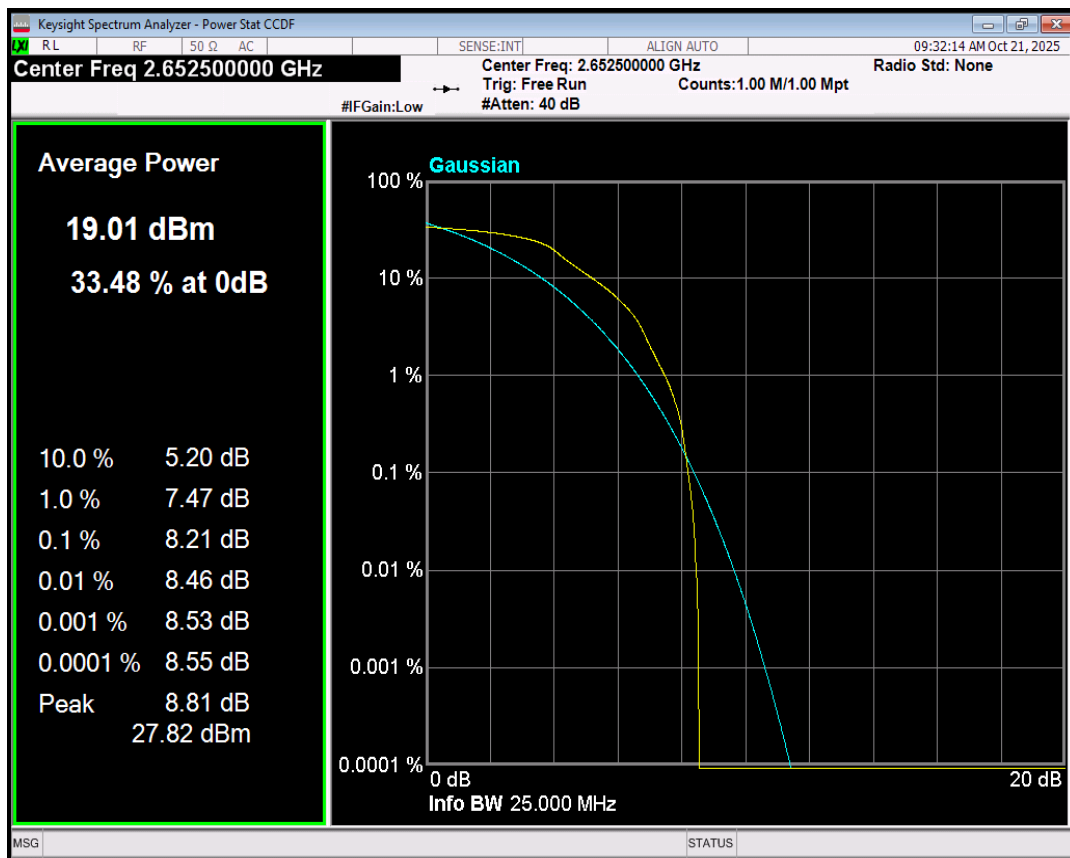


04 Occupied bandwidth

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
Band41(2535-2655)	5	40065	25	#0	QPSK	4.503	4.942	PASS
Band41(2535-2655)	5	40065	25	#0	16QAM	4.521	4.890	PASS
Band41(2535-2655)	5	40640	25	#0	QPSK	4.497	4.915	PASS
Band41(2535-2655)	5	40640	25	#0	16QAM	4.519	5.158	PASS
Band41(2535-2655)	5	41215	25	#0	QPSK	4.504	4.888	PASS
Band41(2535-2655)	5	41215	25	#0	16QAM	4.504	4.898	PASS
Band41(2535-2655)	10	40090	50	#0	QPSK	8.985	9.799	PASS
Band41(2535-2655)	10	40090	50	#0	16QAM	9.014	9.832	PASS
Band41(2535-2655)	10	40640	50	#0	QPSK	8.994	9.839	PASS
Band41(2535-2655)	10	40640	50	#0	16QAM	8.964	9.652	PASS
Band41(2535-2655)	10	41190	50	#0	QPSK	8.975	9.670	PASS
Band41(2535-2655)	10	41190	50	#0	16QAM	9.003	10.045	PASS
Band41(2535-2655)	15	40115	75	#0	QPSK	13.475	14.482	PASS
Band41(2535-2655)	15	40115	75	#0	16QAM	13.473	14.773	PASS
Band41(2535-2655)	15	40640	75	#0	QPSK	13.467	14.686	PASS
Band41(2535-2655)	15	40640	75	#0	16QAM	13.456	14.695	PASS
Band41(2535-2655)	15	41165	75	#0	QPSK	13.477	14.959	PASS
Band41(2535-2655)	15	41165	75	#0	16QAM	13.498	14.664	PASS
Band41(2535-2655)	20	40140	100	#0	QPSK	17.994	19.454	PASS
Band41(2535-2655)	20	40140	100	#0	16QAM	17.999	19.545	PASS
Band41(2535-2655)	20	40640	100	#0	QPSK	17.962	19.758	PASS
Band41(2535-2655)	20	40640	100	#0	16QAM	17.952	19.296	PASS
Band41(2535-2655)	20	41140	100	#0	QPSK	17.934	19.411	PASS
Band41(2535-2655)	20	41140	100	#0	16QAM	17.993	20.378	PASS


Band41(2535-2655) 16QAM BW=10MHz Channel=40090 RB Size=50 Position=#0

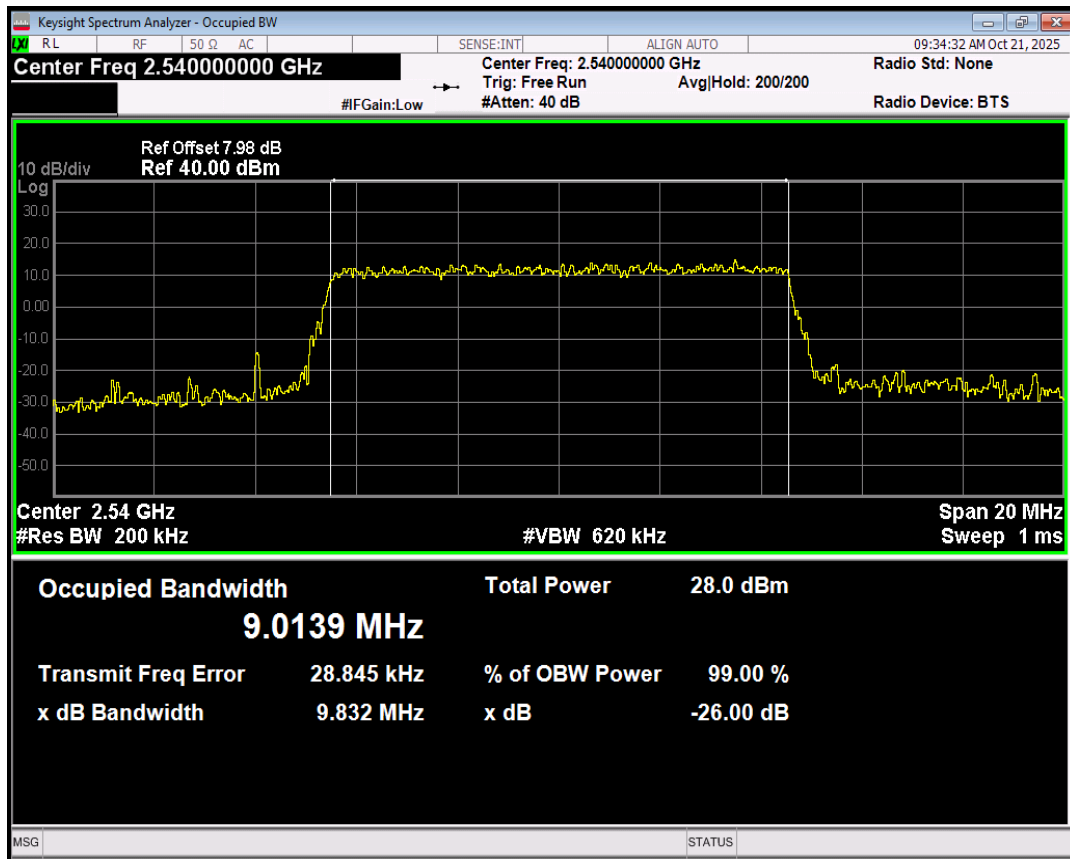


Band41(2535-2655) 16QAM BW=10MHz Channel=40640 RB Size=50 Position=#0

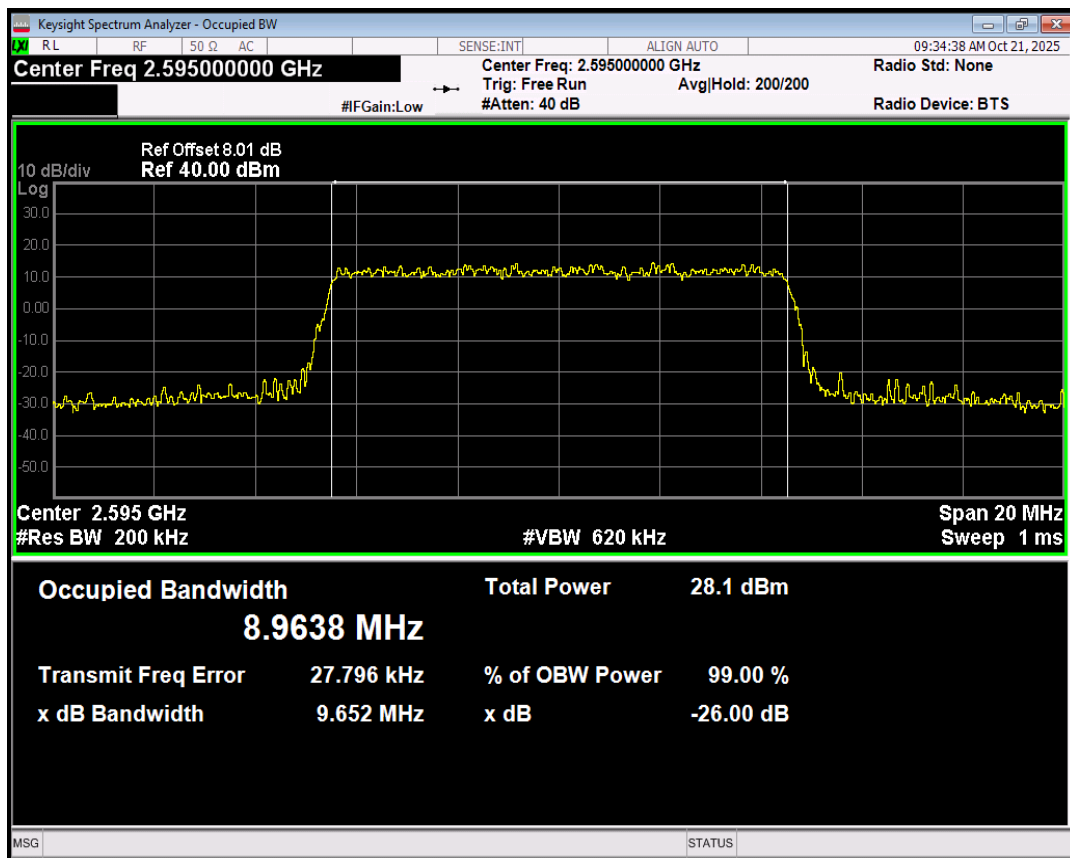


Band41(2535-2655) 16QAM BW=10MHz Channel=41190 RB Size=50 Position=#0

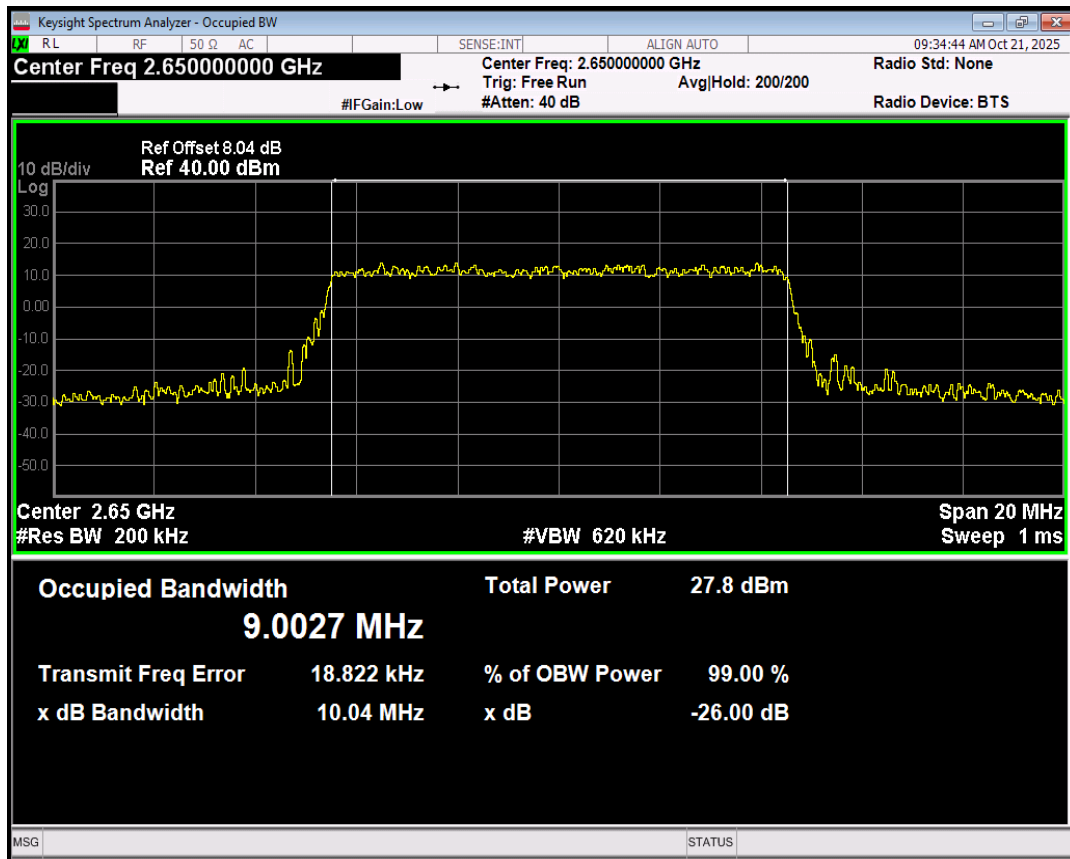


Band41(2535-2655) 16QAM BW=15MHz Channel=40115 RB Size=75 Position=#0

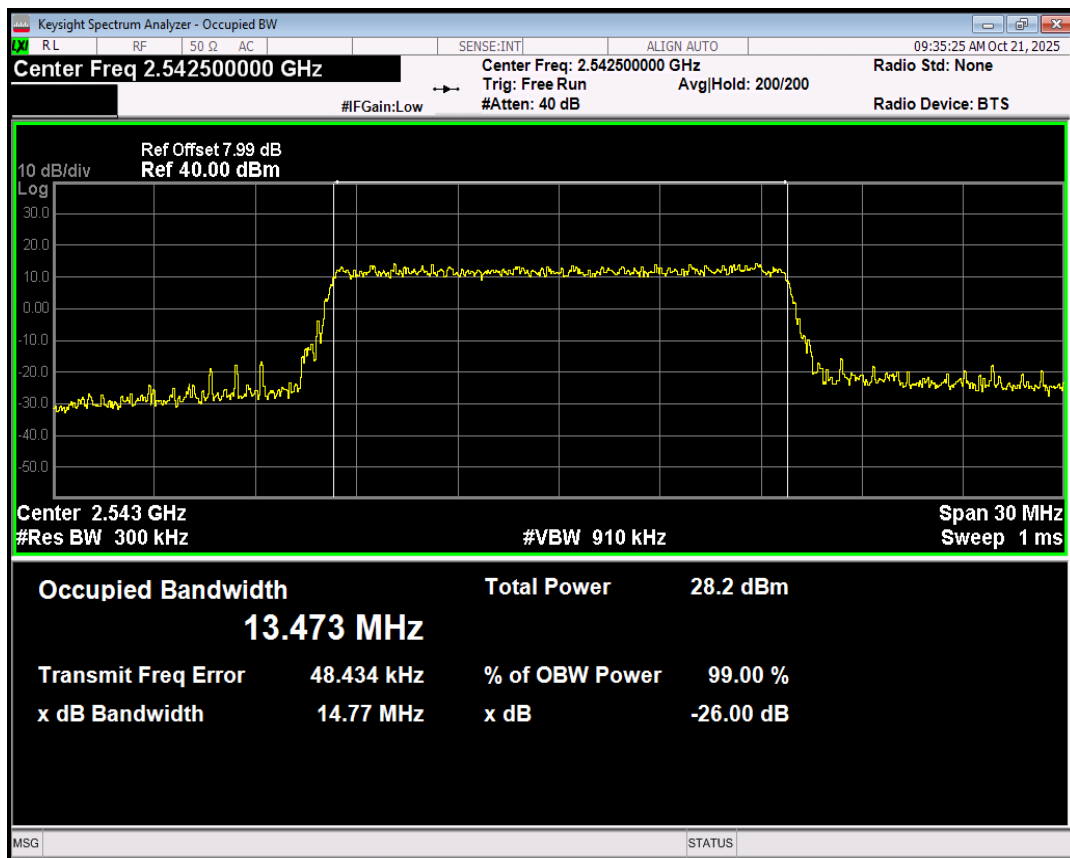


Band41(2535-2655) 16QAM BW=15MHz Channel=40640 RB Size=75 Position=#0

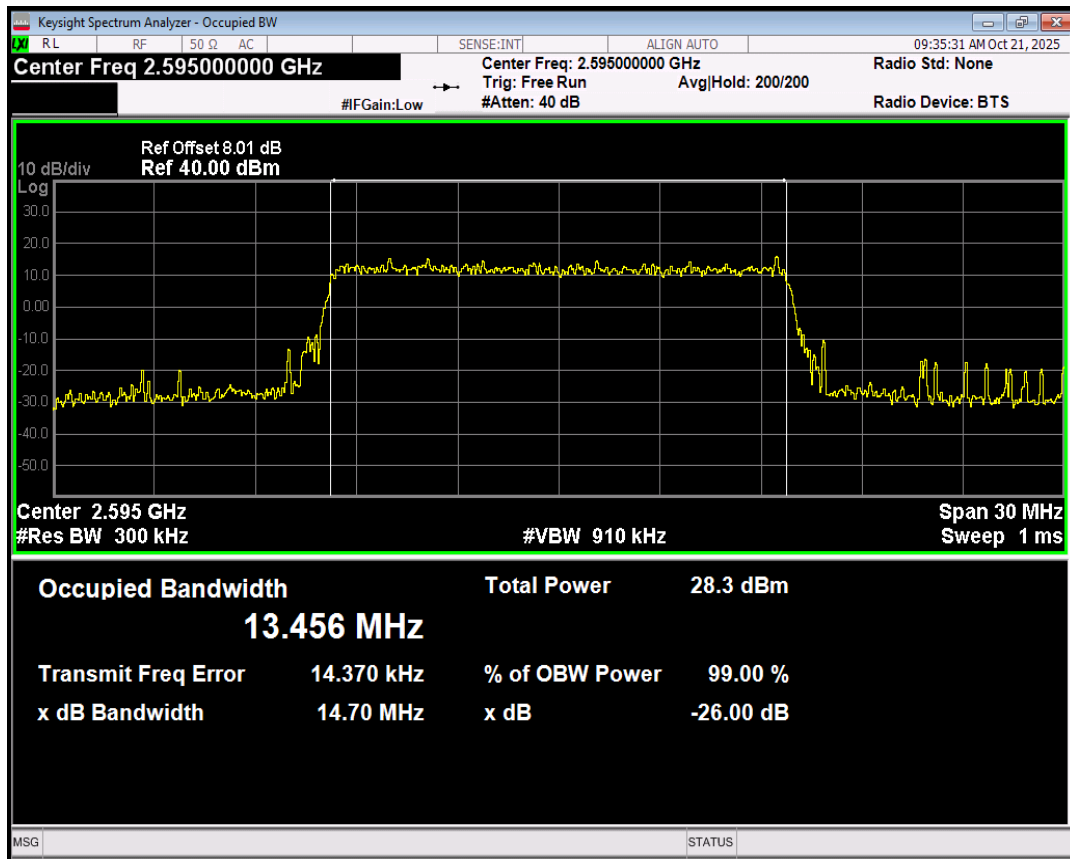


Band41(2535-2655) 16QAM BW=15MHz Channel=41165 RB Size=75 Position=#0

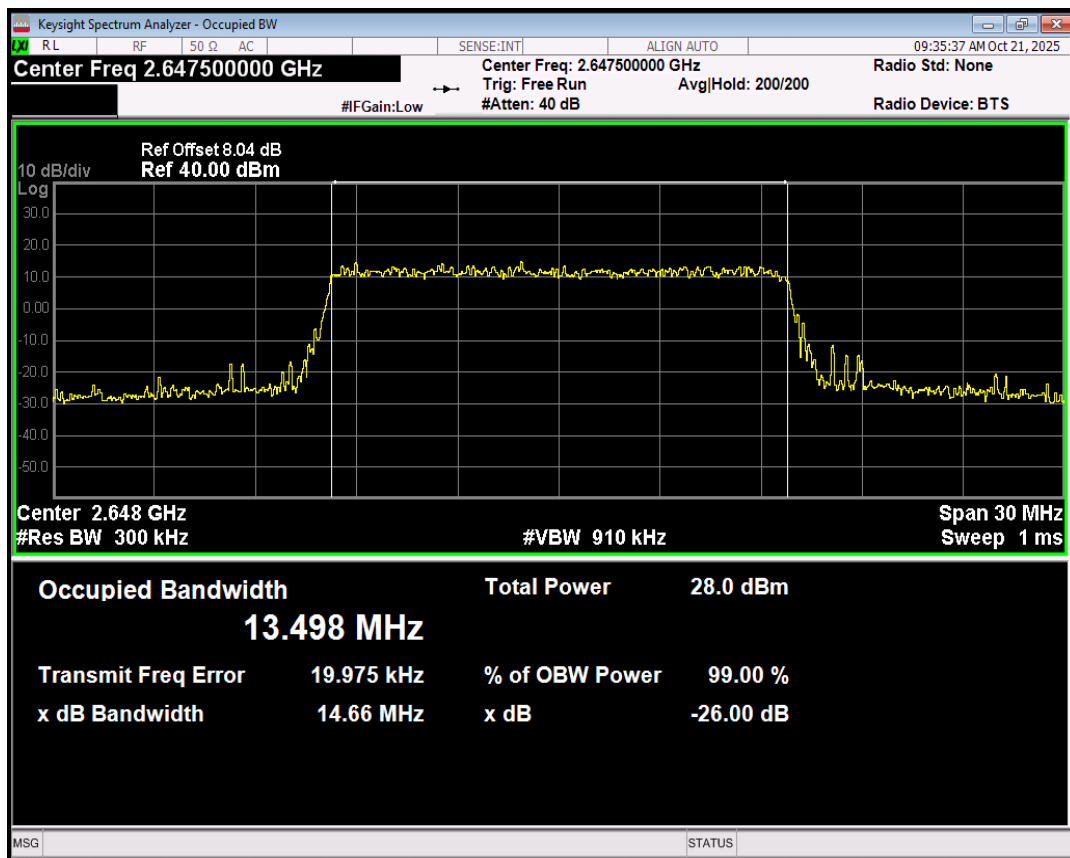


Band41(2535-2655) 16QAM BW=20MHz Channel=40140 RB Size=100 Position=#0

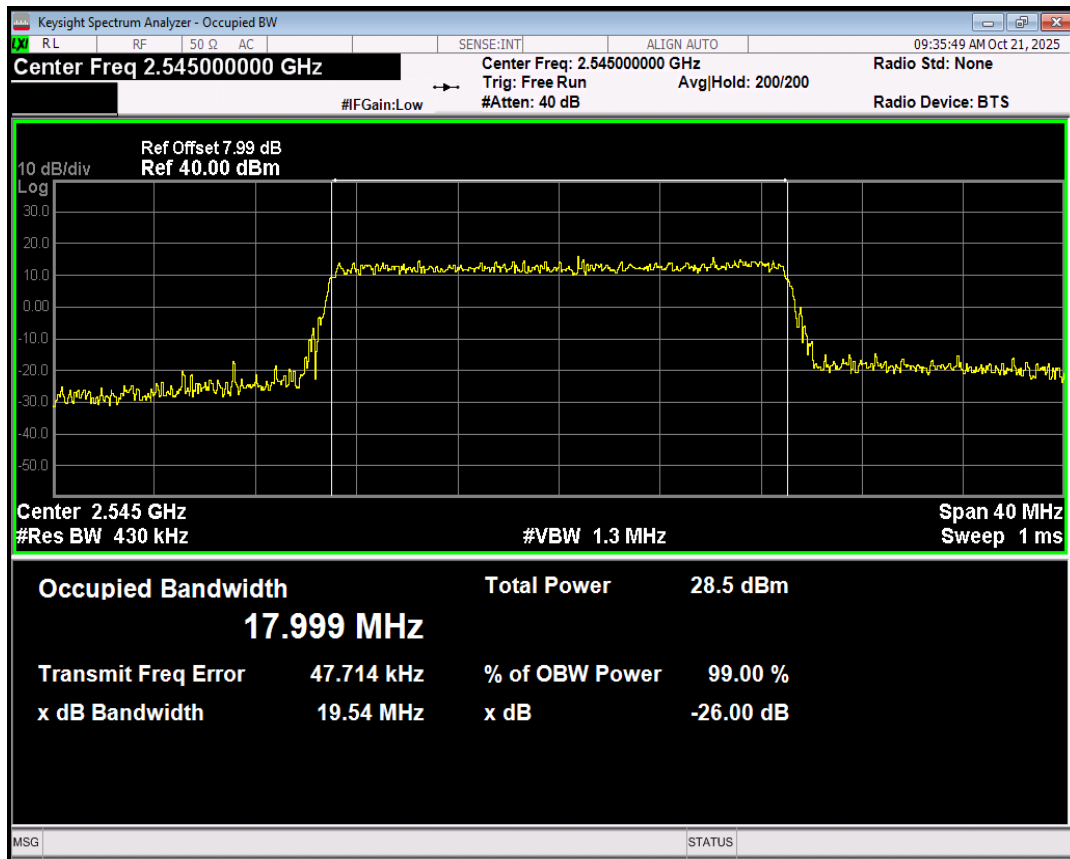


Band41(2535-2655) 16QAM BW=20MHz Channel=40640 RB Size=100 Position=#0

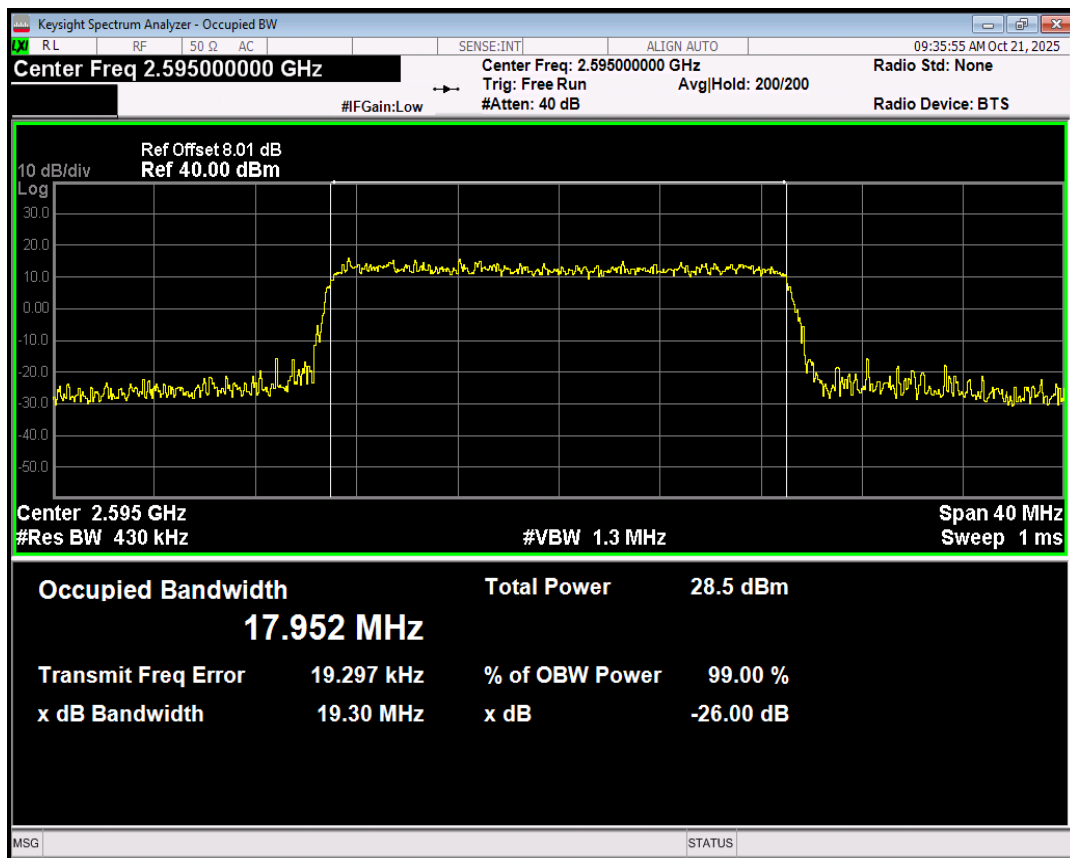


Band41(2535-2655) 16QAM BW=20MHz Channel=41140 RB Size=100 Position=#0

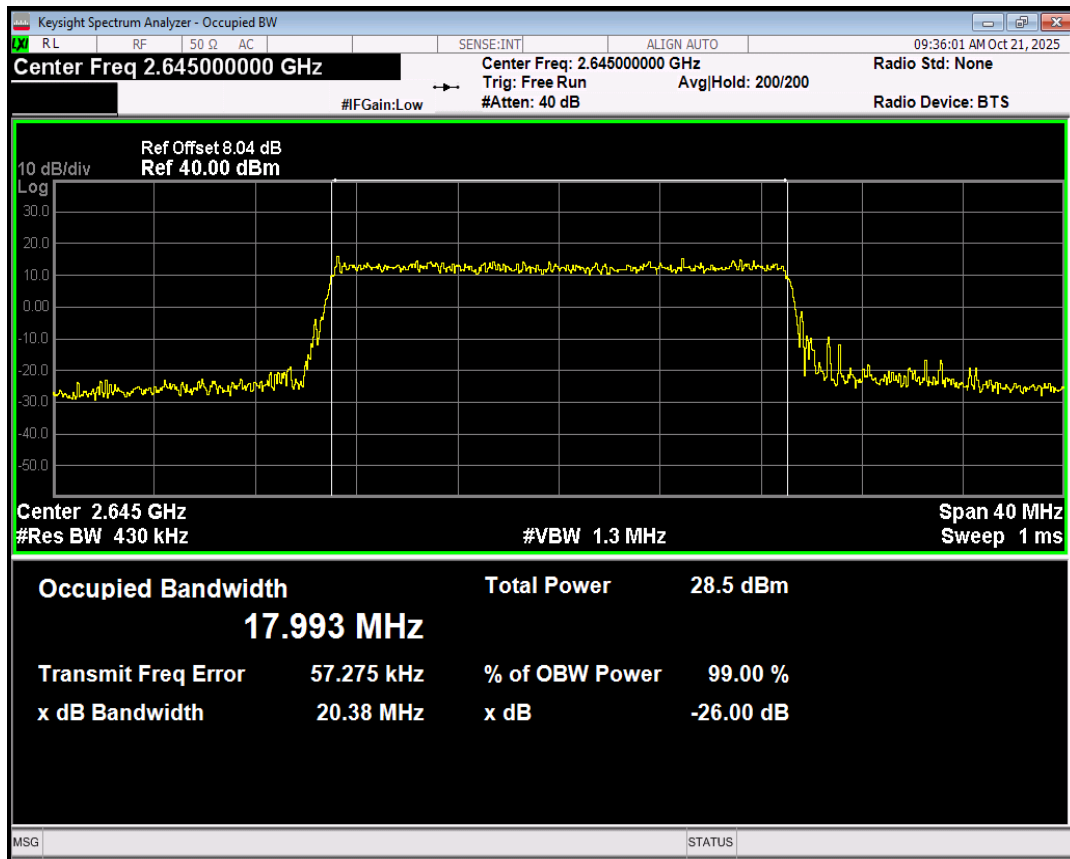


Band41(2535-2655) 16QAM BW=5MHz Channel=40065 RB Size=25 Position=#0

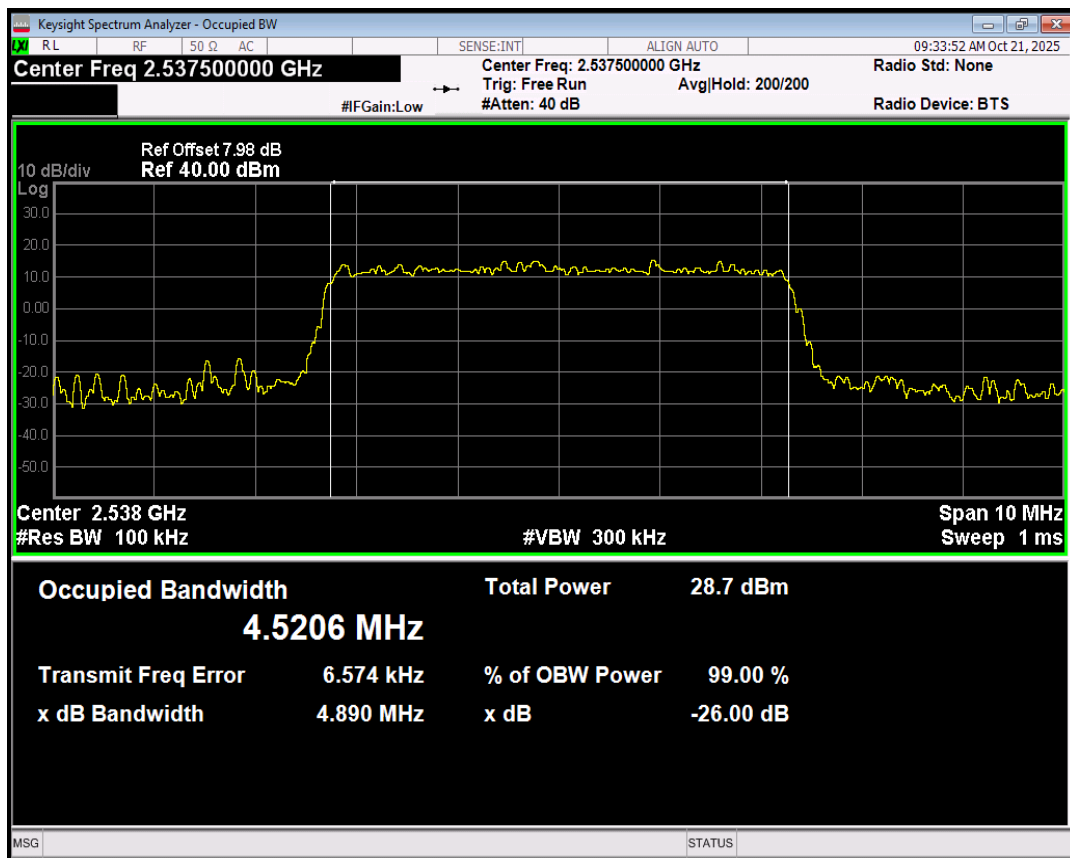


Band41(2535-2655) 16QAM BW=5MHz Channel=40640 RB Size=25 Position=#0

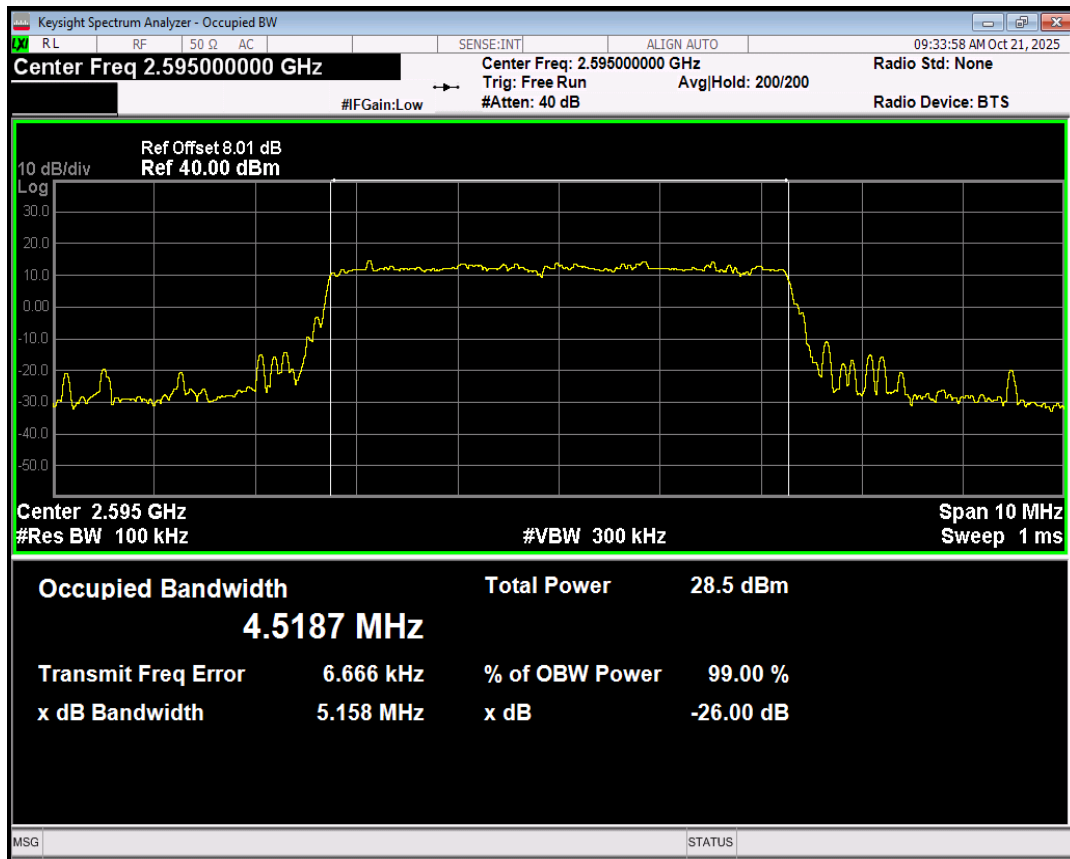


Band41(2535-2655) QPSK BW=10MHz Channel=40090 RB Size=50 Position=#0

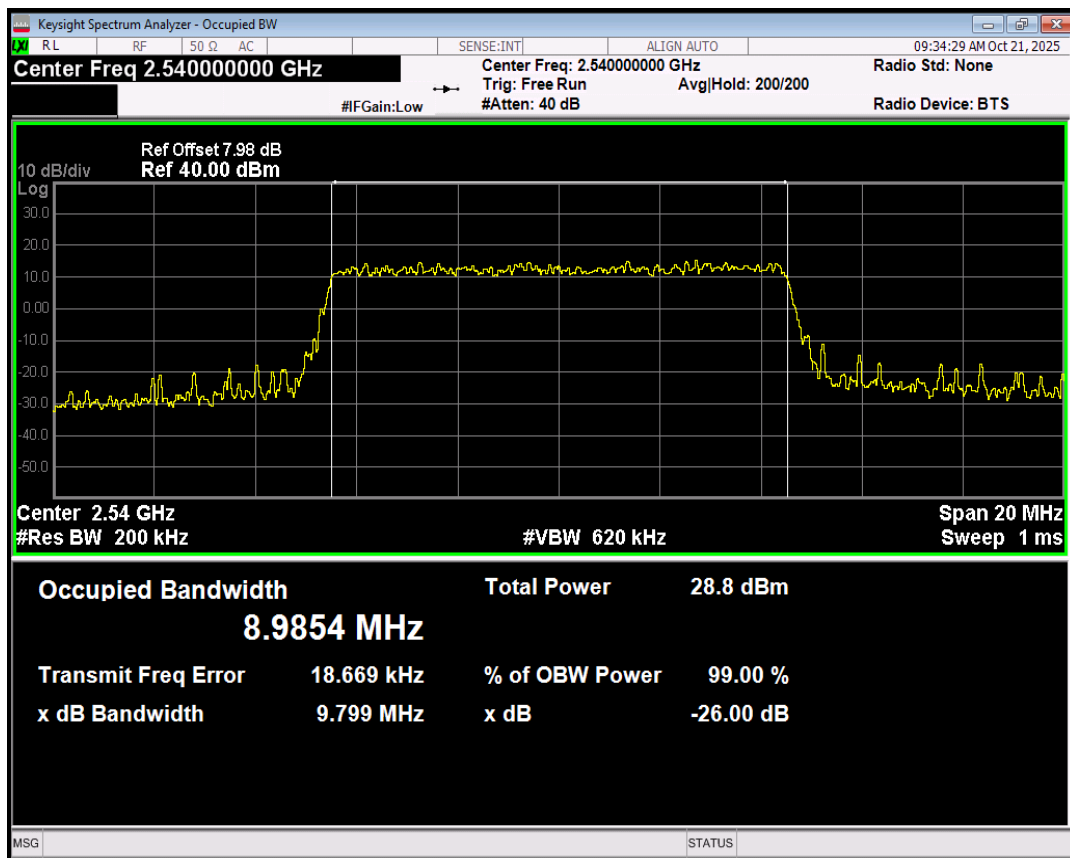


Band41(2535-2655) 16QAM BW=5MHz Channel=41215 RB Size=25 Position=#0

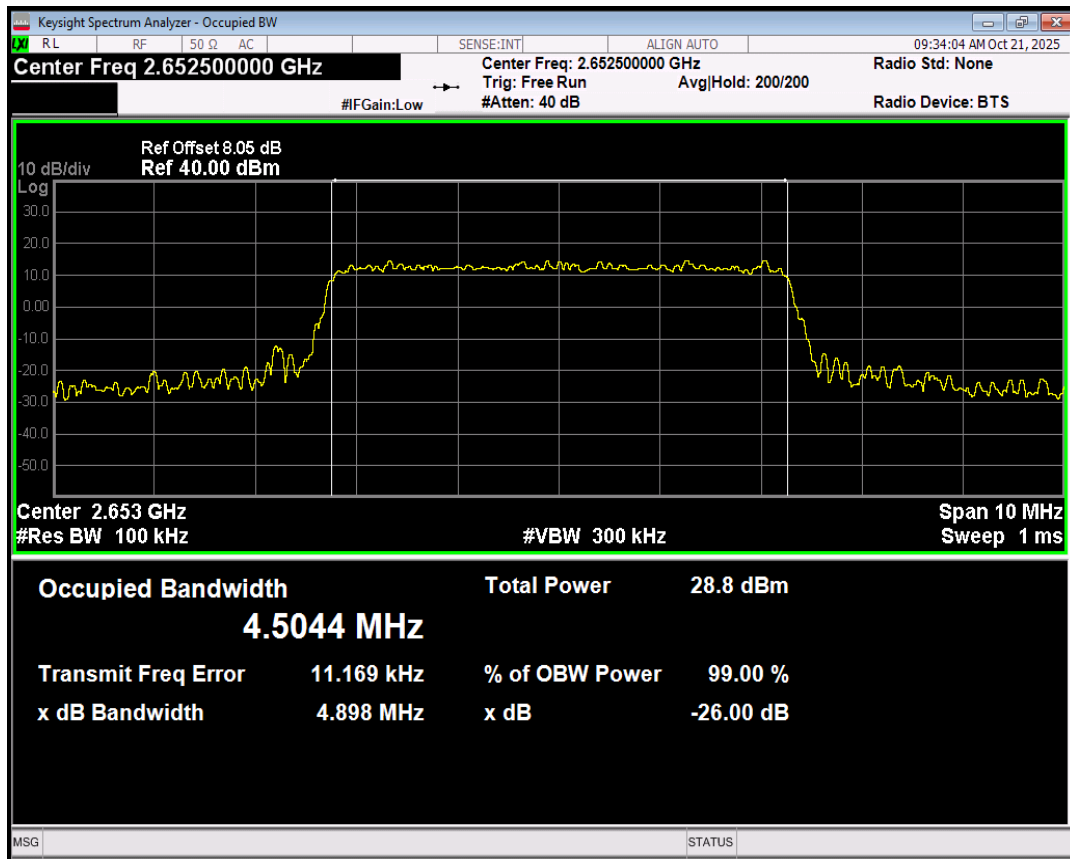


Band41(2535-2655) QPSK BW=10MHz Channel=40640 RB Size=50 Position=#0

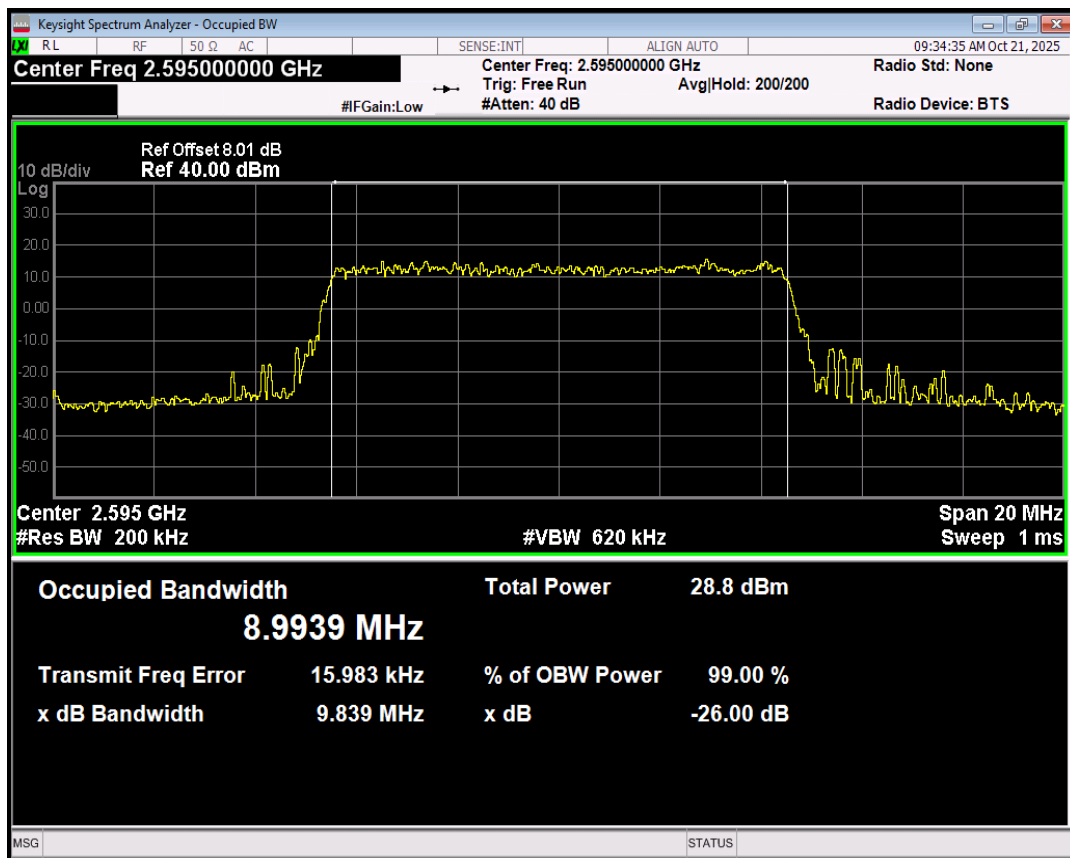


Band41(2535-2655) QPSK BW=10MHz Channel=41190 RB Size=50 Position=#0

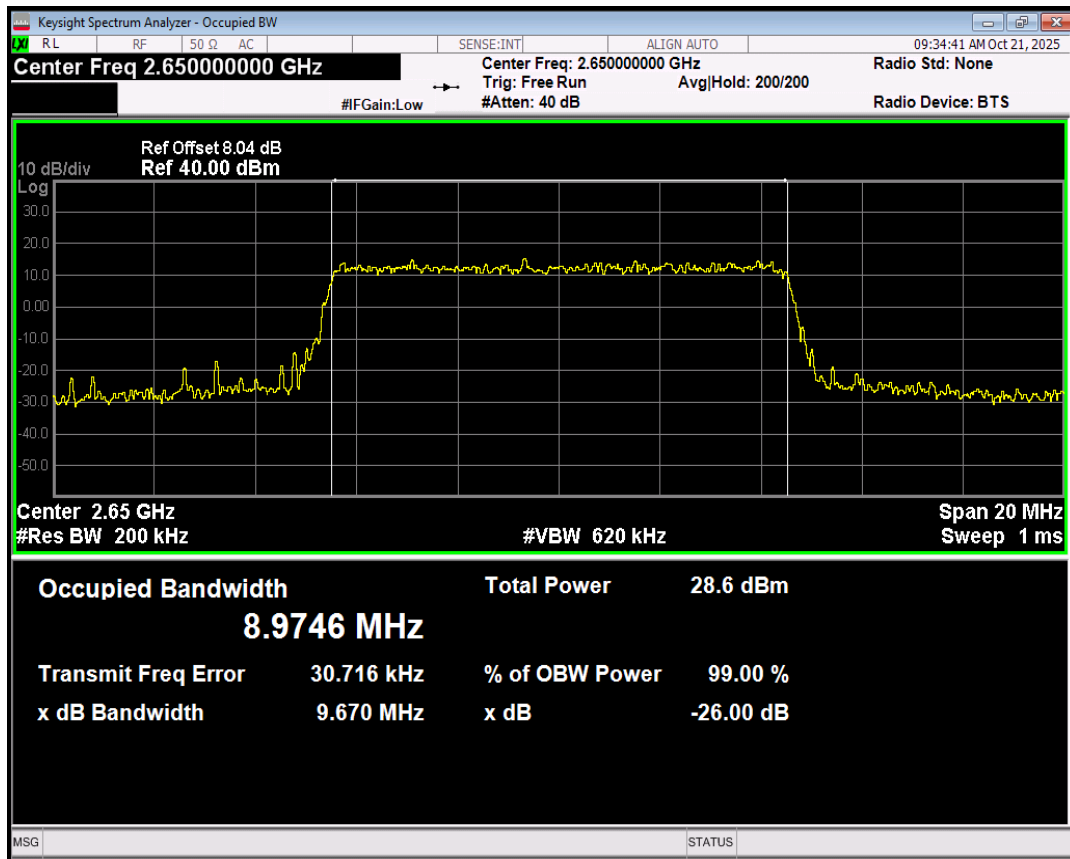


Band41(2535-2655) QPSK BW=15MHz Channel=40115 RB Size=75 Position=#0

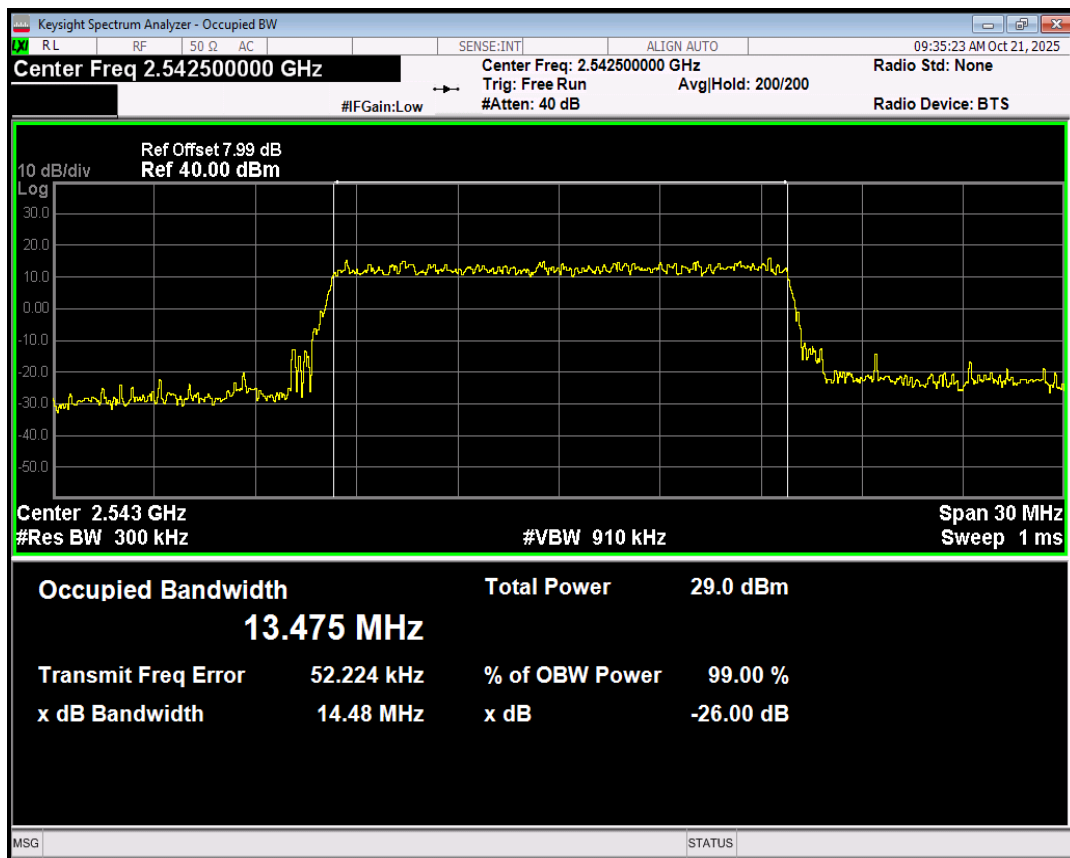


Band41(2535-2655) QPSK BW=15MHz Channel=40640 RB Size=75 Position=#0

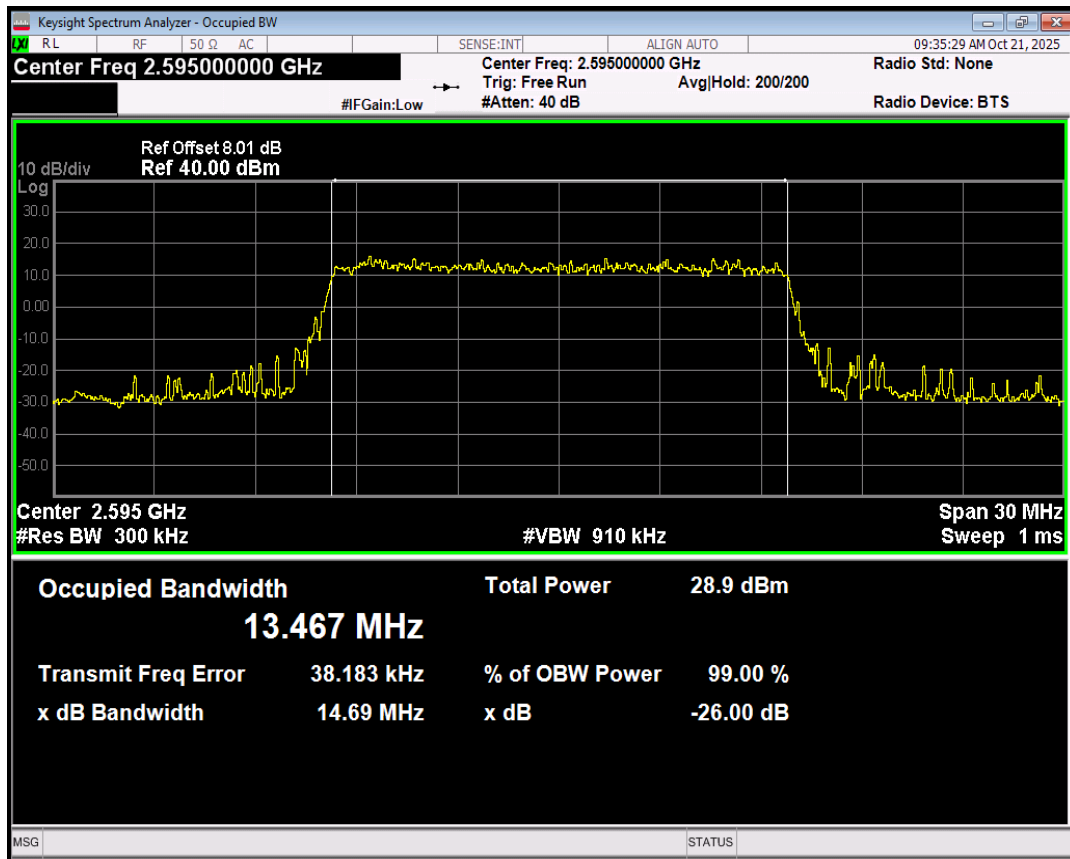


Band41(2535-2655) QPSK BW=15MHz Channel=41165 RB Size=75 Position=#0

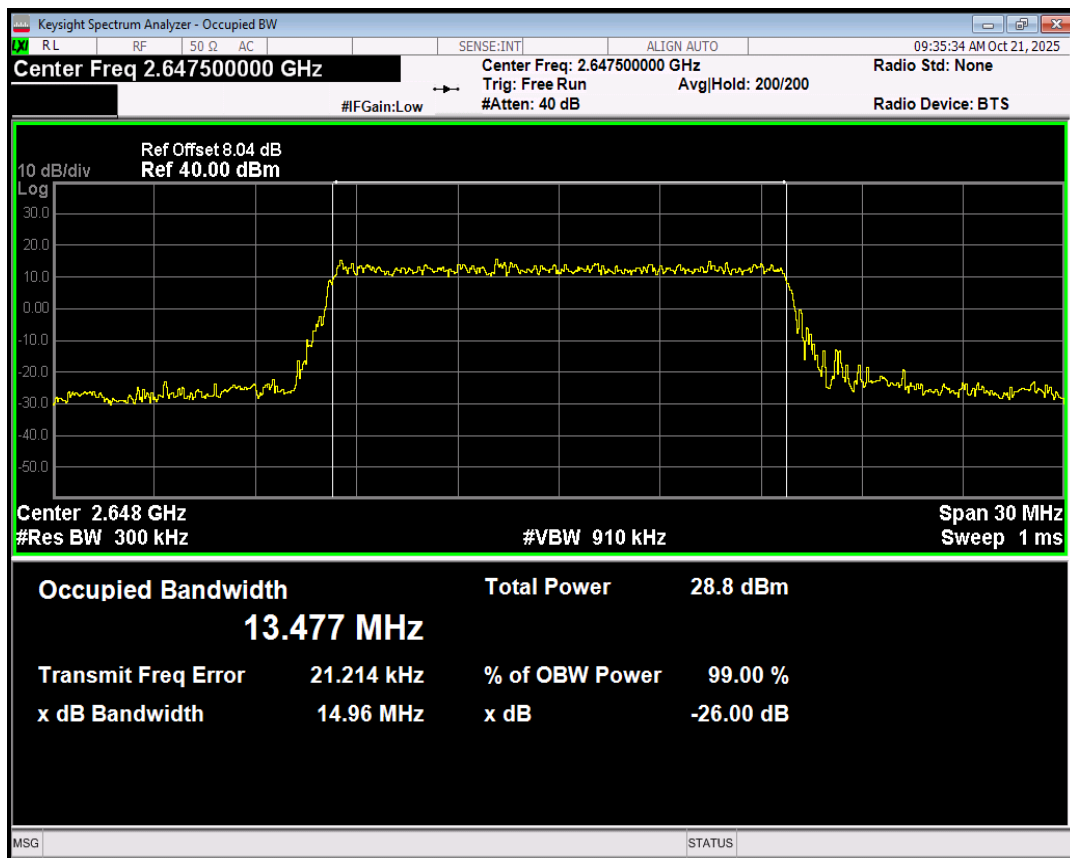


Band41(2535-2655) QPSK BW=20MHz Channel=40140 RB Size=100 Position=#0

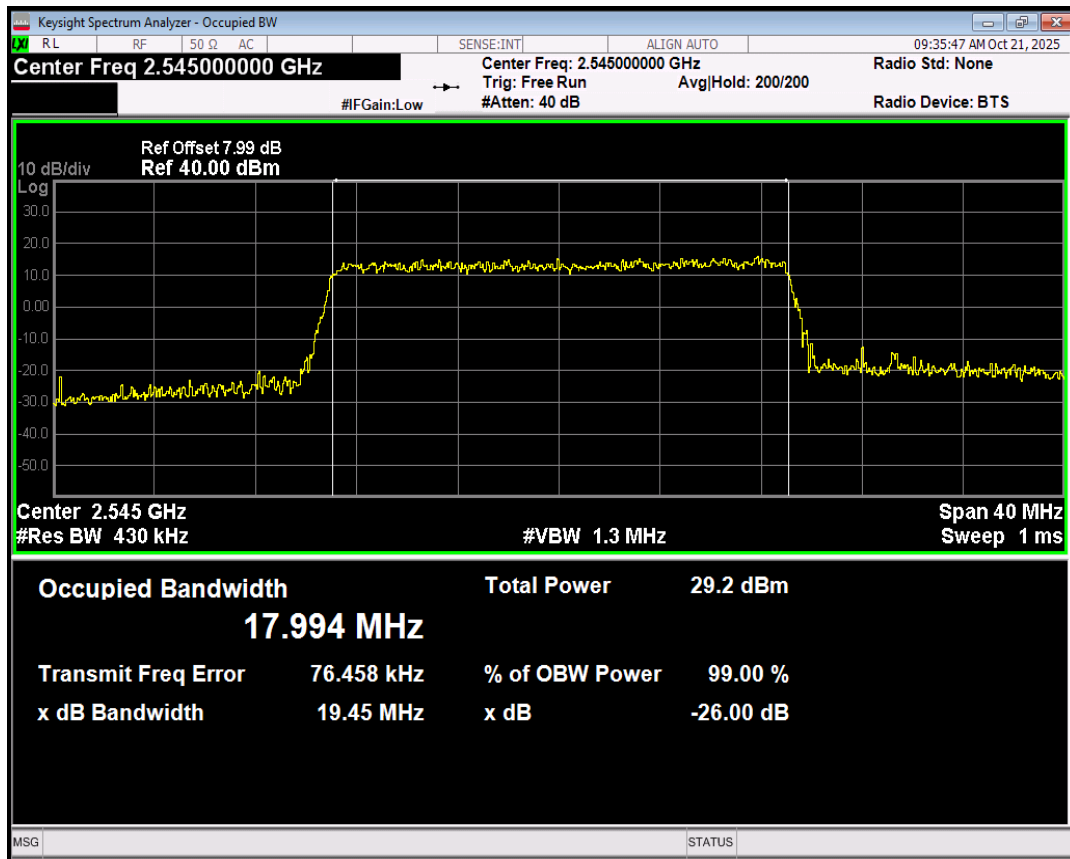


Band41(2535-2655) QPSK BW=20MHz Channel=40640 RB Size=100 Position=#0

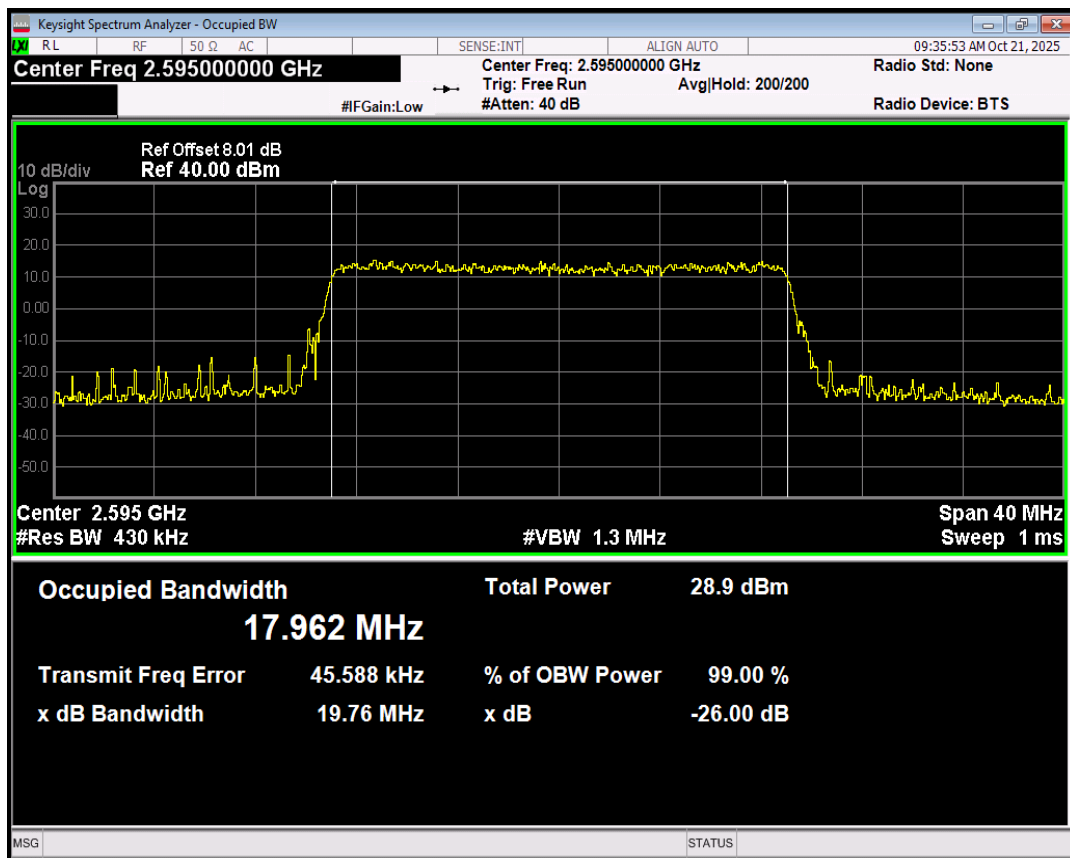


Band41(2535-2655) QPSK BW=20MHz Channel=41140 RB Size=100 Position=#0

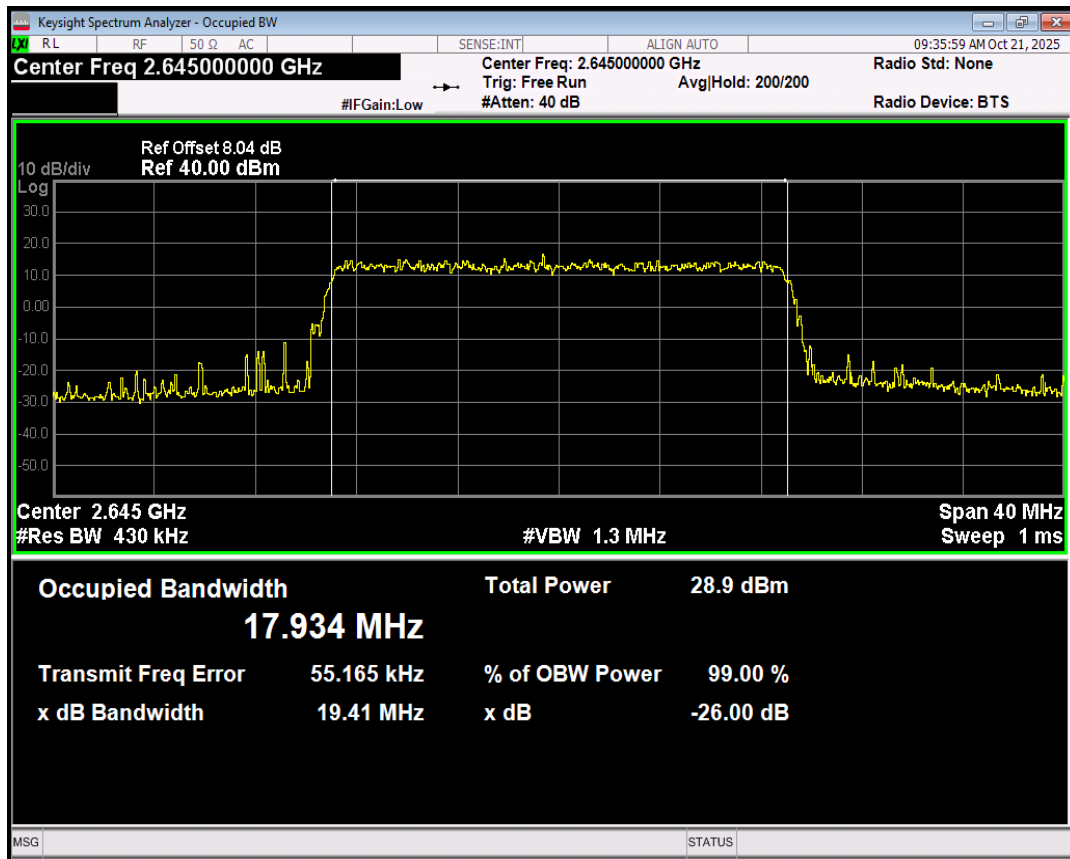


Band41(2535-2655) QPSK BW=5MHz Channel=40065 RB Size=25 Position=#0

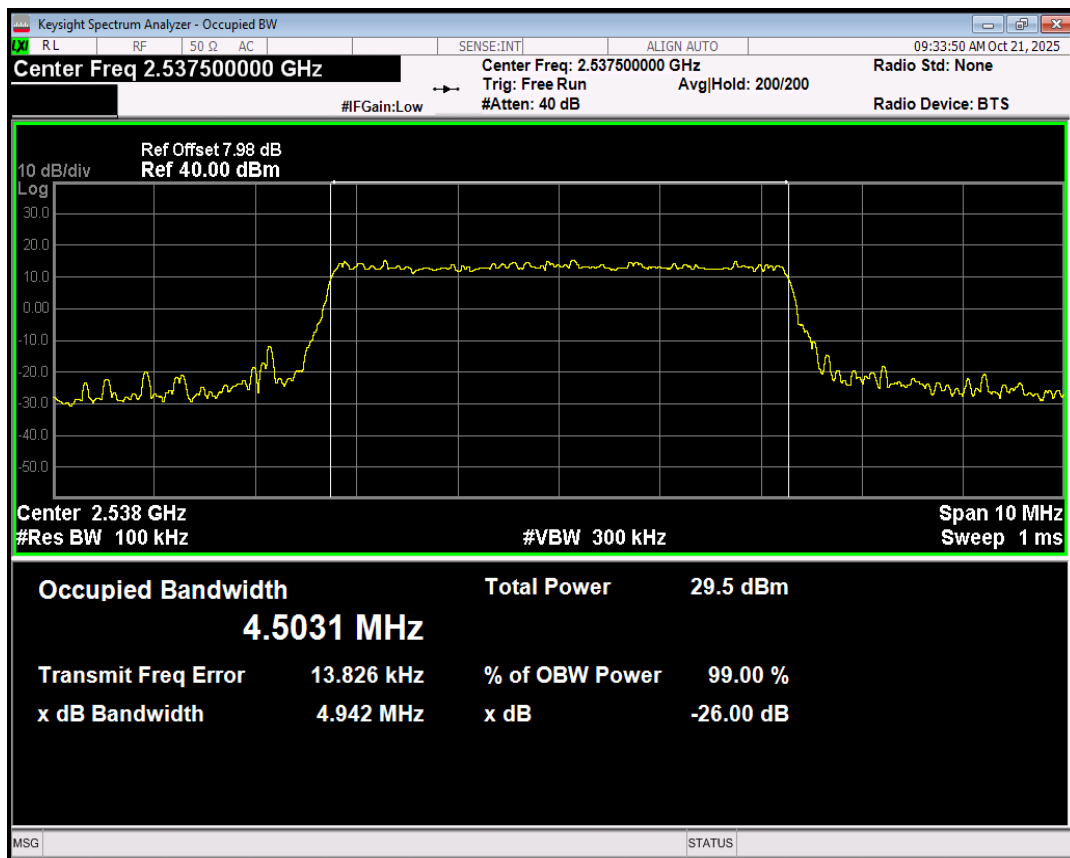

Band41(2535-2655) QPSK BW=5MHz Channel=40640 RB Size=25 Position=#0

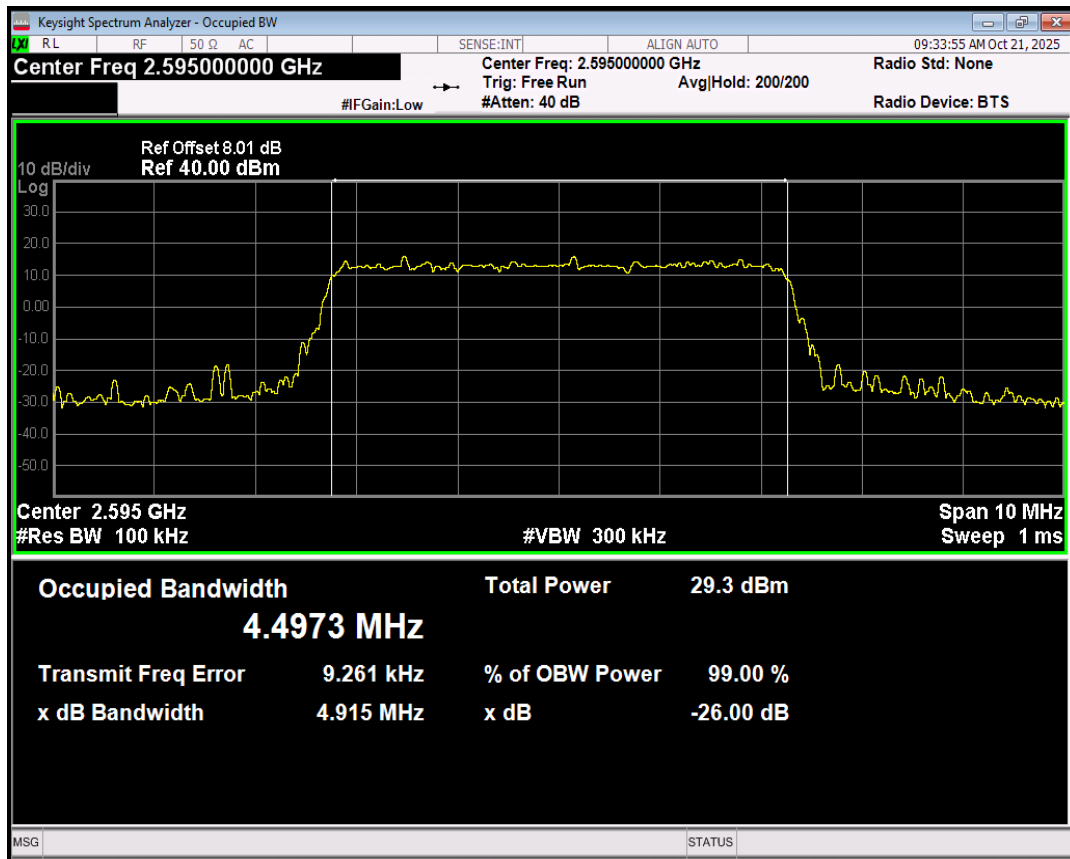


Band41(2535-2655) QPSK BW=5MHz Channel=41215 RB Size=25 Position=#0

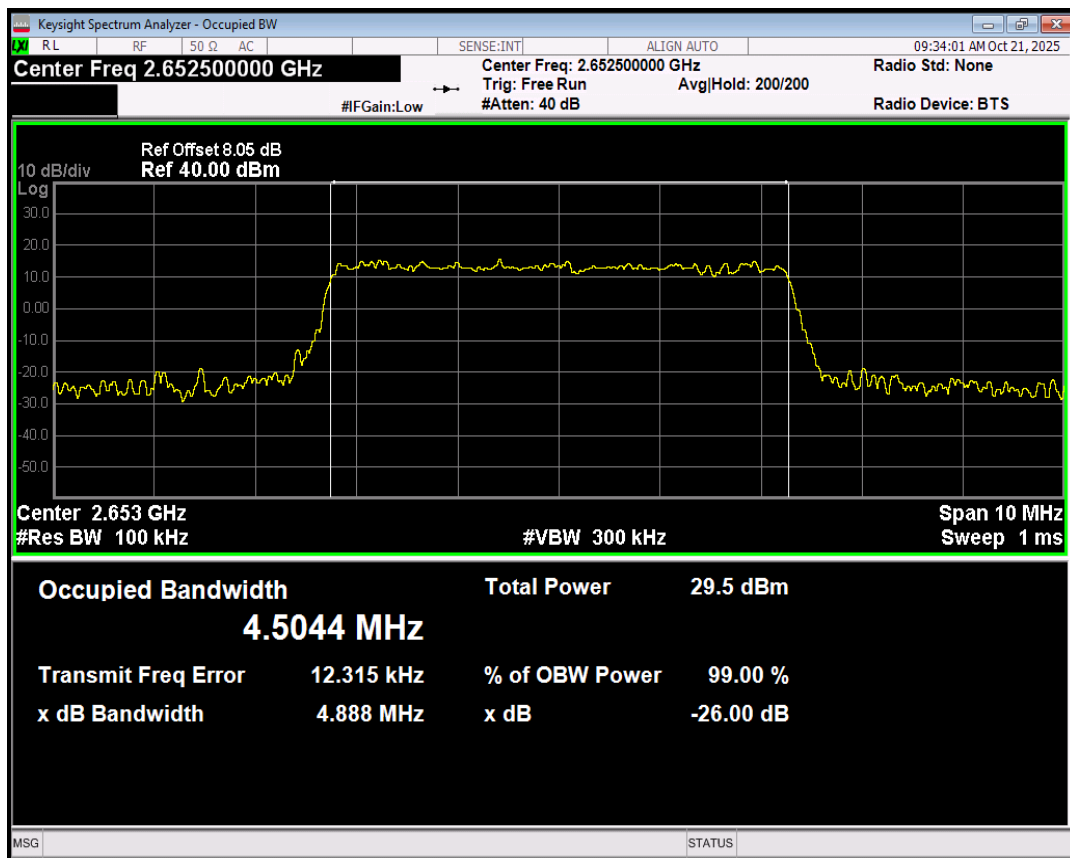

05 Band edge


Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band41(2535-2655)	5	40065	25	#0	QPSK	2534.00	-17.24	-10	PASS
Band41(2535-2655)	5	40065	25	#0	16QAM	2528.26	-31.10	-25	PASS
Band41(2535-2655)	5	41215	25	#0	QPSK	2656.00	-18.54	-10	PASS
Band41(2535-2655)	5	41215	25	#0	16QAM	2661.80	-30.82	-25	PASS
Band41(2535-2655)	10	40090	50	#0	QPSK	2524.10	-35.04	-25	PASS
Band41(2535-2655)	10	40090	50	#0	16QAM	2524.60	-36.44	-25	PASS
Band41(2535-2655)	10	41190	50	#0	QPSK	2665.40	-36.63	-25	PASS
Band41(2535-2655)	10	41190	50	#0	16QAM	2665.09	-35.77	-25	PASS
Band41(2535-2655)	15	40115	75	#0	QPSK	2518.47	-36.68	-25	PASS
Band41(2535-2655)	15	40115	75	#0	16QAM	2519.82	-37.29	-25	PASS
Band41(2535-2655)	15	41165	75	#0	QPSK	2670.83	-35.44	-25	PASS
Band41(2535-2655)	15	41165	75	#0	16QAM	2670.21	-36.93	-25	PASS
Band41(2535-2655)	20	40140	100	#0	QPSK	2511.91	-39.82	-25	PASS
Band41(2535-2655)	20	40140	100	#0	16QAM	2513.96	-39.08	-25	PASS
Band41(2535-2655)	20	41140	100	#0	QPSK	2676.01	-38.10	-25	PASS
Band41(2535-2655)	20	41140	100	#0	16QAM	2675.92	-37.42	-25	PASS

Band41(2535-2655) 16QAM BW=10MHz Channel=40090 RB Size=50 Position=#0

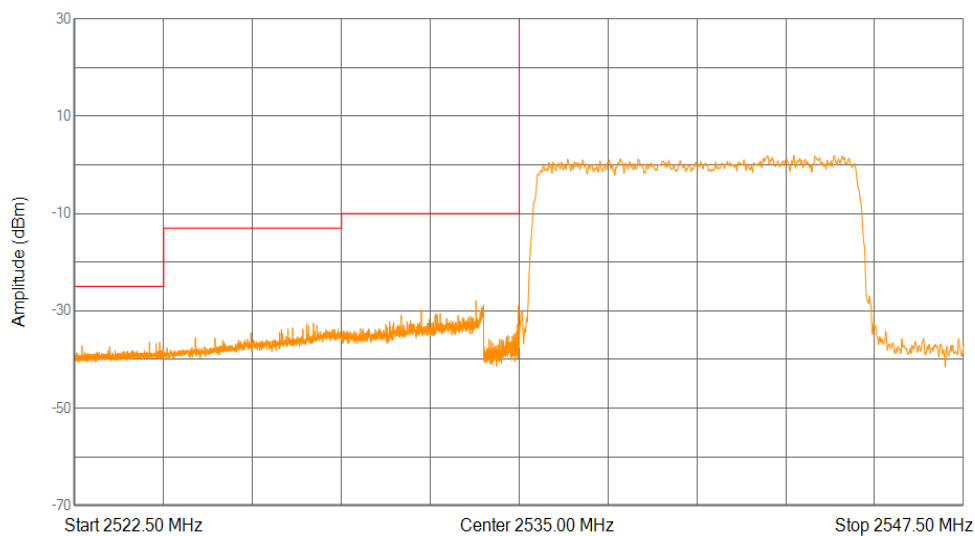


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2522.5	2525	1000	2524.5975	-36.44	-25
2	2525	2530	1000	2529.21	-32.59	-13
3	2530	2534	1000	2533.784	-27.96	-10
4	2534	2535	200	2534.975	-29	-10

Band41(2535-2655) 16QAM BW=10MHz Channel=41190 RB Size=50 Position=#0

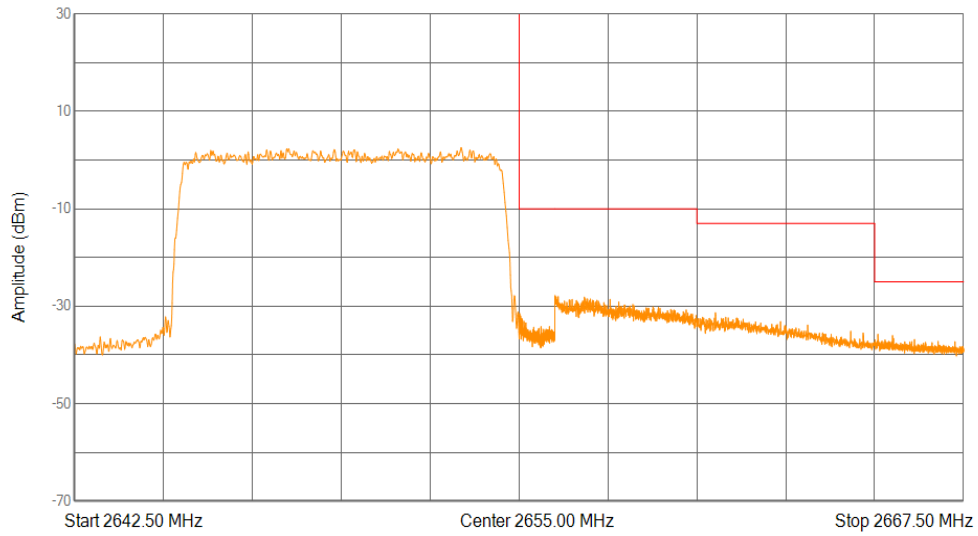


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2655	2656	200	2655.012	-31.51	-10
2	2656	2660	1000	2656.012	-27.85	-10
3	2660	2665	1000	2660.52	-31.34	-13
4	2665	2667.5	1000	2665.09	-35.77	-25

Band41(2535-2655) 16QAM BW=15MHz Channel=40115 RB Size=75 Position=#0

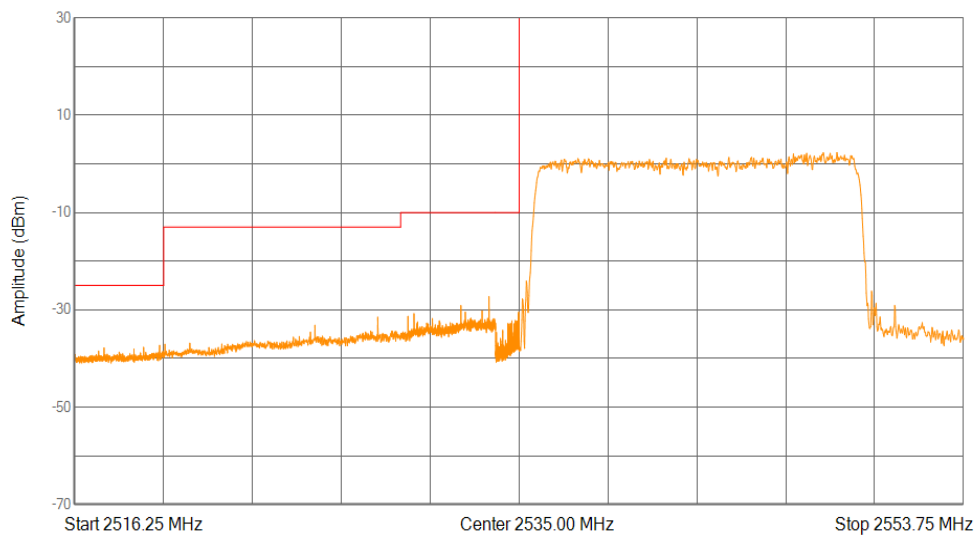


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2516.25	2520	1000	2519.82375	-37.29	-25
2	2520	2530	1000	2529.03	-31.5	-13
3	2530	2534	1000	2533.724	-27.26	-10
4	2534	2535	300	2534.976	-30.43	-10

Band41(2535-2655) 16QAM BW=15MHz Channel=41165 RB Size=75 Position=#0

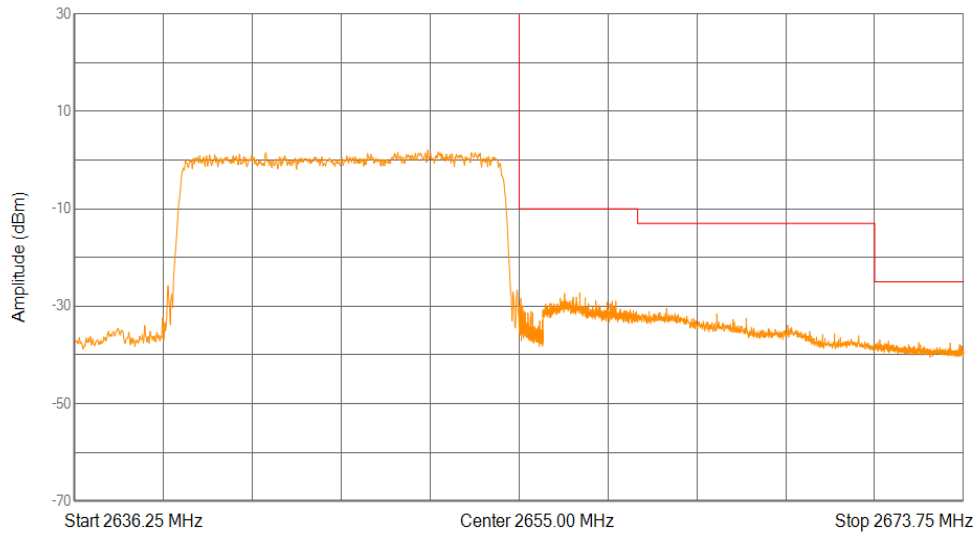


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2655	2656	300	2655.071	-28.43	-10
2	2656	2660	1000	2657.556	-27.24	-10
3	2660	2670	1000	2661.22	-30.44	-13
4	2670	2673.75	1000	2670.21375	-36.93	-25

Band41(2535-2655) 16QAM BW=20MHz Channel=40140 RB Size=100 Position=#0

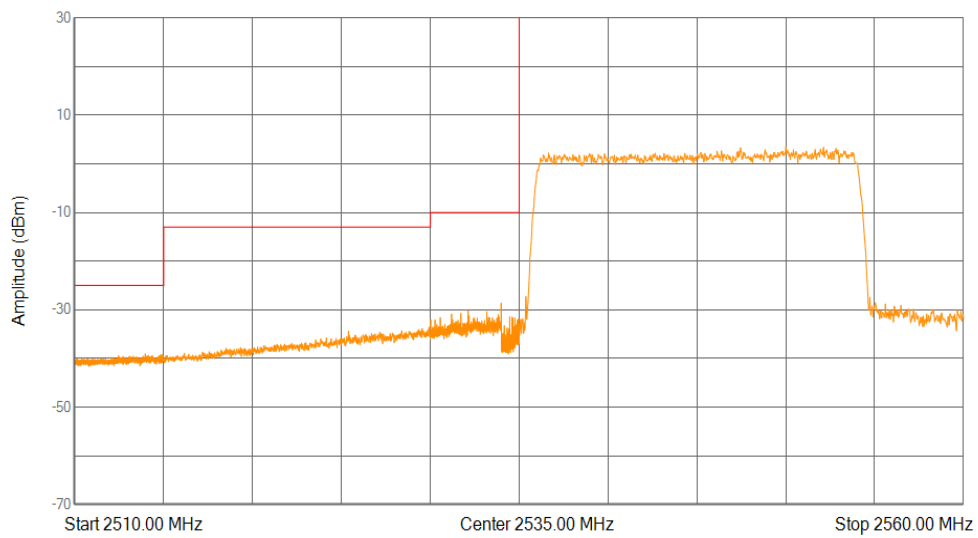


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2510	2515	1000	2513.955	-39.08	-25
2	2515	2530	1000	2529.925	-33.6	-13
3	2530	2534	1000	2533.984	-28.66	-10
4	2534	2535	430	2534.466	-31.48	-10

Band41(2535-2655) 16QAM BW=20MHz Channel=41140 RB Size=100 Position=#0

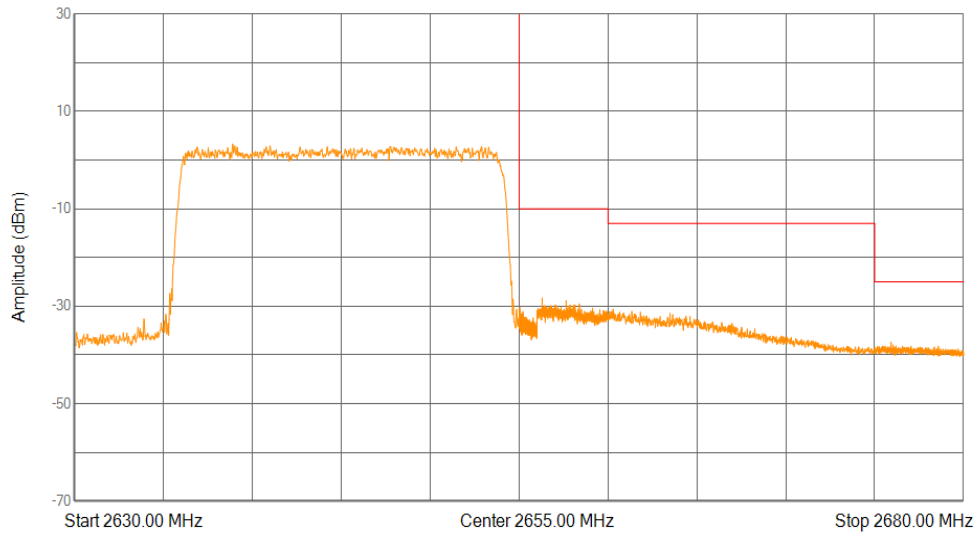


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2655	2656	430	2655.031	-30.26	-10
2	2656	2660	1000	2656.292	-28.32	-10
3	2660	2675	1000	2660.285	-30.63	-13
4	2675	2680	1000	2675.92	-37.42	-25

Band41(2535-2655) 16QAM BW=5MHz Channel=40065 RB Size=25 Position=#0

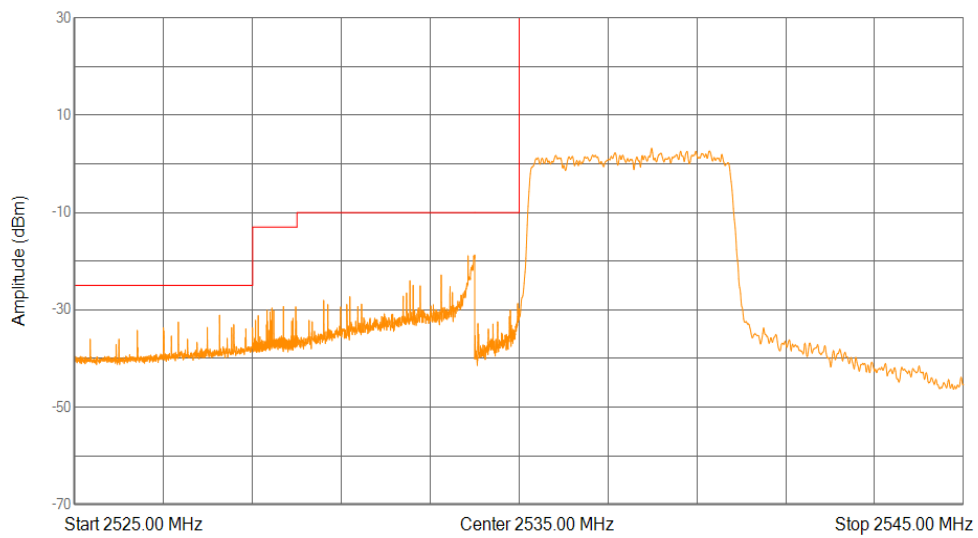


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2525	2529	1000	2528.256	-31.1	-25
2	2529	2530	1000	2529.694	-29.31	-13
3	2530	2534	1000	2534	-18.73	-10
4	2534	2535	100	2534.967	-28.73	-10

Band41(2535-2655) 16QAM BW=5MHz Channel=41215 RB Size=25 Position=#0

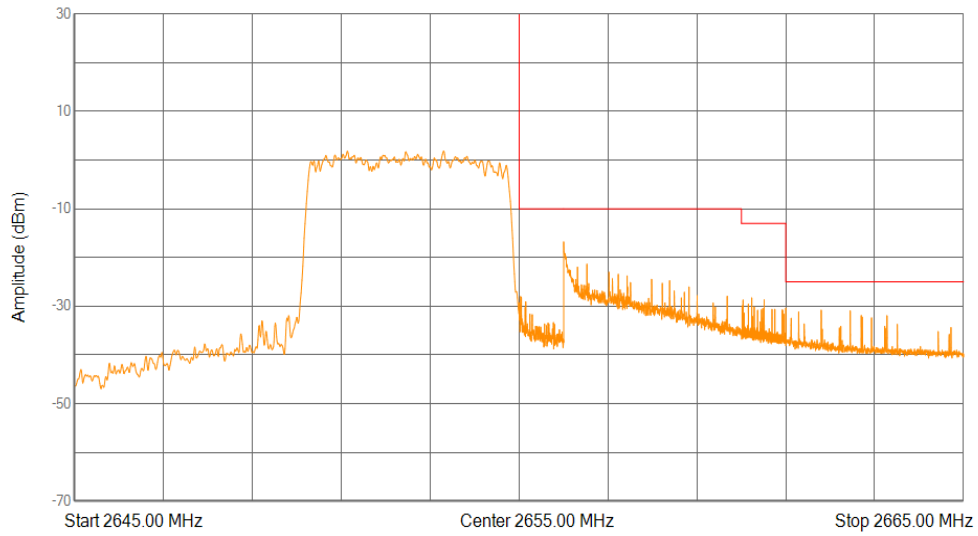


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2655	2656	100	2655.032	-28.04	-10
2	2656	2660	1000	2656.004	-18.79	-10
3	2660	2661	1000	2660.232	-28.3	-13
4	2661	2665	1000	2661.796	-30.82	-25

Band41(2535-2655) QPSK BW=10MHz Channel=40090 RB Size=50 Position=#0

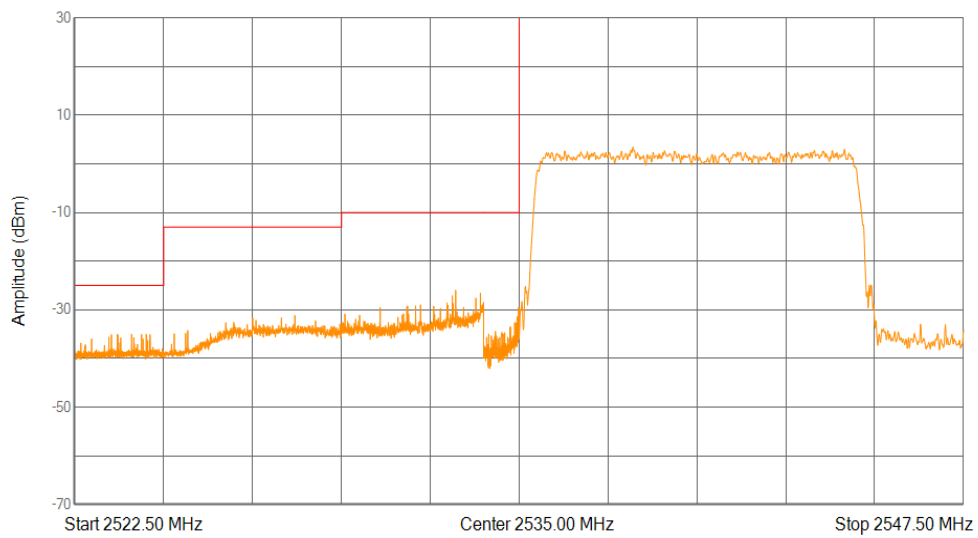


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2522.5	2525	1000	2524.0975	-35.04	-25
2	2525	2530	1000	2528.69	-31.19	-13
3	2530	2534	1000	2533.212	-26.01	-10
4	2534	2535	200	2534.982	-29.58	-10

Band41(2535-2655) QPSK BW=10MHz Channel=41190 RB Size=50 Position=#0

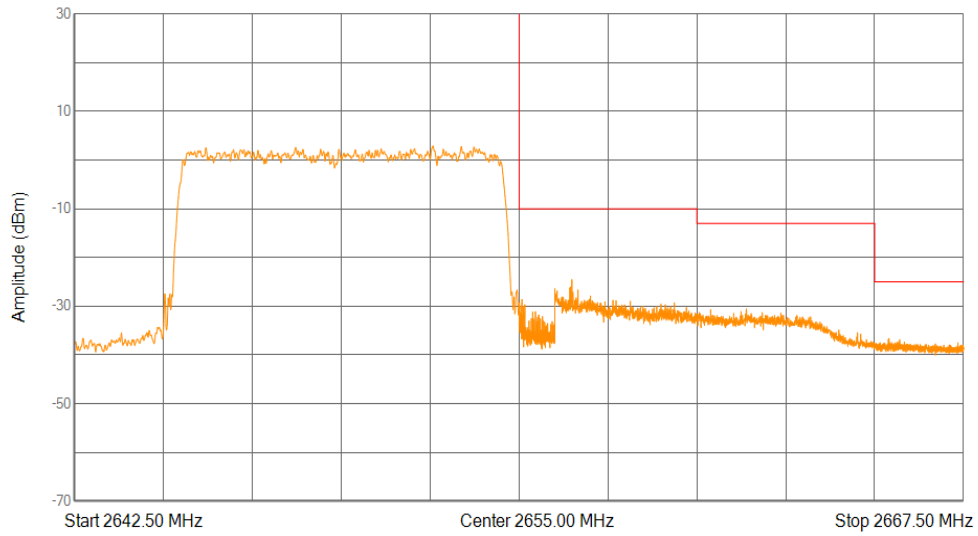


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2655	2656	200	2655.077	-28.63	-10
2	2656	2660	1000	2656.48	-24.55	-10
3	2660	2665	1000	2661.39	-30.57	-13
4	2665	2667.5	1000	2665.4	-36.63	-25

Band41(2535-2655) QPSK BW=15MHz Channel=40115 RB Size=75 Position=#0

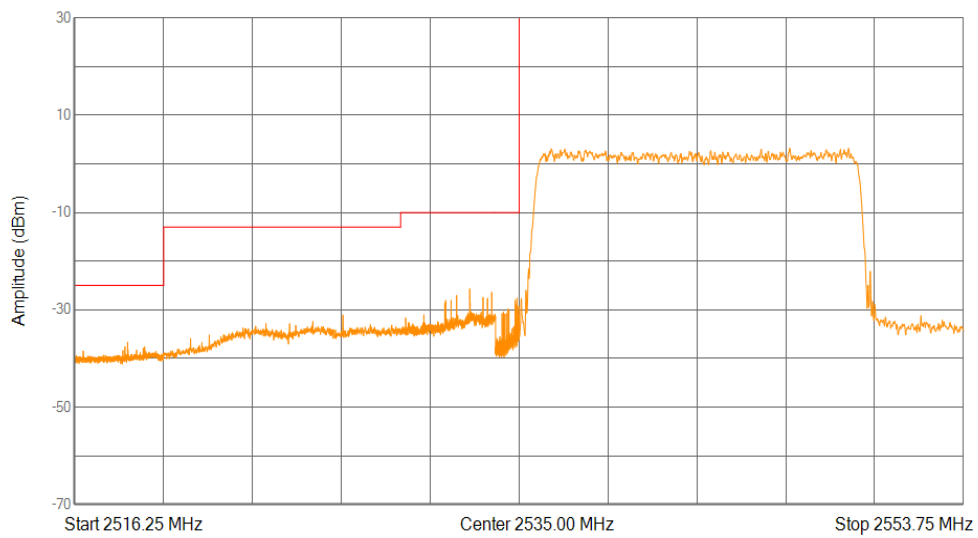


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2516.25	2520	1000	2518.47375	-36.68	-25
2	2520	2530	1000	2527.56	-31.09	-13
3	2530	2534	1000	2532.912	-25.71	-10
4	2534	2535	300	2534.905	-27.59	-10

Band41(2535-2655) QPSK BW=15MHz Channel=41165 RB Size=75 Position=#0

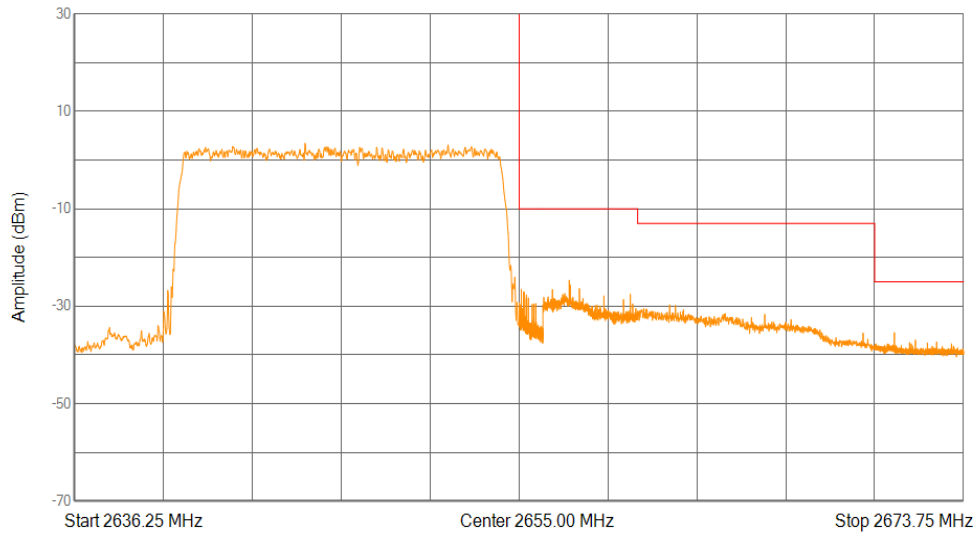


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2655	2656	300	2655.088	-26.51	-10
2	2656	2660	1000	2657.112	-24.69	-10
3	2660	2670	1000	2661.35	-29.76	-13
4	2670	2673.75	1000	2670.82875	-35.44	-25

Band41(2535-2655) QPSK BW=20MHz Channel=40140 RB Size=100 Position=#0

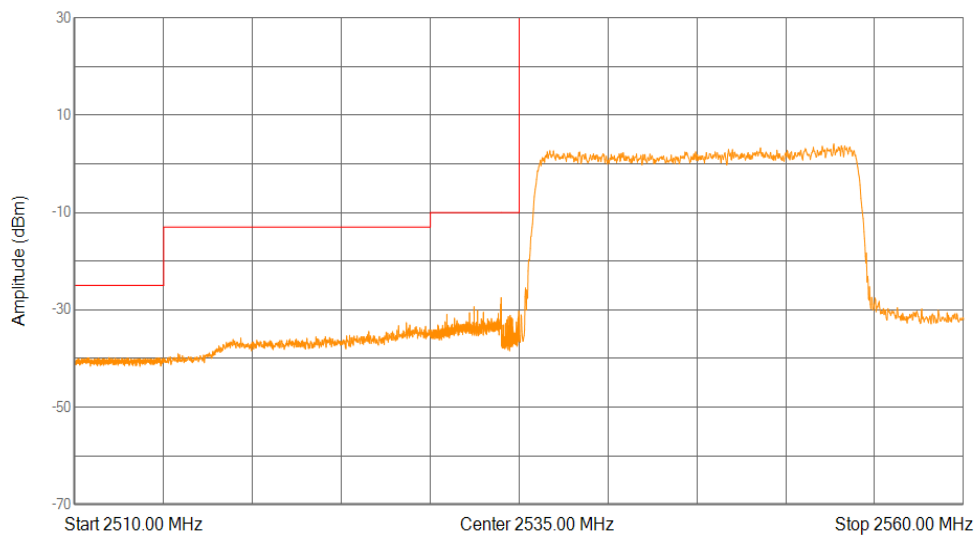


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2510	2515	1000	2511.905	-39.82	-25
2	2515	2530	1000	2528.65	-32.65	-13
3	2530	2534	1000	2533.984	-27.49	-10
4	2534	2535	430	2534.976	-30.24	-10

Band41(2535-2655) QPSK BW=20MHz Channel=41140 RB Size=100 Position=#0

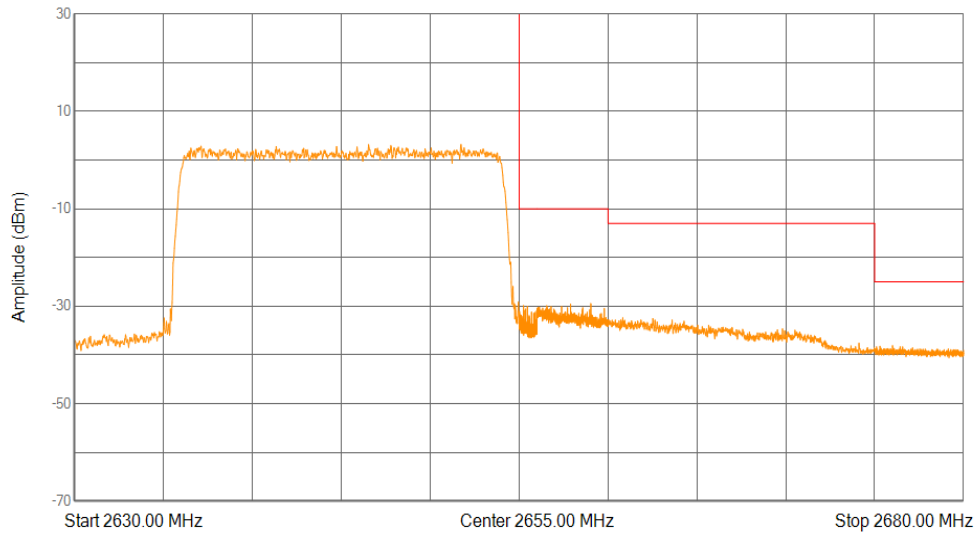


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2655	2656	430	2655.245	-29.87	-10
2	2656	2660	1000	2659.028	-29.45	-10
3	2660	2675	1000	2660.825	-32.38	-13
4	2675	2680	1000	2676.005	-38.1	-25

Band41(2535-2655) QPSK BW=5MHz Channel=40065 RB Size=25 Position=#0

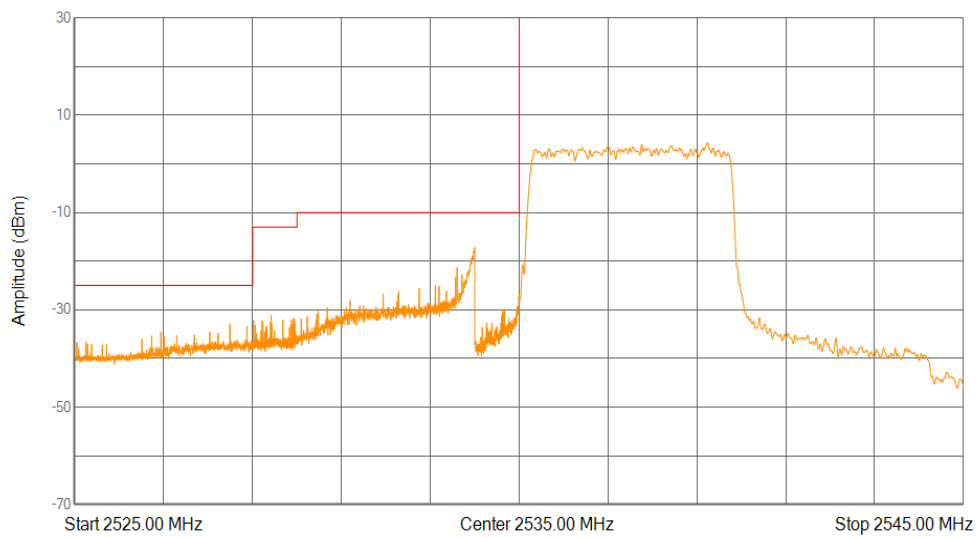

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2525	2529	1000	2528.488	-32.89	-25
2	2529	2530	1000	2529.417	-31.15	-13
3	2530	2534	1000	2534	-17.24	-10
4	2534	2535	100	2535	-26.89	-10

Band41(2535-2655) QPSK BW=5MHz Channel=41215 RB Size=25 Position=#0

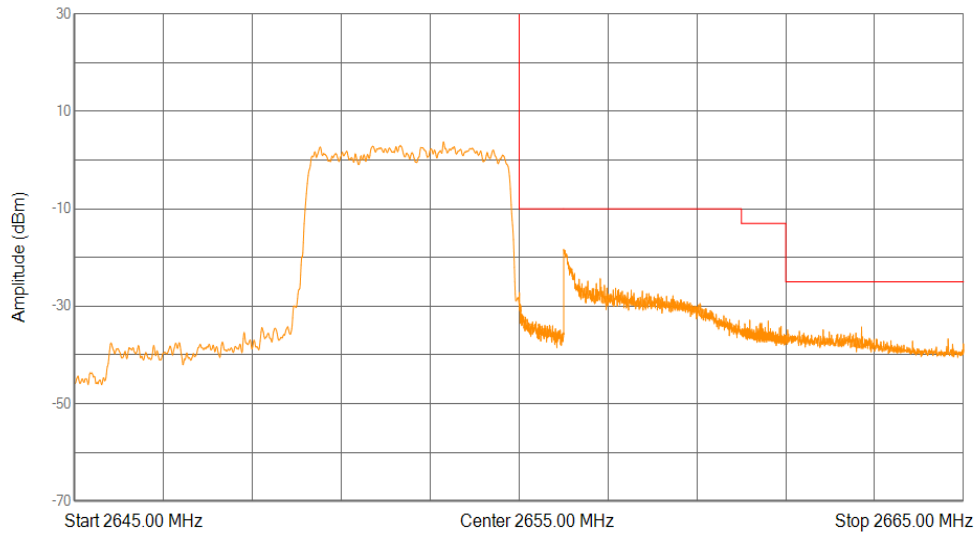


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2655	2656	100	2655.003	-27.19	-10
2	2656	2660	1000	2656.004	-18.54	-10
3	2660	2661	1000	2660.189	-32.87	-13
4	2661	2665	1000	2662.704	-34.27	-25

06 Out-of-band emissions

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band41(2535-2655)	5	40065	25	#0	QPSK	25805.76	-33.57	-25	PASS
Band41(2535-2655)	5	40065	25	#0	16QAM	24442.79	-32.45	-25	PASS
Band41(2535-2655)	5	40640	25	#0	QPSK	24421.11	-32.57	-25	PASS
Band41(2535-2655)	5	40640	25	#0	16QAM	25196.95	-33.65	-25	PASS
Band41(2535-2655)	5	41215	25	#0	QPSK	24386.05	-33.51	-25	PASS
Band41(2535-2655)	5	41215	25	#0	16QAM	24460.00	-33.02	-25	PASS
Band41(2535-2655)	10	40090	50	#0	QPSK	24401.35	-32.30	-25	PASS
Band41(2535-2655)	10	40090	50	#0	16QAM	26471.31	-33.14	-25	PASS
Band41(2535-2655)	10	40640	50	#0	QPSK	24451.08	-33.50	-25	PASS
Band41(2535-2655)	10	40640	50	#0	16QAM	24435.14	-32.93	-25	PASS
Band41(2535-2655)	10	41190	50	#0	QPSK	24416.01	-33.50	-25	PASS
Band41(2535-2655)	10	41190	50	#0	16QAM	24389.88	-32.74	-25	PASS
Band41(2535-2655)	15	40115	75	#0	QPSK	24282.14	-33.46	-25	PASS
Band41(2535-2655)	15	40115	75	#0	16QAM	24454.26	-33.25	-25	PASS
Band41(2535-2655)	15	40640	75	#0	QPSK	26470.04	-33.14	-25	PASS
Band41(2535-2655)	15	40640	75	#0	16QAM	24465.74	-32.58	-25	PASS
Band41(2535-2655)	15	41165	75	#0	QPSK	24356.09	-33.31	-25	PASS
Band41(2535-2655)	15	41165	75	#0	16QAM	26454.74	-32.90	-25	PASS
Band41(2535-2655)	20	40140	100	#0	QPSK	24485.50	-33.15	-25	PASS
Band41(2535-2655)	20	40140	100	#0	16QAM	24498.25	-33.76	-25	PASS


Band41(2535-2655)	20	40640	100	#0	QPSK	26447.09	-32.19	-25	PASS
Band41(2535-2655)	20	40640	100	#0	16QAM	24618.74	-33.24	-25	PASS
Band41(2535-2655)	20	41140	100	#0	QPSK	24387.96	-32.02	-25	PASS
Band41(2535-2655)	20	41140	100	#0	16QAM	24408.36	-32.91	-25	PASS

Band41(2535-2655) 16QAM BW=10MHz Channel=40090 RB Size=50 Position=#0

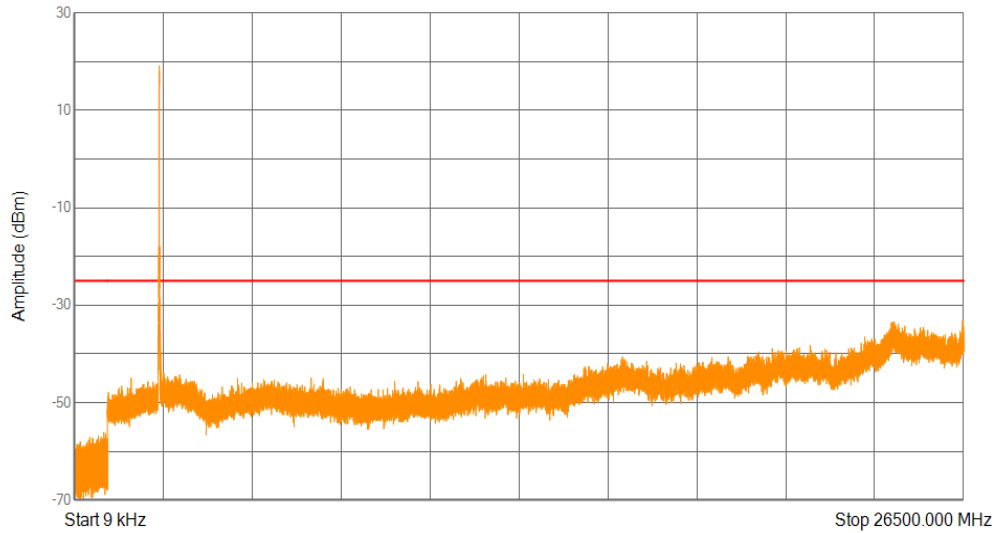


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.012274725	-46.9	-25
2	0.15	30	10	0.15	-49.54	-25
3	30	1000	100	894.755	-56.15	-25
4	1000	26500	1000	26471.3125	-33.14	-25

Band41(2535-2655) 16QAM BW=10MHz Channel=40640 RB Size=50 Position=#0

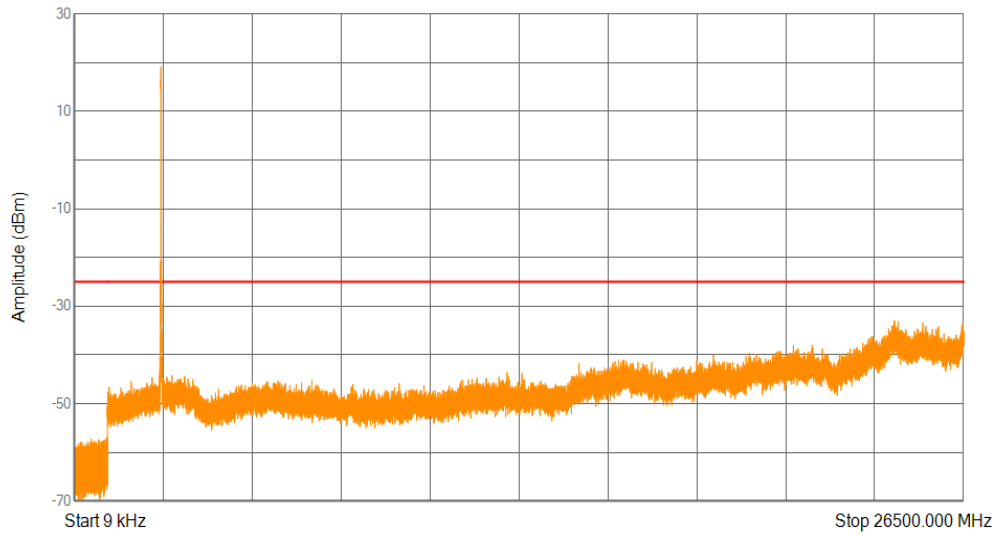


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009750825	-41.28	-25
2	0.15	30	10	0.15970125	-48.21	-25
3	30	1000	100	995.053	-56.82	-25
4	1000	26500	1000	24435.1375	-32.93	-25

Band41(2535-2655) 16QAM BW=10MHz Channel=41190 RB Size=50 Position=#0

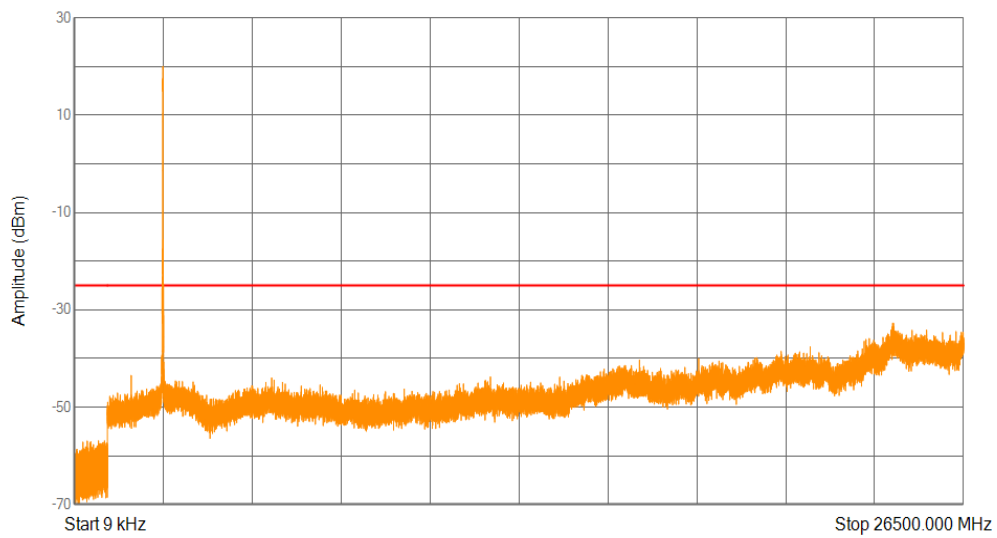


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.021390375	-45.29	-25
2	0.15	30	10	0.15074625	-47.23	-25
3	30	1000	100	735.94175	-56.94	-25
4	1000	26500	1000	24389.875	-32.74	-25

Band41(2535-2655) 16QAM BW=15MHz Channel=40115 RB Size=75 Position=#0

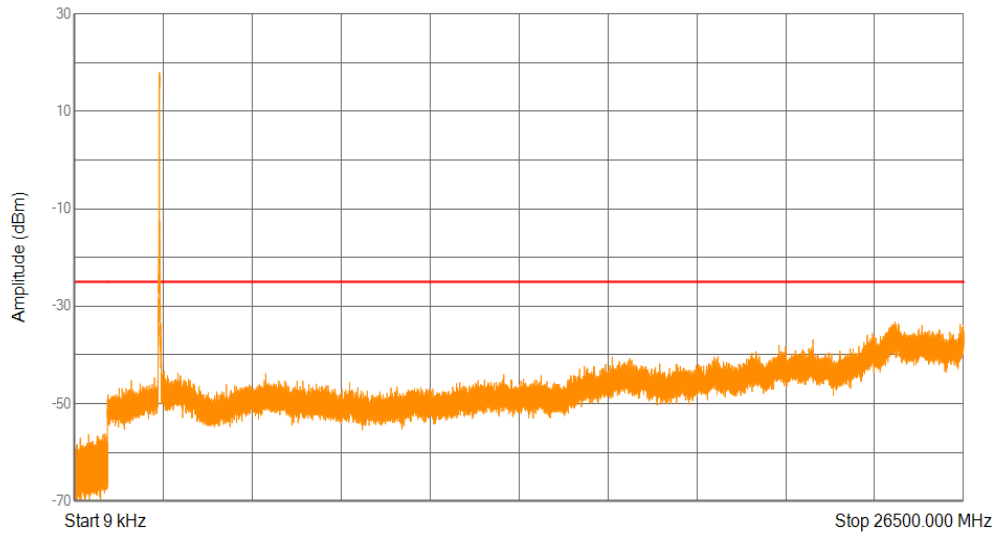


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01232055	-44.39	-25
2	0.15	30	10	0.15	-47.64	-25
3	30	1000	100	932.70625	-56.24	-25
4	1000	26500	1000	24454.2625	-33.25	-25

Band41(2535-2655) 16QAM BW=15MHz Channel=40640 RB Size=75 Position=#0

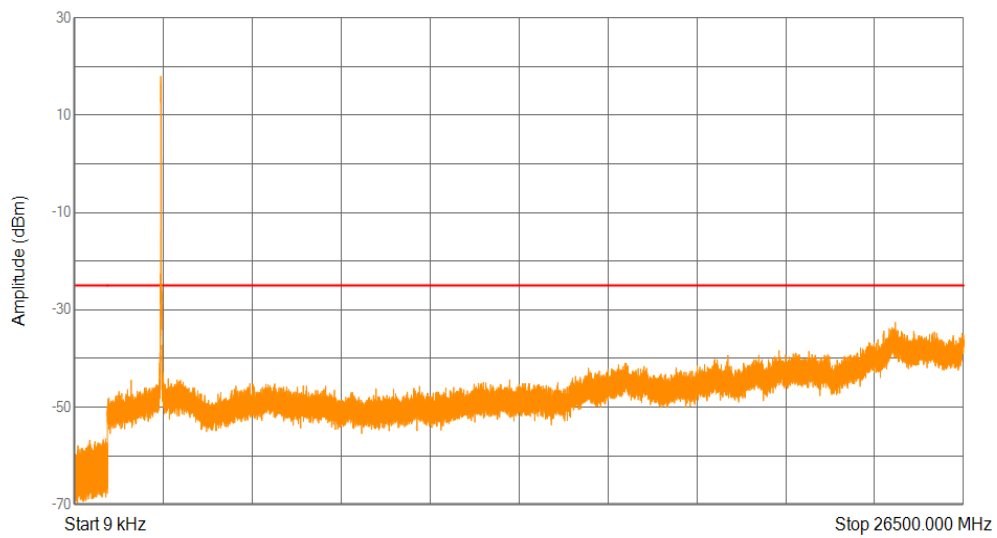


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.010547475	-43.94	-25
2	0.15	30	10	0.15820875	-49.93	-25
3	30	1000	100	949.6085	-56.5	-25
4	1000	26500	1000	24465.7375	-32.58	-25

Band41(2535-2655) 16QAM BW=15MHz Channel=41165 RB Size=75 Position=#0

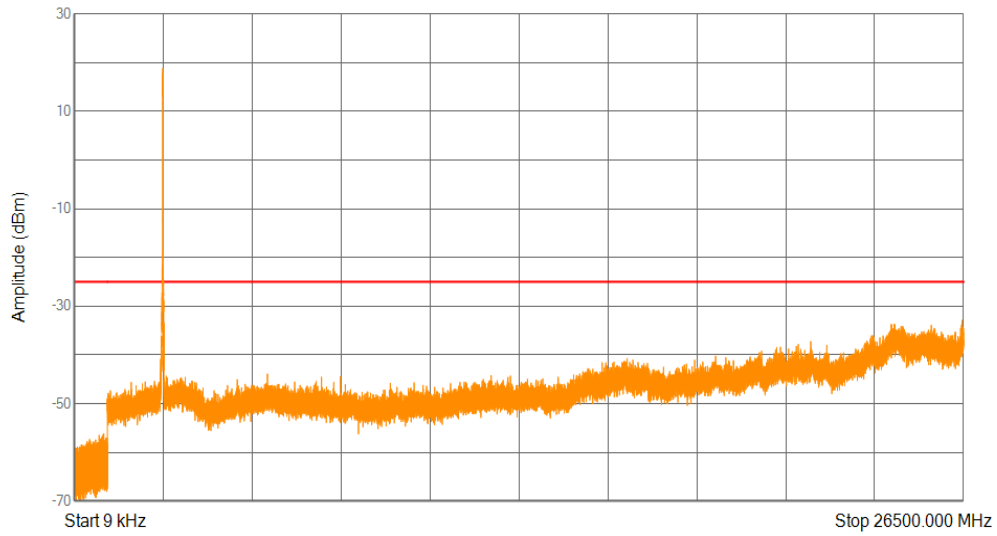


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.010328925	-42.4	-25
2	0.15	30	10	0.16417875	-49.15	-25
3	30	1000	100	891.554	-56.15	-25
4	1000	26500	1000	26454.7375	-32.9	-25

Band41(2535-2655) 16QAM BW=20MHz Channel=40140 RB Size=100 Position=#0

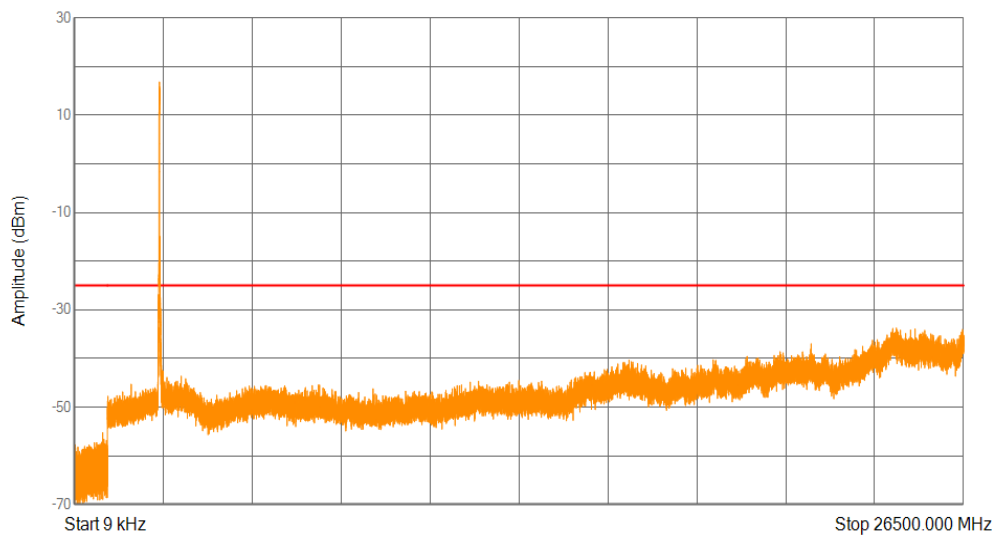


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0189264	-45.28	-25
2	0.15	30	10	0.15074625	-49.53	-25
3	30	1000	100	859.18025	-55.24	-25
4	1000	26500	1000	24498.25	-33.76	-25

Band41(2535-2655) 16QAM BW=20MHz Channel=40640 RB Size=100 Position=#0

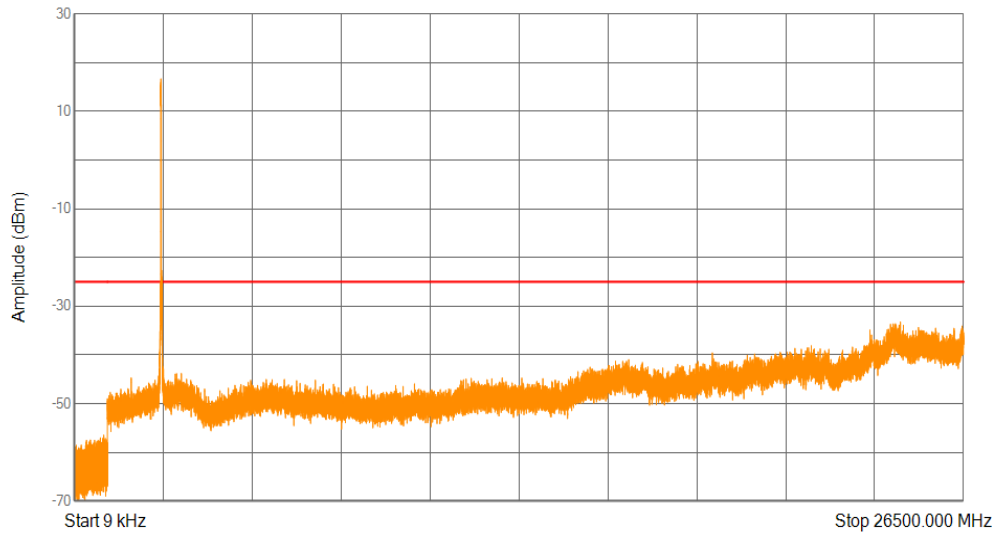


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01656465	-44.47	-25
2	0.15	30	10	0.15074625	-50.08	-25
3	30	1000	100	888.062	-56.47	-25
4	1000	26500	1000	24618.7375	-33.24	-25

Band41(2535-2655) 16QAM BW=20MHz Channel=41140 RB Size=100 Position=#0

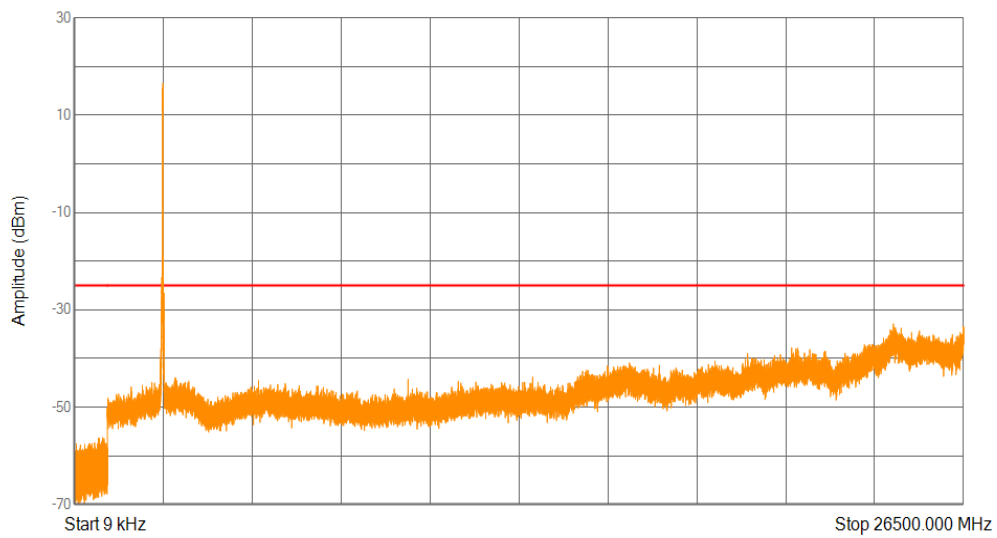


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.010519275	-42.4	-25
2	0.15	30	10	0.1604475	-50.02	-25
3	30	1000	100	855.25175	-56.28	-25
4	1000	26500	1000	24408.3625	-32.91	-25

Band41(2535-2655) 16QAM BW=5MHz Channel=40065 RB Size=25 Position=#0

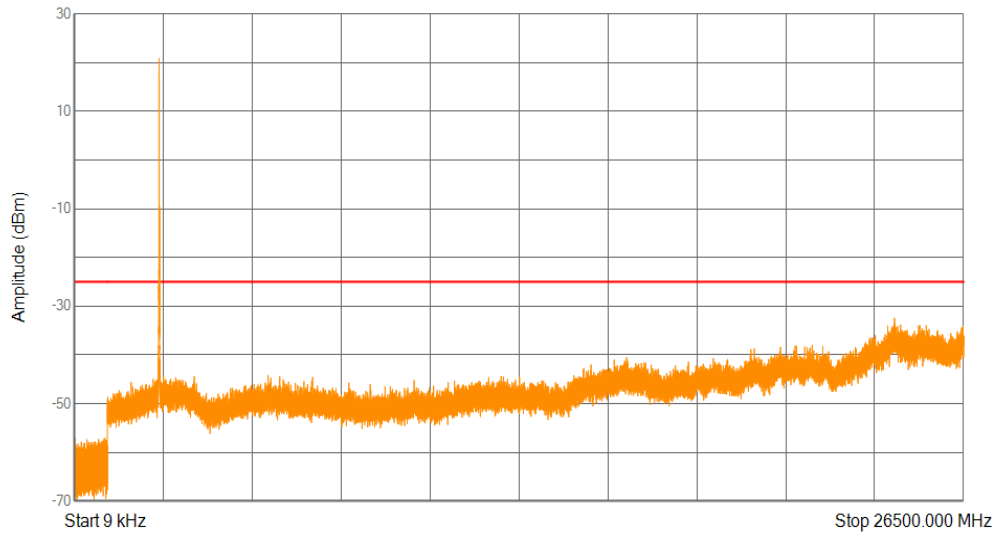


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0104664	-48.28	-25
2	0.15	30	10	0.1514925	-50.69	-25
3	30	1000	100	30.31525	-57.03	-25
4	1000	26500	1000	24442.7875	-32.45	-25

Band41(2535-2655) 16QAM BW=5MHz Channel=40640 RB Size=25 Position=#0

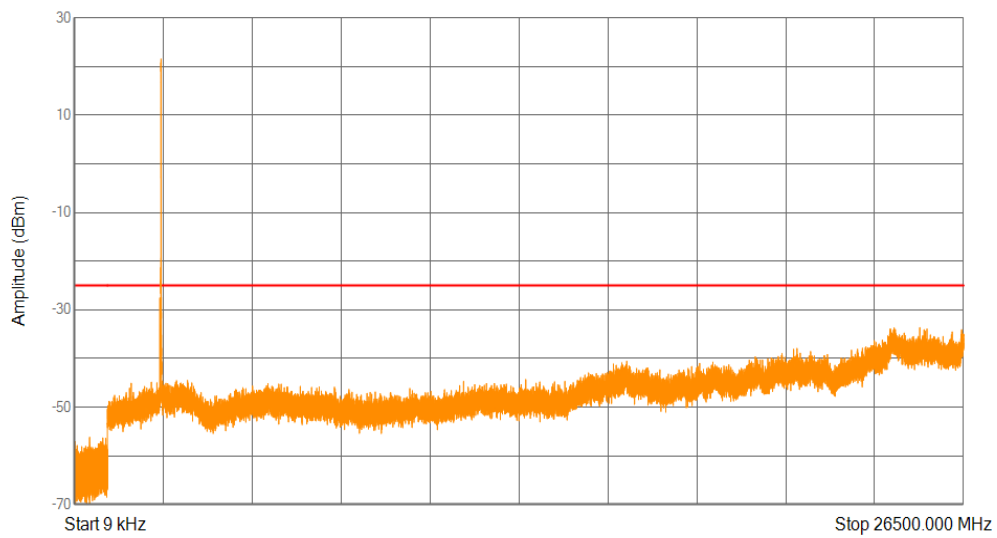


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01048755	-43.72	-25
2	0.15	30	10	0.16791	-50.72	-25
3	30	1000	100	470.477	-56.23	-25
4	1000	26500	1000	25196.95	-33.65	-25

Band41(2535-2655) 16QAM BW=5MHz Channel=41215 RB Size=25 Position=#0

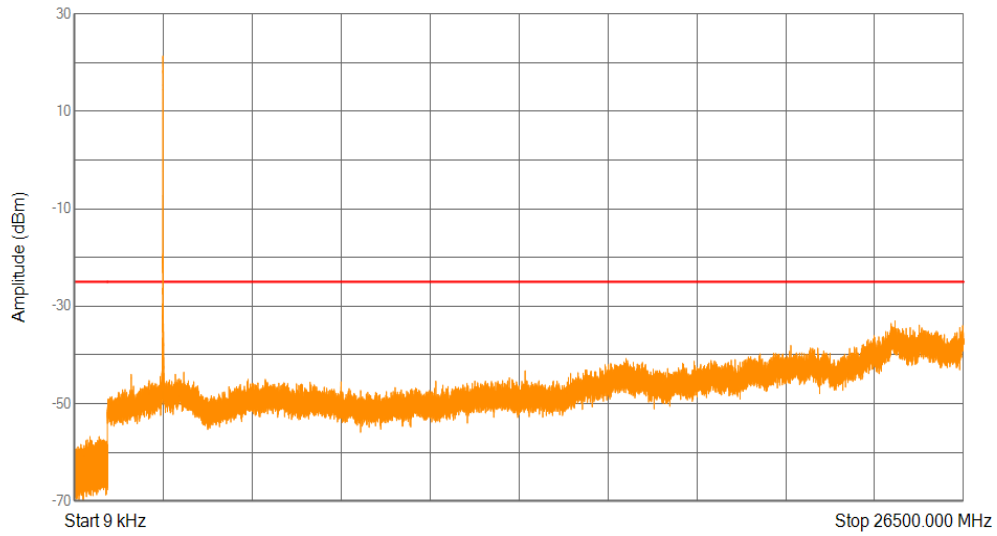


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.02588475	-48.87	-25
2	0.15	30	10	0.15	-48.6	-25
3	30	1000	100	479.3525	-56.76	-25
4	1000	26500	1000	24460	-33.02	-25

Band41(2535-2655) QPSK BW=10MHz Channel=40090 RB Size=50 Position=#0

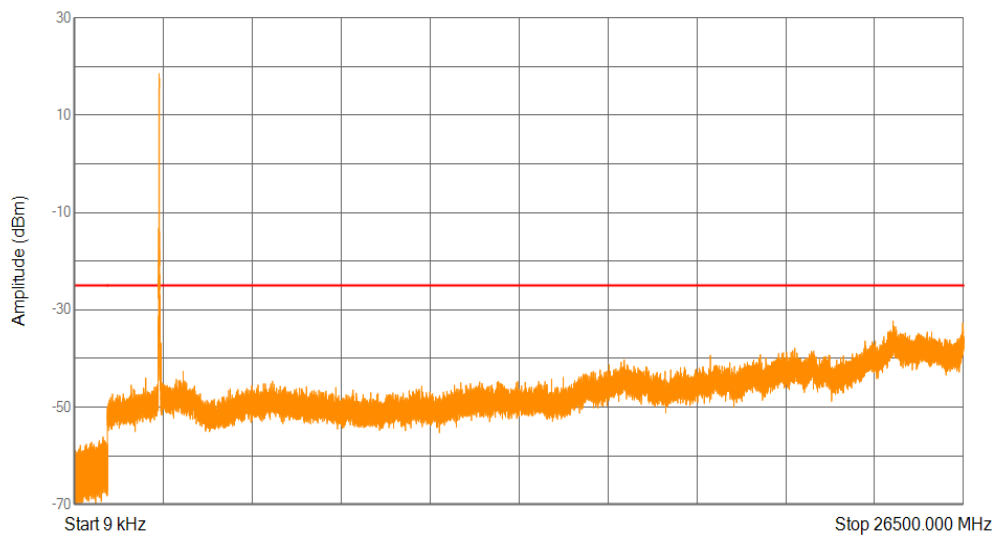


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01319475	-47.16	-25
2	0.15	30	10	0.15373125	-48.63	-25
3	30	1000	100	871.7175	-56.12	-25
4	1000	26500	1000	24401.35	-32.3	-25

Band41(2535-2655) QPSK BW=10MHz Channel=40640 RB Size=50 Position=#0

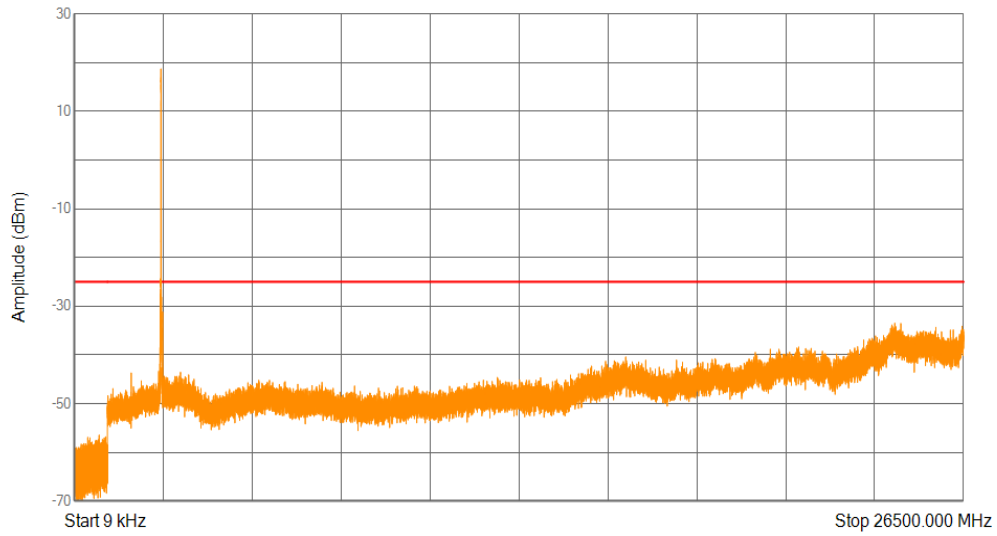


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01460475	-42.21	-25
2	0.15	30	10	0.15223875	-47.95	-25
3	30	1000	100	754.9295	-56.47	-25
4	1000	26500	1000	24451.075	-33.5	-25

Band41(2535-2655) QPSK BW=10MHz Channel=41190 RB Size=50 Position=#0

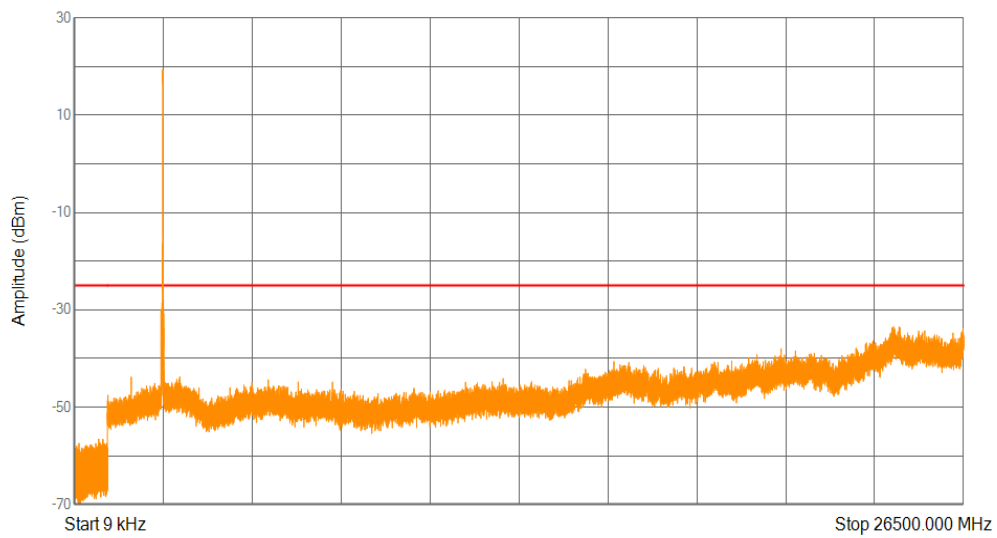


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0119187	-45.77	-25
2	0.15	30	10	0.16716375	-48.62	-25
3	30	1000	100	739.96725	-56.58	-25
4	1000	26500	1000	24416.0125	-33.5	-25

Band41(2535-2655) QPSK BW=15MHz Channel=40115 RB Size=75 Position=#0

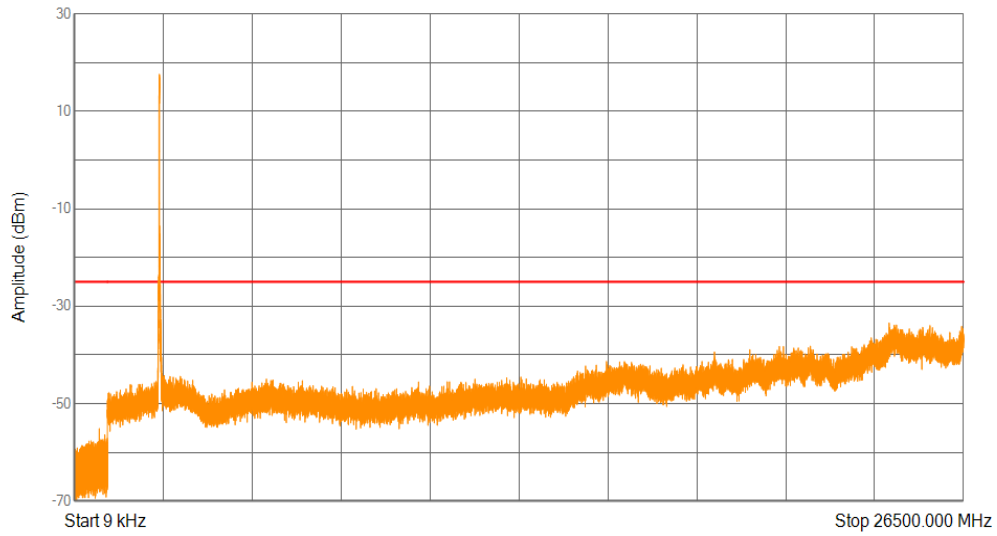


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.028708275	-46.95	-25
2	0.15	30	10	0.1604475	-47.75	-25
3	30	1000	100	759.246	-55.14	-25
4	1000	26500	1000	24282.1375	-33.46	-25

Band41(2535-2655) QPSK BW=15MHz Channel=40640 RB Size=75 Position=#0

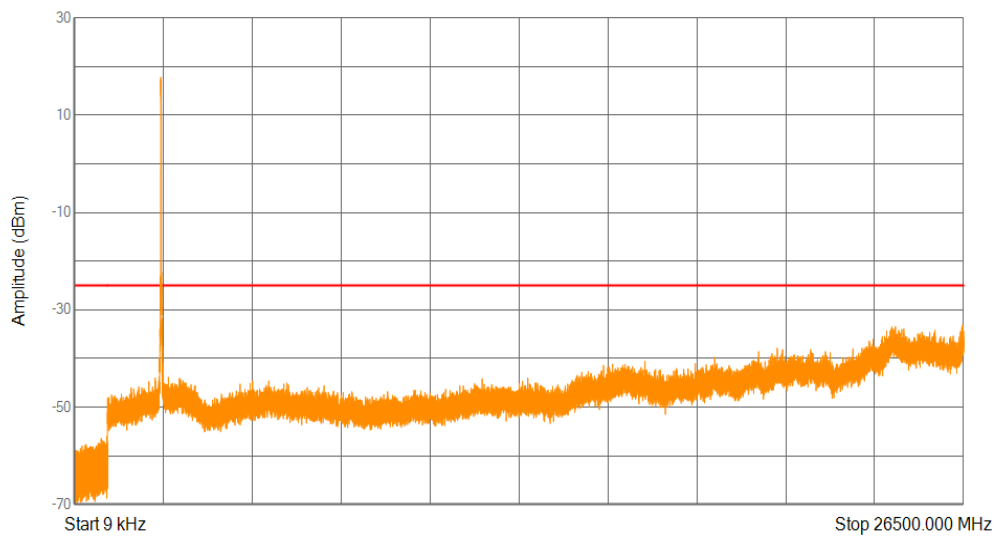


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.018323625	-48.11	-25
2	0.15	30	10	0.1604475	-48.93	-25
3	30	1000	100	980.81825	-56	-25
4	1000	26500	1000	26470.0375	-33.14	-25

Band41(2535-2655) QPSK BW=15MHz Channel=41165 RB Size=75 Position=#0

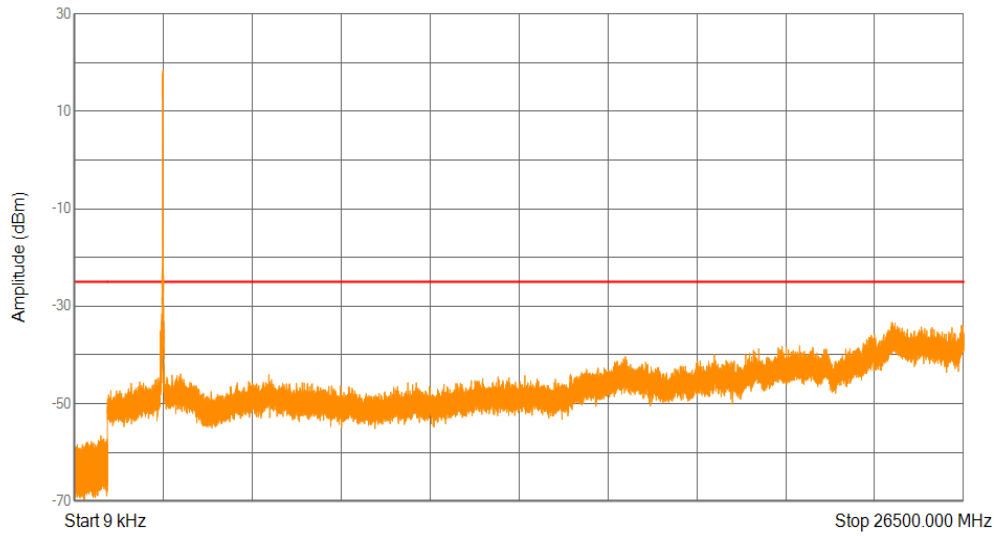


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0115662	-47.29	-25
2	0.15	30	10	0.15522375	-47.43	-25
3	30	1000	100	803.84175	-56.59	-25
4	1000	26500	1000	24356.0875	-33.31	-25

Band41(2535-2655) QPSK BW=20MHz Channel=40140 RB Size=100 Position=#0

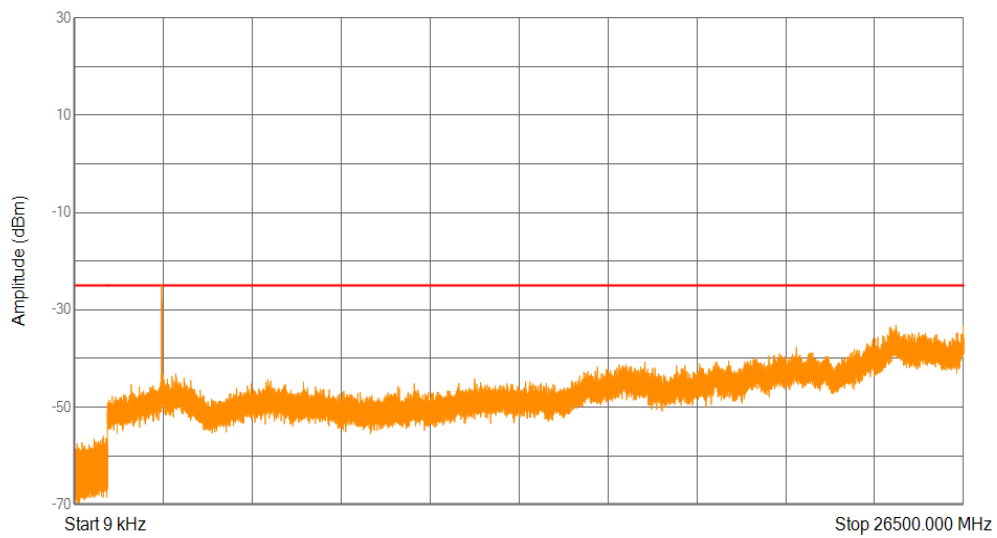


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009518175	-43.09	-25
2	0.15	30	10	0.152985	-48.71	-25
3	30	1000	100	877.17375	-55.98	-25
4	1000	26500	1000	24485.5	-33.15	-25

Band41(2535-2655) QPSK BW=20MHz Channel=40640 RB Size=100 Position=#0

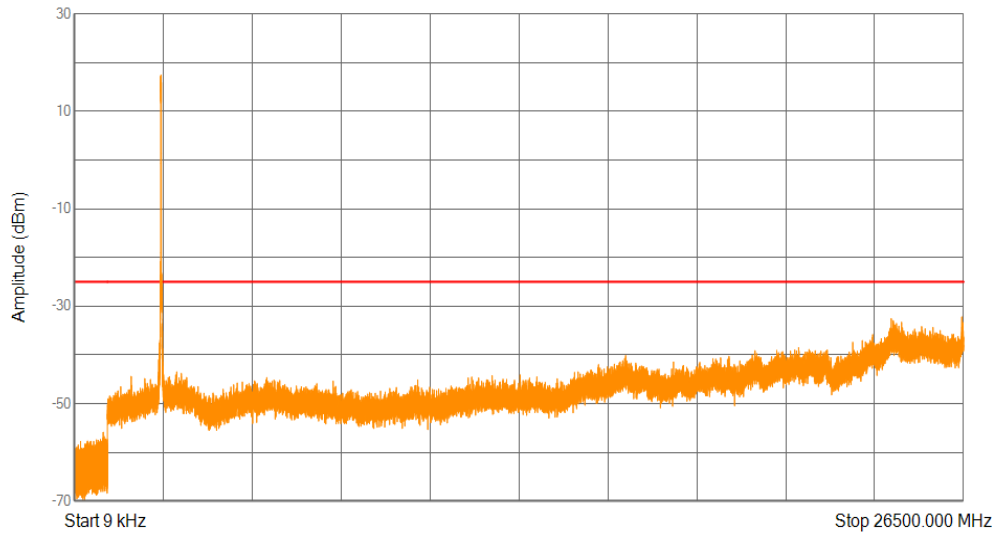


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0151899	-44.93	-25
2	0.15	30	10	0.15	-48.96	-25
3	30	1000	100	875.81575	-55.88	-25
4	1000	26500	1000	26447.0875	-32.19	-25

Band41(2535-2655) QPSK BW=20MHz Channel=41140 RB Size=100 Position=#0

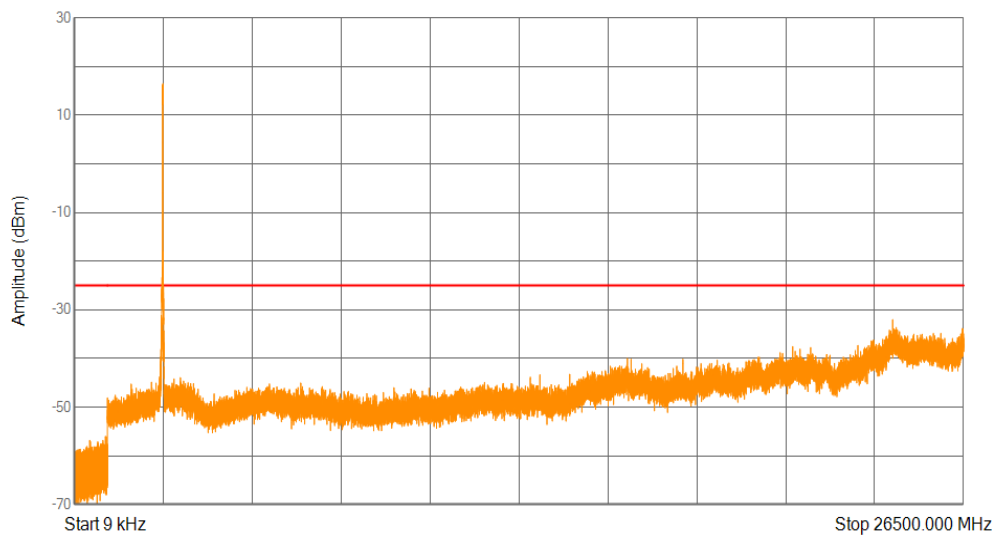


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.00989535	-42.07	-25
2	0.15	30	10	0.1514925	-47.62	-25
3	30	1000	100	940.36925	-56.03	-25
4	1000	26500	1000	24387.9625	-32.02	-25

Band41(2535-2655) QPSK BW=5MHz Channel=40065 RB Size=25 Position=#0

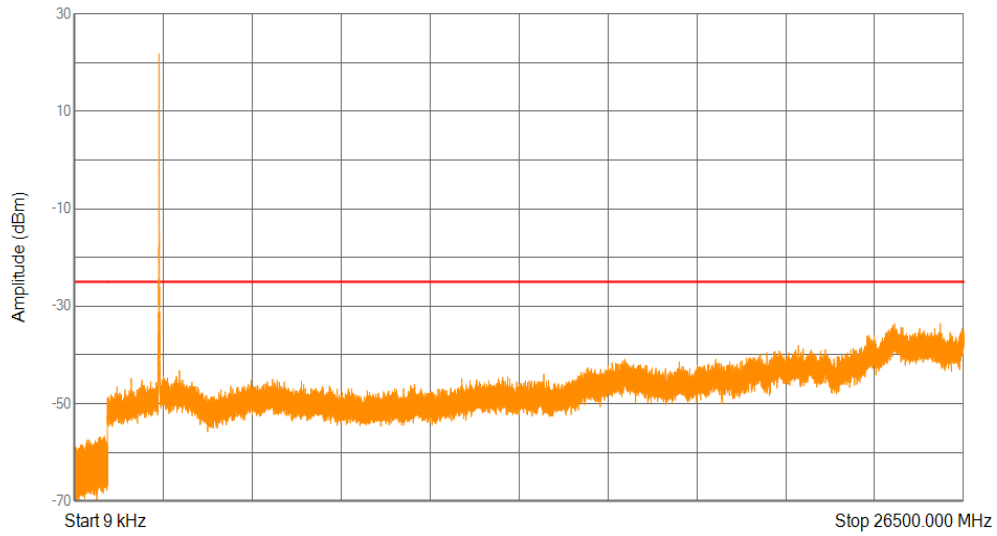


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0107625	-43.31	-25
2	0.15	30	10	0.15074625	-47.4	-25
3	30	1000	100	914.349	-56.71	-25
4	1000	26500	1000	25805.7625	-33.57	-25

Band41(2535-2655) QPSK BW=5MHz Channel=40640 RB Size=25 Position=#0

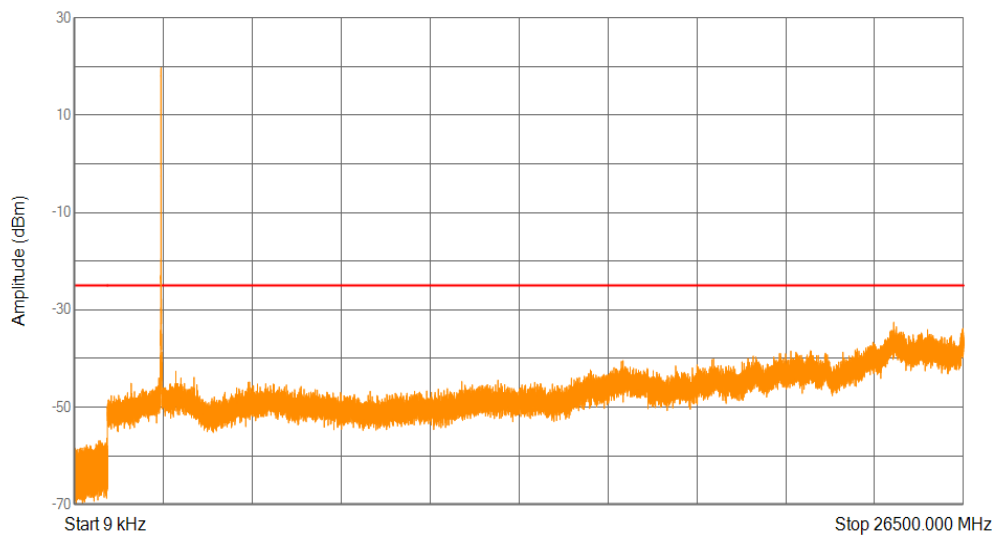

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.013198275	-42.22	-25
2	0.15	30	10	0.152985	-46.81	-25
3	30	1000	100	978.63575	-56.4	-25
4	1000	26500	1000	24421.1125	-32.57	-25

Band41(2535-2655) QPSK BW=5MHz Channel=41215 RB Size=25 Position=#0

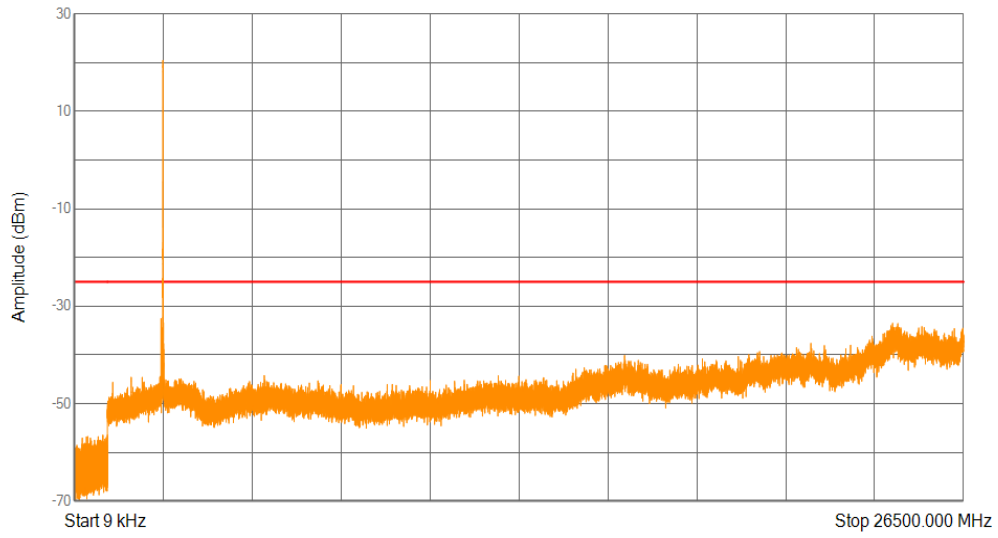

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0103536	-45.89	-25
2	0.15	30	10	0.15597	-48.47	-25
3	30	1000	100	999.58775	-56.44	-25
4	1000	26500	1000	24386.05	-33.51	-25