TEST REPORT

Product Name:	MUSIC PLAYER
FCC ID:	2BSRV-Y9
Trademark:	HIFIFEEU
Model Number:	Y9, Y3, Y5, Y6, Y7
Prepared For:	Shenzhen Lingke Technology Co., Ltd.
Address:	Suite 2001, Building 3, Tangdong Optoelectronics R & D Tower, Guxing Community, Xixiang Sub-district Bao'an District, Shenzhen Guangdong, China
Manufacturer:	Shenzhen Lingke Technology Co., Ltd.
Address:	Suite 2001, Building 3, Tangdong Optoelectronics R & D Tower, Guxing Community, Xixiang Sub-district Bao'an District, Shenzhen Guangdong, China
Prepared By:	Shenzhen CTB Testing Technology Co., Ltd.
Address:	1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date:	Oct. 15, 2025
Sample tested Date:	Oct. 15, 2025 to Nov. 26, 2025
Issue Date:	Nov. 26, 2025
Report No.:	CTB25101501705RF02
Test Standards	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10:2020
Test Results	PASS
Remark:	This is Bluetooth radio test report.

Compiled by:	Reviewed by:	Approved by:
Zhou Kui	Arron Liu	Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration Page
1. VERSION 4
2. TEST SUMMARY 5
3. MEASUREMENT UNCERTAINTY 6
4. PRODUCT INFORMATION AND TEST SETUP 7
4.1 Product Information 7
4.2 Test Setup Configuration 7
4.3 Support Equipment 7
4.4 Channel List 8
4.5 Test Mode 8
4.6 Test Environment 8
5. TEST FACILITY AND TEST INSTRUMENT USED 9
5.1 Test Facility 9
5.2 Test Instrument Used 9
6. AC POWER LINE CONDUCTED EMISSION 12
6.1 Block Diagram Of Test Setup 12
6.2 Limit 12
6.3 Test procedure 12
6.4 Test Result 14
7. RADIATED SPURIOUS EMISSION 24
7.1 Block Diagram Of Test Setup 24
7.2 Limit 24
7.3 Test procedure 25
7.4 Test Result 26
8. BAND EDGE AND RF COUNDUCTED SPURIOUS EMISSIONS 71
8.1 Block Diagram Of Test Setup 71
8.2 Limit 71
8.3 Test procedure 71
8.4 Test Result 72
9. COUDUCTED PEAK OUTPUT POWER 79
9.1 Block Diagram Of Test Setup 79
9.2 Limit 79
9.3 Test procedure 79
9.4 Test Result 79
10. 20DB OCCUPIED BANDWIDTH 83
10.1 Block Diagram Of Test Setup 83
10.2 Limit 83
10.3 Test procedure 83
10.4 Test Result 83
11. CARRIER FREQUENCIES SEPARATION 87
11.1 Block Diagram Of Test Setup 87
11.2 Limit 87
11.3 Test procedure 87
11.4 Test Result 87
12. HOPPING CHANNEL NUMBER 91
12.1 Block Diagram Of Test Setup 91
12.2 Limit 91
12.3 Test procedure 91
12.4 Test Result 91

13. DWELL TIME 93
13.1 Block Diagram Of Test Setup 93
13.2 Limit 93
13.3 Test procedure 93
13.4 Test Result 93
14. PSEUDORANDOM FREQUENCY 97
14.1 Limit 97
14.2 Test procedure 97
14.3 Test Result 97
15. ANTENNA REQUIREMENT 98
16. EUT TEST SETUP PHOTOGRAPHS 99

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB25101501705RF02	Nov. 26, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2020	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2020	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2020	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:
Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9kHz-30MHz)	4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
Frequency	1×10-7
Conducted Emission(150kHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	Y9, Y3, Y5, Y6, Y7
Model Description:	All models have the same circuit and RF module, only the model names and product memory versions are different. Test sample model: Y9
Bluetooth Version:	Bluetooth 5.1
Hardware Version:	V0.2
Software Version:	V0.5
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 1.277dBm
Type of Modulation:	Bluetooth: GFSK, π/4 DQPSK, 8DPSK
Antenna installation:	Bluetooth: Internal antenna
Antenna Gain:	Bluetooth: -0.2dBi
Ratings:	INPUT: 5V⎓2A DC 3.8V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Adapter	JIYIN	JY-05100C	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, π/4 DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, π/4 DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.8V
Normal Temperature(℃)	23
Low Temperature(℃)	0
High Temperature(℃)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 （E1962B ）	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Micowave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Micowave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7	2025/5/23	2026/5/22

					（104489/003）		
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1

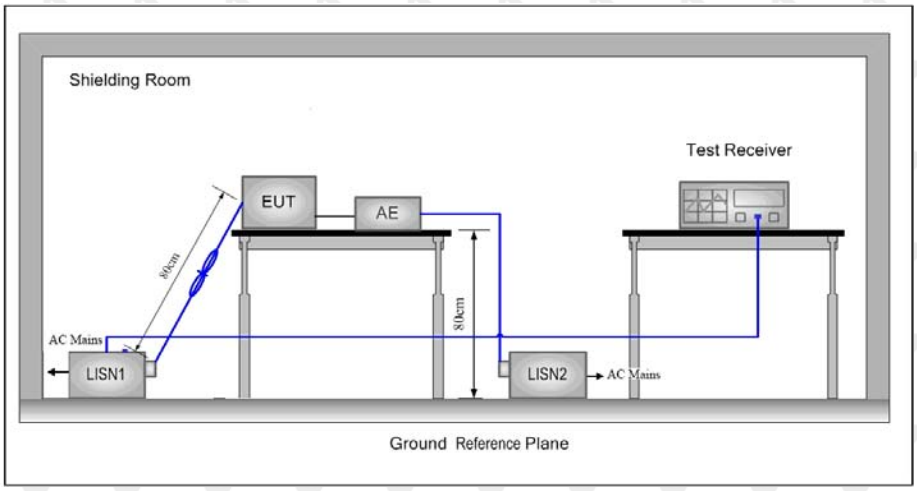
Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/9/19	2026/9/18
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 （E1962B ）	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.2 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/8	2027/6/7
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/9/19	2026/9/18
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2

5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/30	2026/5/29
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/9/19	2026/9/18
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/	/
9	Coaxial cable	Rosenberg	8m	/	/	2025/9/19	2026/9/18
10	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18
11	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18
12	Coaxial cable	Times	1m	/	/	2025/9/19	2026/9/18
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup



6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56[Note 1]	56 to 46[Note 1]
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

1) The mains terminal disturbance voltage test was conducted in a shielded room.

2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement**.**

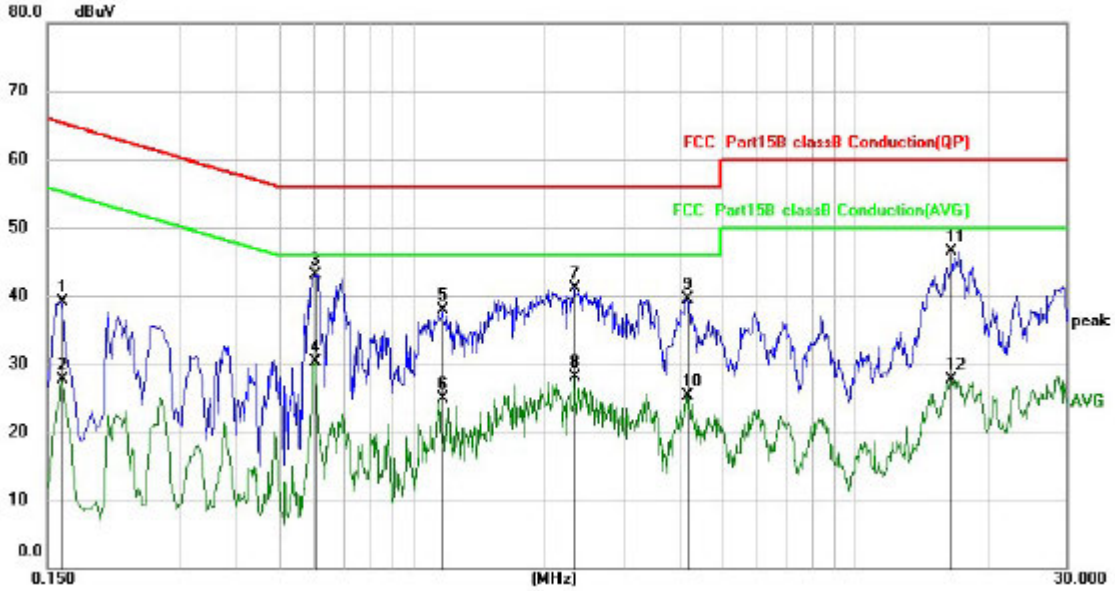
6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.

7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

Y9:

L: Worst case-GFSK(low channel)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1620	28.90	10.17	39.07	65.36	-26.29	QP
2		0.1620	17.44	10.17	27.61	55.36	-27.75	AVG
3	*	0.6018	32.84	10.22	43.06	56.00	-12.94	QP
4		0.6018	20.11	10.22	30.33	46.00	-15.67	AVG
5		1.1778	27.63	10.34	37.97	56.00	-18.03	QP
6		1.1778	14.53	10.34	24.87	46.00	-21.13	AVG
7		2.3260	30.54	10.65	41.19	56.00	-14.81	QP
8		2.3260	17.51	10.65	28.16	46.00	-17.84	AVG
9		4.1736	28.22	11.33	39.55	56.00	-16.45	QP
10		4.1736	13.94	11.33	25.27	46.00	-20.73	AVG
11		16.4700	29.37	17.04	46.41	60.00	-13.59	QP
12		16.4700	10.65	17.04	27.69	50.00	-22.31	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

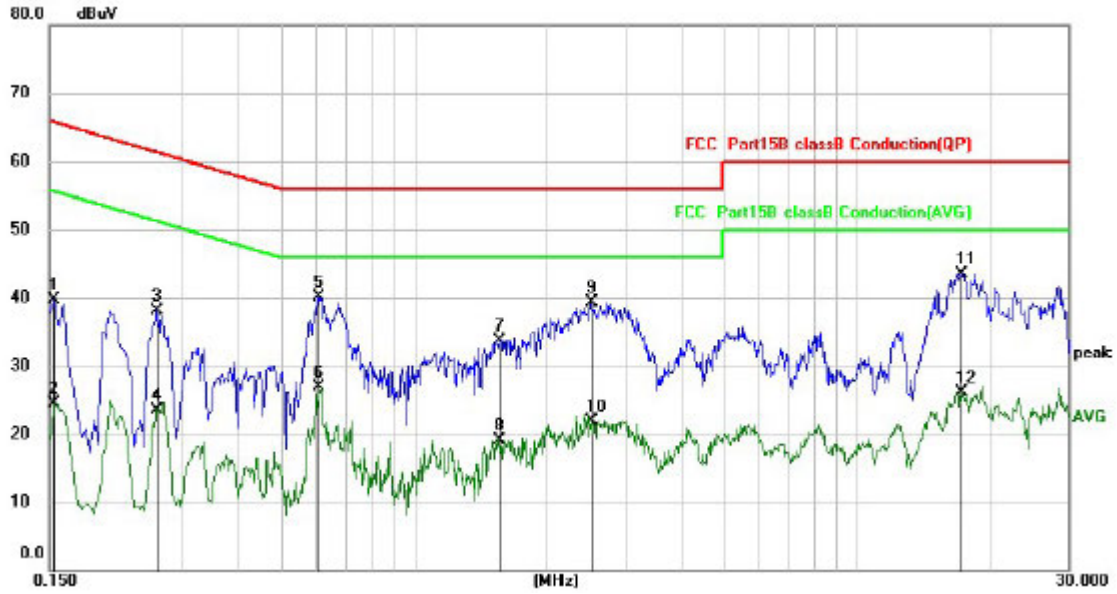N: Worst case-GFSK(low channel)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1539	29.60	10.17	39.77	65.79	-26.02	QP
2		0.1539	14.41	10.17	24.58	55.79	-31.21	AVG
3		0.2620	28.02	10.18	38.20	61.37	-23.17	QP
4		0.2620	13.25	10.18	23.43	51.37	-27.94	AVG
5	*	0.6059	29.87	10.22	40.09	56.00	-15.91	QP
6		0.6059	16.71	10.22	26.93	46.00	-19.07	AVG
7		1.5580	23.33	10.43	33.76	56.00	-22.24	QP
8		1.5580	8.63	10.43	19.06	46.00	-26.94	AVG
9		2.5059	28.53	10.72	39.25	56.00	-16.75	QP
10		2.5059	11.25	10.72	21.97	46.00	-24.03	AVG
11		17.1139	26.19	17.33	43.52	60.00	-16.48	QP
12		17.1139	8.77	17.33	26.10	50.00	-23.90	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Y3:

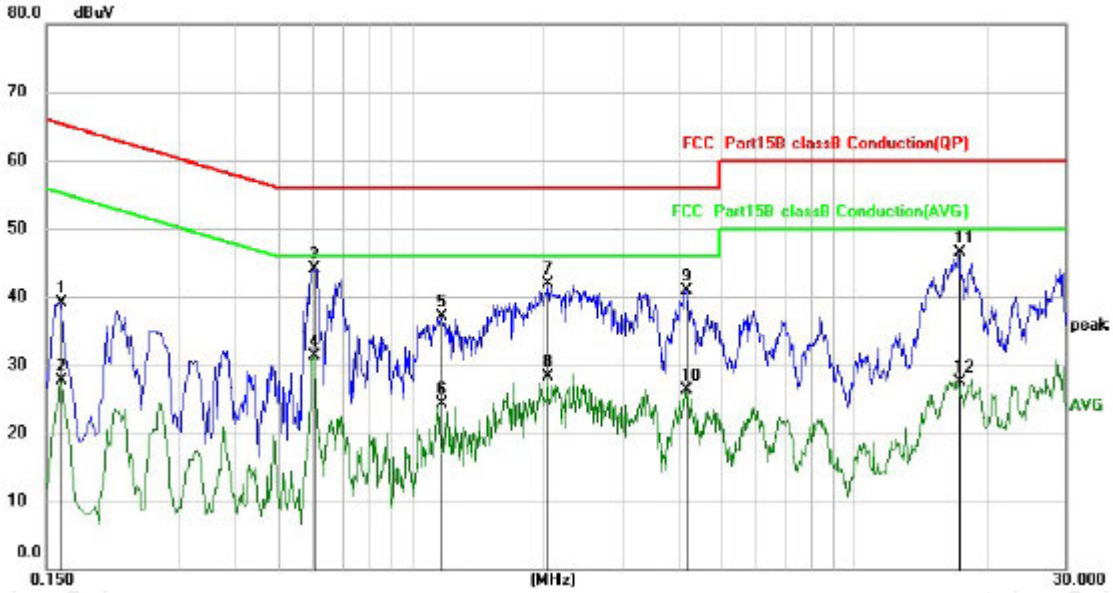L: Worst case-GFSK(low channel)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1620	28.90	10.17	39.07	65.36	-26.29	QP
2		0.1620	17.44	10.17	27.61	55.36	-27.75	AVG
3	*	0.6018	33.84	10.22	44.06	56.00	-11.94	QP
4		0.6018	21.11	10.22	31.33	46.00	-14.67	AVG
5		1.1658	26.76	10.34	37.10	56.00	-18.90	QP
6		1.1658	14.03	10.34	24.37	46.00	-21.63	AVG
7		2.0419	31.27	10.55	41.82	56.00	-14.18	QP
8		2.0419	17.80	10.55	28.35	46.00	-17.65	AVG
9		4.1817	29.61	11.33	40.94	56.00	-15.06	QP
10		4.1817	14.94	11.33	26.27	46.00	-19.73	AVG
11		17.2377	29.03	17.38	46.41	60.00	-13.59	QP
12		17.2377	10.11	17.38	27.49	50.00	-22.51	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

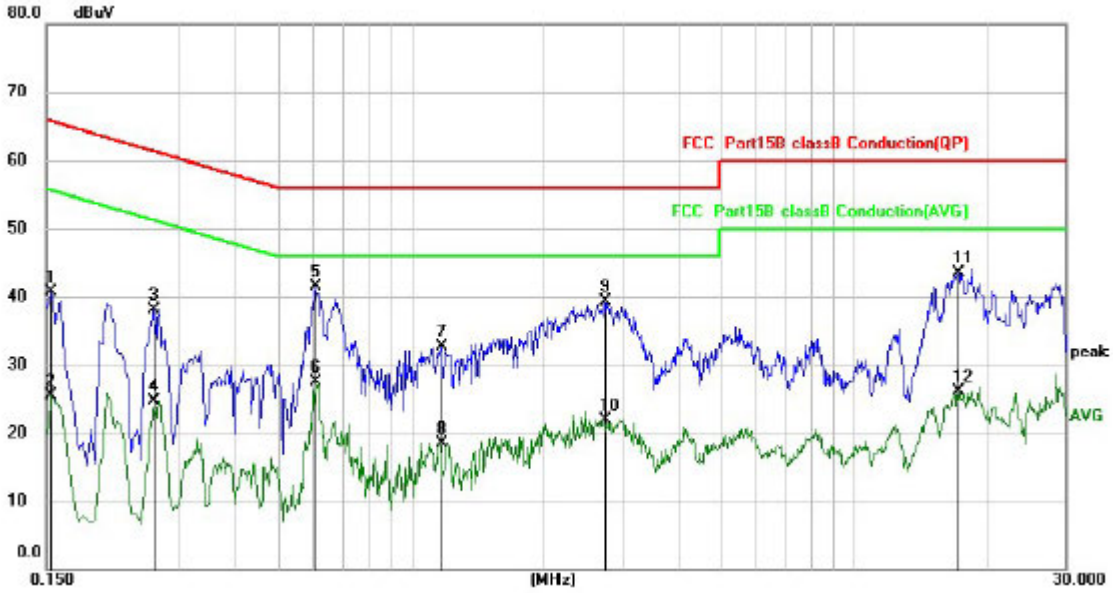N: Worst case-GFSK(low channel)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1539	30.60	10.17	40.77	65.79	-25.02	peak
2		0.1539	15.40	10.17	25.57	55.79	-30.22	AVG
3		0.2620	28.02	10.18	38.20	61.37	-23.17	peak
4		0.2620	14.59	10.18	24.77	51.37	-26.60	AVG
5	*	0.6100	31.20	10.22	41.42	56.00	-14.58	peak
6		0.6100	17.21	10.22	27.43	46.00	-18.57	AVG
7		1.1778	22.28	10.34	32.62	56.00	-23.38	peak
8		1.1778	8.14	10.34	18.48	46.00	-27.52	AVG
9		2.7300	28.59	10.80	39.39	56.00	-16.61	peak
10		2.7300	11.04	10.80	21.84	46.00	-24.16	AVG
11		17.1139	26.19	17.33	43.52	60.00	-16.48	peak
12		17.1139	8.72	17.33	26.05	50.00	-23.95	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Y5:

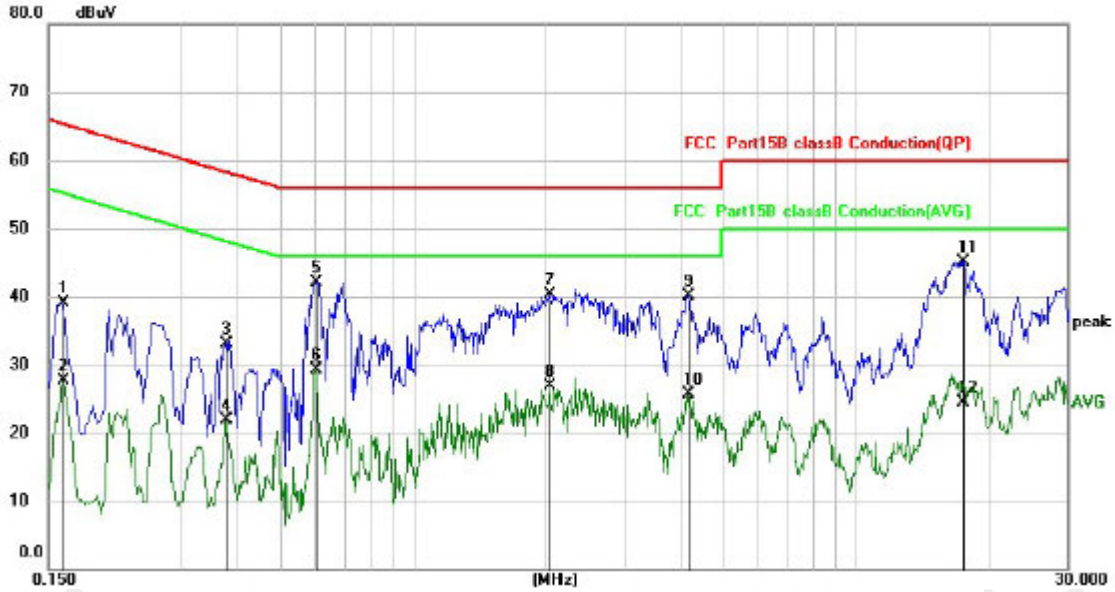L: Worst case-GFSK(low channel)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1620	28.90	10.17	39.07	65.36	-26.29	QP
2		0.1620	17.44	10.17	27.61	55.36	-27.75	AVG
3		0.3780	22.91	10.19	33.10	58.32	-25.22	QP
4		0.3780	11.68	10.19	21.87	48.32	-26.45	AVG
5	*	0.6018	31.84	10.22	42.06	56.00	-13.94	QP
6		0.6018	19.11	10.22	29.33	46.00	-16.67	AVG
7		2.0419	29.77	10.55	40.32	56.00	-15.68	QP
8		2.0419	16.30	10.55	26.85	46.00	-19.15	AVG
9		4.1736	28.72	11.33	40.05	56.00	-15.95	QP
10		4.1736	14.44	11.33	25.77	46.00	-20.23	AVG
11		17.3900	27.71	17.45	45.16	60.00	-14.84	QP
12		17.3900	7.04	17.45	24.49	50.00	-25.51	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

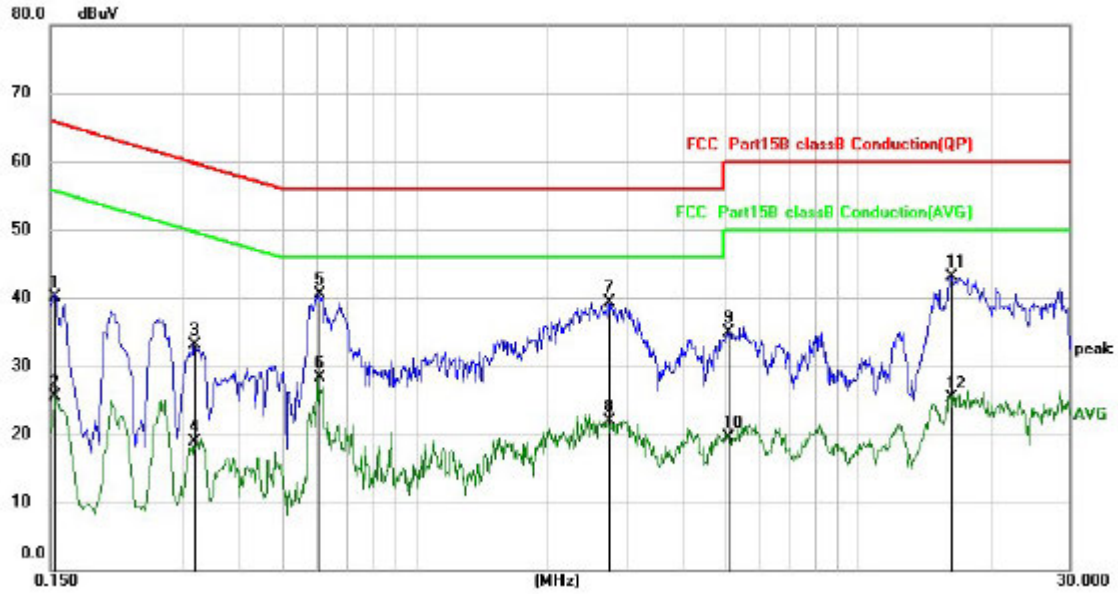N: Worst case-GFSK(low channel)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1532	30.02	10.17	40.19	65.82	-25.63	QP
2		0.1532	15.40	10.17	25.57	55.82	-30.25	AVG
3		0.3180	22.82	10.19	33.01	59.76	-26.75	QP
4		0.3180	8.70	10.19	18.89	49.76	-30.87	AVG
5	*	0.6058	30.37	10.22	40.59	56.00	-15.41	QP
6		0.6058	18.16	10.22	28.38	46.00	-17.62	AVG
7		2.7300	28.59	10.80	39.39	56.00	-16.61	QP
8		2.7300	11.04	10.80	21.84	46.00	-24.16	AVG
9		5.0900	23.23	11.67	34.90	60.00	-25.10	QP
10		5.0900	7.75	11.67	19.42	50.00	-30.58	AVG
11		16.1417	26.24	16.89	43.13	60.00	-16.87	QP
12		16.1417	8.37	16.89	25.26	50.00	-24.74	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Y6:

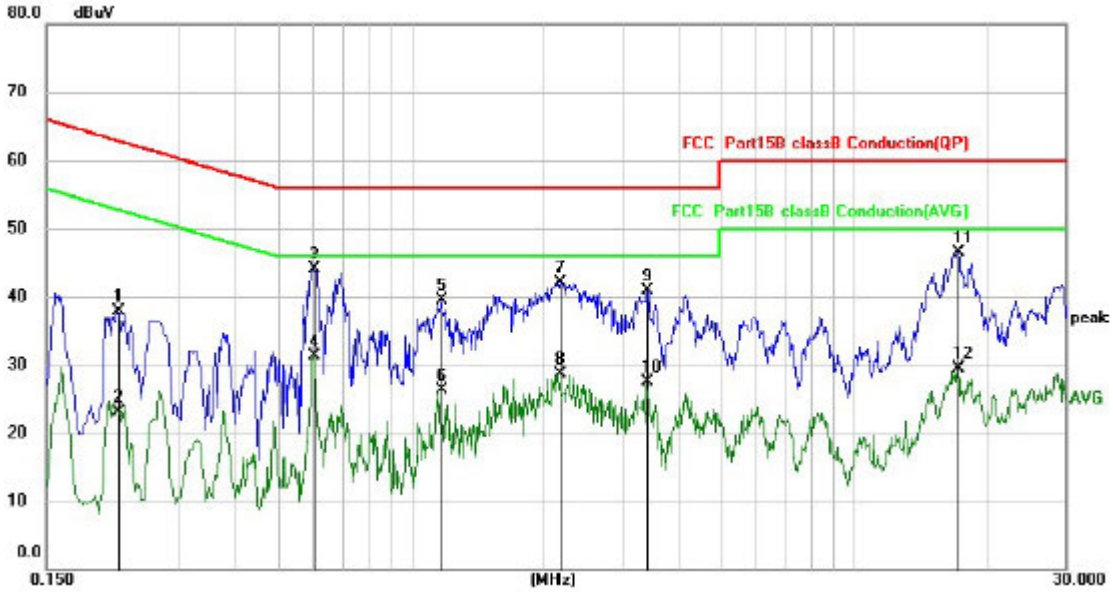L: Worst case-GFSK(low channel)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.2179	27.67	10.18	37.85	62.90	-25.05	QP
2		0.2179	12.89	10.18	23.07	52.90	-29.83	AVG
3	*	0.6018	33.84	10.22	44.06	56.00	-11.94	QP
4		0.6018	21.11	10.22	31.33	46.00	-14.67	AVG
5		1.1774	29.13	10.34	39.47	56.00	-16.53	QP
6		1.1774	16.03	10.34	26.37	46.00	-19.63	AVG
7		2.1700	31.44	10.59	42.03	56.00	-13.97	QP
8		2.1700	18.07	10.59	28.66	46.00	-17.34	AVG
9		3.4140	29.76	11.05	40.81	56.00	-15.19	QP
10		3.4140	16.39	11.05	27.44	46.00	-18.56	AVG
11		17.1579	29.06	17.35	46.41	60.00	-13.59	QP
12		17.1579	12.14	17.35	29.49	50.00	-20.51	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

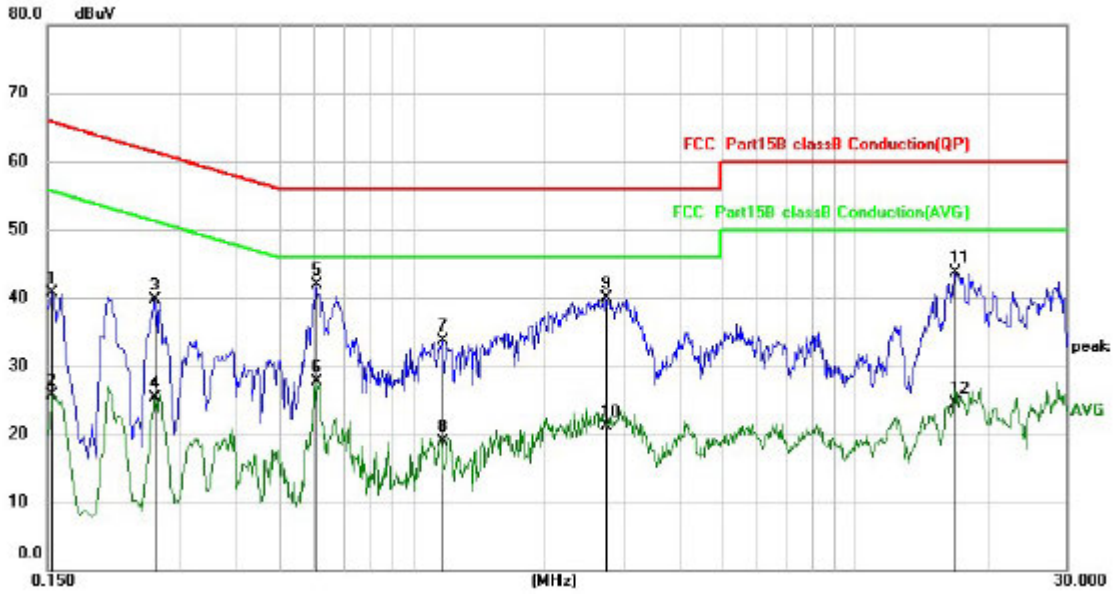N: Worst case-GFSK(low channel)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1539	30.60	10.17	40.77	65.79	-25.02	QP
2		0.1539	15.48	10.17	25.65	55.79	-30.14	AVG
3		0.2620	29.52	10.18	39.70	61.37	-21.67	QP
4		0.2620	15.12	10.18	25.30	51.37	-26.07	AVG
5	*	0.6100	31.70	10.22	41.92	56.00	-14.08	QP
6		0.6100	17.44	10.22	27.66	46.00	-18.34	AVG
7		1.1777	23.28	10.34	33.62	56.00	-22.38	QP
8		1.1777	8.52	10.34	18.86	46.00	-27.14	AVG
9		2.7300	29.09	10.80	39.89	56.00	-16.11	QP
10		2.7300	10.26	10.80	21.06	46.00	-24.94	AVG
11		16.8100	26.46	17.19	43.65	60.00	-16.35	QP
12		16.8100	7.32	17.19	24.51	50.00	-25.49	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Y7:

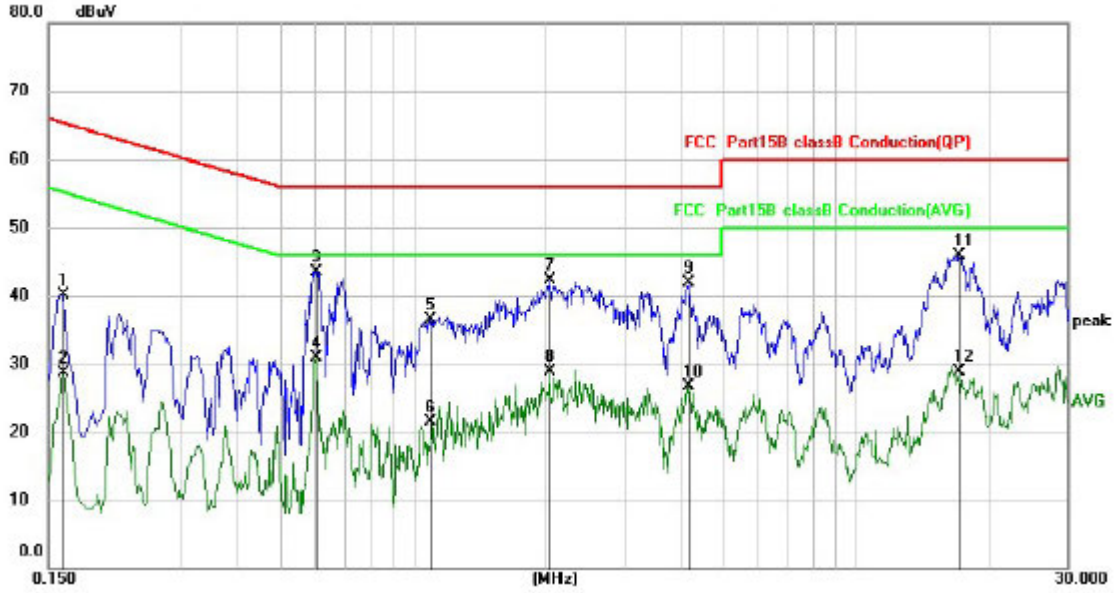L: Worst case-GFSK(low channel)




No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1620	29.90	10.17	40.07	65.36	-25.29	QP
2		0.1620	18.44	10.17	28.61	55.36	-26.75	AVG
3	*	0.6018	33.34	10.22	43.56	56.00	-12.44	QP
4		0.6018	20.61	10.22	30.83	46.00	-15.17	AVG
5		1.0900	26.16	10.32	36.48	56.00	-19.52	QP
6		1.0900	11.10	10.32	21.42	46.00	-24.58	AVG
7		2.0419	31.77	10.55	42.32	56.00	-13.68	QP
8		2.0419	18.30	10.55	28.85	46.00	-17.15	AVG
9		4.1817	30.61	11.33	41.94	56.00	-14.06	QP
10		4.1817	15.44	11.33	26.77	46.00	-19.23	AVG
11		17.0939	28.66	17.32	45.98	60.00	-14.02	QP
12		17.0939	11.67	17.32	28.99	50.00	-21.01	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

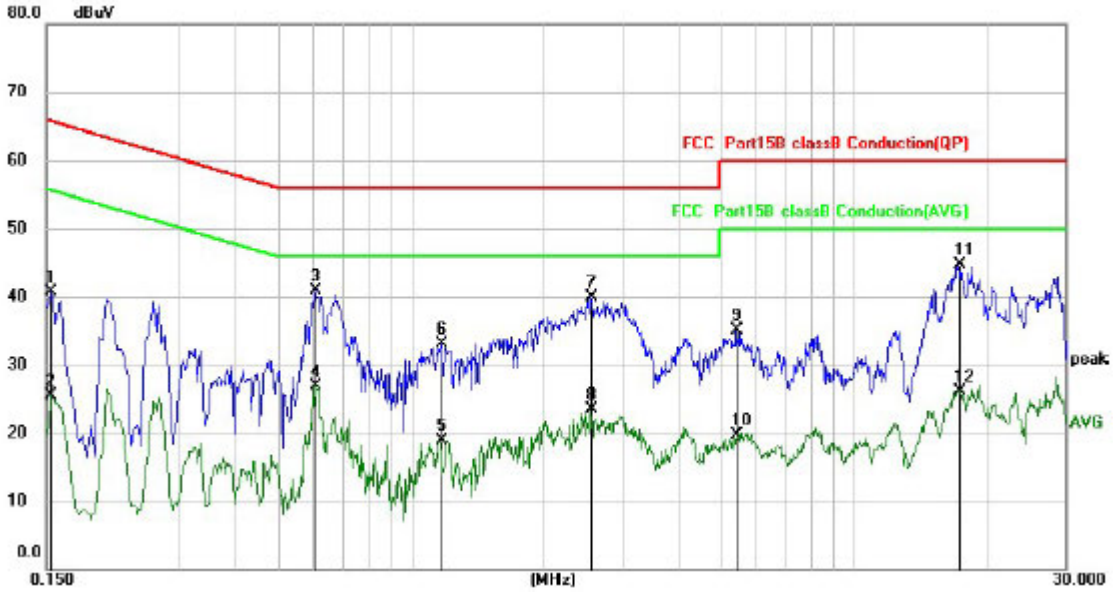N: Worst case-GFSK(low channel)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1539	30.60	10.17	40.77	65.79	-25.02	QP
2		0.1539	15.40	10.17	25.57	55.79	-30.22	AVG
3	*	0.6100	30.70	10.22	40.92	56.00	-15.08	QP
4		0.6100	16.71	10.22	26.93	46.00	-19.07	AVG
5		1.1778	8.64	10.34	18.98	46.00	-27.02	AVG
6		1.1778	22.78	10.34	33.12	56.00	-22.88	QP
7		2.5500	29.16	10.73	39.89	56.00	-16.11	QP
8		2.5500	12.74	10.73	23.47	46.00	-22.53	AVG
9		5.4378	23.19	11.83	35.02	60.00	-24.98	QP
10		5.4378	7.88	11.83	19.71	50.00	-30.29	AVG
11		17.2017	27.38	17.37	44.75	60.00	-15.25	QP
12		17.2017	8.78	17.37	26.15	50.00	-23.85	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

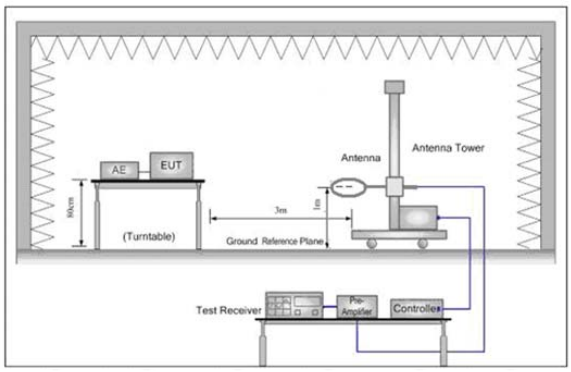


Figure 1. Below 30MHz

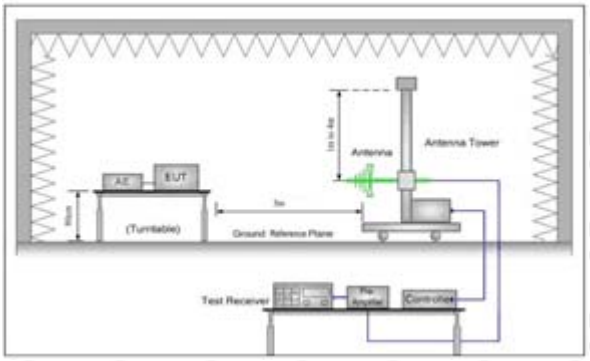


Figure 2. 30MHz to 1GHz

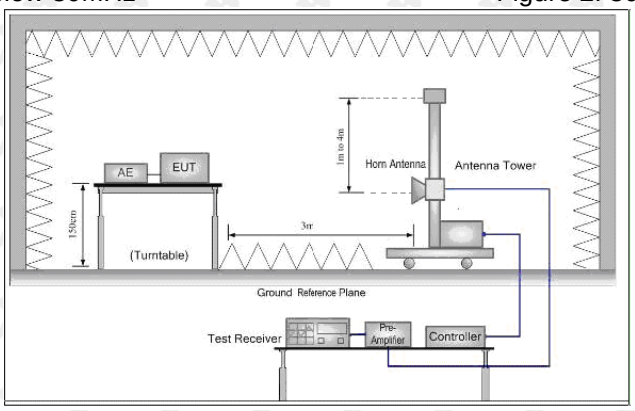


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i.Repeat above procedures until all frequencies measured was complete.


j. Full battery is usedduring test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

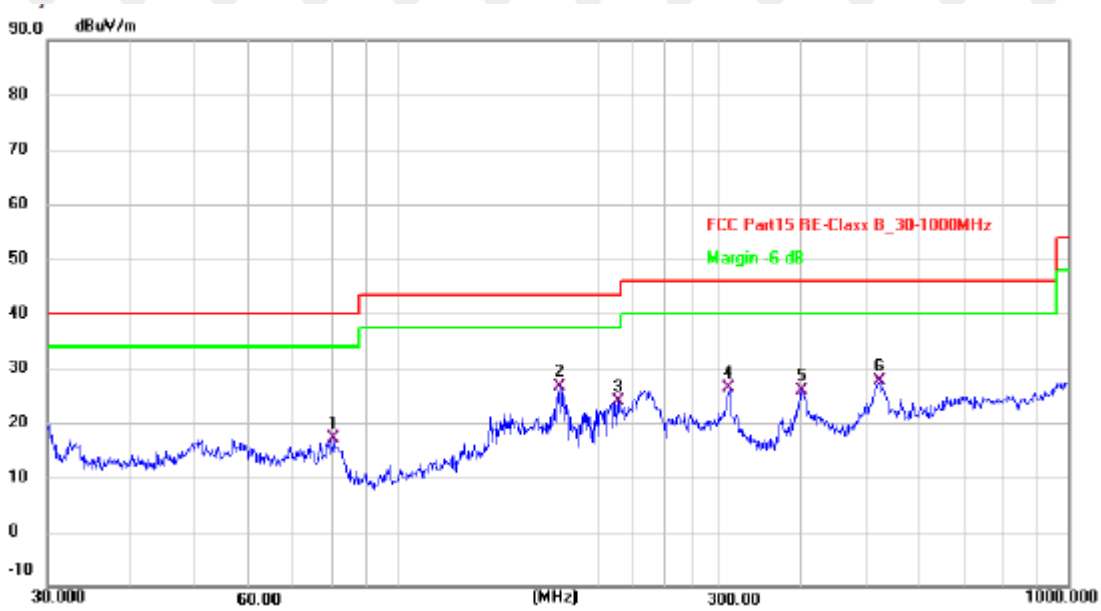
Y9:
Below 1GHz Test Results:
Antenna polarity: H
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	80.3617	34.53	-17.52	17.01	40.00	-22.99	QP
2 *	174.4240	40.15	-13.52	26.63	43.50	-16.87	QP
3	213.0150	39.23	-15.23	24.00	43.50	-19.50	QP
4	312.1792	38.23	-11.95	26.28	46.00	-19.72	QP
5	400.4318	36.30	-10.31	25.99	46.00	-20.01	QP
6	522.7180	35.09	-7.40	27.69	46.00	-18.31	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

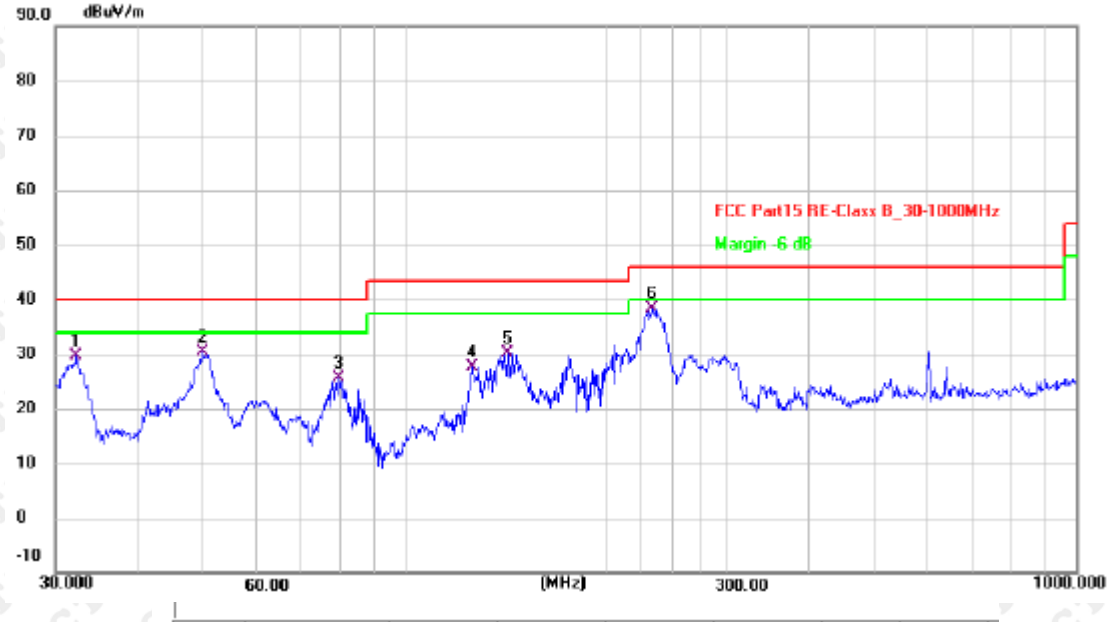
Antenna polarity: V
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.2924	44.68	-15.02	29.66	40.00	-10.34	QP
2	49.8813	44.84	-14.41	30.43	40.00	-9.57	QP
3	79.5210	43.09	-17.43	25.66	40.00	-14.34	QP
4	125.4457	43.09	-15.48	27.61	43.50	-15.89	QP
5	141.8262	43.33	-13.10	30.23	43.50	-13.27	QP
6 *	233.3486	52.85	-14.54	38.31	46.00	-7.69	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

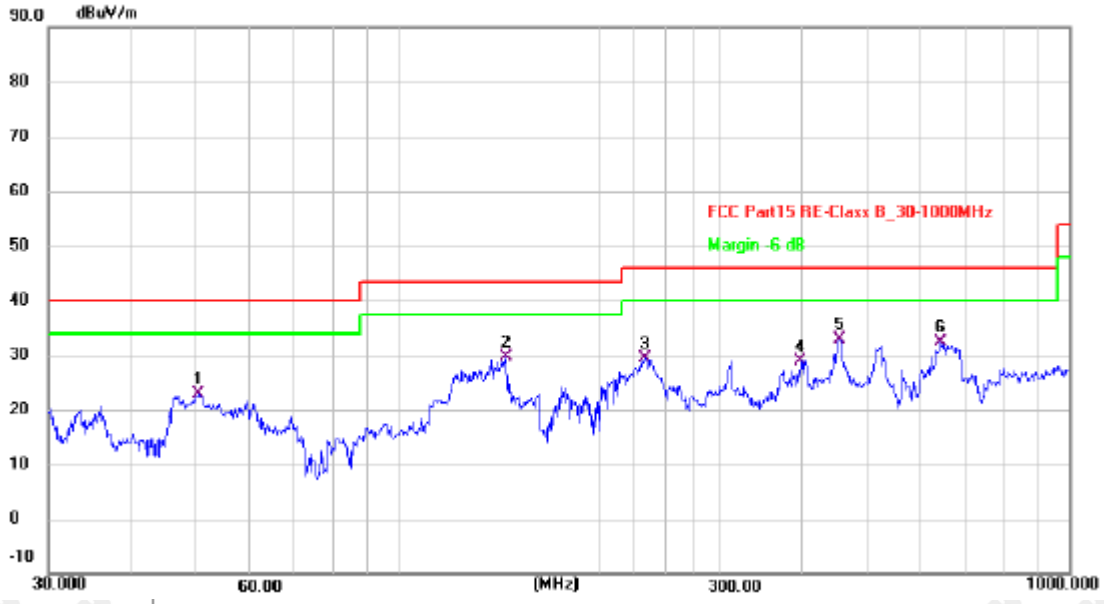
Y3:
Below 1GHz Test Results:
Antenna polarity: H
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.2323	37.34	-14.42	22.92	40.00	-17.08	QP
2	144.8417	42.33	-12.79	29.54	43.50	-13.96	QP
3	233.3486	43.82	-14.54	29.28	46.00	-16.72	QP
4	399.0300	39.26	-10.33	28.93	46.00	-17.07	QP
5 *	454.3100	41.93	-9.03	32.90	46.00	-13.10	QP
6	642.8612	37.00	-4.67	32.33	46.00	-13.67	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

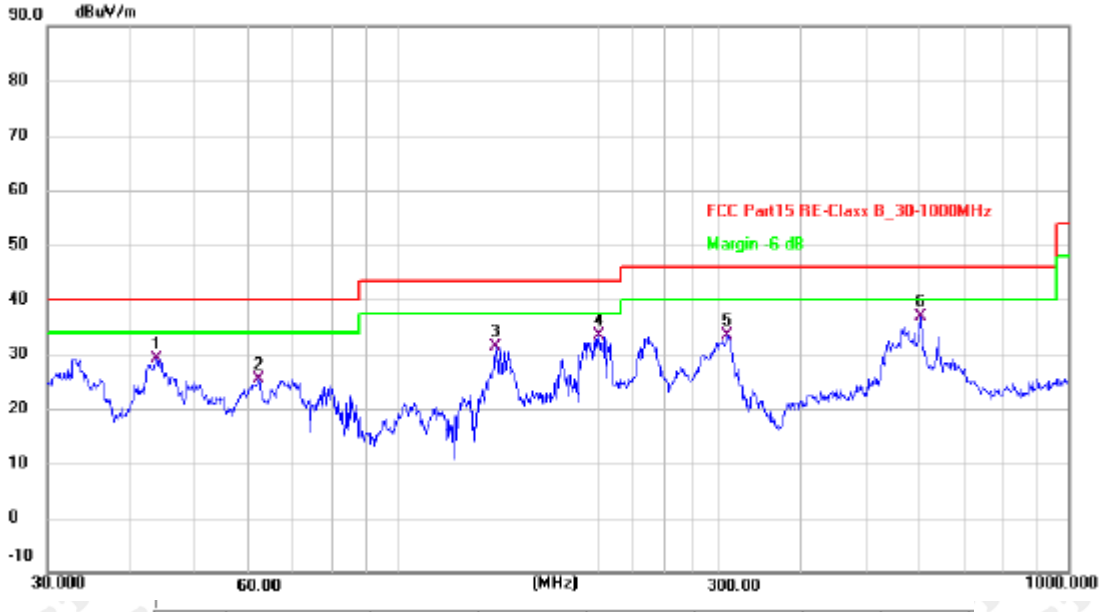
Antenna polarity: V
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.6584	43.65	-14.45	29.20	40.00	-10.80	QP
2	61.9950	40.54	-15.06	25.48	40.00	-14.52	QP
3	139.8505	44.73	-13.31	31.42	43.50	-12.08	QP
4	199.9855	49.07	-15.68	33.39	43.50	-10.11	QP
5	309.9977	45.45	-11.98	33.47	46.00	-12.53	QP
6 *	601.4265	42.33	-5.46	36.87	46.00	-9.13	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

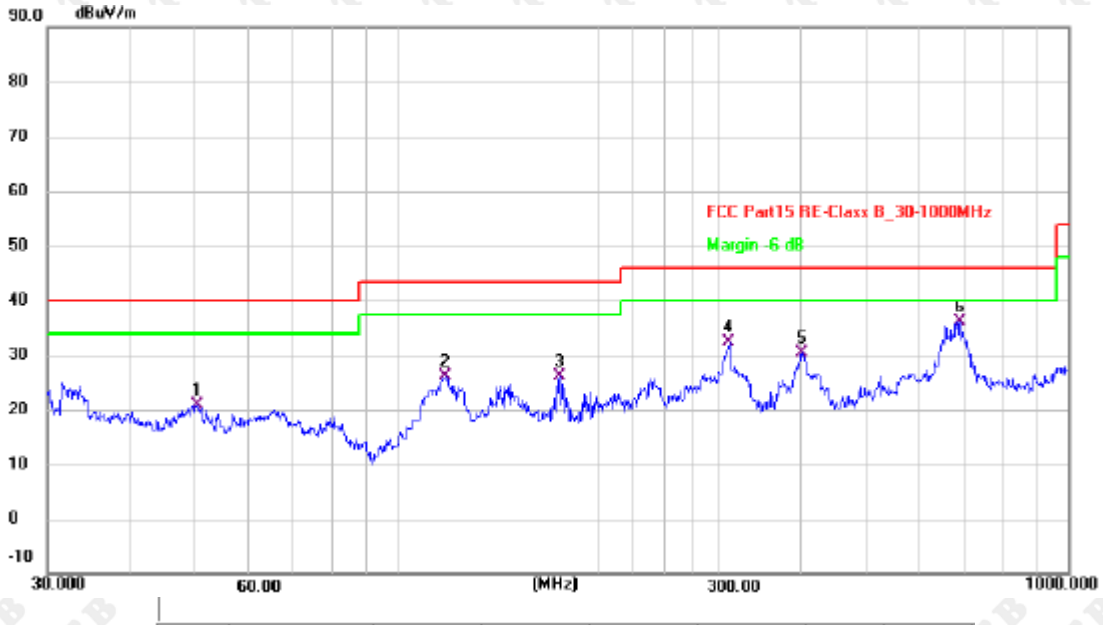
Y5:
Below 1GHz Test Results:
Antenna polarity: H
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.2323	35.34	-14.42	20.92	40.00	-19.08	QP
2	117.7724	42.77	-16.54	26.23	43.50	-17.27	QP
3	174.4240	39.65	-13.52	26.13	43.50	-17.37	QP
4	312.1792	44.23	-11.95	32.28	46.00	-13.72	QP
5	400.4318	40.80	-10.31	30.49	46.00	-15.51	QP
6 *	689.5643	39.85	-3.77	36.08	46.00	-9.92	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

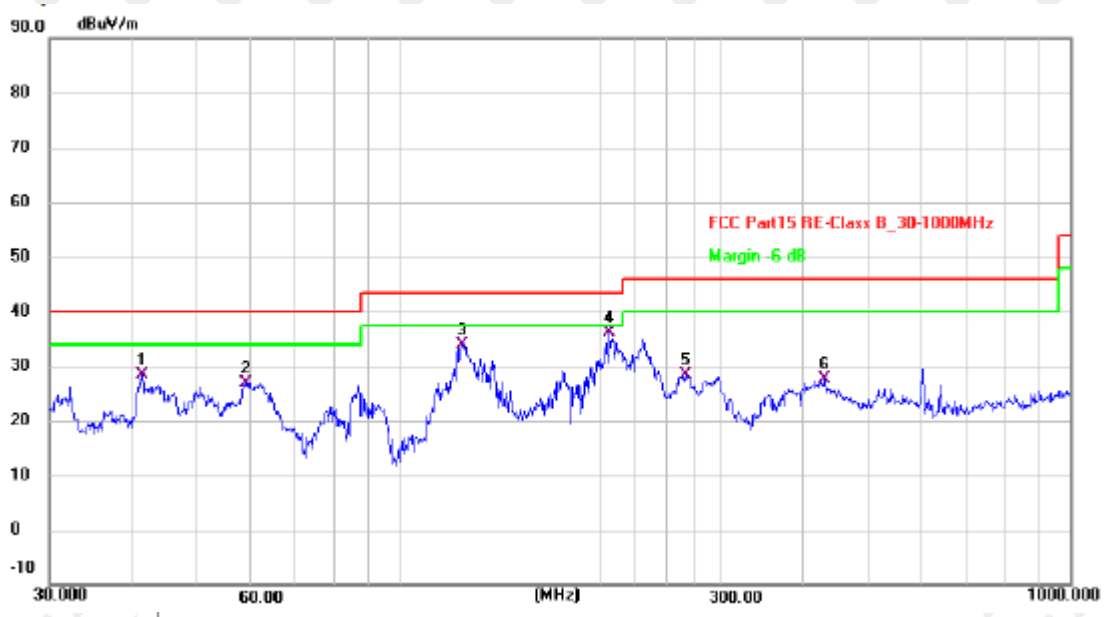
Antenna polarity: V
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.2764	42.93	-14.46	28.47	40.00	-11.53	QP
2	58.8185	41.70	-14.73	26.97	40.00	-13.03	QP
3	123.6984	49.73	-15.77	33.96	43.50	-9.54	QP
4 *	205.6750	51.74	-15.49	36.25	43.50	-7.25	QP
5	266.6090	41.72	-13.37	28.35	46.00	-17.65	QP
6	429.5228	37.26	-9.62	27.64	46.00	-18.36	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

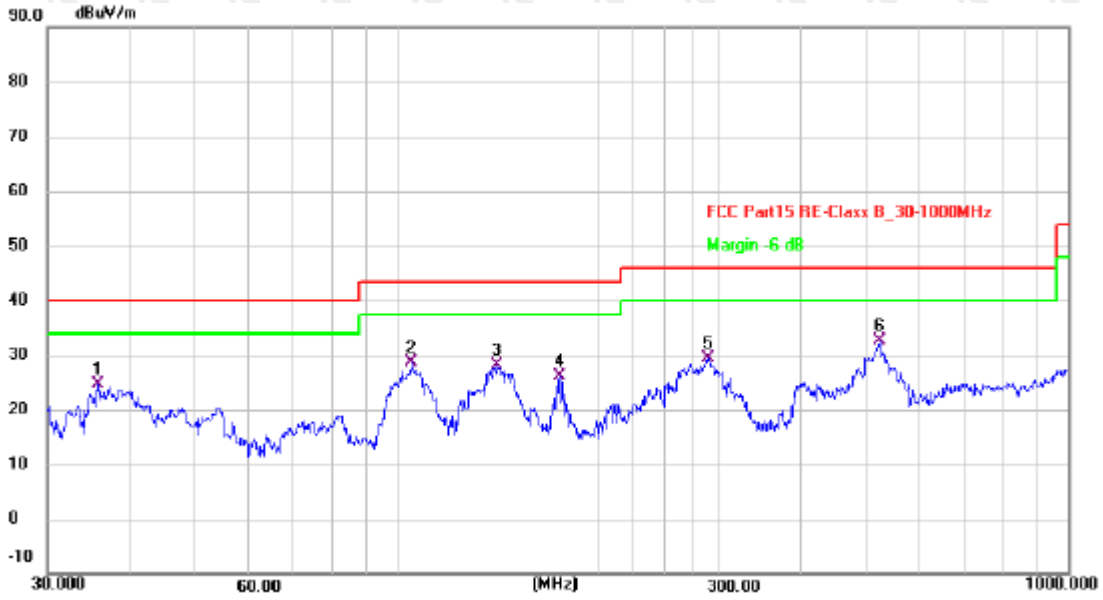
Y6:
Below 1GHz Test Results:
Antenna polarity: H
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.7490	39.36	-14.82	24.54	40.00	-15.46	QP
2	104.9030	46.23	-17.50	28.73	43.50	-14.77	QP
3	140.8350	41.44	-13.21	28.23	43.50	-15.27	QP
4	174.4240	39.65	-13.52	26.13	43.50	-17.37	QP
5	290.0172	41.88	-12.53	29.35	46.00	-16.65	QP
6 *	522.7180	40.09	-7.40	32.69	46.00	-13.31	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

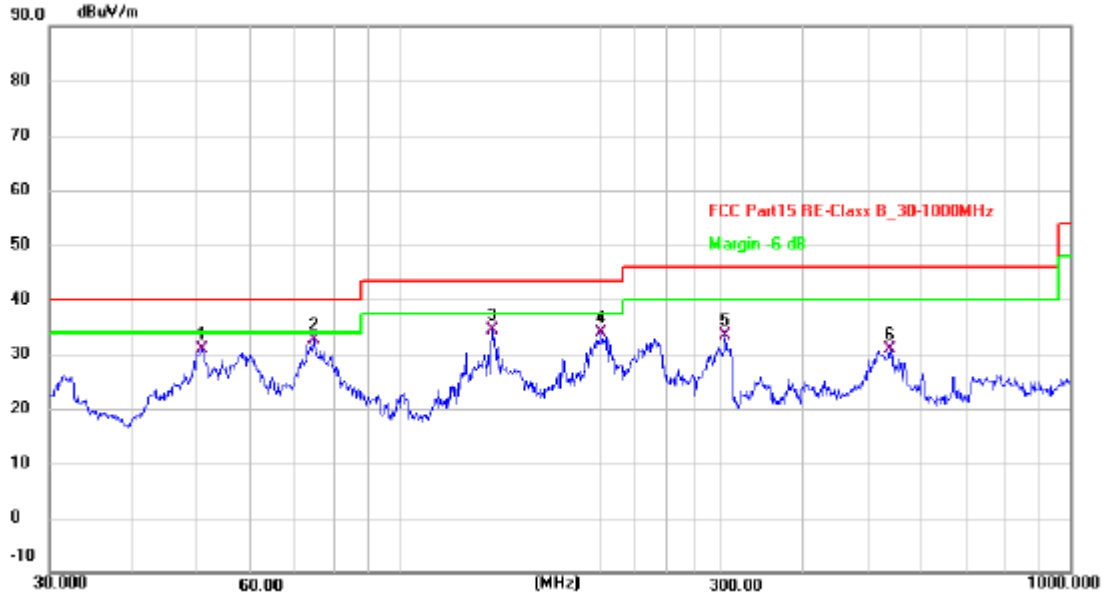
Antenna polarity: V
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.7635	45.42	-14.44	30.98	40.00	-9.02	QP
2 *	74.3953	49.46	-16.74	32.72	40.00	-7.28	QP
3	137.4200	47.92	-13.66	34.26	43.50	-9.24	QP
4	199.9855	49.57	-15.68	33.89	43.50	-9.61	QP
5	305.6800	45.38	-12.06	33.32	46.00	-12.68	QP
6	537.5891	37.86	-7.02	30.84	46.00	-15.16	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

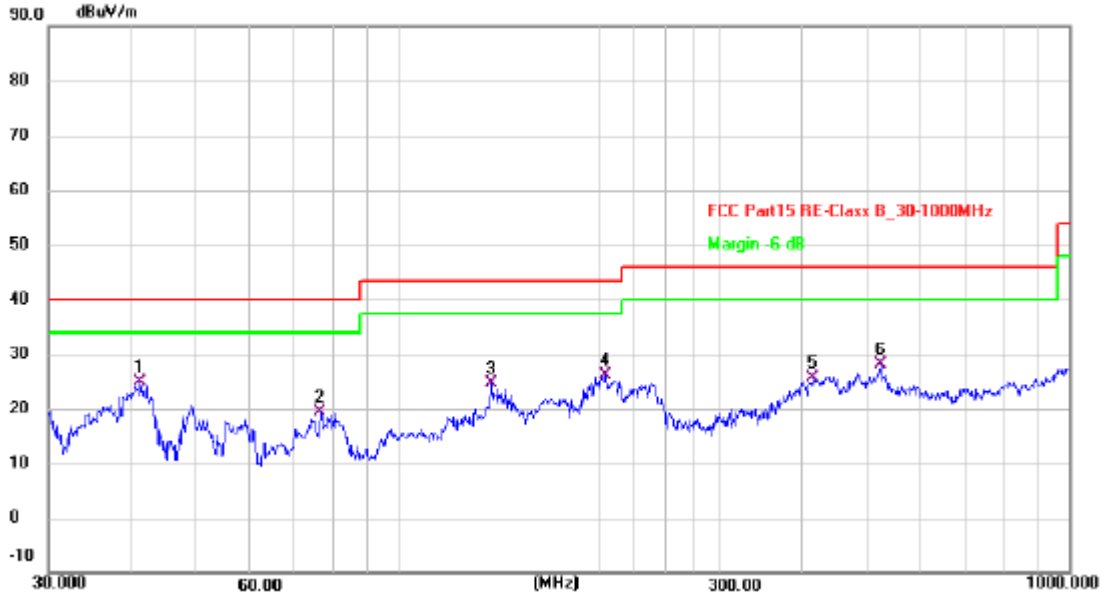
Y7:
Below 1GHz Test Results:
Antenna polarity: H
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	41.1320	39.30	-14.47	24.83	40.00	-15.17	QP
2	76.5119	36.37	-17.02	19.35	40.00	-20.65	QP
3	137.4200	38.20	-13.66	24.54	43.50	-18.96	QP
4	203.5226	41.69	-15.55	26.14	43.50	-17.36	QP
5	414.7223	35.63	-9.98	25.65	46.00	-20.35	QP
6	522.7180	35.59	-7.40	28.19	46.00	-17.81	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

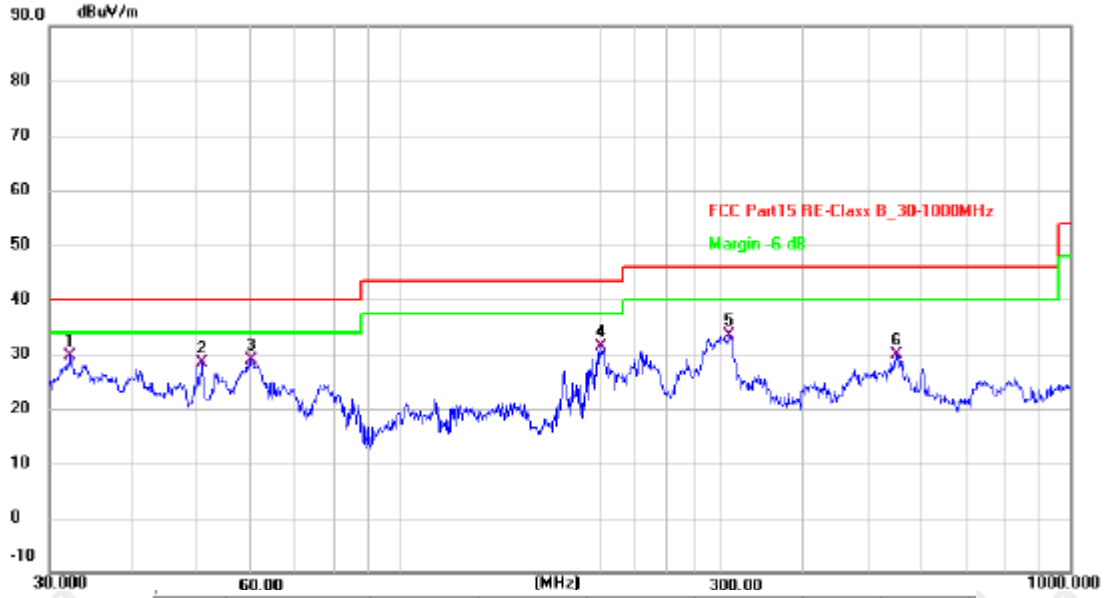Antenna polarity: V
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	32.2924	44.68	-15.02	29.66	40.00	-10.34	QP
2	50.7635	42.92	-14.44	28.48	40.00	-11.52	QP
3	60.0690	43.73	-14.79	28.94	40.00	-11.06	QP
4	199.9855	47.07	-15.68	31.39	43.50	-12.11	QP
5	309.9977	45.45	-11.98	33.47	46.00	-12.53	QP
6	550.9480	36.57	-6.69	29.88	46.00	-16.12	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit

Y9:
Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.73	-3.65	54.08	74.00	-19.92	peak
4804	50.66	-3.65	47.01	54.00	-6.99	AVG
7206	61.14	-0.95	60.19	74.00	-13.81	peak
7206	40.69	-0.95	39.74	54.00	-14.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	58.83	-3.65	55.18	74.00	-18.82	peak
4804	48.07	-3.65	44.42	54.00	-9.58	AVG
7206	59.13	-0.95	58.18	74.00	-15.82	peak
7206	41.70	-0.95	40.75	54.00	-13.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	60.10	-3.54	56.56	74.00	-17.44	peak
4882.00	49.27	-3.54	45.73	54.00	-8.27	AVG
7323.00	57.91	-0.81	57.10	74.00	-16.90	peak
7323.00	44.26	-0.81	43.45	54.00	-10.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	58.22	-3.54	54.68	74.00	-19.32	peak
4882.00	49.78	-3.54	46.24	54.00	-7.76	AVG
7323.00	56.22	-0.81	55.41	74.00	-18.59	peak
7323.00	43.11	-0.81	42.30	54.00	-11.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	57.50	-3.43	54.07	74.00	-19.93	peak
4960	49.25	-3.44	45.81	54.00	-8.19	AVG
7440	61.34	-0.77	60.57	74.00	-13.43	peak
7440	41.30	-0.77	40.53	54.00	-13.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	58.81	-3.43	55.38	74.00	-18.62	peak
4960	49.96	-3.44	46.52	54.00	-7.48	AVG
7440	58.63	-0.77	57.86	74.00	-16.14	peak
7440	41.95	-0.77	41.18	54.00	-12.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping
Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.29	-5.81	51.48	54.00	-2.52	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.74	-5.84	48.90	54.00	-5.10	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.58	-5.81	50.77	54.00	-3.23	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.76	-5.84	50.92	54.00	-3.08	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.55	-5.81	49.74	54.00	-4.26	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.57	-6.06	47.51	54.00	-6.49	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.99	-5.81	50.18	54.00	-3.82	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.85	-6.06	47.79	54.00	-6.21	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.32	-5.81	50.51	54.00	-3.49	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.99	-5.84	50.15	54.00	-3.85	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.18	-5.81	49.37	54.00	-4.63	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.25	-5.84	48.41	54.00	-5.59	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.30	-5.81	49.49	54.00	-4.51	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.68	-6.06	50.62	54.00	-3.38	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.61	-5.81	50.80	54.00	-3.20	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.56	-6.06	47.50	54.00	-6.50	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Y3:
Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.95	-3.65	54.30	74.00	-19.70	peak
4804	50.95	-3.65	47.30	54.00	-6.70	AVG
7206	61.63	-0.95	60.68	74.00	-13.32	peak
7206	40.80	-0.95	39.85	54.00	-14.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.42	-3.65	53.77	74.00	-20.23	peak
4804	48.34	-3.65	44.69	54.00	-9.31	AVG
7206	59.44	-0.95	58.49	74.00	-15.51	peak
7206	40.29	-0.95	39.34	54.00	-14.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	60.20	-3.54	56.66	74.00	-17.34	peak
4882.00	47.65	-3.54	44.11	54.00	-9.89	AVG
7323.00	55.91	-0.81	55.10	74.00	-18.90	peak
7323.00	43.13	-0.81	42.32	54.00	-11.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	59.19	-3.54	55.65	74.00	-18.35	peak
4882.00	50.07	-3.54	46.53	54.00	-7.47	AVG
7323.00	57.91	-0.81	57.10	74.00	-16.90	peak
7323.00	43.63	-0.81	42.82	54.00	-11.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	59.24	-3.43	55.81	74.00	-18.19	peak
4960	49.11	-3.44	45.67	54.00	-8.33	AVG
7440	59.44	-0.77	58.67	74.00	-15.33	peak
7440	40.09	-0.77	39.32	54.00	-14.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	57.15	-3.43	53.72	74.00	-20.28	peak
4960	47.53	-3.44	44.09	54.00	-9.91	AVG
7440	61.30	-0.77	60.53	74.00	-13.47	peak
7440	39.73	-0.77	38.96	54.00	-15.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping
Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.64	-5.81	50.83	54.00	-3.17	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.66	-5.84	49.82	54.00	-4.18	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.77	-5.81	49.96	54.00	-4.04	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.11	-5.84	49.27	54.00	-4.73	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.23	-5.81	49.42	54.00	-4.58	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.21	-6.06	48.15	54.00	-5.85	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.08	-5.81	51.27	54.00	-2.73	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.40	-6.06	49.34	54.00	-4.66	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.87	-5.81	50.06	54.00	-3.94	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.29	-5.84	48.45	54.00	-5.55	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.22	-5.81	49.41	54.00	-4.59	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.20	-5.84	47.36	54.00	-6.64	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.49	-5.81	50.68	54.00	-3.32	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.42	-6.06	48.36	54.00	-5.64	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.31	-5.81	50.50	54.00	-3.50	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.71	-6.06	48.65	54.00	-5.35	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Y5:
Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.66	-3.65	54.01	74.00	-19.99	peak
4804	50.53	-3.65	46.88	54.00	-7.12	AVG
7206	59.37	-0.95	58.42	74.00	-15.58	peak
7206	40.30	-0.95	39.35	54.00	-14.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.58	-3.65	53.93	74.00	-20.07	peak
4804	48.16	-3.65	44.51	54.00	-9.49	AVG
7206	58.95	-0.95	58.00	74.00	-16.00	peak
7206	42.65	-0.95	41.70	54.00	-12.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	60.29	-3.54	56.75	74.00	-17.25	peak
4882.00	47.73	-3.54	44.19	54.00	-9.81	AVG
7323.00	57.88	-0.81	57.07	74.00	-16.93	peak
7323.00	42.11	-0.81	41.30	54.00	-12.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	58.35	-3.54	54.81	74.00	-19.19	peak
4882.00	48.90	-3.54	45.36	54.00	-8.64	AVG
7323.00	57.64	-0.81	56.83	74.00	-17.17	peak
7323.00	42.82	-0.81	42.01	54.00	-11.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	57.22	-3.43	53.79	74.00	-20.21	peak
4960	48.66	-3.44	45.22	54.00	-8.78	AVG
7440	59.70	-0.77	58.93	74.00	-15.07	peak
7440	40.40	-0.77	39.63	54.00	-14.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	58.96	-3.43	55.53	74.00	-18.47	peak
4960	48.61	-3.44	45.17	54.00	-8.83	AVG
7440	61.47	-0.77	60.70	74.00	-13.30	peak
7440	41.08	-0.77	40.31	54.00	-13.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping
Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.84	-5.81	51.03	54.00	-2.97	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.61	-5.84	50.77	54.00	-3.23	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.89	-5.81	50.08	54.00	-3.92	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.27	-5.84	49.43	54.00	-4.57	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.78	-5.81	48.97	54.00	-5.03	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.83	-6.06	47.77	54.00	-6.23	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.60	-5.81	51.79	54.00	-2.21	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.16	-6.06	49.10	54.00	-4.90	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.98	-5.81	49.17	54.00	-4.83	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.46	-5.84	47.62	54.00	-6.38	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.66	-5.81	49.85	54.00	-4.15	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.17	-5.84	47.33	54.00	-6.67	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.69	-5.81	49.88	54.00	-4.12	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.98	-6.06	48.92	54.00	-5.08	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.54	-5.81	49.73	54.00	-4.27	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.31	-6.06	48.25	54.00	-5.75	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Y6:
Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	56.72	-3.65	53.07	74.00	-20.93	peak
4804	50.79	-3.65	47.14	54.00	-6.86	AVG
7206	60.48	-0.95	59.53	74.00	-14.47	peak
7206	41.99	-0.95	41.04	54.00	-12.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	58.63	-3.65	54.98	74.00	-19.02	peak
4804	50.39	-3.65	46.74	54.00	-7.26	AVG
7206	60.72	-0.95	59.77	74.00	-14.23	peak
7206	41.59	-0.95	40.64	54.00	-13.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	60.11	-3.54	56.57	74.00	-17.43	peak
4882.00	46.71	-3.54	43.17	54.00	-10.83	AVG
7323.00	57.07	-0.81	56.26	74.00	-17.74	peak
7323.00	44.20	-0.81	43.39	54.00	-10.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	58.78	-3.54	55.24	74.00	-18.76	peak
4882.00	49.30	-3.54	45.76	54.00	-8.24	AVG
7323.00	56.37	-0.81	55.56	74.00	-18.44	peak
7323.00	43.23	-0.81	42.42	54.00	-11.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	58.03	-3.43	54.60	74.00	-19.40	peak
4960	50.04	-3.44	46.60	54.00	-7.40	AVG
7440	60.46	-0.77	59.69	74.00	-14.31	peak
7440	40.31	-0.77	39.54	54.00	-14.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	59.42	-3.43	55.99	74.00	-18.01	peak
4960	49.36	-3.44	45.92	54.00	-8.08	AVG
7440	60.16	-0.77	59.39	74.00	-14.61	peak
7440	42.43	-0.77	41.66	54.00	-12.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping
Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.82	-5.81	52.01	54.00	-1.99	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.37	-5.84	50.53	54.00	-3.47	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.89	-5.81	50.08	54.00	-3.92	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.53	-5.84	49.69	54.00	-4.31	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.12	-5.81	48.31	54.00	-5.69	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.58	-6.06	48.52	54.00	-5.48	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.18	-5.81	50.37	54.00	-3.63	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.91	-6.06	48.85	54.00	-5.15	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.04	-5.81	50.23	54.00	-3.77	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.60	-5.84	47.76	54.00	-6.24	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.11	-5.81	50.30	54.00	-3.70	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.36	-5.84	47.52	54.00	-6.48	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.39	-5.81	51.58	54.00	-2.42	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.78	-6.06	49.72	54.00	-4.28	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.34	-5.81	50.53	54.00	-3.47	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.31	-6.06	49.25	54.00	-4.75	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Y7:

Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.09	-3.65	53.44	74.00	-20.56	peak
4804	48.62	-3.65	44.97	54.00	-9.03	AVG
7206	59.34	-0.95	58.39	74.00	-15.61	peak
7206	41.93	-0.95	40.98	54.00	-13.02	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	58.65	-3.65	55.00	74.00	-19.00	peak
4804	50.14	-3.65	46.49	54.00	-7.51	AVG
7206	61.52	-0.95	60.57	74.00	-13.43	peak
7206	40.62	-0.95	39.67	54.00	-14.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	59.87	-3.54	56.33	74.00	-17.67	peak
4882.00	48.91	-3.54	45.37	54.00	-8.63	AVG
7323.00	56.25	-0.81	55.44	74.00	-18.56	peak
7323.00	44.45	-0.81	43.64	54.00	-10.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882.00	59.44	-3.54	55.90	74.00	-18.10	peak
4882.00	49.65	-3.54	46.11	54.00	-7.89	AVG
7323.00	58.39	-0.81	57.58	74.00	-16.42	peak
7323.00	43.80	-0.81	42.99	54.00	-11.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	58.70	-3.43	55.27	74.00	-18.73	peak
4960	47.88	-3.44	44.44	54.00	-9.56	AVG
7440	59.28	-0.77	58.51	74.00	-15.49	peak
7440	42.39	-0.77	41.62	54.00	-12.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	58.89	-3.43	55.46	74.00	-18.54	peak
4960	48.49	-3.44	45.05	54.00	-8.95	AVG
7440	60.70	-0.77	59.93	74.00	-14.07	peak
7440	42.21	-0.77	41.44	54.00	-12.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping
Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.99	-5.81	52.18	54.00	-1.82	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.31	-5.84	50.47	54.00	-3.53	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.71	-5.81	50.90	54.00	-3.10	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.55	-5.84	50.71	54.00	-3.29	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.32	-5.81	48.51	54.00	-5.49	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.33	-6.06	47.27	54.00	-6.73	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.17	-5.81	50.36	54.00	-3.64	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.54	-6.06	47.48	54.00	-6.52	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.58	-5.81	48.77	54.00	-5.23	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.46	-5.84	47.62	54.00	-6.38	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.71	-5.81	48.90	54.00	-5.10	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.55	-5.84	48.71	54.00	-5.29	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.79	-5.81	51.98	54.00	-2.02	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.67	-6.06	48.61	54.00	-5.39	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.95	-5.81	51.14	54.00	-2.86	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.62	-6.06	47.56	54.00	-6.44	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF COUNDUCTED SPURIOUS EMISSIONS

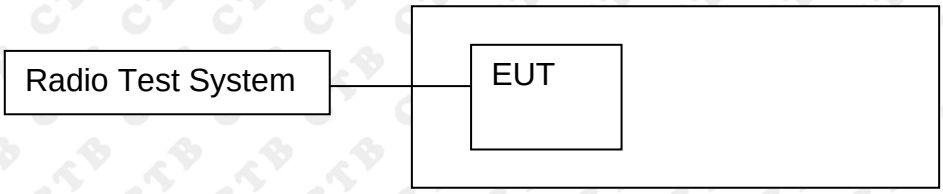8.1 Block Diagram Of Test Setup






8.2 Limit




In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).




8.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Blow 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

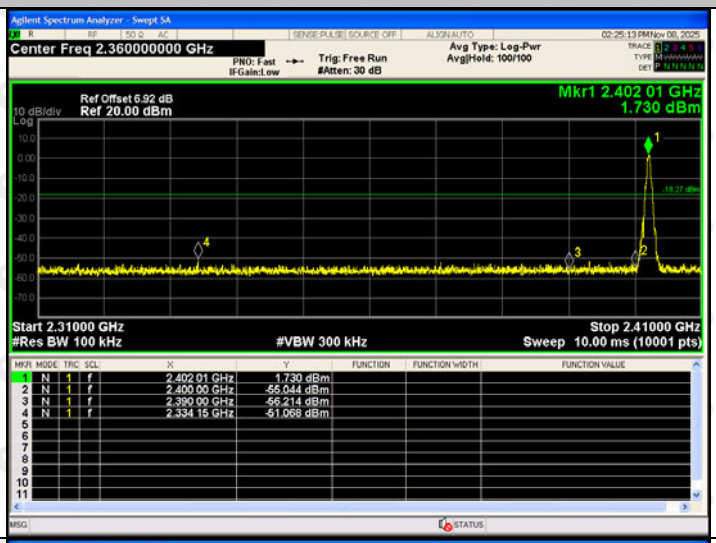
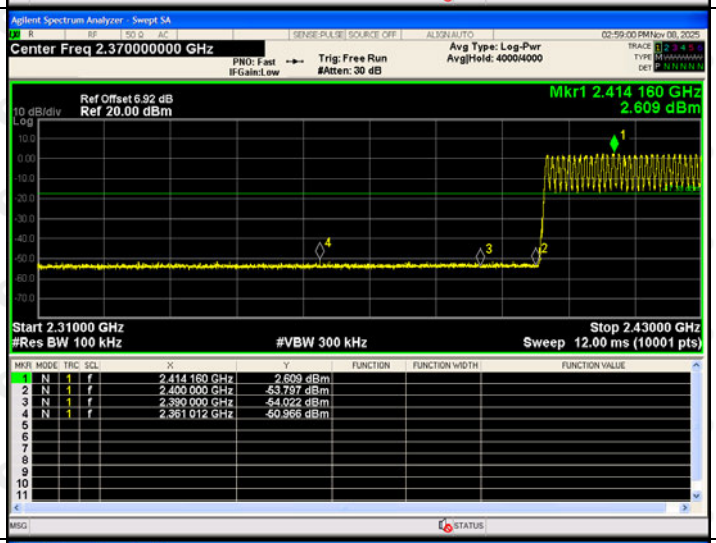
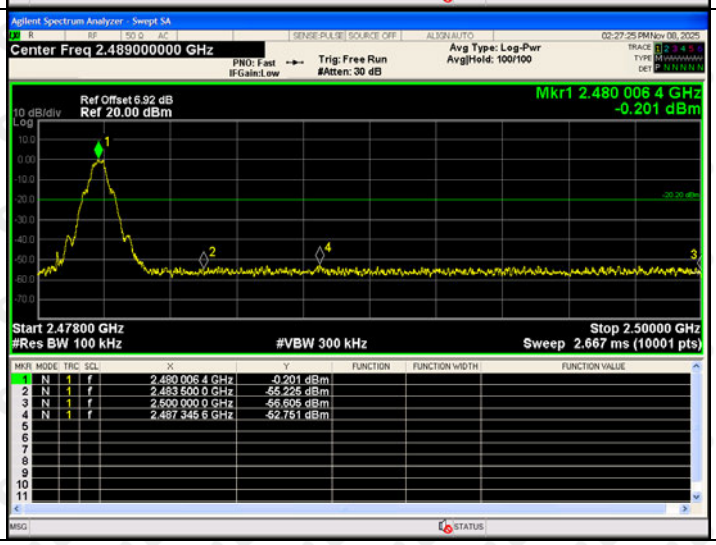
8.4 Test Result




BAND EDGE Graphs			
GFSK/LCH/ No Hop			
GFSK/LCH/ Hop			
GFSK/HCH/ No Hop			

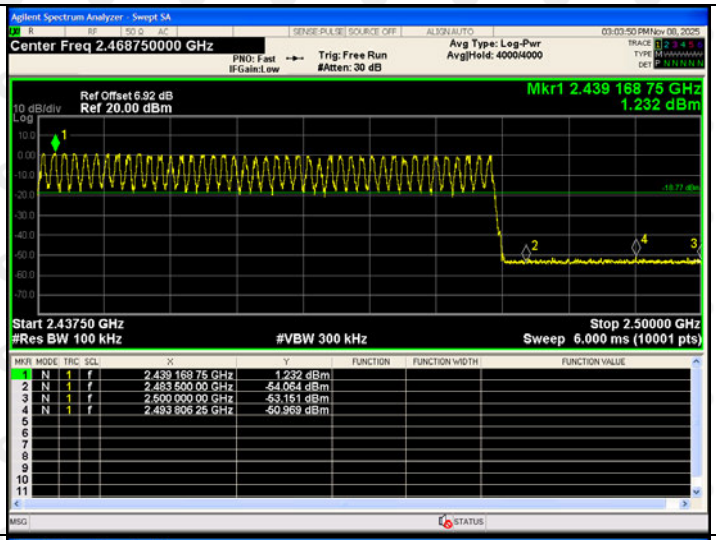
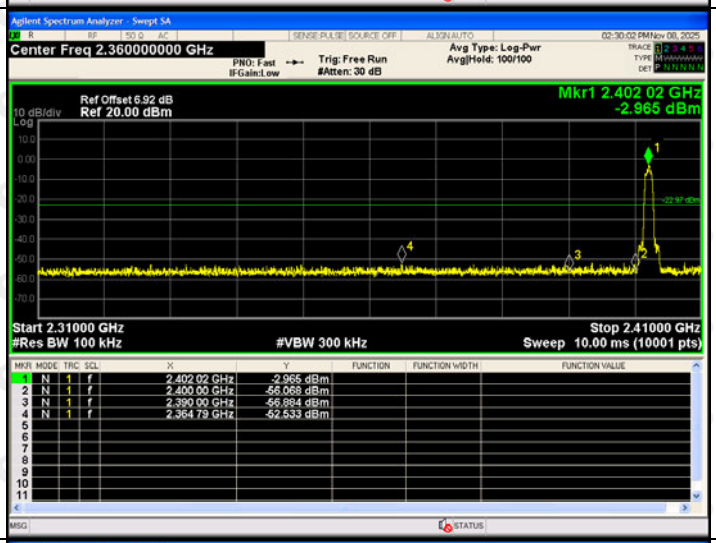
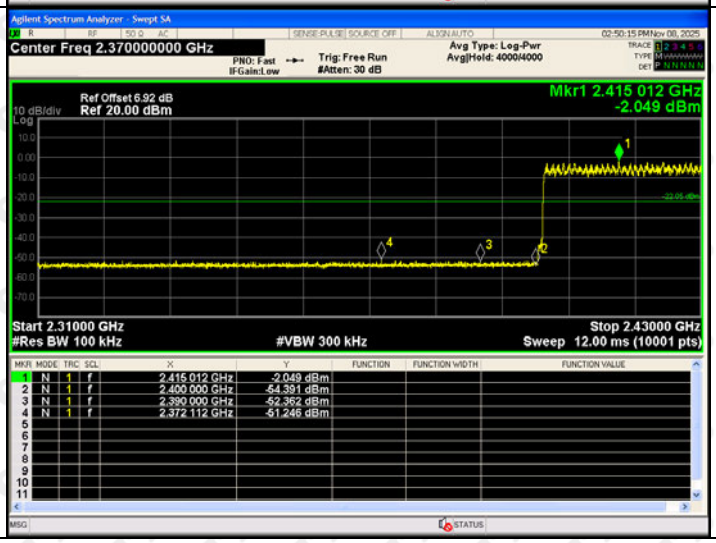
GFSK/HCH/ Hop			
π/4DQPSK/LCH/ No Hop			
π/4DQPSK/LCH/ Hop			

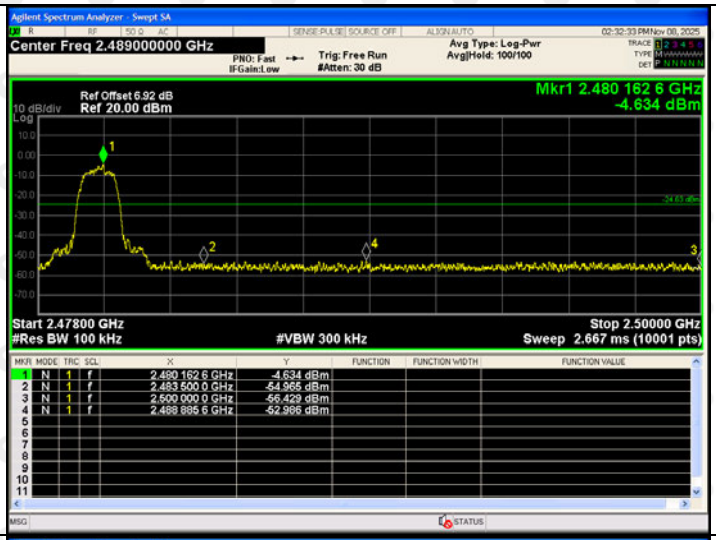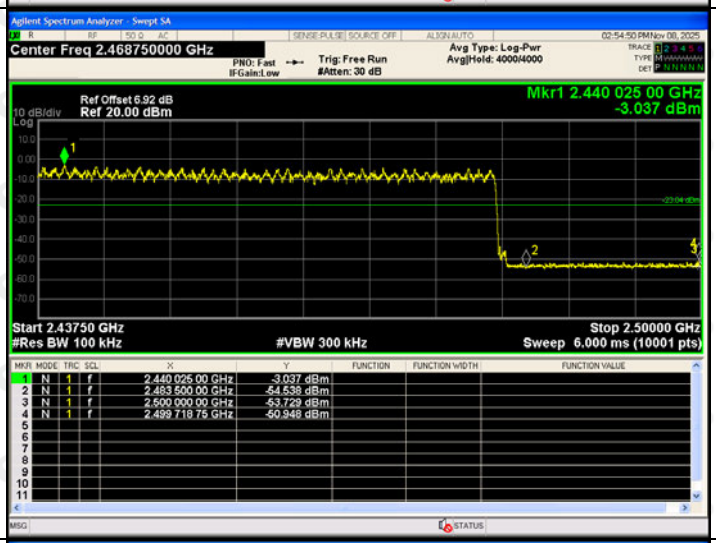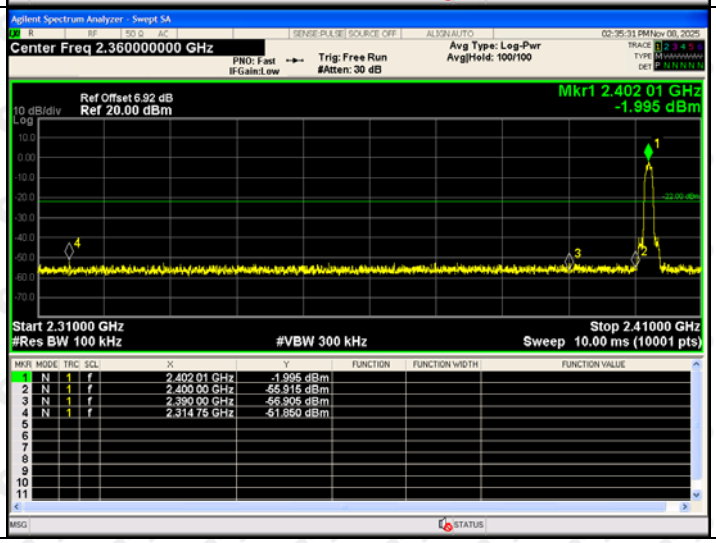π/4DQPSK/HCH/ No Hop			
π/4DQPSK/HCH/ Hop			
8DPSK/LCH/No Hop			

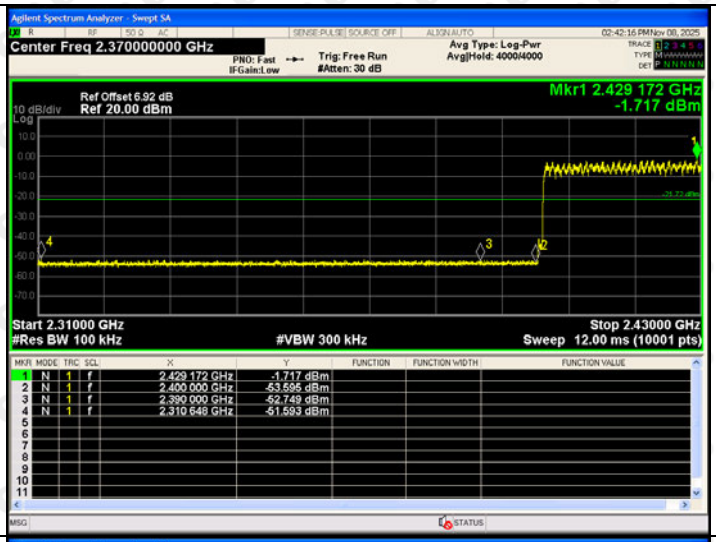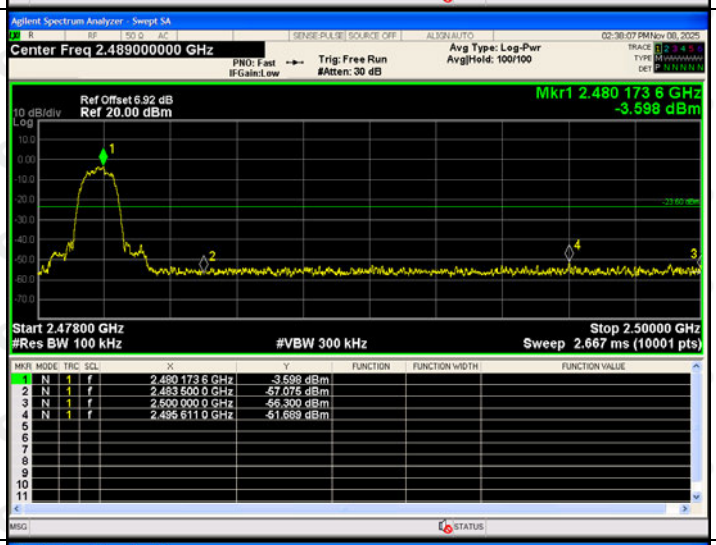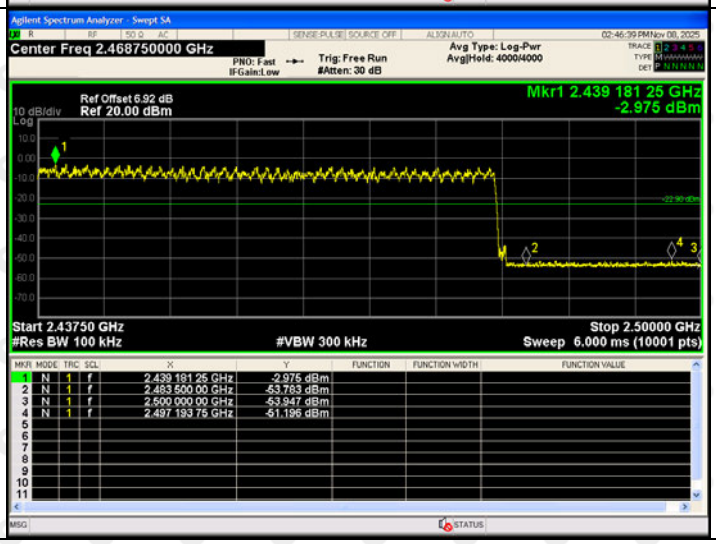8DPSK /LCH/Hop			
8DPSK /HCH/No Hop			
8DPSK /HCH/Hop			

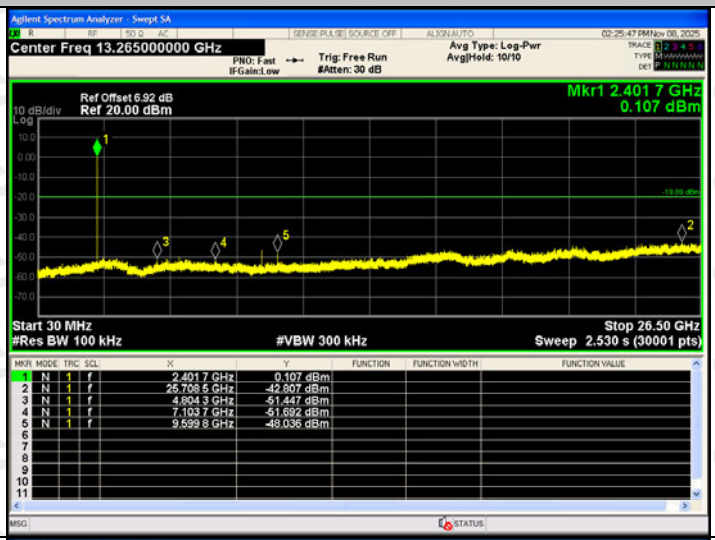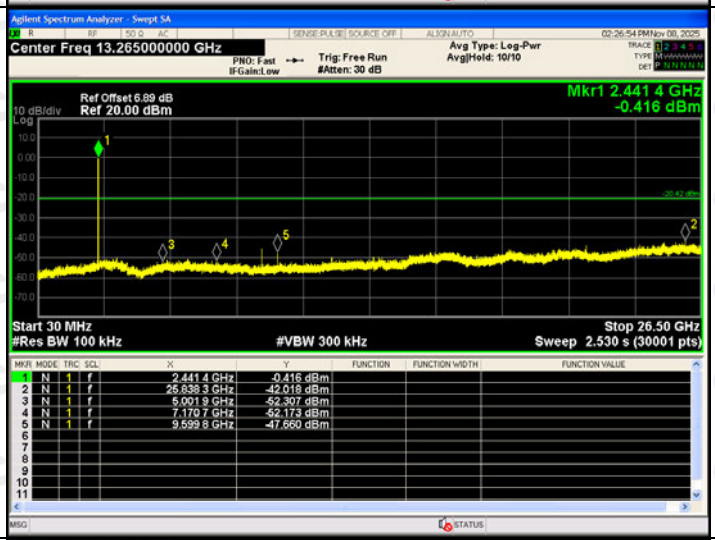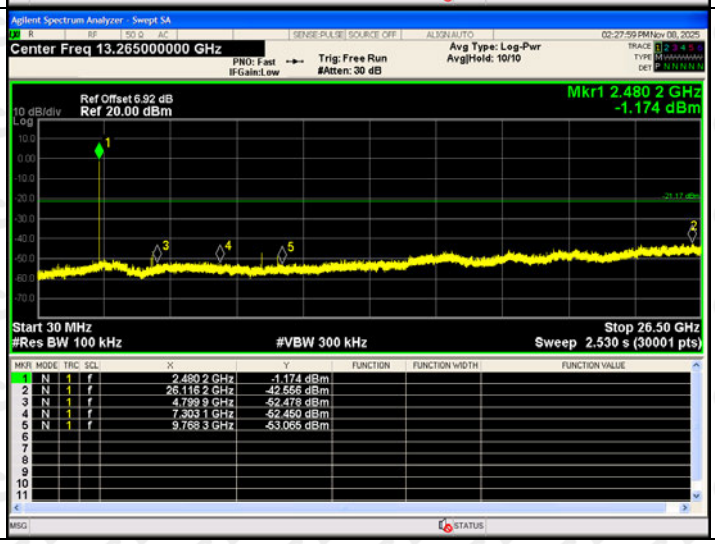
RF Conducted Spurious Emissions Graphs			
GFSK/LCH			
GFSK/MCH			
GFSK/HCH			

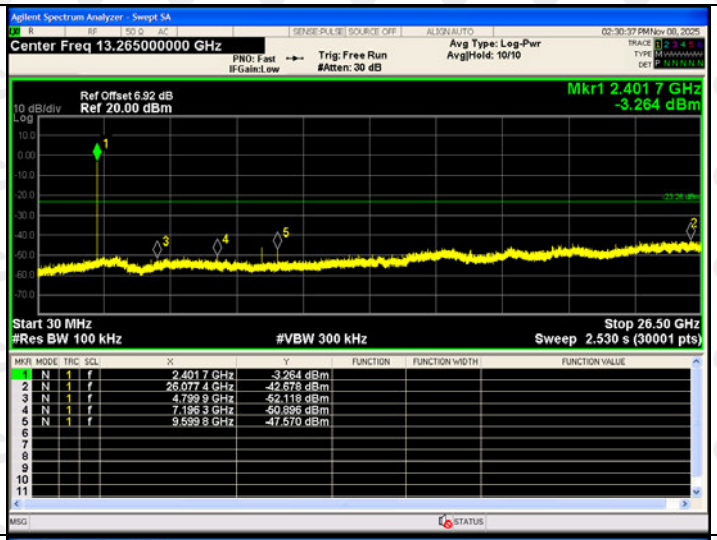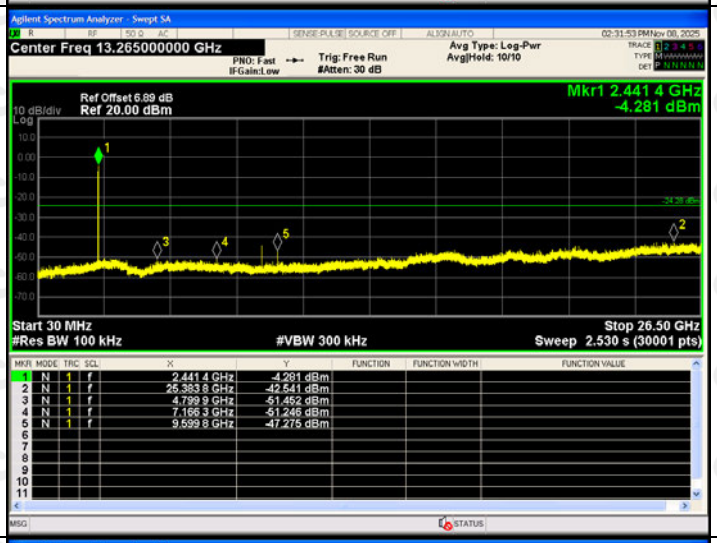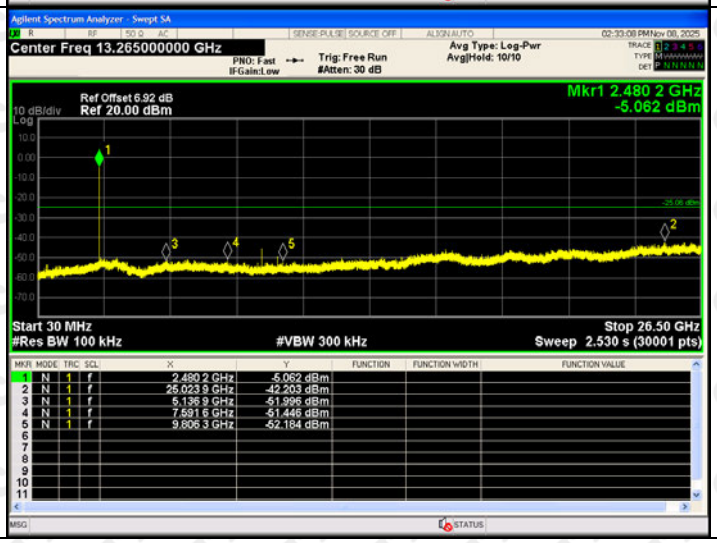π/4DQPSK /LCH			
π/4DQPSK/MCH			
π/4DQPSK/HCH			

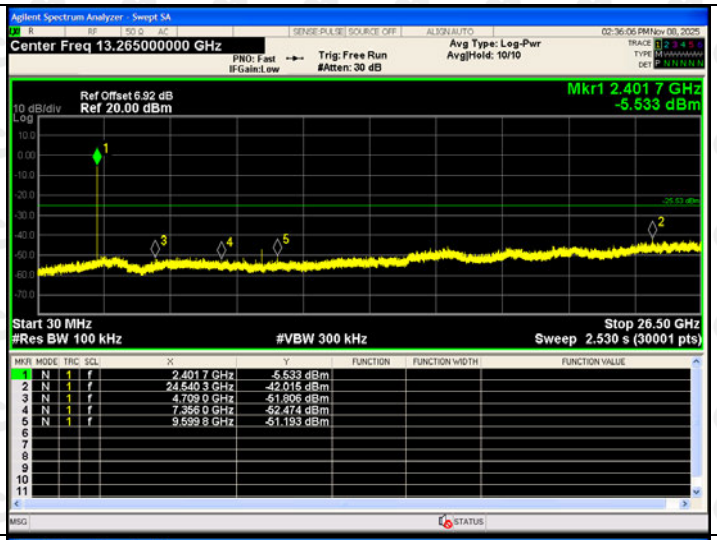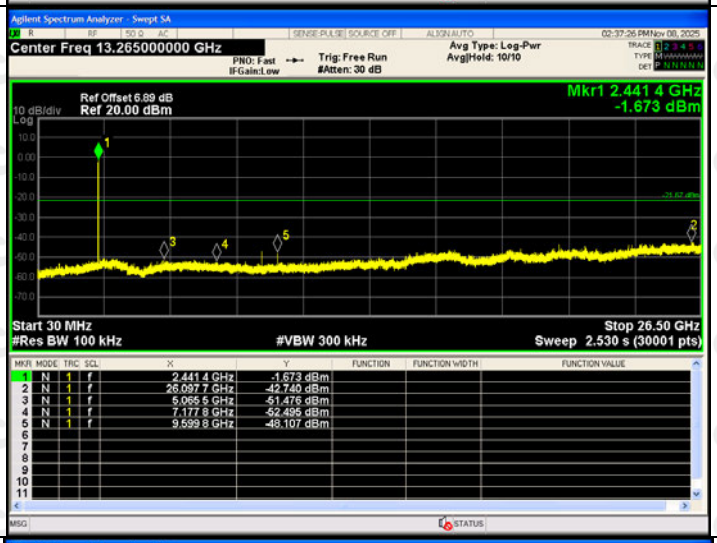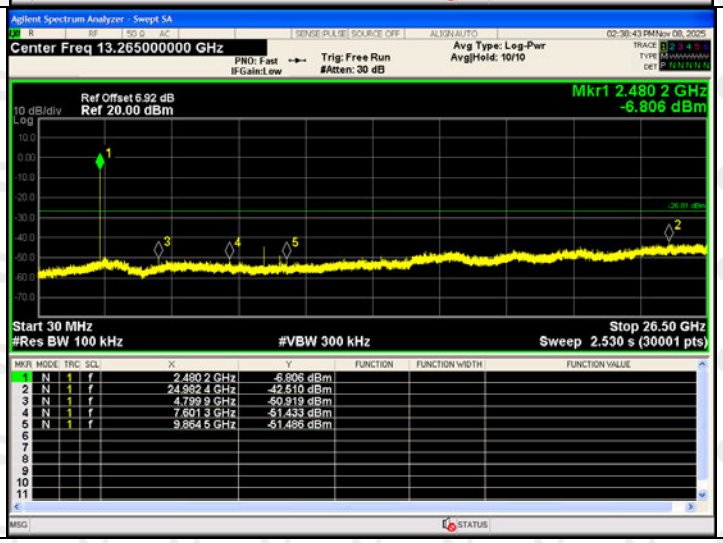8DPSK /LCH			
8DPSK /MCH			
8DPSK /HCH			

9. CONDUCTED PEAK OUTPUT POWER

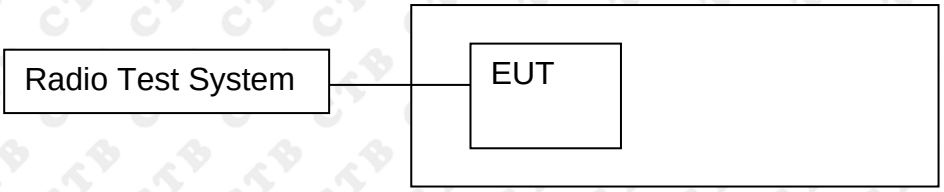9.1 Block Diagram Of Test Setup



9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.




9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	-0.385	20.97	PASS
	MCH	1.147	20.97	PASS
	HCH	-0.016	20.97	PASS
EDR mode (π/4DQPSK)	LCH	-1.337	20.97	PASS
	MCH	-0.729	20.97	PASS
	HCH	-1.118	20.97	PASS
EDR mode (8DPSK)	LCH	1.083	20.97	PASS
	MCH	1.277	20.97	PASS
	HCH	-0.591	20.97	PASS

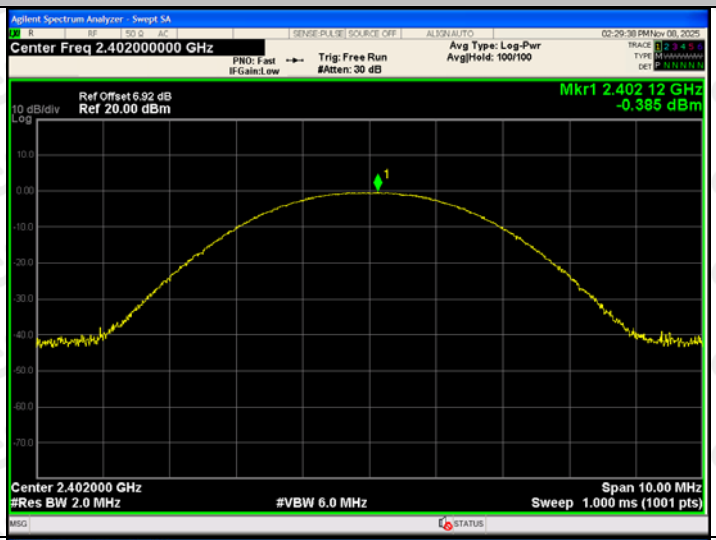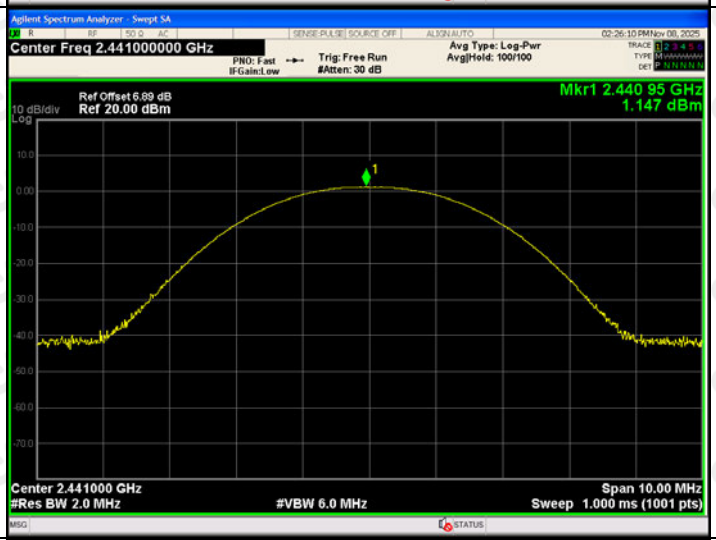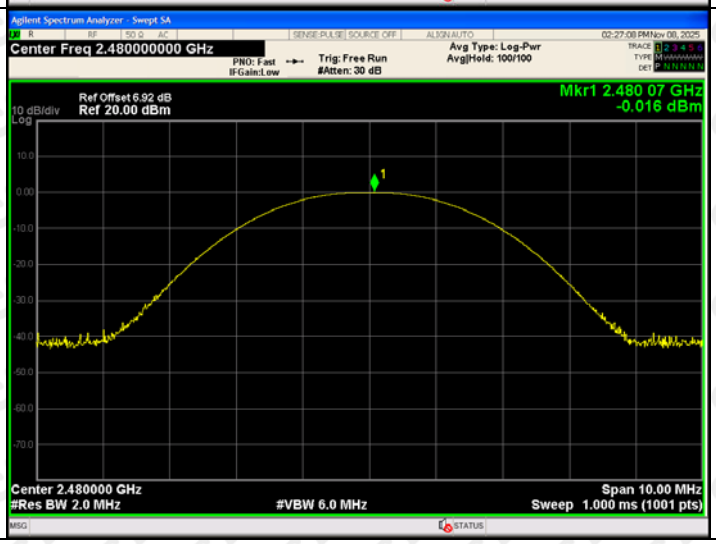Test Graph:


Graphs			
GFSK/LCH			
GFSK/MCH			
GFSK/HCH			

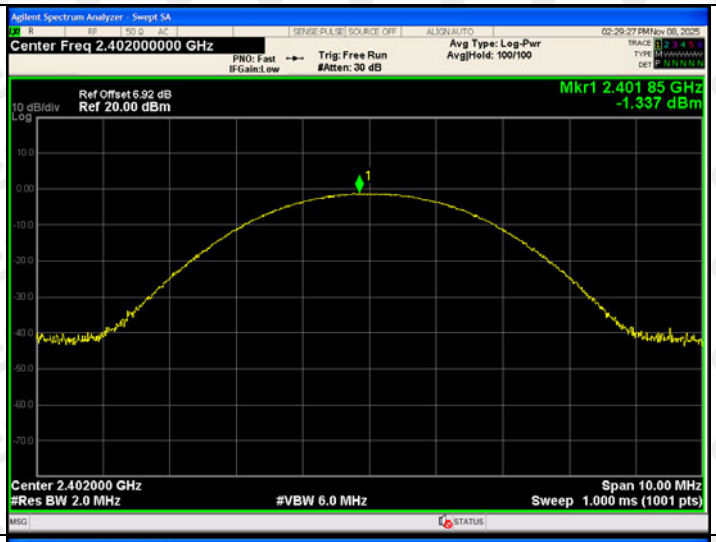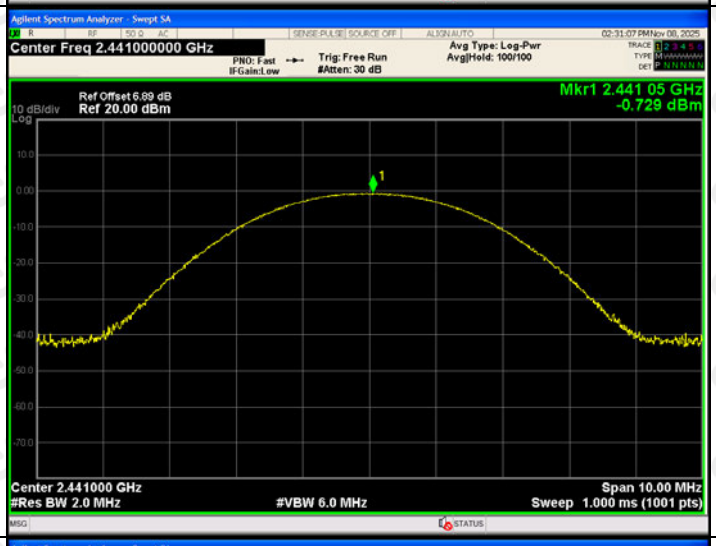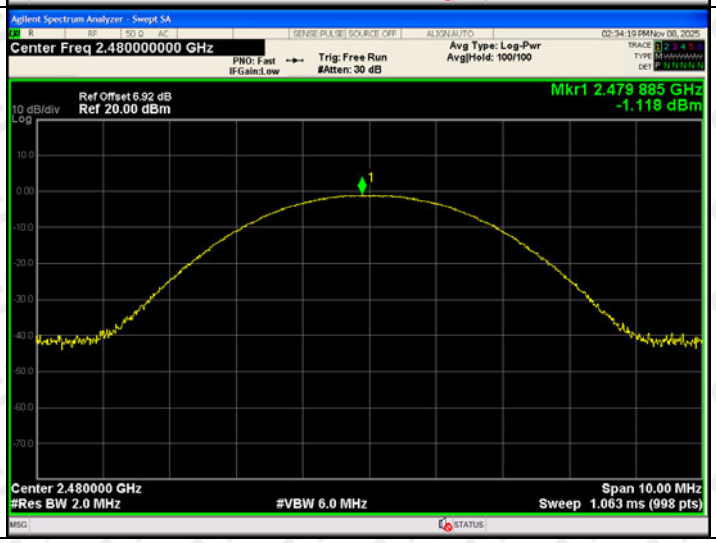π/4DQPSK/LCH			
π/4DQPSK/MCH			
π/4DQPSK/HCH			

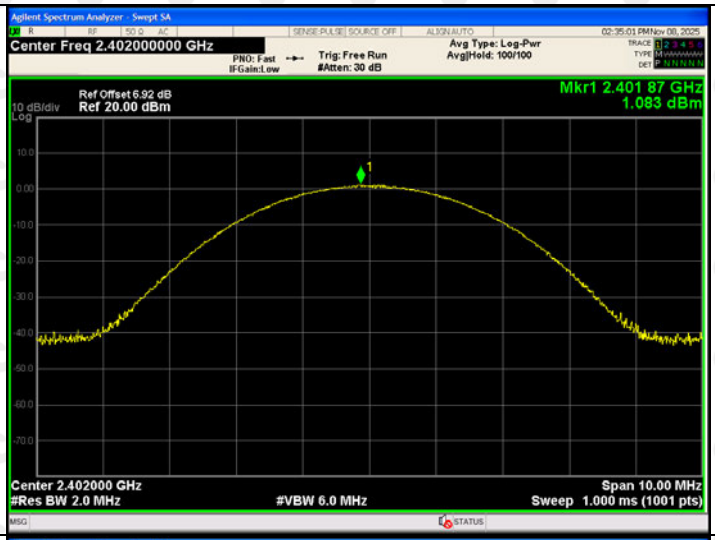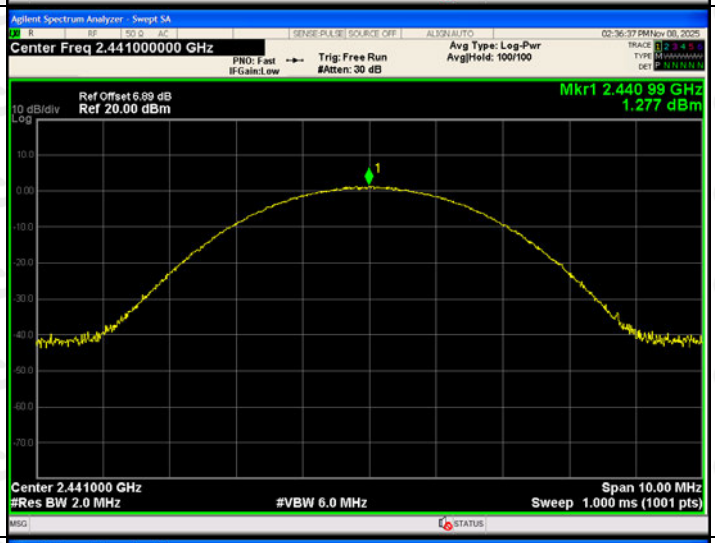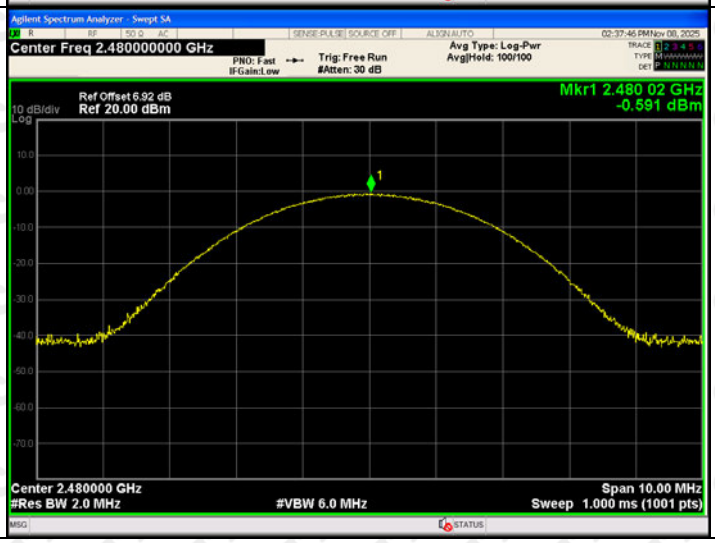8DPSK/LCH			
8DPSK /MCH			
8DPSK /HCH			

10. 20DB OCCUPIED BANDWIDTH

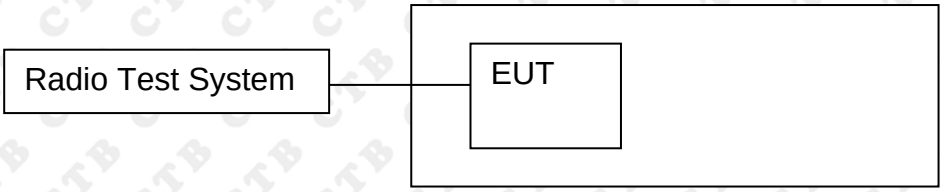10.1 Block Diagram Of Test Setup



10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure


1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


10.4 Test Result



Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.053	**PASS**
	Mid channel	1.056	**PASS**
	High channel	1.055	**PASS**
π/4DQPSK	Low channel	1.342	**PASS**
	Mid channel	1.367	**PASS**
	High channel	1.361	**PASS**
8DPSK	Low channel	1.341	**PASS**
	Mid channel	1.328	**PASS**
	High channel	1.33	**PASS**

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

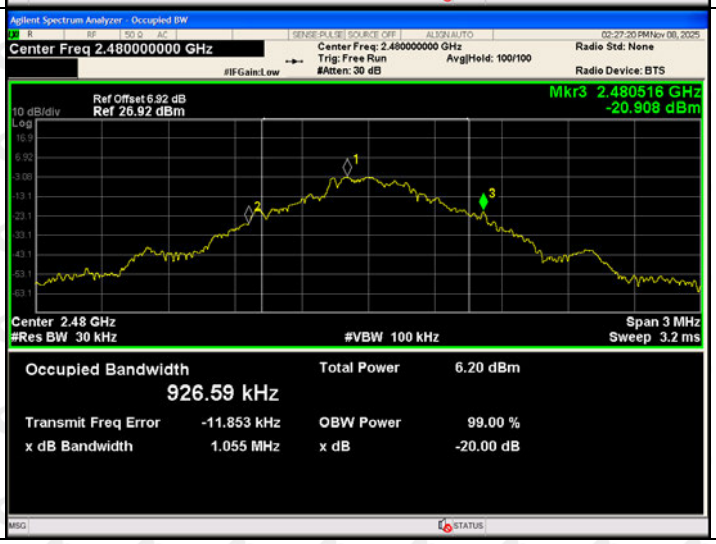Test Graph:


GFSK Low channel		
GFSK Mid channel		
GFSK High channel		

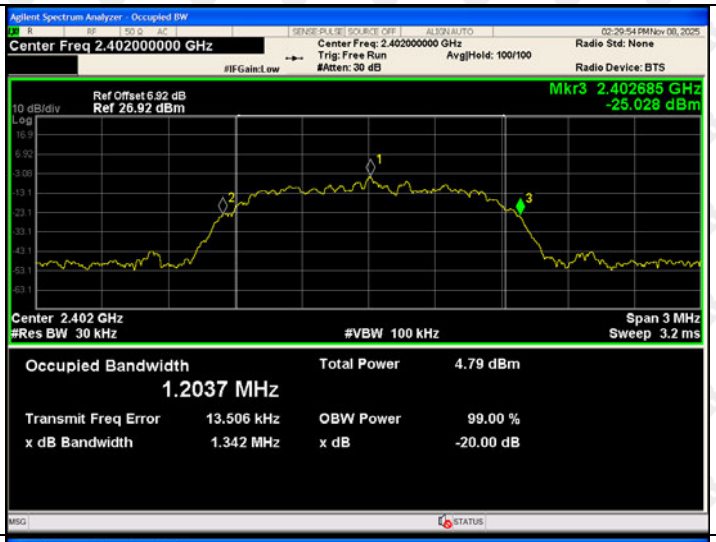π/4-DQPSK Low channel			
π/4-DQPSK Mid channel			
π/4-DQPSK High channel			

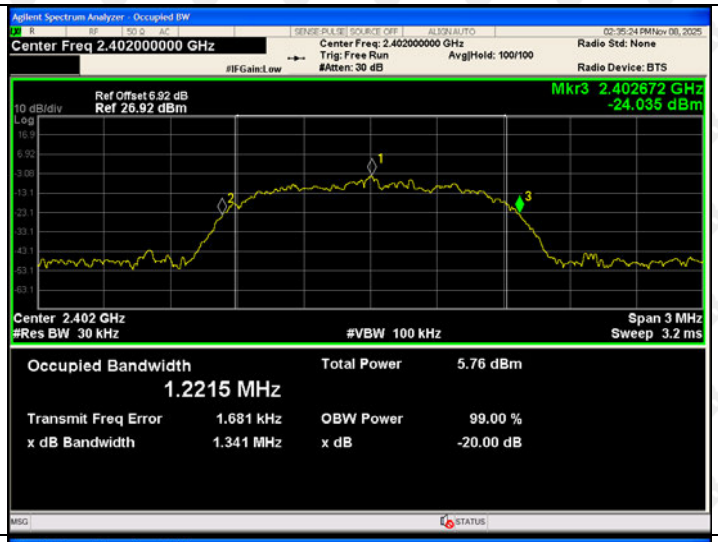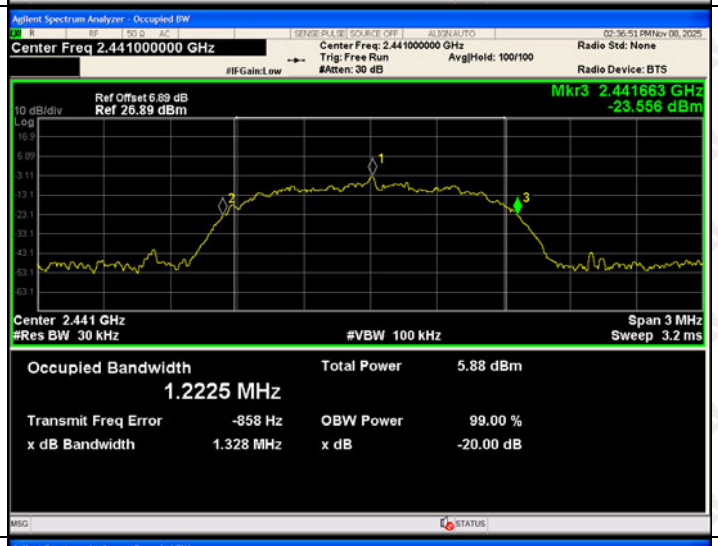8DPSK Low channel			
8DPSK Mid channel			
8DPSK High channel			

11. CARRIER FREQUENCIES SEPARATION

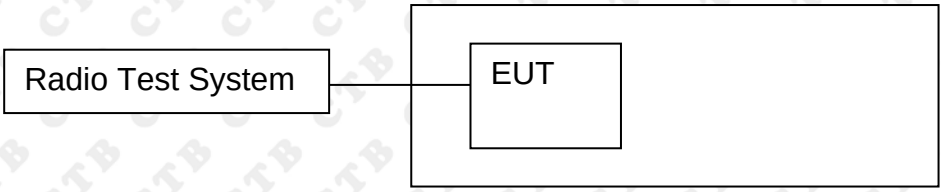11.1 Block Diagram Of Test Setup



11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 20kHz. VBW = 60kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.




11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.996	0.702	PASS
GFSK	MCH	1.002	0.704	PASS
GFSK	HCH	0.996	0.703	PASS
π/4DQPSK	LCH	1.002	0.895	PASS
π/4DQPSK	MCH	1.000	0.911	PASS
π/4DQPSK	HCH	1.002	0.907	PASS
8DPSK	LCH	1.002	0.894	PASS
8DPSK	MCH	1.002	0.885	PASS
8DPSK	HCH	1.000	0.887	PASS

Test Graph


Graphs			
GFSK/LCH			
GFSK/MCH			
GFSK/HCH			

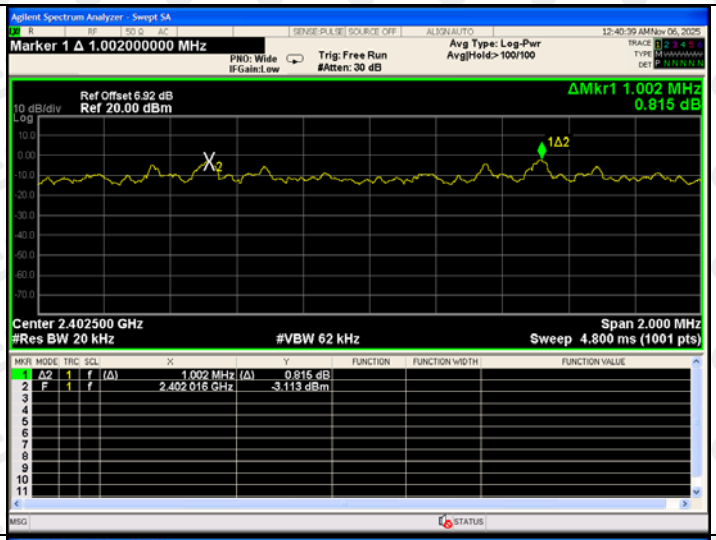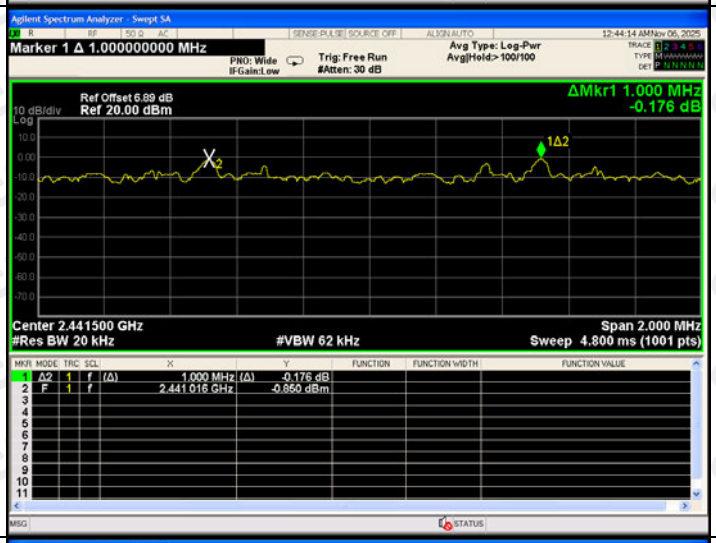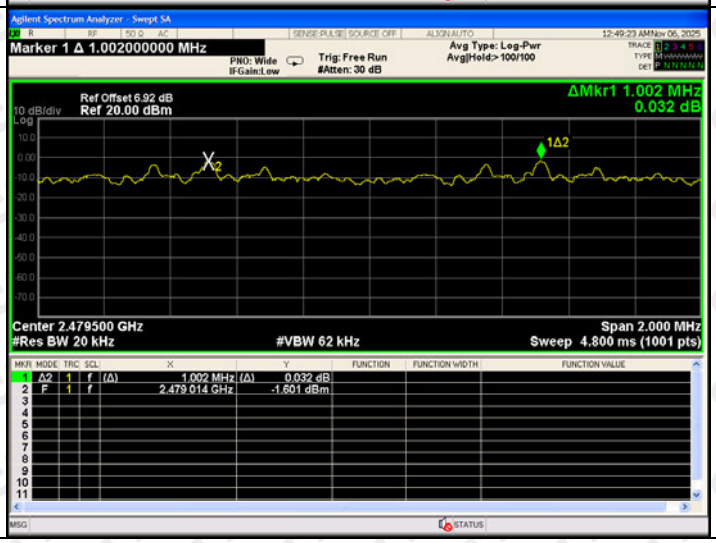π/4DQPSK/LCH			
π/4DQPSK/MCH			
π/4DQPSK/HCH			

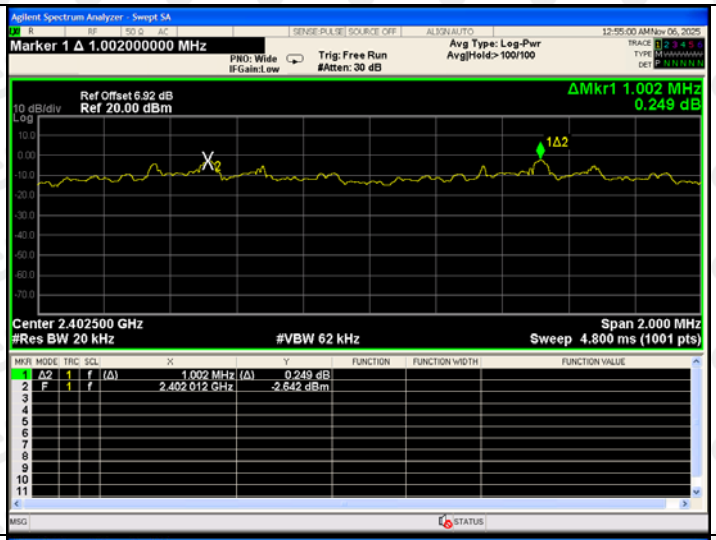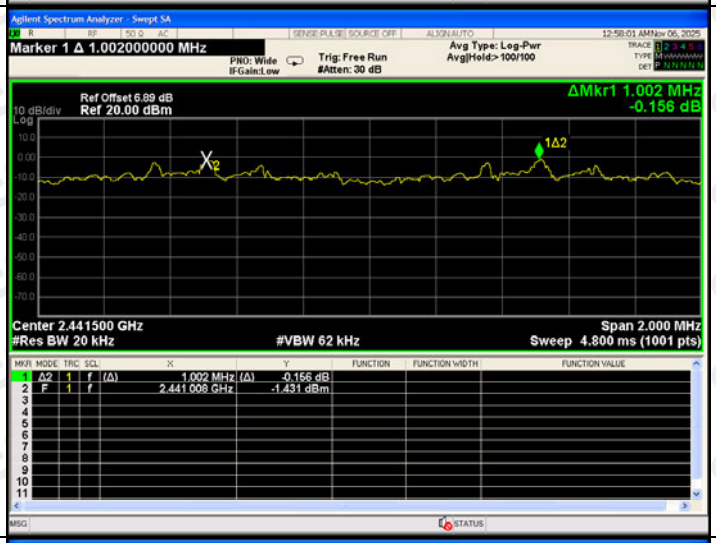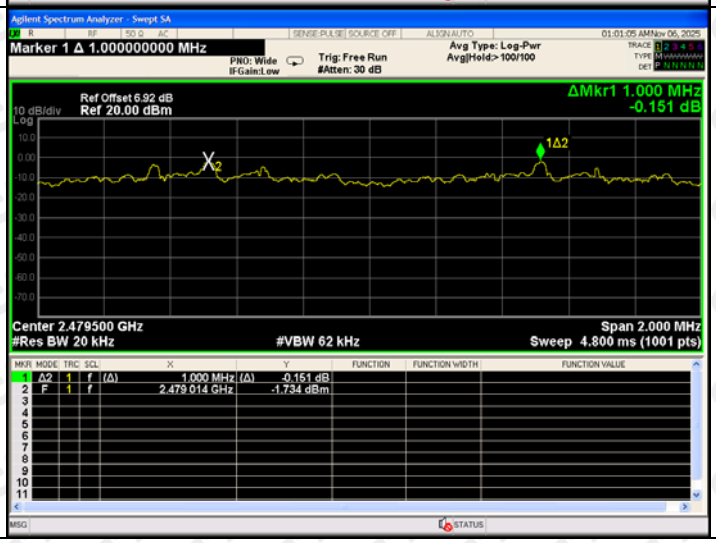8DPSK/LCH			
8DPSK /MCH			
8DPSK /HCH			

12. HOPPING CHANNEL NUMBER

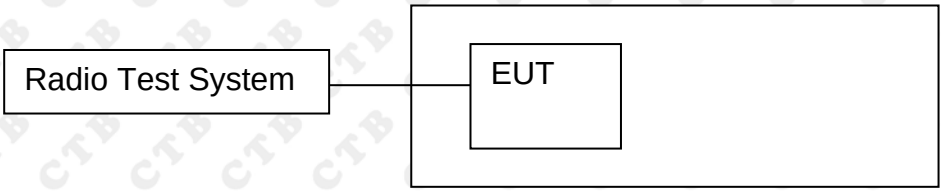12.1 Block Diagram Of Test Setup



12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.




12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	⩾15	PASS
π/4DQPSK	Hop	79	⩾15	PASS
8DPSK	Hop	79	⩾15	PASS

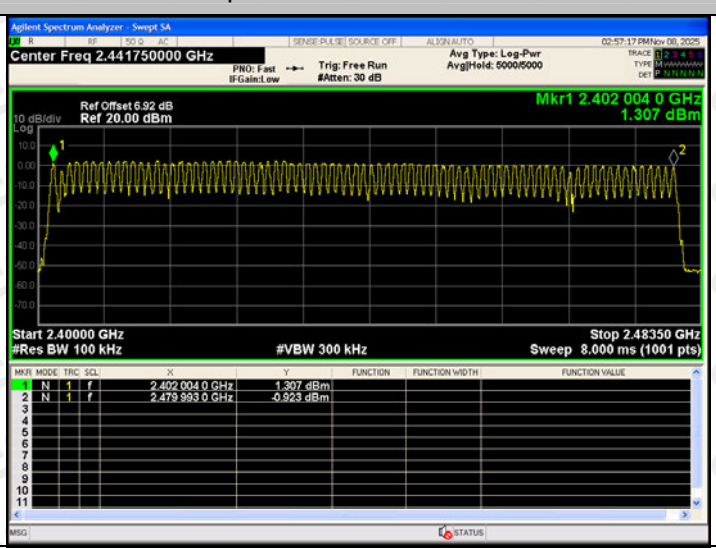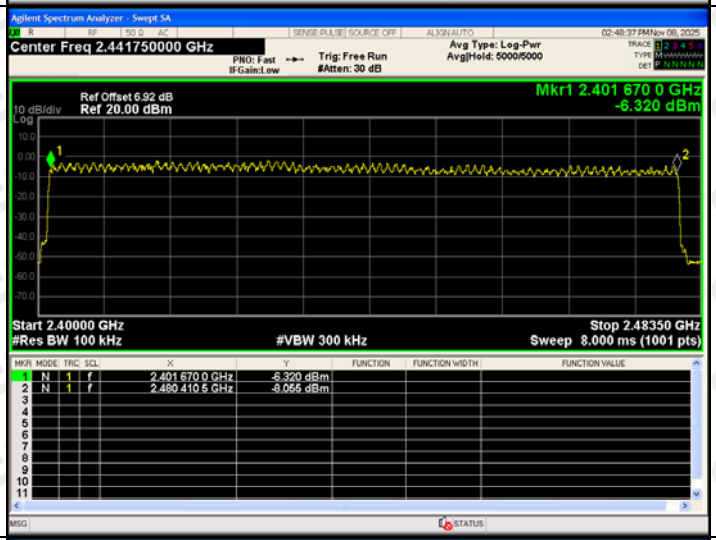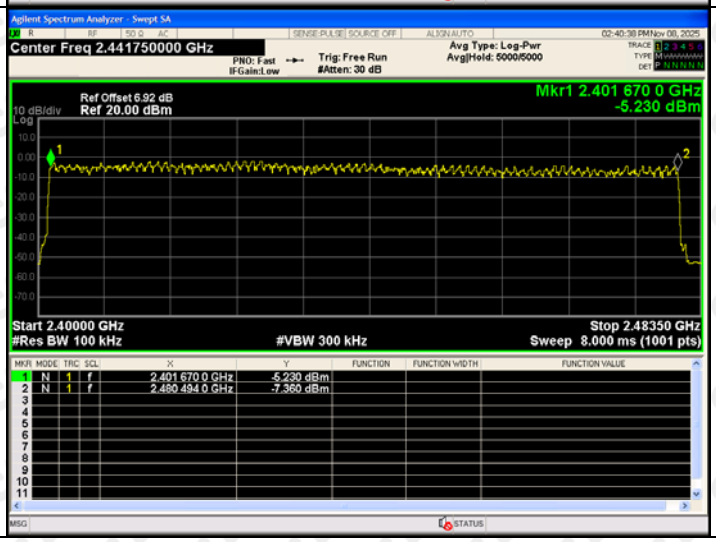Test Graph

Graphs		
GFSK/Hop		
π/4DQPSK/Hop		
8DPSK/Hop		

13. DWELL TIME

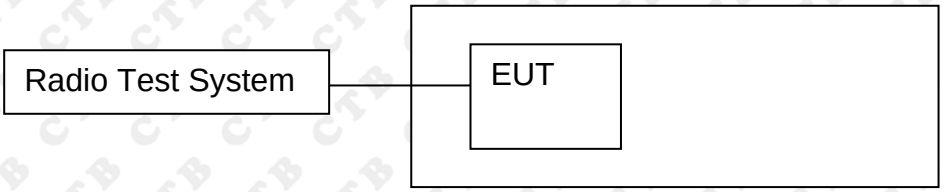13.1 Block Diagram Of Test Setup



13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result




Worst case-GFSK:




Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.641	262.56	400	PASS
	DH3	MCH	1.641	262.56	400	PASS
	DH3	HCH	1.641	262.56	400	PASS
	DH5	LCH	2.891	308.373	400	PASS
	DH5	MCH	2.891	308.373	400	PASS
	DH5	HCH	2.891	308.373	400	PASS




Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel
(5 time slots RX, 1 time slot TX).
DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel
(3 time slots RX, 1 time slot TX).
DH1 Packet permit maximum 1600 / 79 /2 hops per second in each channel
(1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5:1600/79/6*0.4*79*(MkrDelta)/1000
DH3:1600/79/4*0.4*79*(MkrDelta)/1000
DH1:1600/79/2*0.4*79*(MkrDelta)/1000
Remark: Mkr Delta is once pulse time.

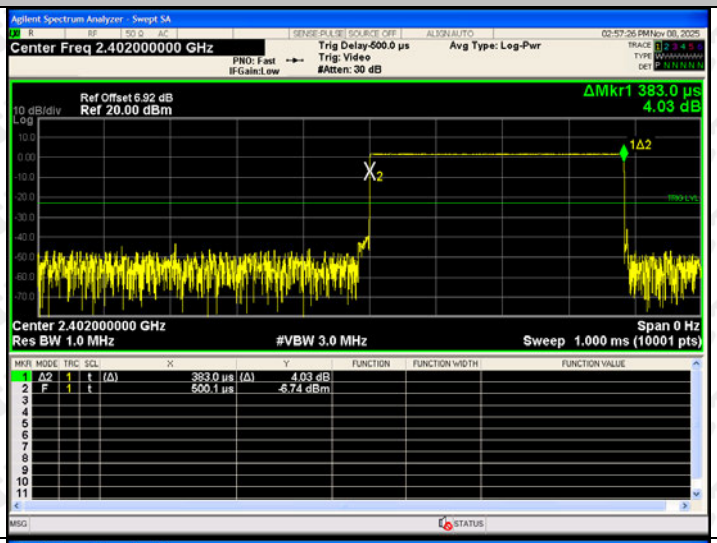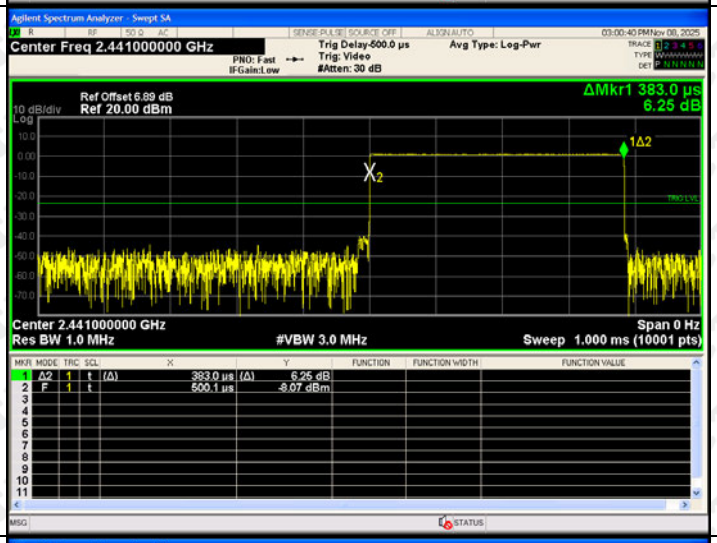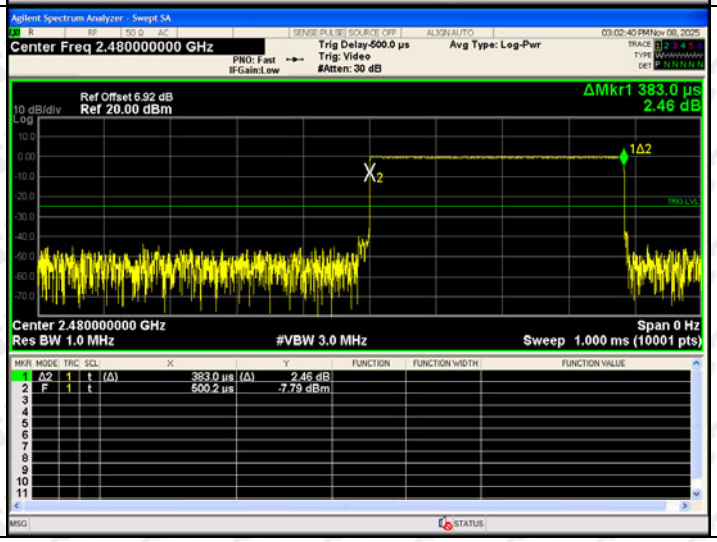Test Graph

Graphs			
GFSK_DH1/LCH			
GFSK_DH1/MCH			
GFSK_DH1/HCH			

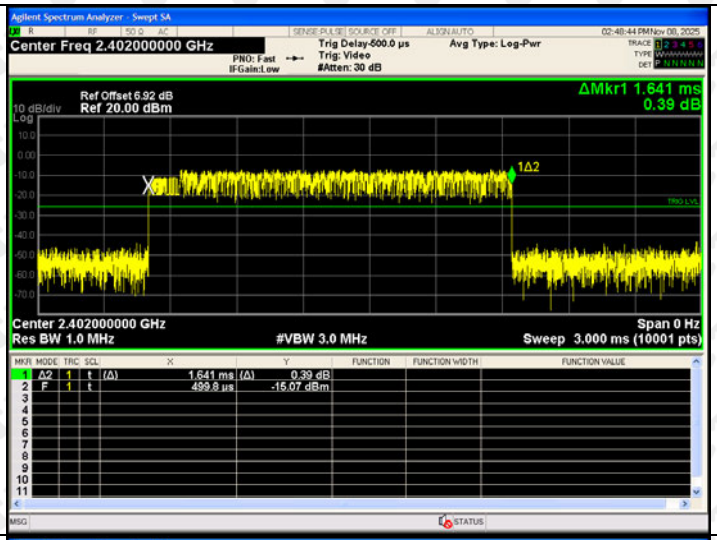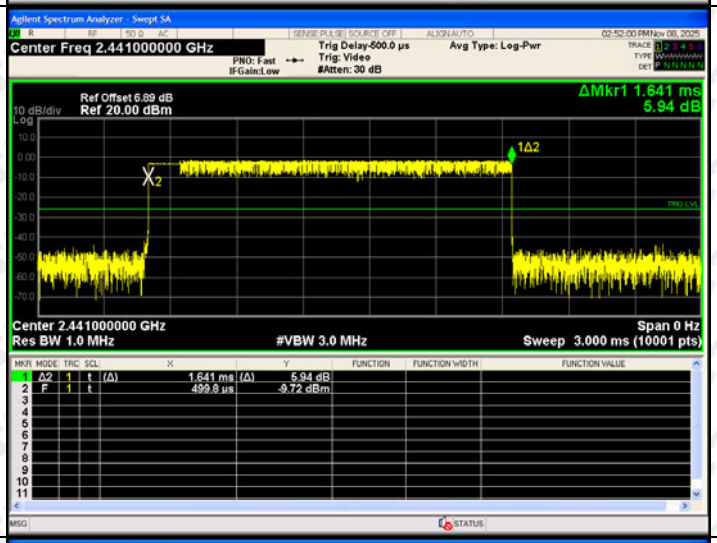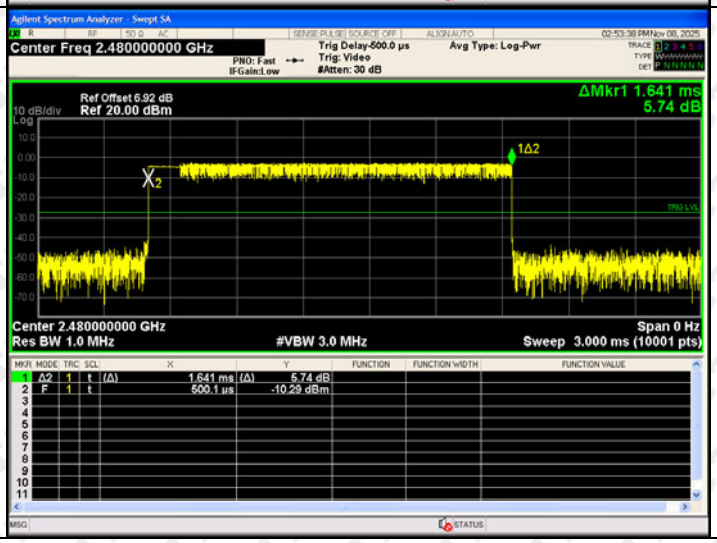GFSK_DH3/LCH			
GFSK_DH3/MCH			
GFSK_DH3/HCH			

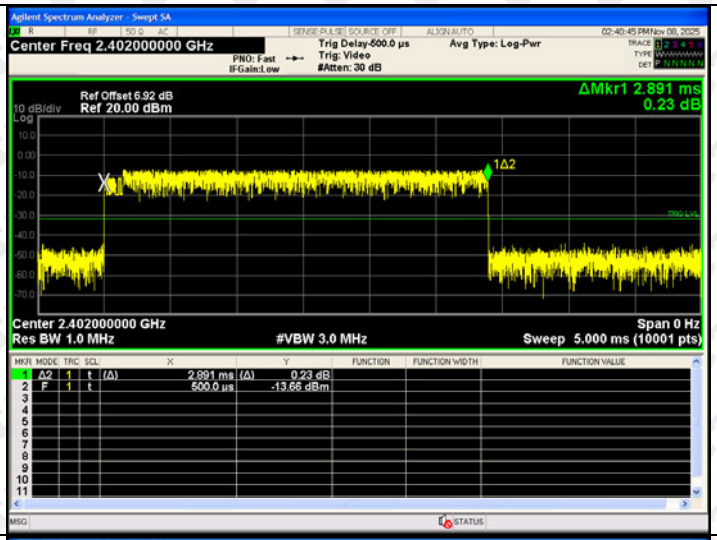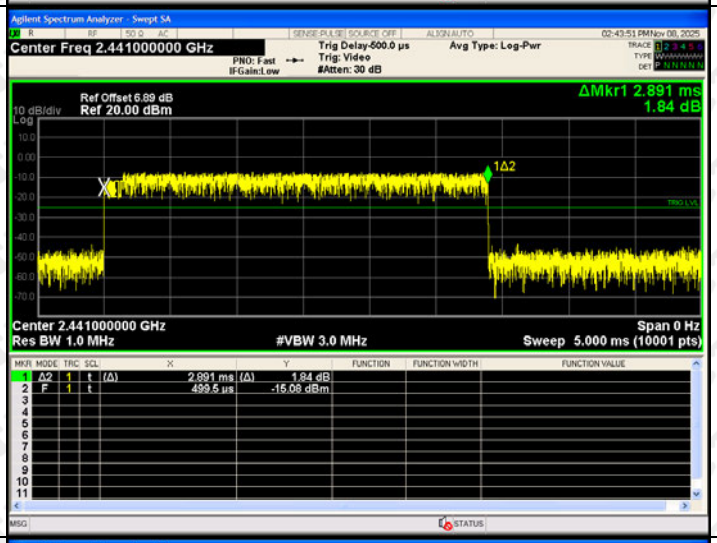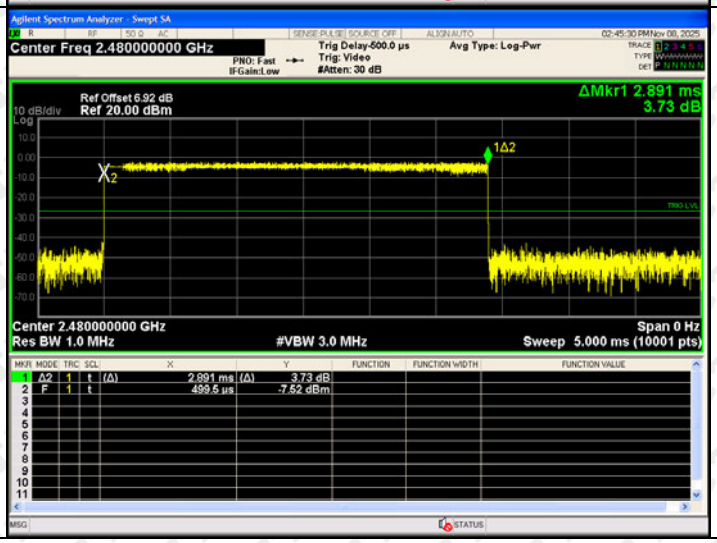GFSK_DH5/LCH			
GFSK_DH5/MCH			
GFSK_DH5/HCH			

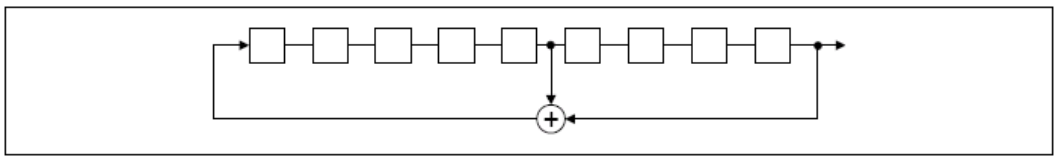
14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.
• Number of shift register stages: 9
• Length of pseudo-random sequence: 29 -1 = 511 bits
• Longest sequence of zeros: 8 (non-inverted signal)



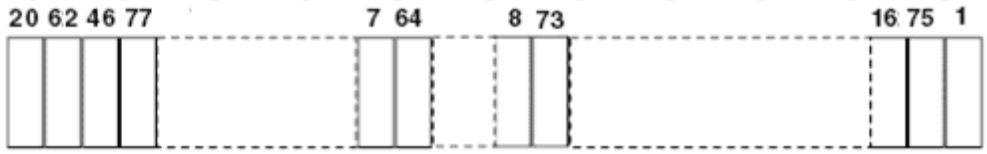An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.
The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:
The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is internal antenna. The best case gain of the antenna is -0.2dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

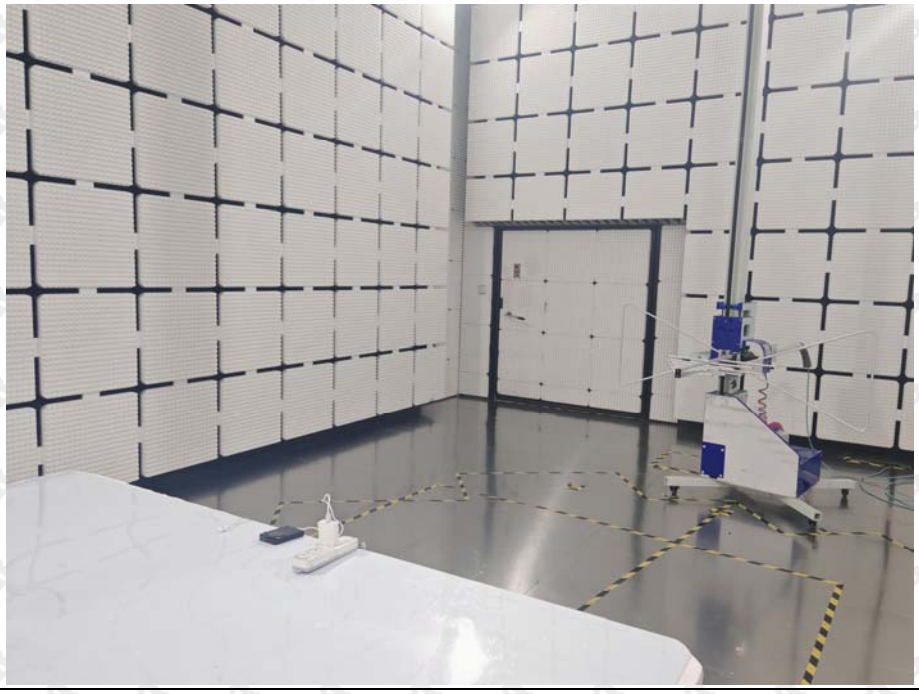Below 1G



Above 1G



Conducted emissions



※※※※※ **END OF REPORT** ※※※※※