

01 Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	26.08	PASS
EGPRS1900 1 Slot	661	1880	26.32	PASS
EGPRS1900 1 Slot	810	1909.8	25.56	PASS
EGPRS1900 2 Slot	512	1850.2	24.63	PASS
EGPRS1900 2 Slot	661	1880	24.62	PASS
EGPRS1900 2 Slot	810	1909.8	24.69	PASS
EGPRS1900 3 Slot	512	1850.2	22.31	PASS
EGPRS1900 3 Slot	661	1880	22.66	PASS
EGPRS1900 3 Slot	810	1909.8	21.83	PASS
EGPRS1900 4 Slot	512	1850.2	19.72	PASS
EGPRS1900 4 Slot	661	1880	20.14	PASS
EGPRS1900 4 Slot	810	1909.8	19.27	PASS
EGPRS850 1 Slot	128	824.2	26.24	PASS
EGPRS850 1 Slot	189	836.4	25.76	PASS
EGPRS850 1 Slot	251	848.8	25.93	PASS
EGPRS850 2 Slot	128	824.2	24.97	PASS
EGPRS850 2 Slot	189	836.4	24.92	PASS
EGPRS850 2 Slot	251	848.8	24.69	PASS
EGPRS850 3 Slot	128	824.2	22.37	PASS
EGPRS850 3 Slot	189	836.4	22.61	PASS
EGPRS850 3 Slot	251	848.8	22.29	PASS
EGPRS850 4 Slot	128	824.2	20.07	PASS
EGPRS850 4 Slot	189	836.4	19.76	PASS
EGPRS850 4 Slot	251	848.8	19.91	PASS
GPRS1900 1 Slot	512	1850.2	29.96	PASS
GPRS1900 1 Slot	661	1880	30.03	PASS
GPRS1900 1 Slot	810	1909.8	29.88	PASS
GPRS1900 2 Slot	512	1850.2	27.32	PASS
GPRS1900 2 Slot	661	1880	27.31	PASS
GPRS1900 2 Slot	810	1909.8	27.17	PASS
GPRS1900 3 Slot	512	1850.2	25.58	PASS
GPRS1900 3 Slot	661	1880	25.57	PASS
GPRS1900 3 Slot	810	1909.8	25.45	PASS
GPRS1900 4 Slot	512	1850.2	23.37	PASS
GPRS1900 4 Slot	661	1880	23.34	PASS
GPRS1900 4 Slot	810	1909.8	23.20	PASS
GPRS850 1 Slot	128	824.2	33.06	PASS
GPRS850 1 Slot	189	836.4	33.02	PASS
GPRS850 1 Slot	251	848.8	32.74	PASS
GPRS850 2 Slot	128	824.2	30.65	PASS
GPRS850 2 Slot	189	836.4	30.51	PASS

GPRS850 2 Slot	251	848.8	30.22	PASS
GPRS850 3 Slot	128	824.2	28.87	PASS
GPRS850 3 Slot	189	836.4	28.60	PASS
GPRS850 3 Slot	251	848.8	28.40	PASS
GPRS850 4 Slot	128	824.2	26.49	PASS
GPRS850 4 Slot	189	836.4	26.51	PASS
GPRS850 4 Slot	251	848.8	26.14	PASS
GSM1900	512	1850.2	29.88	PASS
GSM1900	661	1880	29.95	PASS
GSM1900	810	1909.8	29.82	PASS
GSM850	128	824.2	33.10	PASS
GSM850	189	836.4	33.06	PASS
GSM850	251	848.8	32.77	PASS


15 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	6.68	13	PASS
EGPRS1900	661	1880	6.57	13	PASS
EGPRS1900	810	1909.8	6.59	13	PASS
EGPRS850	128	824.2	9.04	13	PASS
EGPRS850	189	836.4	8.72	13	PASS
EGPRS850	251	848.8	8.70	13	PASS


EGPRS1900 Channel=512

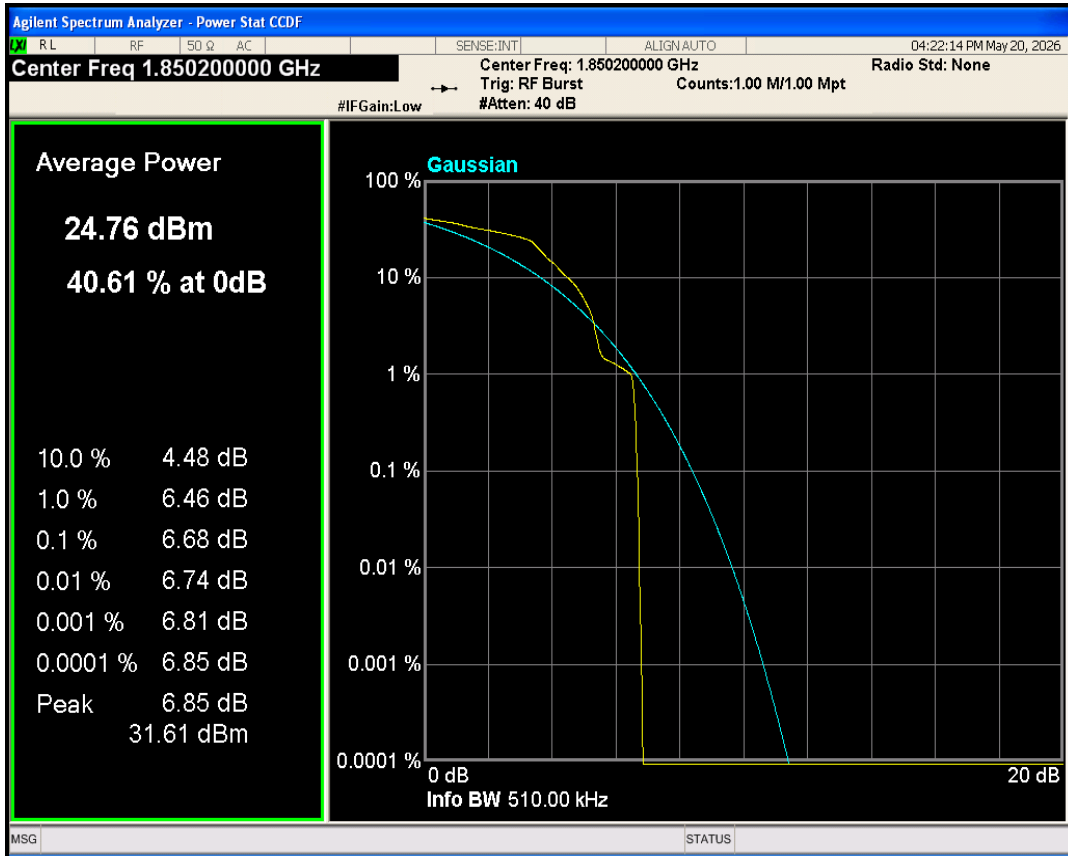


EGPRS1900 Channel=810

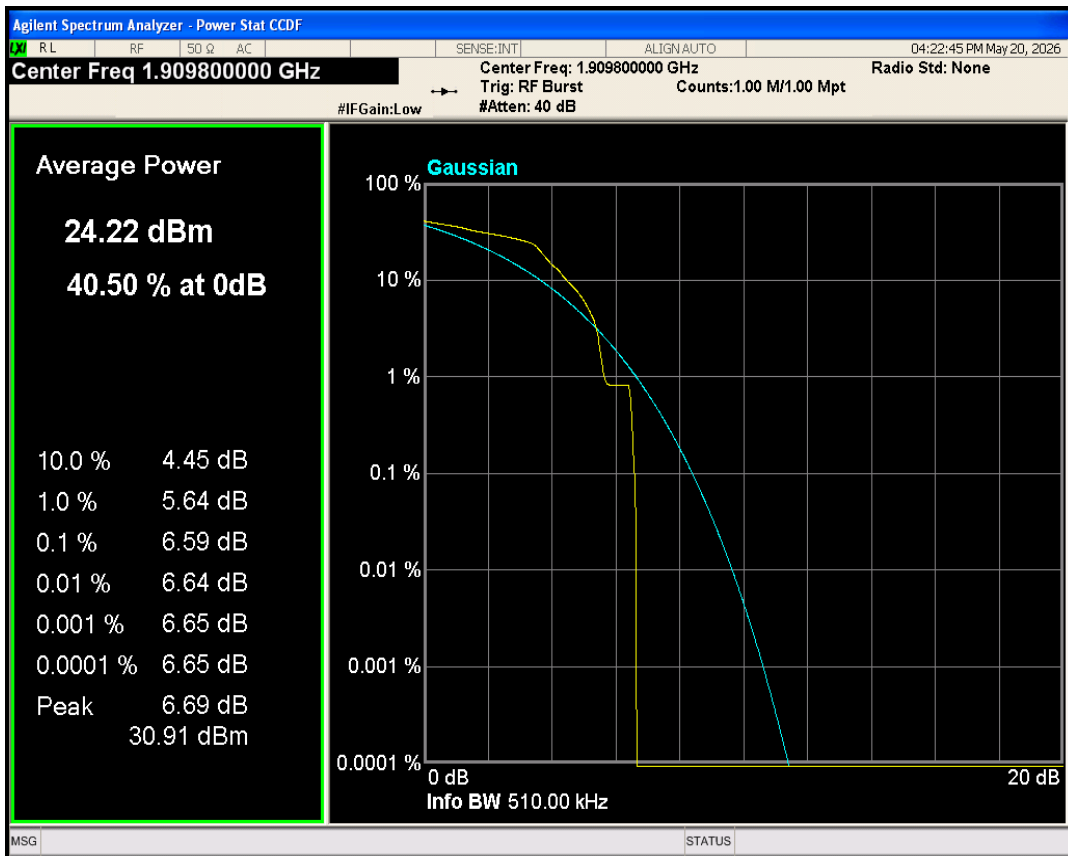


EGPRS1900 Channel=661

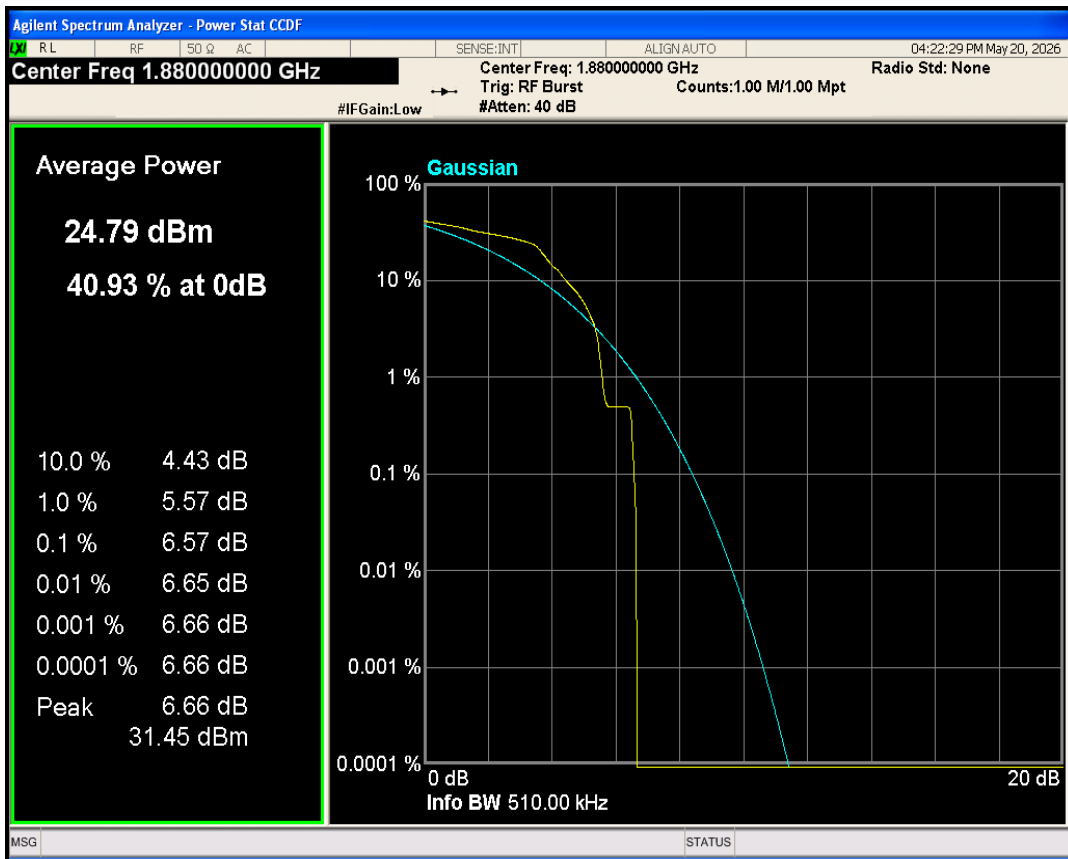


EGPRS850 Channel=189

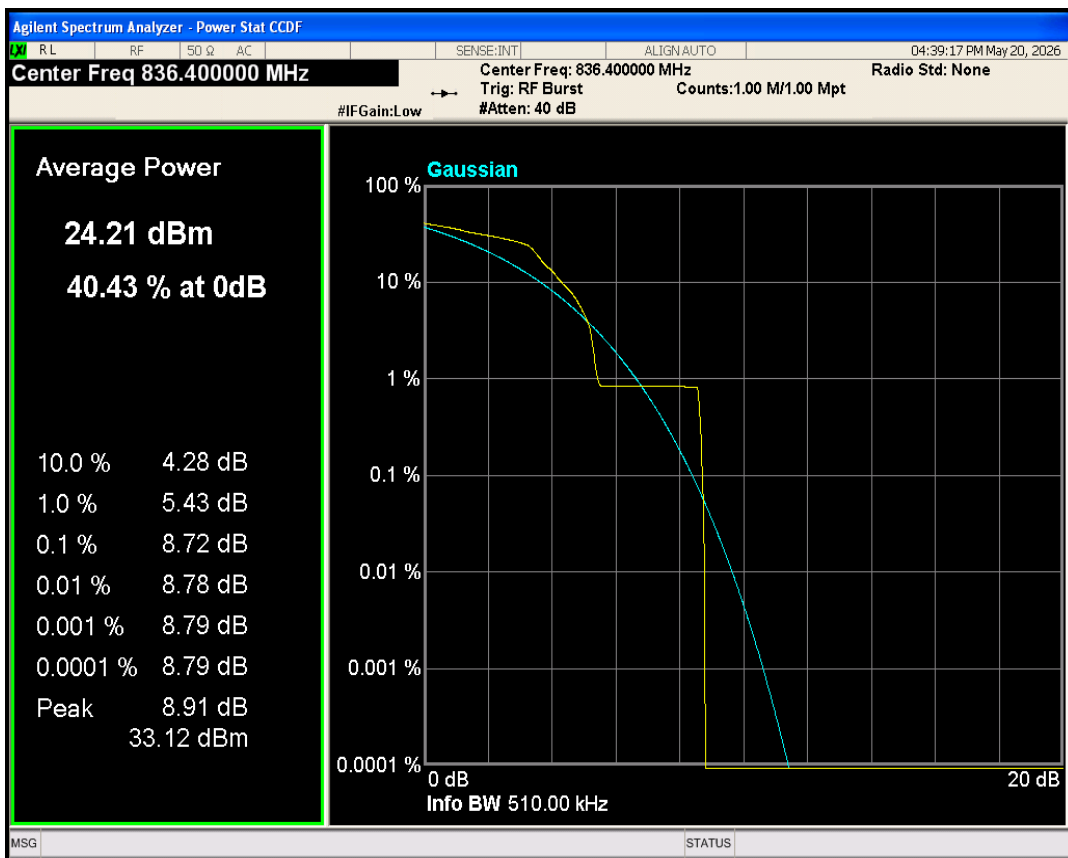

EGPRS850 Channel=128

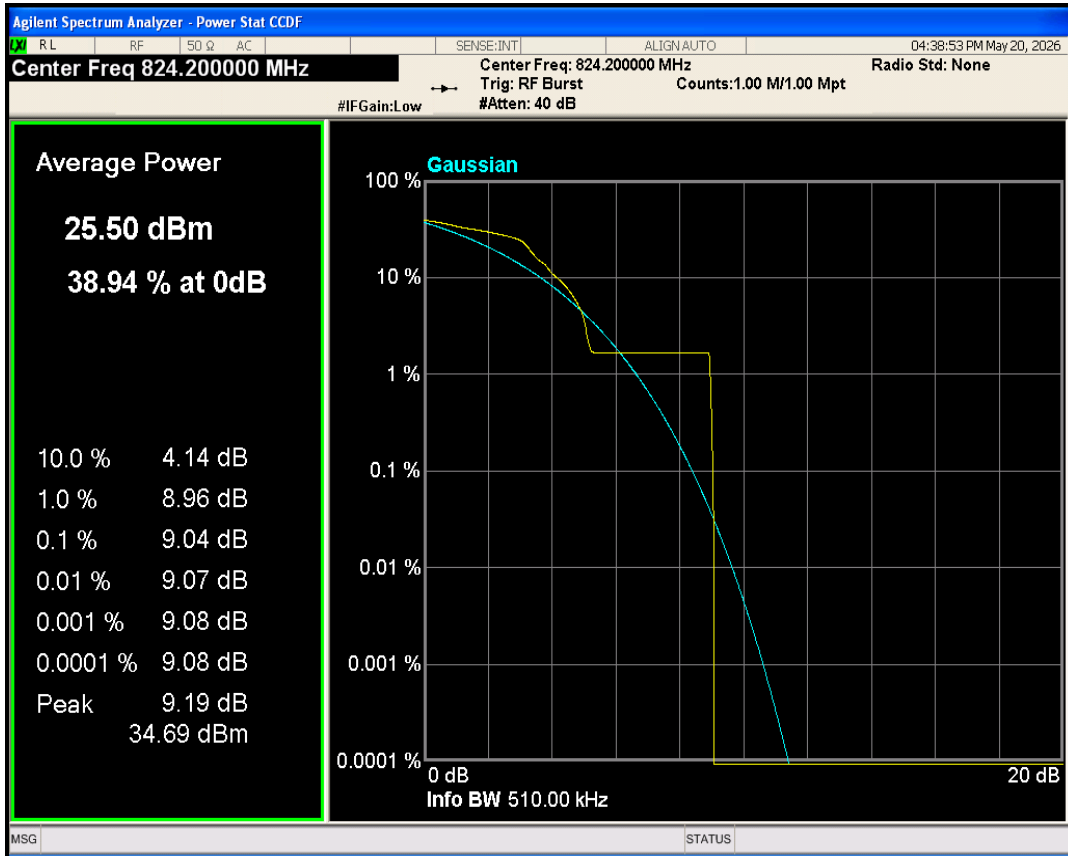


EGPRS850 Channel=251

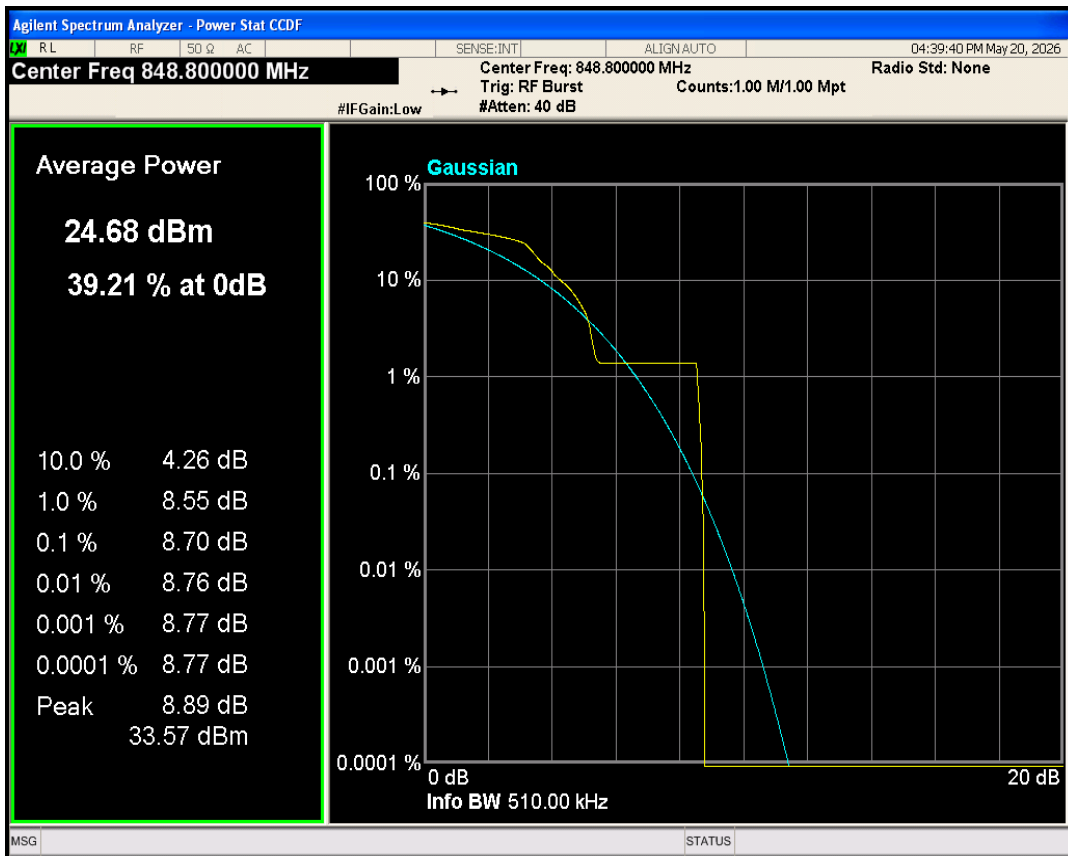


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	244.012	306.289	PASS
EGPRS1900	661	1880	244.727	298.730	PASS
EGPRS1900	810	1909.8	240.777	301.473	PASS
EGPRS850	128	824.2	228.012	283.785	PASS
EGPRS850	189	836.4	236.010	294.983	PASS
EGPRS850	251	848.8	234.797	301.238	PASS


EGPRS1900 Channel=512

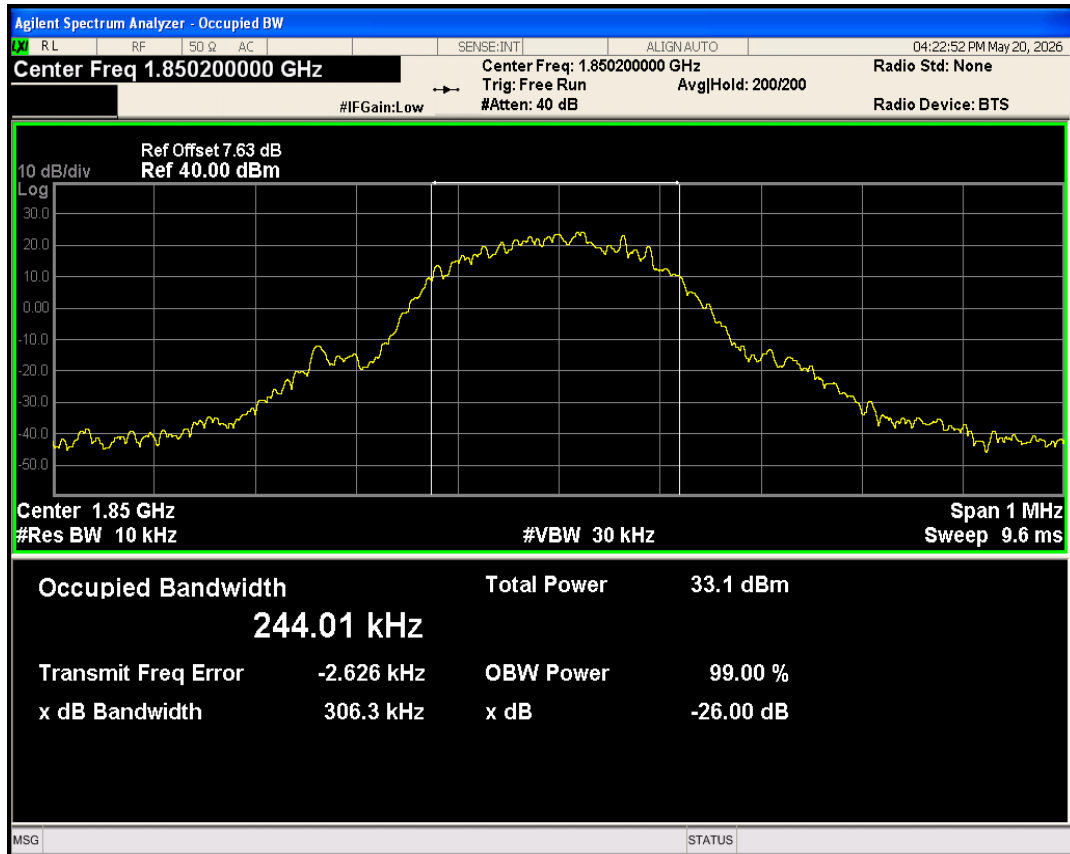


EGPRS1900 Channel=810

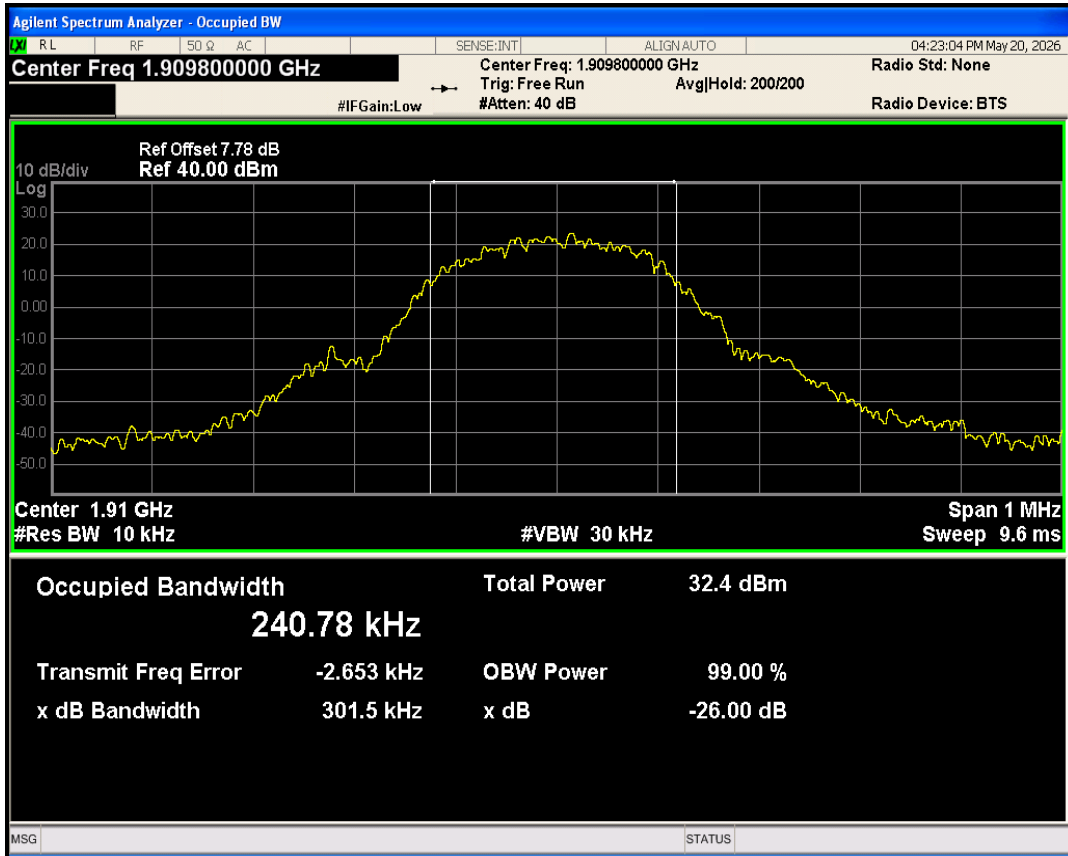


EGPRS1900 Channel=661

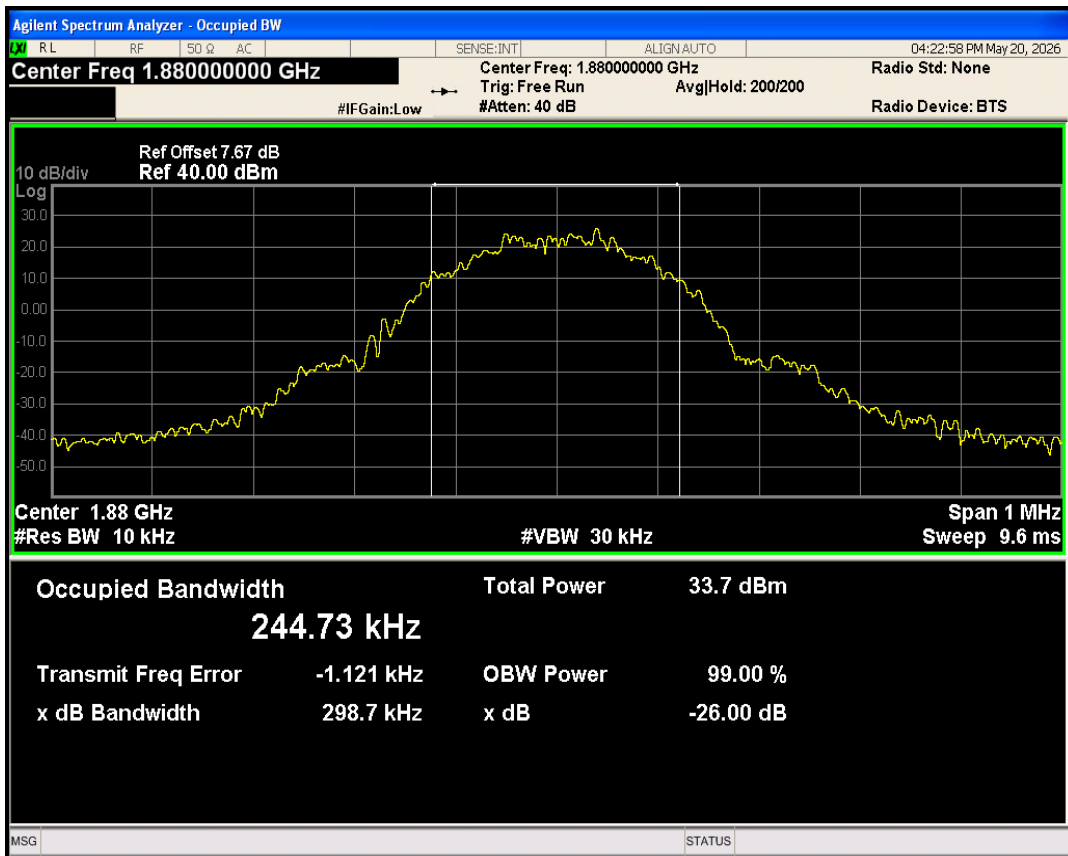


EGPRS850 Channel=189

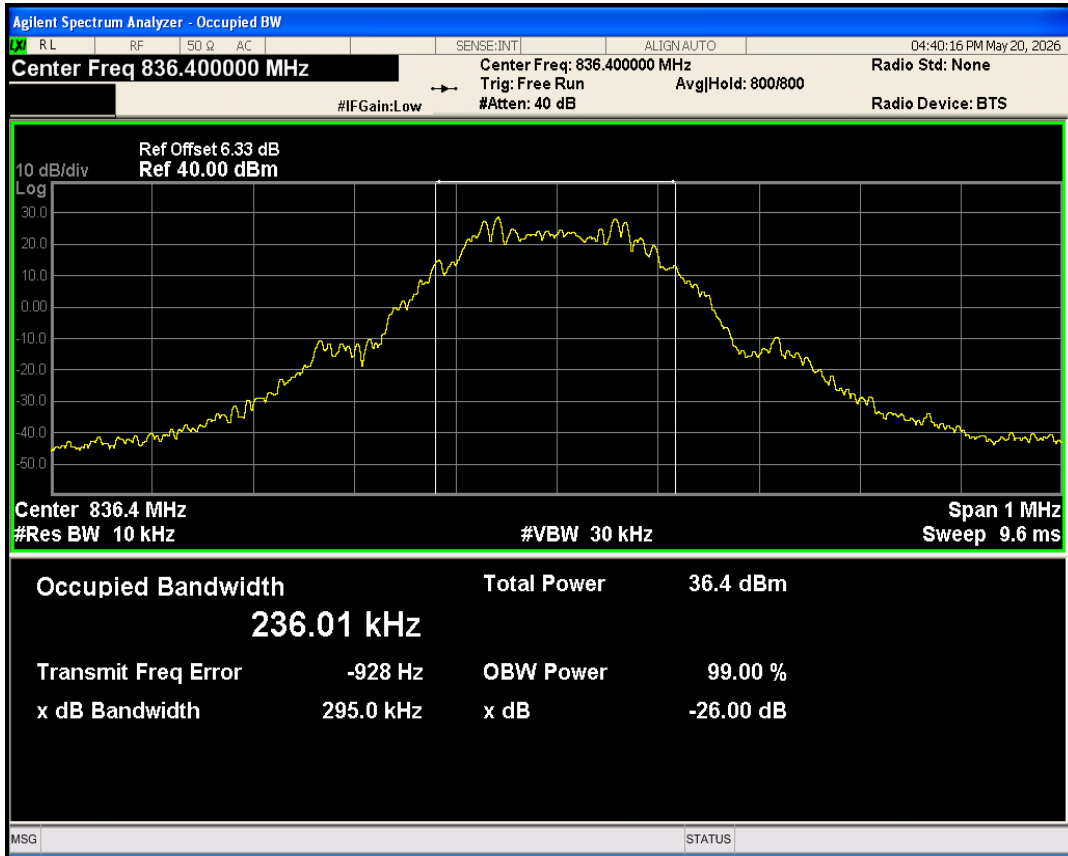

EGPRS850 Channel=128

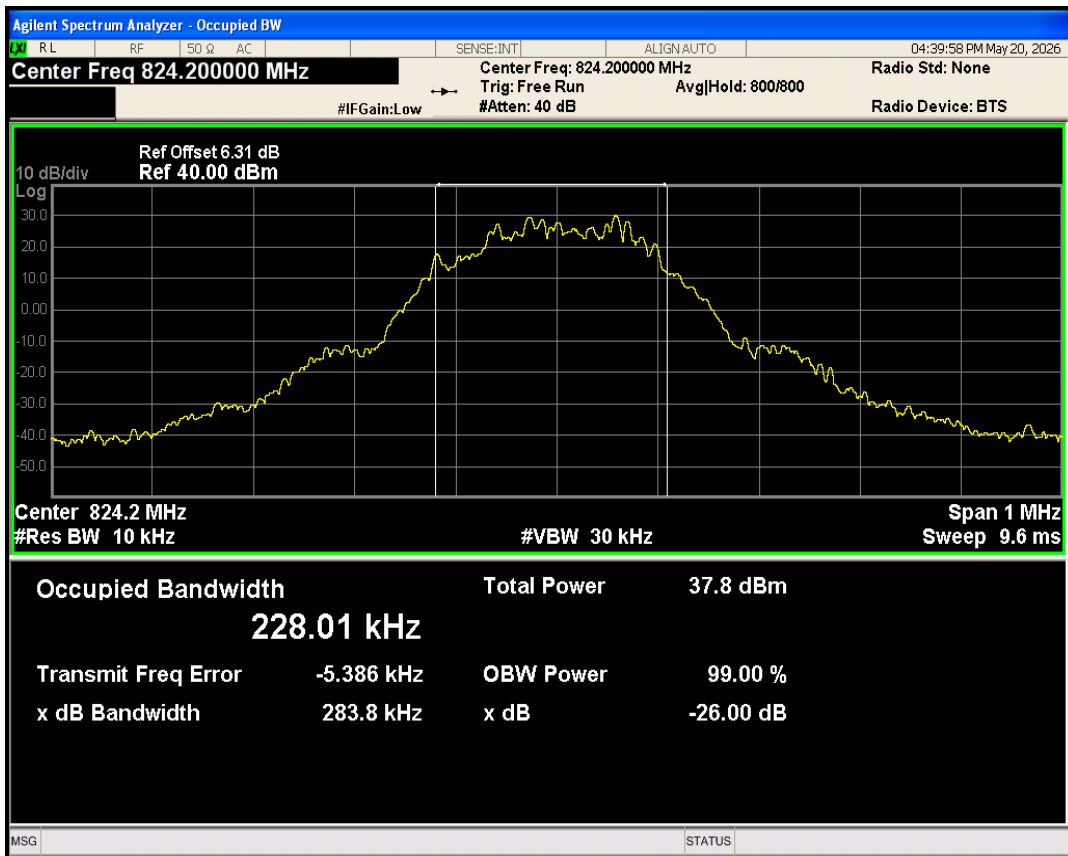


EGPRS850 Channel=251

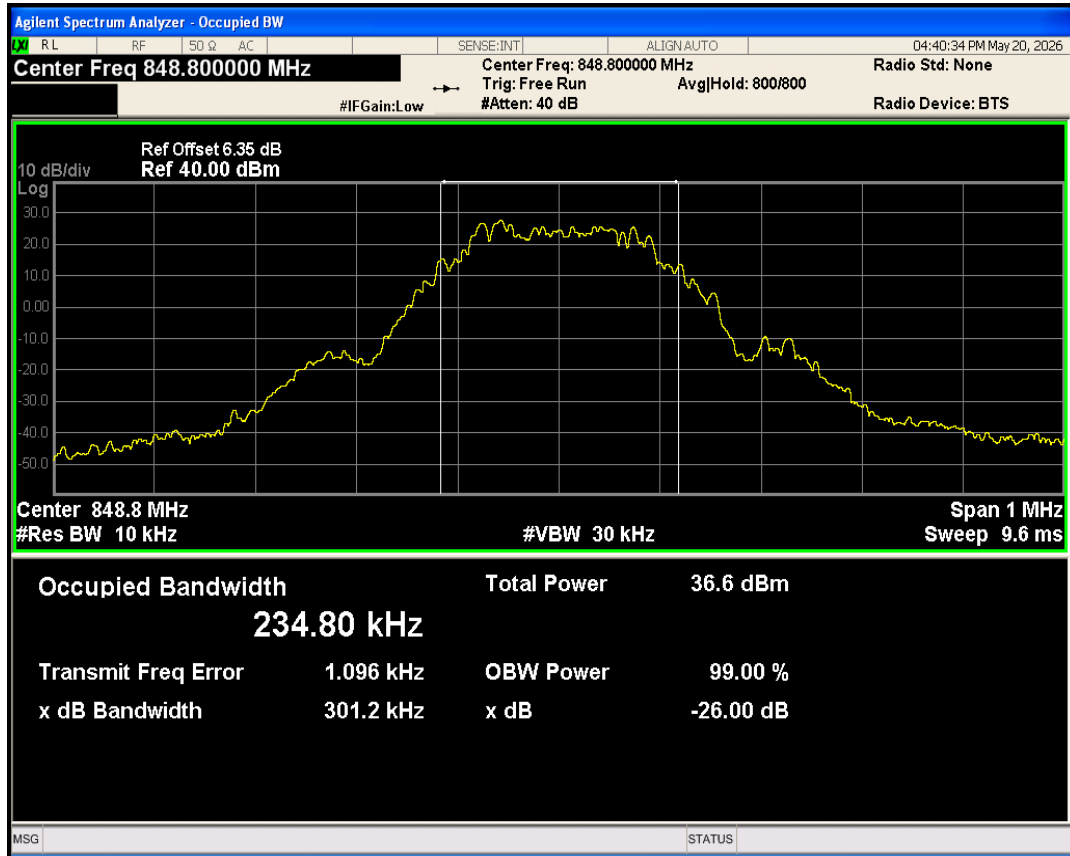


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.97	-35.80	-13	PASS
EGPRS1900	810	1909.8	1910.00	-34.50	-13	PASS
EGPRS850	128	824.2	824.00	-33.52	-13	PASS
EGPRS850	251	848.8	849.01	-34.42	-13	PASS


EGPRS1900 Channel=512

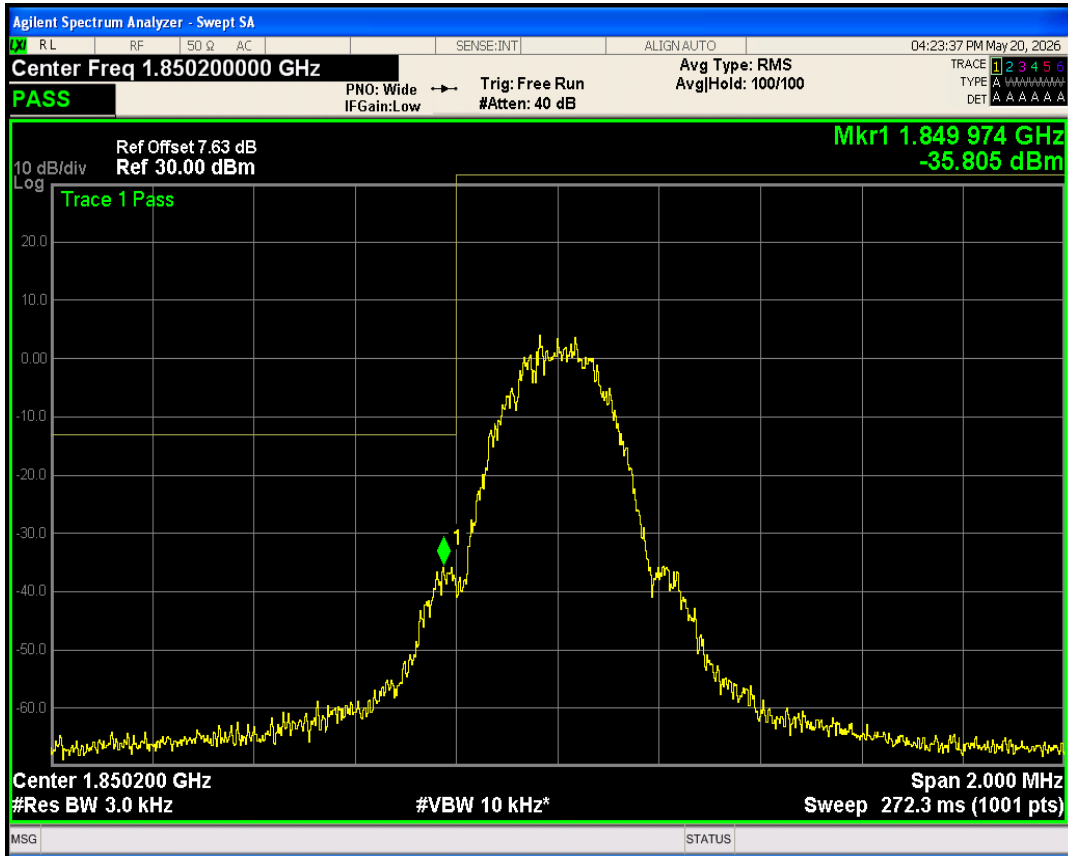


EGPRS1900 Channel=810

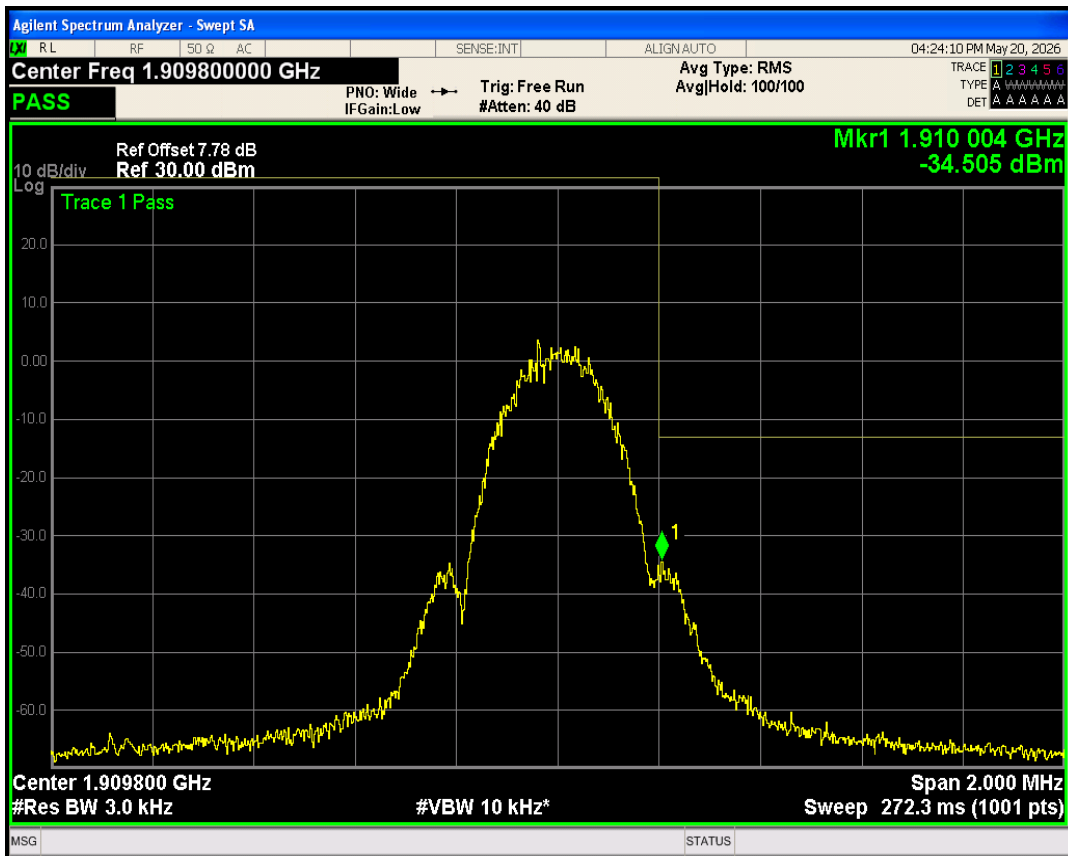

EGPRS850 Channel=251

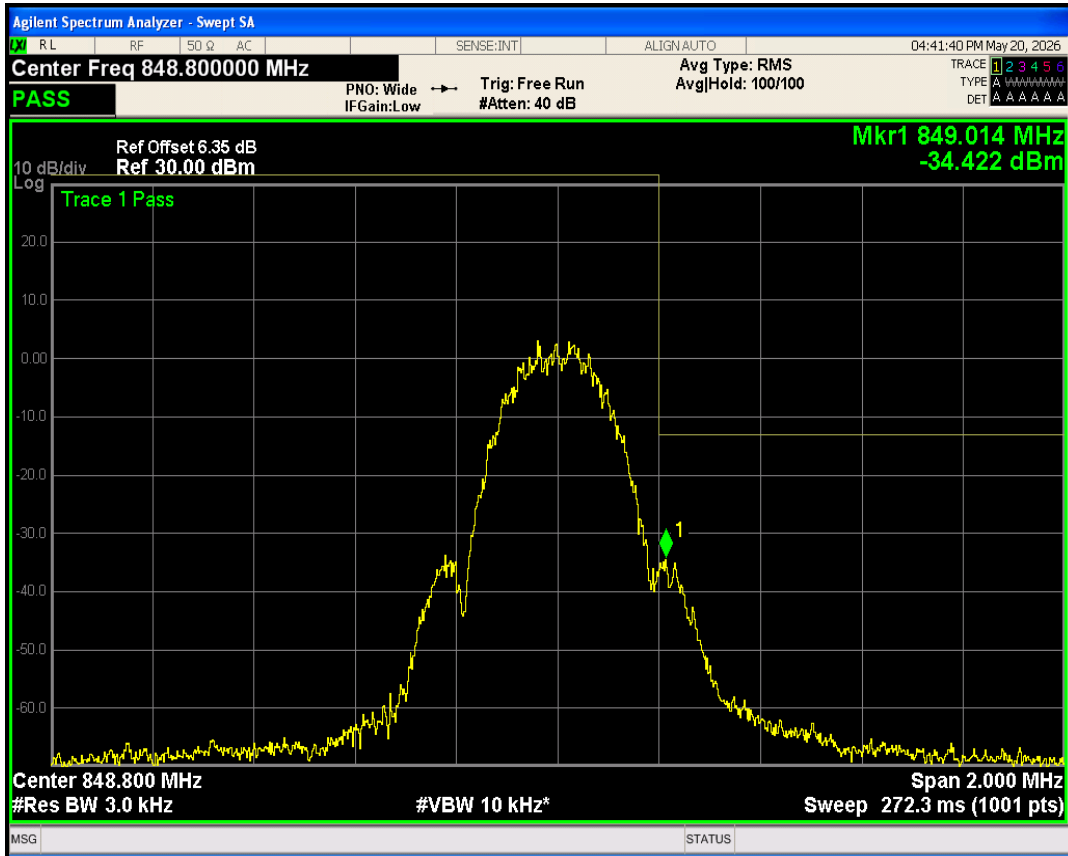


EGPRS850 Channel=128

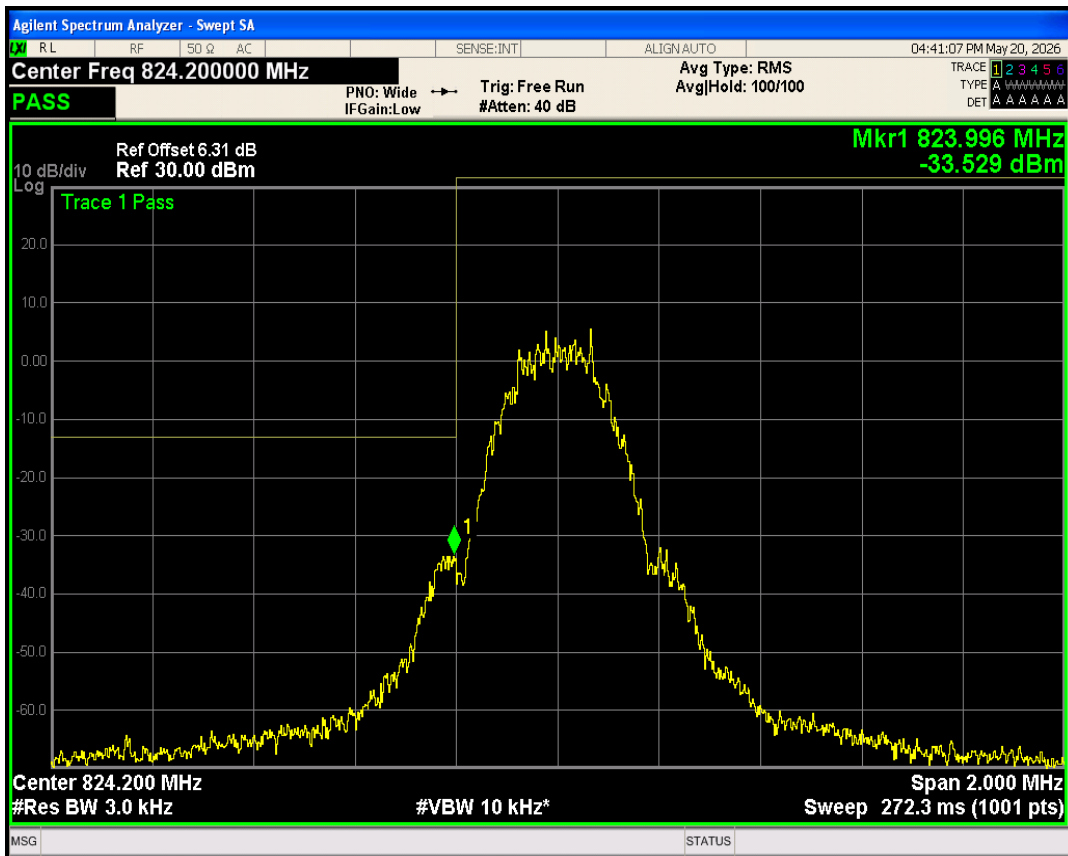


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	24876.73	-20.19	-13	PASS
EGPRS1900	661	1880	26333.90	-19.93	-13	PASS
EGPRS1900	810	1909.8	24928.34	-20.21	-13	PASS
EGPRS850	128	824.2	25167.90	-21.46	-13	PASS
EGPRS850	189	836.4	24855.55	-21.31	-13	PASS
EGPRS850	251	848.8	25805.82	-21.25	-13	PASS


EGPRS1900 Channel=661

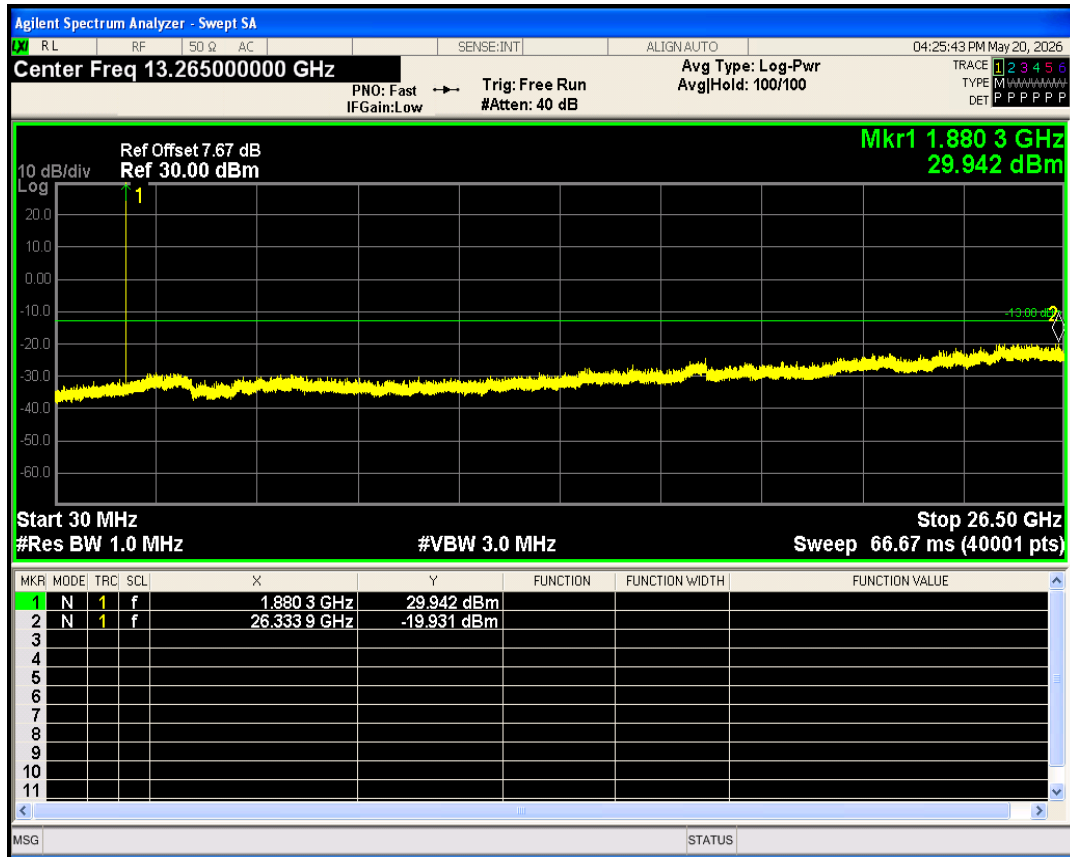


EGPRS1900 Channel=512

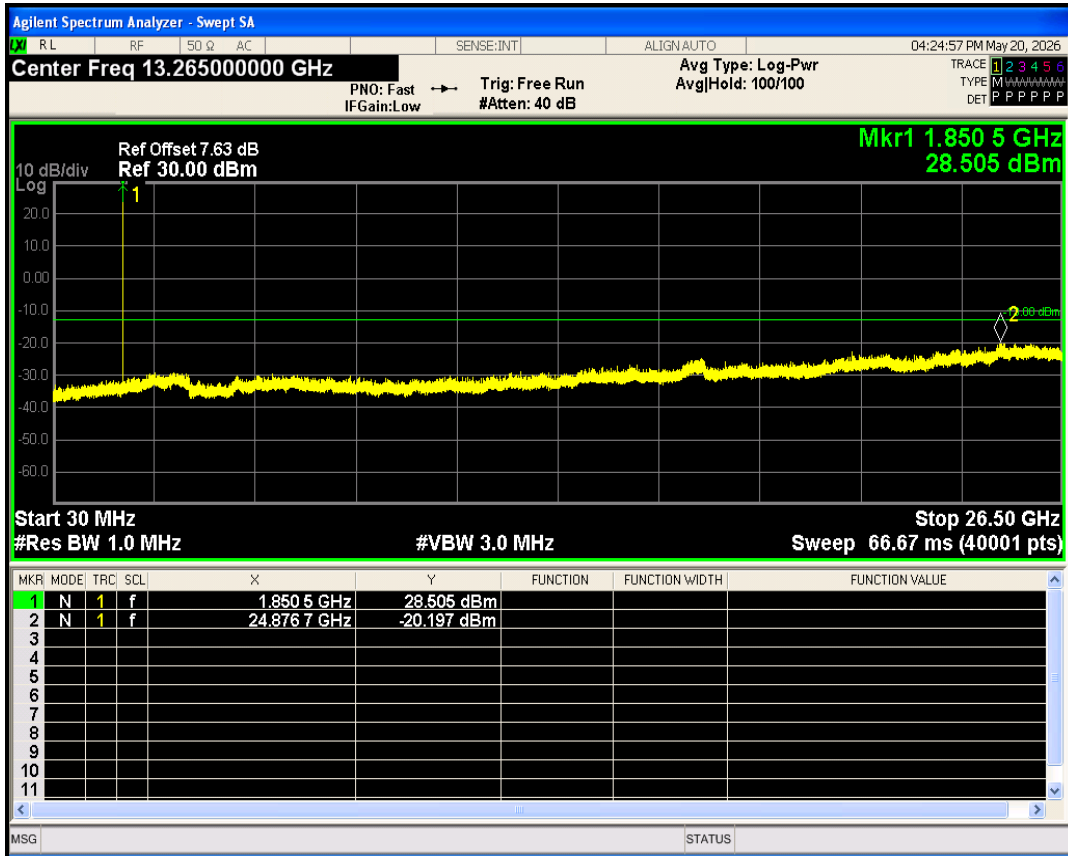


EGPRS1900 Channel=810

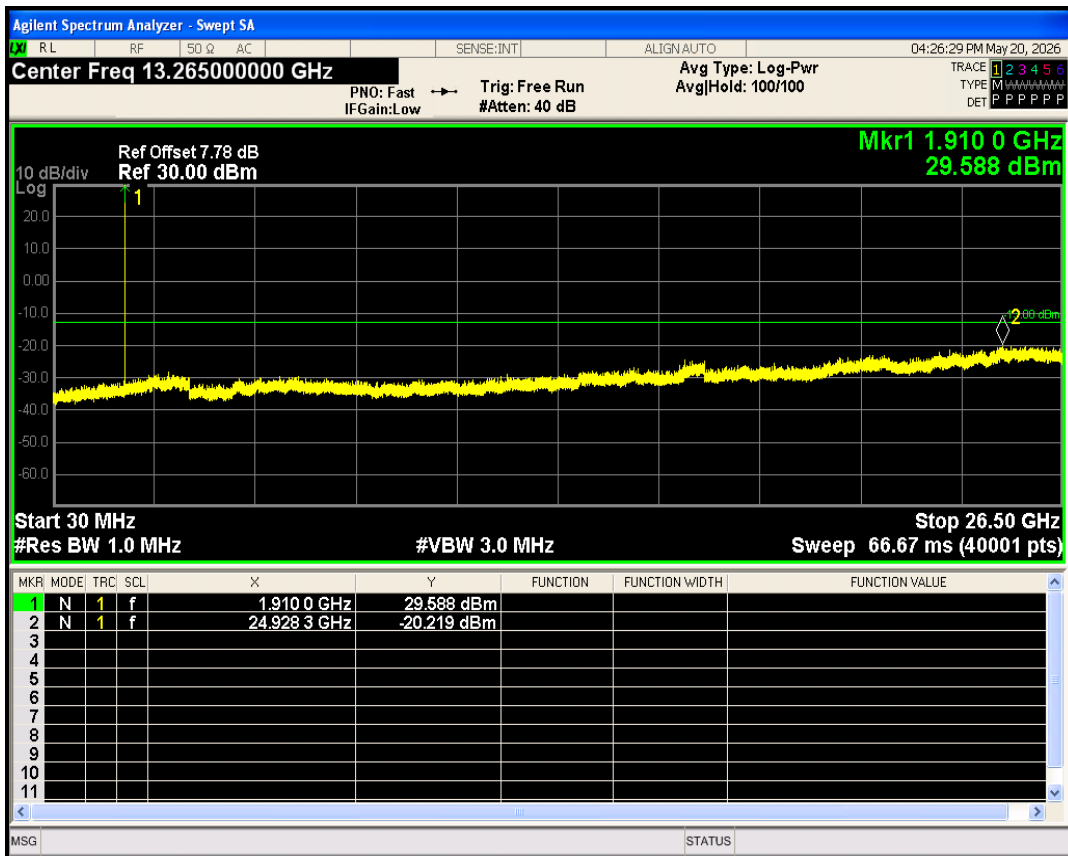


EGPRS850 Channel=189

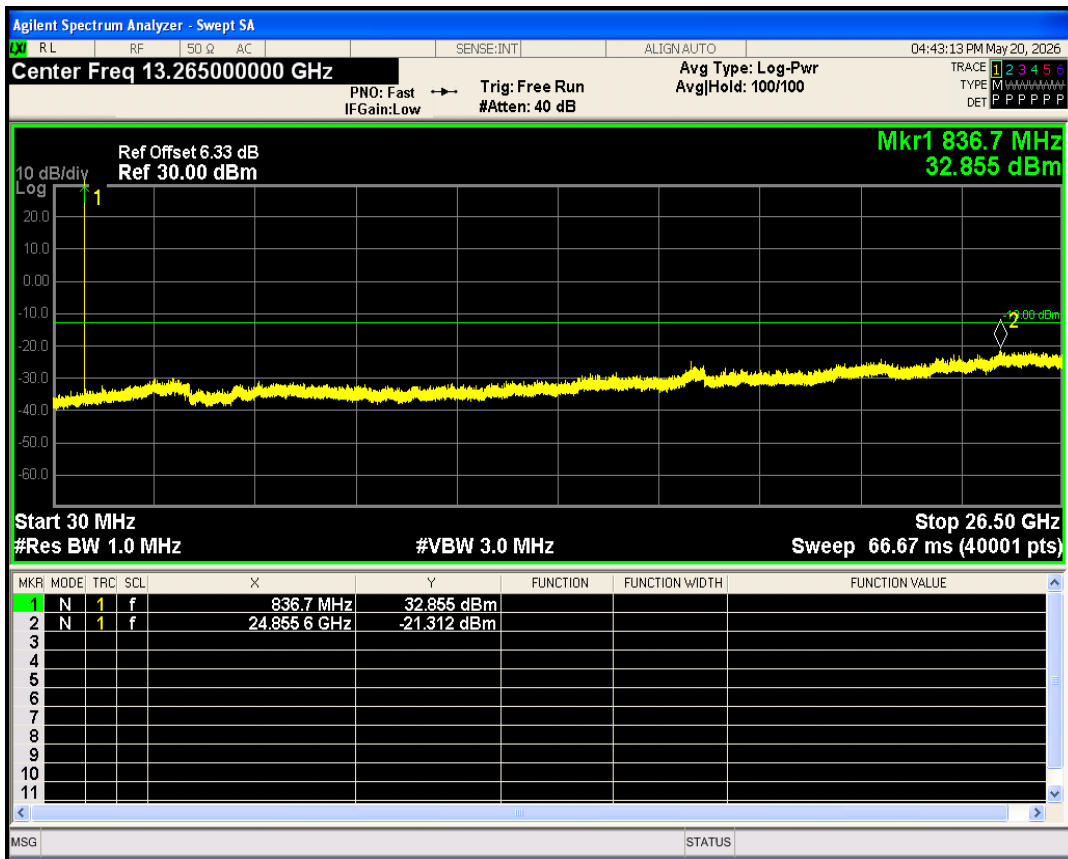

EGPRS850 Channel=128

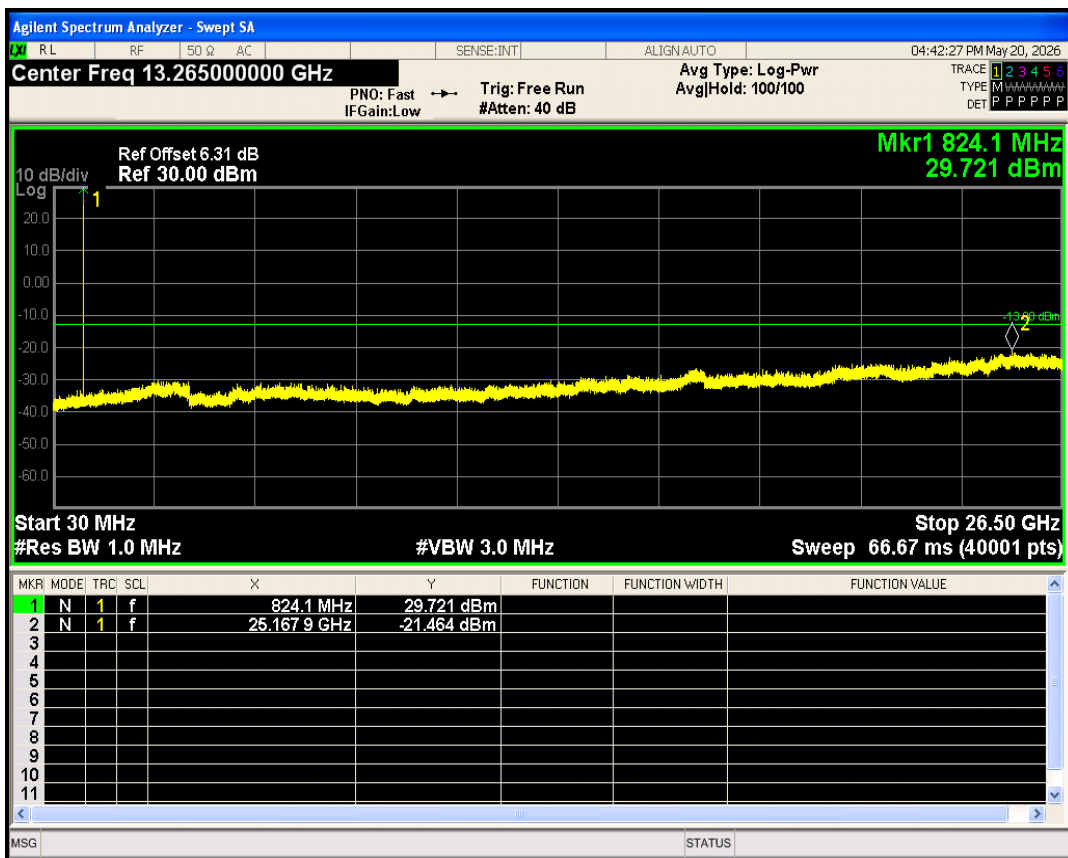


EGPRS850 Channel=251

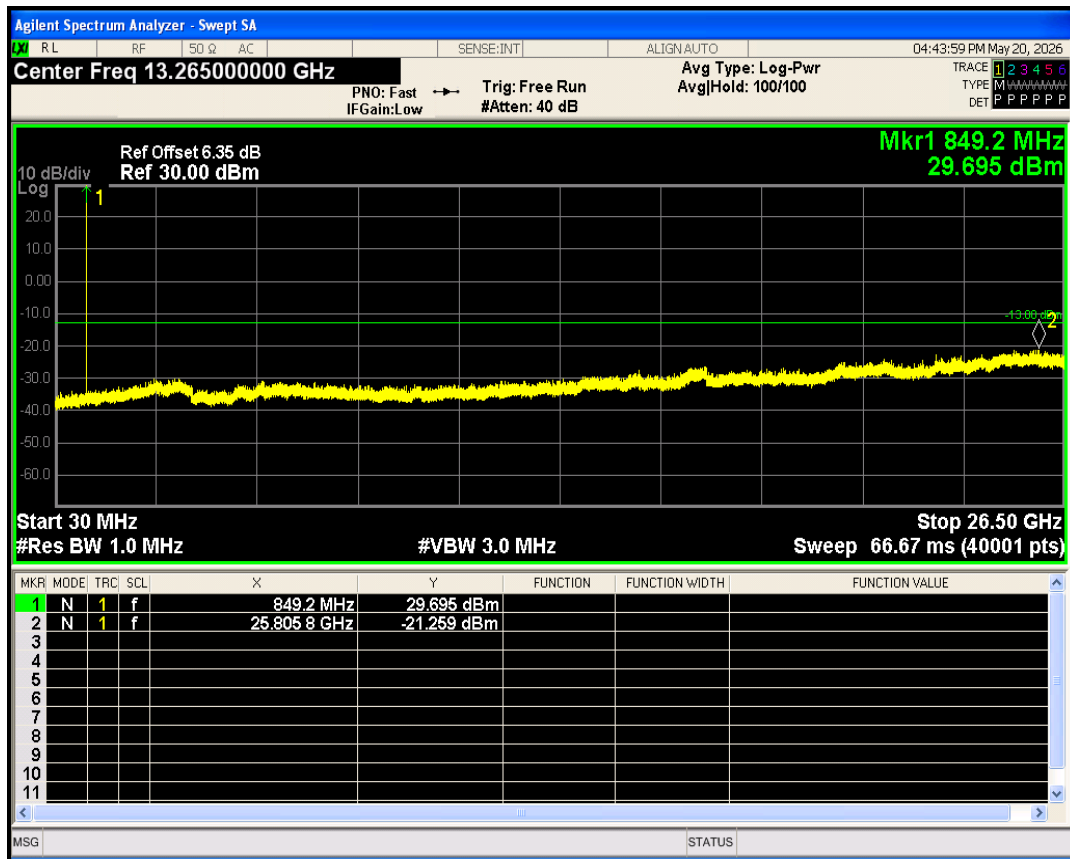


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.81	13	PASS
GPRS1900	661	1880	2.81	13	PASS
GPRS1900	810	1909.8	2.83	13	PASS
GPRS850	128	824.2	2.73	13	PASS
GPRS850	189	836.4	2.81	13	PASS
GPRS850	251	848.8	2.81	13	PASS


GPRS1900 Channel=661

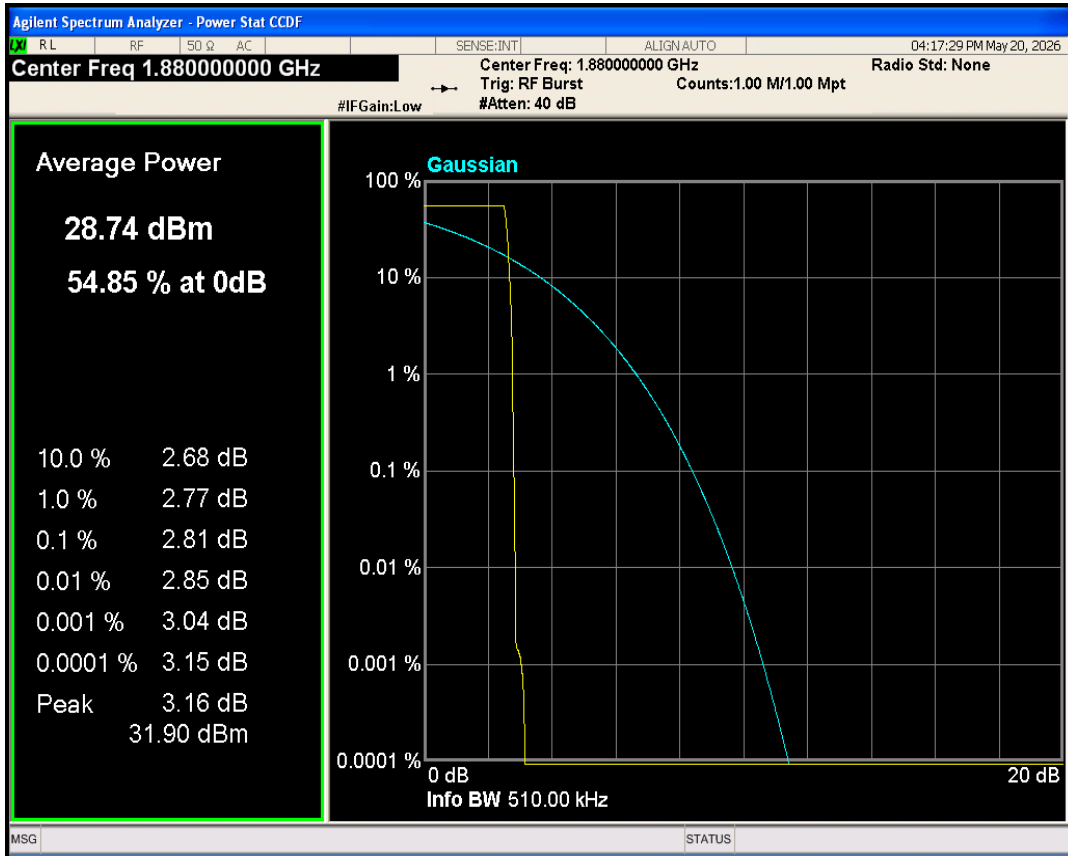


GPRS1900 Channel=512

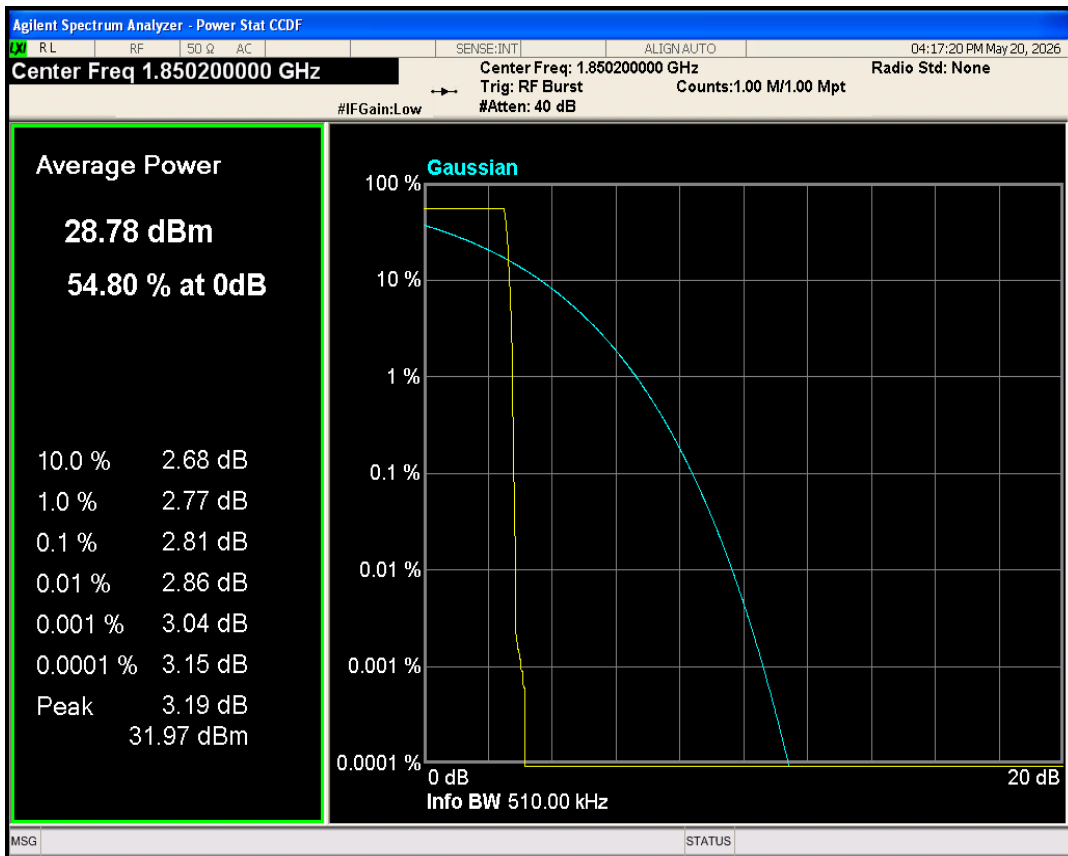


GPRS1900 Channel=810

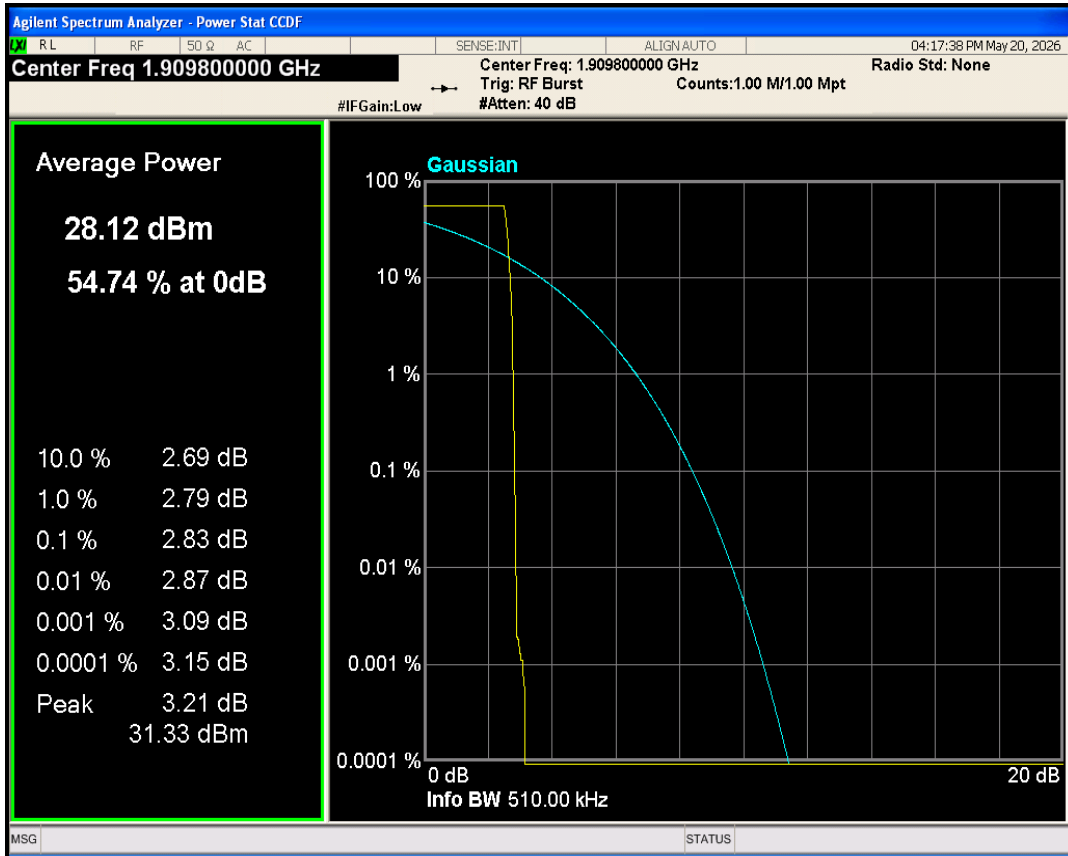


GPRS850 Channel=189

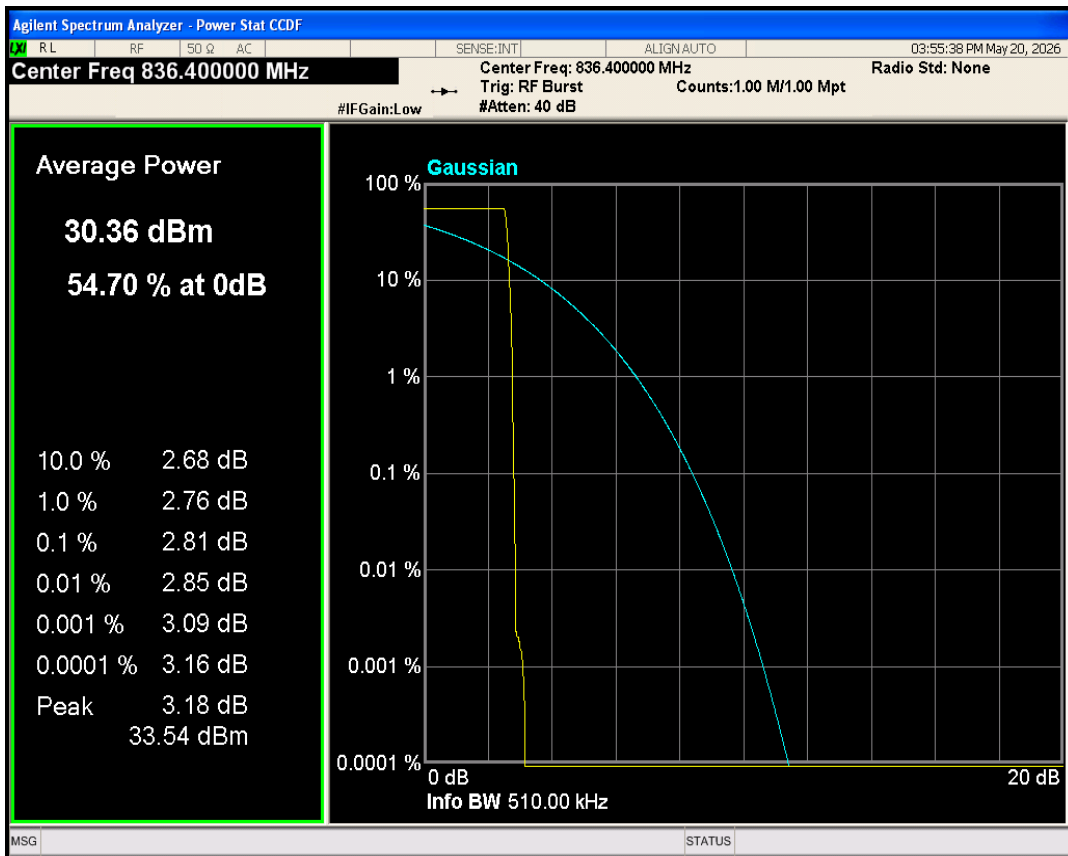

GPRS850 Channel=128

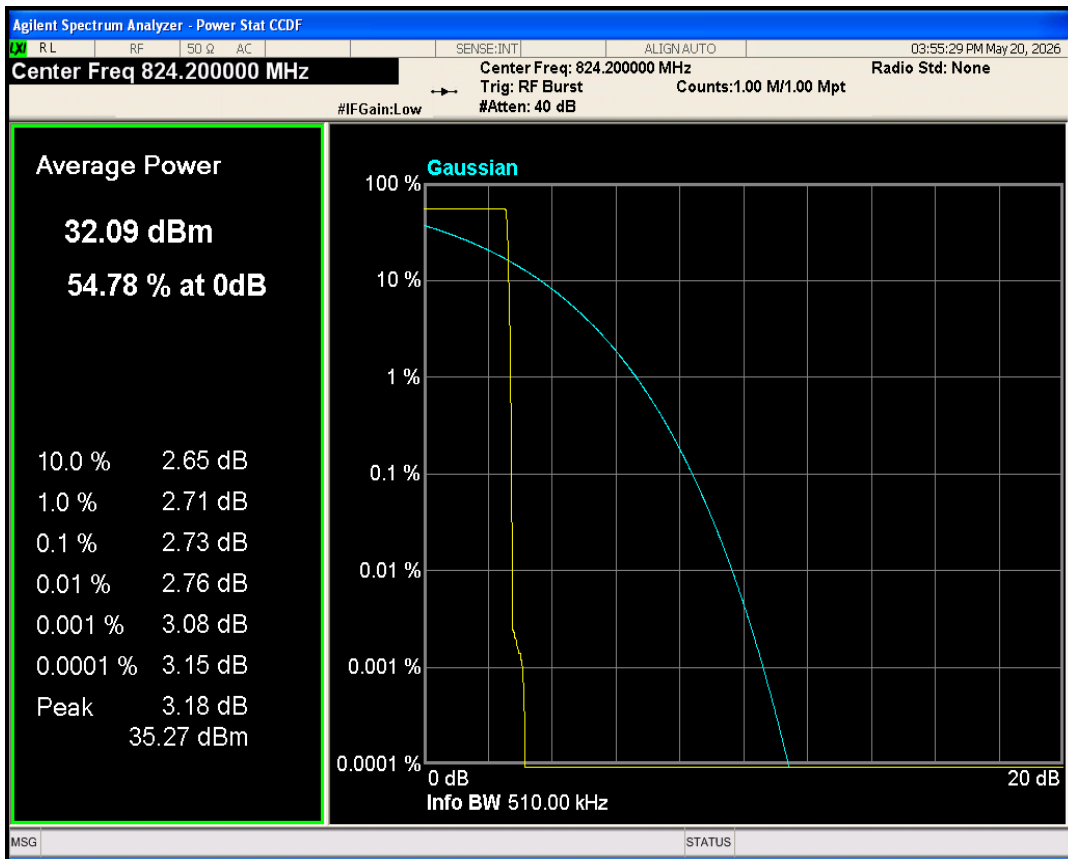


GPRS850 Channel=251

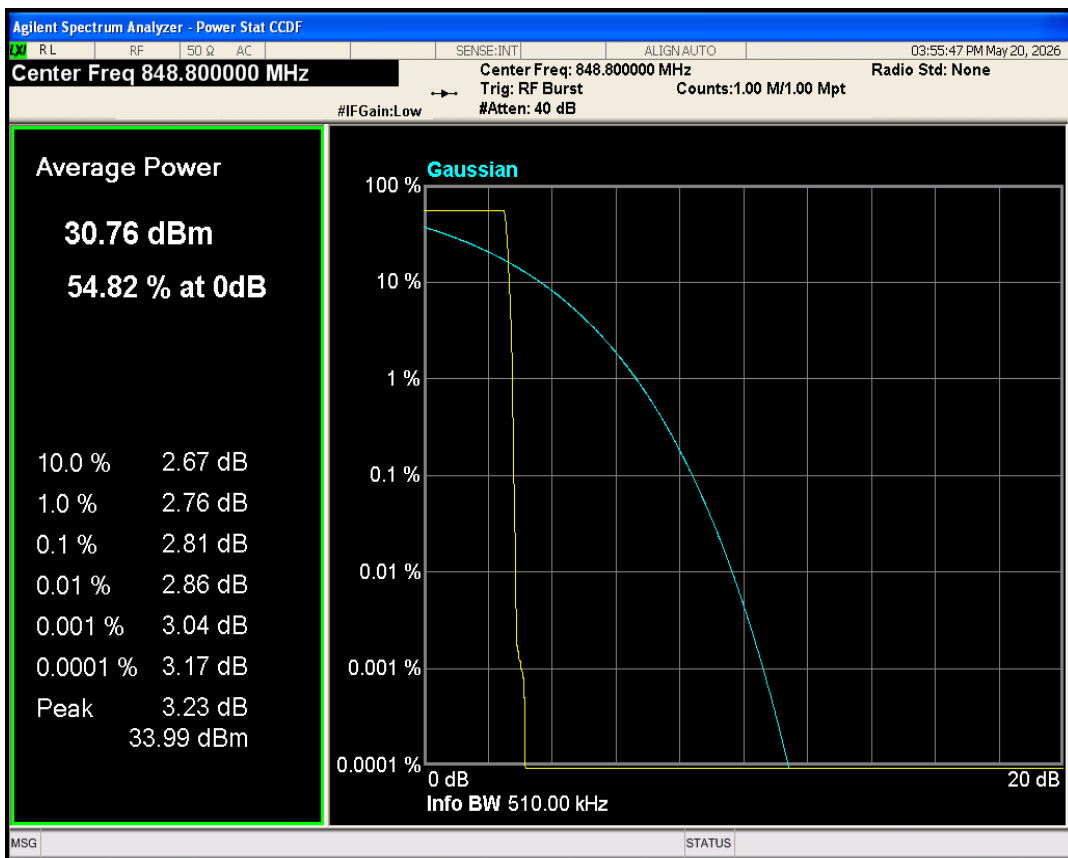


10 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	247.179	317.365	PASS
GPRS1900	661	1880	249.664	323.392	PASS
GPRS1900	810	1909.8	242.667	312.818	PASS
GPRS850	128	824.2	250.551	318.222	PASS
GPRS850	189	836.4	244.563	325.116	PASS
GPRS850	251	848.8	246.103	321.320	PASS


GPRS1900 Channel=512

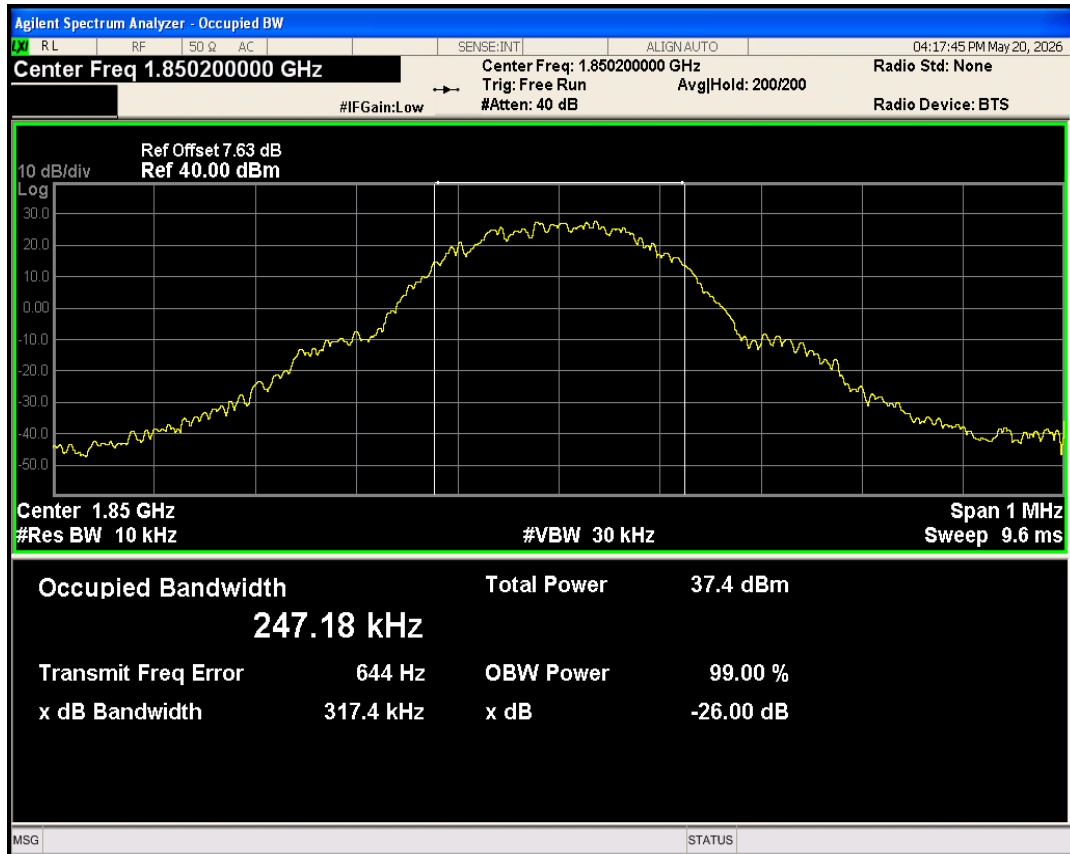


GPRS1900 Channel=661

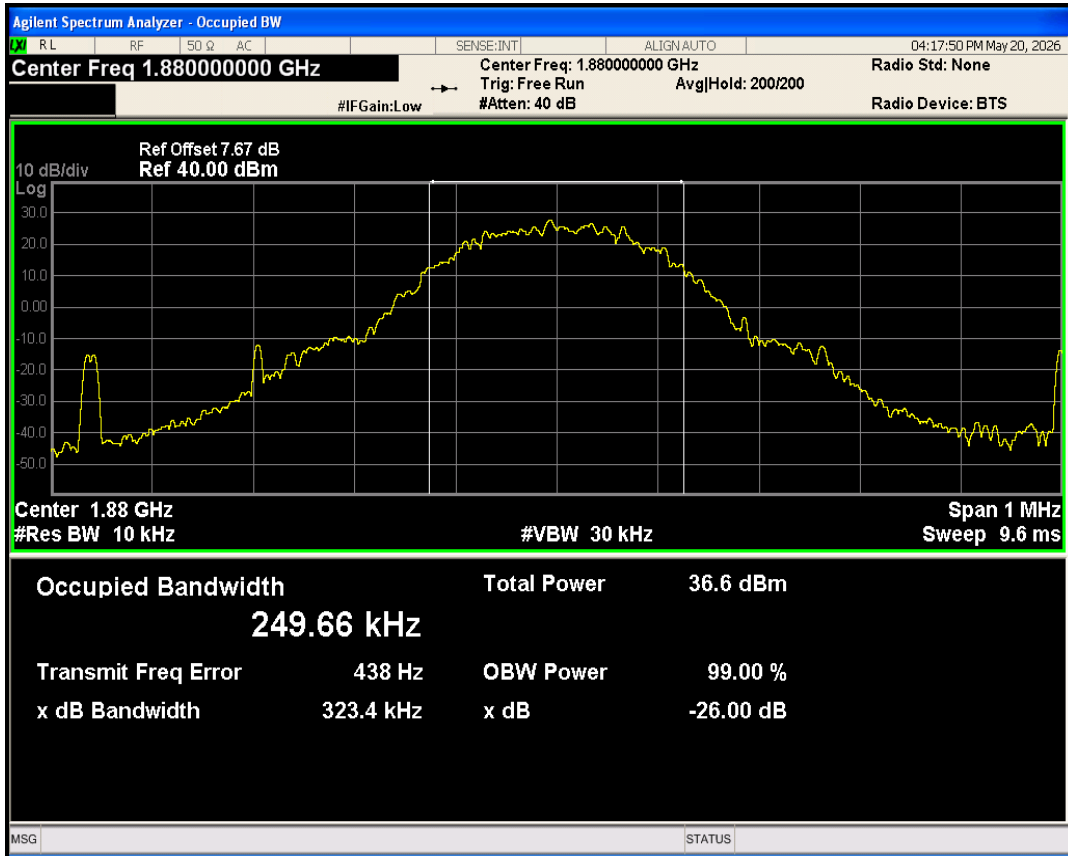


GPRS1900 Channel=810

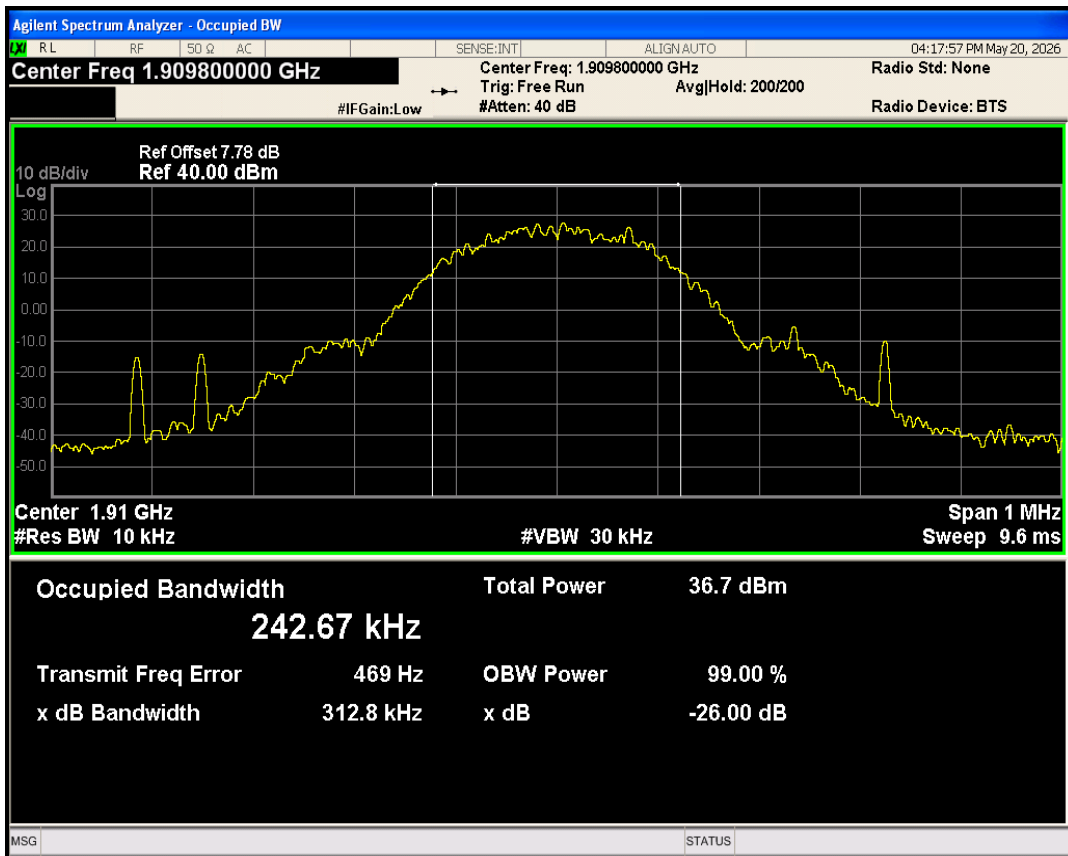


GPRS850 Channel=128

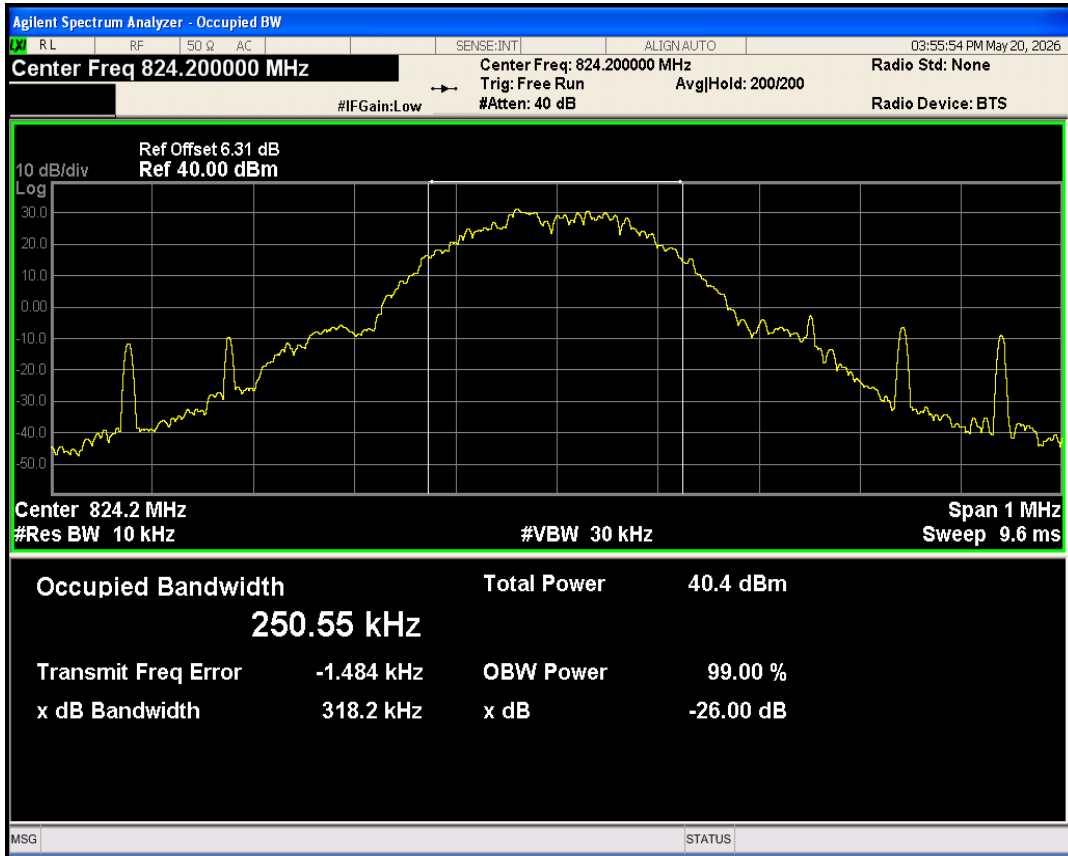

GPRS850 Channel=189

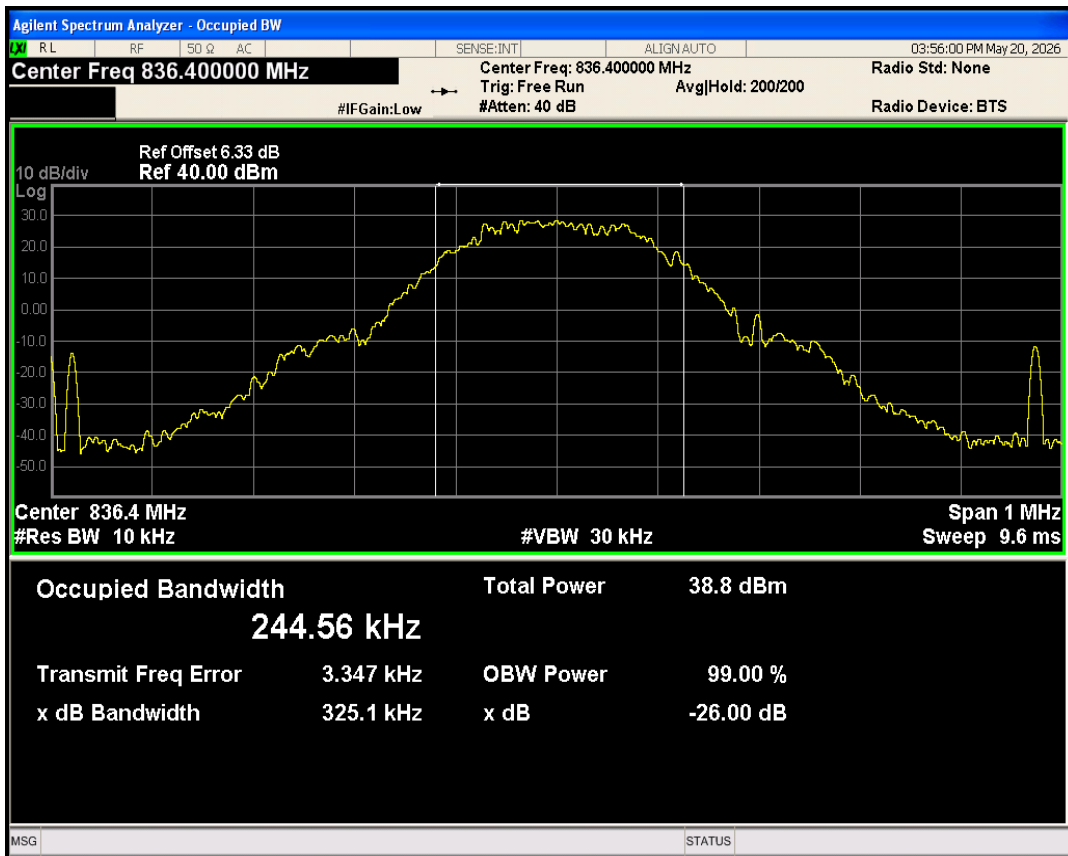


GPRS850 Channel=251

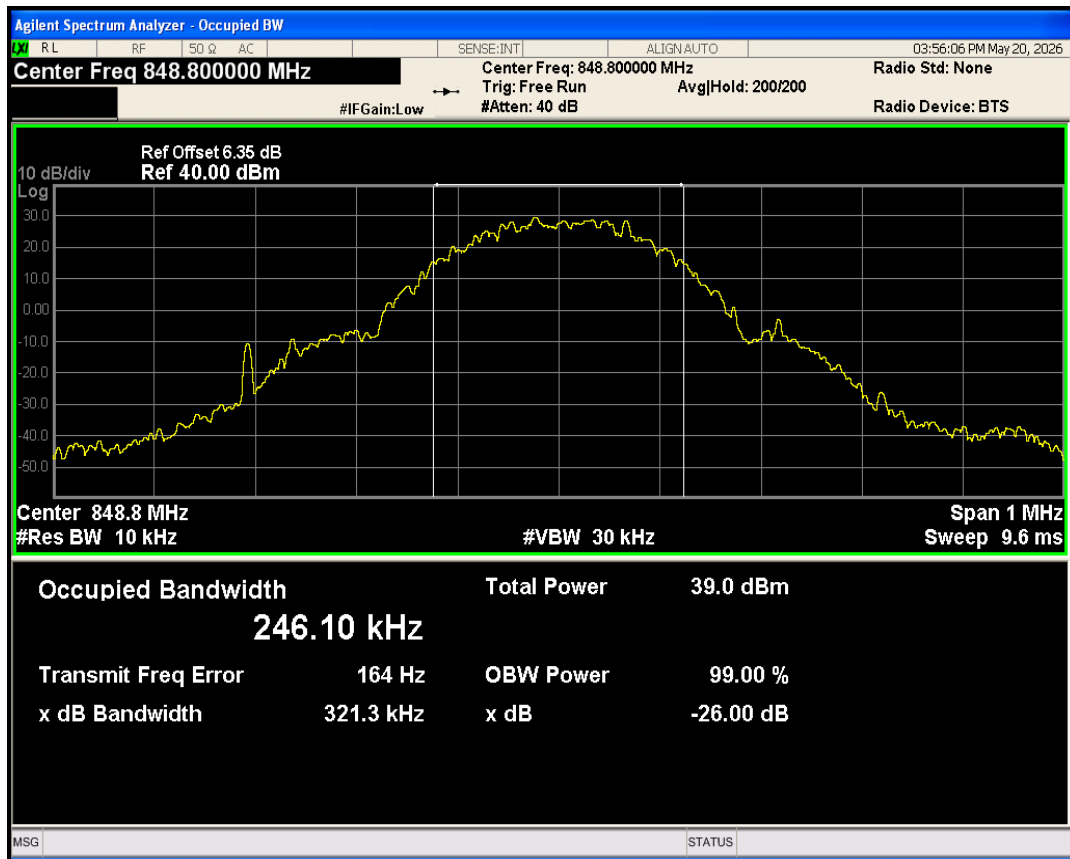


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-29.45	-13	PASS
GPRS1900	810	1909.8	1910.02	-29.04	-13	PASS
GPRS850	128	824.2	823.99	-24.57	-13	PASS
GPRS850	251	848.8	849.02	-26.40	-13	PASS


GPRS1900 Channel=512

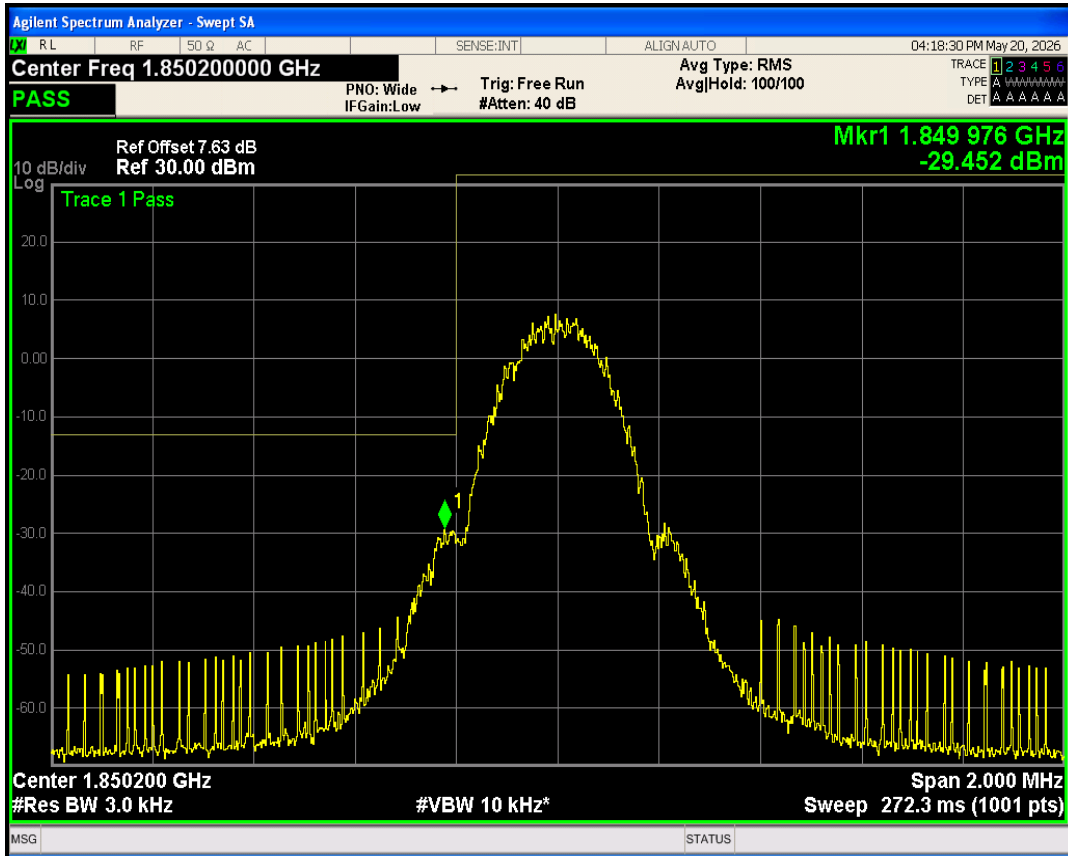


GPRS1900 Channel=810

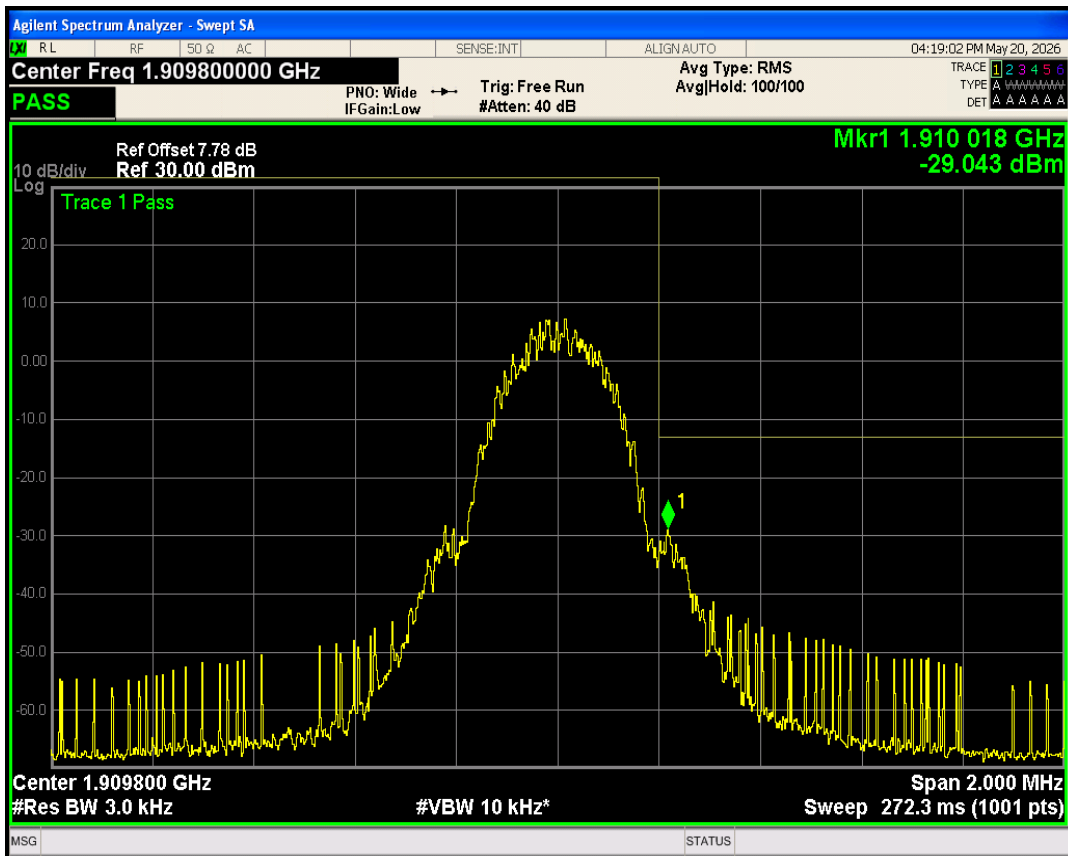

GPRS850 Channel=128

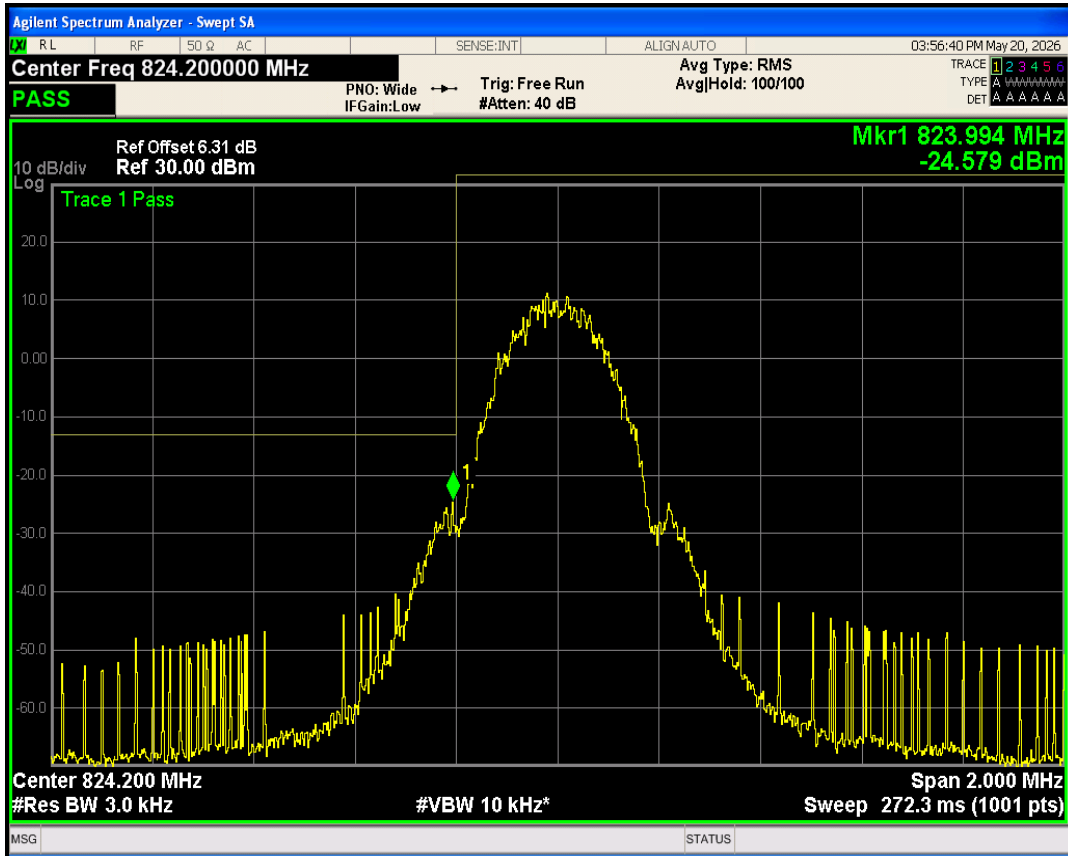


GPRS850 Channel=251

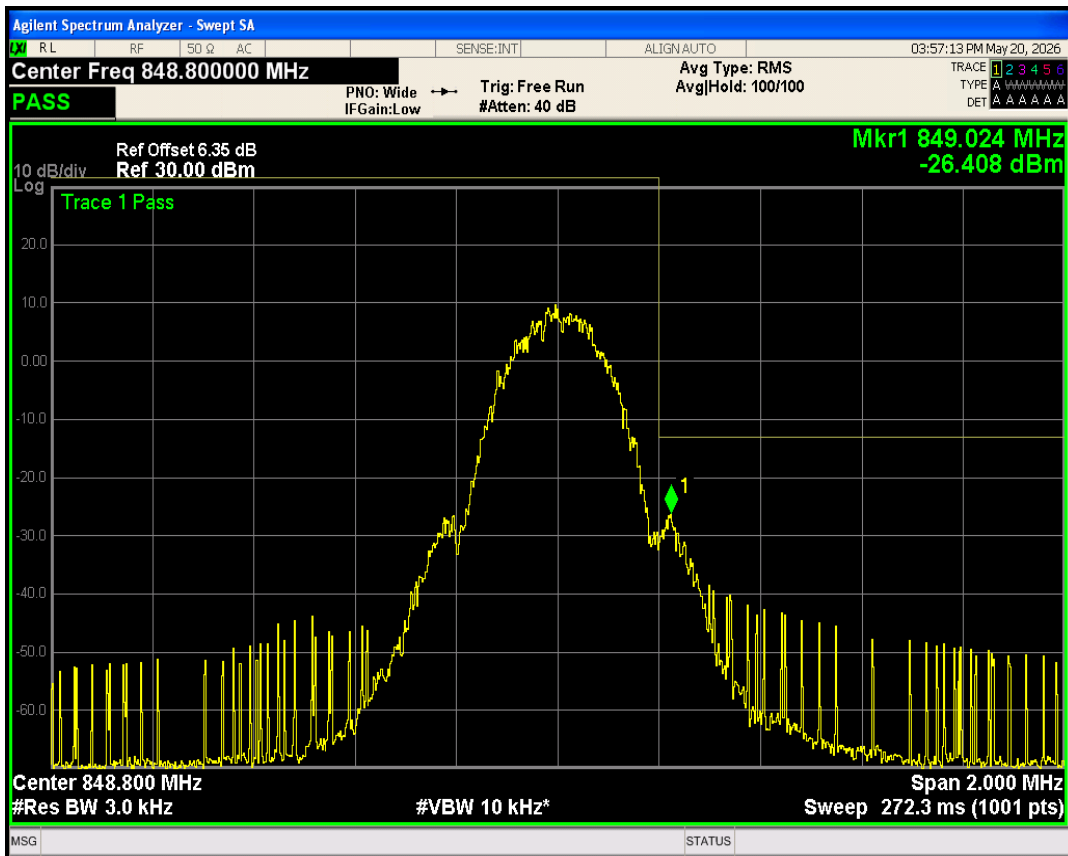


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25782.00	-19.49	-13	PASS
GPRS1900	661	1880	24882.02	-18.91	-13	PASS
GPRS1900	810	1909.8	25057.39	-19.46	-13	PASS
GPRS850	128	824.2	25194.37	-20.45	-13	PASS
GPRS850	189	836.4	24947.53	-21.05	-13	PASS
GPRS850	251	848.8	25647.00	-19.89	-13	PASS


GPRS1900 Channel=512

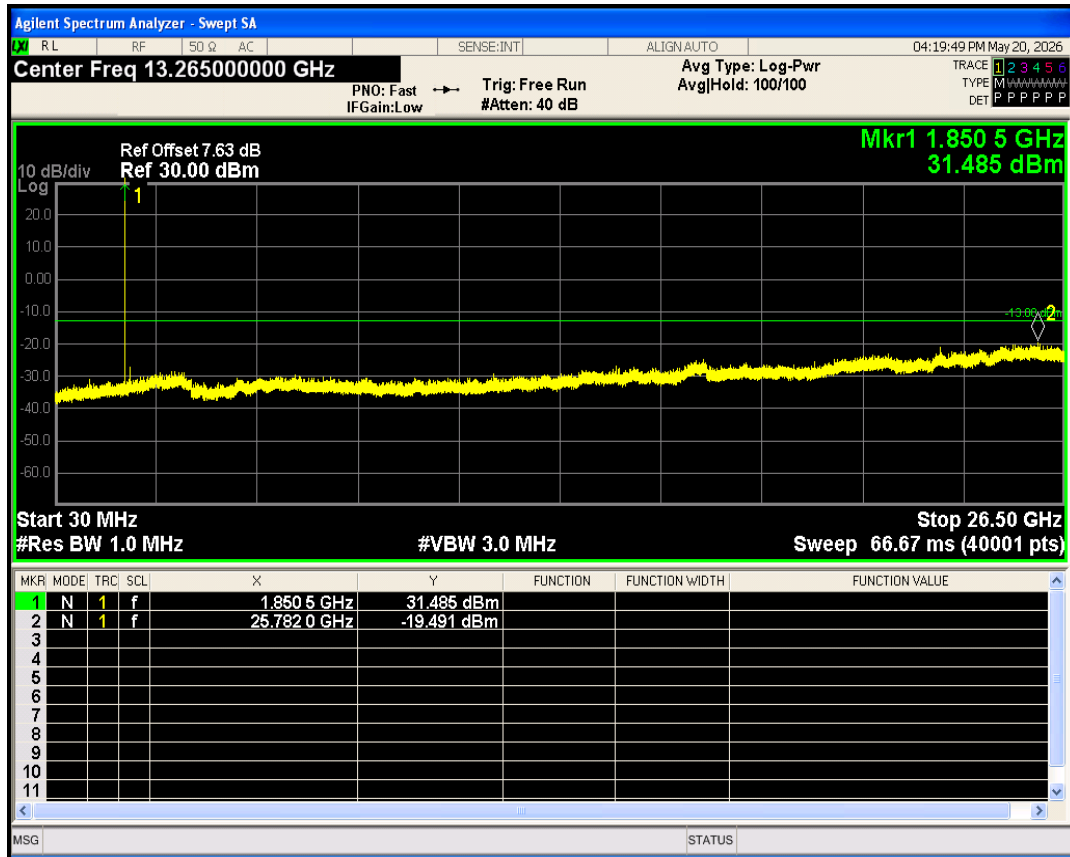


GPRS1900 Channel=661

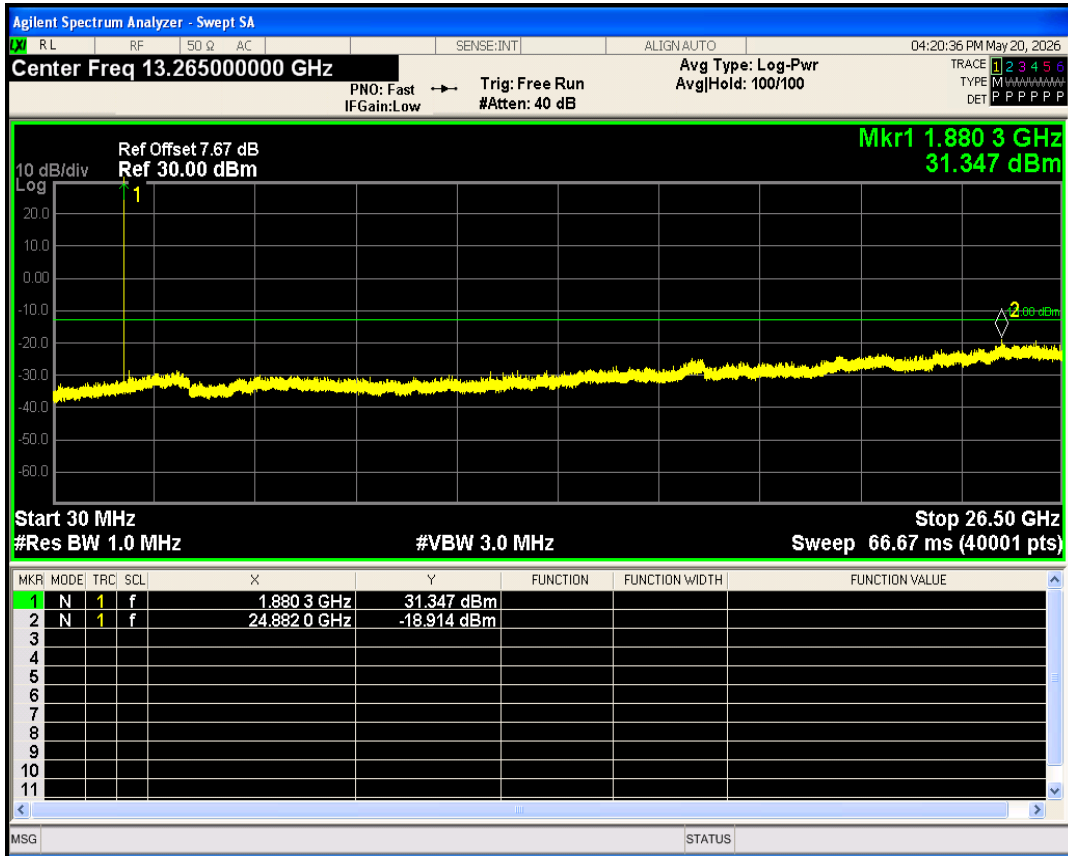


GPRS1900 Channel=810

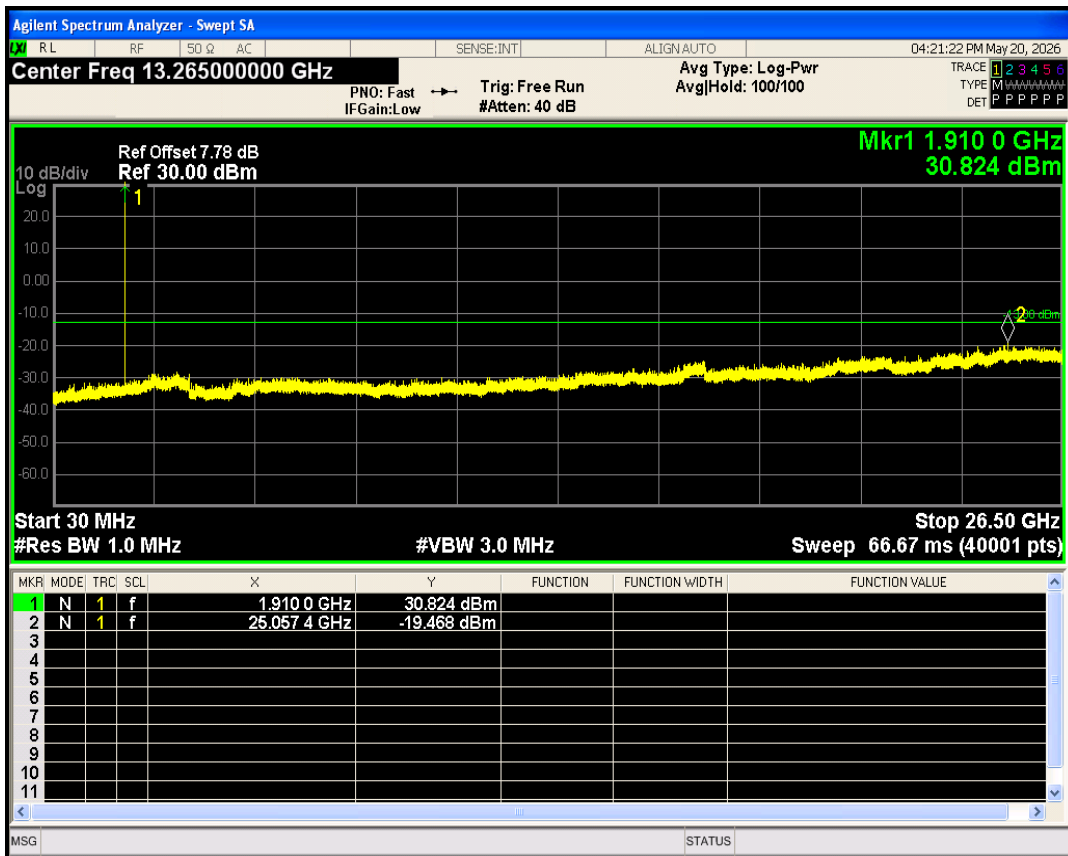


GPRS850 Channel=128

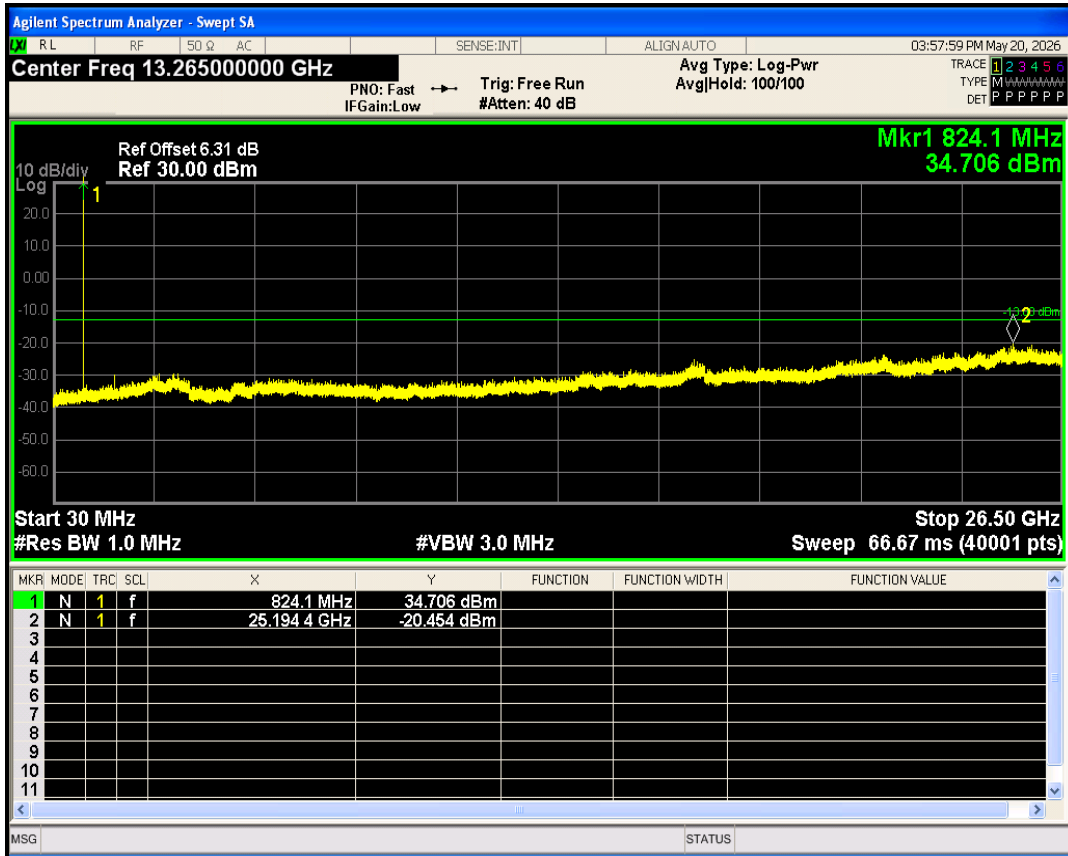

GPRS850 Channel=251

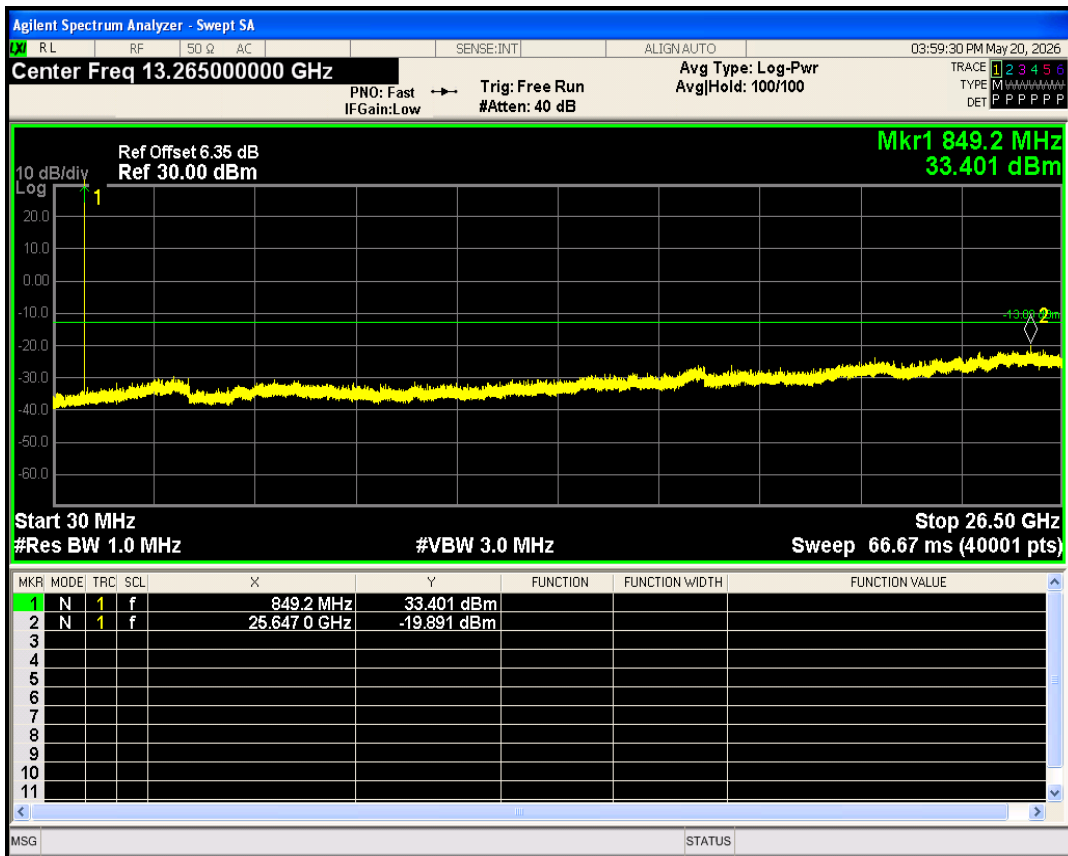


GPRS850 Channel=189

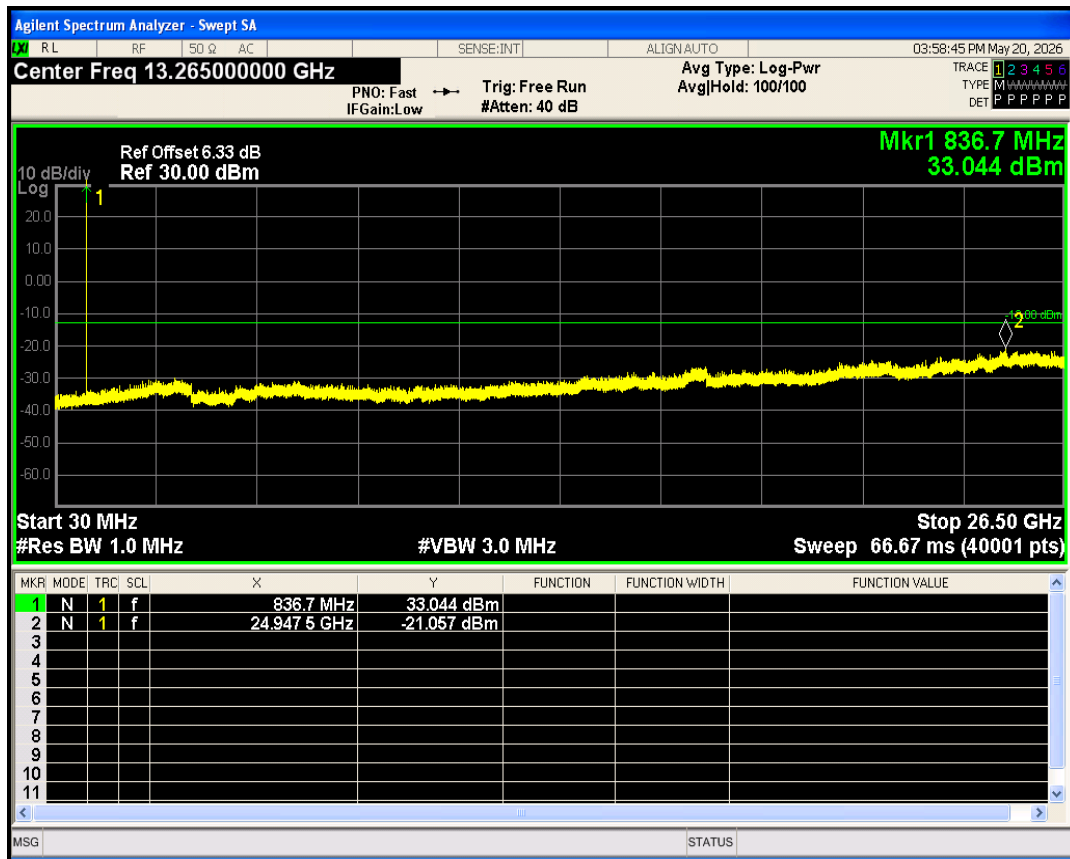


03 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.76	13	PASS
GSM1900	661	1880	2.76	13	PASS
GSM1900	810	1909.8	2.78	13	PASS
GSM850	128	824.2	2.69	13	PASS
GSM850	189	836.4	2.75	13	PASS
GSM850	251	848.8	2.77	13	PASS


GSM1900 Channel=512

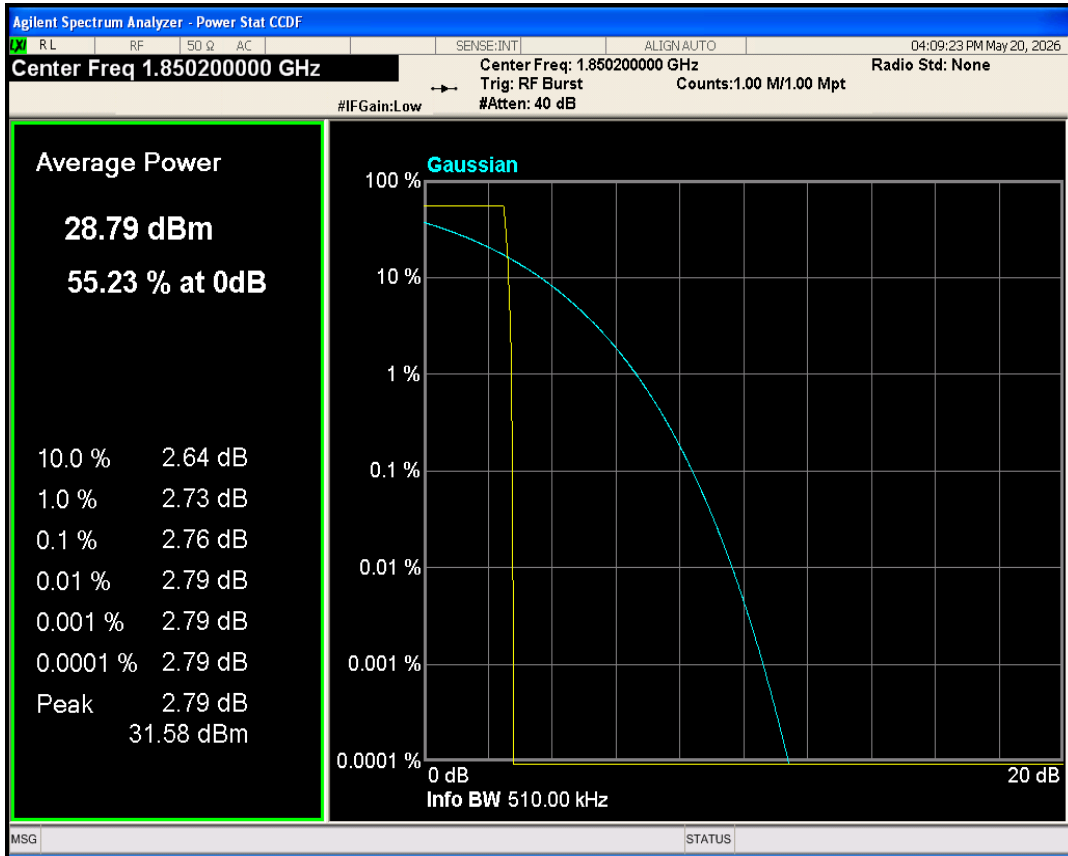


GSM1900 Channel=810

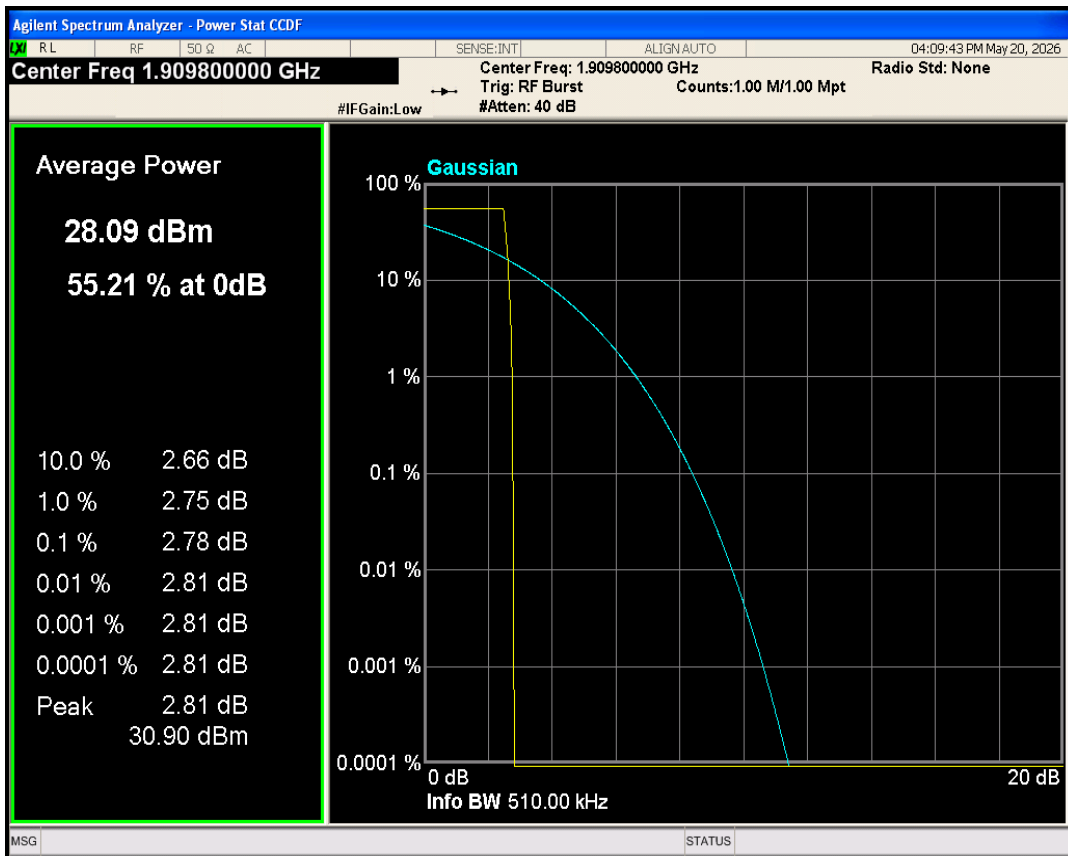


GSM1900 Channel=661

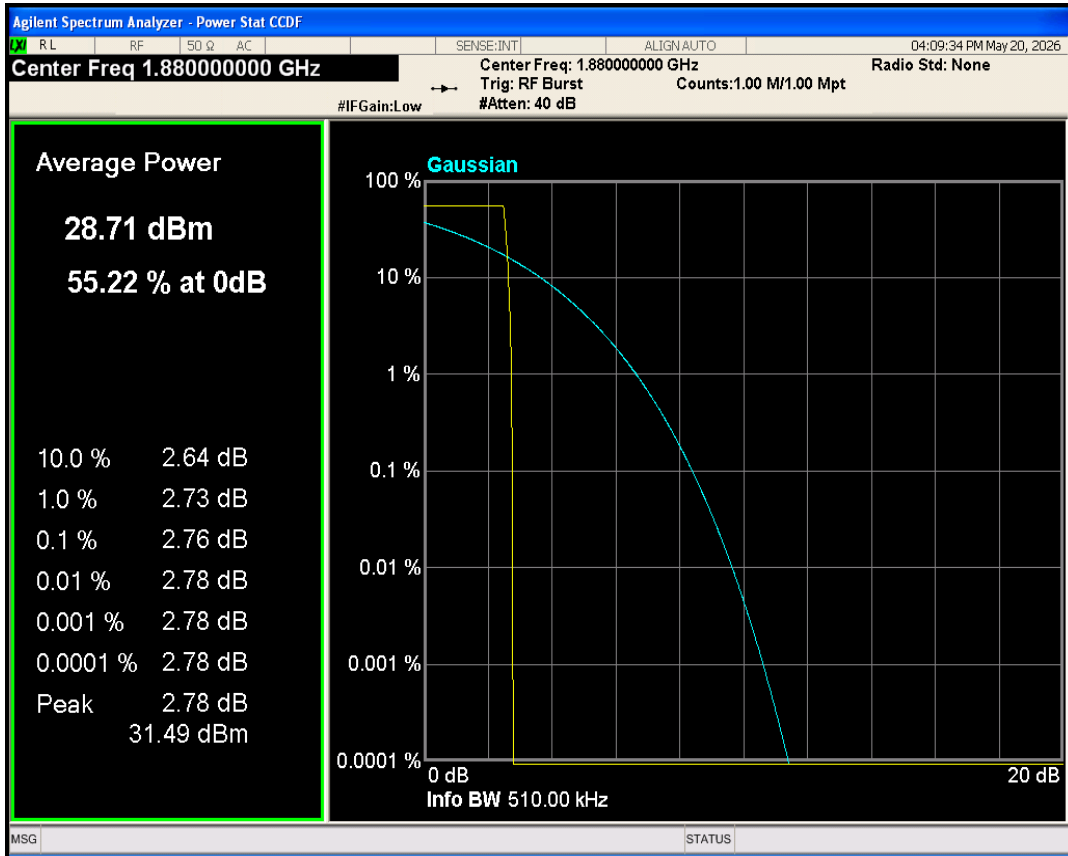


GSM850 Channel=189

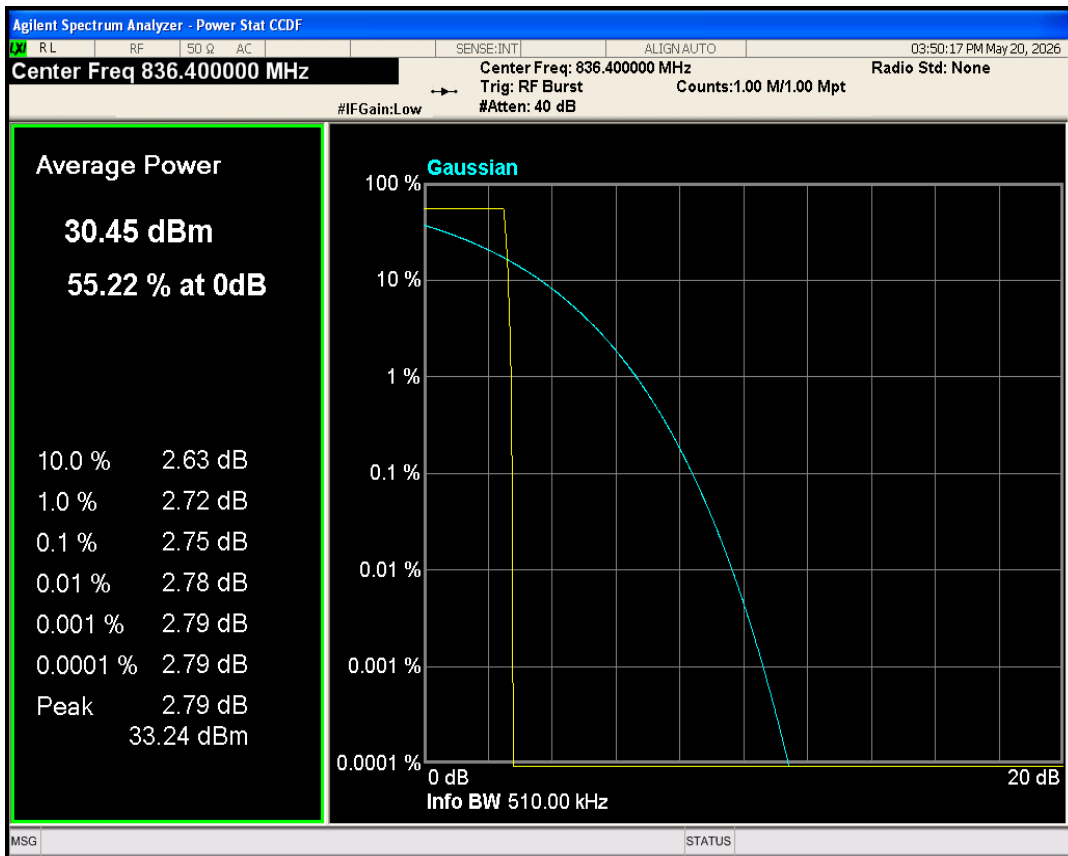

GSM850 Channel=128

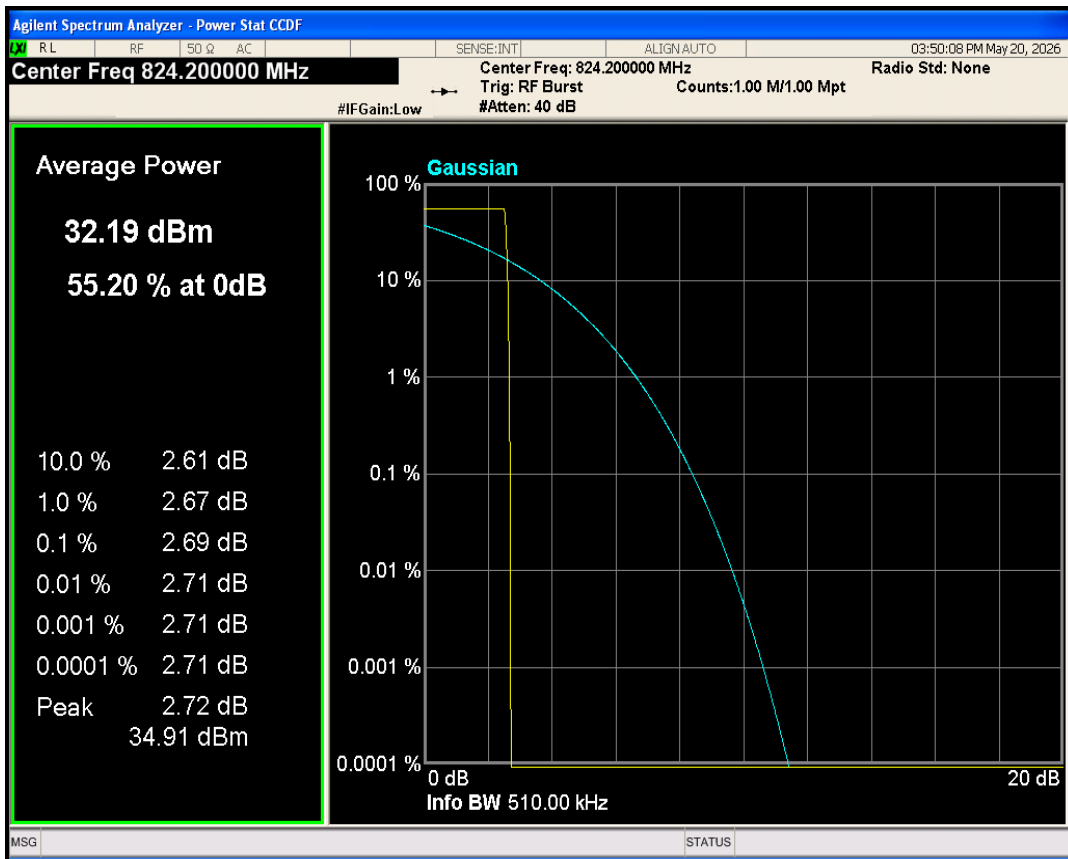


GSM850 Channel=251

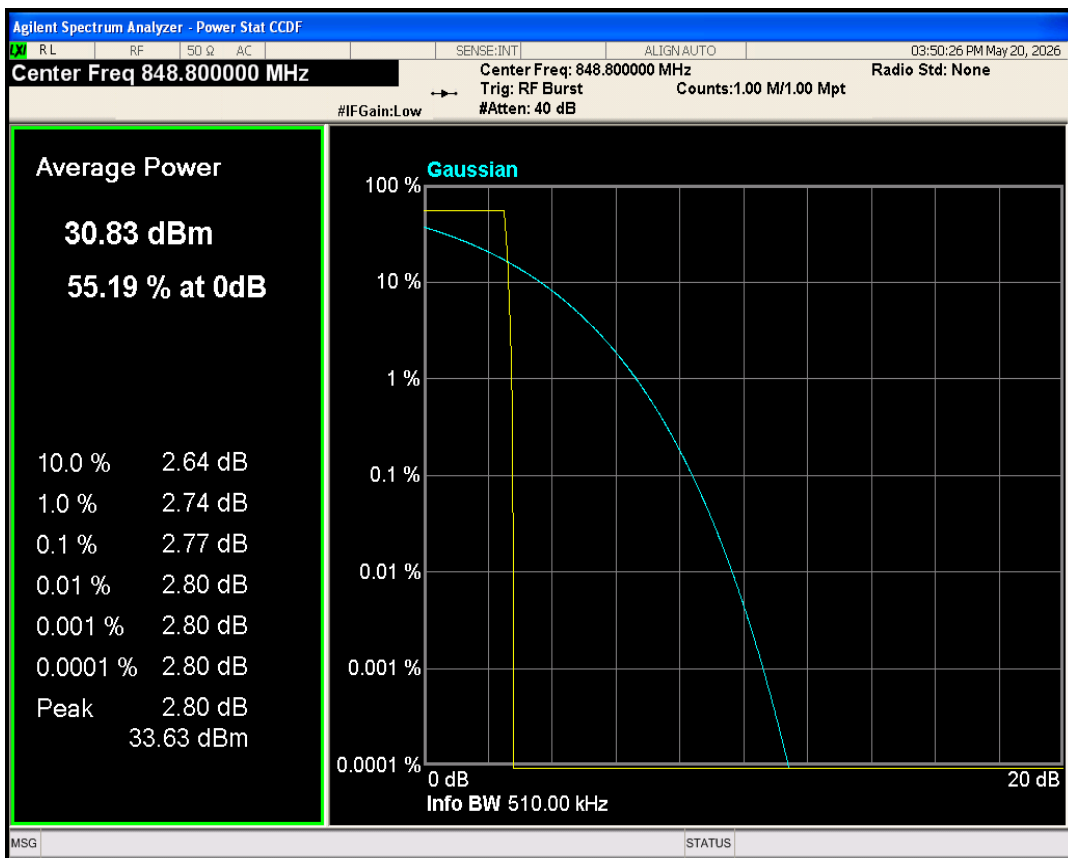


04 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	241.031	319.459	PASS
GSM1900	661	1880	248.120	317.303	PASS
GSM1900	810	1909.8	238.661	309.977	PASS
GSM850	128	824.2	248.712	322.168	PASS
GSM850	189	836.4	241.019	318.509	PASS
GSM850	251	848.8	249.505	314.920	PASS


GSM1900 Channel=661

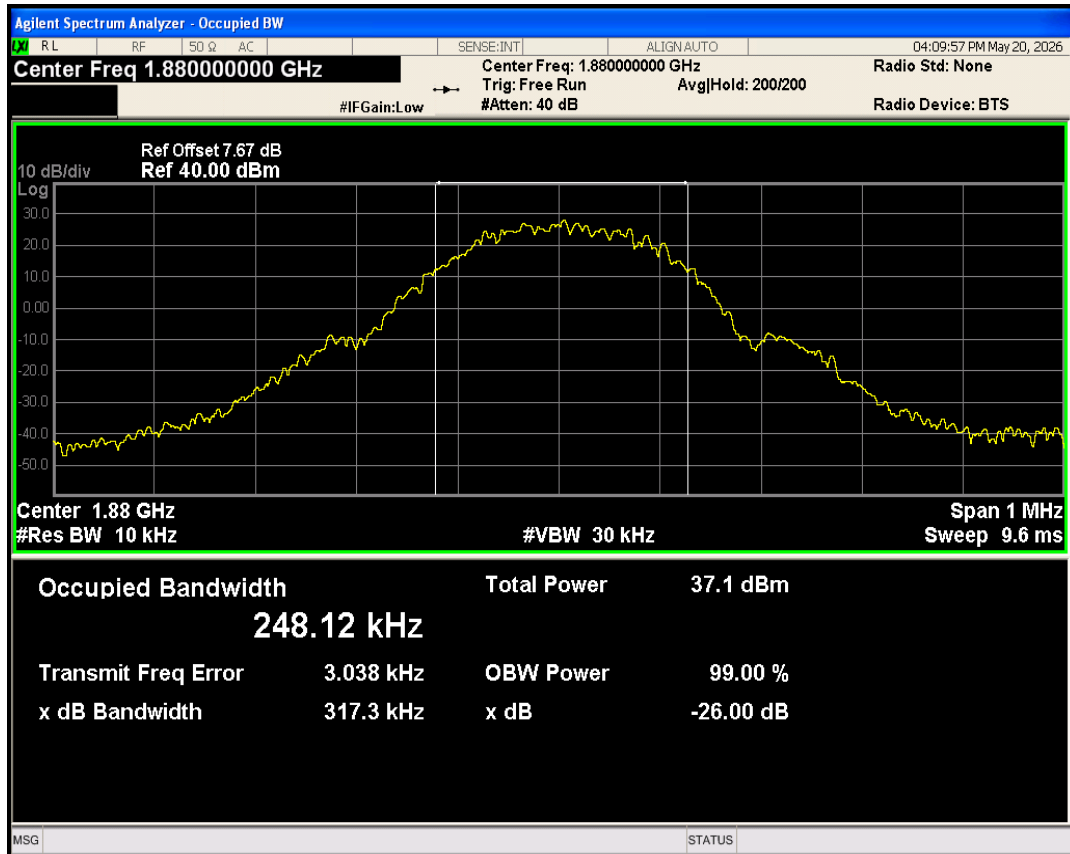


GSM1900 Channel=512

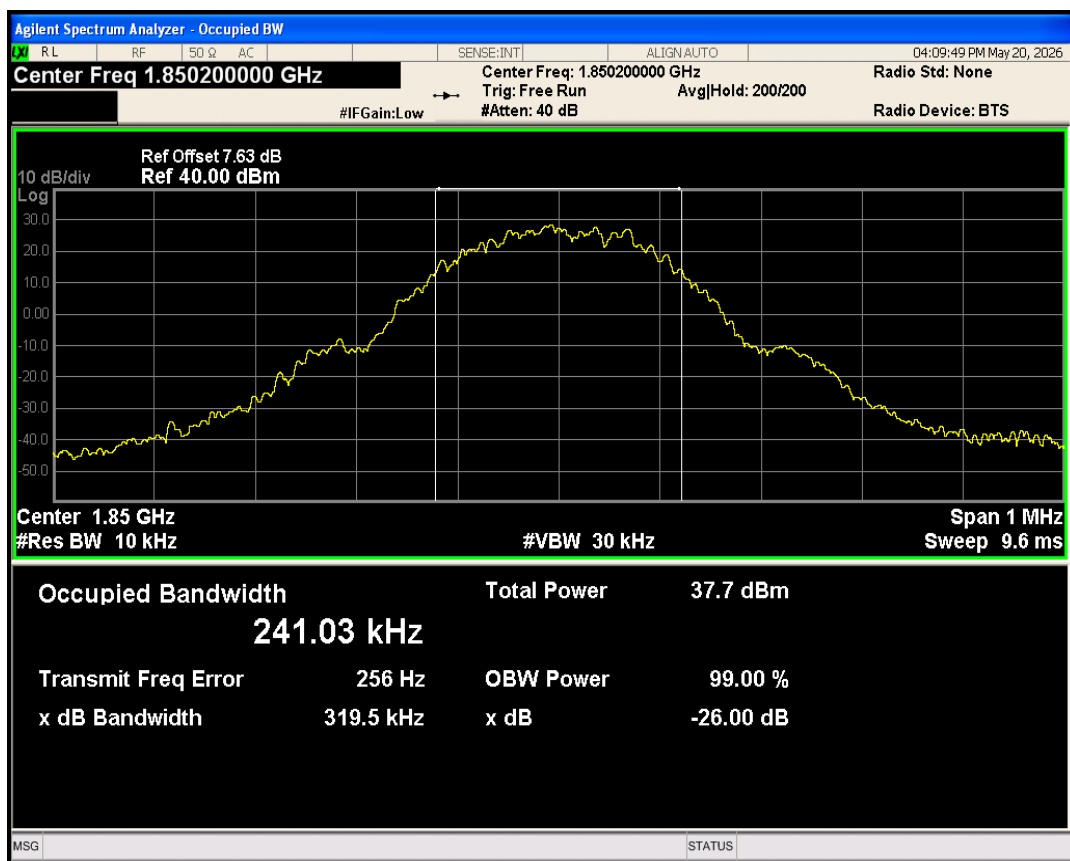


GSM1900 Channel=810

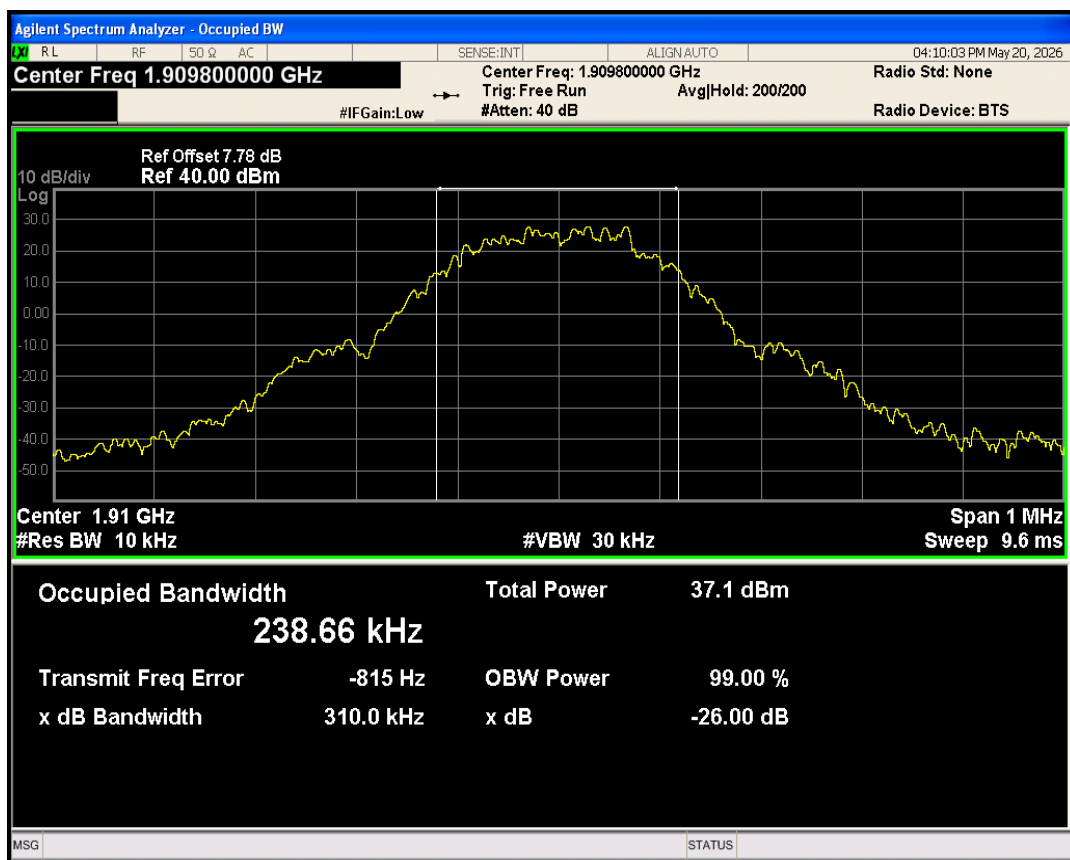


GSM850 Channel=128

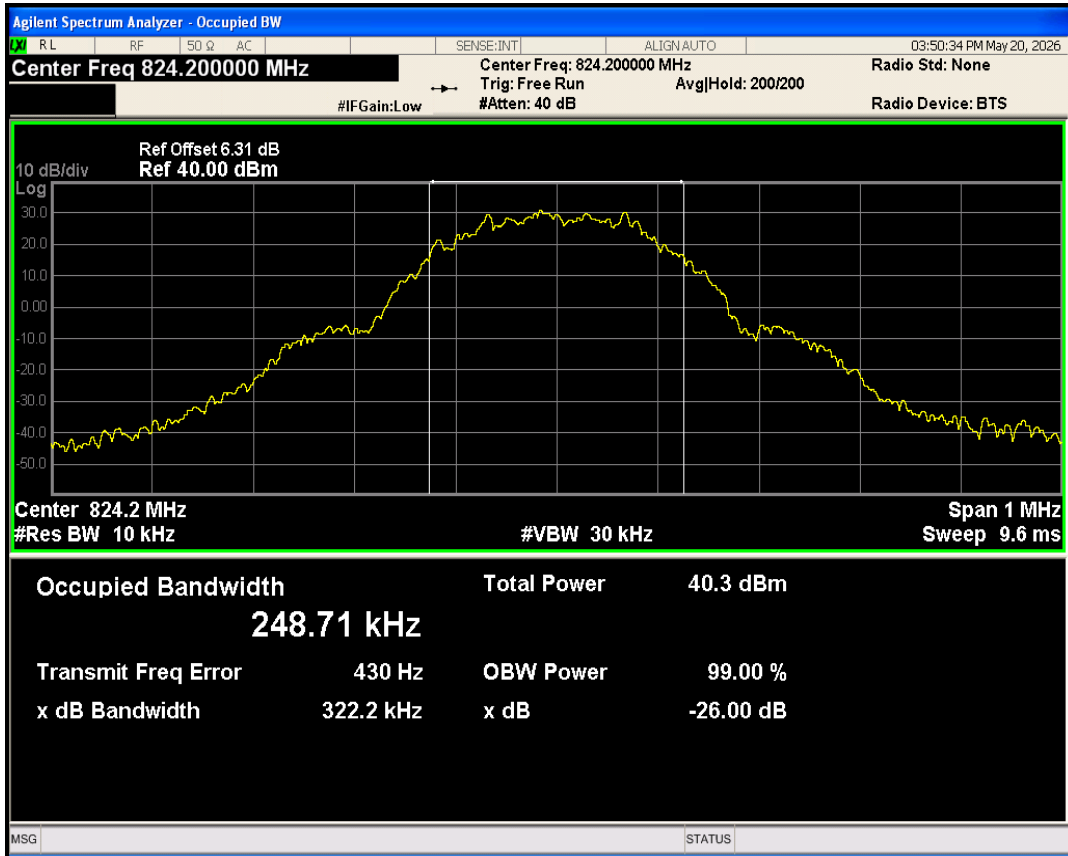

GSM850 Channel=189

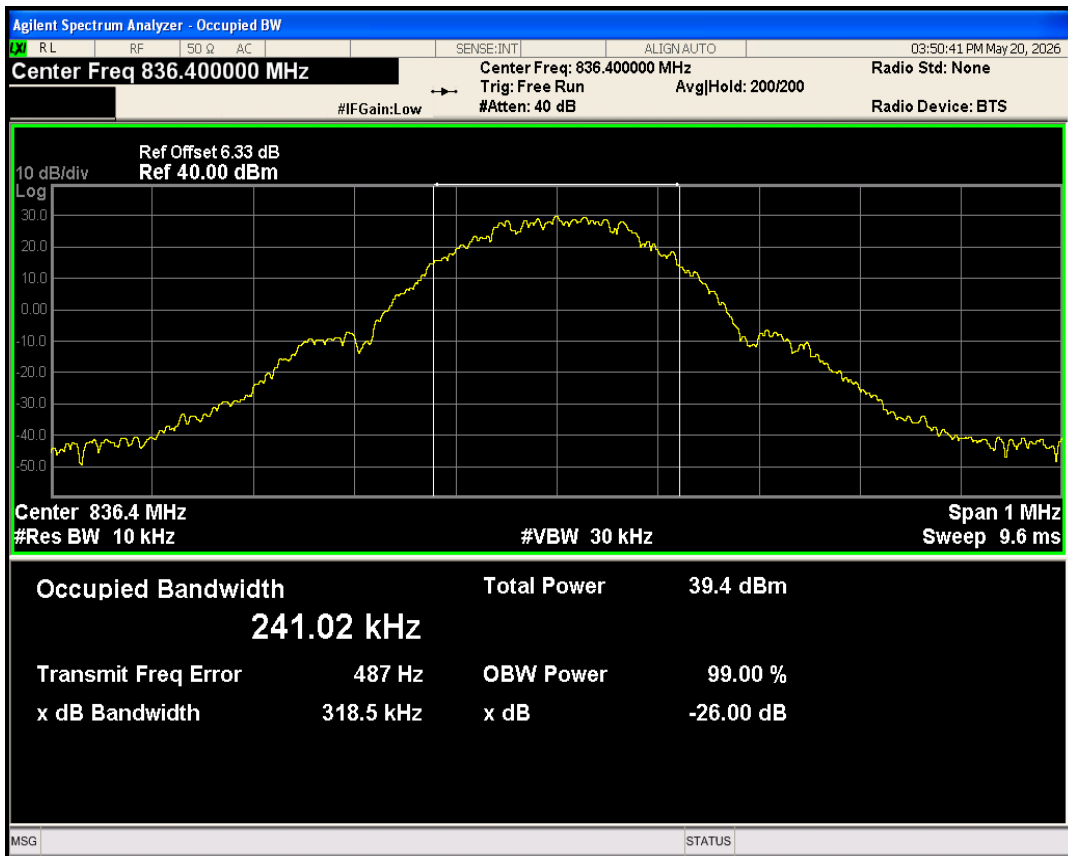


GSM850 Channel=251

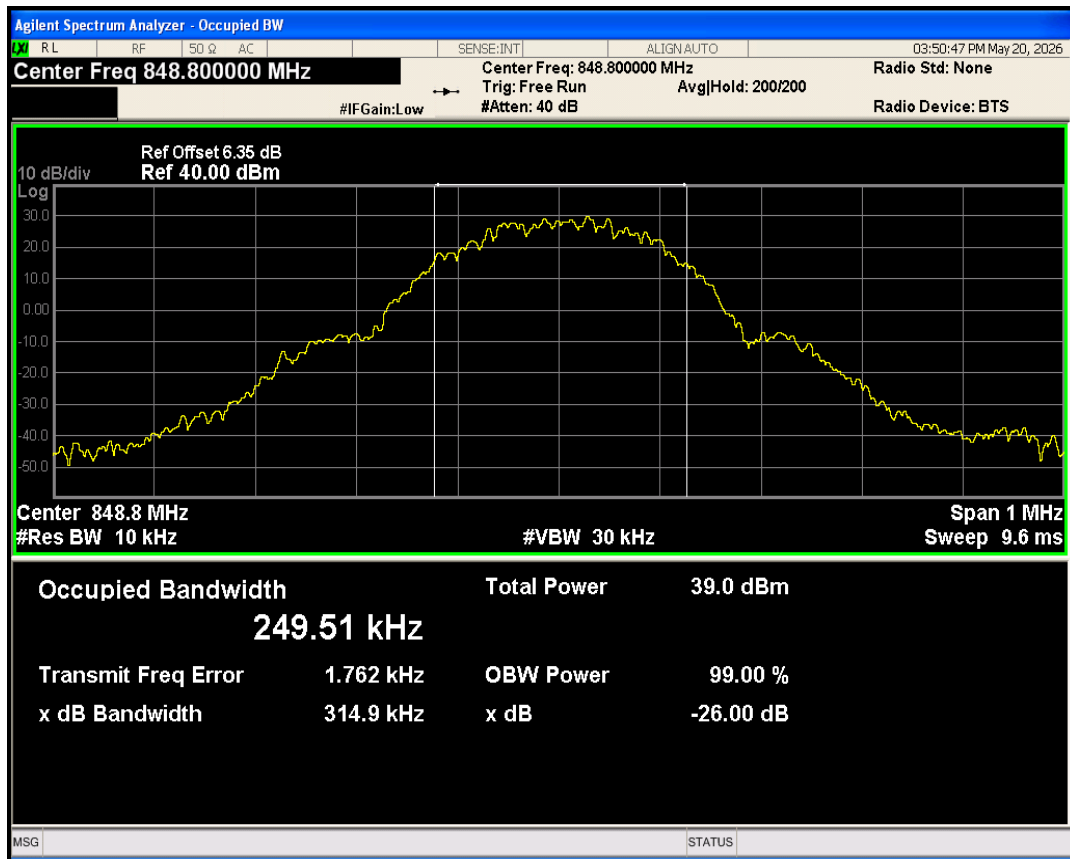


05 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.99	-28.29	-13	PASS
GSM1900	810	1909.8	1910.02	-28.79	-13	PASS
GSM850	128	824.2	823.99	-24.62	-13	PASS
GSM850	251	848.8	849.02	-24.12	-13	PASS


GSM1900 Channel=512

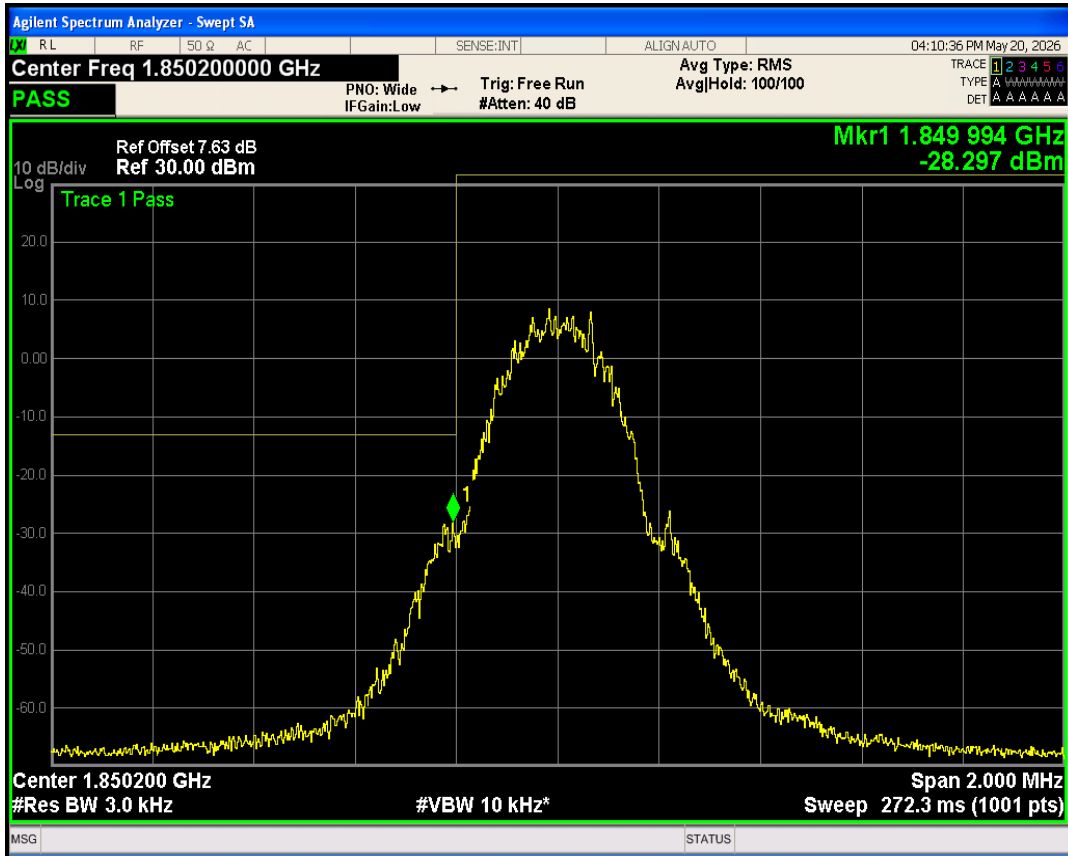


GSM1900 Channel=810

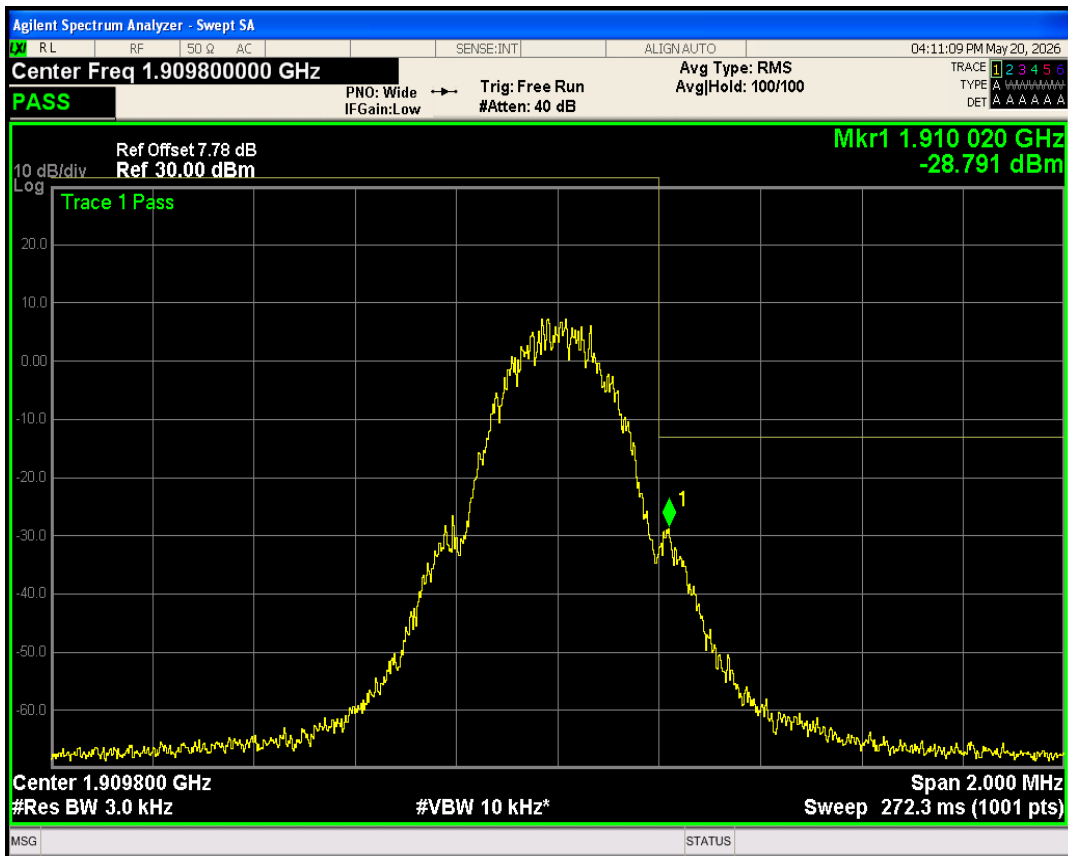

GSM850 Channel=251

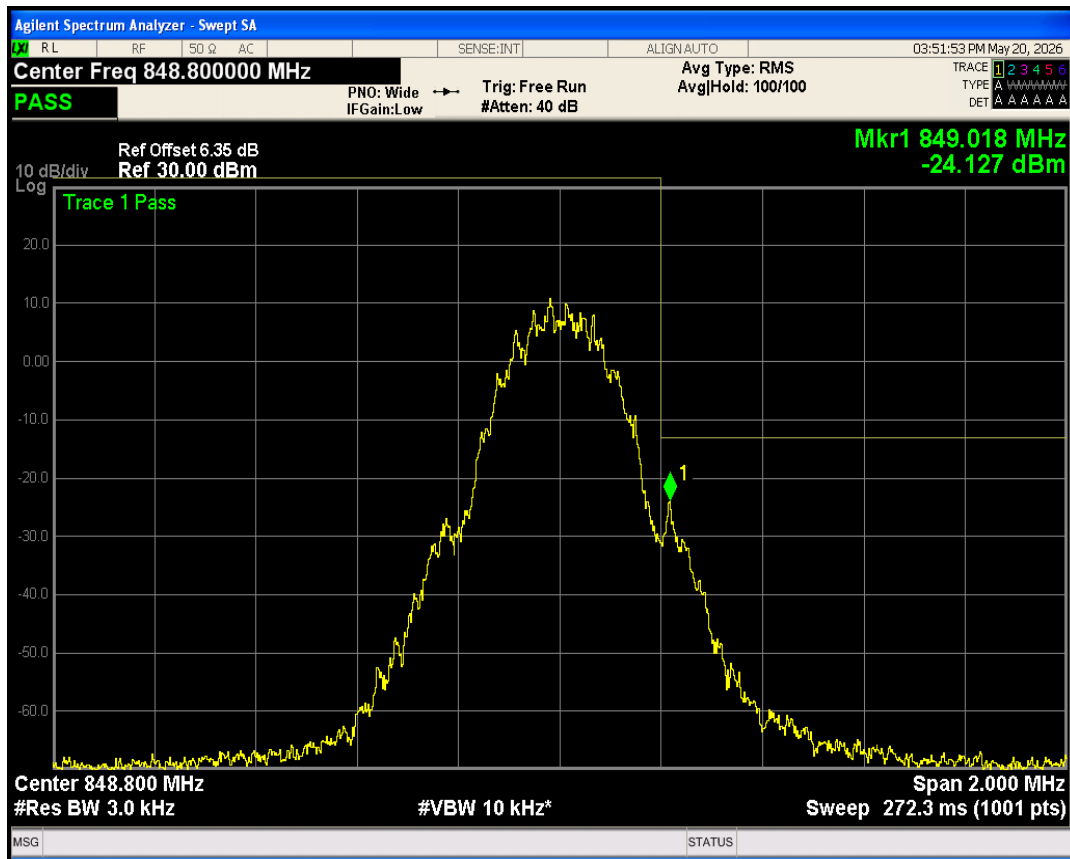


GSM850 Channel=128

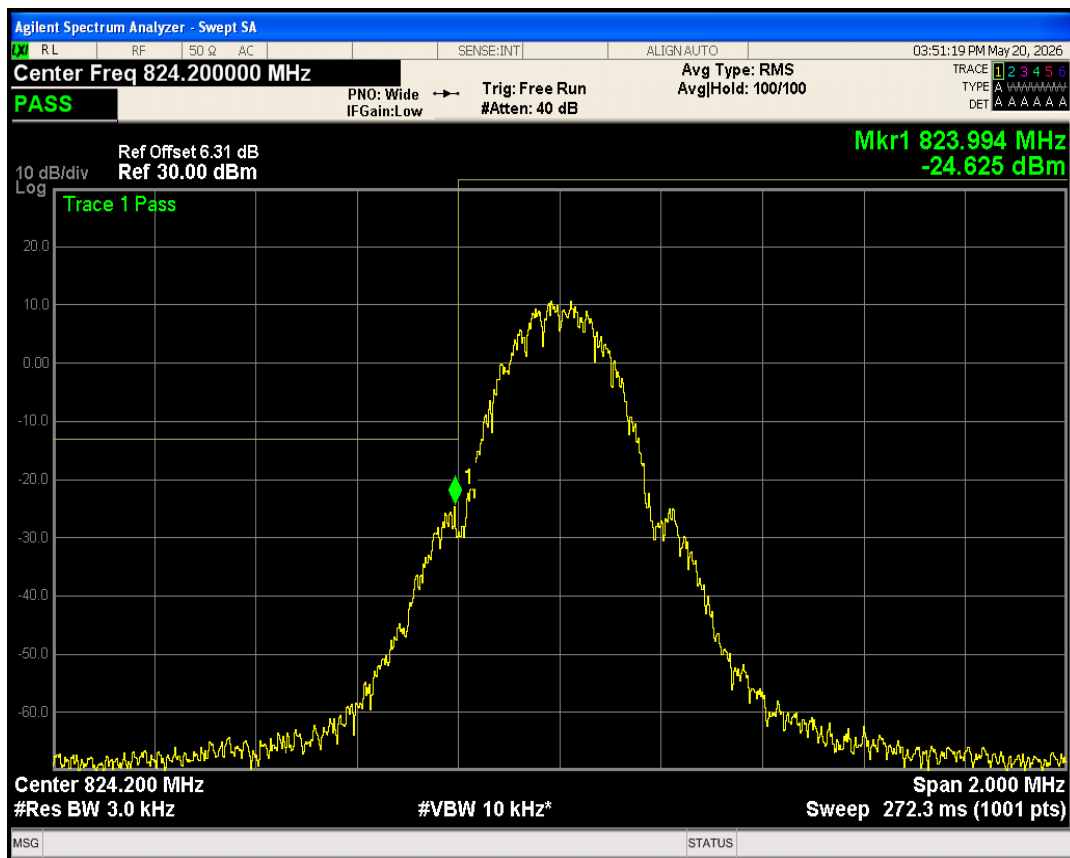


06 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	24907.83	-19.87	-13	PASS
GSM1900	661	1880	24787.39	-20.11	-13	PASS
GSM1900	810	1909.8	25103.05	-19.64	-13	PASS
GSM850	128	824.2	25736.34	-21.43	-13	PASS
GSM850	189	836.4	24962.09	-21.01	-13	PASS
GSM850	251	848.8	25339.95	-21.24	-13	PASS


GSM1900 Channel=512

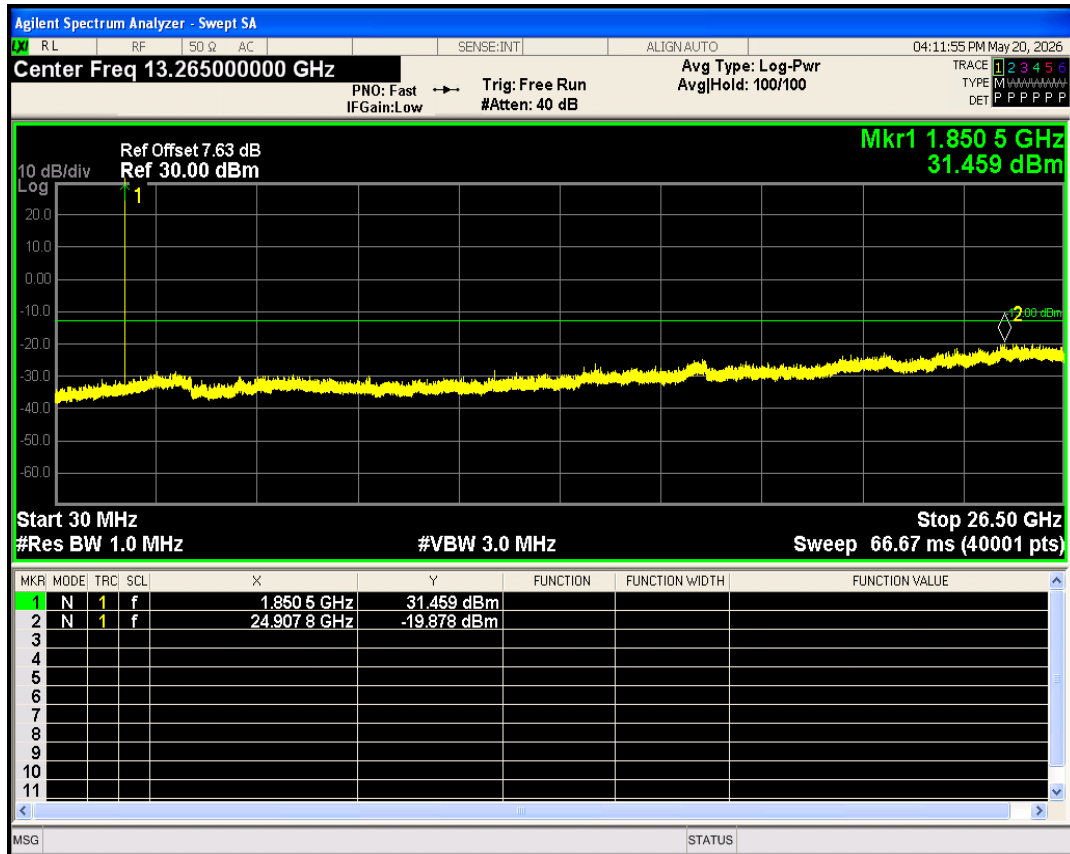


GSM1900 Channel=810

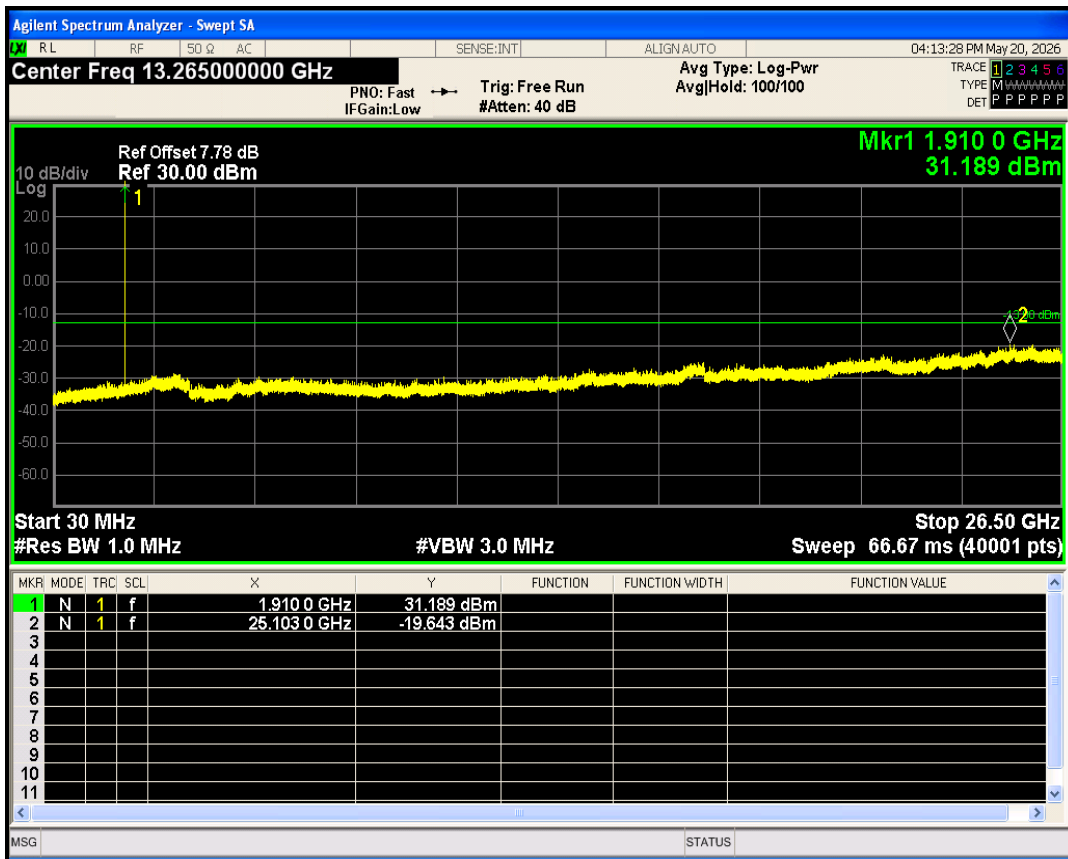


GSM1900 Channel=661

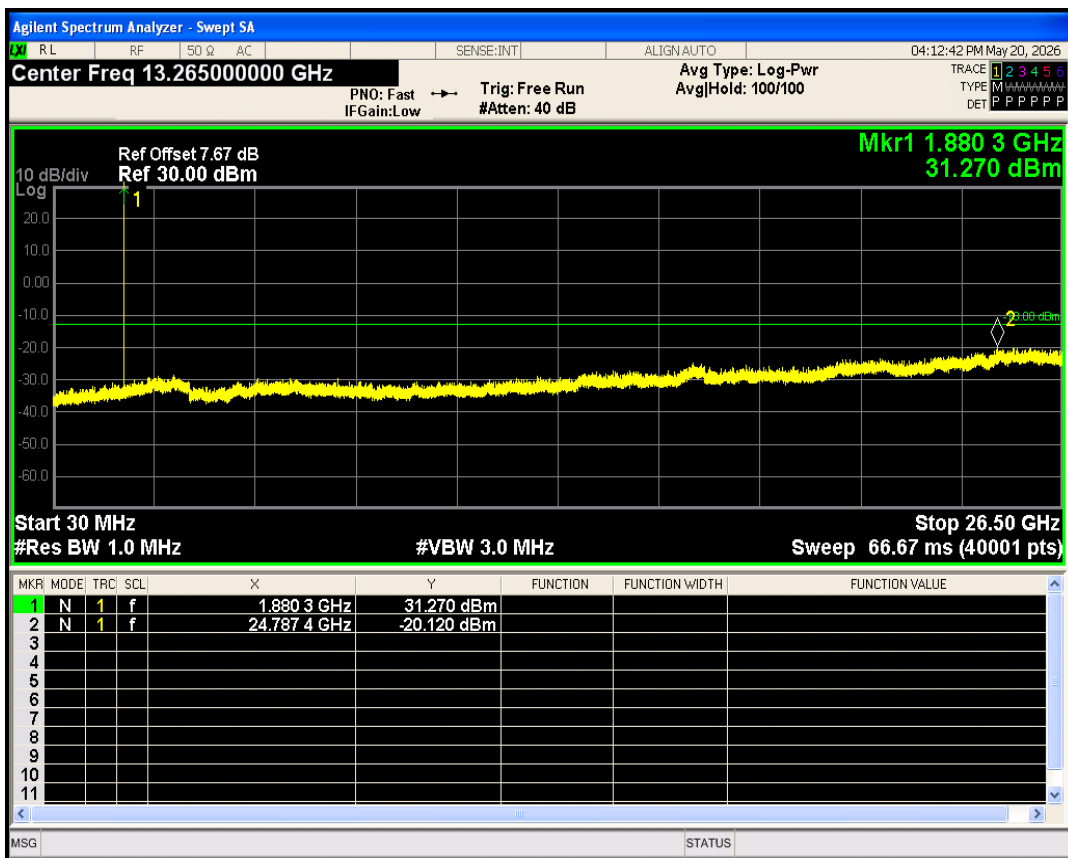

GSM850 Channel=189

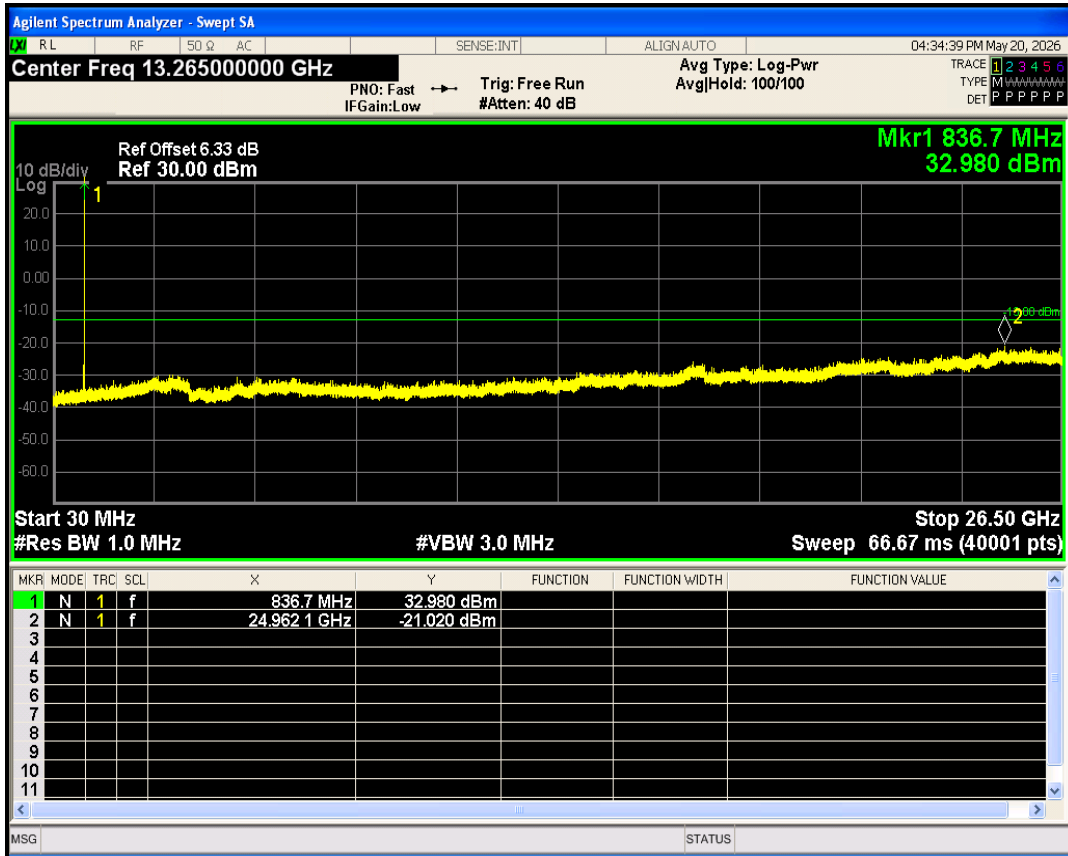

GSM850 Channel=128

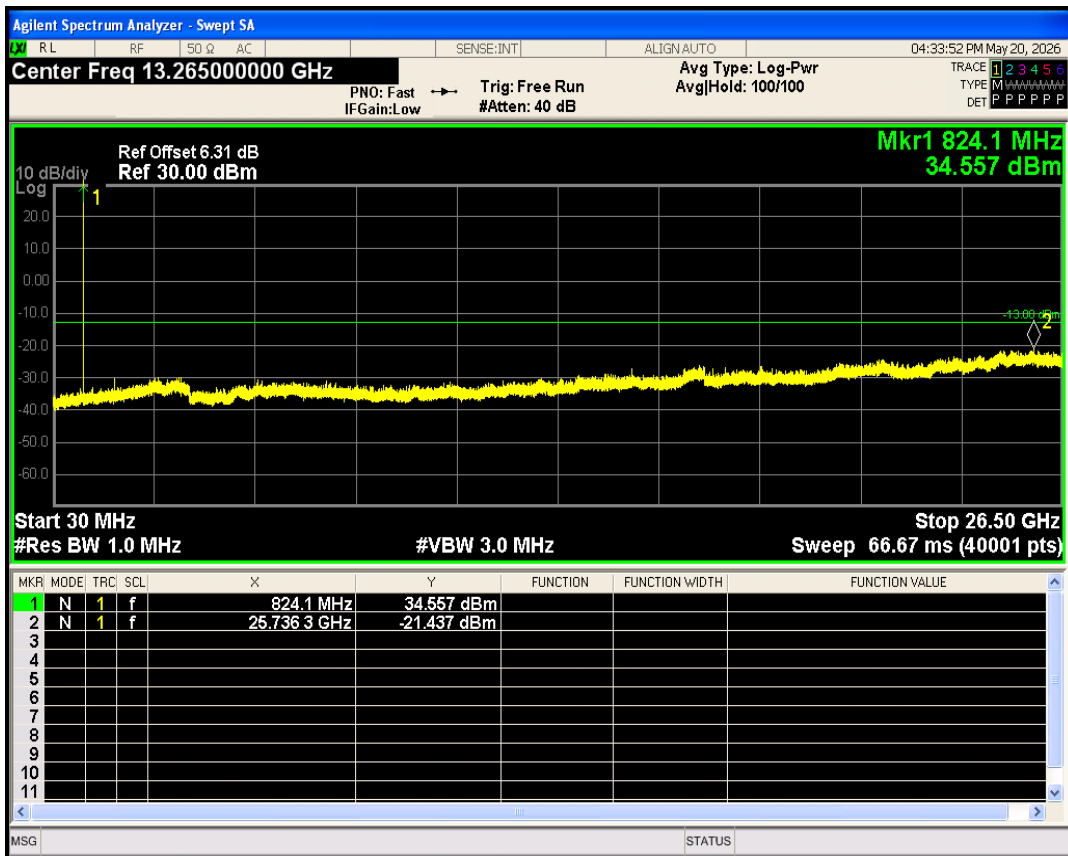

GSM850 Channel=251

