

USER MANUAL

SMART LED EAVE LIGHTS

Model: 100Ft/72LED



Please read this manual carefully before using the product, and keep it for records properly.



Product Features

- 1.Built-in microphone, real-time acquisition of music and environmental sound intensity.
- 2.You can choose to use the infrared remote control.
- 3.Control by Tuya Smart APP. The software shows that the text is based on the language of the mobile phone set up automatic transformation of Chinese, English and other local language.
- 4.Works with Amazon Alexa and Google home and so on.
- 5.It has a variety of dynamic light effects to cope with various occasions.


Product Parameters

Model	100Ft/72LED
LED Type	RGB 5050 LED
Category	Led Controller
Sound Sensor	Mems MIC
INPUT	AC100-240V~50/60Hz
OUTPUT	DC-24V 1.5A
APP	Tuya Smart
Language	13 languages including Chinese,English,German,French,Italian,Spanish + Spanish-Brazilian,Japanese,Portuguese + Portuguese for Latin America,Korean,Polish,Arabic
Supported Protocols	2.4GHz WiFi, Bluetooth
Operation Platform	iOS 10.0 or Android 5.0(Only for Phone) or higher.
Set up	Maximum can be 3M SPI driven strip, up to 72 ICs.
Work For	DC24V Led Strip or other constant voltage lights.




Packing List

- | | |
|---|----------------------|
| A Adapter & Controller | D User Manual |
| B 100ft LED light & Extension cord | E Screws |
| C Remote Control | F Clips |

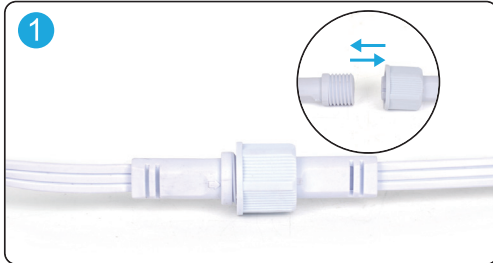

1. Connect adapter and string lights via the waterproof connectors and screw in the cap.

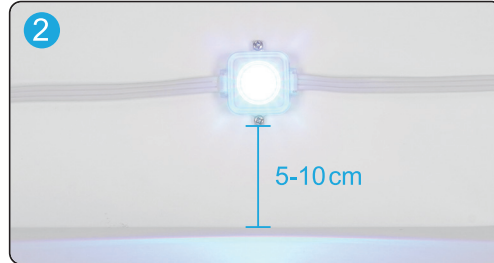

2. Please install the string lights 5-10cm away from the wall surface.



3. Clean the surface with a cloth or tissue before installing the string lights.




4. Remove the protection behind the adhesive backing.



5. Press the light firmly against the surface for more than 5 seconds.



6. Attach 2 screw to each string light to keep them secure.

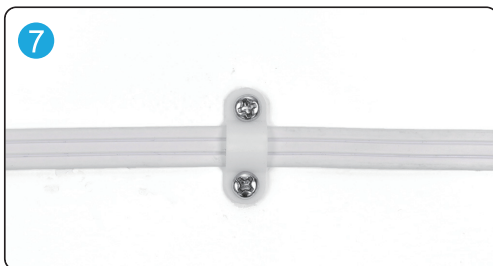


7. Installation of screw clips between two lamp beads to secure the wire.

Tips:

1. Make sure the waterproof connector installation skills, and make sure the nut is tightened.
2. During use, it is necessary to pay attention to the waterproof interface and the controller to keep as dry as possible, to avoid soaking water or rain.
3. Use self-tapping screws to fix it on the wall to avoid falling off, and use the wire buckle to press the wire will be more stable.

Infrared remote control

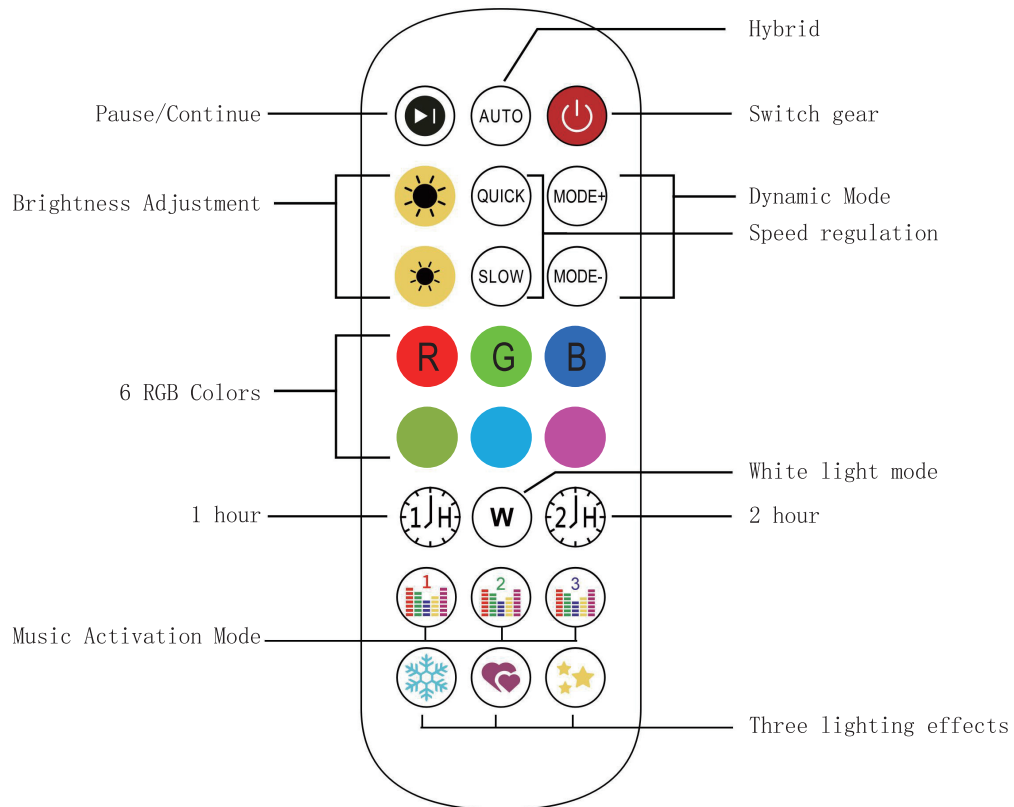

Remove the plastic card



Install the lithium battery properly

Download and Install App

Search for "Tuya Smart" in the app store- download and install.

You can also download the application by scanning the QR code.




Tuya Smart

Register/Login/Forget password

Register: Tap Register. Read the Privacy Policy page that Appears and tap Agree to enter the account registration page (The password requirement is: 6-20 characters, the password must contain both letters and numbers).

Login : If you have an App account, tap Log in with Existing Account under Register to enter the login page.


Forget password : If you forgot your password of the App, you can reset your password by clicking "Forgot Password" on the login page.

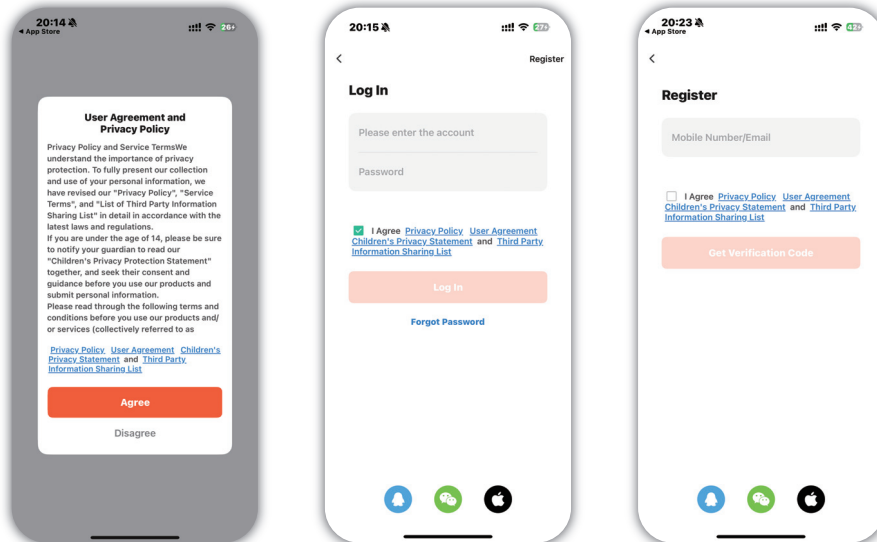

Add Device -- EZ mode

First, please confirm that your mobile phone Bluetooth is turned on.

In the main interface of the application, click the "+" in the upper right corner to enter the pairing interface. Wait a moment to see the device found, and click "Add" to pair with the device. Then enter the WiFi name and password, click "Next". and wait for a while to complete the pairing. The specific operation is shown in the following figure.

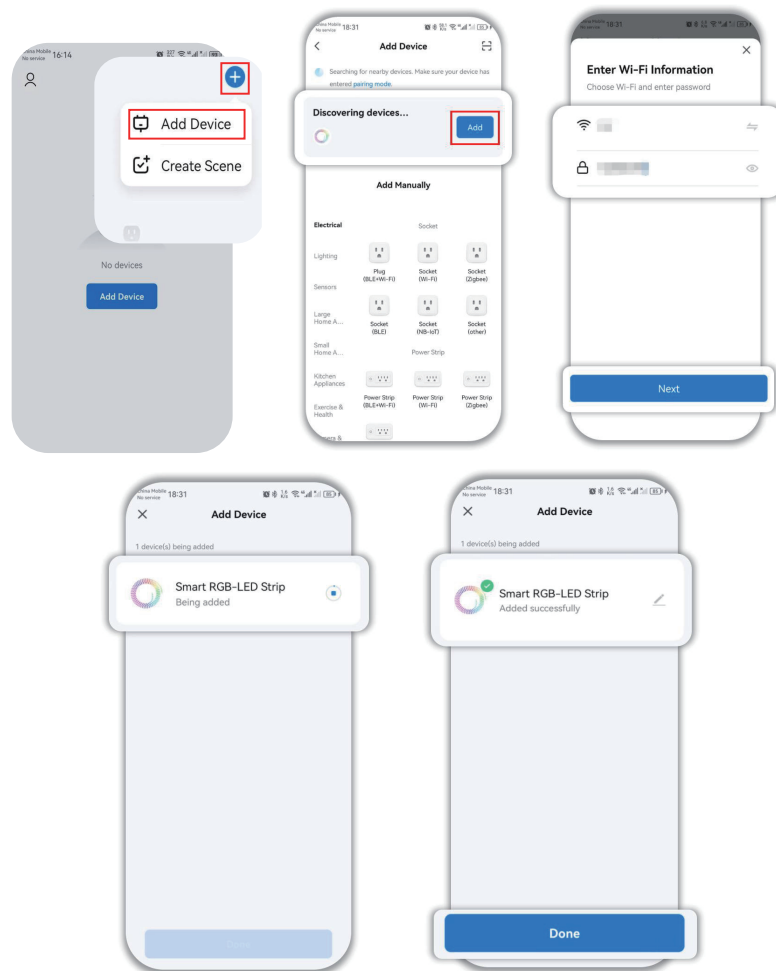

Add Device -- AP mode

In the main interface of the application, click the "+" in the upper right corner to enter the pairing status interface, then select the "lighting", and select the "Strip Lights (BLE+Wi-Fi)" option, as shown in the following figure.

Select the flashing mode of the light strip according to the prompt, then enter the WiFi name and password, and wait for the phone to pair with the device.

Note:

Long press the on/off button on the extension cords controller for more than 6 seconds until the red light flashes rapidly.

If the indicator light does not flash, switch the power supply of the equipment three times (open-close-open-close-open).

Alternatively, you can long press the “” button on the infrared remote control (5-10 seconds) until the red light flashes rapidly.

If adding a device fails multiple times in "normal" mode, please go to “add device AP mode”

