



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-Mail: ctl@ctl-lab.com

FCC PART 15 Subpart B

Report Reference No.: CTL2204072051-WF

Compiled by

(position+printed name+signature) . : File administrators Gatsby

Name of the organization performing the tests

(position+printed name+signature) . : Technique principal Ivan Xie

Approved by

(position+printed name+signature) . : Manager Tracy Qi

Date of issue: July. 13, 2022

Representative Laboratory Name. : Shenzhen CTL Testing Technology Co., Ltd.

Address: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test Firm: Shenzhen CTL Testing Technology Co., Ltd.

Address: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Applicant's name: Japan Ergonomics Inc.

Address: Wako Building 3F, 1-1-4 Dote-cho, Omiya-ku, Saitama City, 330-0801 Japan

Test specification:

Standard.....: FCC PART 15 Subpart B

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Shenzhen CTL Testing Technology Co., Ltd.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Foot Switch

Model/Type reference: FS2P5

List Model(s).....: FS2P1, FS2P2, FS2P3, FS2P4

Trade Mark: EDIKUN

Test voltage.....: Input: 5V

FCC ID : 2A586-FS2P5

Result: Pass



FCC Test Report

Test Report No. : CTL2204072051-WF	July. 13, 2022 Date of issue
---	---------------------------------

Equipment under Test : Foot Switch

Type / Model : FS2P5

Listed Models : FS2P1, FS2P2, FS2P3, FS2P4

Applicant : Japan Ergonomics Inc.

Address : Wako Building 3F, 1-1-4 Dote-cho, Omiya-ku, Saitama City, 330-0801
Japan

Manufacturer : Japan Ergonomics Inc.

Address : Wako Building 3F, 1-1-4 Dote-cho, Omiya-ku, Saitama City, 330-0801
Japan

Test Result	Pass
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

History of this test report

Report No.	Version	Description	Issued Date
CTL2204072051-WF	V1.0	Initial Issued Report	July. 13, 2022

Content

<u>1.</u>	<u>TEST STANDARDS</u>	<u>5</u>
<u>2.</u>	<u>SUMMARY</u>	<u>6</u>
2.1.	General Remarks	6
2.2.	Equipment Under Test	6
2.3.	Short description of the Equipment under Test (EUT)	6
2.4.	EUT operation mode	7
2.5.	EUT configuration	7
2.6.	Related Submittal(s) / Grant (s)	7
2.7.	Modifications	7
2.8.	Test Result Summary	7
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>8</u>
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	8
3.4.	Statement of the measurement uncertainty	9
3.5.	Equipments Used during the Test	9
<u>4</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
4.1.	Radiated Emission Test	10
4.2.	Conducted Emissions Test	15
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>18</u>
<u>6.</u>	<u>PHOTOS OF THE EUT</u>	<u>19</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart B - Unintentional Radiators](#)

[ANSI C63.4-2014](#)

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : May. 25, 2022

Testing commenced on : May. 25, 2022

Testing concluded on : July. 13, 2022

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : ☐ 120V / 60 Hz ☐ 115V / 60Hz
☐ 12 V DC ☒ 5 V DC
☐ Other (specified in blank below)

/

Description of test modes

The EUT were tested under the following modes, the final worst mode was marked in bold face and recorded in this report.

EMISSION TEST: Radiated Emission

Description of Test Mode	Test Voltage
WORKING	Input: 5V

EMISSION TEST: Conduction Emission

Description of Test Mode	Test Voltage
WORKING	Input: 5V

Note:

For the test results, the EUT had been tested with all conditions. But only the worst case was showed in test report.

2.3. Short description of the Equipment under Test (EUT)

Foot Switch .

For more details, refer to the user's manual of the EUT.

2.4. EUT operation mode

The EUT has been tested under typical operating condition.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- o - supplied by the lab

2.6. Related Submittal(s) / Grant (s)

This test report is intended for Foot Switch filing to comply with the FCC Part 15, Subpart B Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

2.8. Test Result Summary

Test Item	Test Requirement	Standard Paragraph	Result
Radiated Emission	FCC PART 15 Subpart B	Section 15.109	PASS
Conducted Emission	FCC PART 15 Subpart B	Section 15.107	PASS

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 399832

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

Certificated by A2LA, USA

Registration No.:4343.01

Date of registration: December 27, 2017

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission(chamber 1)	30~1000MHz	$\pm 4.10\text{dB}$	(1)
Radiated Emission(chamber 2)	30~1000MHz	$\pm 4.10\text{dB}$	(1)
Radiated Emission(chamber 2)	Above 1GHz	$\pm 4.32\text{dB}$	(1)
Conducted Emission	0.15~30MHz	$\pm 3.20\text{dB}$	(1)
Conducted Emission (signal terminal)	0.15~30MHz	$\pm 2.96\text{dB}$	(1)
Disturbance Power	30~300MHz	$\pm 2.90\text{dB}$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Equipments Used during the Test

Radiated Emission(chamber 1)						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	ULTRA-BROADBAND ANTENNA	Sunol Sciences Corp.	JB1 Antenna	A061713	2020/04/08	2023/04/07
2	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2022/05/06	2023/05/05
Software:						
Name of Software:				Version:		
EZ_EMG				V1.1.4.2		


Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2022/05/06	2023/05/05
2	LISN	ROHDE & SCHWARZ	ESH2-Z5	860014/010	2022/05/06	2023/05/05
3	Limitator	ROHDE & SCHWARZ	ESH3-Z2	1004008	2022/05/06	2023/05/05
4	The Impedance Stability Network ISN	FISCHER CUSTOM COMMUNICATIONS, INC.	F-071115-1057-1-09	112299	2022/05/06	2023/05/05
Software:						
Name of Software:				Version:		
ES-K1				V1.71		

4 TEST CONDITIONS AND RESULTS


4.1. Radiated Emission Test

TEST CONFIGURATION


Radiated Emission Test Set-Up, Frequency Below 30MHz

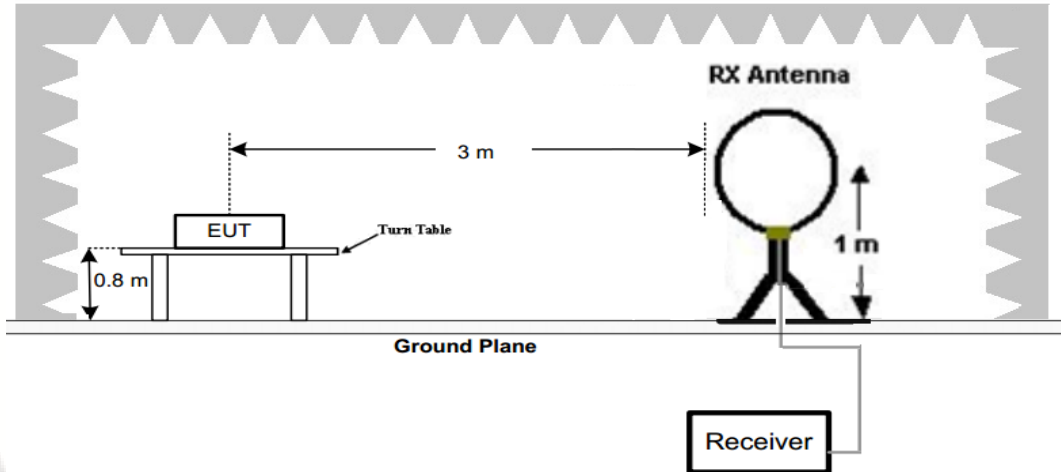

Radiated Emission Test Set-Up, Frequency below 1000MHz

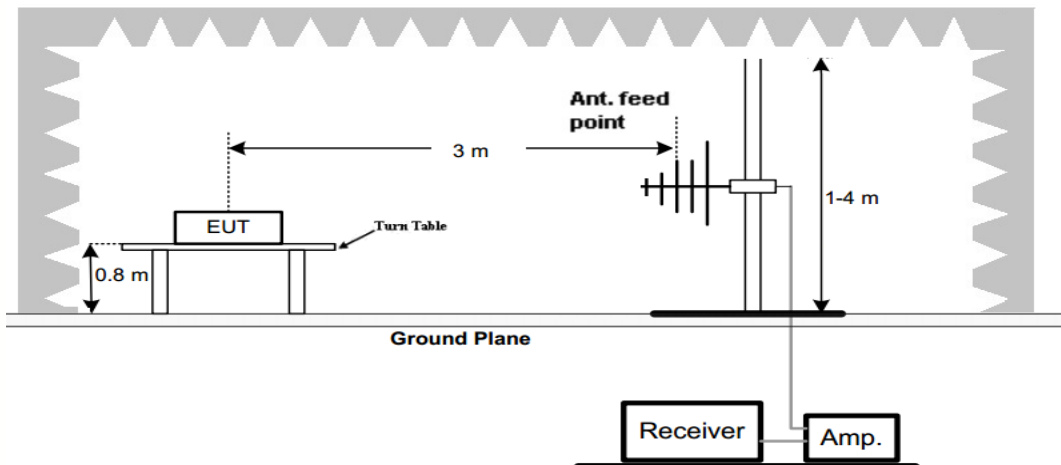

Radiated Emission Test Set-Up, Frequency above 1000MHz

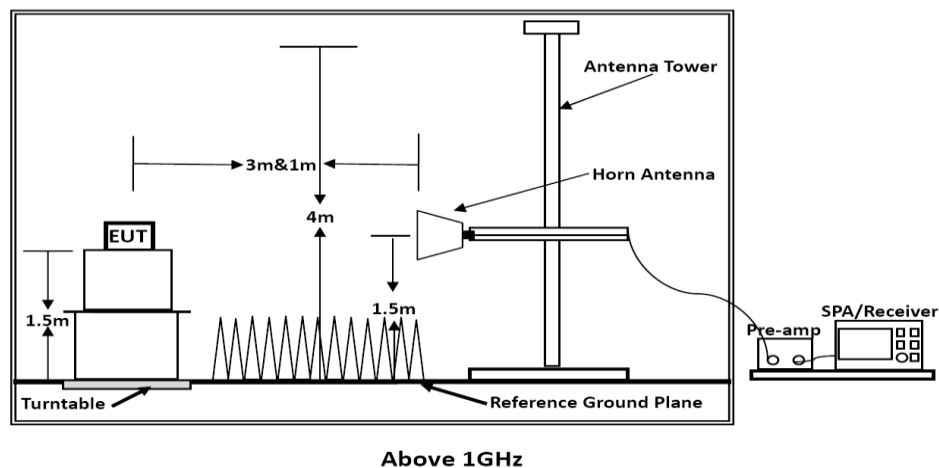

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
960	3	54.0	500



For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiation Test Results


For 30MHz-1GHz

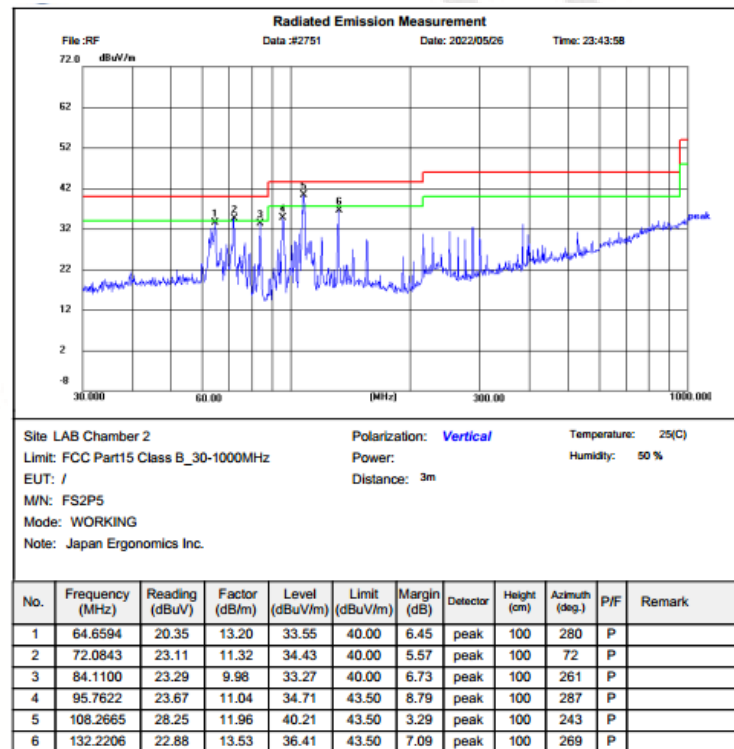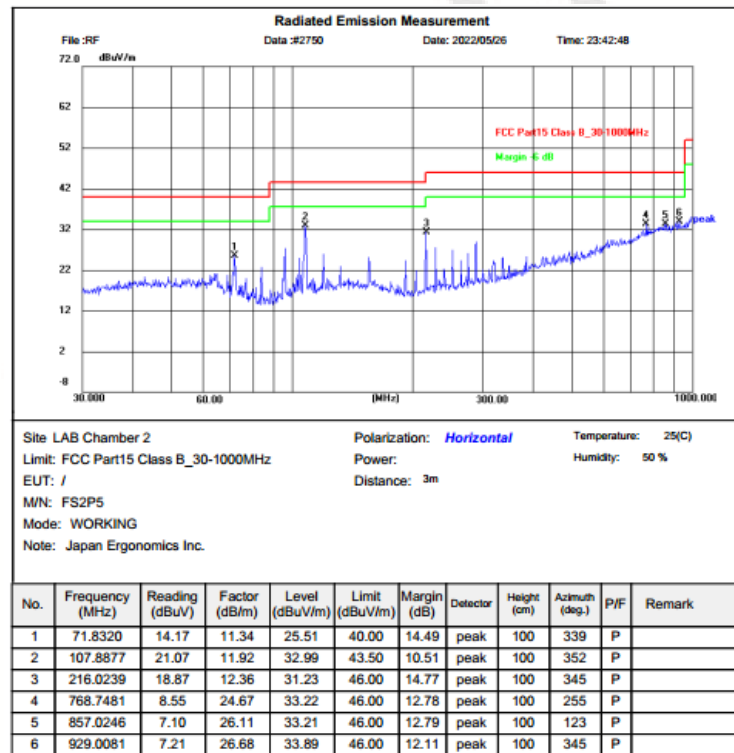

For 1GHz -18GHz
Radiated Emission Measurement

File :CTL

97.0 dBuV/m

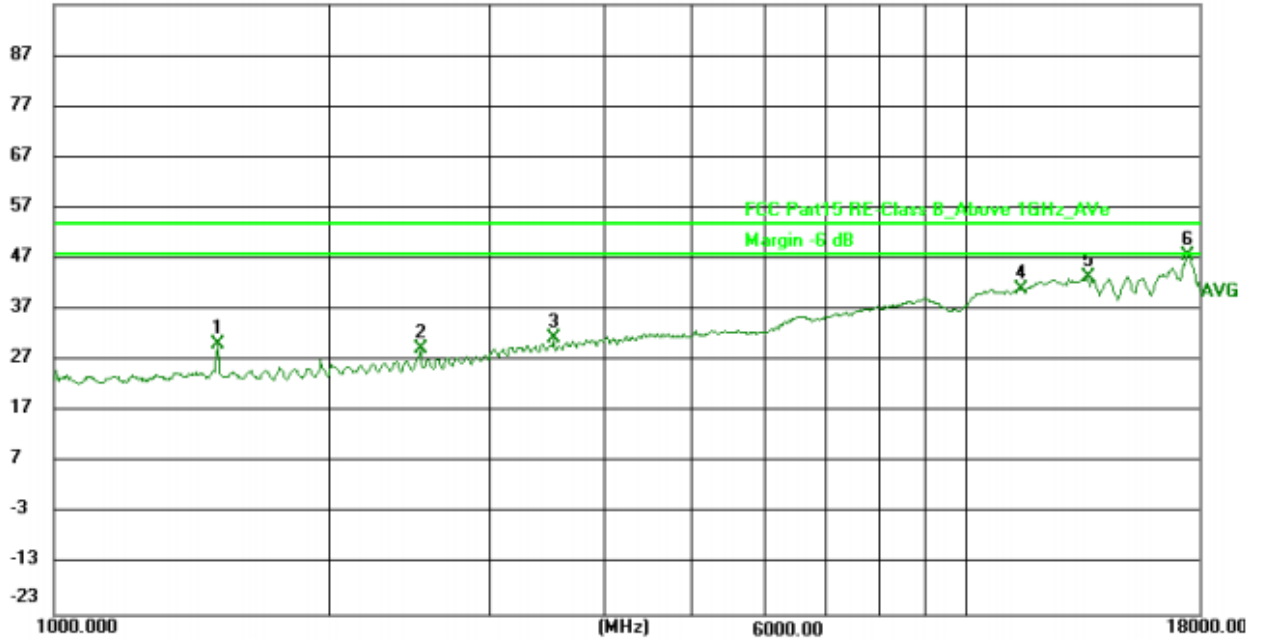


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	1511.833	37.22	-7.00	30.22	54.00	23.78	AVG	100	87	P
2	2521.664	32.35	-2.93	29.42	54.00	24.58	AVG	100	333	P
3	3526.134	31.06	0.51	31.57	54.00	22.43	AVG	100	327	P
4	11467.005	26.24	14.86	41.10	54.00	12.90	AVG	100	340	P
5	13559.879	25.59	18.00	43.59	54.00	10.41	AVG	100	41	P
6	17487.180	23.62	24.09	47.71	54.00	6.29	AVG	100	77	P

Radiated Emission Measurement

File : CTL


97.0 dBuV/m

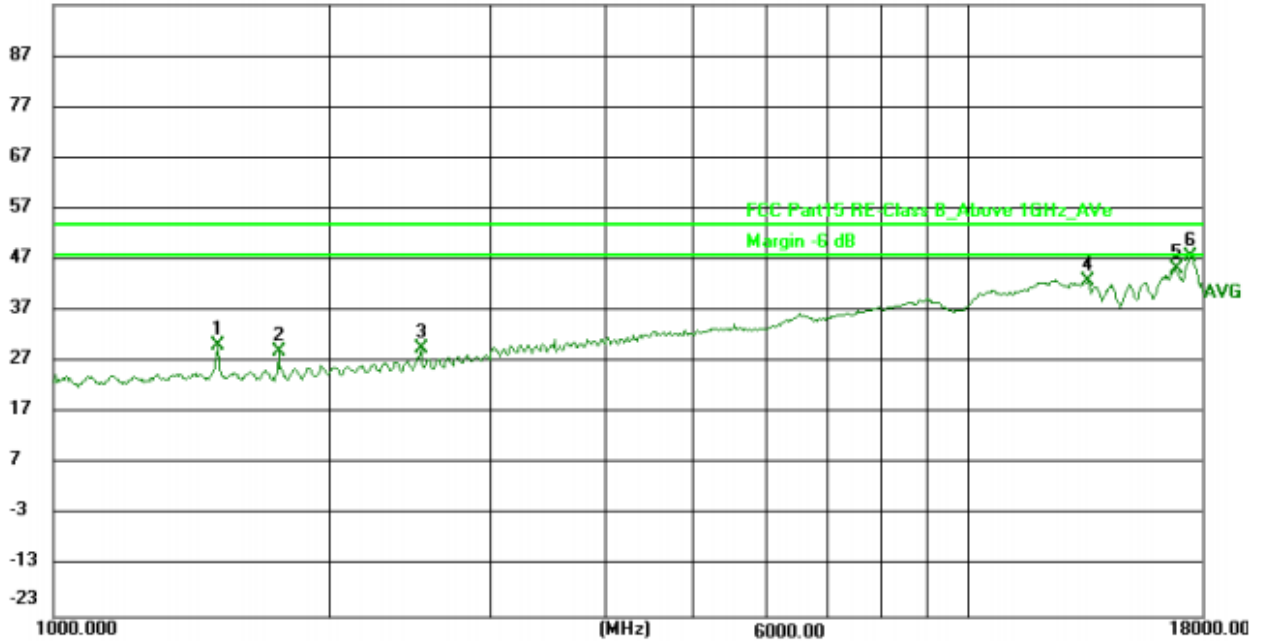

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	1511.833	36.99	-6.85	30.14	54.00	23.86	AVG	100	323	P
2	1762.112	34.90	-5.70	29.20	54.00	24.80	AVG	100	297	P
3	2521.664	32.28	-2.57	29.71	54.00	24.29	AVG	100	346	P
4	13520.742	25.16	17.55	42.71	54.00	11.29	AVG	100	146	P
5	16842.294	23.50	21.66	45.16	54.00	8.84	AVG	100	342	P
6	17487.180	23.05	24.64	47.69	54.00	6.31	AVG	100	254	P

4.2. Conducted Emissions Test

TEST CONFIGURATION

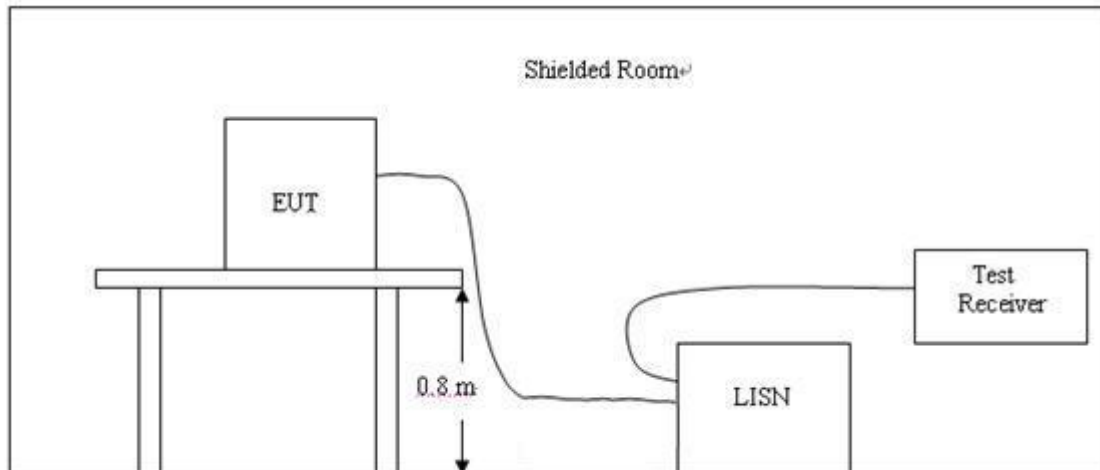

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :


Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

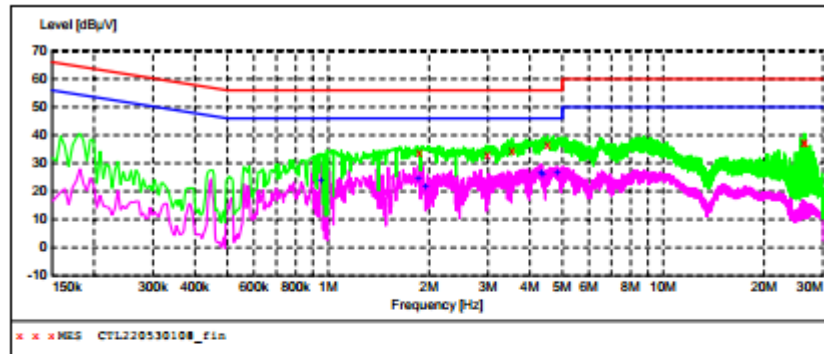

MEASUREMENT RESULT: "CTL220530108_fin"

5/30/2022 10:28AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	FE
1.869000	33.50	10.2	56	22.5	QP	L1	GND
2.994000	33.00	10.3	56	23.0	QP	L1	GND
3.534000	34.40	10.3	56	21.6	QP	L1	GND
4.510500	36.80	10.3	56	19.2	QP	L1	GND
26.277000	37.40	11.6	60	22.6	QP	L1	GND
26.569500	37.10	11.6	60	22.9	QP	L1	GND


MEASUREMENT RESULT: "CTL220530108_fin2"

5/30/2022 10:28AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	FE
0.955500	23.50	10.2	46	22.5	AV	L1	GND
1.851000	24.50	10.2	46	21.5	AV	L1	GND
1.950000	21.80	10.2	46	24.2	AV	L1	GND
4.303500	26.60	10.3	46	19.4	AV	L1	GND
4.357500	26.00	10.3	46	20.0	AV	L1	GND
4.807500	26.70	10.4	46	19.3	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

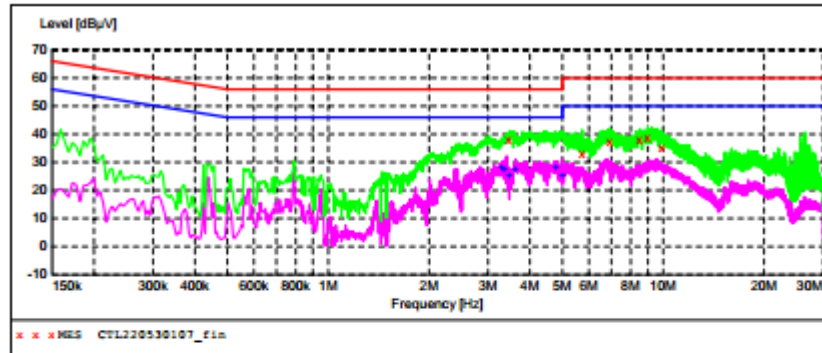**MEASUREMENT RESULT: "CTL220530107_fin"**

5/30/2022 10:25AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	FE
3.462000	38.00	10.3	56	18.0	QP	N	GND
5.743500	33.20	10.4	60	26.8	QP	N	GND
6.922500	37.10	10.4	60	22.9	QP	N	GND
8.497500	38.00	10.6	60	22.0	QP	N	GND
8.997000	38.50	10.6	60	21.5	QP	N	GND
9.892500	35.50	10.7	60	24.5	QP	N	GND

MEASUREMENT RESULT: "CTL220530107_fin2"

5/30/2022 10:25AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	FE
3.286500	27.90	10.3	46	18.1	AV	N	GND
3.349500	27.50	10.3	46	18.5	AV	N	GND
3.457500	25.30	10.3	46	20.7	AV	N	GND
3.610500	27.60	10.3	46	18.4	AV	N	GND
4.771500	27.80	10.4	46	18.2	AV	N	GND
4.987500	25.60	10.4	46	20.4	AV	N	GND

5. Test Setup Photos of the EUT

Radiated Emission (30-1000MHz)





Conducted Emission






6. Photos of the EUT

External Photos of EUT



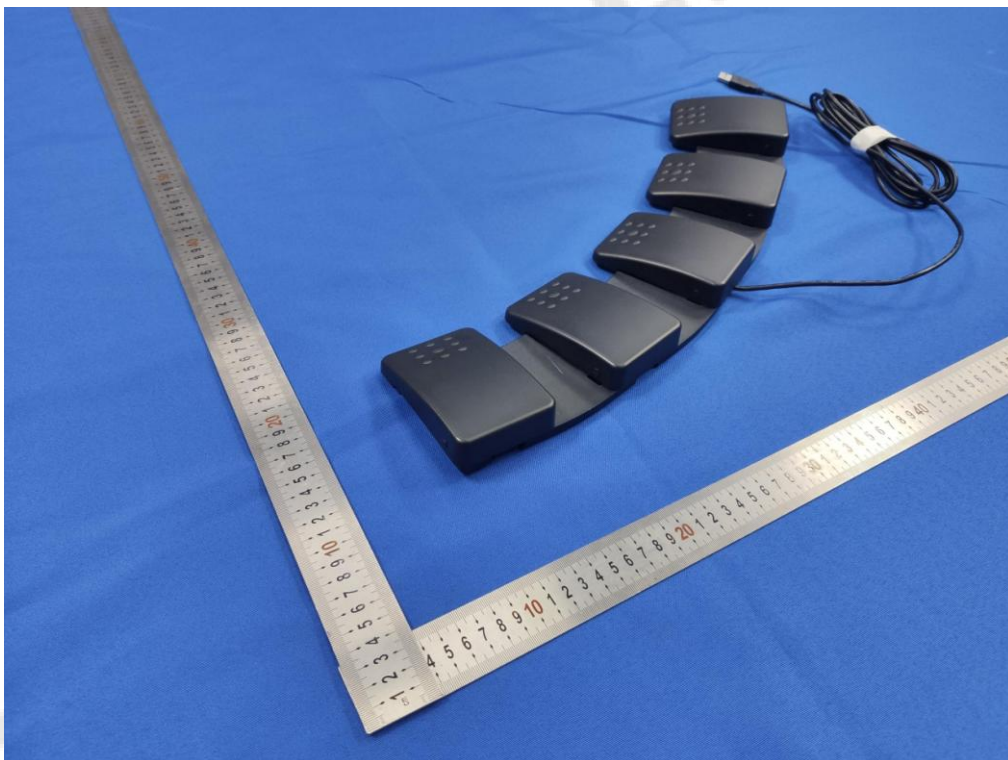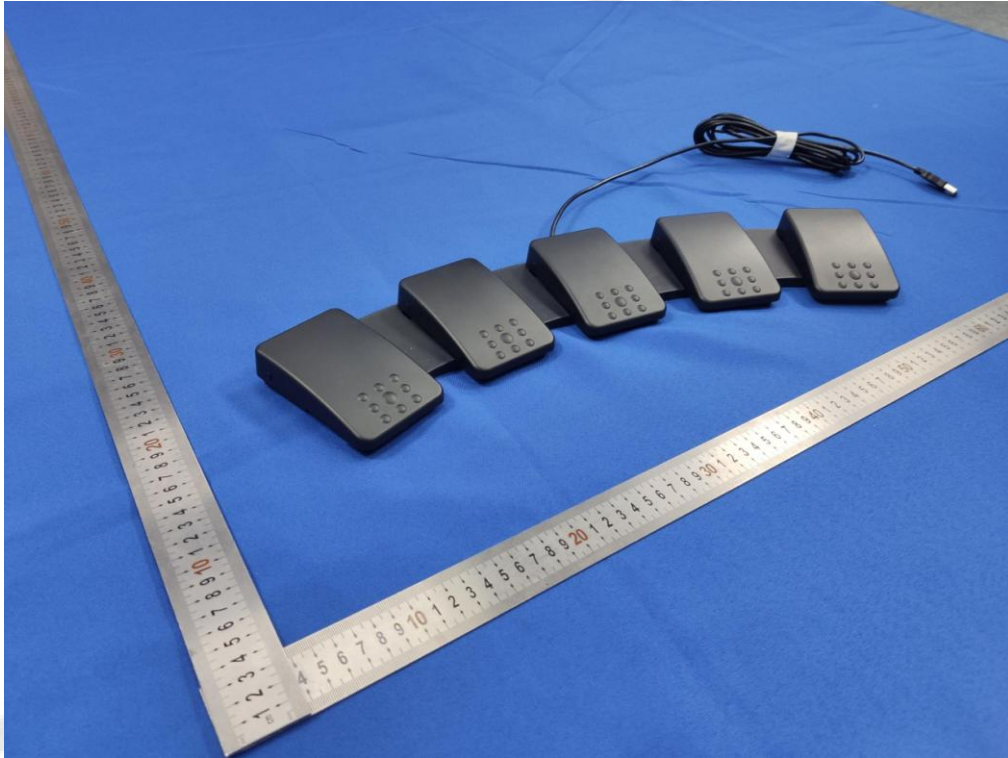

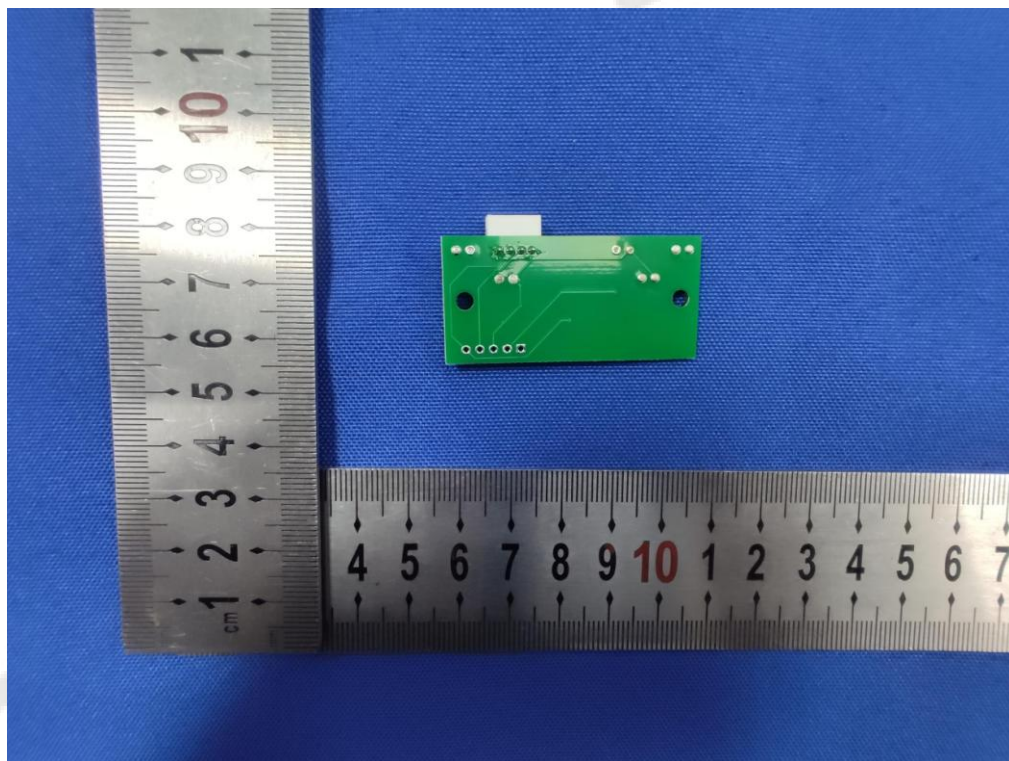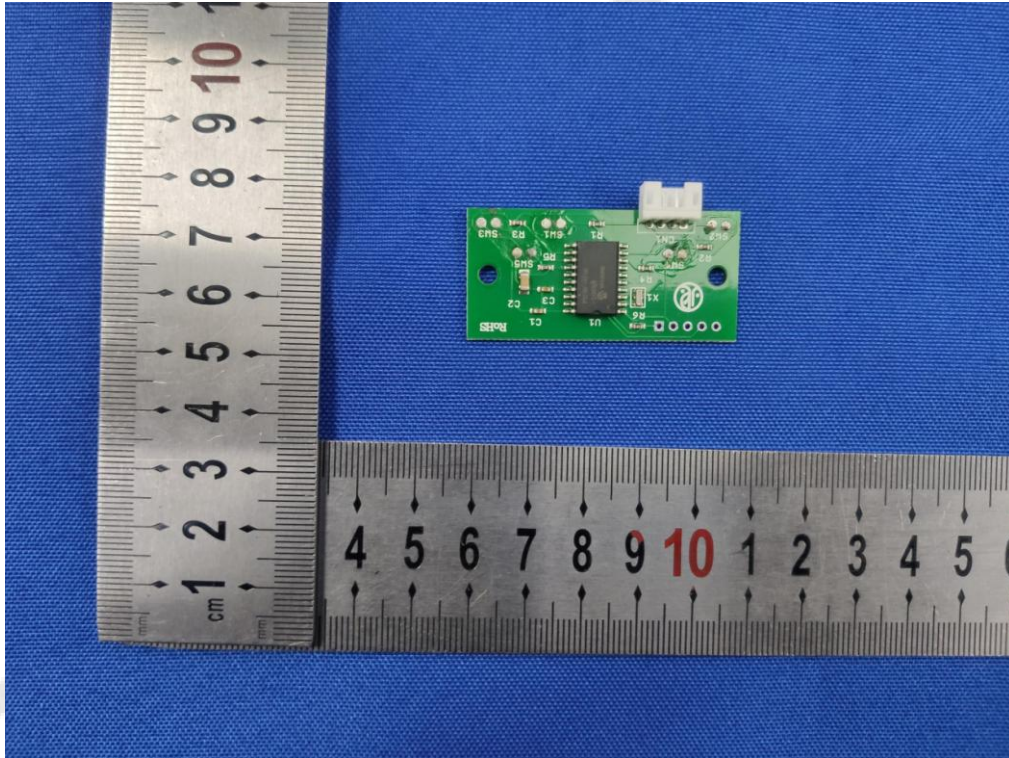Internal Photos of EUT

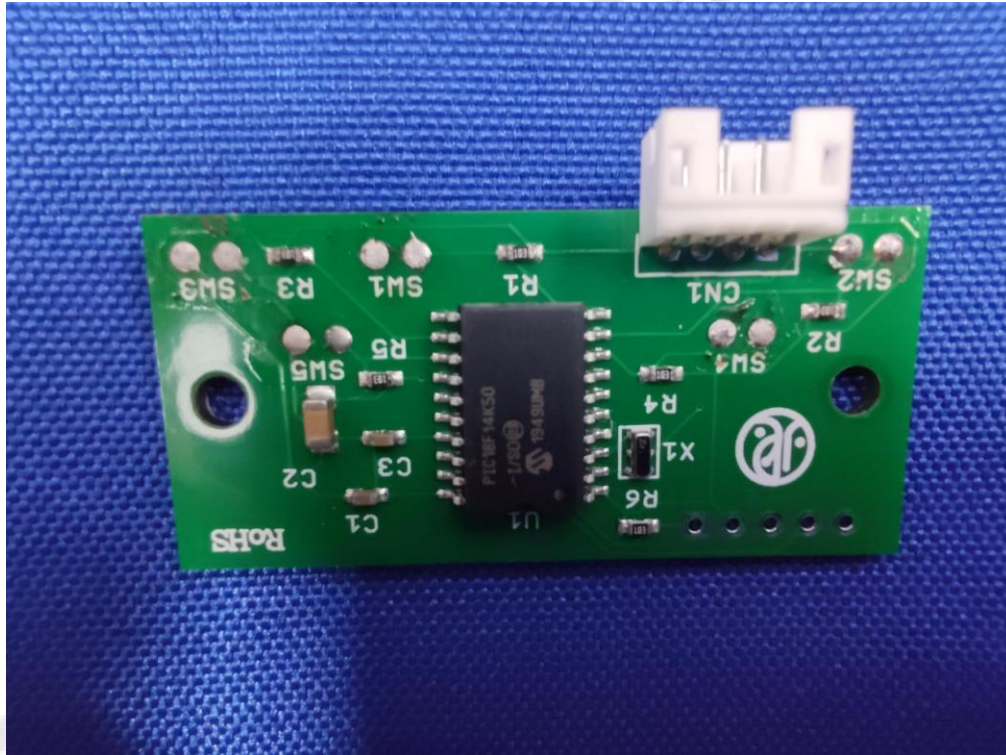

.....End of Report.....