




Test Graphs


OBW NVNT a 5745MHz Ant1

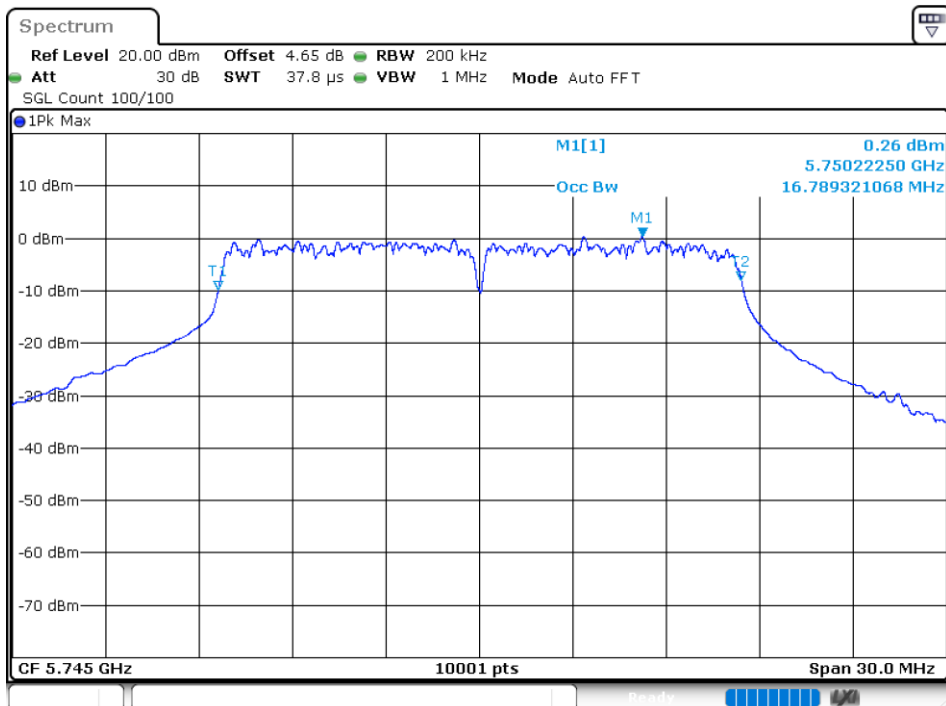



OBW NVNT a 5785MHz Ant1

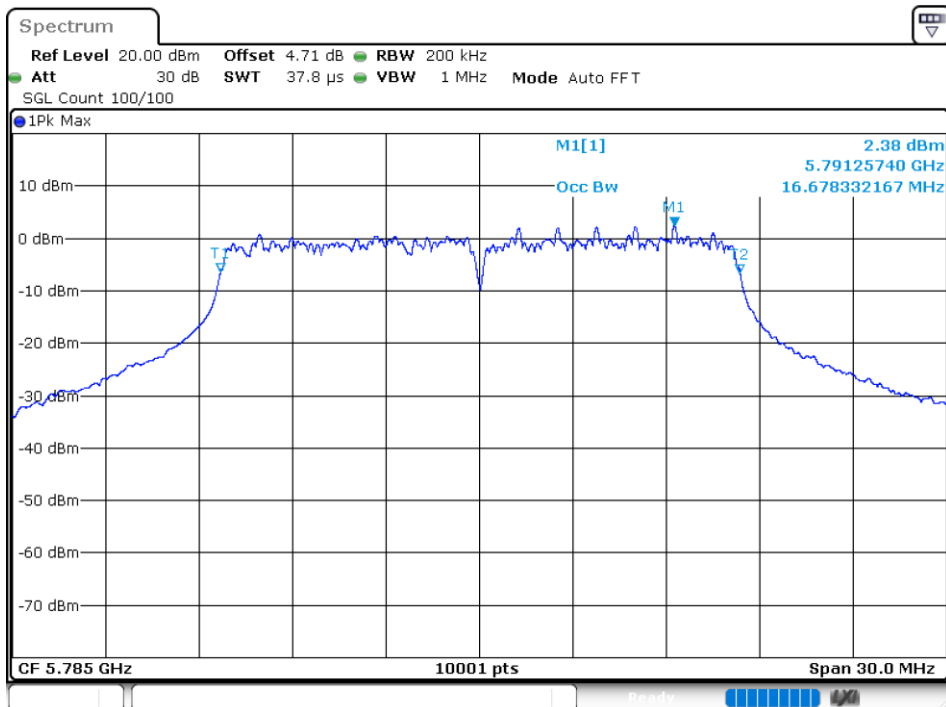


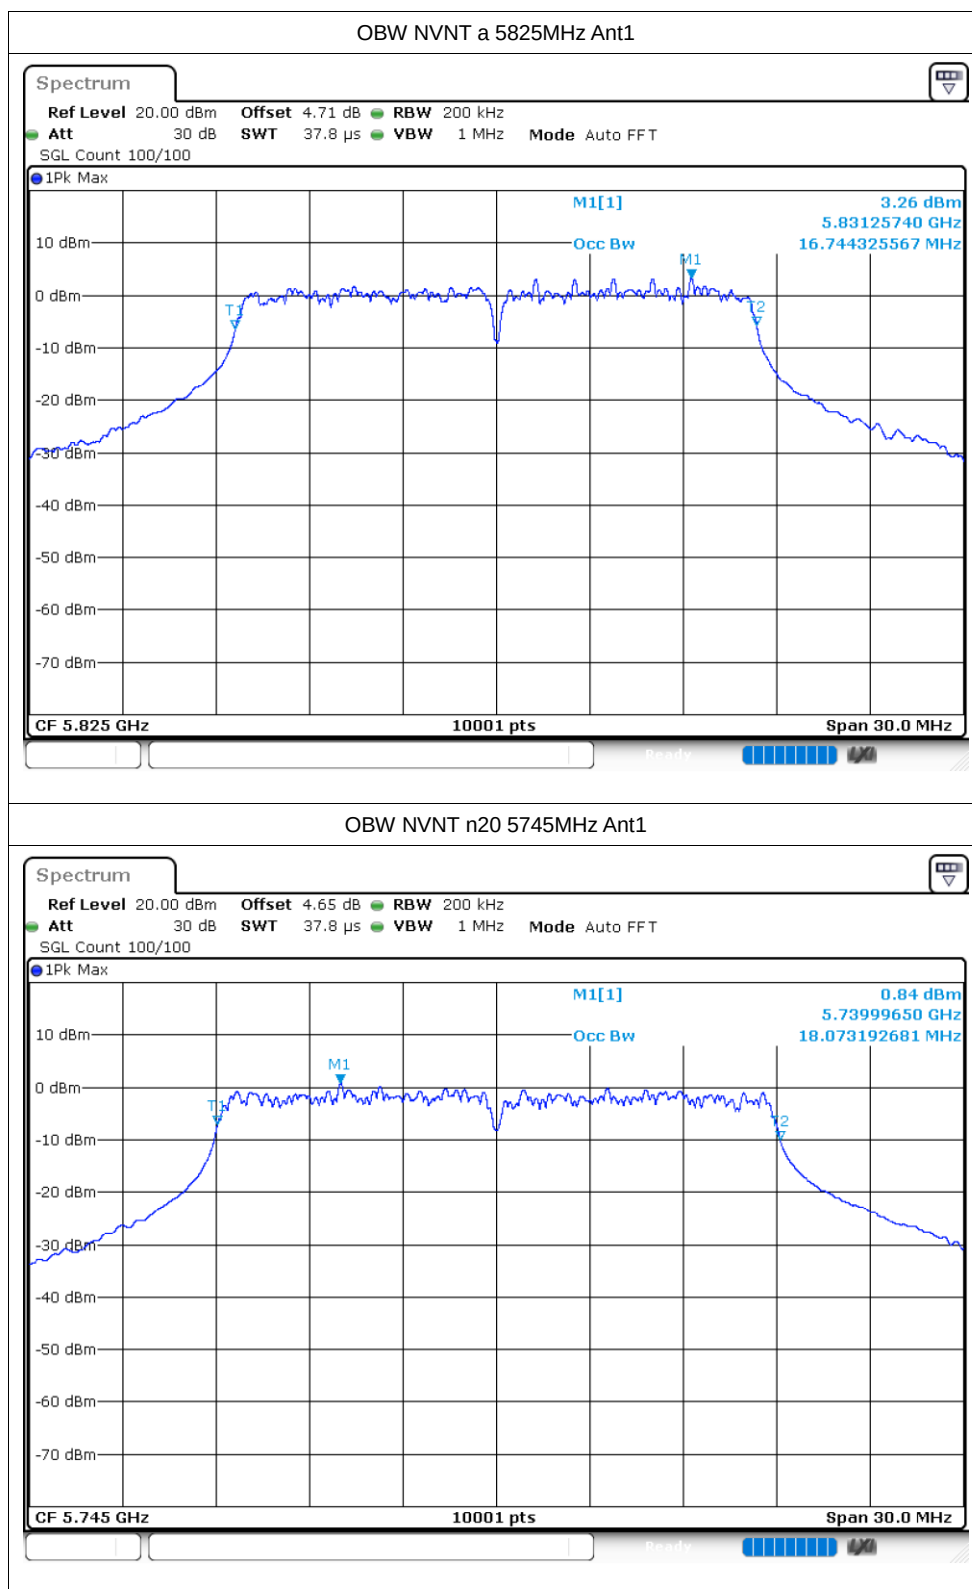


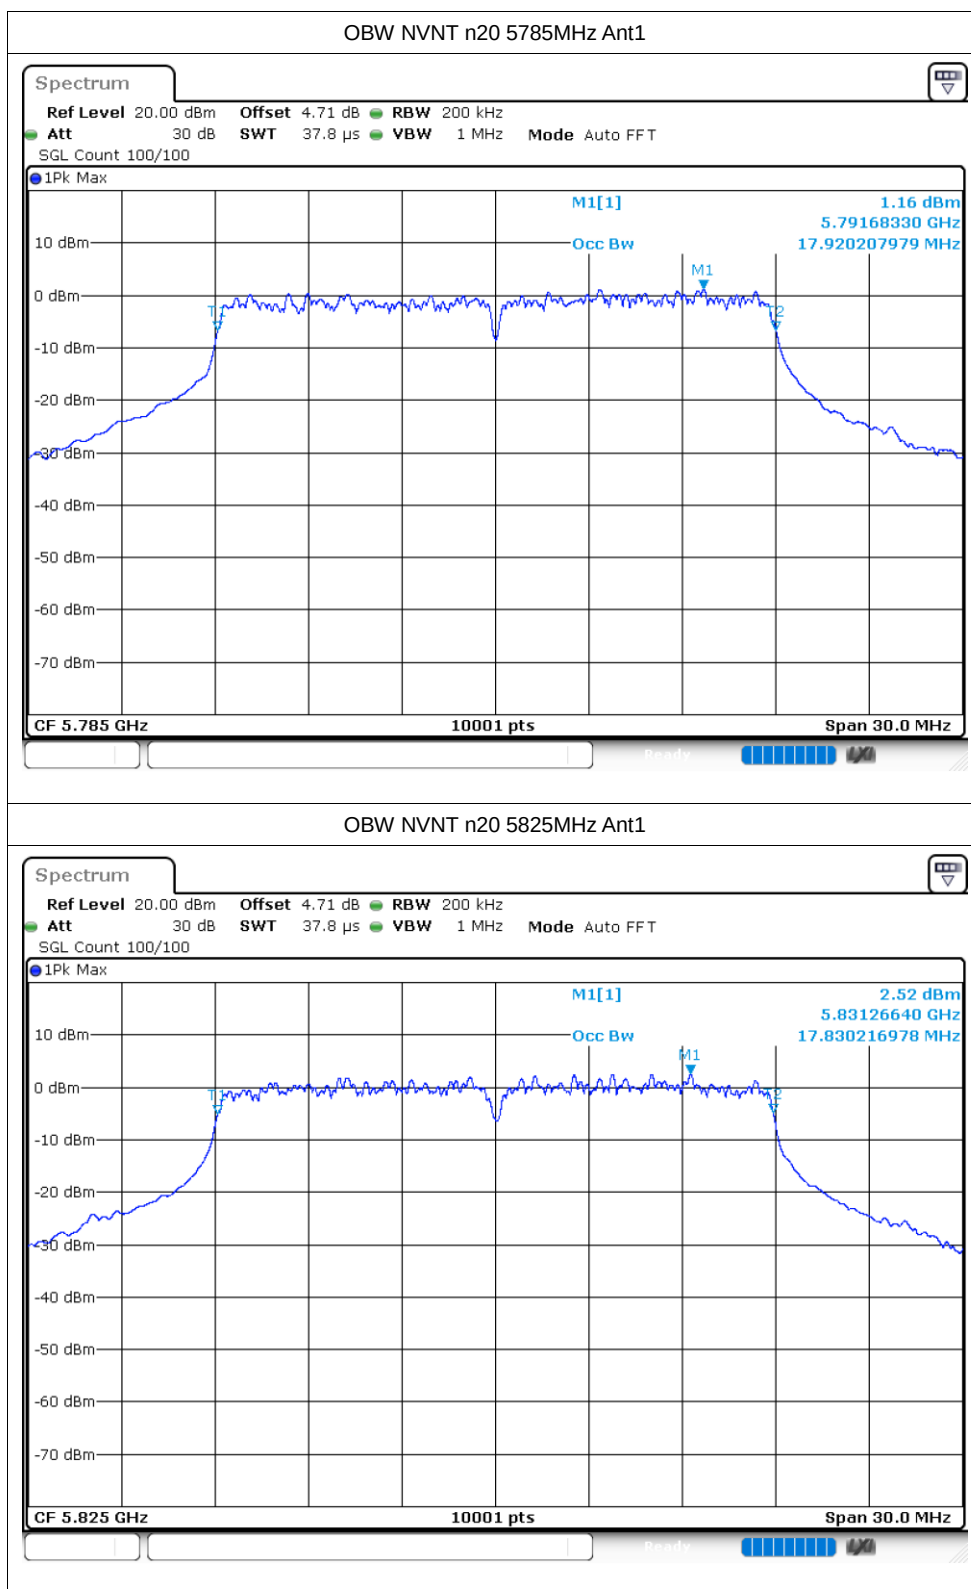


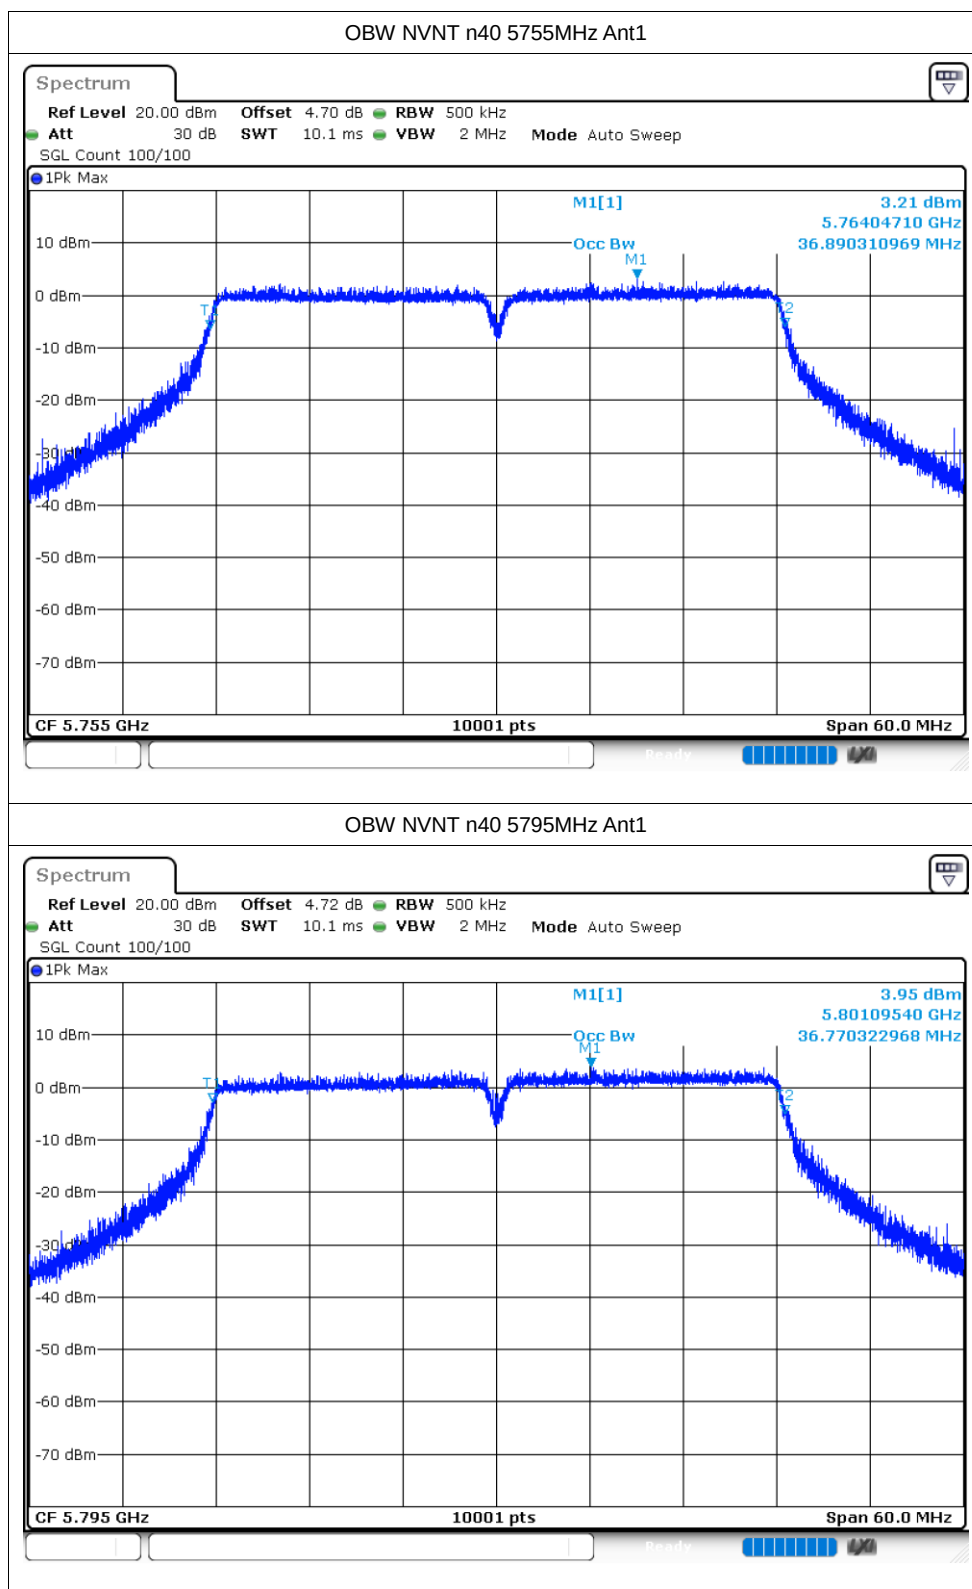


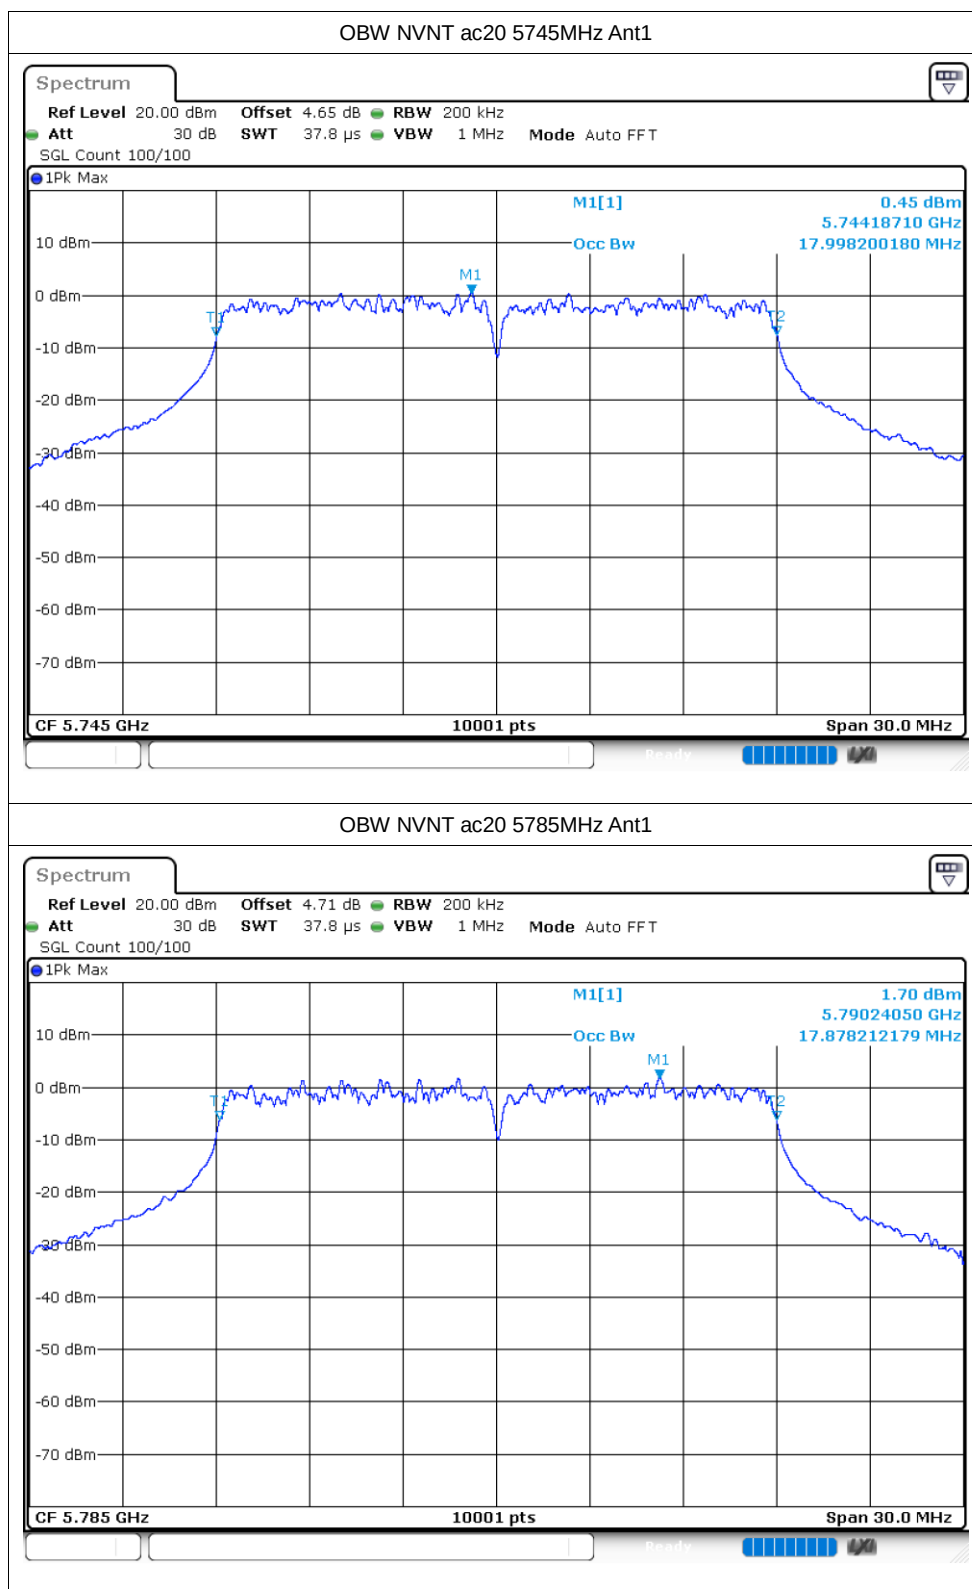

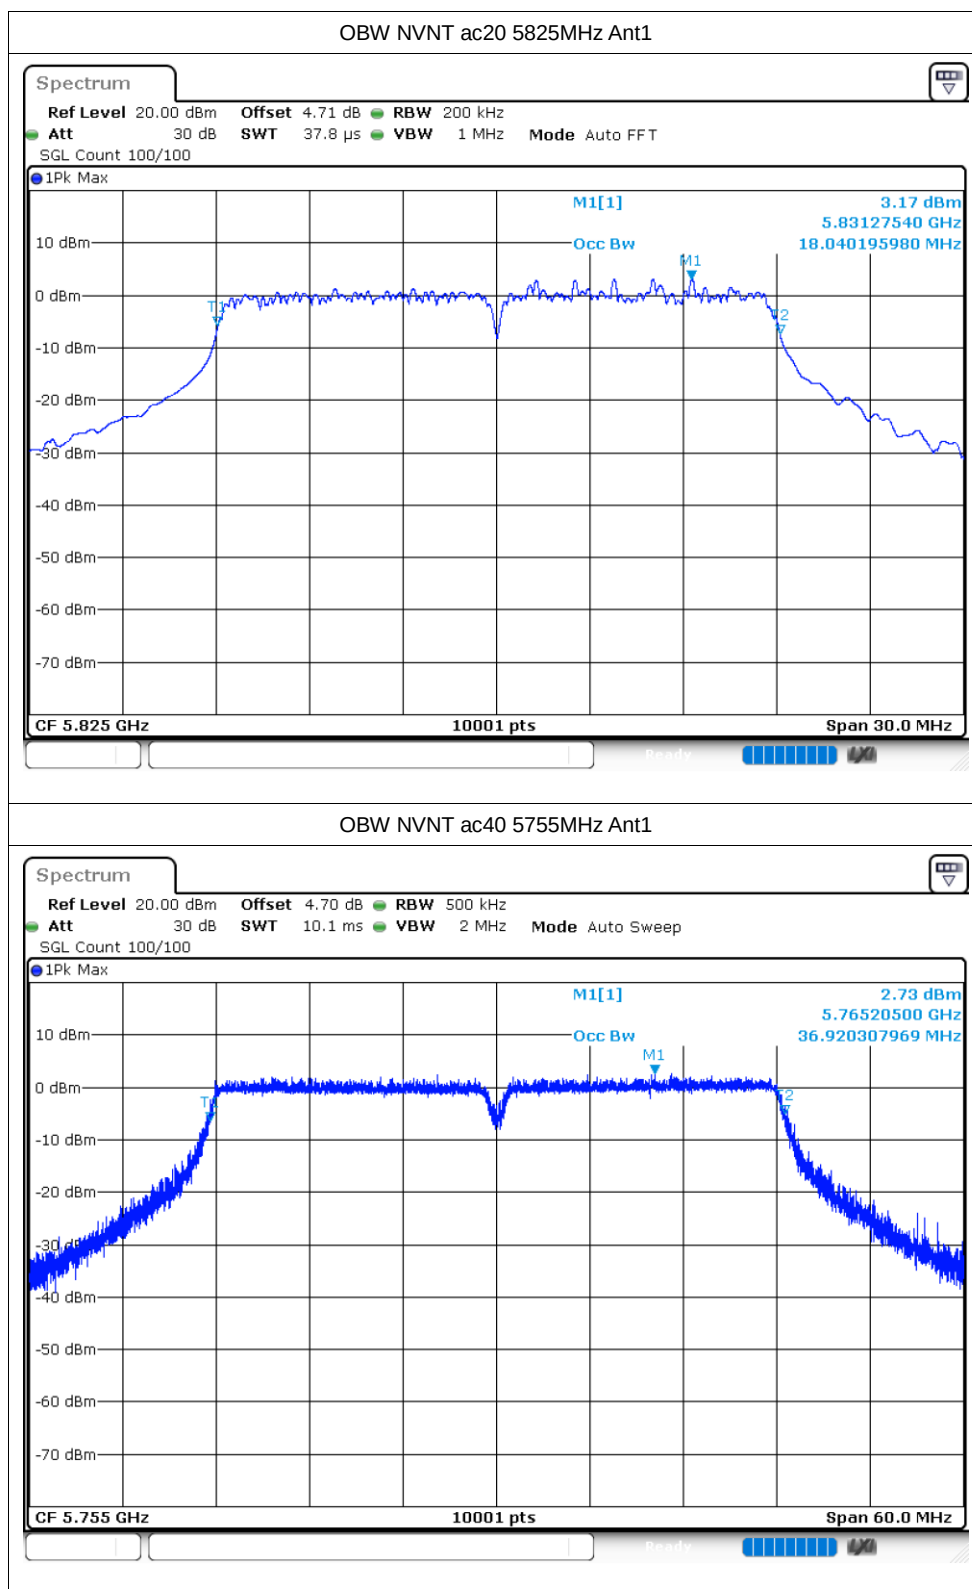

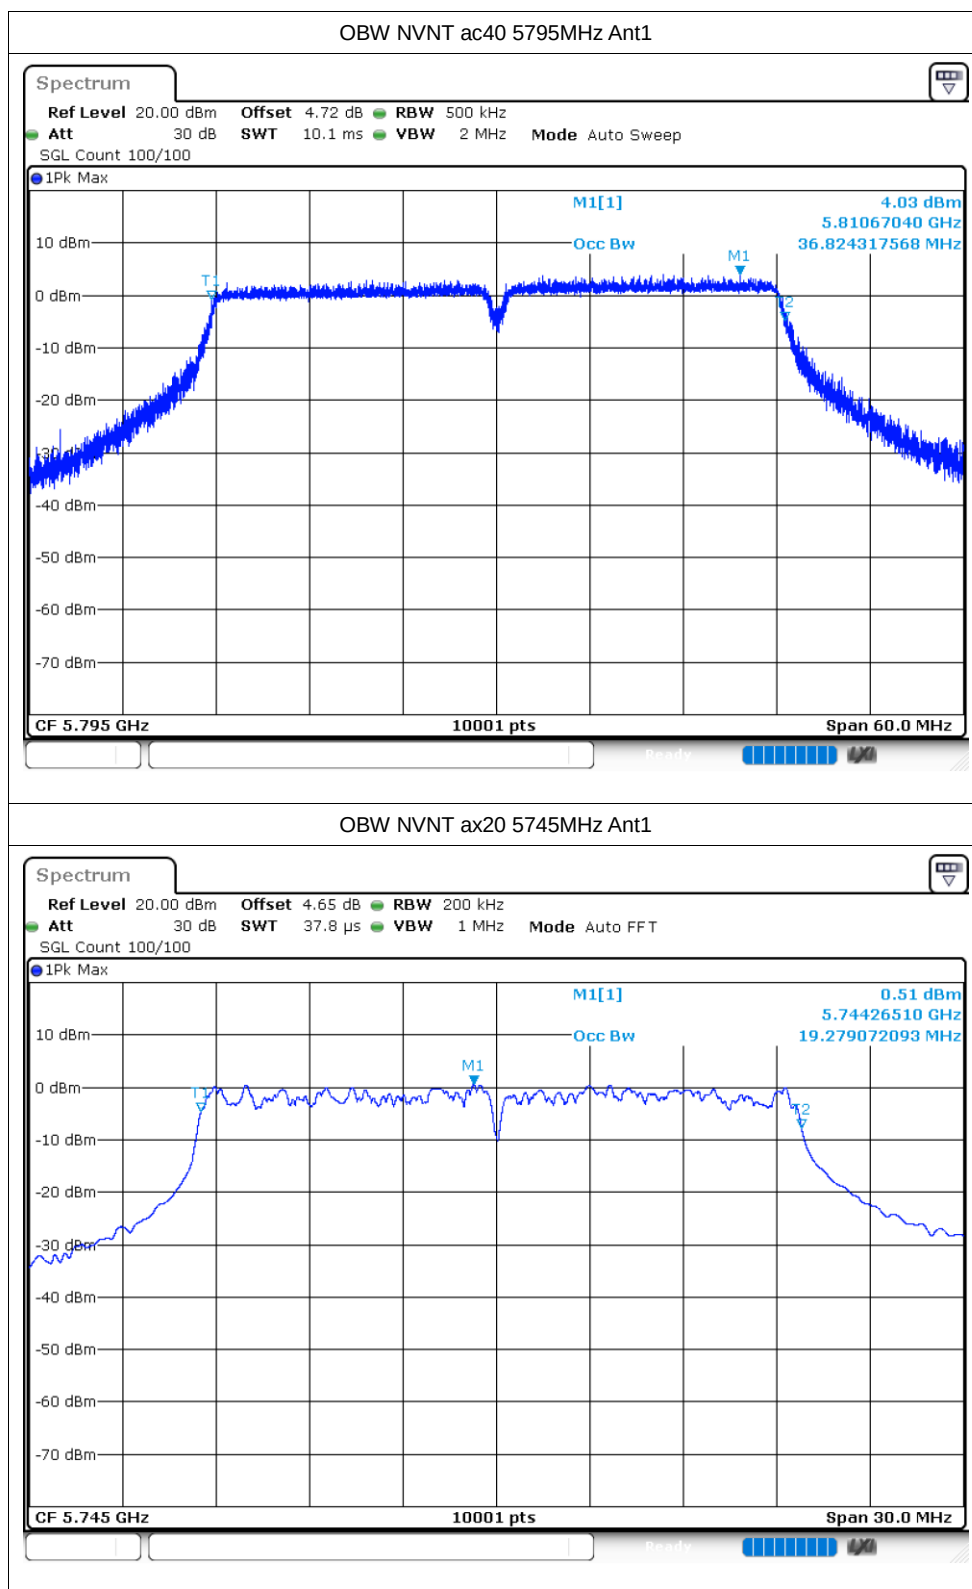

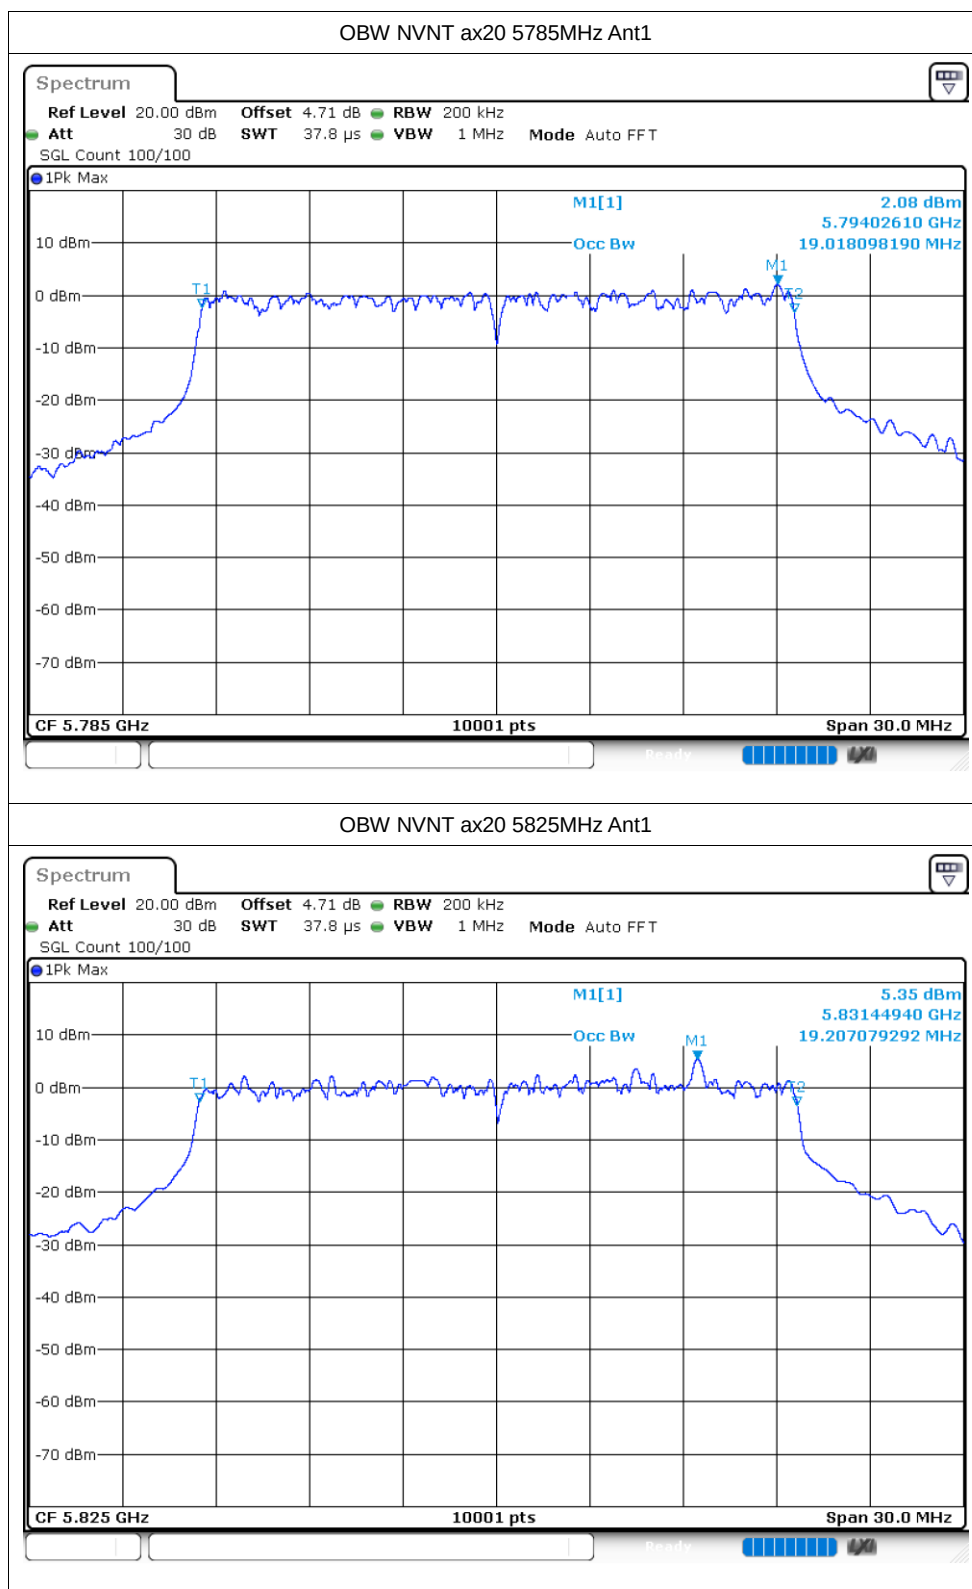

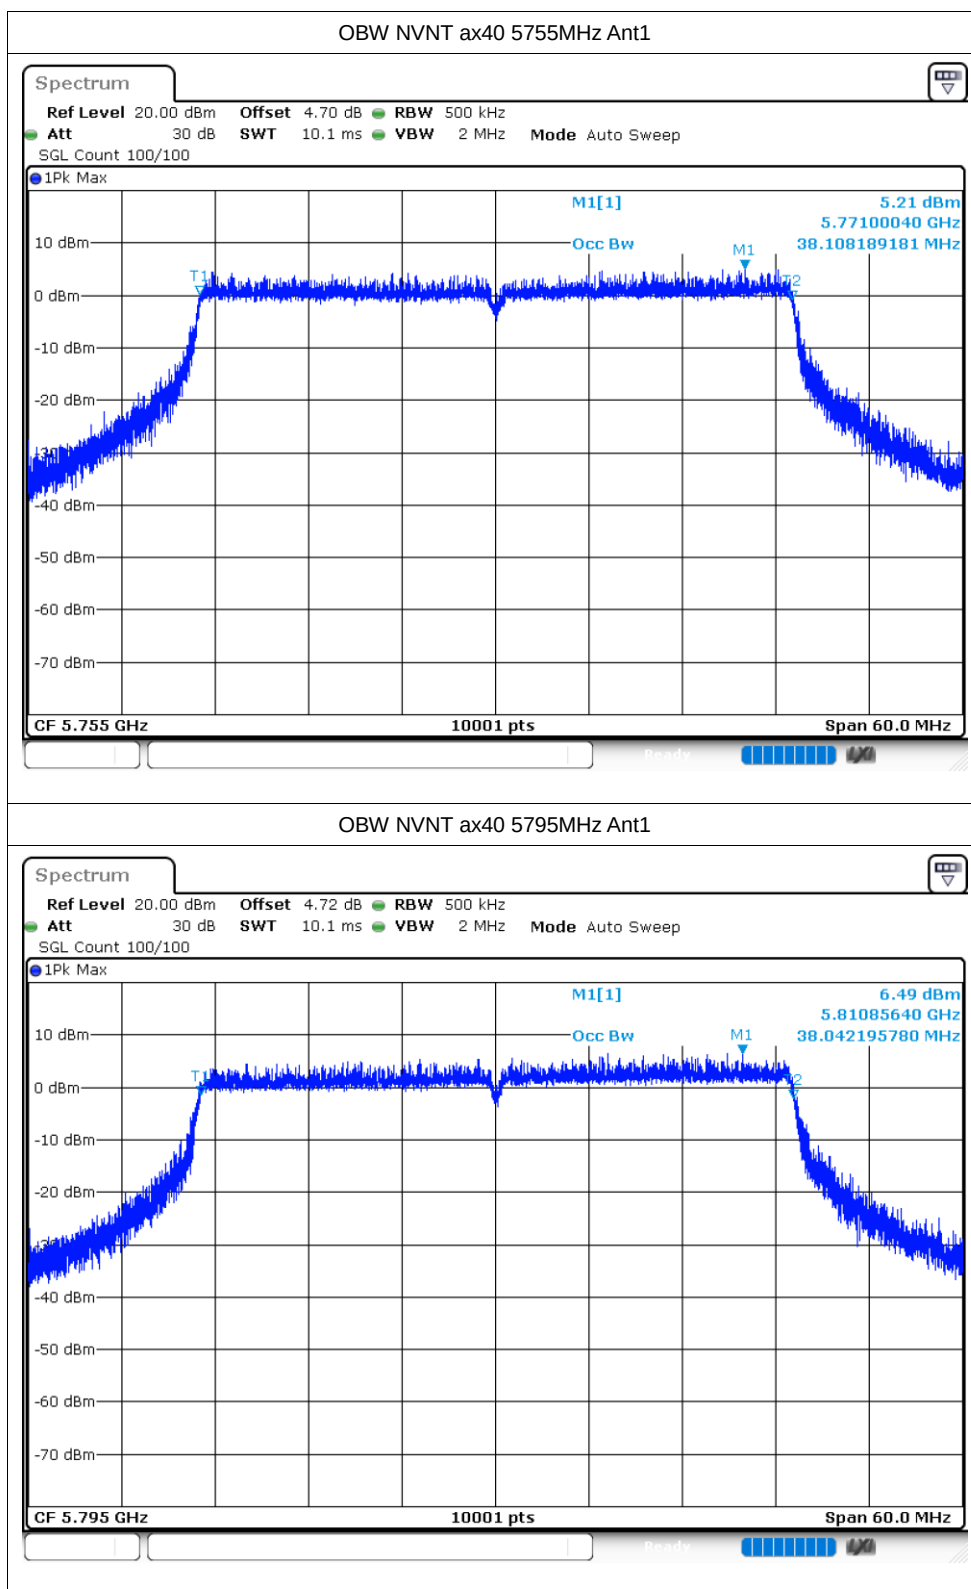


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-2.14	0.15	-1.99	30	Pass
NVNT	a	5785	Ant1	-1.13	0.17	-0.96	30	Pass
NVNT	a	5825	Ant1	-0.21	0.16	-0.05	30	Pass
NVNT	n20	5745	Ant1	-2.43	0.19	-2.24	30	Pass
NVNT	n20	5785	Ant1	-1.41	0.18	-1.23	30	Pass
NVNT	n20	5825	Ant1	-0.94	0.16	-0.78	30	Pass
NVNT	n40	5755	Ant1	-5.61	0.18	-5.43	30	Pass
NVNT	n40	5795	Ant1	-4.16	0.2	-3.96	30	Pass
NVNT	ac20	5745	Ant1	-2.75	0.21	-2.54	30	Pass
NVNT	ac20	5785	Ant1	-1.41	0.22	-1.19	30	Pass
NVNT	ac20	5825	Ant1	-0.64	0.24	-0.4	30	Pass
NVNT	ac40	5755	Ant1	-5.38	0.18	-5.2	30	Pass
NVNT	ac40	5795	Ant1	-4.24	0.17	-4.07	30	Pass
NVNT	ax20	5745	Ant1	-2.67	0.2	-2.47	30	Pass
NVNT	ax20	5785	Ant1	-2.02	0.2	-1.82	30	Pass
NVNT	ax20	5825	Ant1	-0.81	0.2	-0.61	30	Pass
NVNT	ax40	5755	Ant1	-5.85	0.19	-5.66	30	Pass
NVNT	ax40	5795	Ant1	-4.64	0.19	-4.45	30	Pass


Test Graphs


PSD NVNT a 5745MHz Ant1

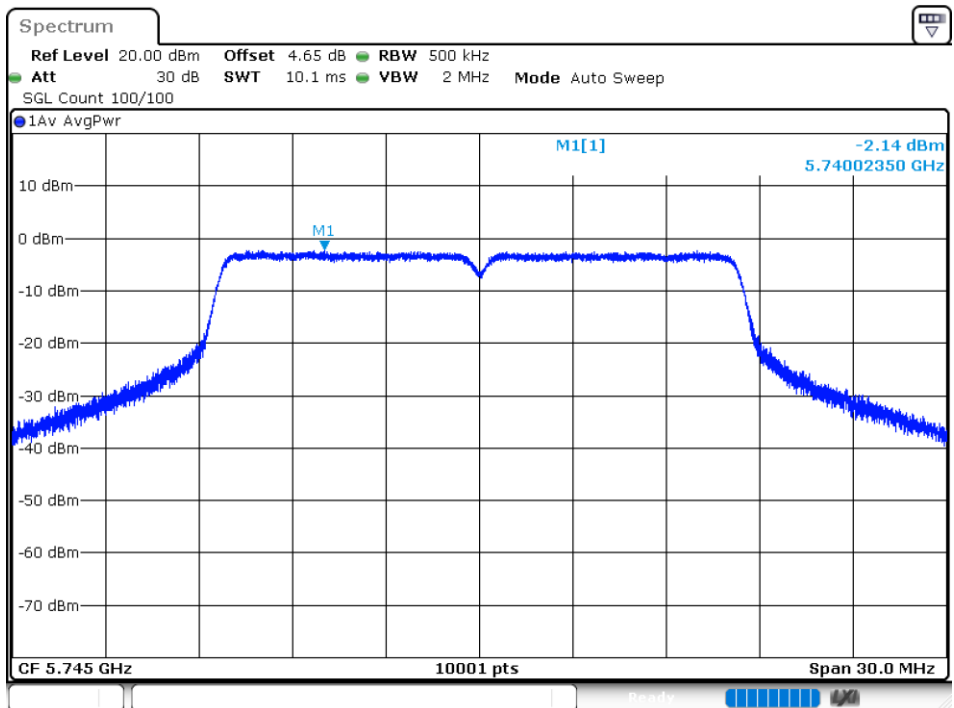



PSD NVNT a 5785MHz Ant1

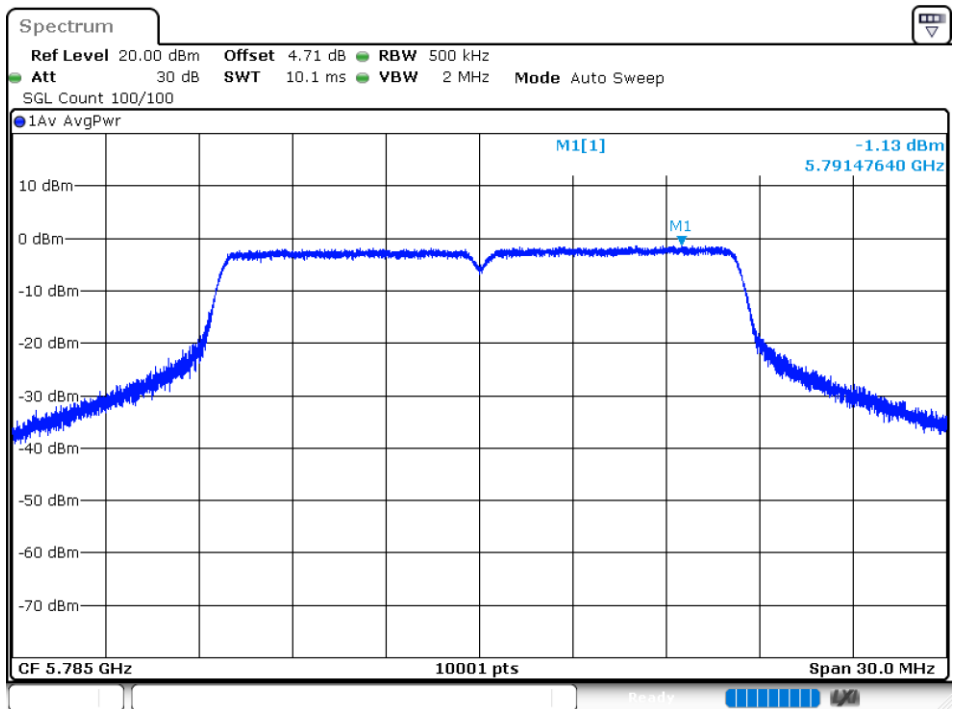


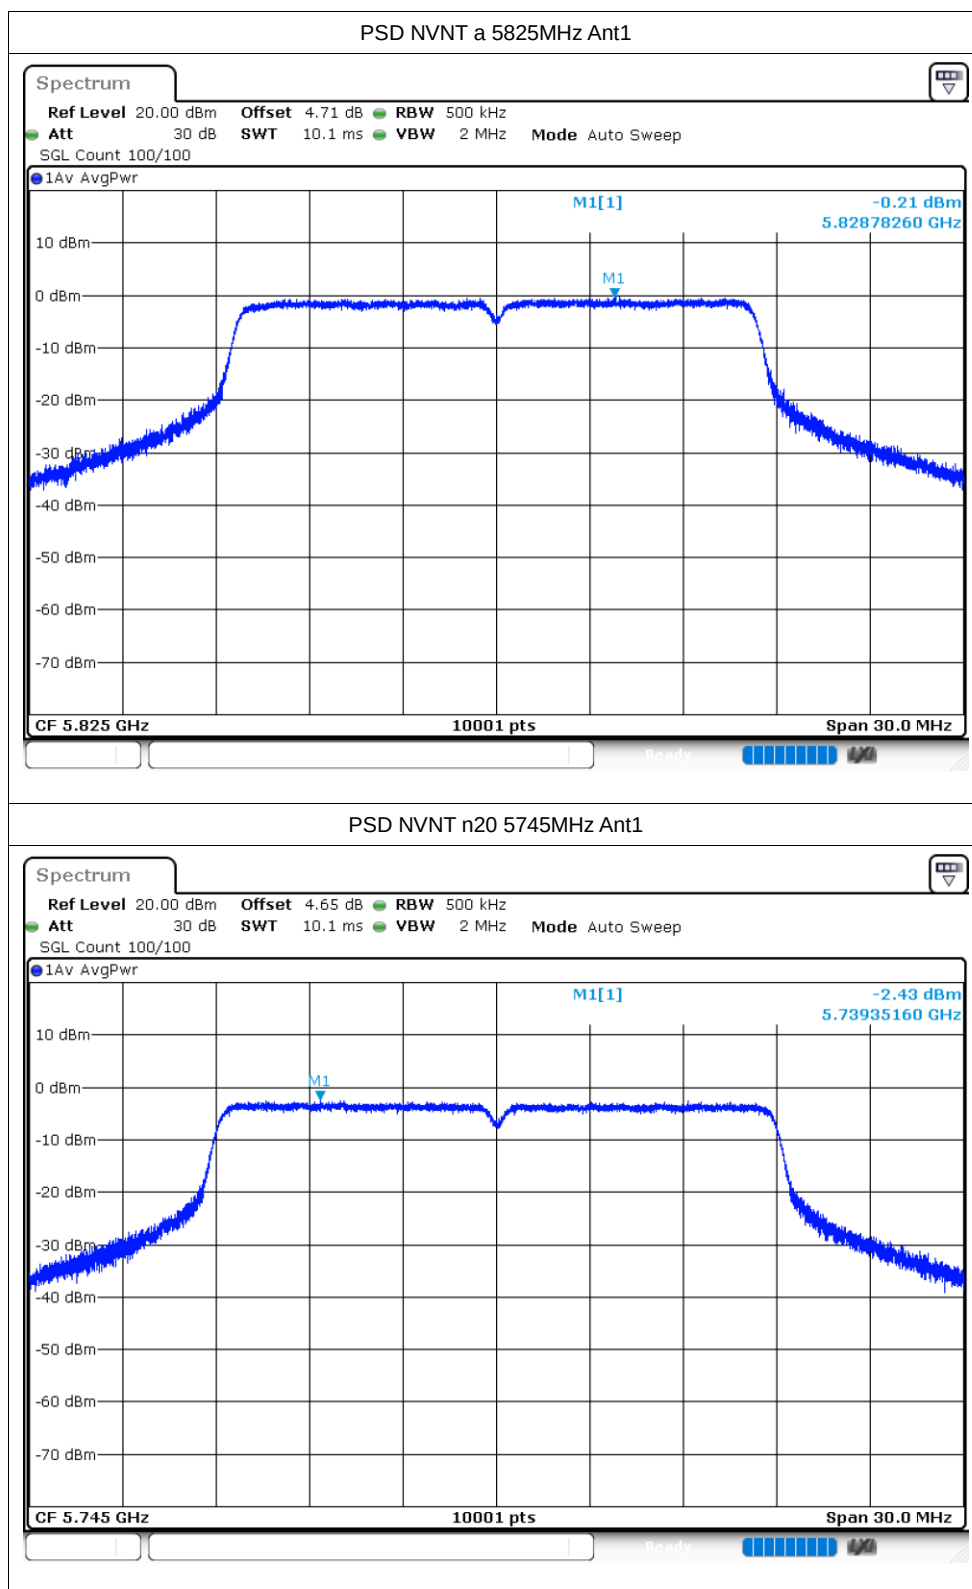


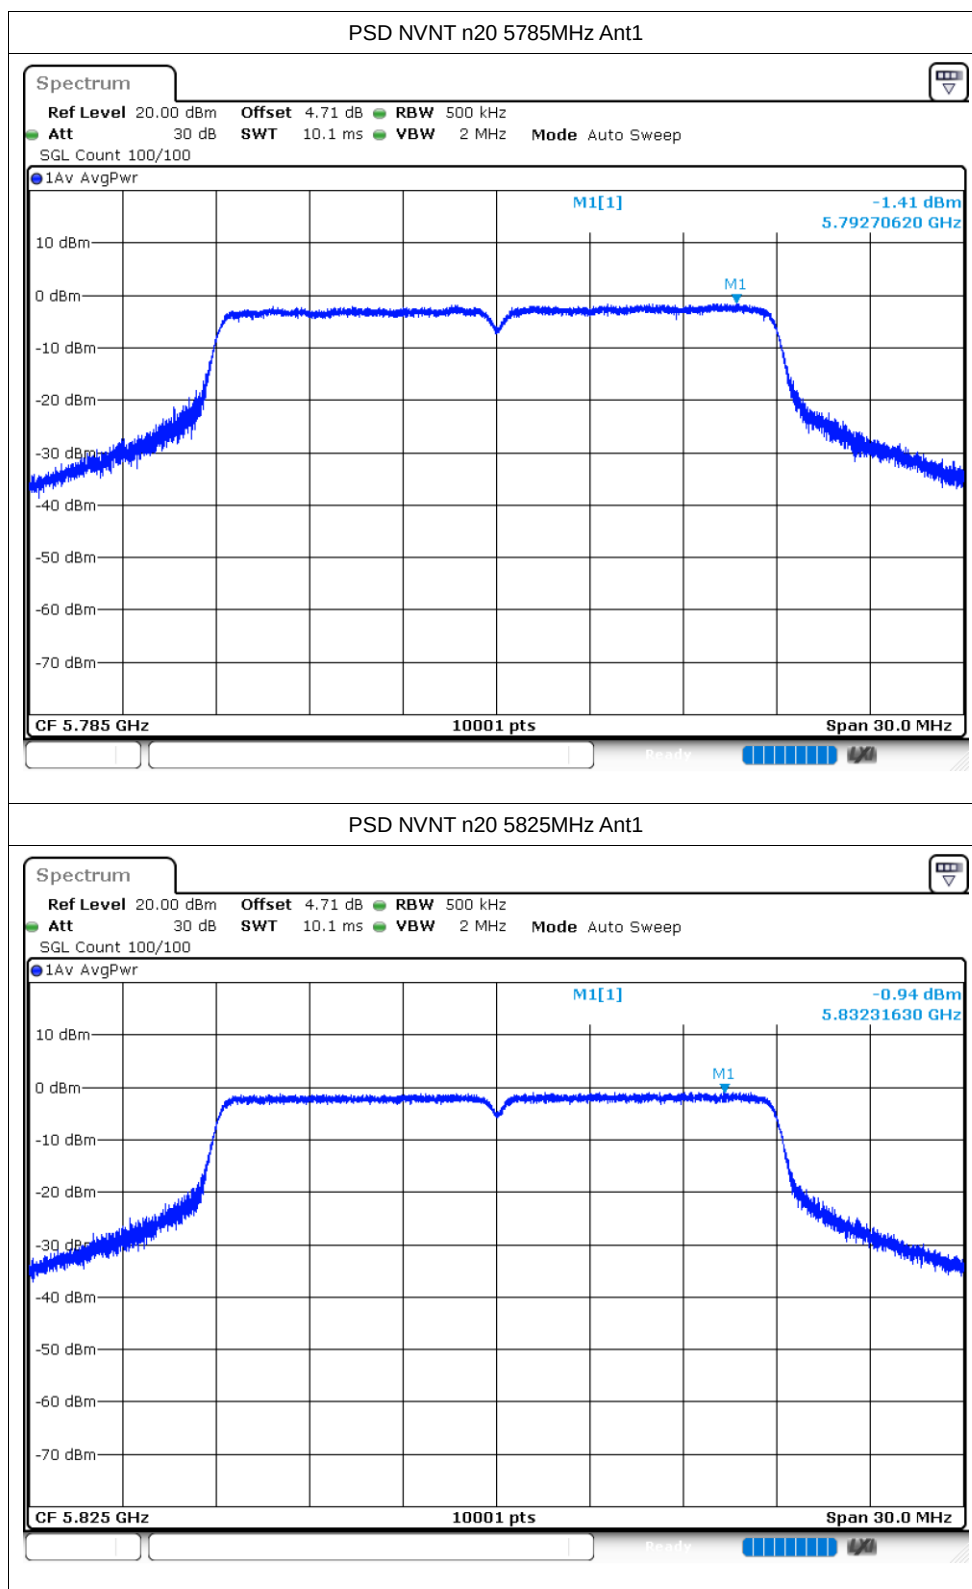


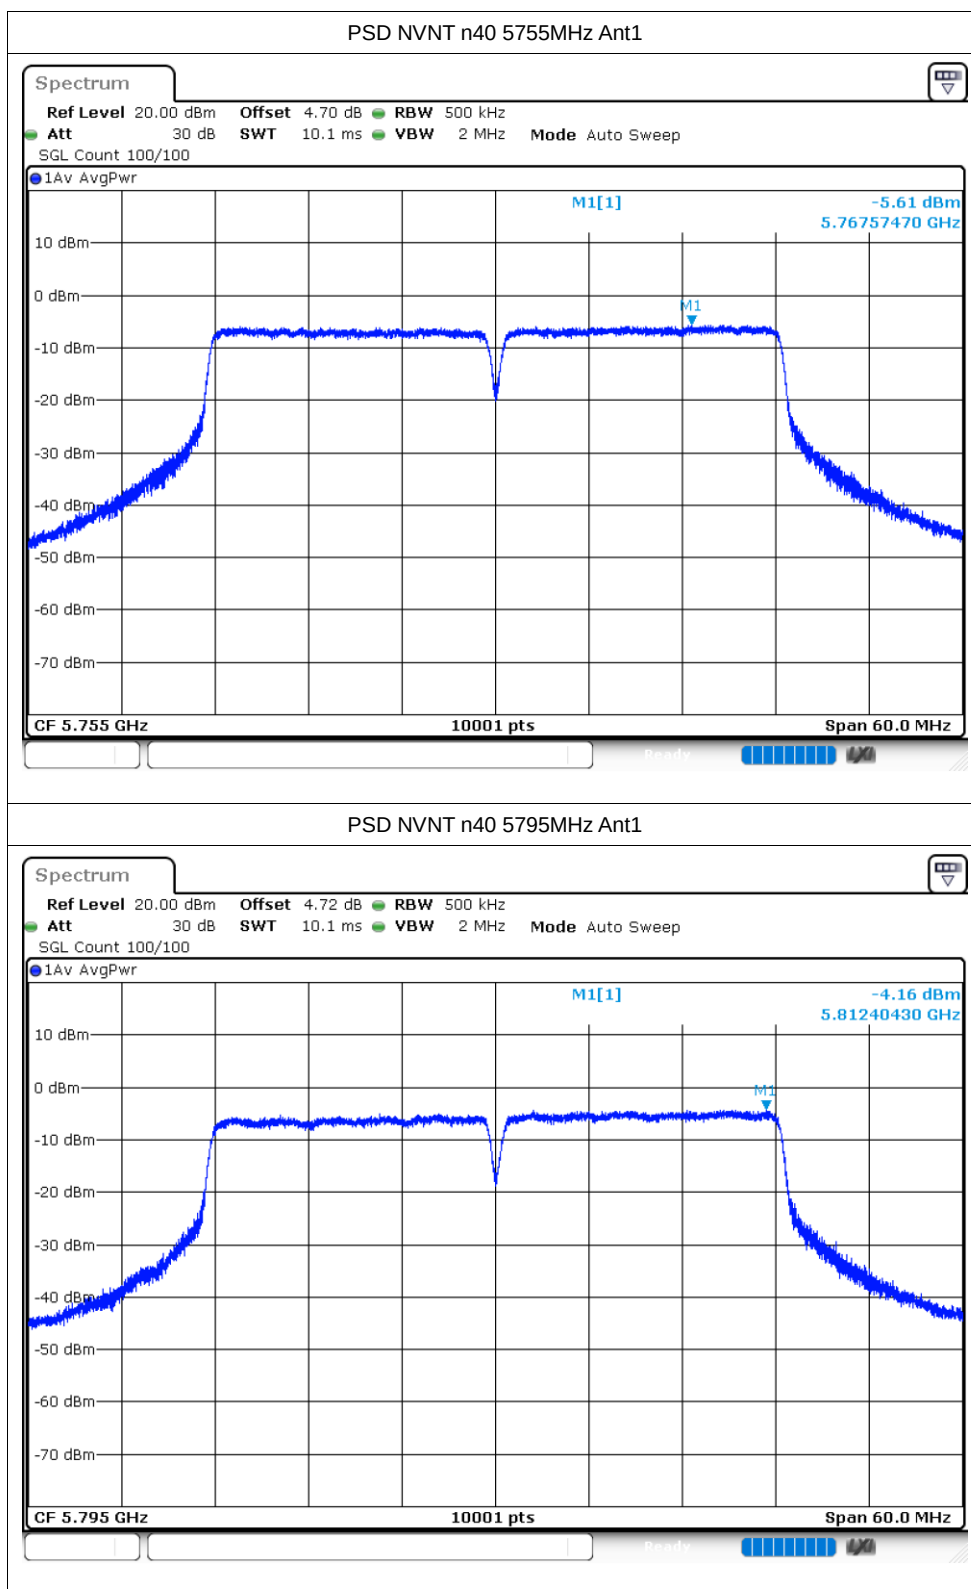


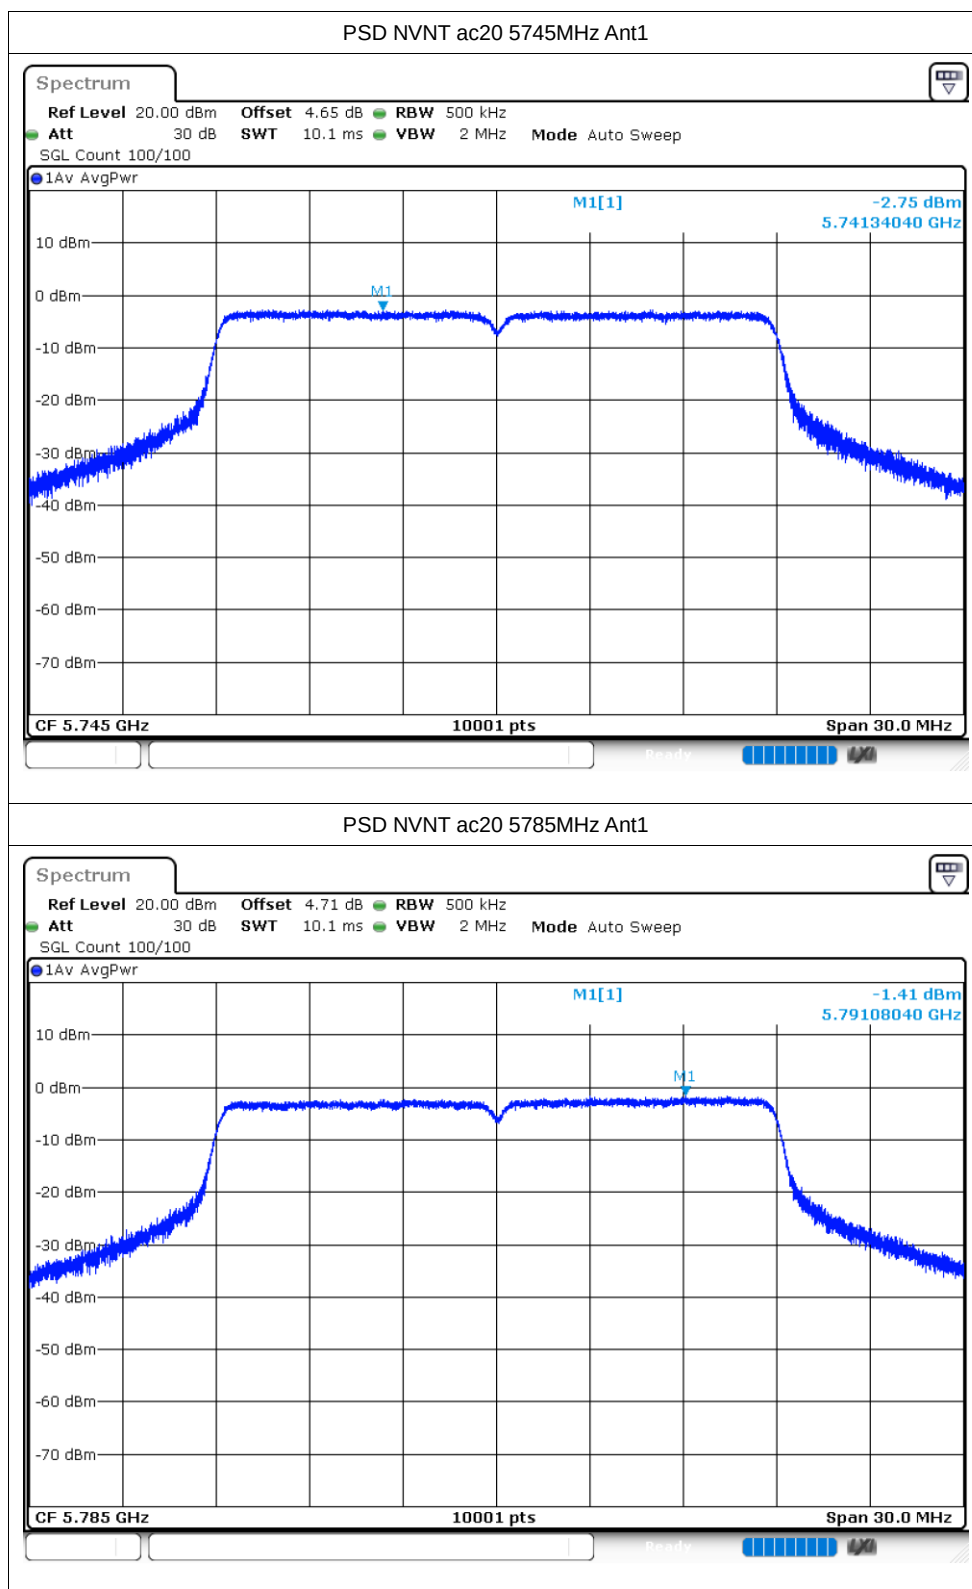

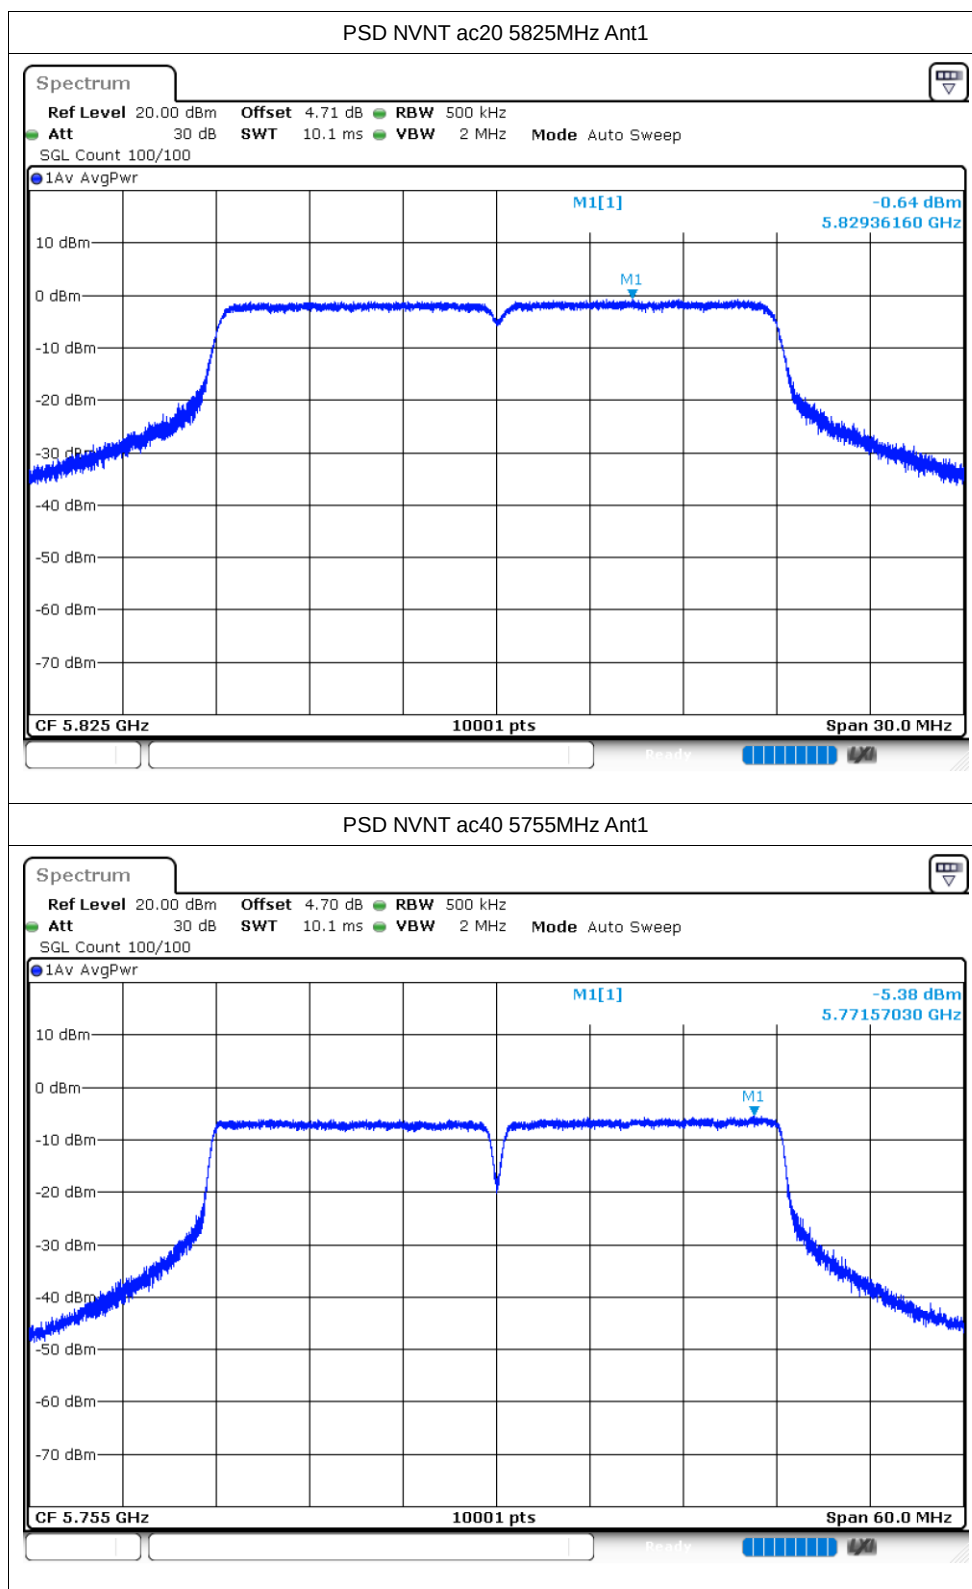

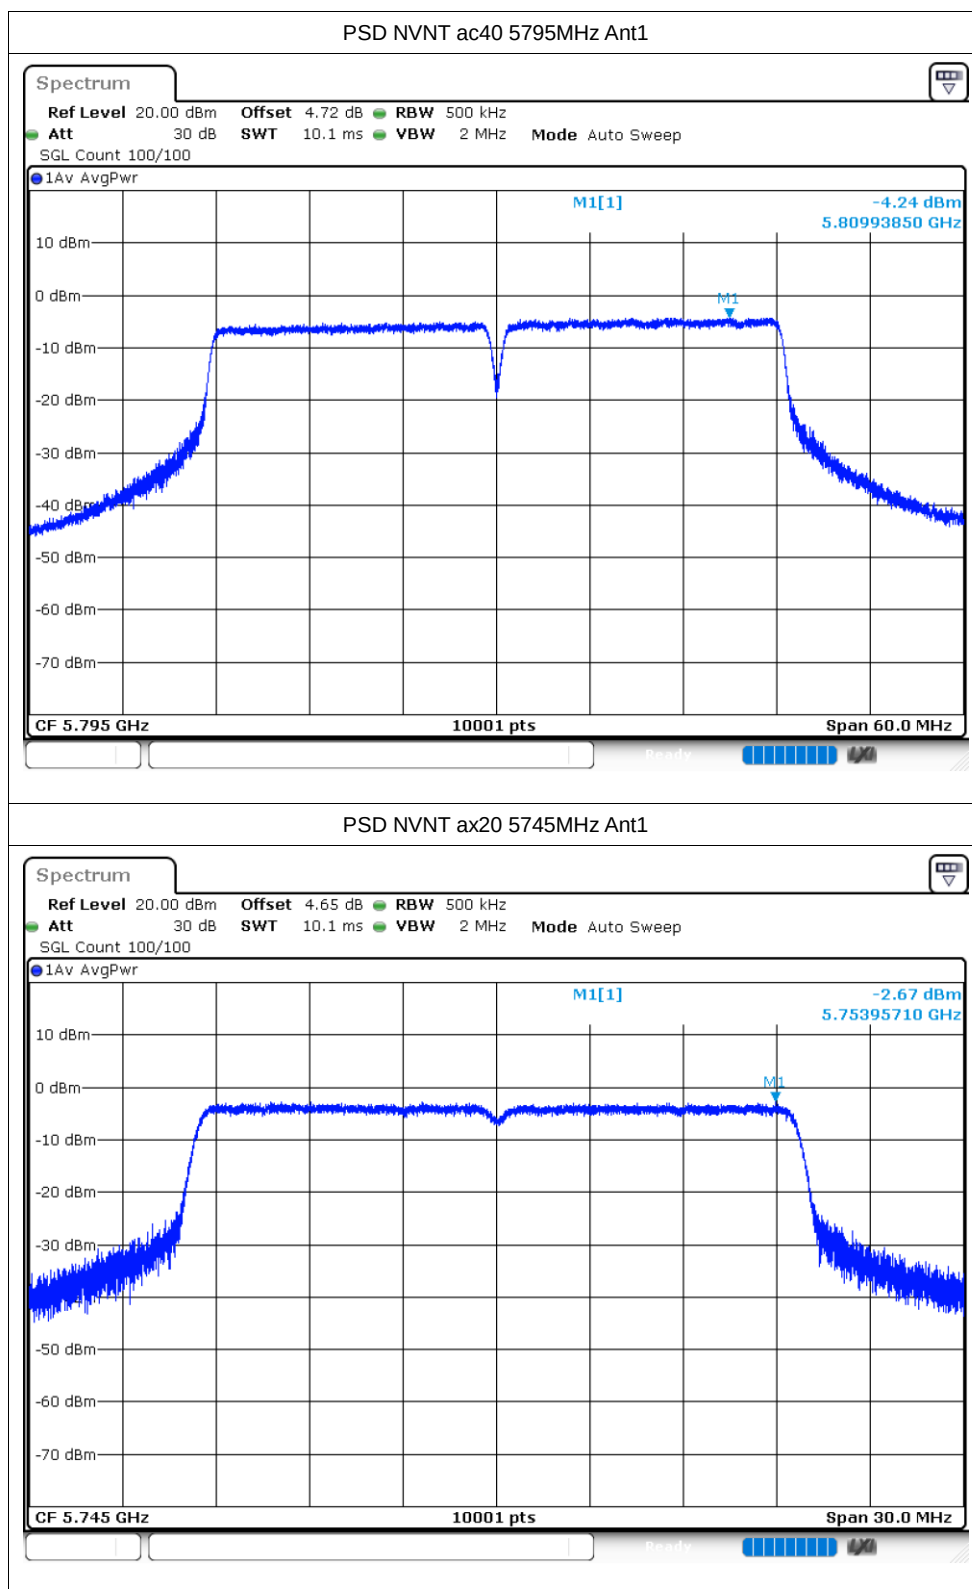

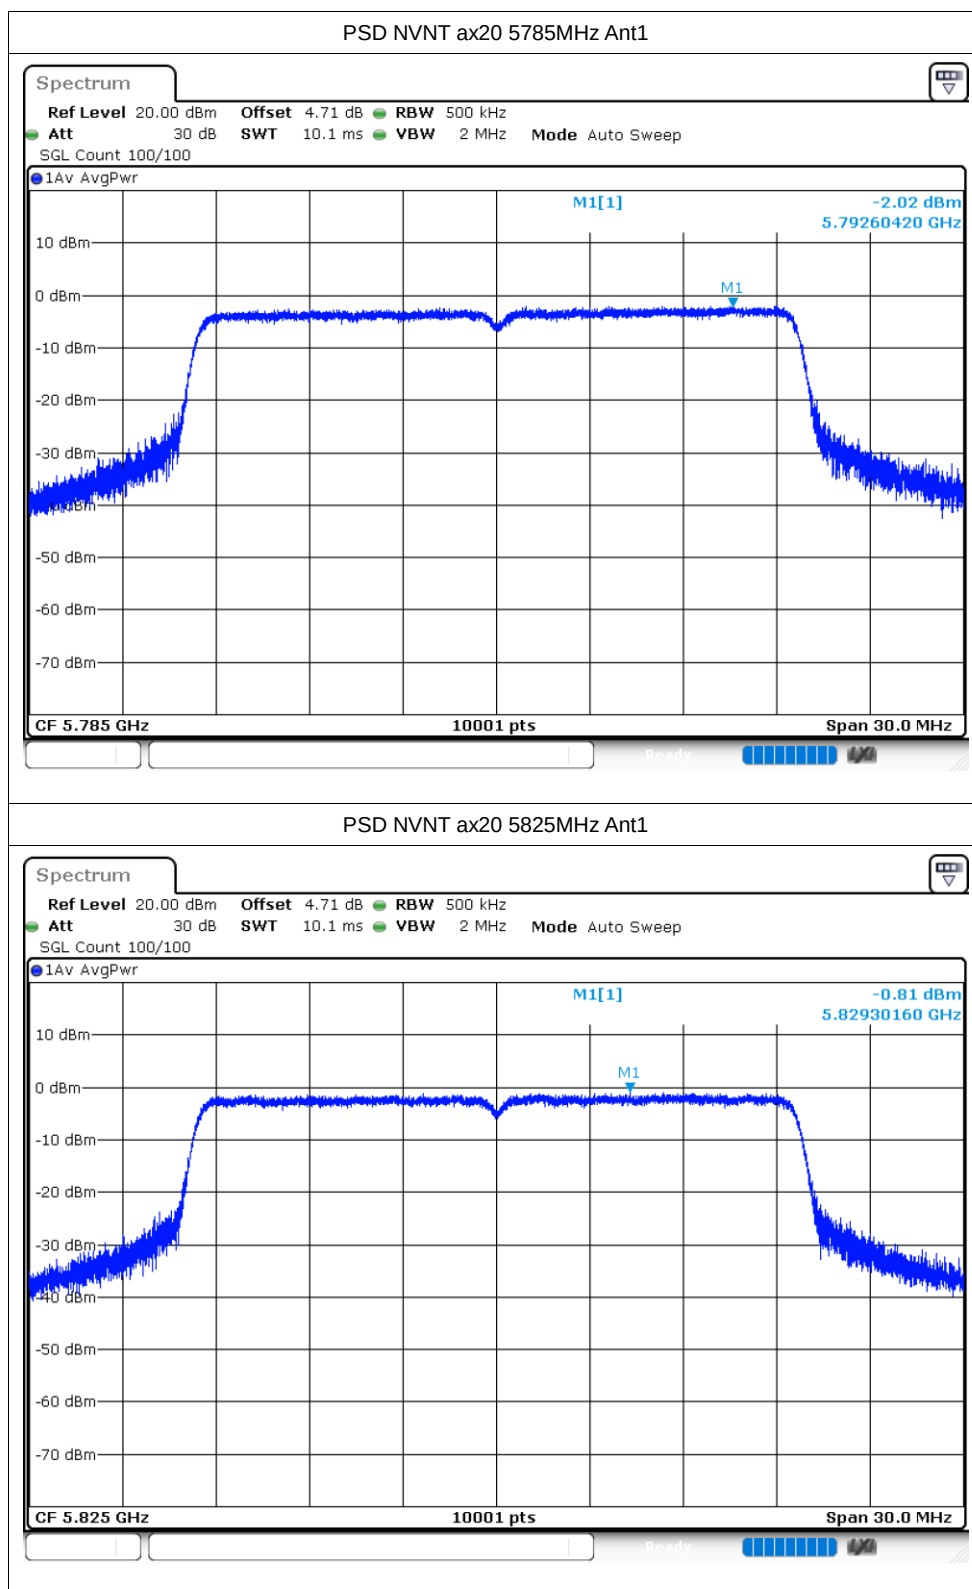

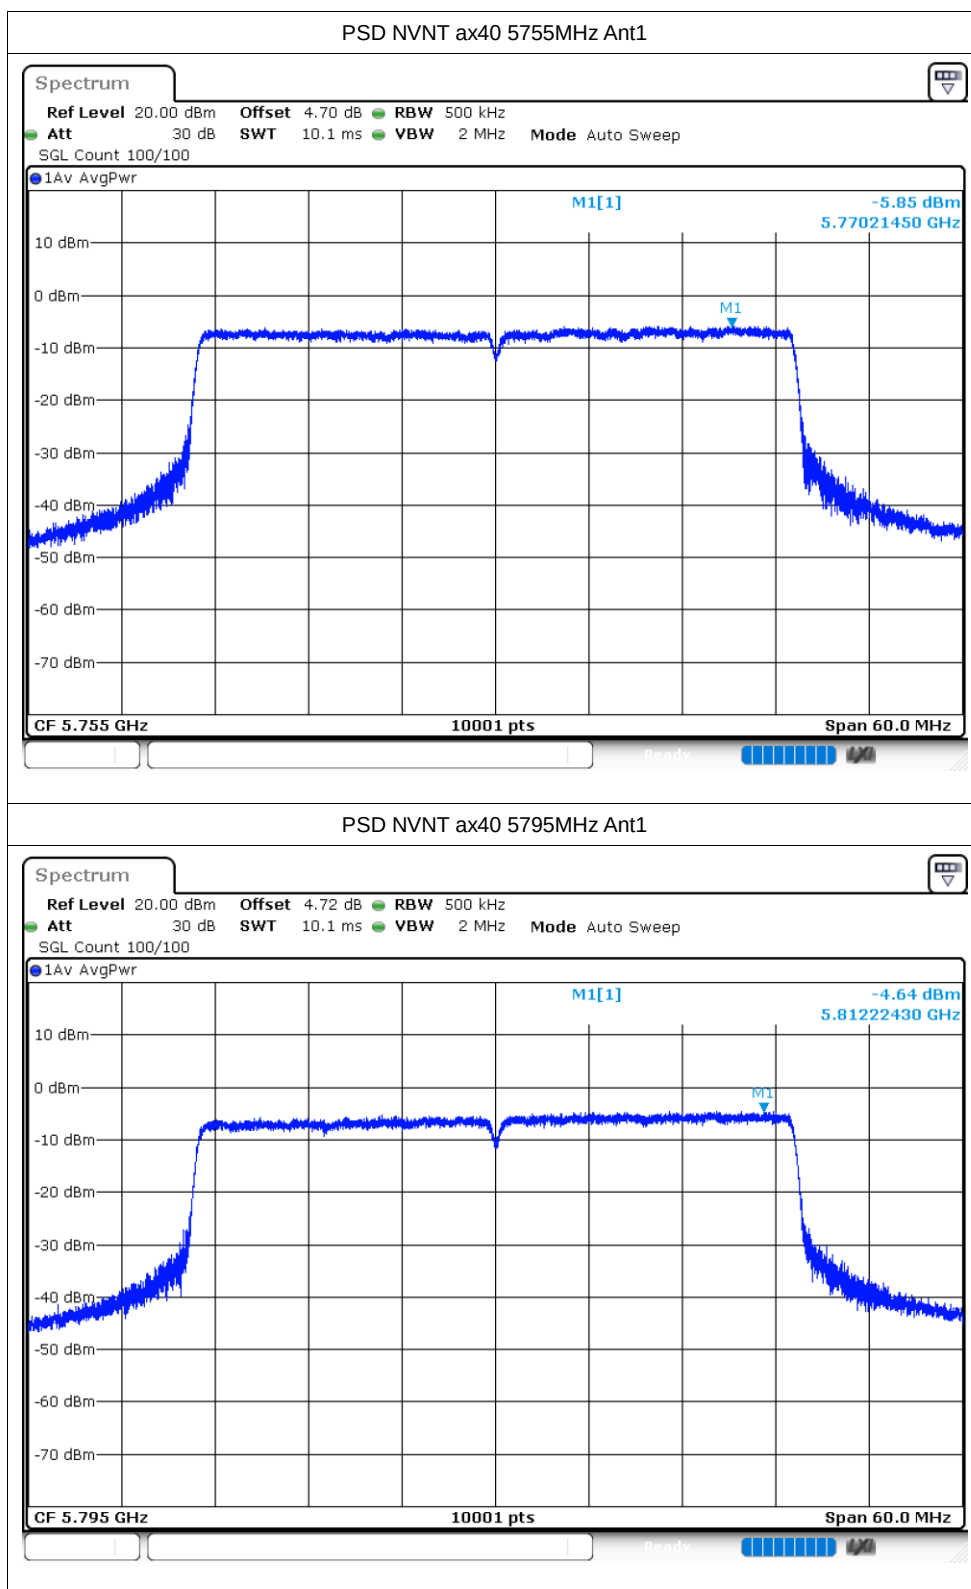


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-35.66	-27	Pass
NVNT	a	5825	Ant1	-33.93	-27	Pass
NVNT	n20	5745	Ant1	-35.68	-27	Pass
NVNT	n20	5825	Ant1	-34.34	-27	Pass
NVNT	n40	5755	Ant1	-35.88	-27	Pass
NVNT	n40	5795	Ant1	-34.17	-27	Pass
NVNT	ac20	5745	Ant1	-34.12	-26.08	Pass
NVNT	ac20	5825	Ant1	-33.88	-27	Pass
NVNT	ac40	5755	Ant1	-35.44	-27	Pass
NVNT	ac40	5795	Ant1	-32.91	-27	Pass
NVNT	ax20	5745	Ant1	-30.8	-27	Pass
NVNT	ax20	5825	Ant1	-30.33	-27	Pass
NVNT	ax40	5755	Ant1	-31.01	-27	Pass
NVNT	ax40	5795	Ant1	-30.22	-27	Pass


Test Graphs


Band Edge NVNT a 5745MHz Low Ant1

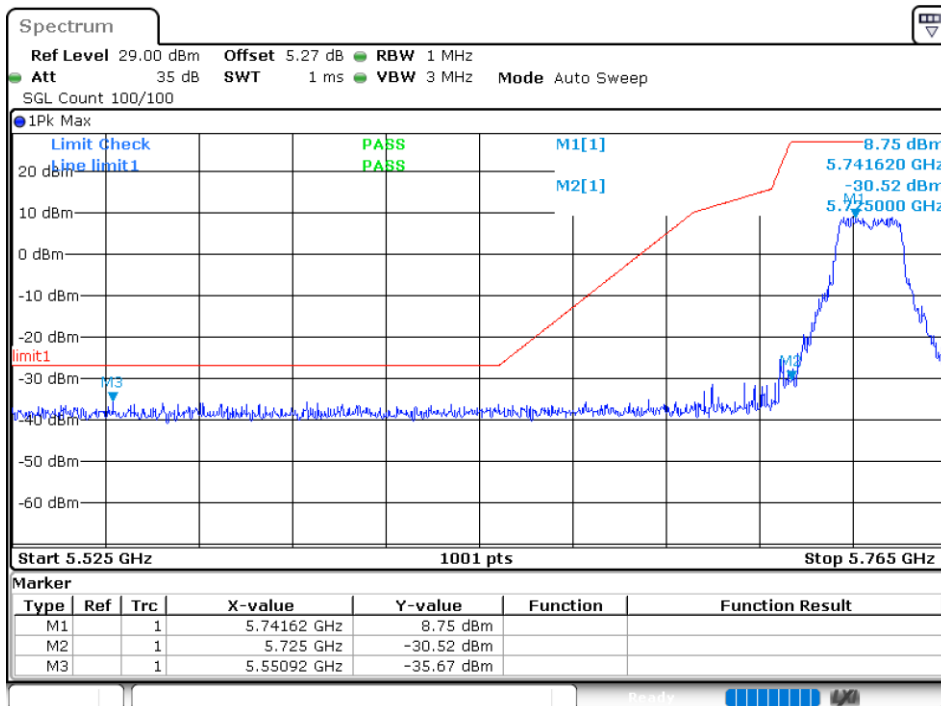



Band Edge NVNT a 5825MHz High Ant1

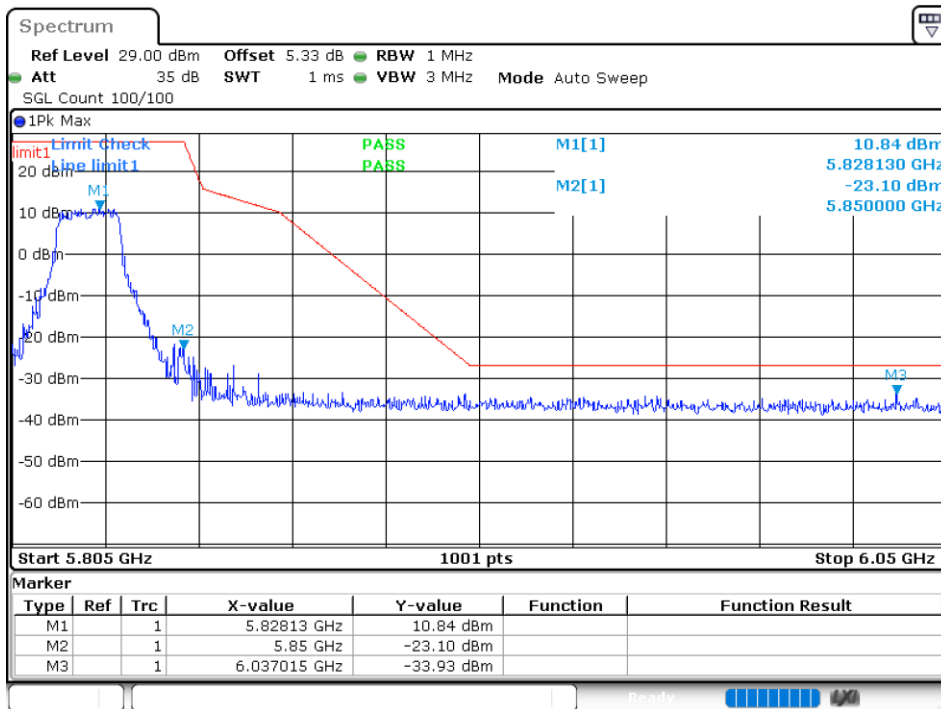


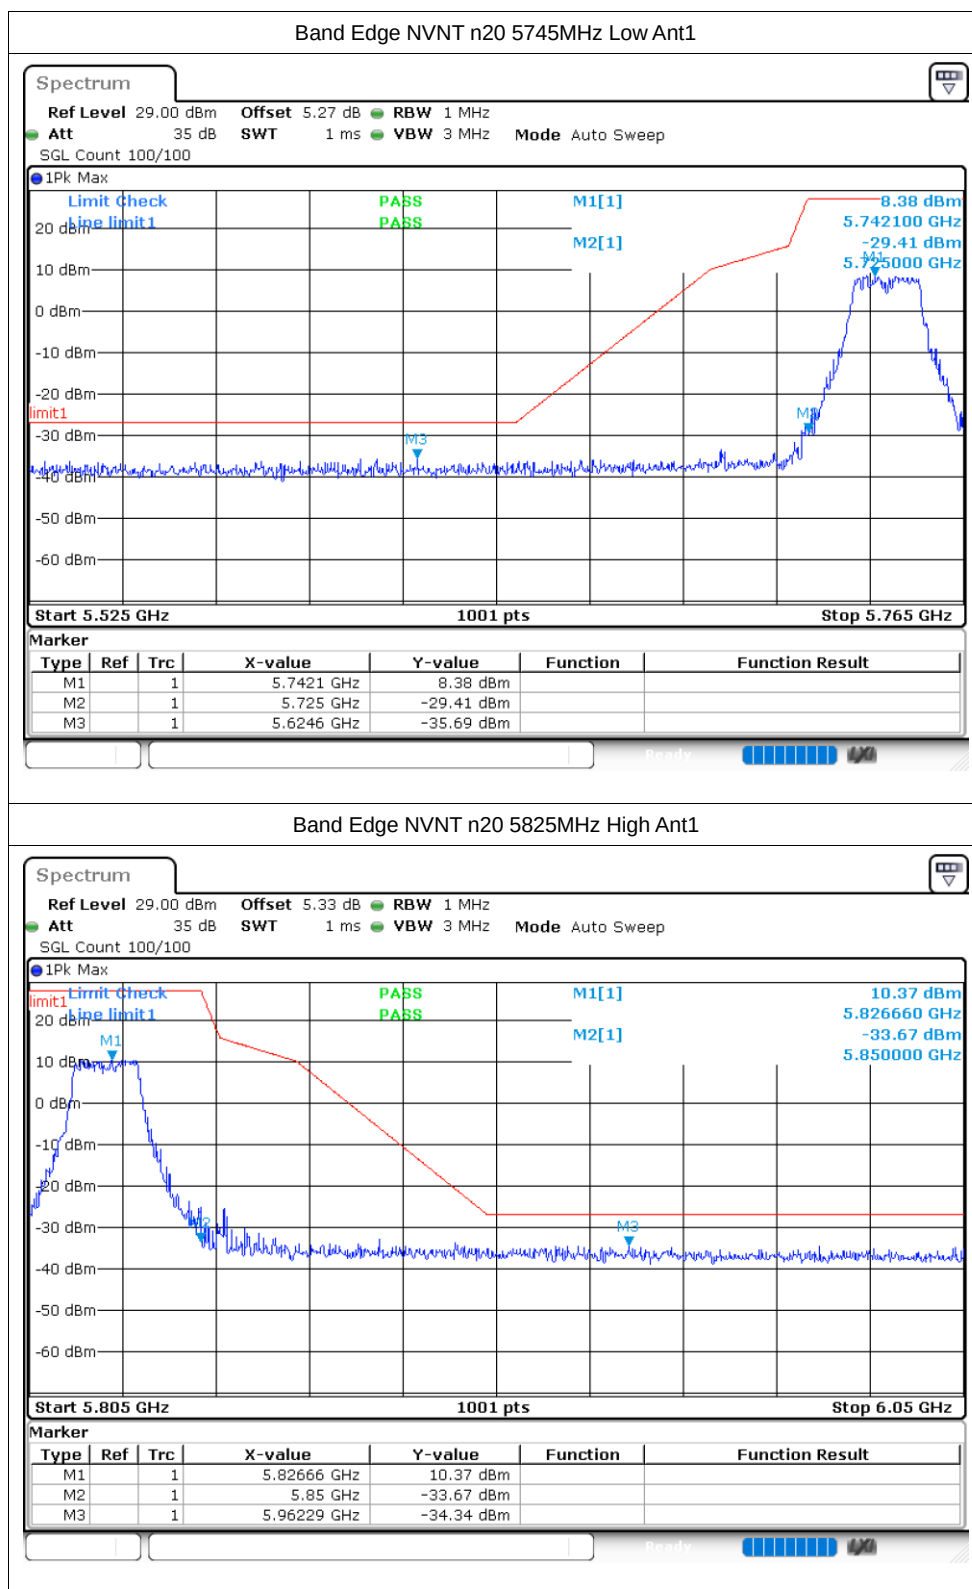


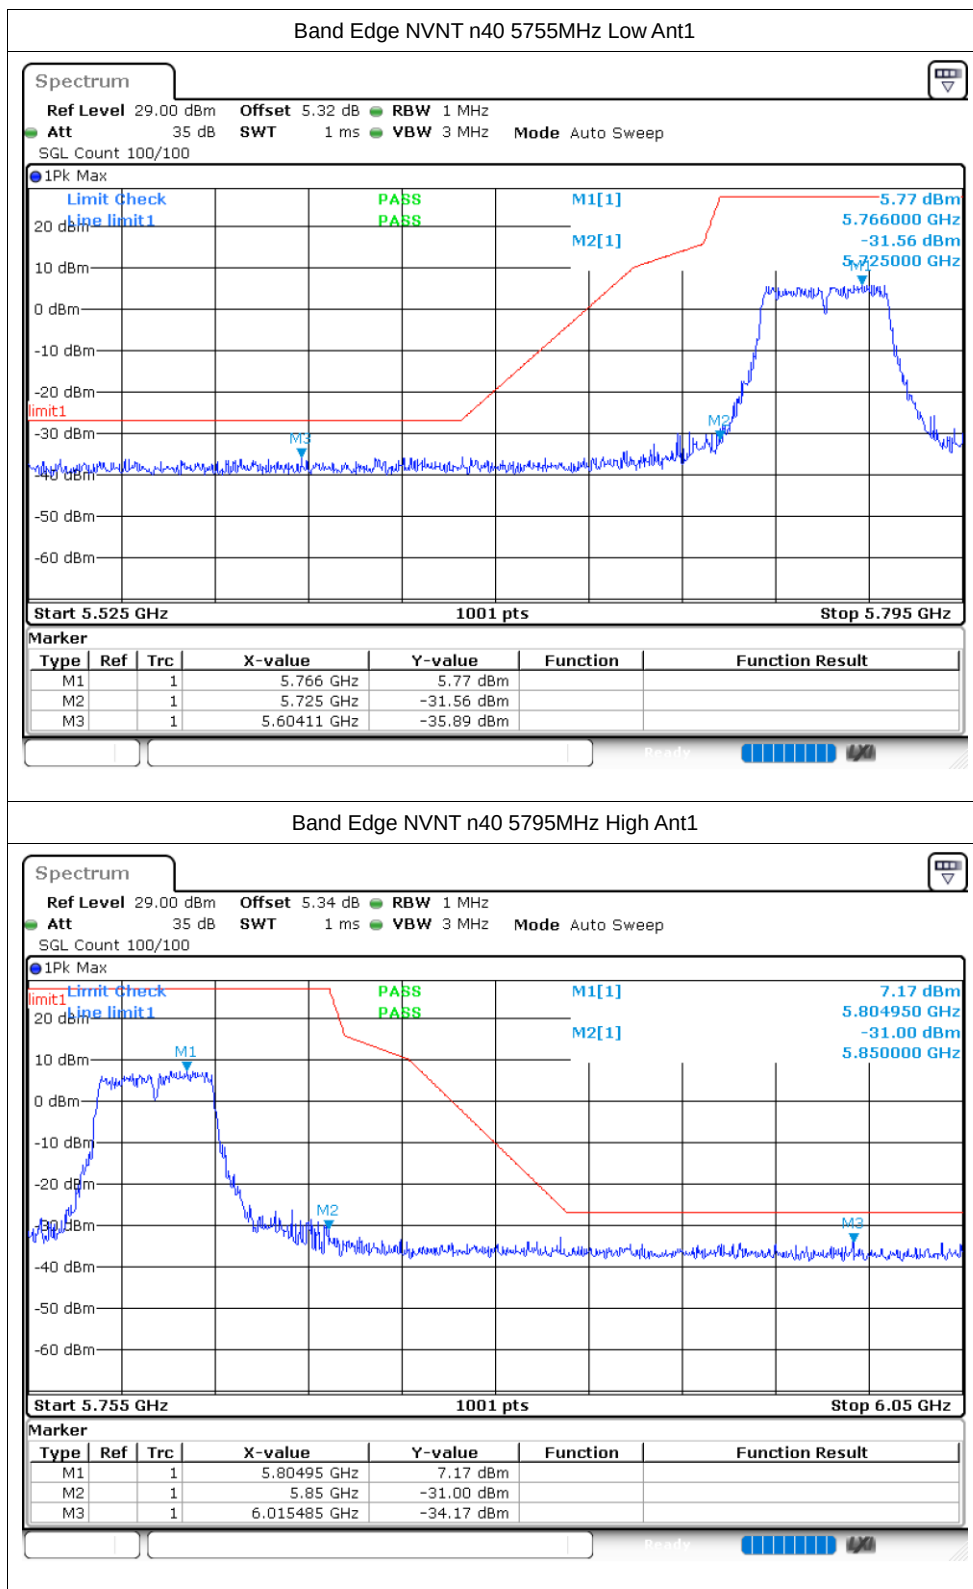

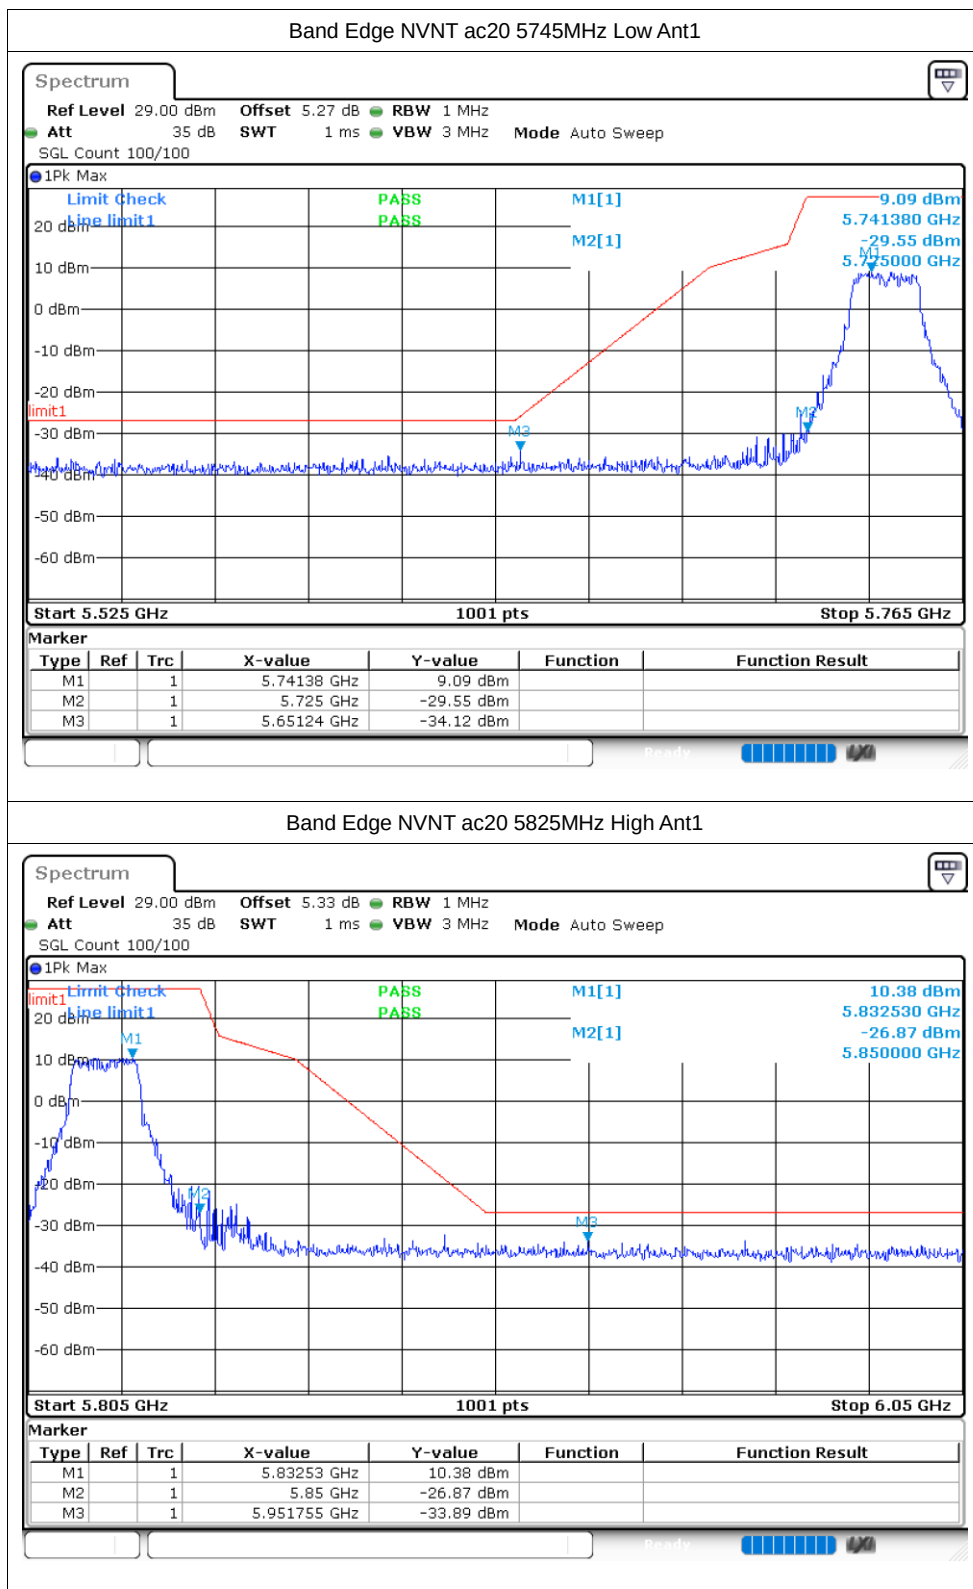

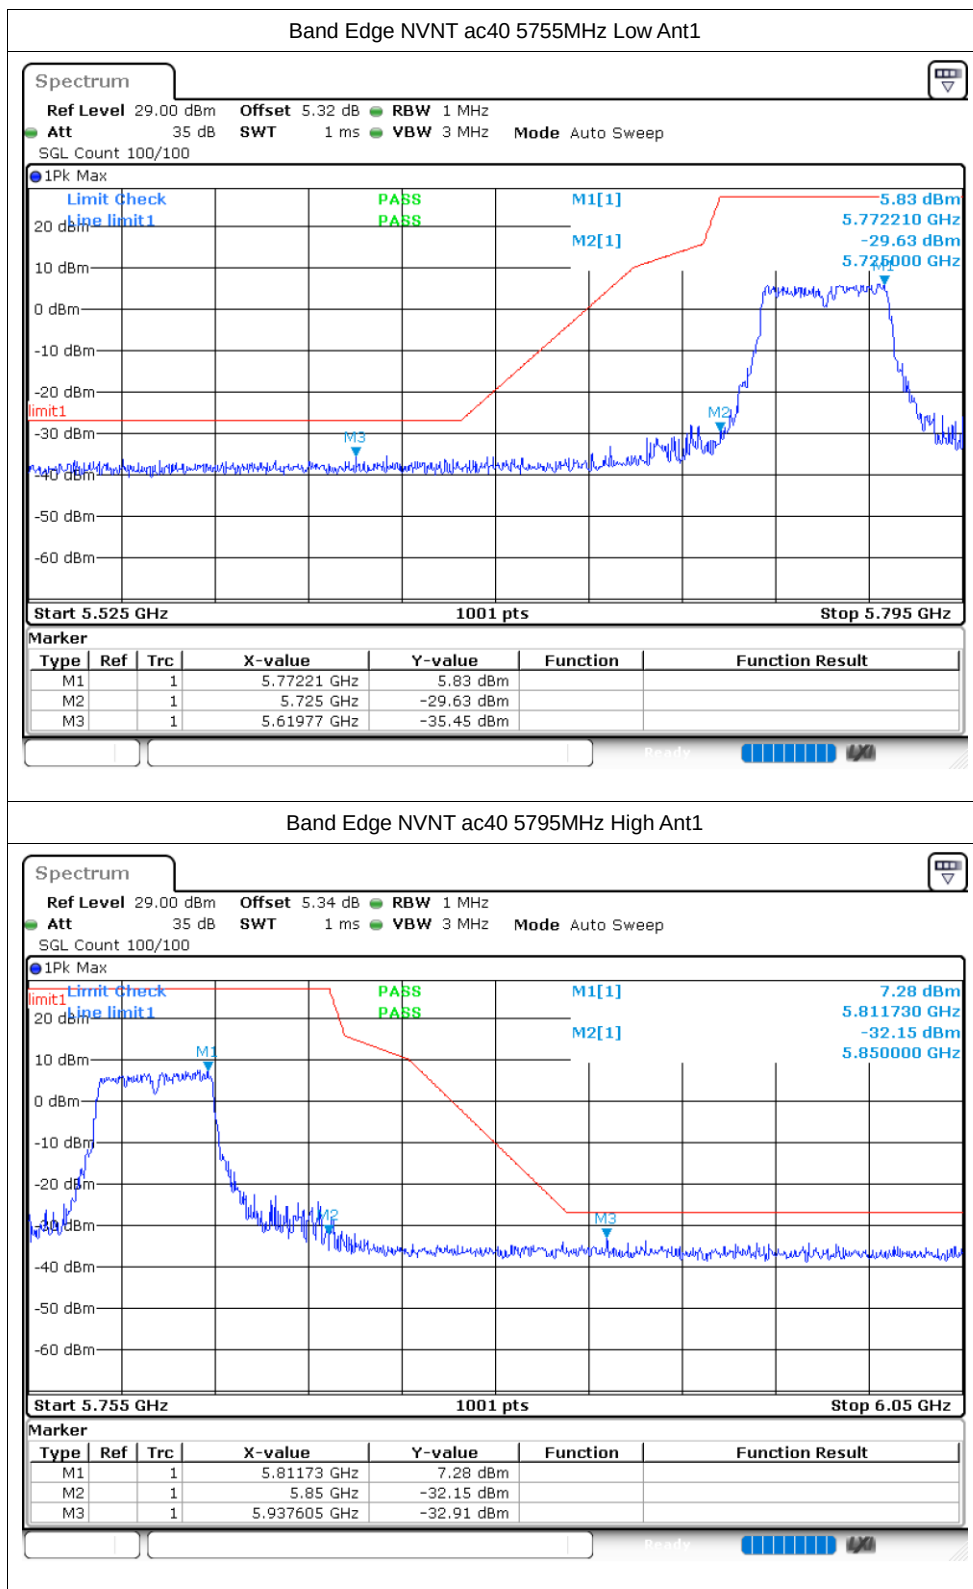

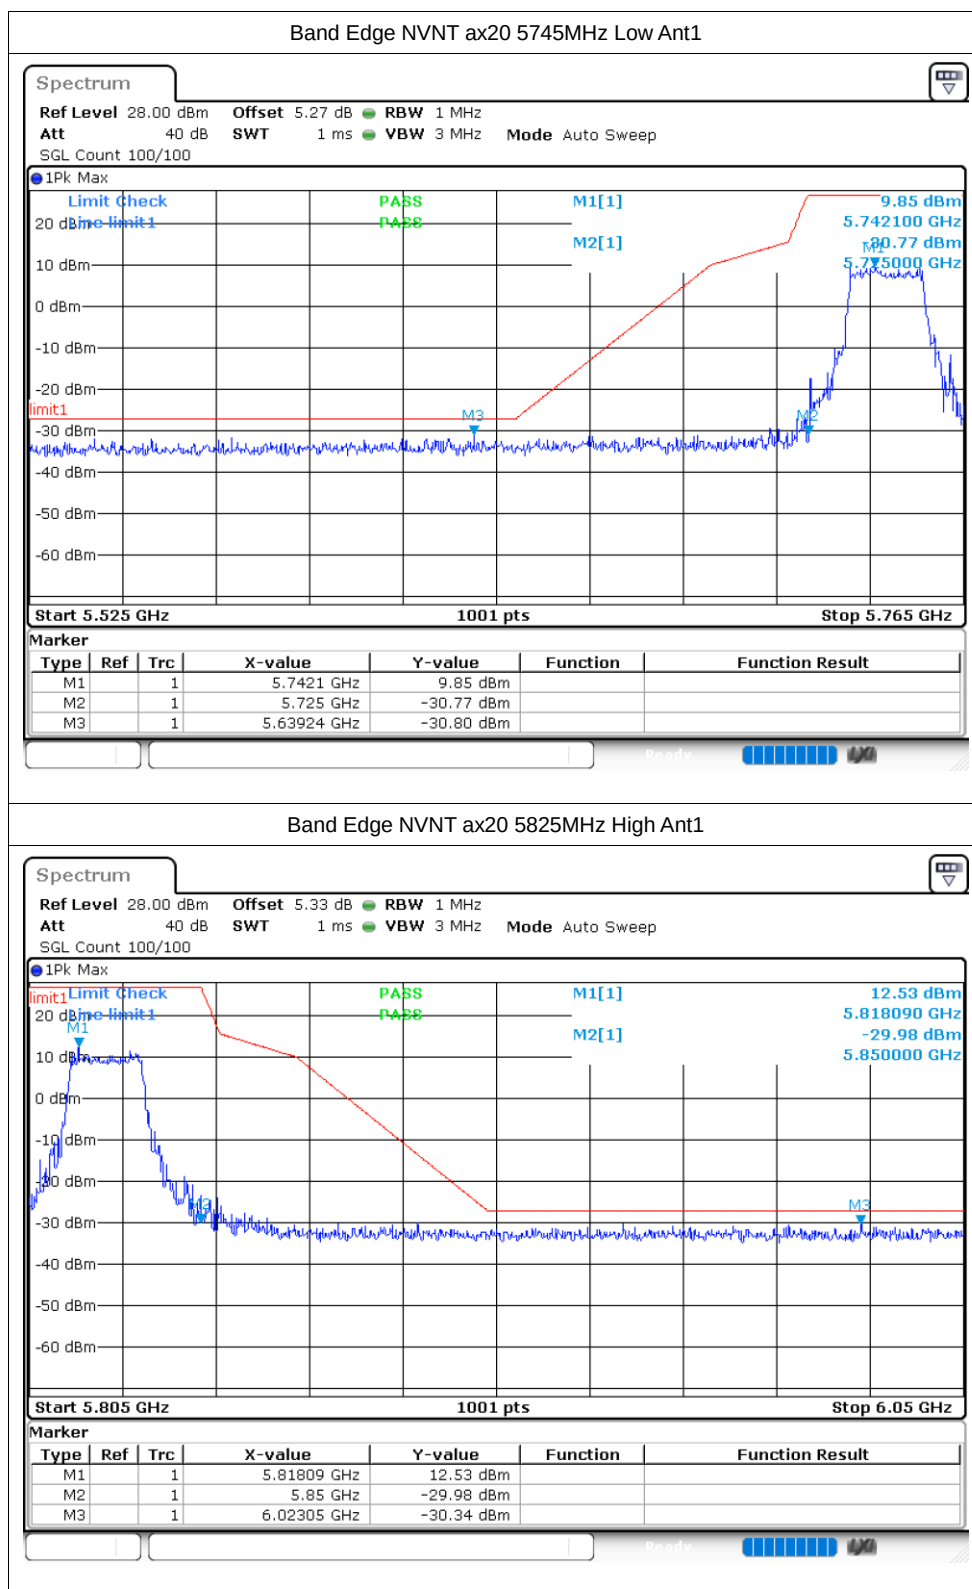

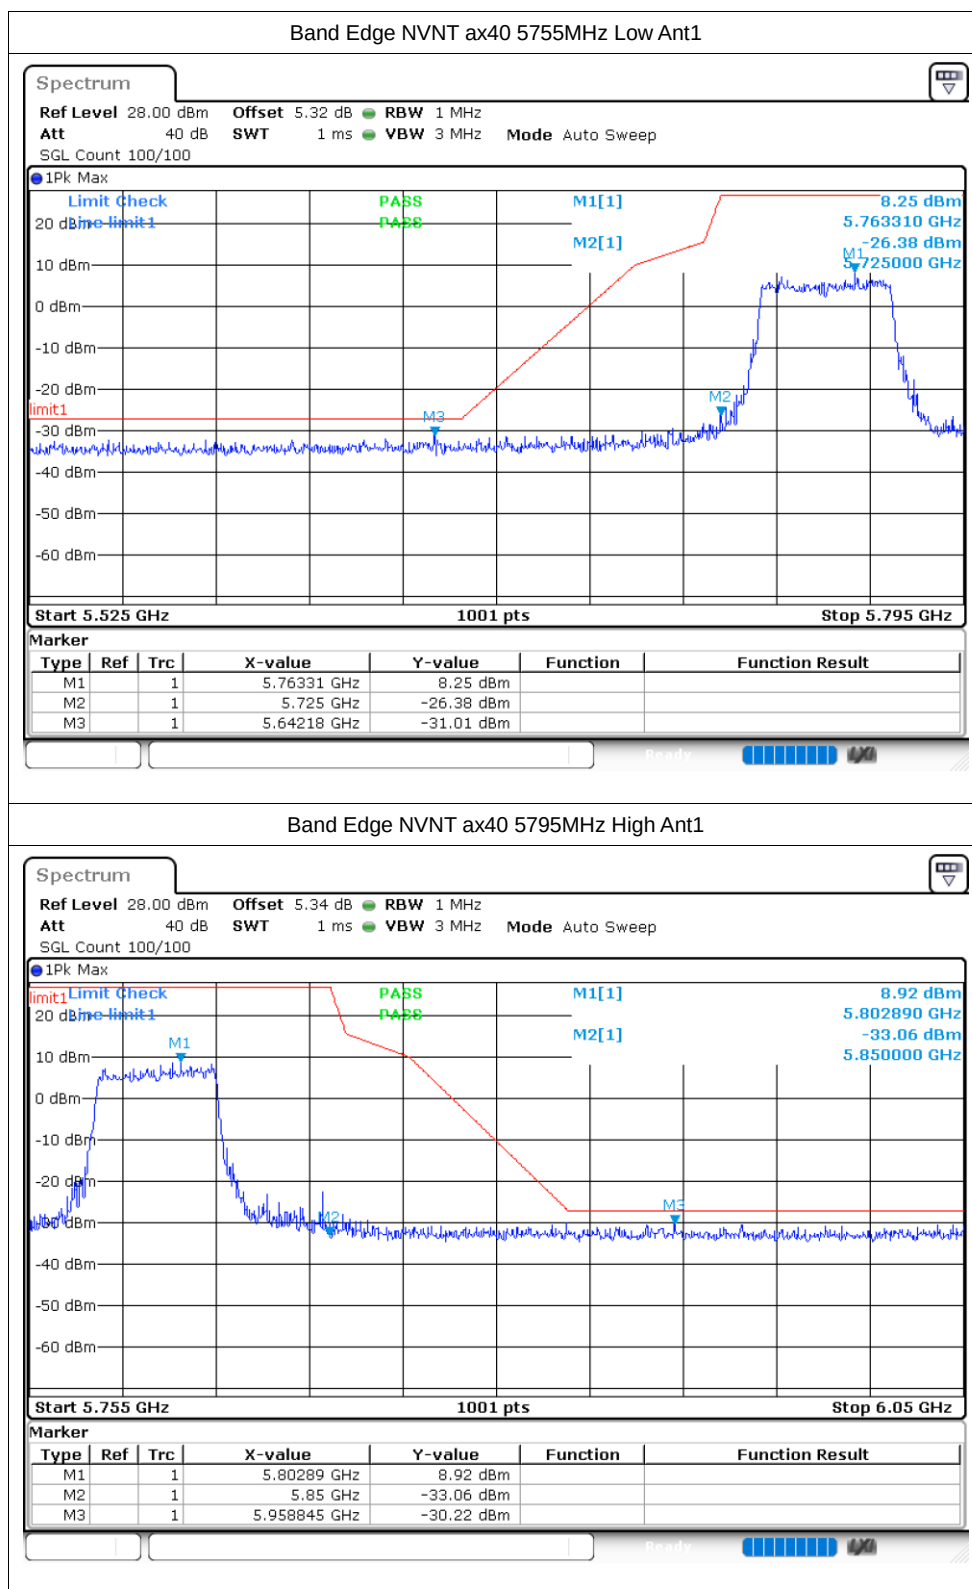

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5745	Ant1	-35.57	-27	Pass
NVNT	a	5785	Ant1	-35.26	-27	Pass
NVNT	a	5825	Ant1	-35.88	-27	Pass
NVNT	n20	5745	Ant1	-35.47	-27	Pass
NVNT	n20	5785	Ant1	-35.62	-27	Pass
NVNT	n20	5825	Ant1	-35.5	-27	Pass
NVNT	n40	5755	Ant1	-35.54	-27	Pass
NVNT	n40	5795	Ant1	-35.58	-27	Pass
NVNT	ac20	5745	Ant1	-35.76	-27	Pass
NVNT	ac20	5785	Ant1	-35.87	-27	Pass
NVNT	ac20	5825	Ant1	-35.63	-27	Pass
NVNT	ac40	5755	Ant1	-34.68	-27	Pass
NVNT	ac40	5795	Ant1	-34.8	-27	Pass
NVNT	ax20	5745	Ant1	-36.12	-27	Pass
NVNT	ax20	5785	Ant1	-35.27	-27	Pass
NVNT	ax20	5825	Ant1	-35.25	-27	Pass
NVNT	ax40	5755	Ant1	-35	-27	Pass
NVNT	ax40	5795	Ant1	-34.61	-27	Pass

