



Duty Cycle



Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5745	1.392	1.438	96.8	0.14	0.72	0.31
NVNT	a	5785	1.392	1.436	96.94	0.13	0.72	0.34
NVNT	a	5825	1.392	1.436	96.94	0.13	0.72	0.33
NVNT	n20	5745	1.3	1.346	96.58	0.15	0.77	0.20
NVNT	n20	5785	1.3	1.346	96.58	0.15	0.77	0.22
NVNT	n20	5825	1.3	1.344	96.73	0.14	0.77	0.23
NVNT	n40	5755	0.648	0.692	93.64	0.29	1.54	0.23
NVNT	n40	5795	0.648	0.692	93.64	0.29	1.54	0.24
NVNT	ac20	5745	1.311	1.356	96.68	0.15	0.76	0.22
NVNT	ac20	5785	1.314	1.356	96.9	0.14	0.76	0.25
NVNT	ac20	5825	1.314	1.356	96.9	0.14	0.76	0.21
NVNT	ac40	5755	0.652	0.696	93.68	0.28	1.53	0.20
NVNT	ac40	5795	0.652	0.696	93.68	0.28	1.53	0.25
NVNT	ac80	5775	0.326	0.37	88.11	0.55	3.07	0.25

Duty Cycle NVNT a 5825MHz

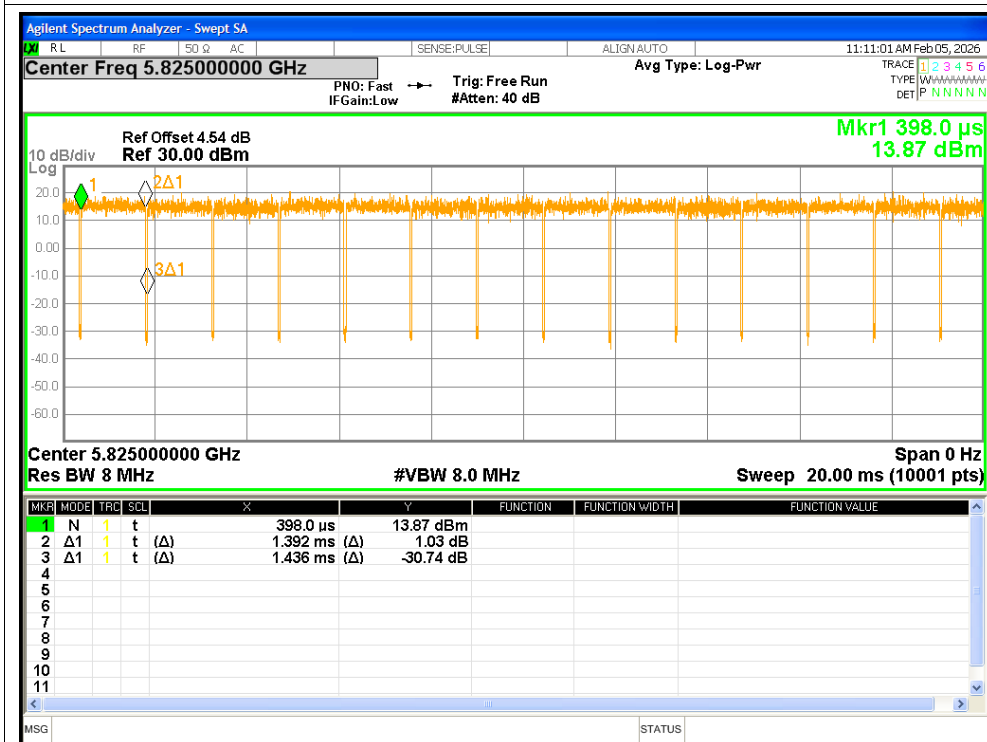


Duty Cycle NVNT n20 5745MHz

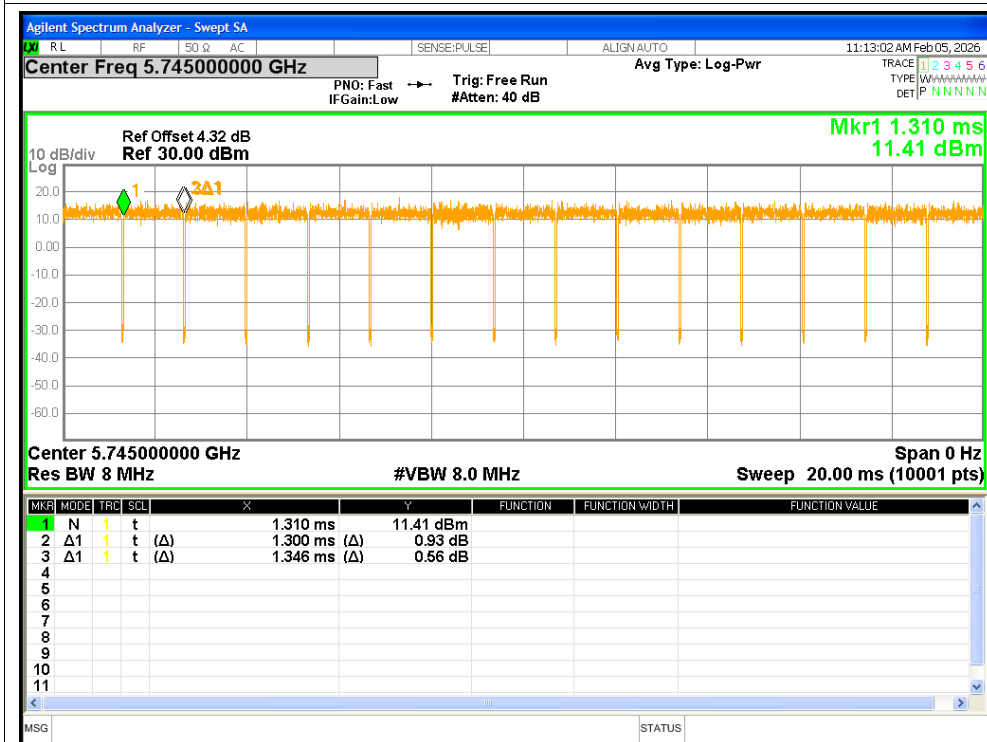


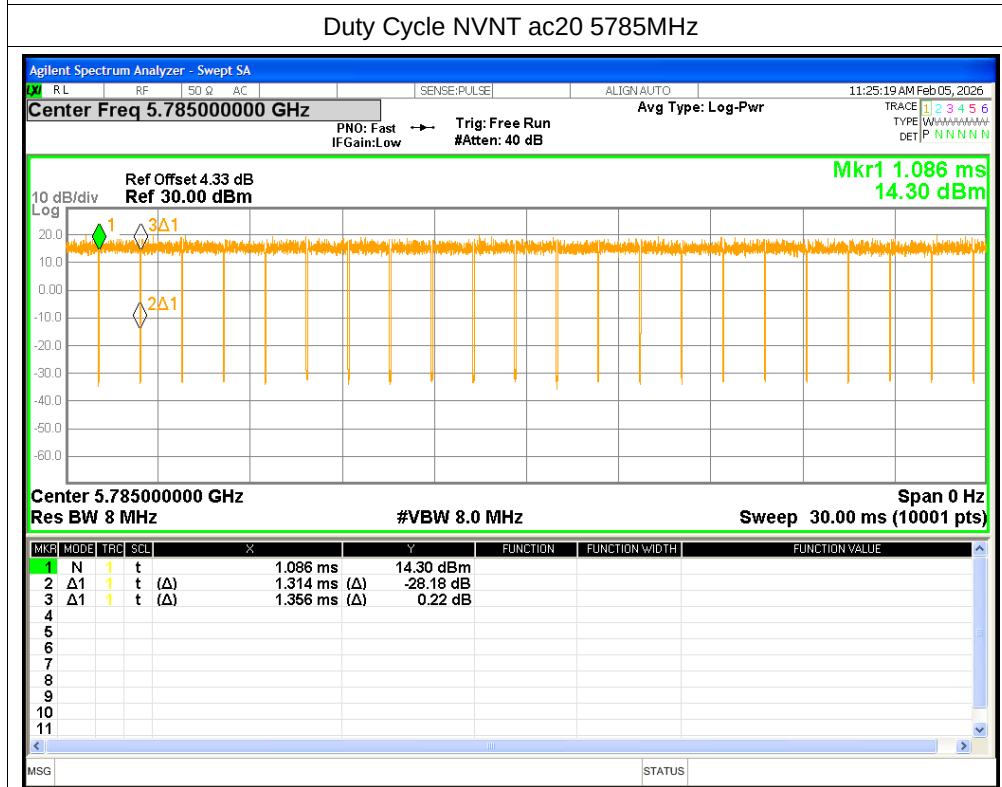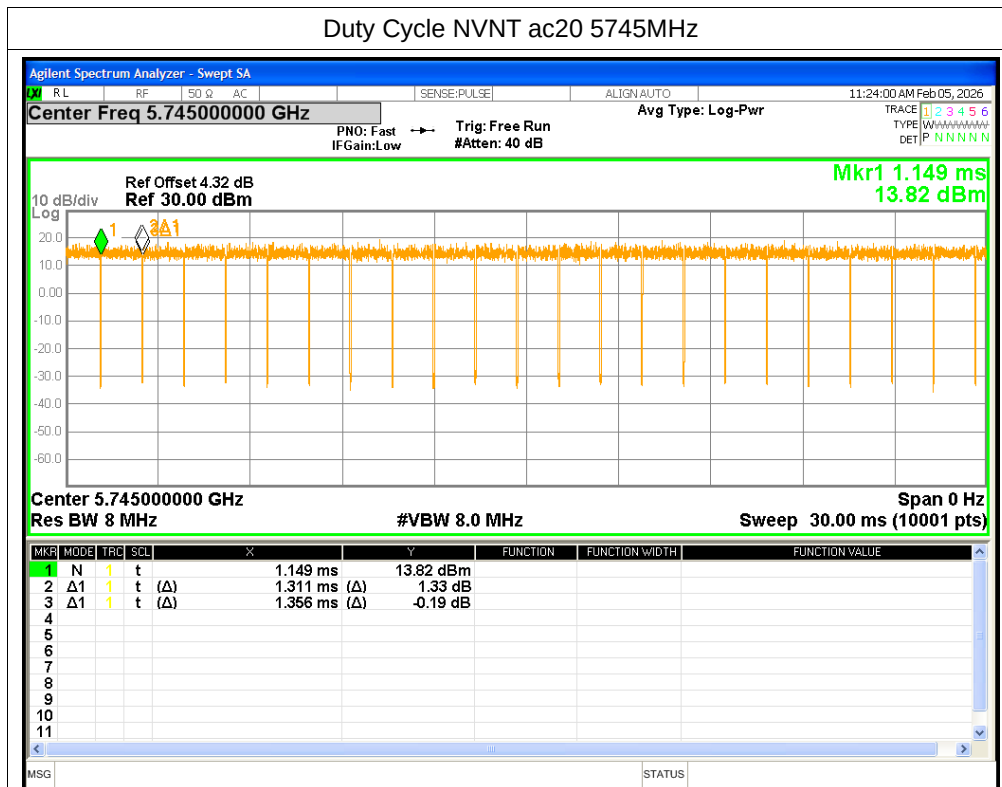

Duty Cycle NVNT ac40 5795MHz

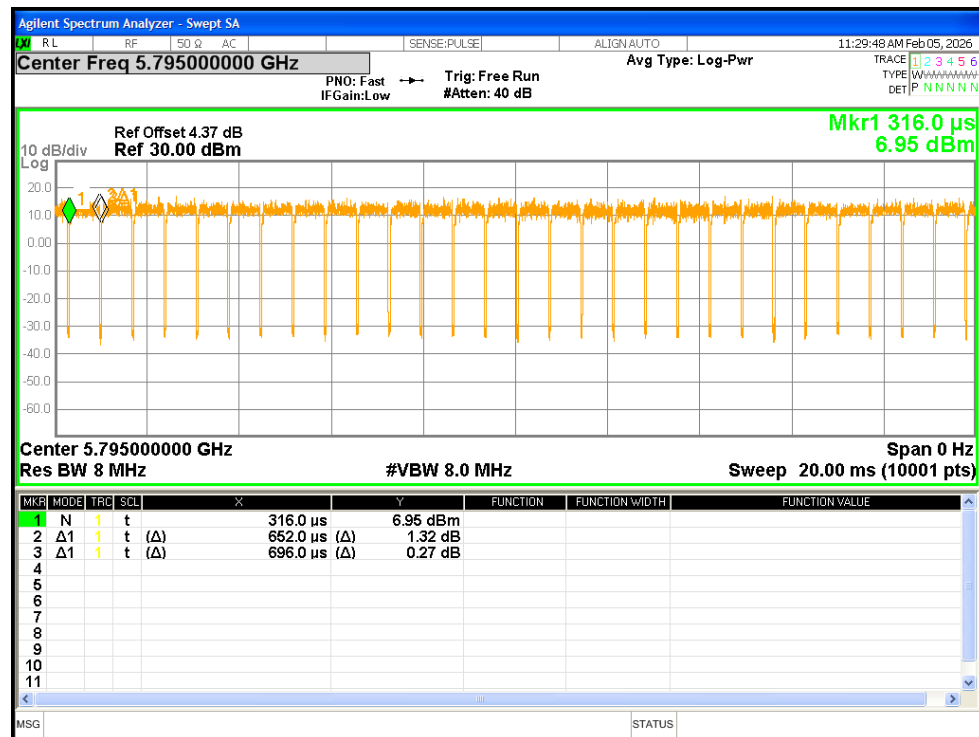

Duty Cycle NVNT ac80 5775MHz

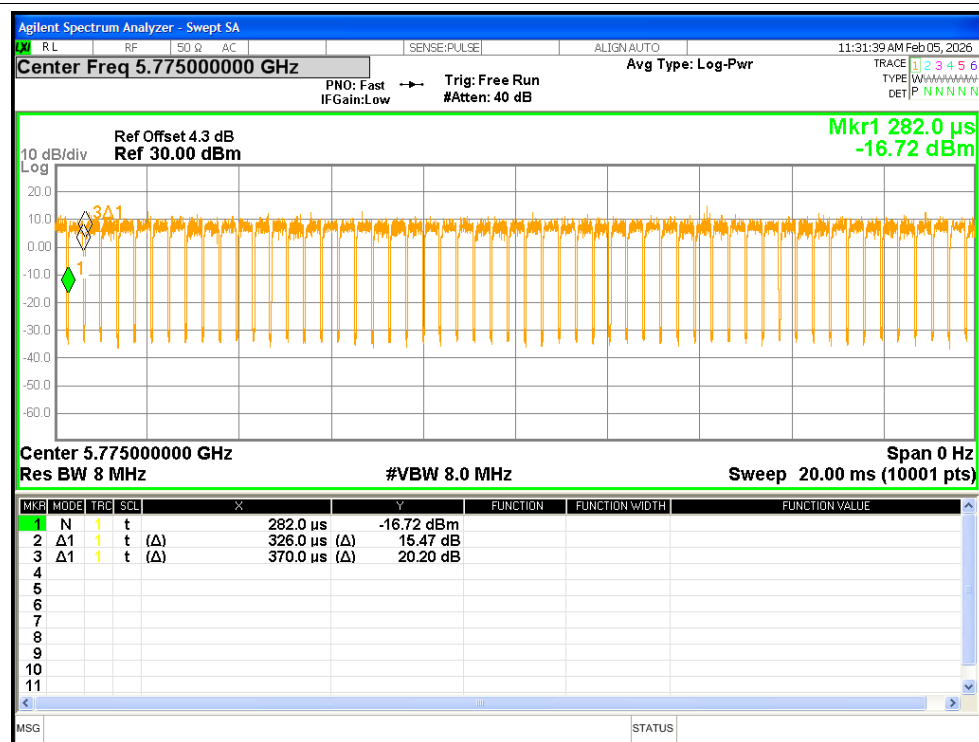


Maximum Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	11.07	0.14	11.21	<=30	Pass
NVNT	a	5785	11.64	0.13	11.77	<=30	Pass
NVNT	a	5825	11.47	0.13	11.6	<=30	Pass
NVNT	n20	5745	11.42	0.15	11.57	<=30	Pass
NVNT	n20	5785	11.49	0.15	11.64	<=30	Pass
NVNT	n20	5825	12.54	0.14	12.68	<=30	Pass
NVNT	n40	5755	11.06	0.29	11.35	<=30	Pass
NVNT	n40	5795	11.27	0.29	11.56	<=30	Pass
NVNT	ac20	5745	10.9	0.15	11.05	<=30	Pass
NVNT	ac20	5785	11.59	0.14	11.73	<=30	Pass
NVNT	ac20	5825	12.13	0.14	12.27	<=30	Pass
NVNT	ac40	5755	11.73	0.28	12.01	<=30	Pass
NVNT	ac40	5795	11.52	0.28	11.8	<=30	Pass
NVNT	ac80	5775	10.58	0.55	11.13	<=30	Pass

Test Graphs


Power NVNT a 5745MHz

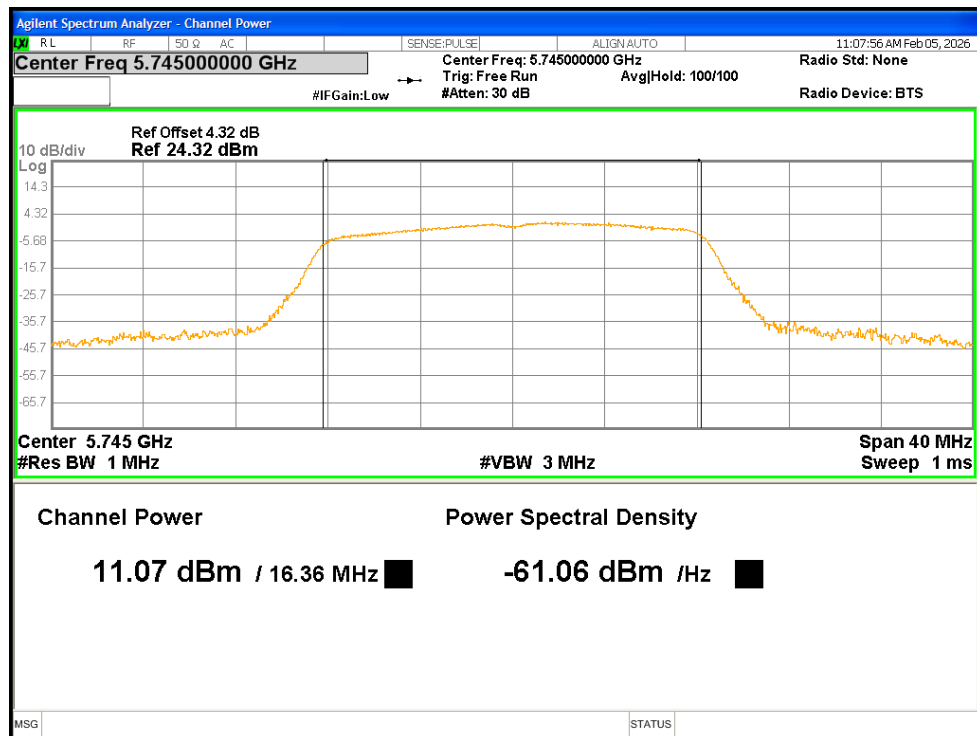


Power NVNT a 5785MHz


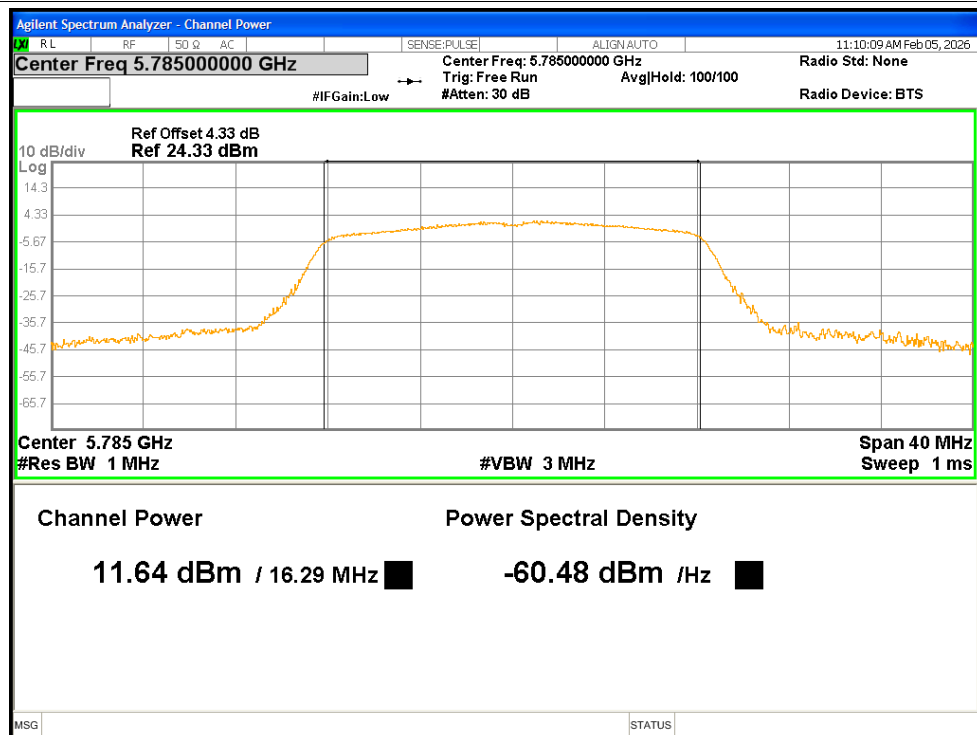


Power NVNT a 5825MHz

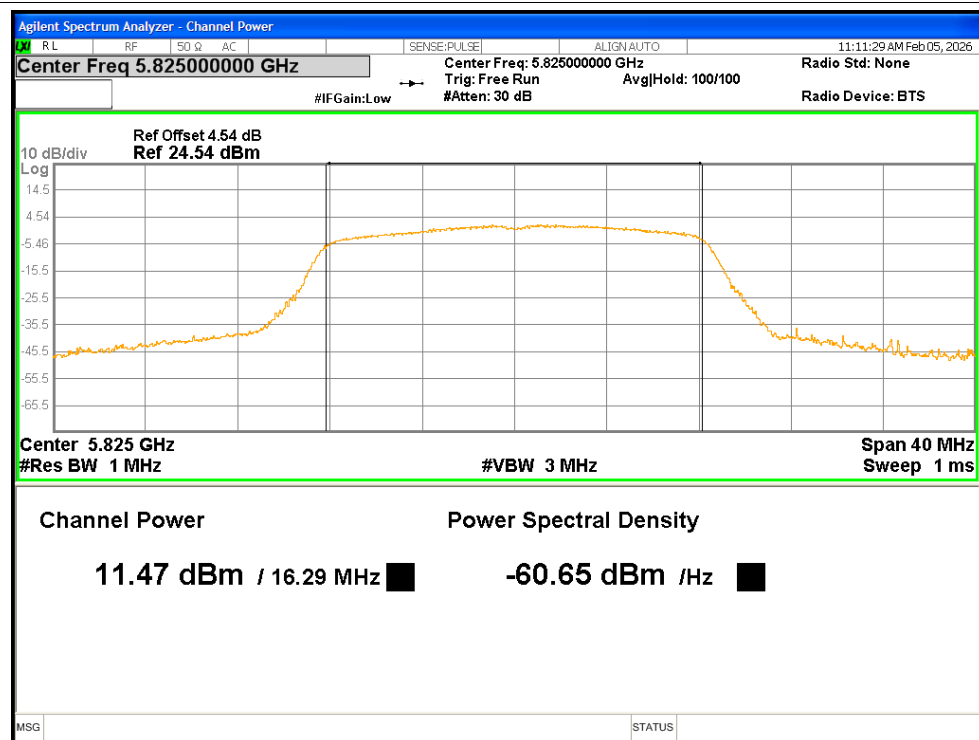


Power NVNT n20 5745MHz

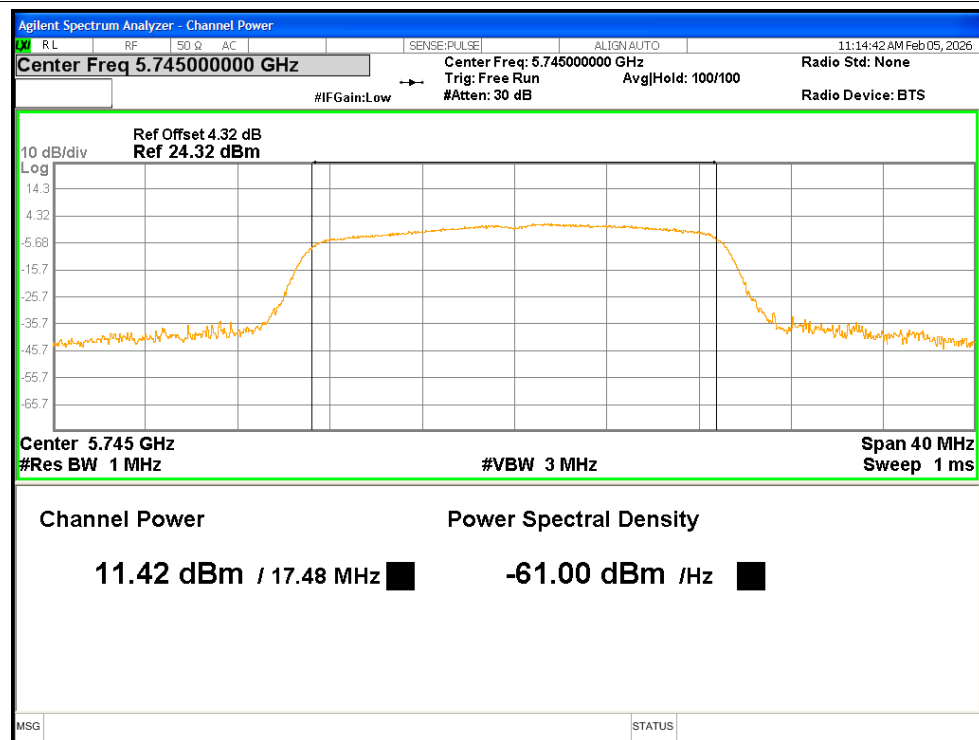


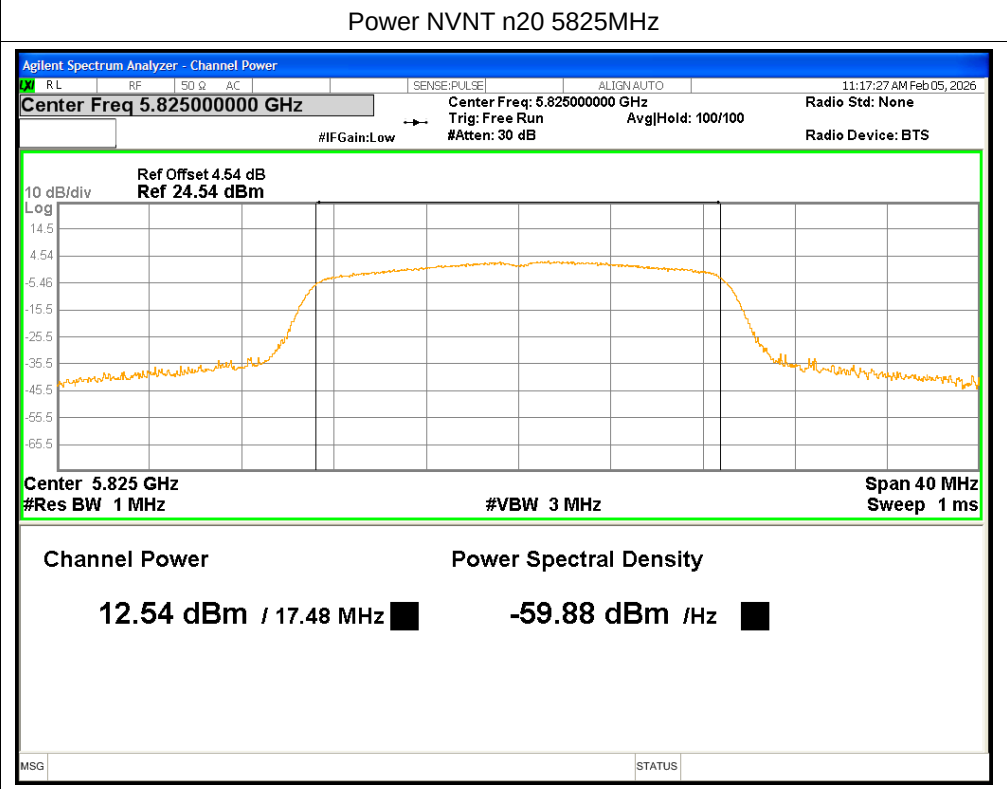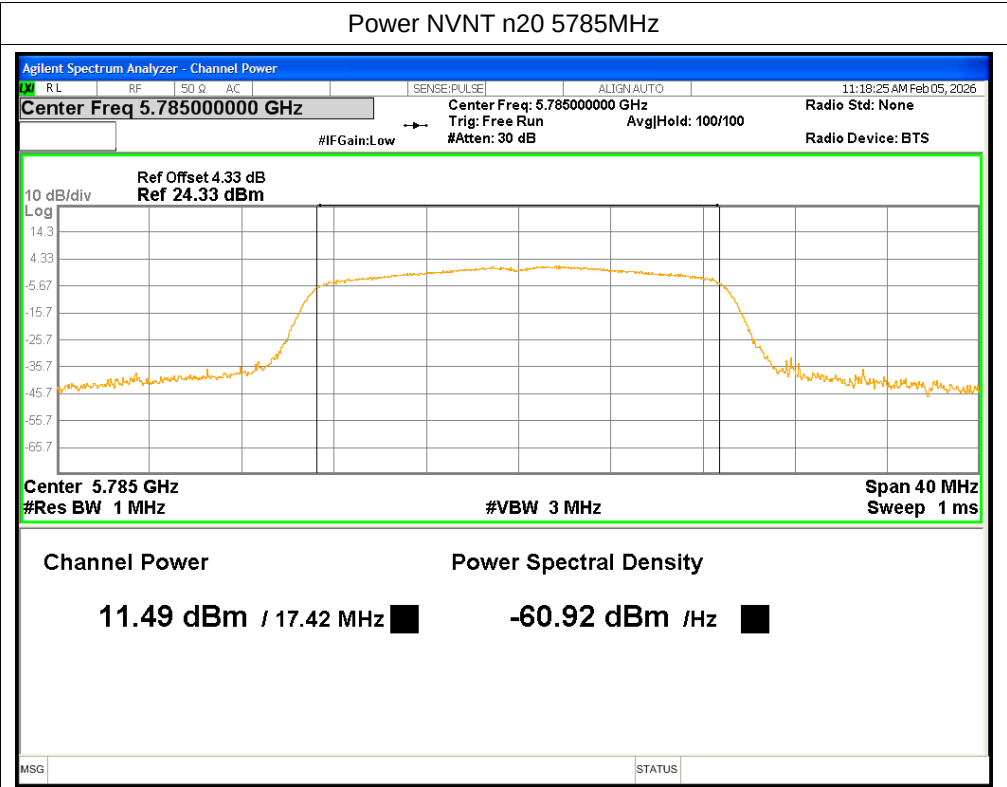


Power NVNT n40 5755MHz

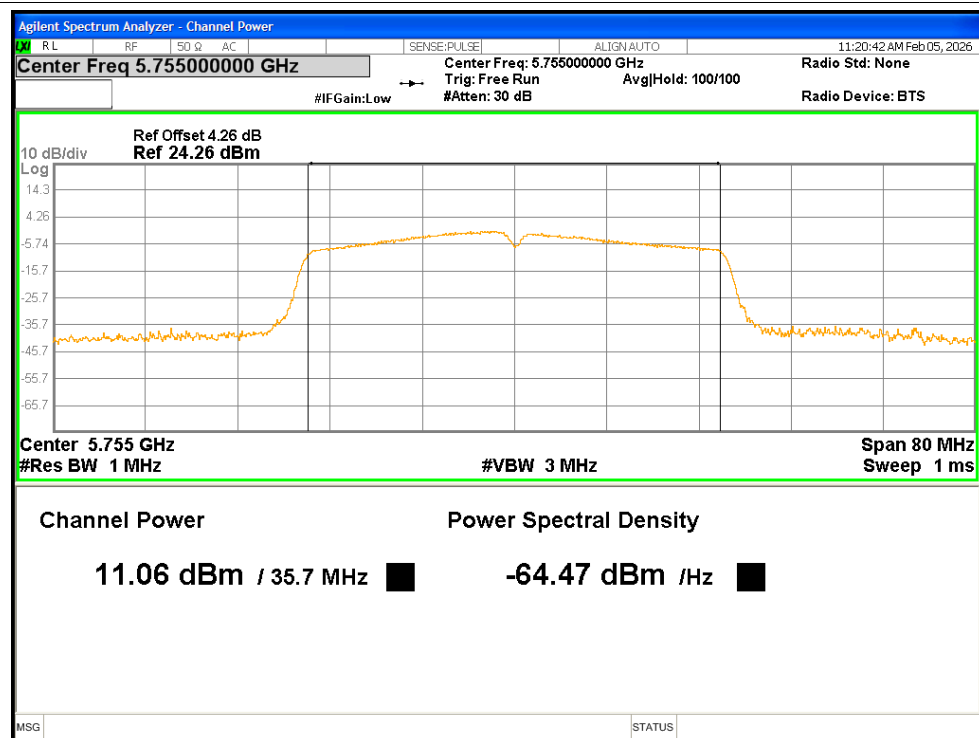


Power NVNT n40 5795MHz

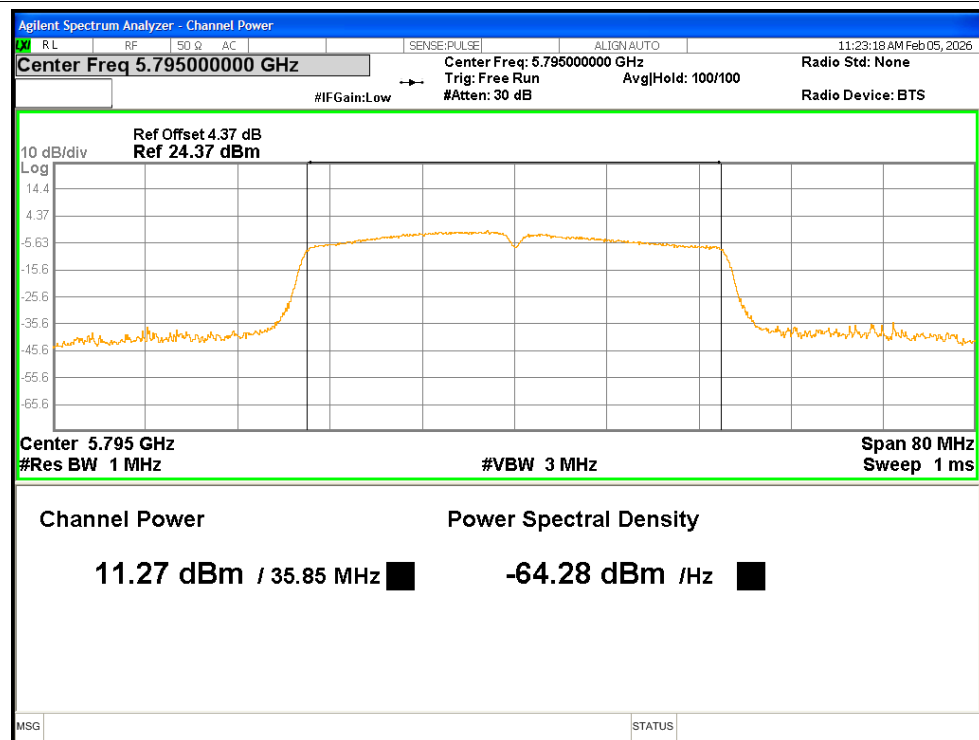


Power NVNT ac20 5745MHz

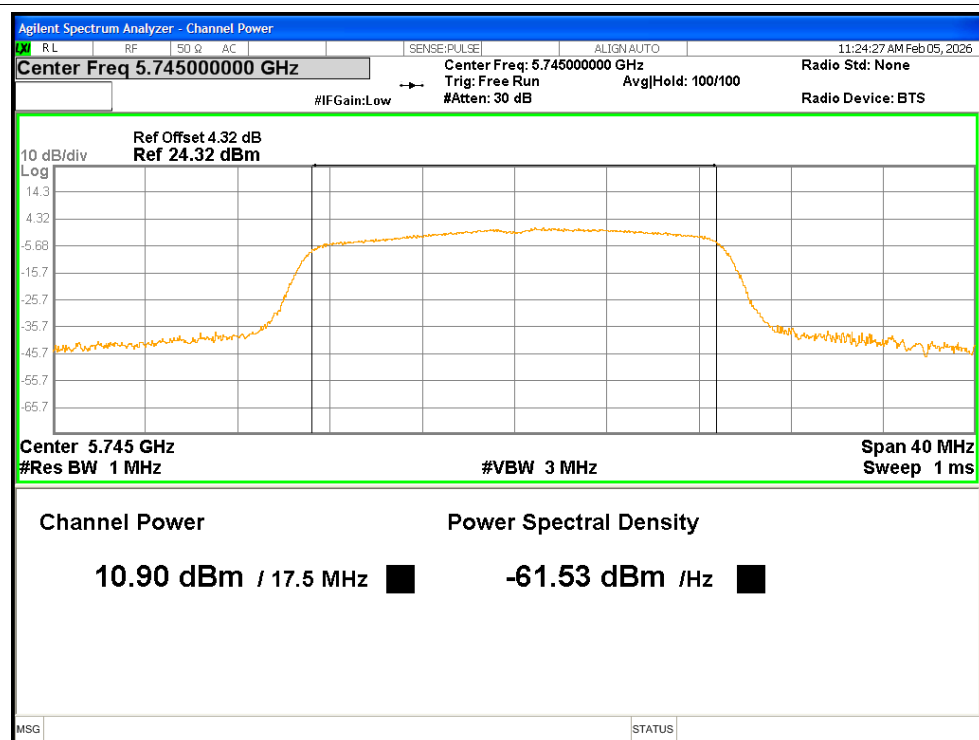


Power NVNT ac20 5785MHz

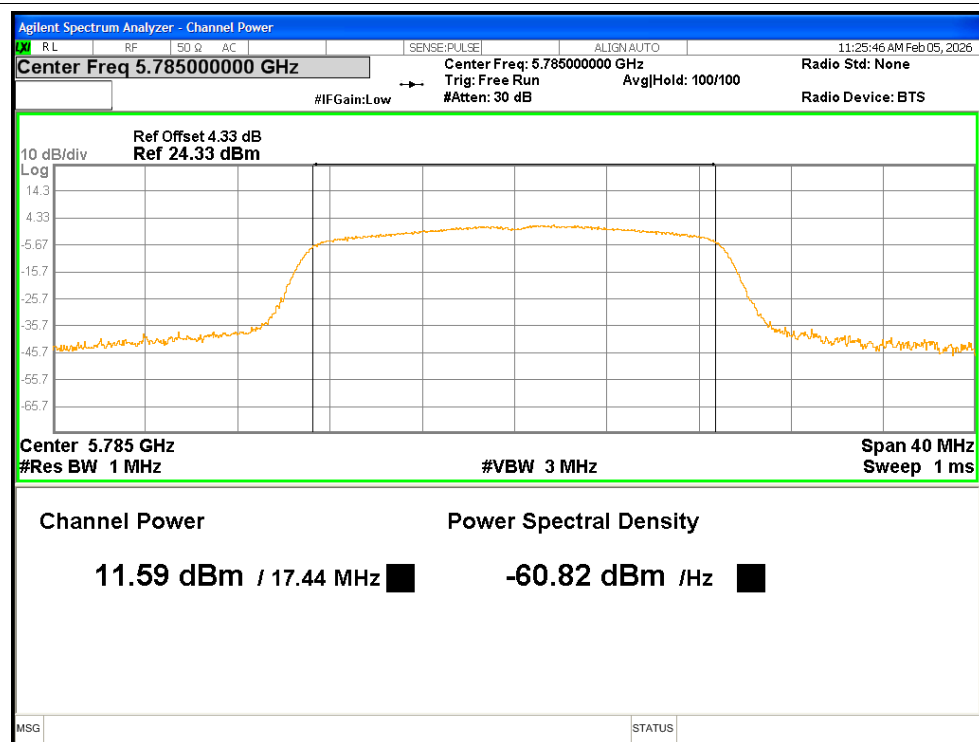


Power NVNT ac20 5825MHz

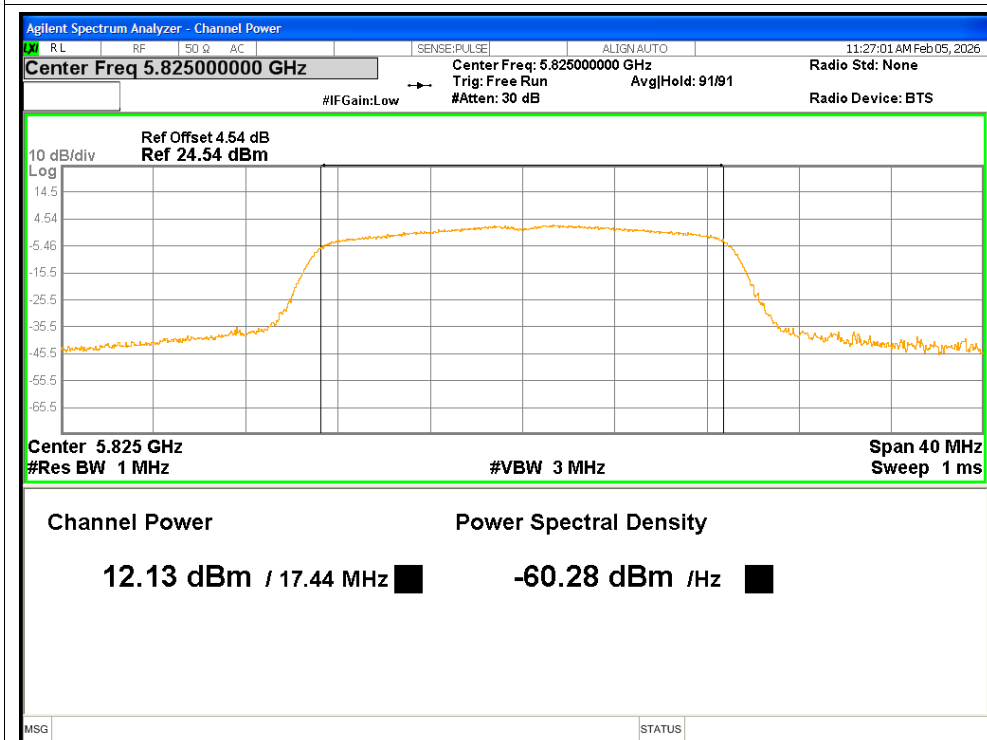


Power NVNT ac40 5755MHz

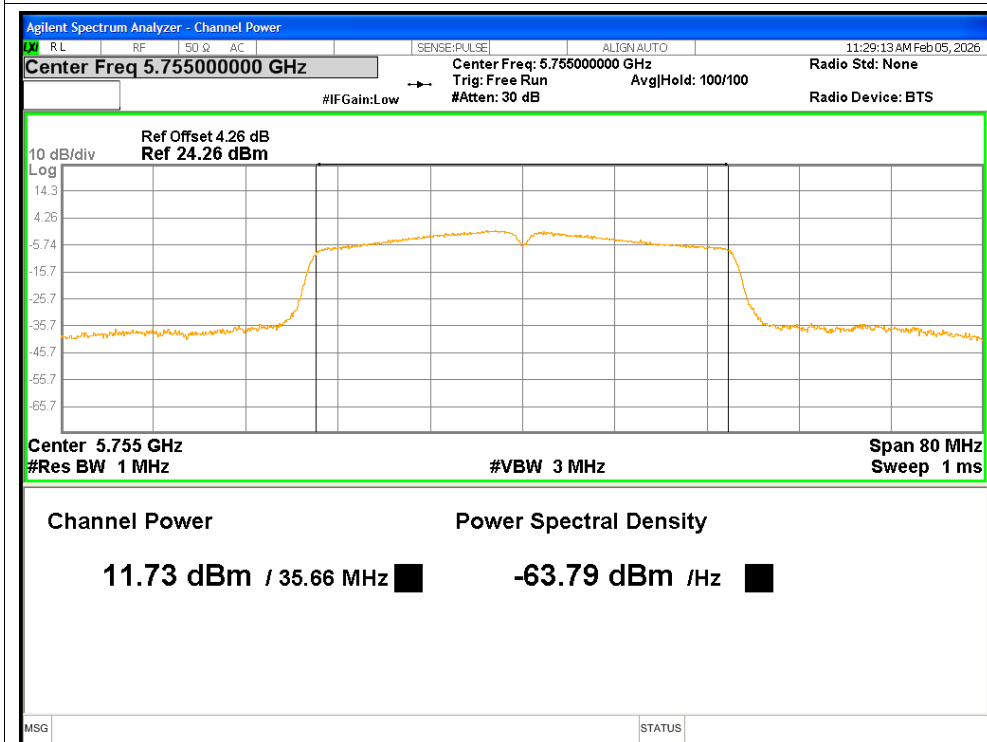

Power NVNT ac40 5795MHz

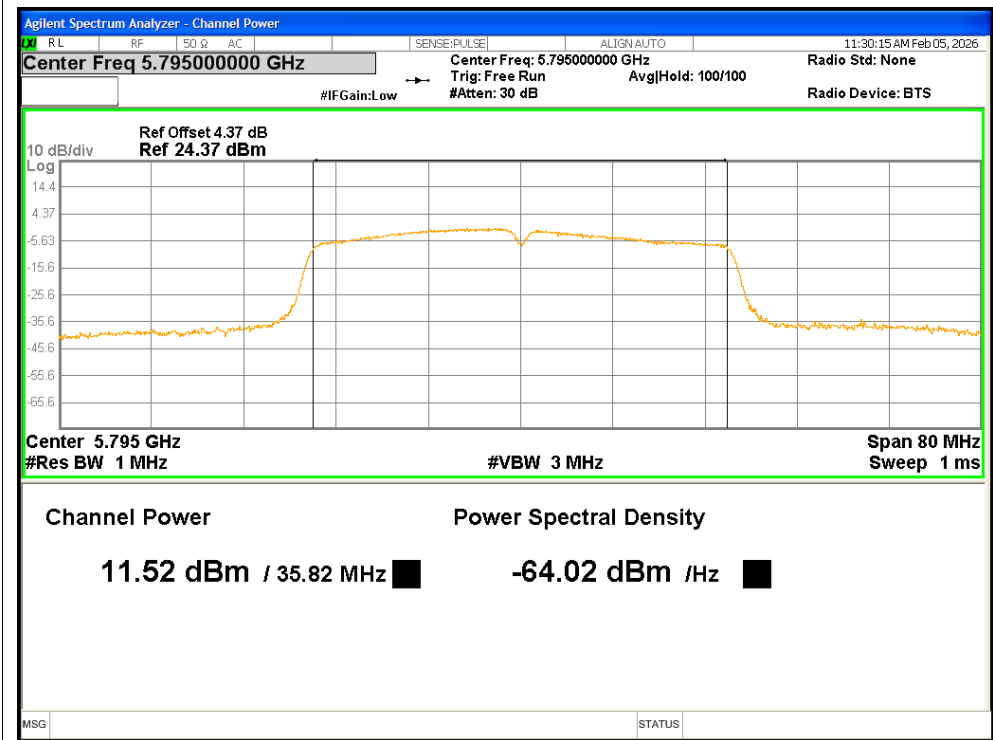

Power NVNT ac80 5775MHz

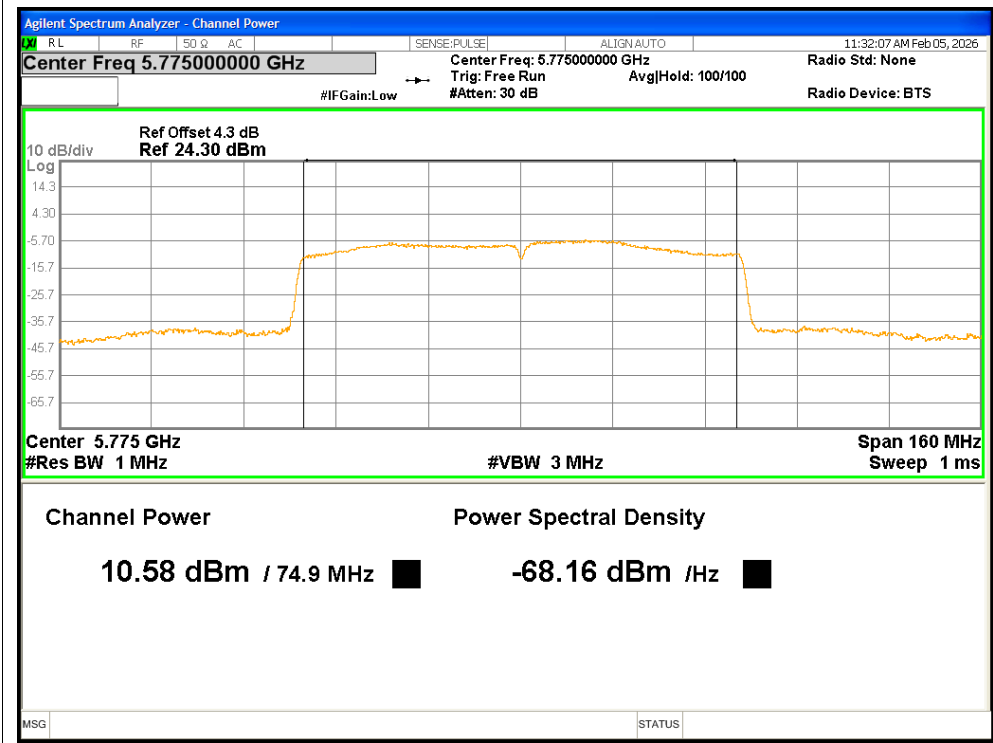


-6dB Bandwidth


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	15.64	≥ 0.5	Pass
NVNT	a	5785	14.72	≥ 0.5	Pass
NVNT	a	5825	12.53	≥ 0.5	Pass
NVNT	n20	5745	15.89	≥ 0.5	Pass
NVNT	n20	5785	12.77	≥ 0.5	Pass
NVNT	n20	5825	15.03	≥ 0.5	Pass
NVNT	n40	5755	25.04	≥ 0.5	Pass
NVNT	n40	5795	28.8	≥ 0.5	Pass
NVNT	ac20	5745	15.03	≥ 0.5	Pass
NVNT	ac20	5785	15.94	≥ 0.5	Pass
NVNT	ac20	5825	13.77	≥ 0.5	Pass
NVNT	ac40	5755	31.3	≥ 0.5	Pass
NVNT	ac40	5795	32.54	≥ 0.5	Pass
NVNT	ac80	5775	73.81	≥ 0.5	Pass

Test Graphs


-6dB Bandwidth NVNT a 5745MHz

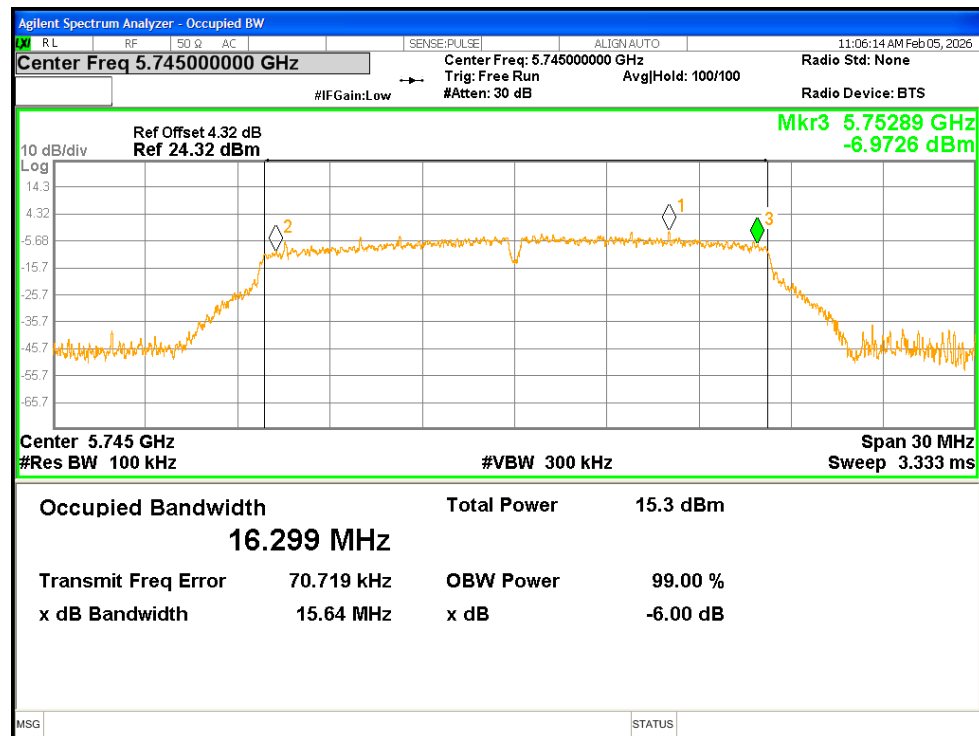


-6dB Bandwidth NVNT a 5785MHz

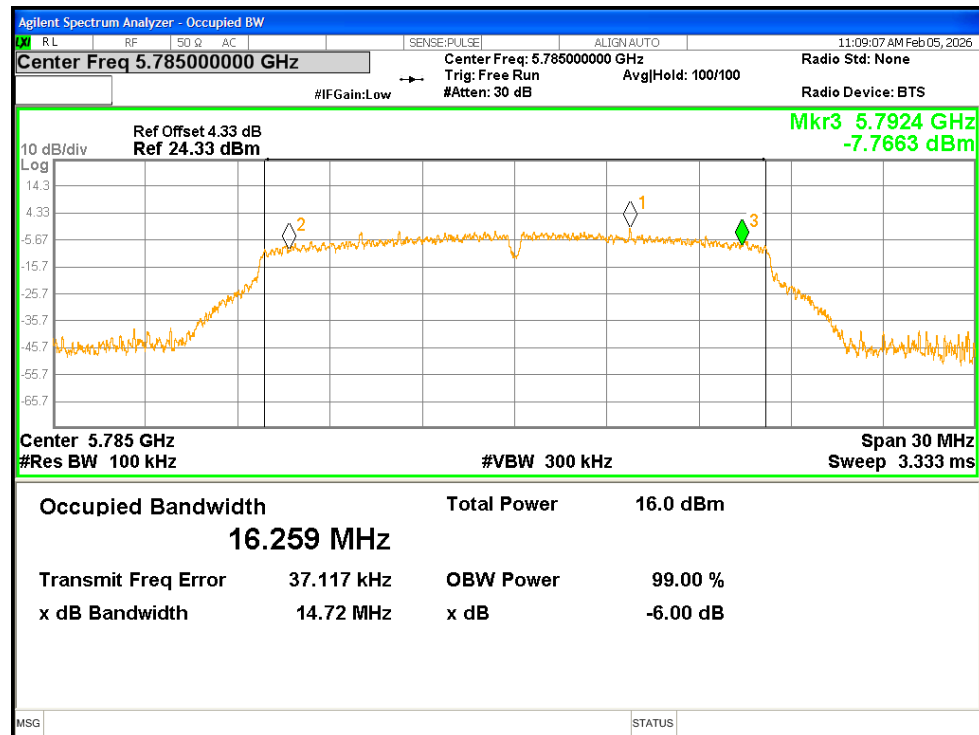


-6dB Bandwidth NVNT a 5825MHz

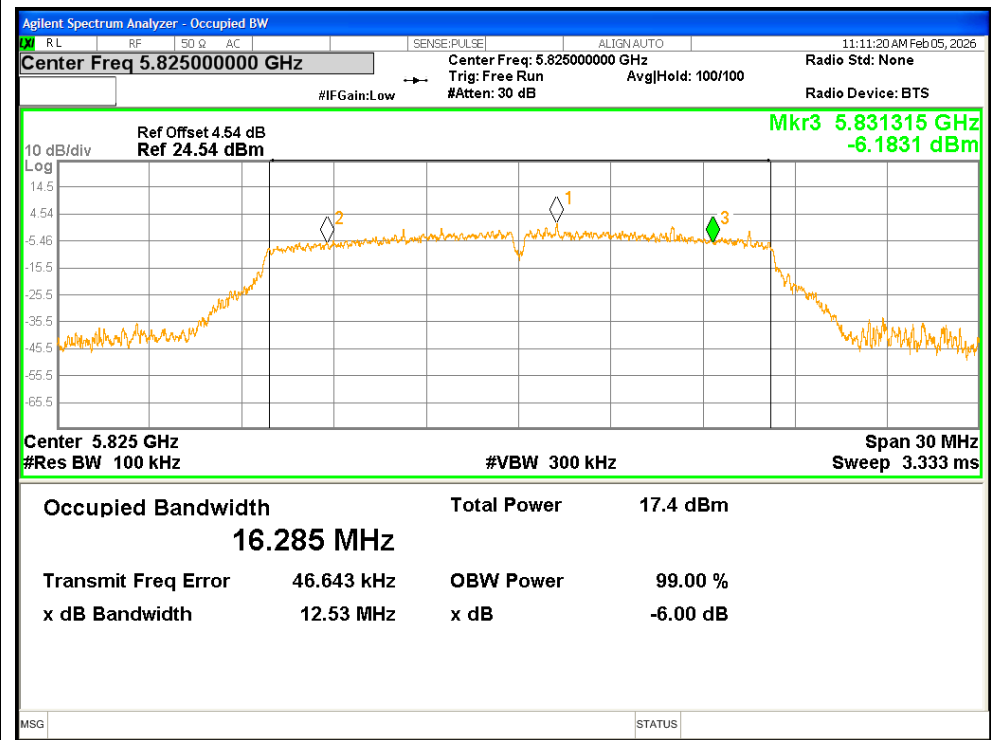


-6dB Bandwidth NVNT n20 5745MHz

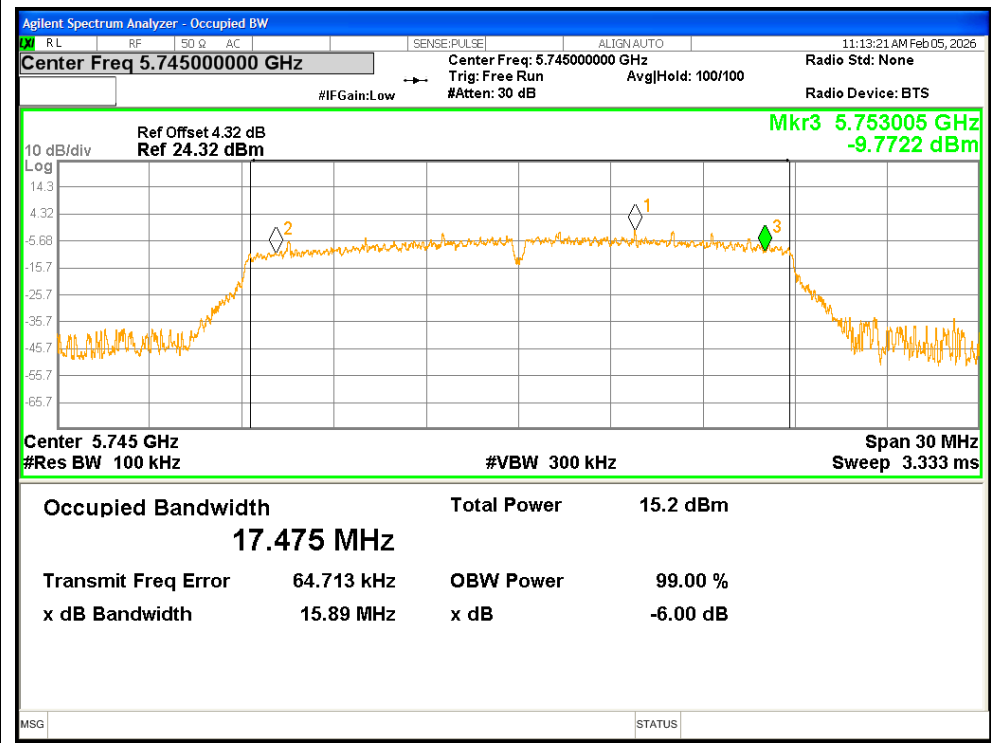


-6dB Bandwidth NVNT n20 5785MHz

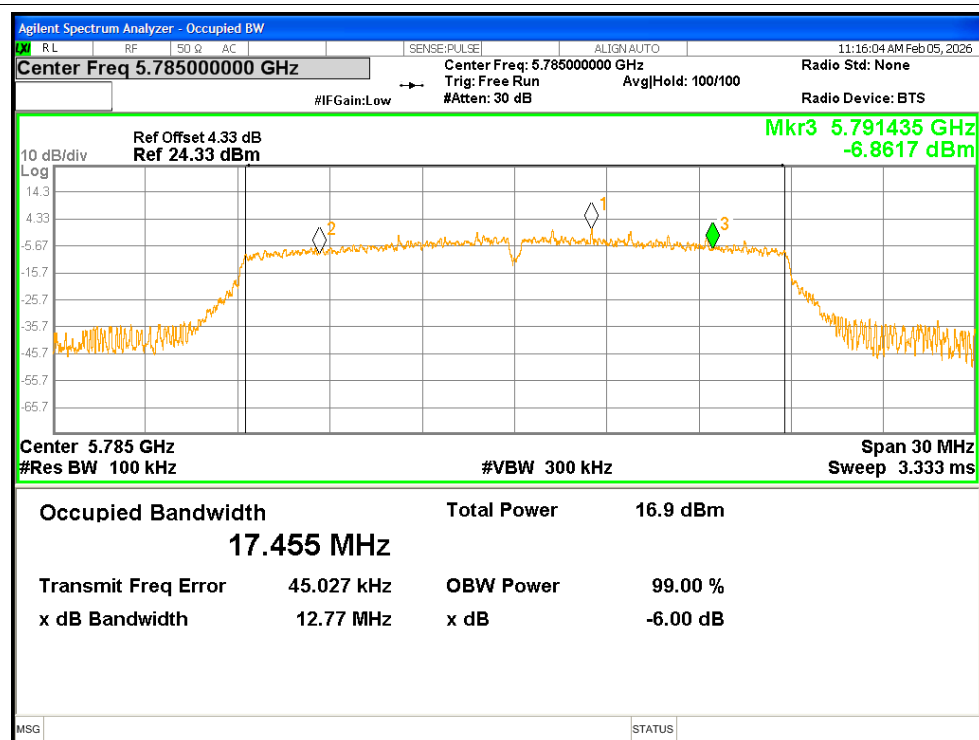


-6dB Bandwidth NVNT n20 5825MHz

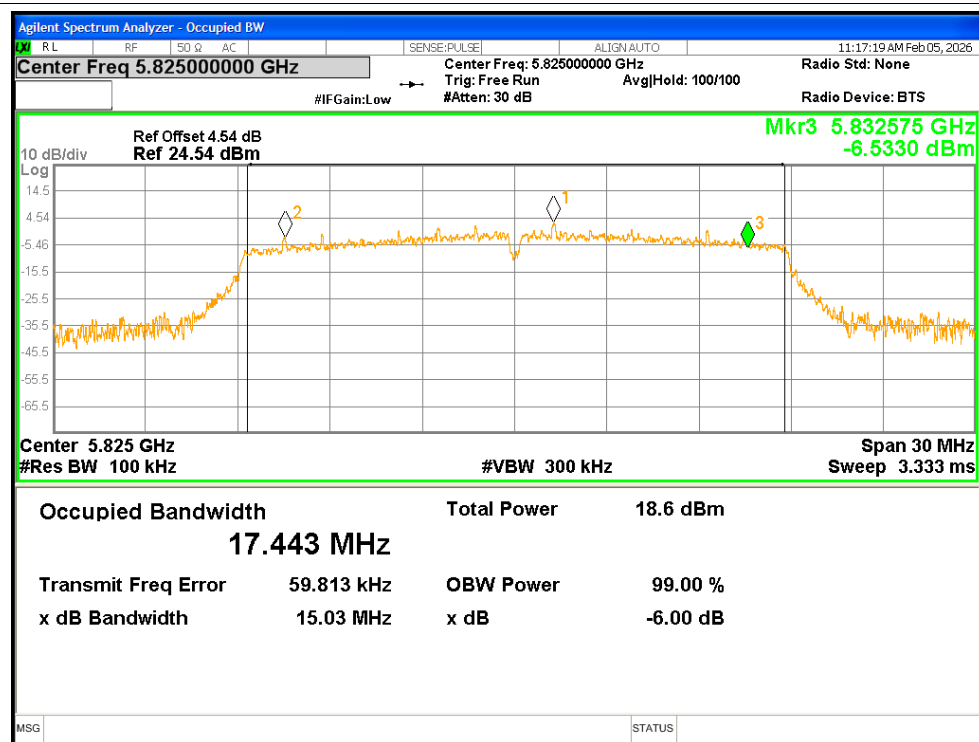


-6dB Bandwidth NVNT n40 5755MHz

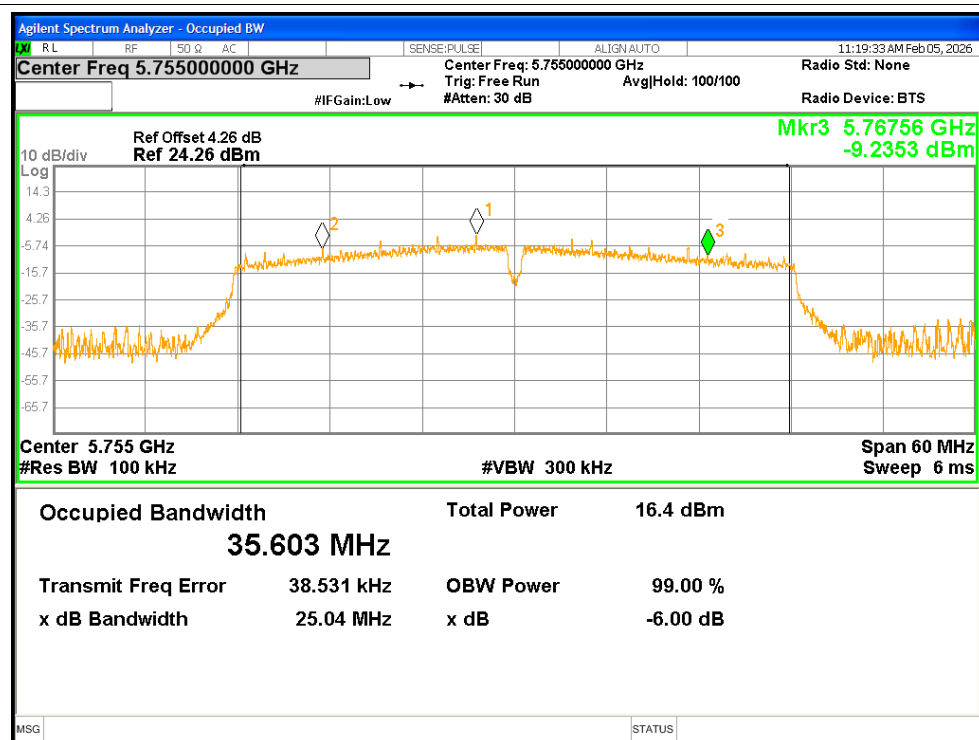


-6dB Bandwidth NVNT n40 5795MHz

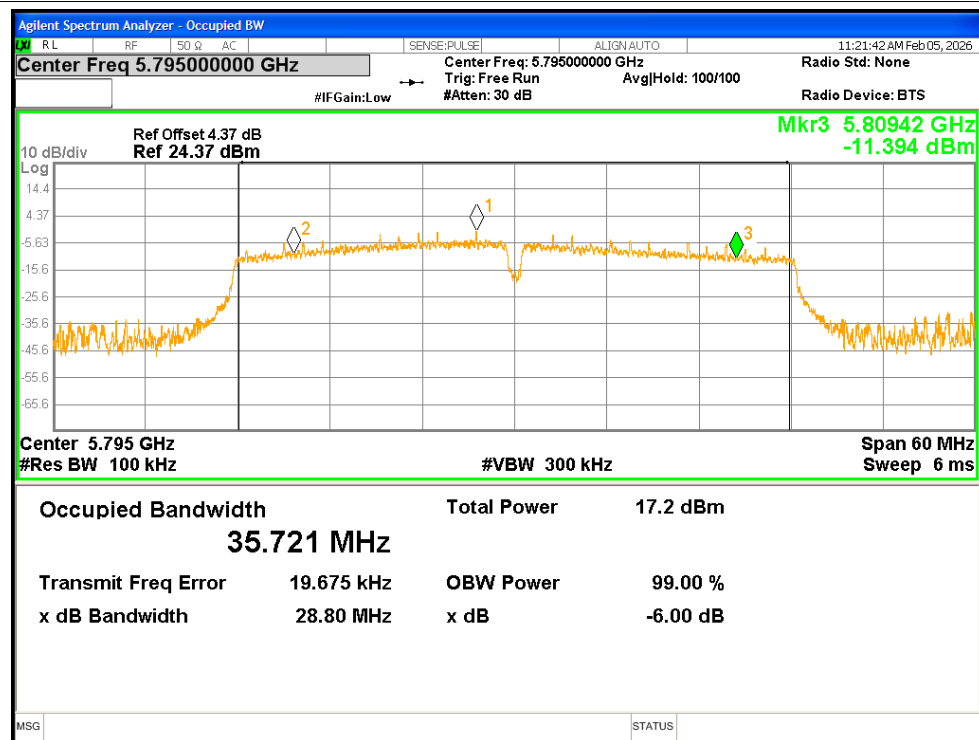


-6dB Bandwidth NVNT ac20 5745MHz

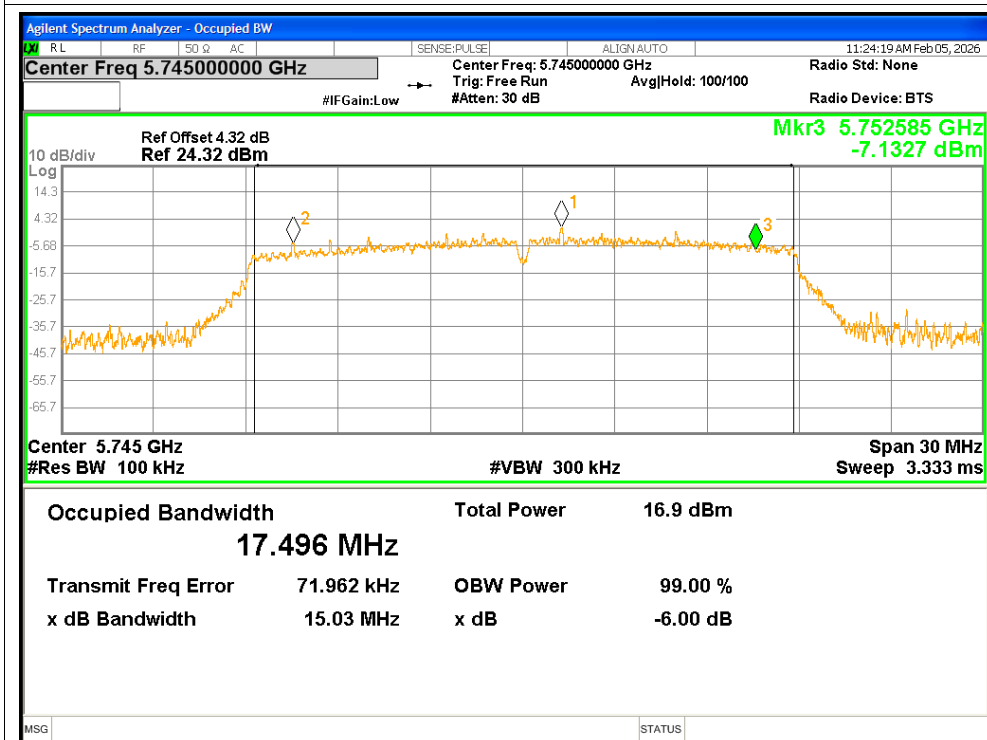


-6dB Bandwidth NVNT ac20 5785MHz

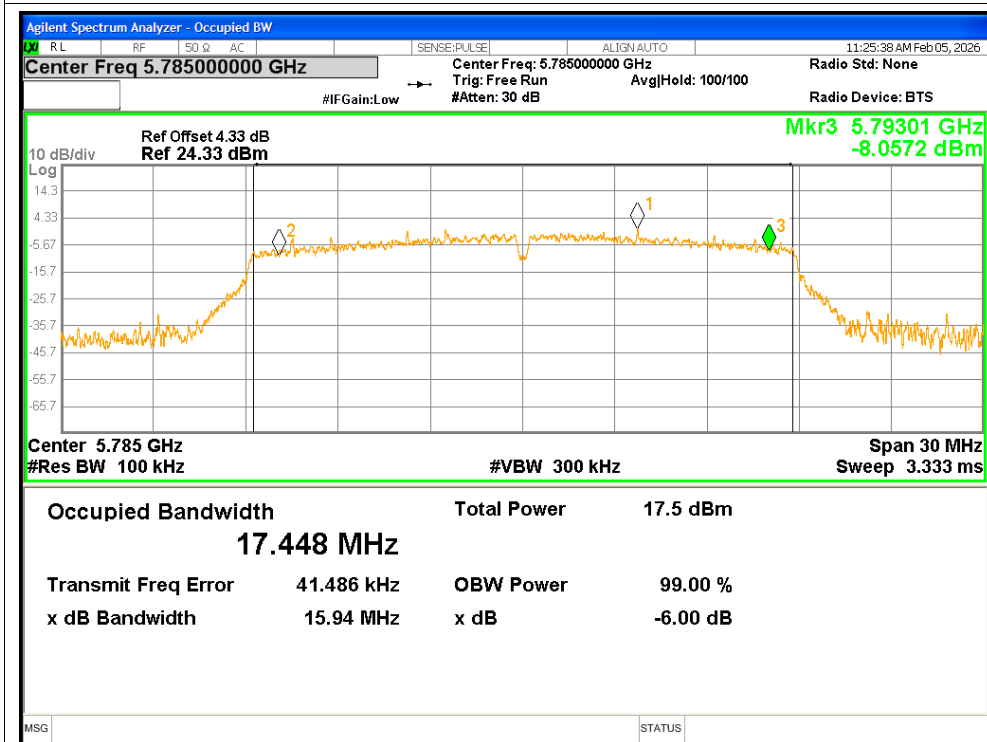


-6dB Bandwidth NVNT ac20 5825MHz

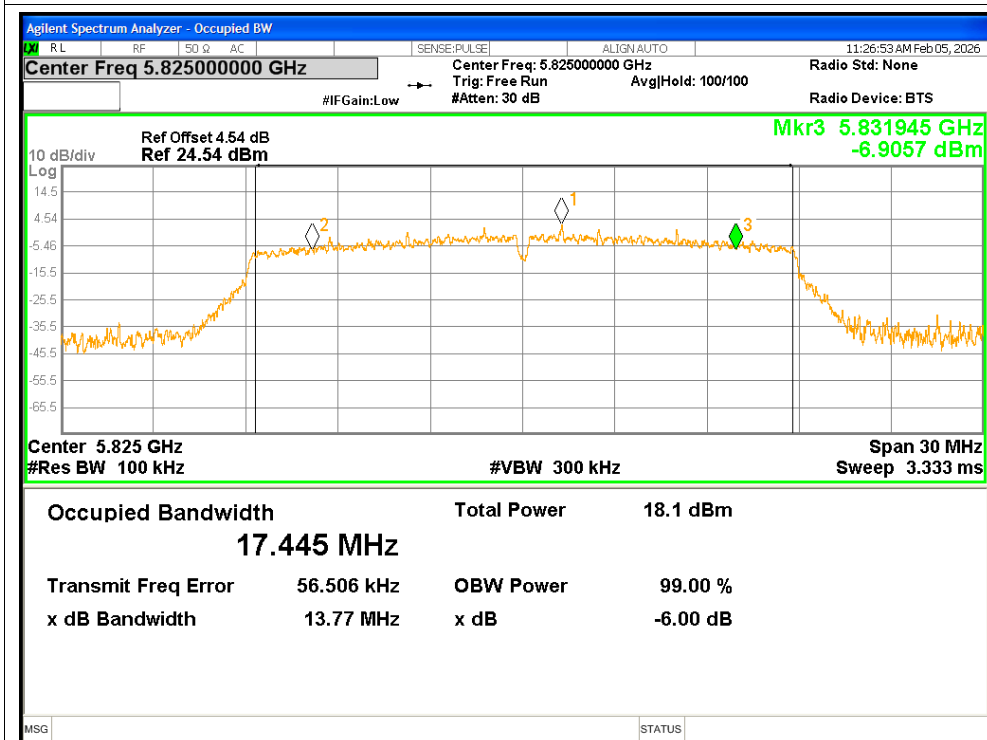


-6dB Bandwidth NVNT ac40 5755MHz

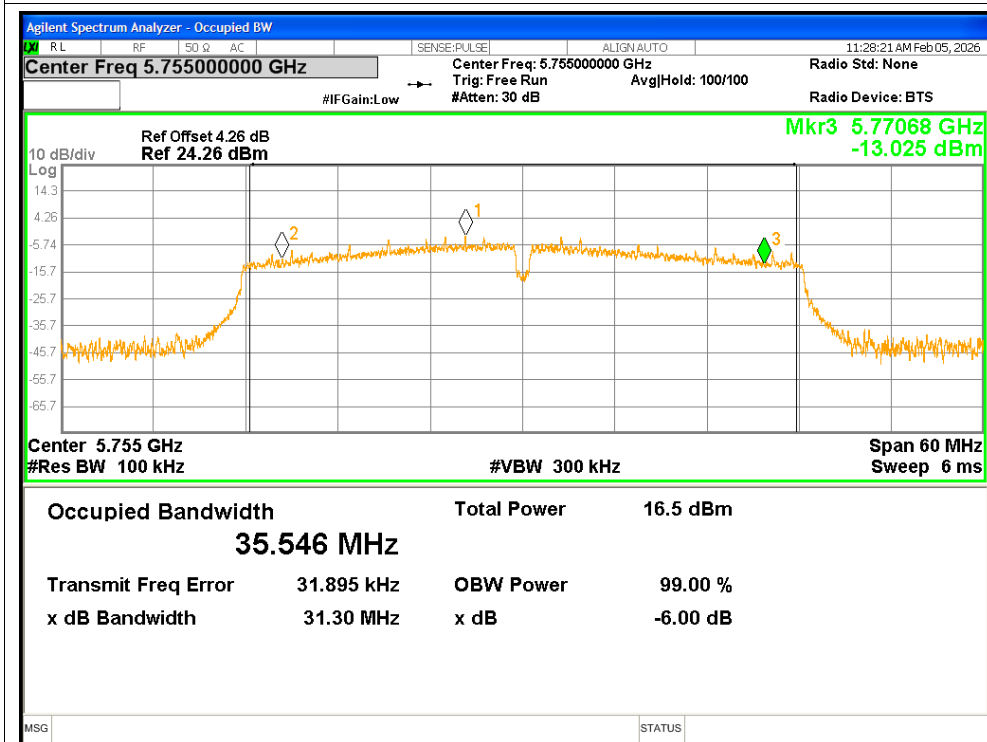

-6dB Bandwidth NVNT ac40 5795MHz

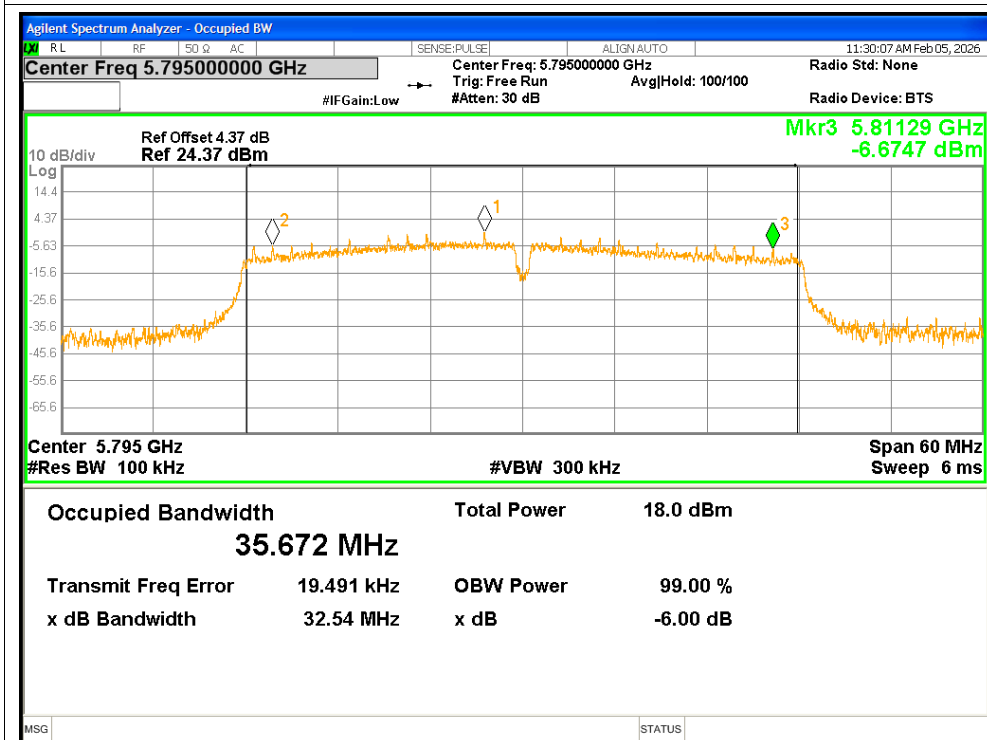

-6dB Bandwidth NVNT ac80 5775MHz

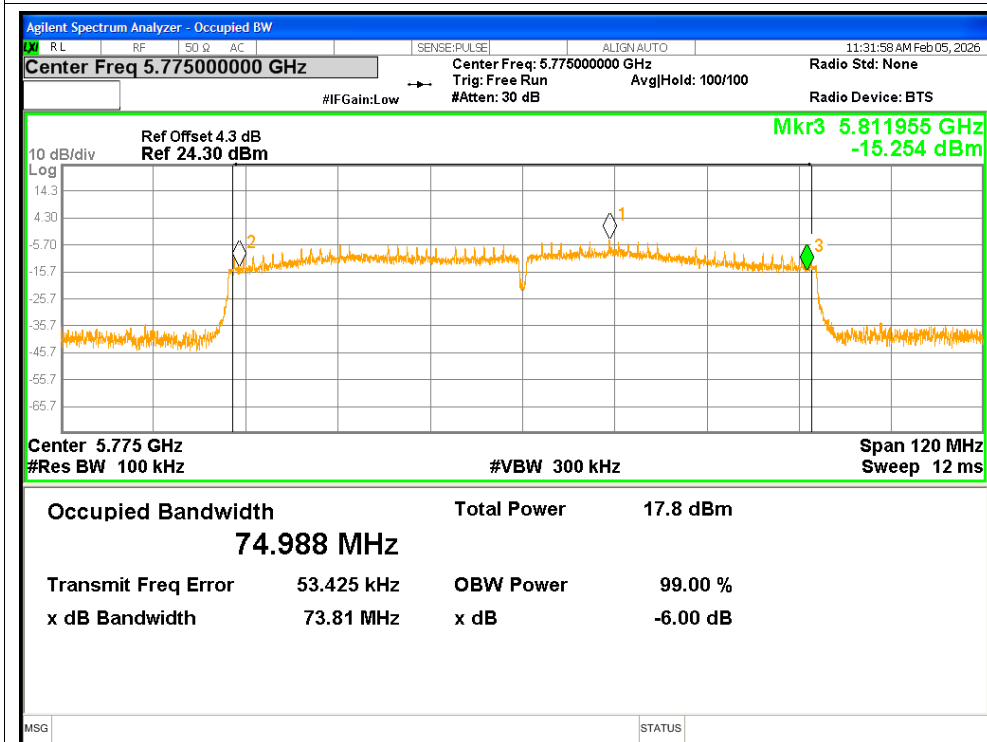


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5745	16.361
NVNT	a	5785	16.292
NVNT	a	5825	16.287
NVNT	n20	5745	17.482
NVNT	n20	5785	17.415
NVNT	n20	5825	17.476
NVNT	n40	5755	35.701
NVNT	n40	5795	35.853
NVNT	ac20	5745	17.501
NVNT	ac20	5785	17.437
NVNT	ac20	5825	17.437
NVNT	ac40	5755	35.66
NVNT	ac40	5795	35.817
NVNT	ac80	5775	74.9

Test Graphs


OBW NVNT a 5745MHz

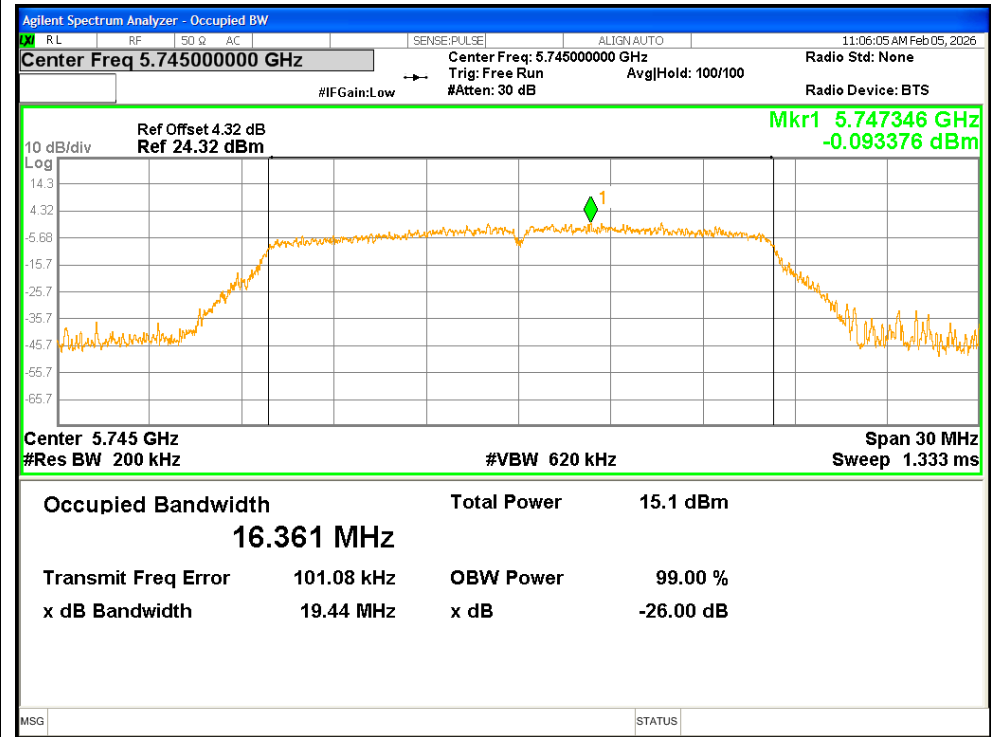


OBW NVNT a 5785MHz

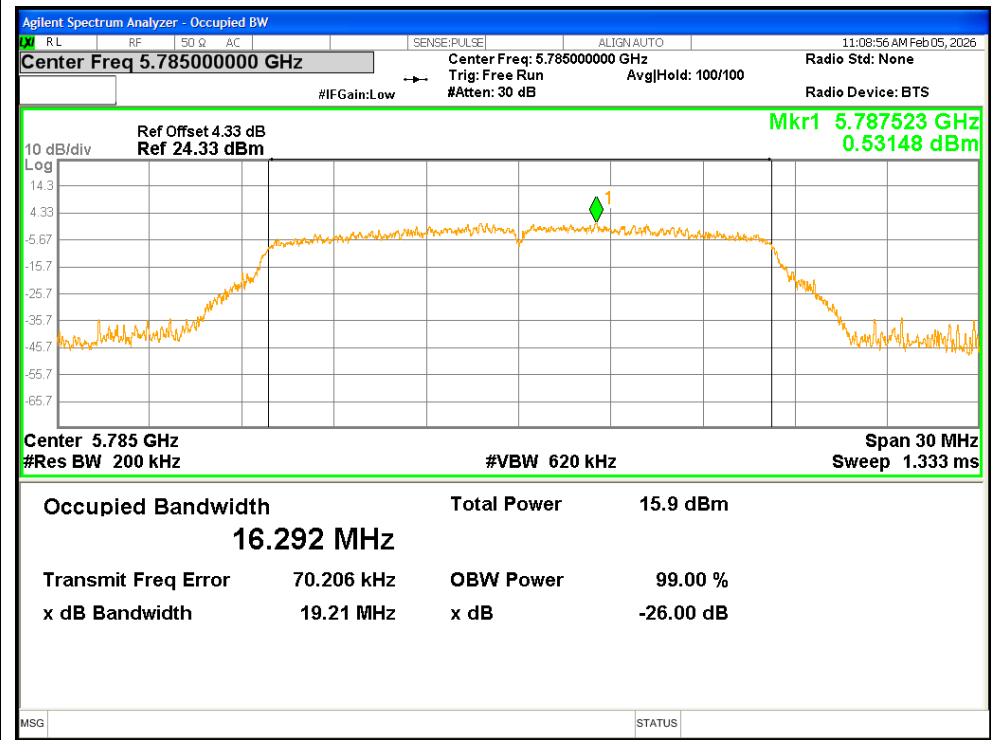


OBW NVNT a 5825MHz

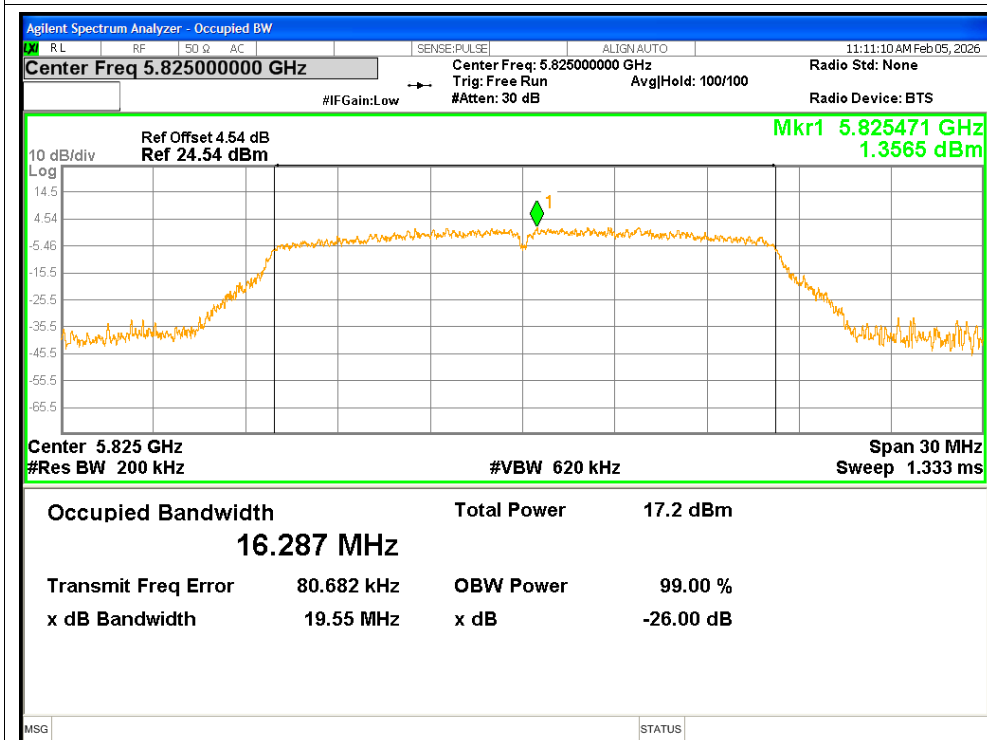


OBW NVNT n20 5745MHz

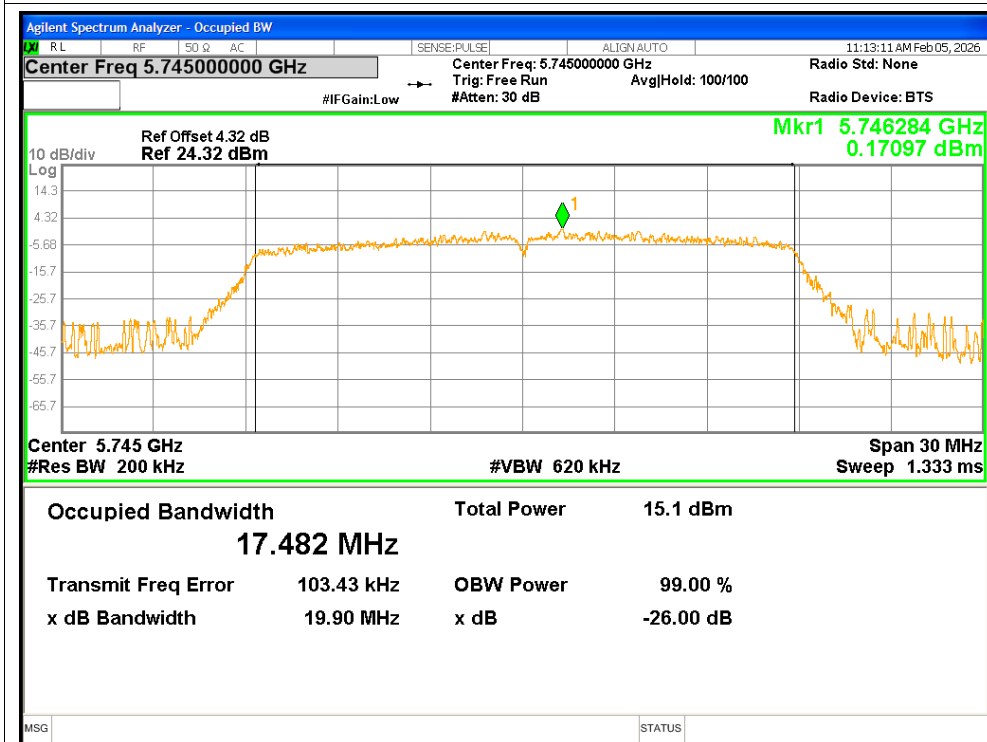


OBW NVNT n20 5785MHz

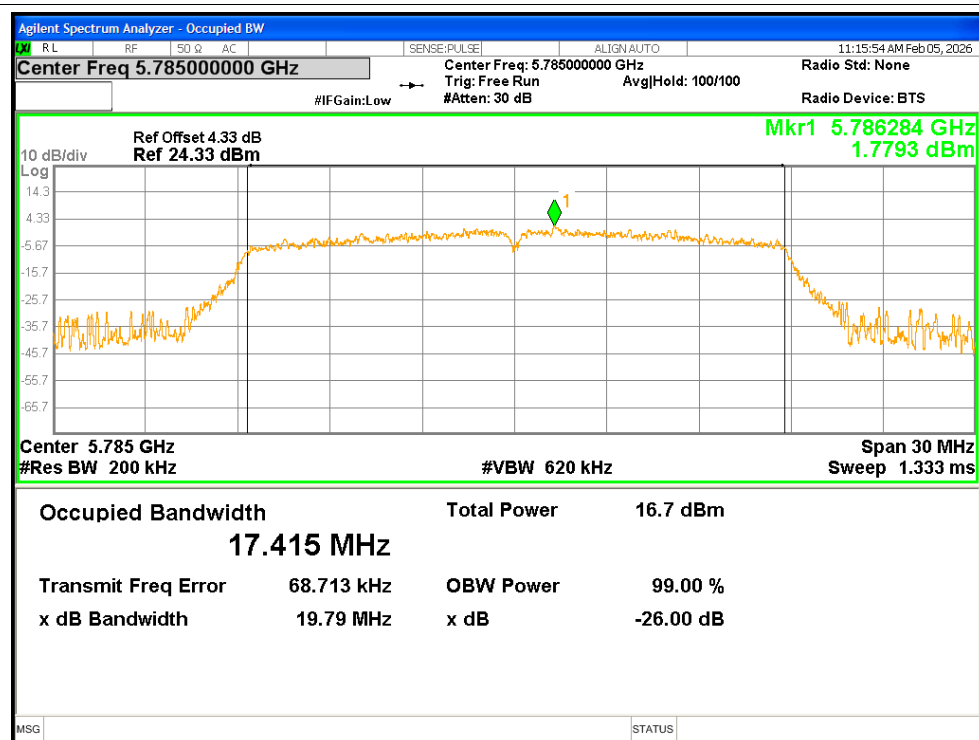


OBW NVNT n20 5825MHz

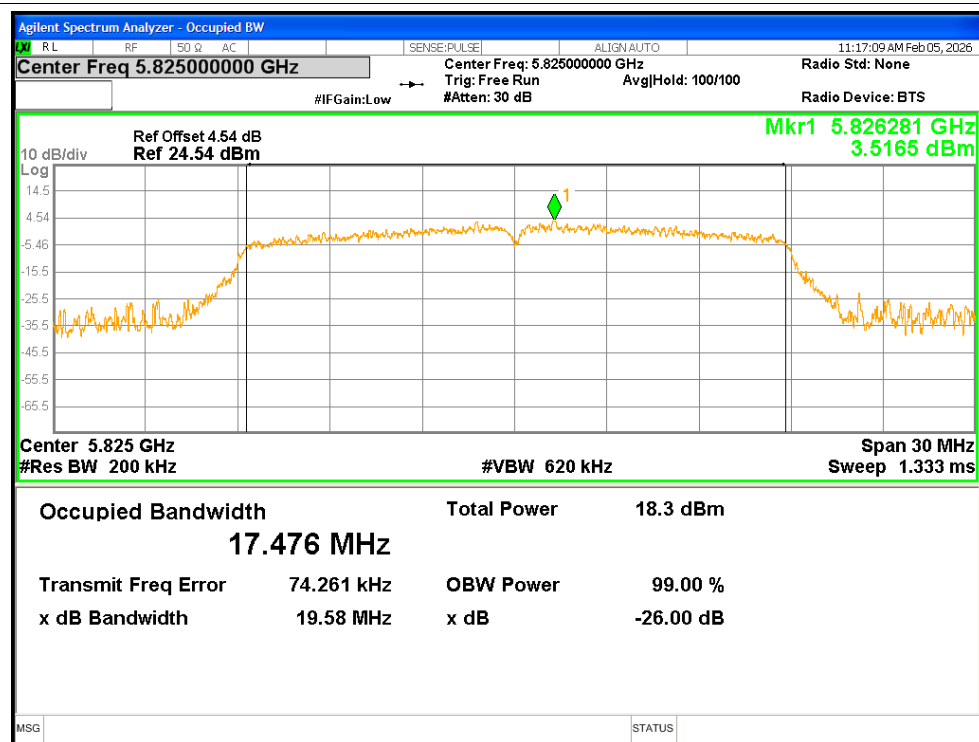


OBW NVNT n40 5755MHz

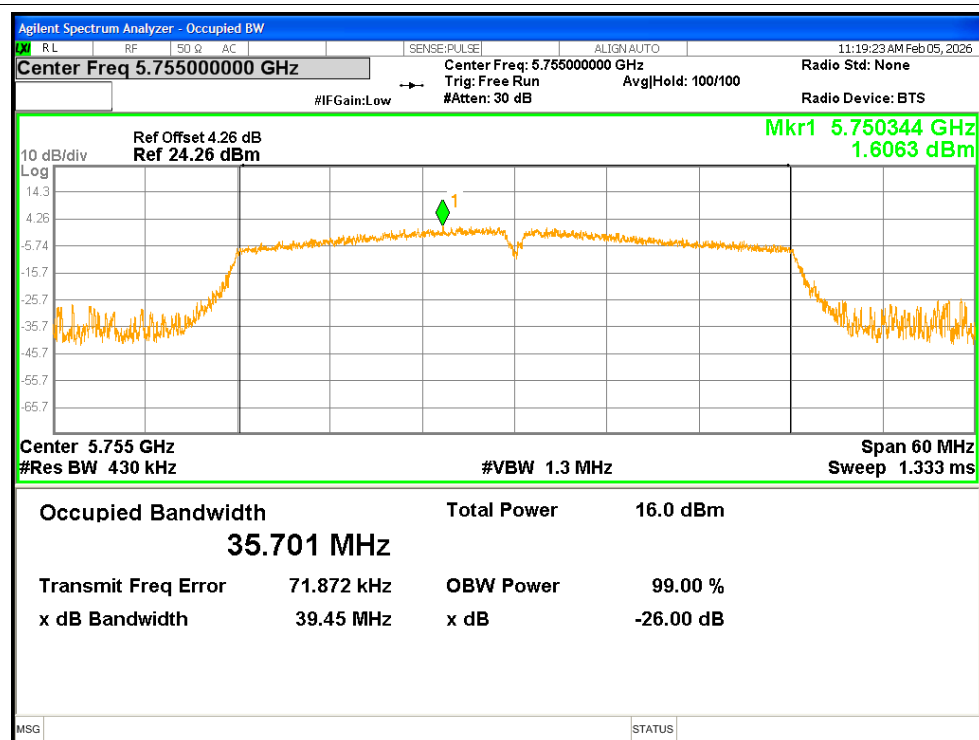


OBW NVNT n40 5795MHz

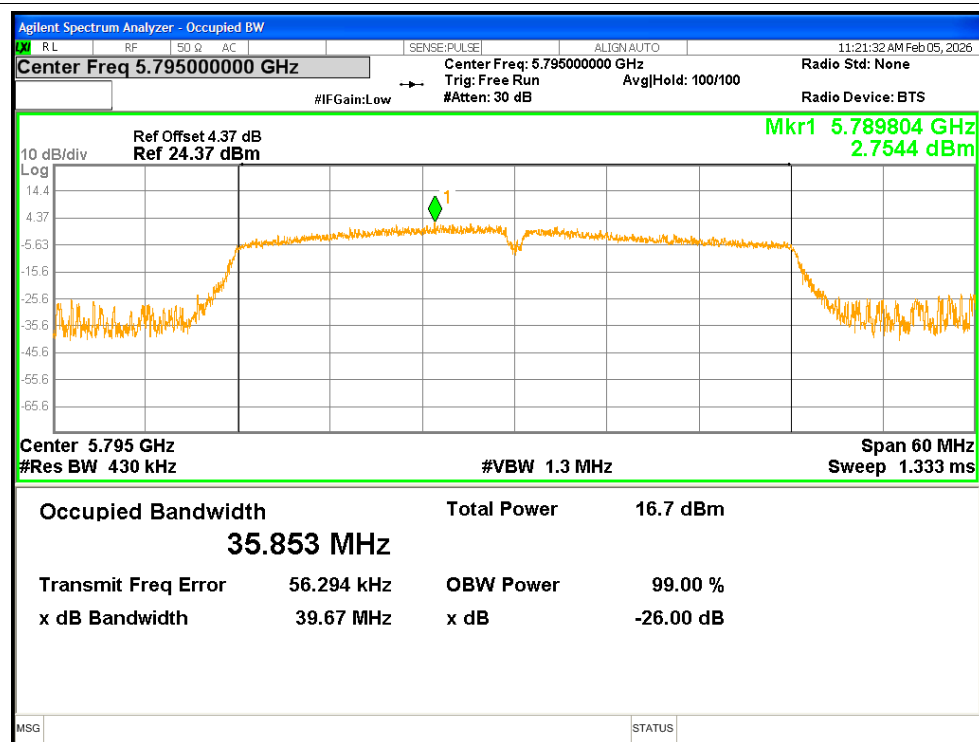


OBW NVNT ac20 5745MHz

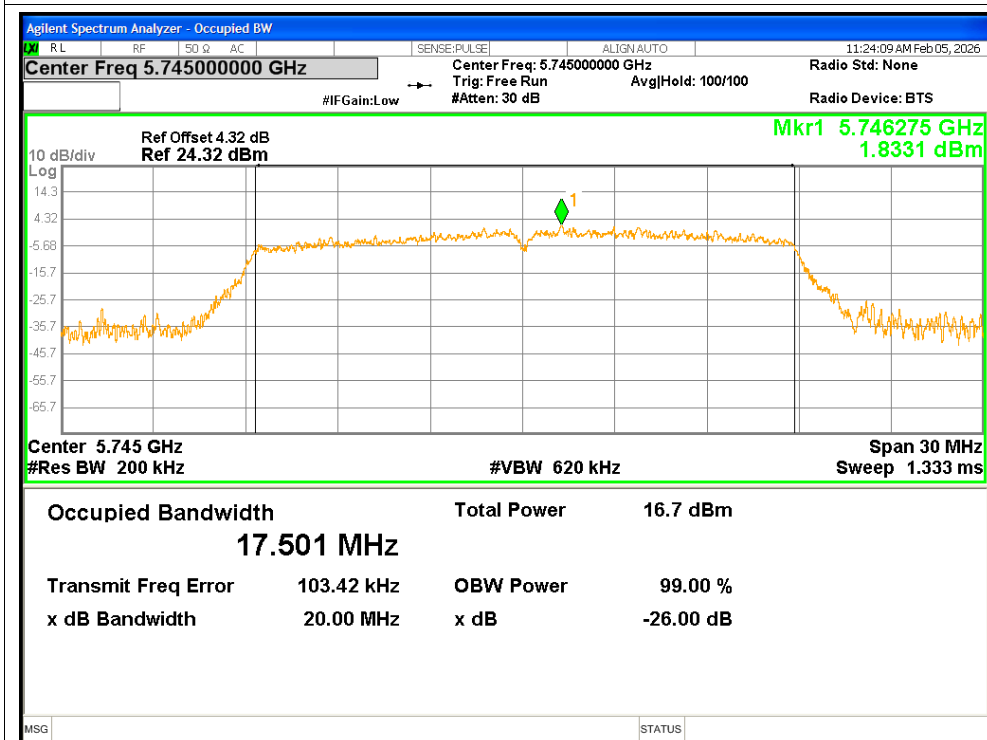


OBW NVNT ac20 5785MHz

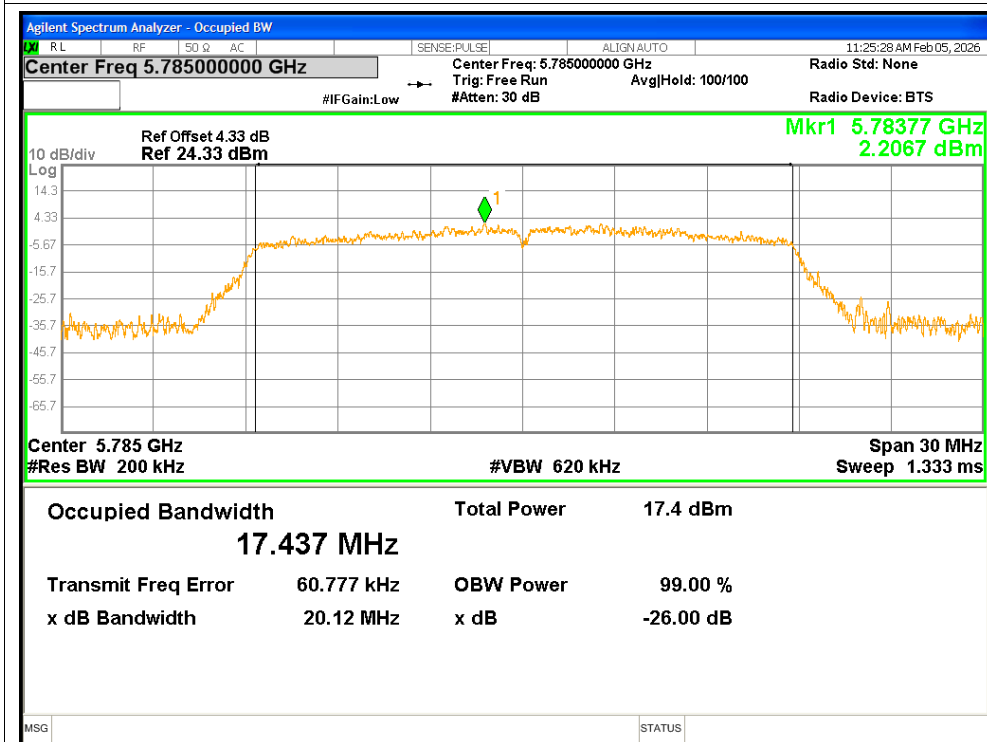


OBW NVNT ac20 5825MHz

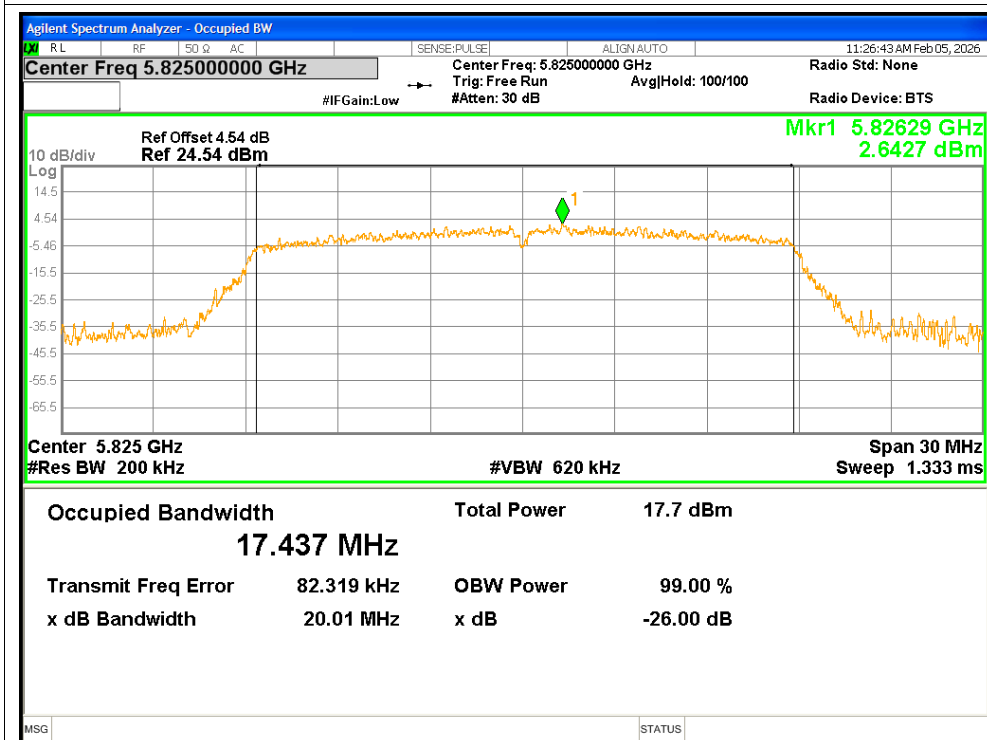


OBW NVNT ac40 5755MHz

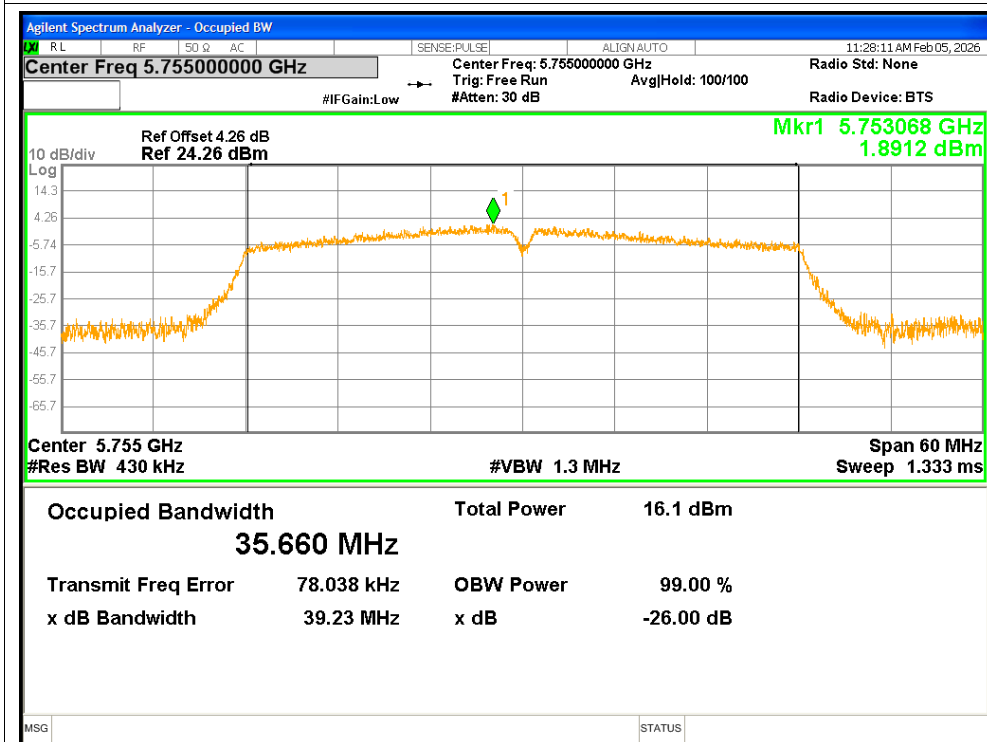

OBW NVNT ac40 5795MHz

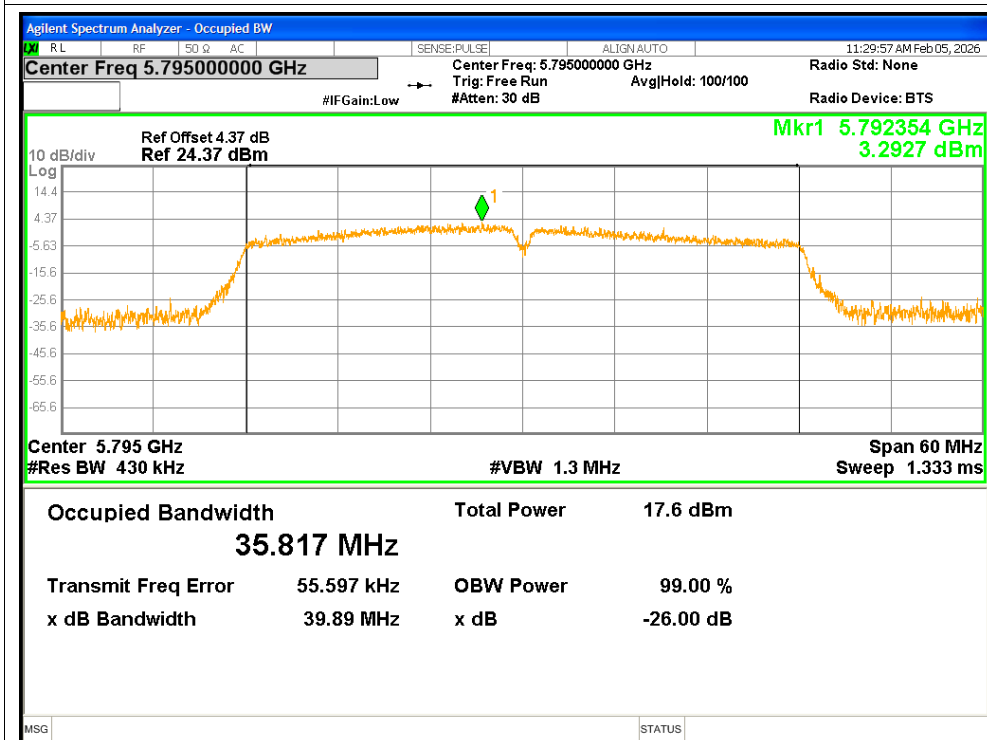

OBW NVNT ac80 5775MHz

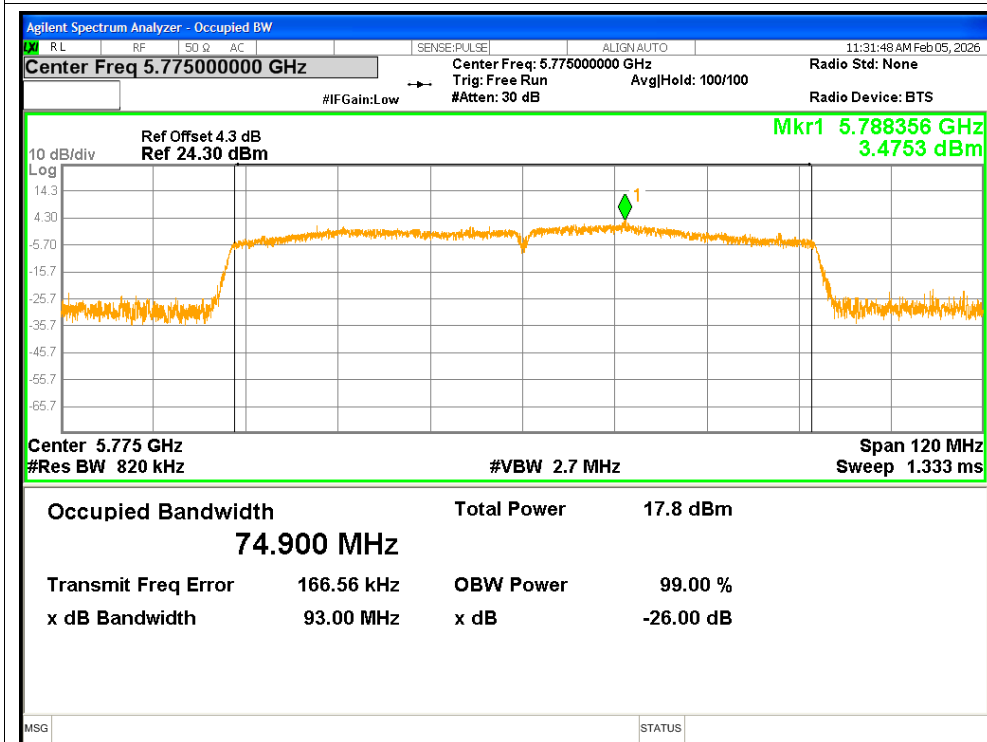


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510kHz)	Duty Factor (dB)	Total PSD (dBm/510kHz)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	-1.228	0.14	-1.088	-1.17	<=30	Pass
NVNT	a	5785	-0.544	0.13	-0.414	-0.5	<=30	Pass
NVNT	a	5825	-0.699	0.13	-0.569	-0.66	<=30	Pass
NVNT	n20	5745	-1.007	0.15	-0.857	-0.94	<=30	Pass
NVNT	n20	5785	-0.908	0.15	-0.758	-0.84	<=30	Pass
NVNT	n20	5825	0.114	0.14	0.254	0.17	<=30	Pass
NVNT	n40	5755	-3.681	0.29	-3.391	-3.48	<=30	Pass
NVNT	n40	5795	-3.695	0.29	-3.405	-3.49	<=30	Pass
NVNT	ac20	5745	-1.665	0.15	-1.515	-1.6	<=30	Pass
NVNT	ac20	5785	-0.788	0.14	-0.648	-0.73	<=30	Pass
NVNT	ac20	5825	-0.218	0.14	-0.078	-0.16	<=30	Pass
NVNT	ac40	5755	-2.915	0.28	-2.635	-2.72	<=30	Pass
NVNT	ac40	5795	-3.653	0.28	-3.373	-3.46	<=30	Pass
NVNT	ac80	5775	-7.422	0.55	-6.872	-6.96	<=30	Pass

Test Graphs


PSD NVNT a 5745MHz

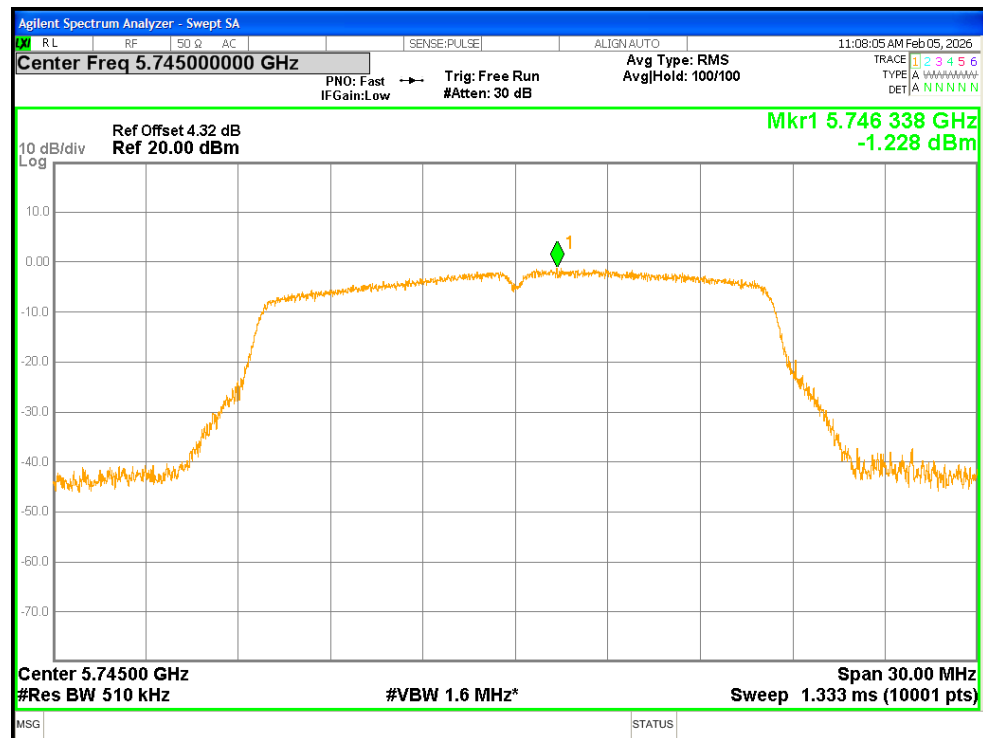


PSD NVNT a 5785MHz

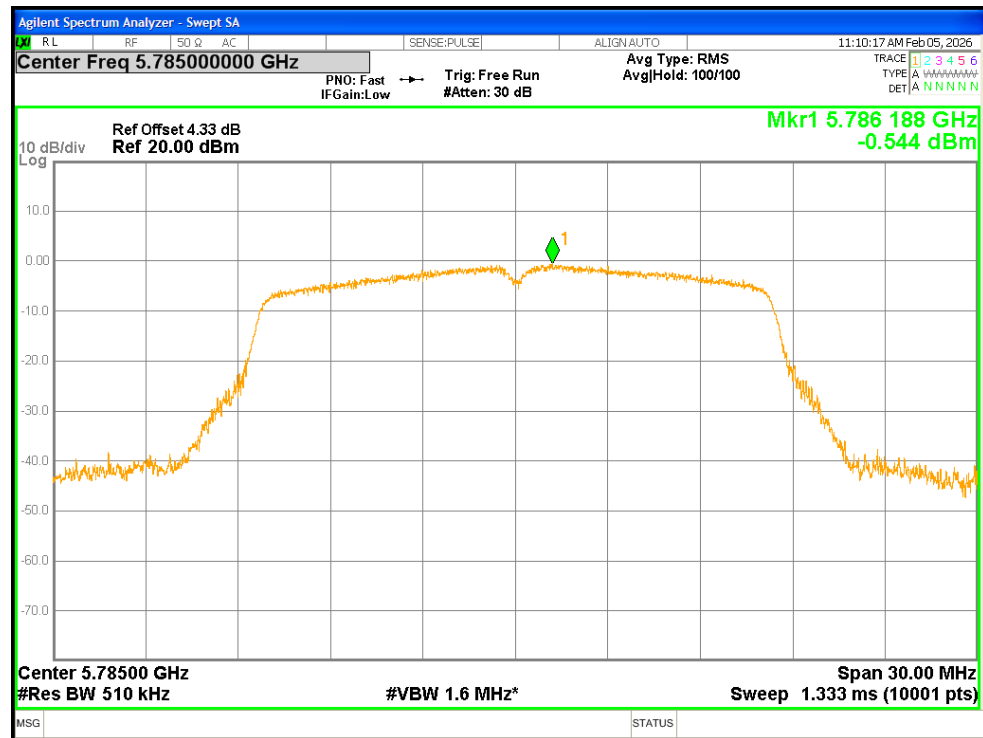


PSD NVNT a 5825MHz

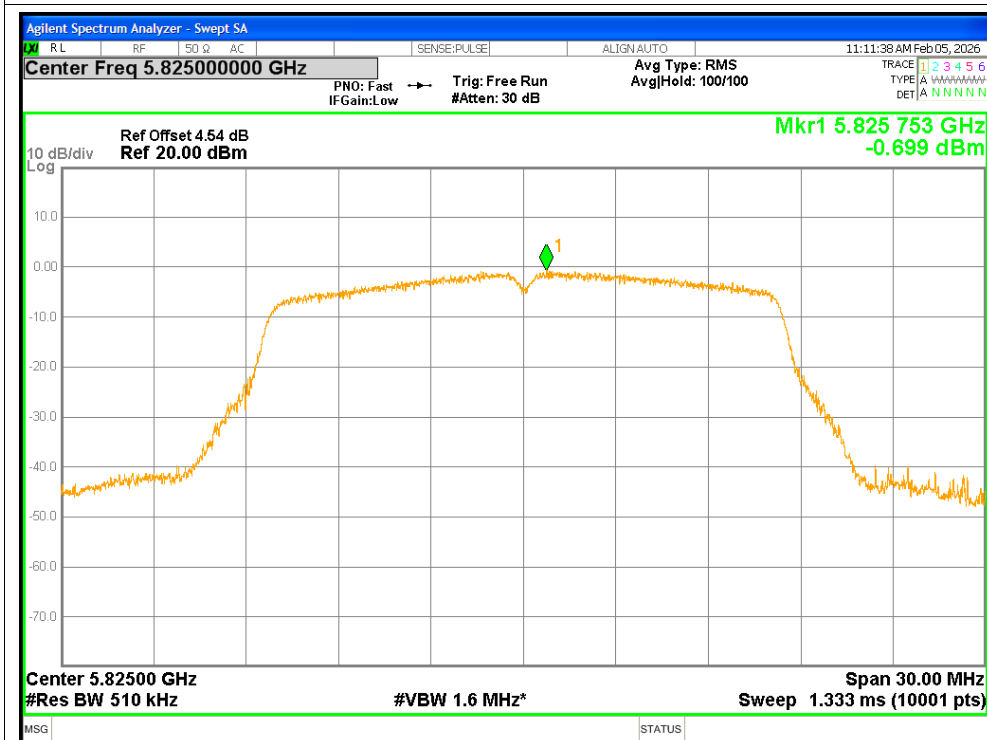


PSD NVNT n20 5745MHz

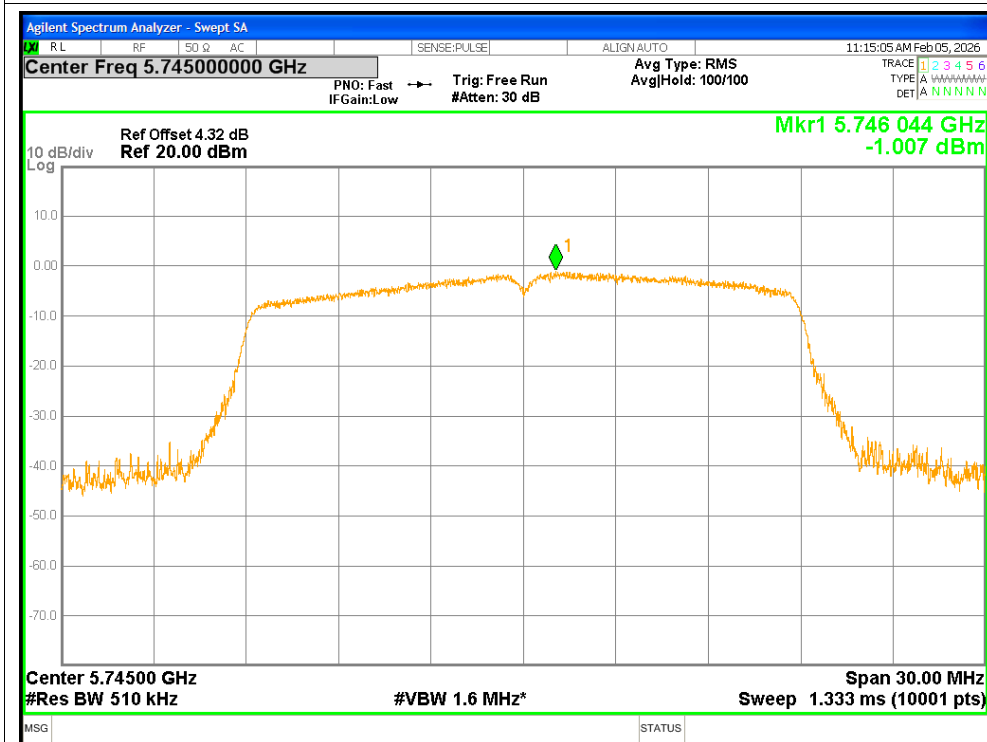


PSD NVNT n20 5785MHz

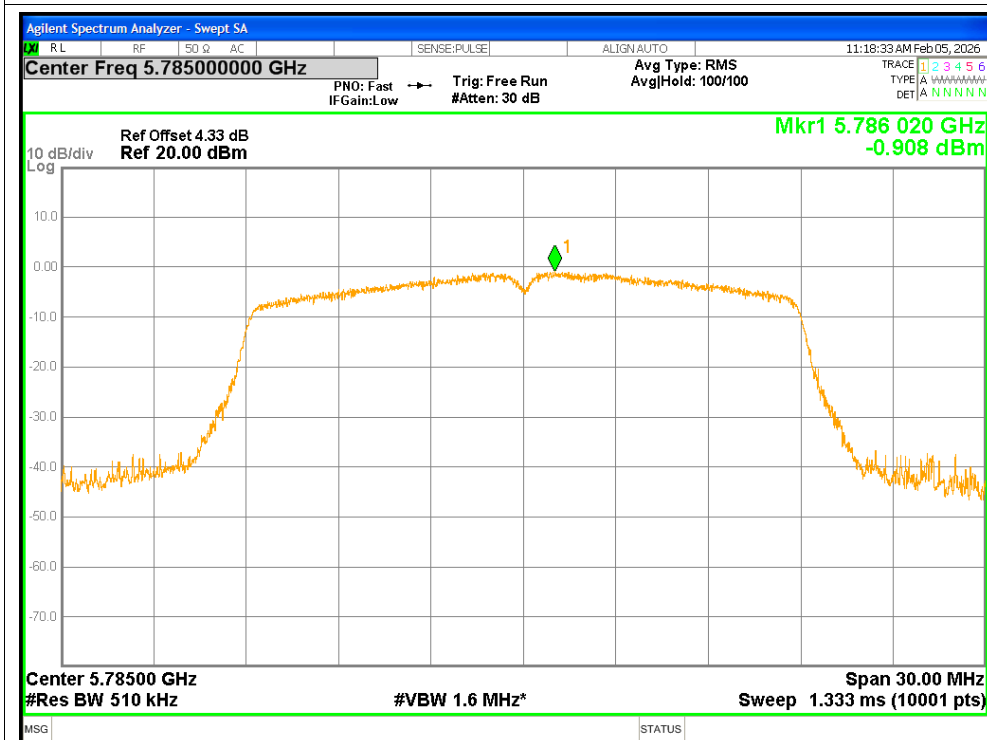


PSD NVNT n20 5825MHz

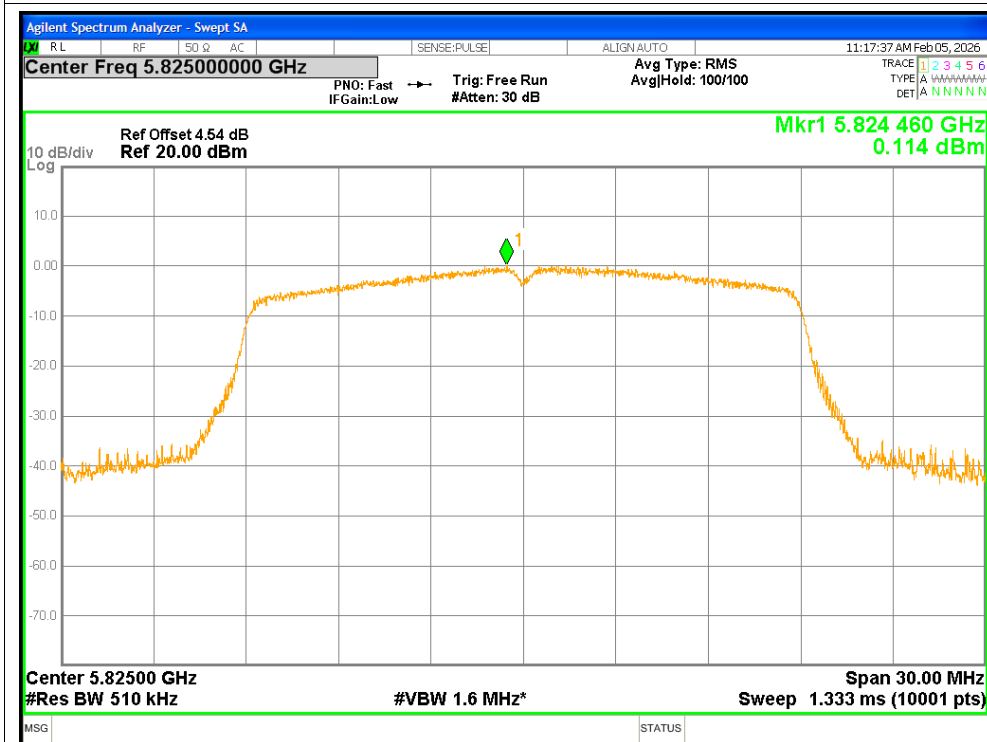


PSD NVNT n40 5755MHz

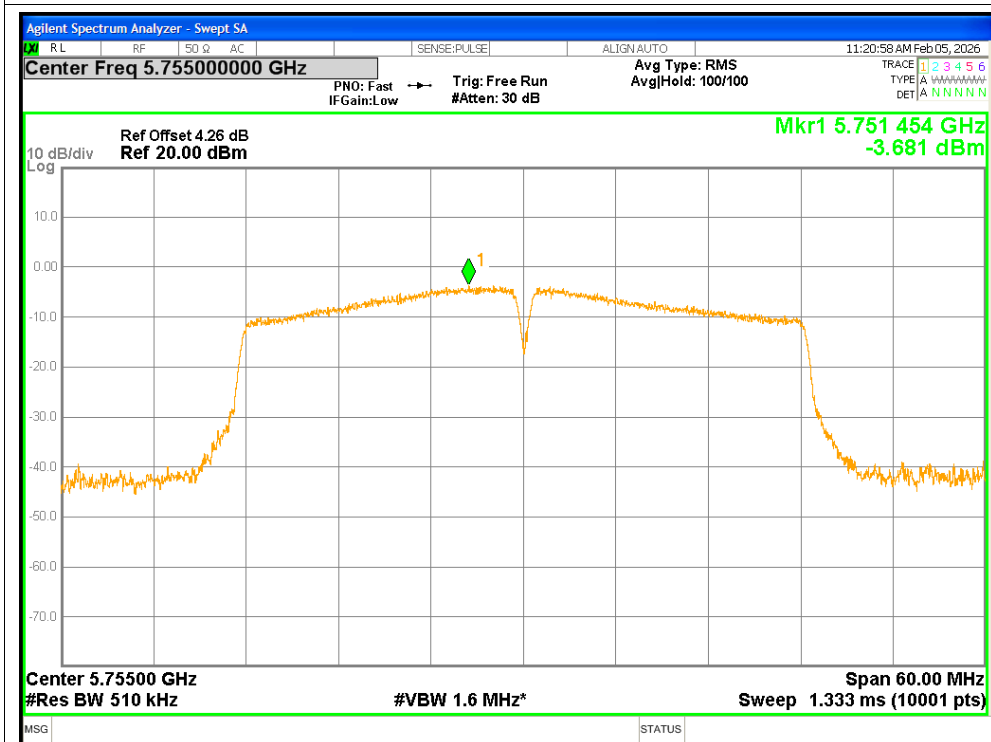


PSD NVNT n40 5795MHz

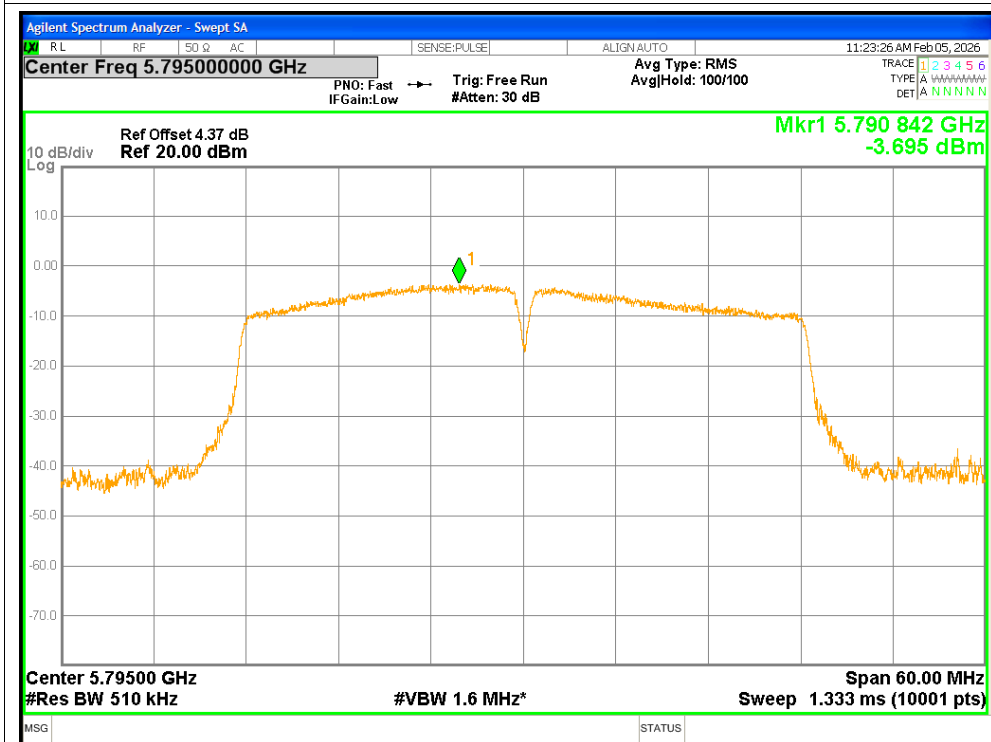


PSD NVNT ac20 5745MHz

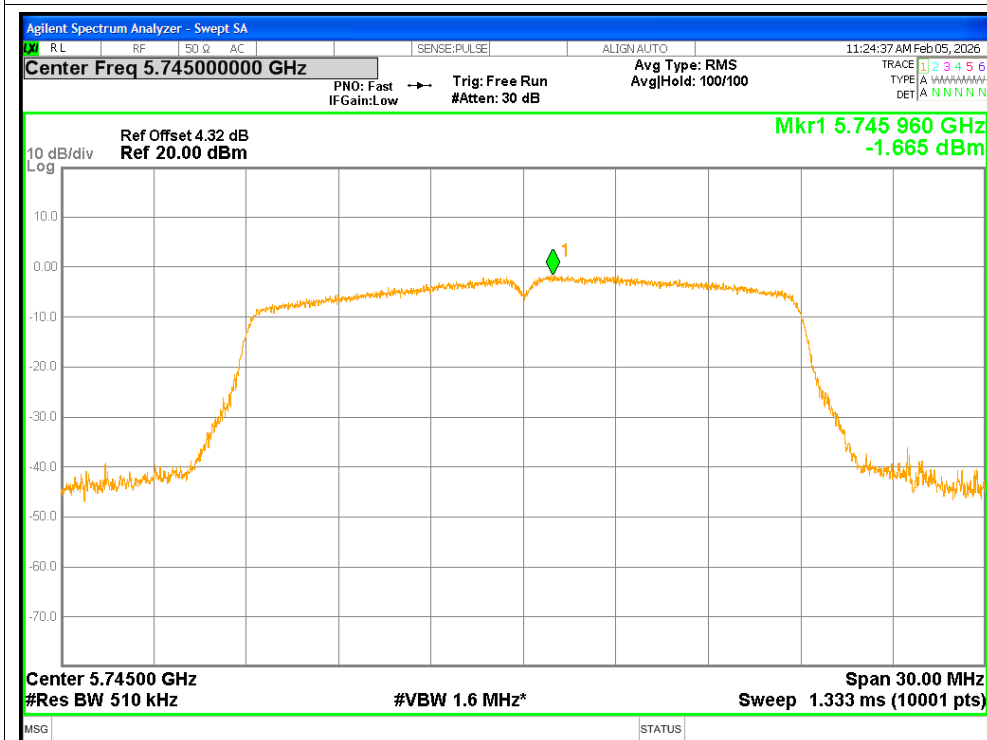


PSD NVNT ac20 5785MHz

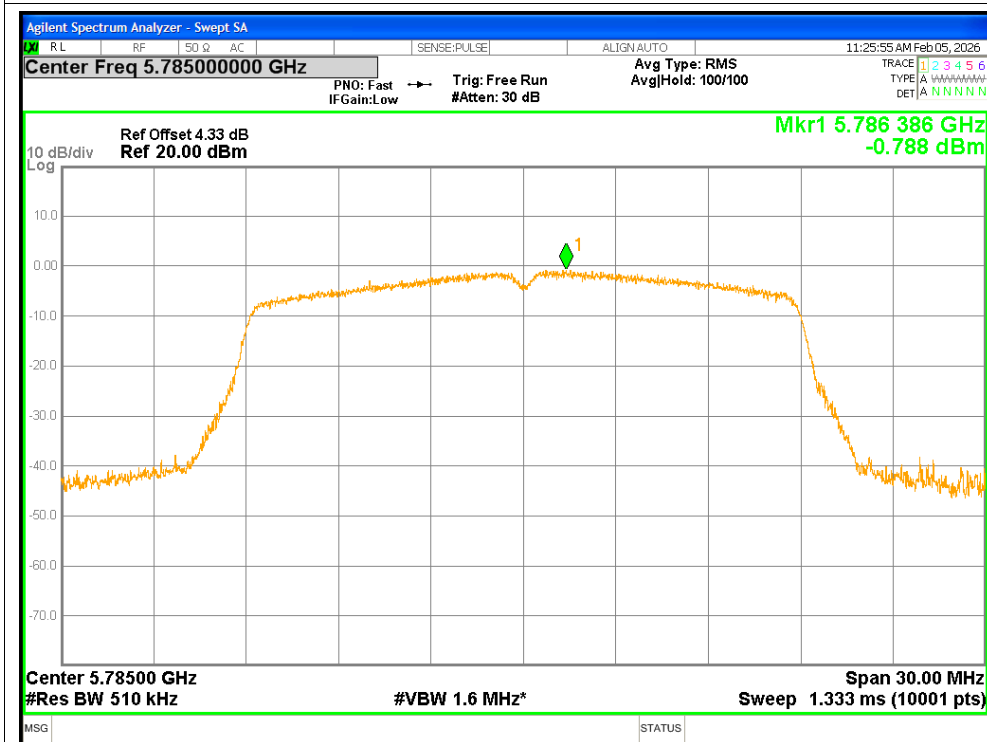


PSD NVNT ac20 5825MHz

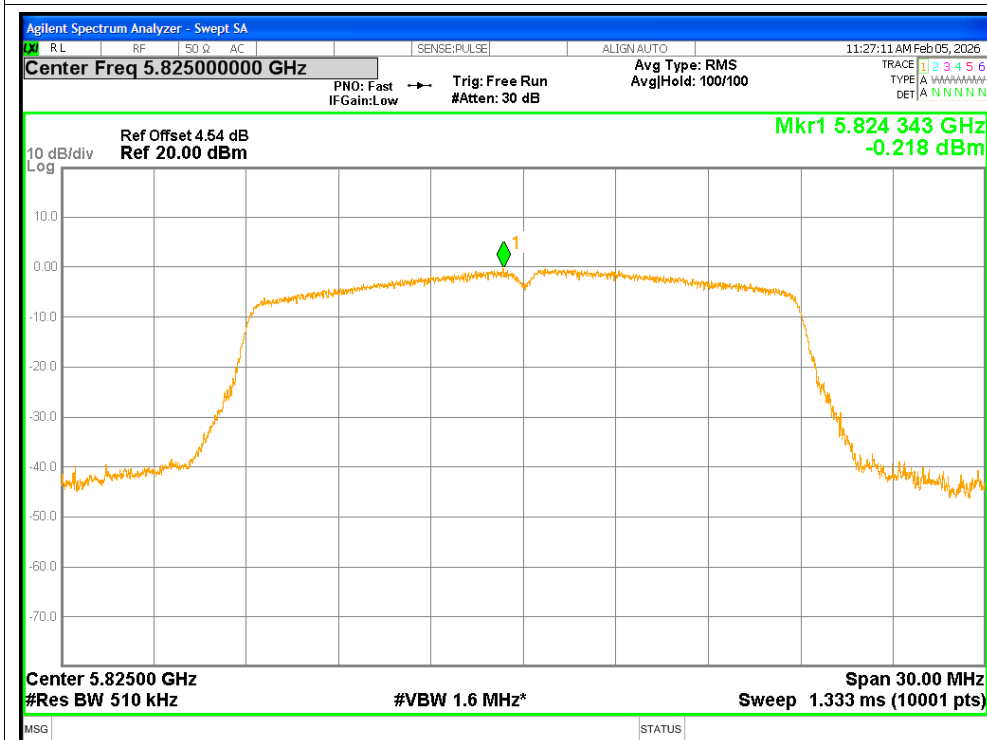

PSD NVNT ac40 5755MHz

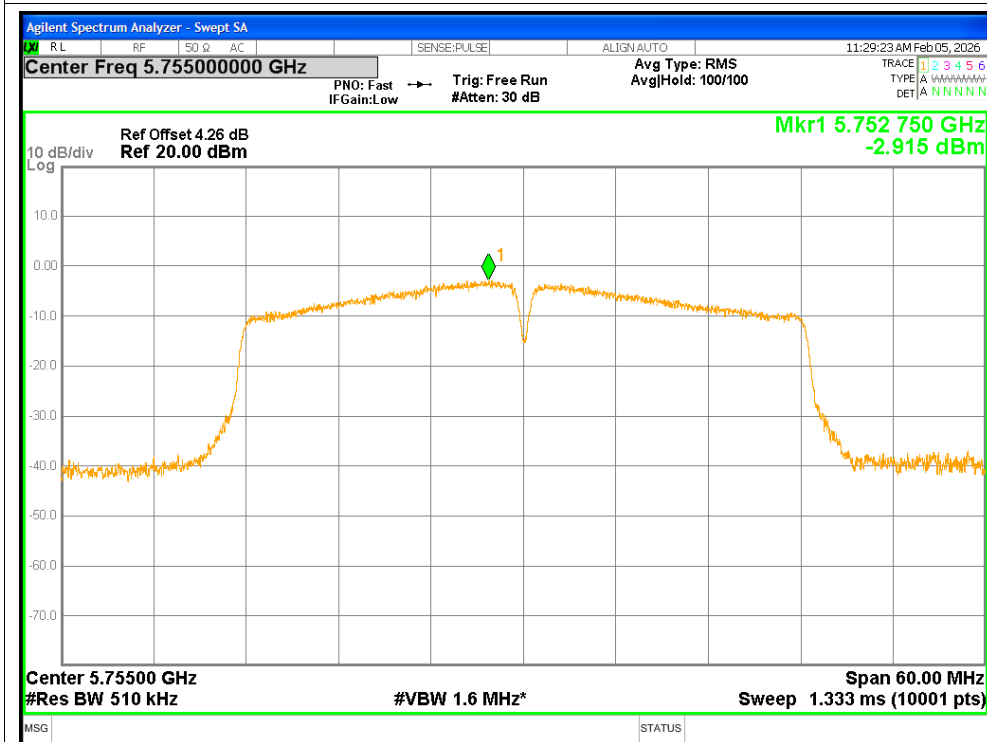

PSD NVNT ac40 5795MHz

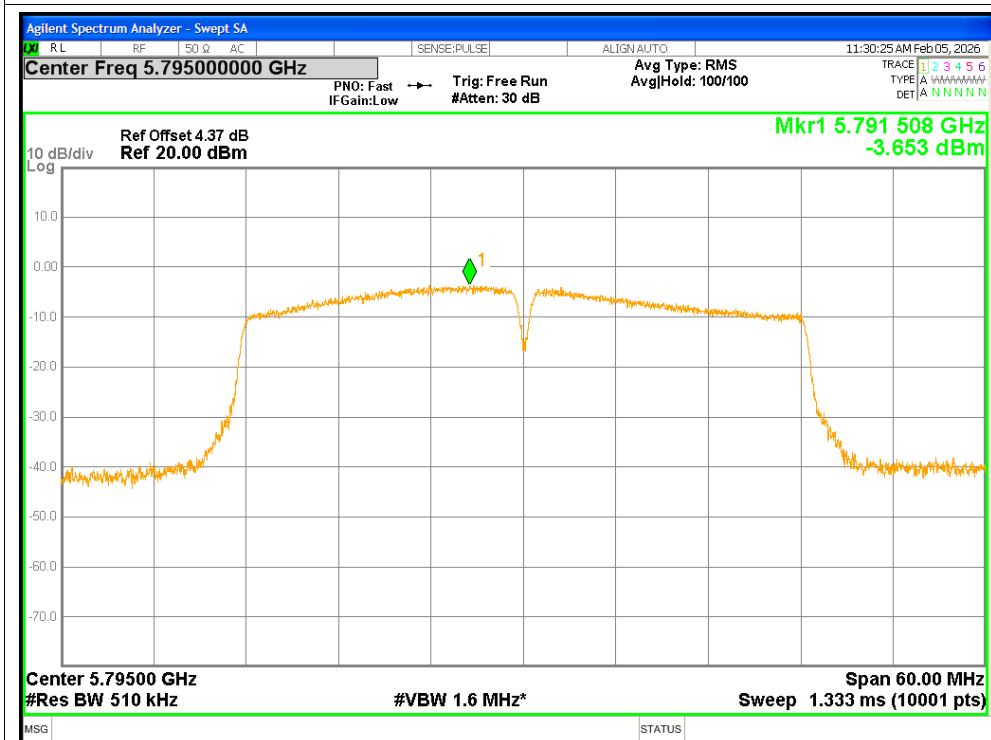

PSD NVNT ac80 5775MHz

