



Middle Channel

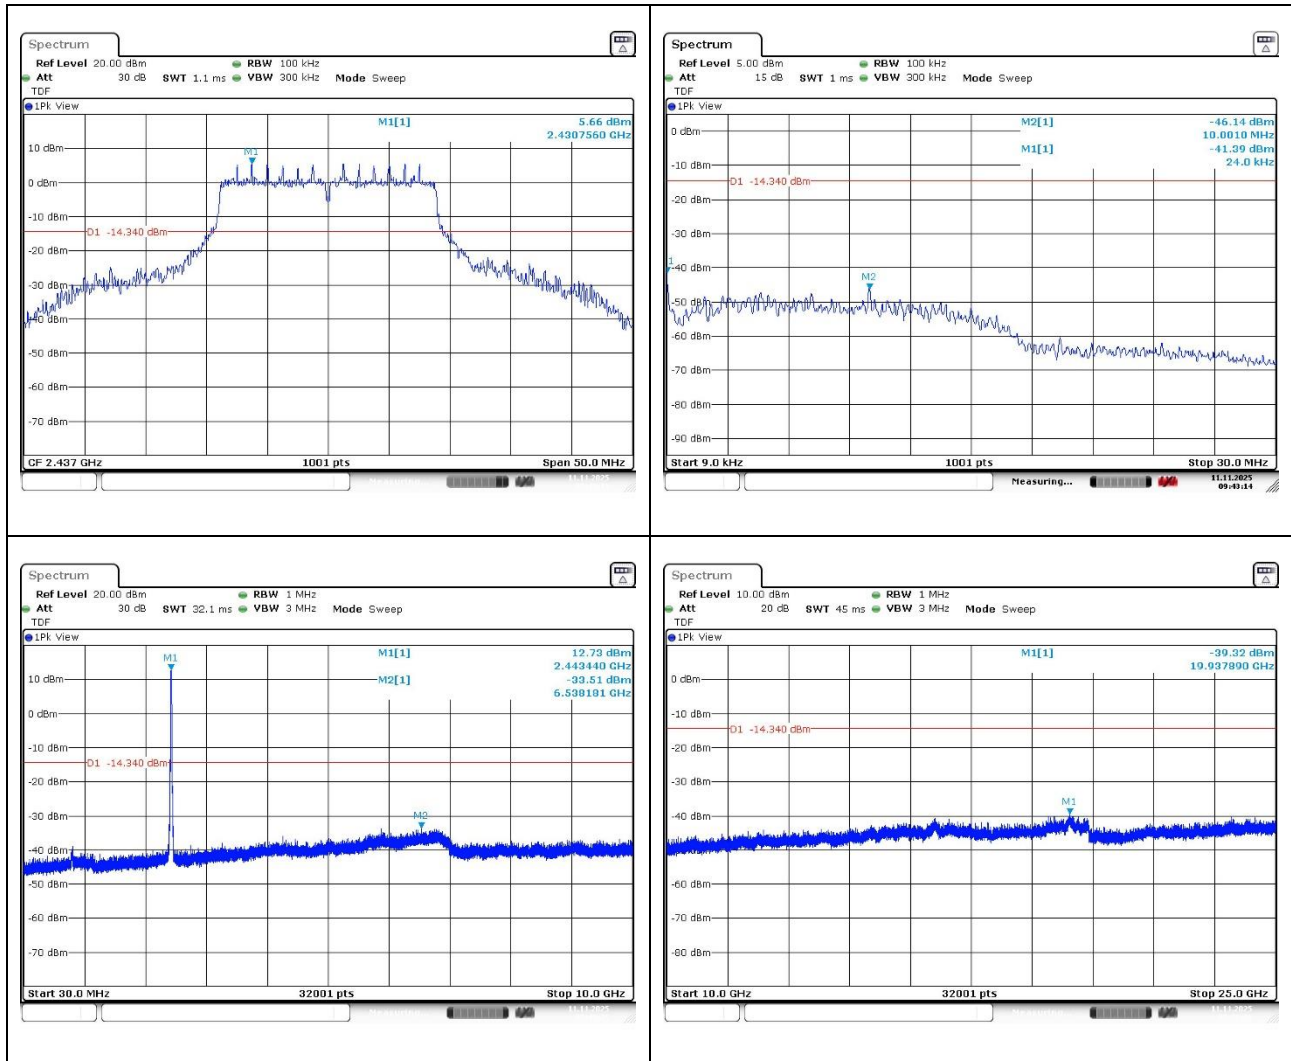


High Channel

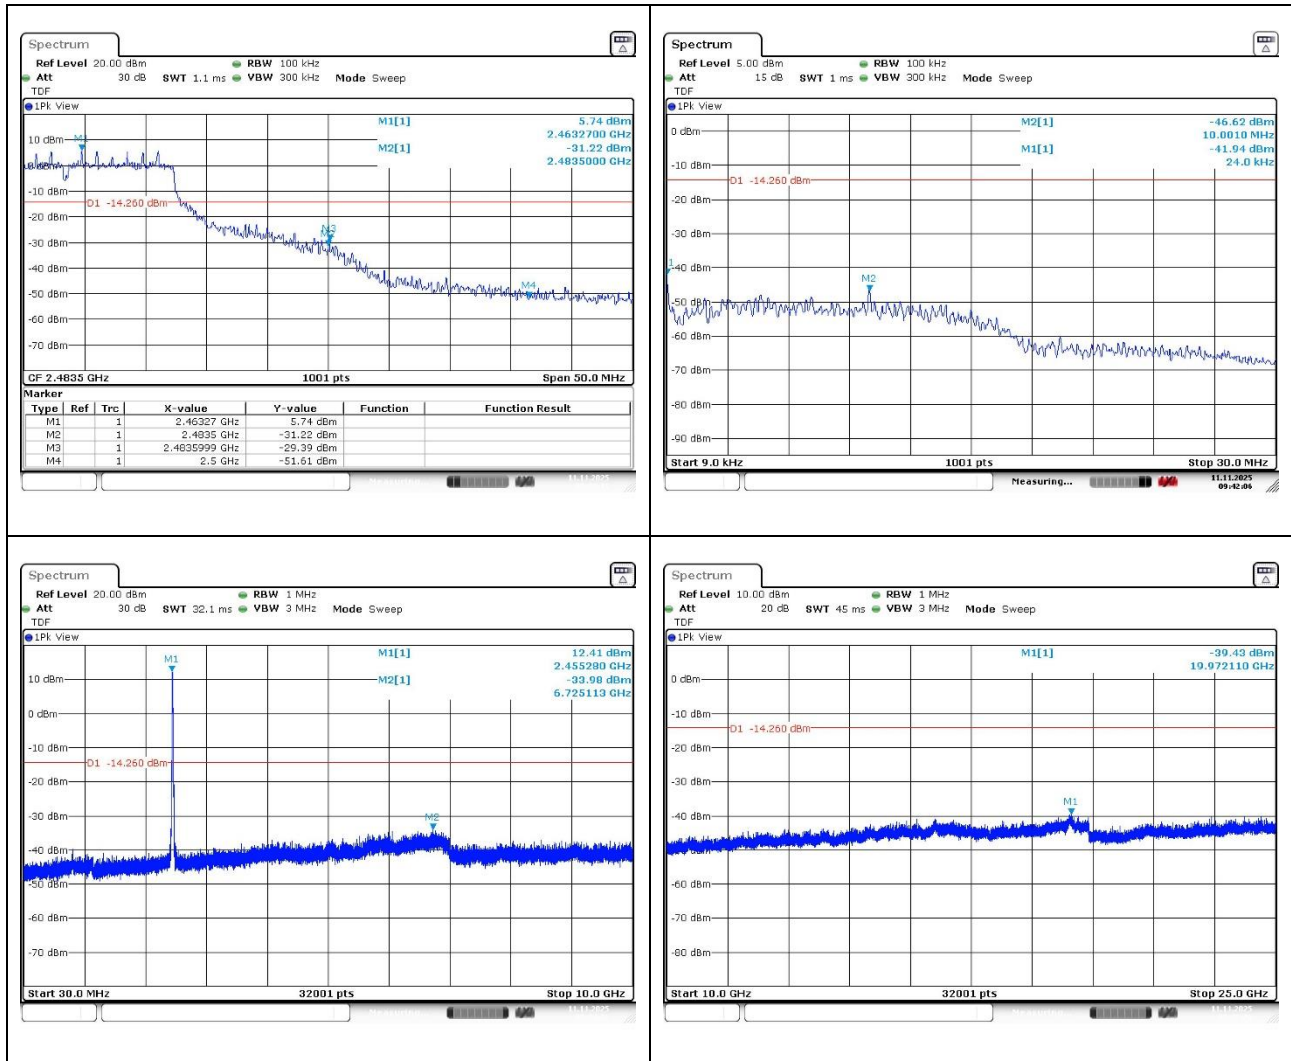


11n_HT40


Low Channel

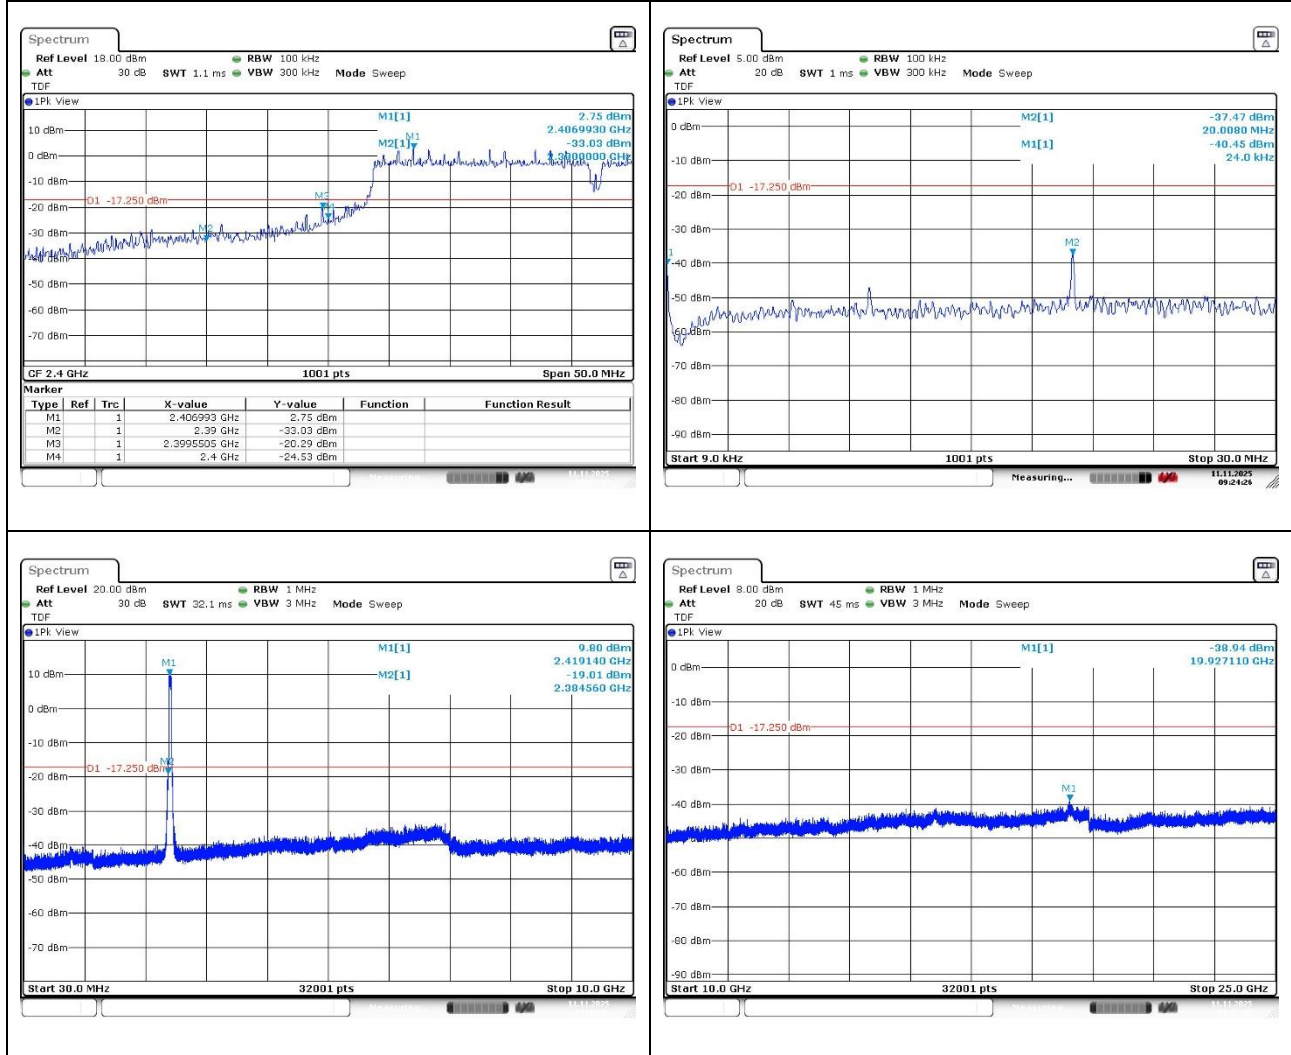

Middle Channel

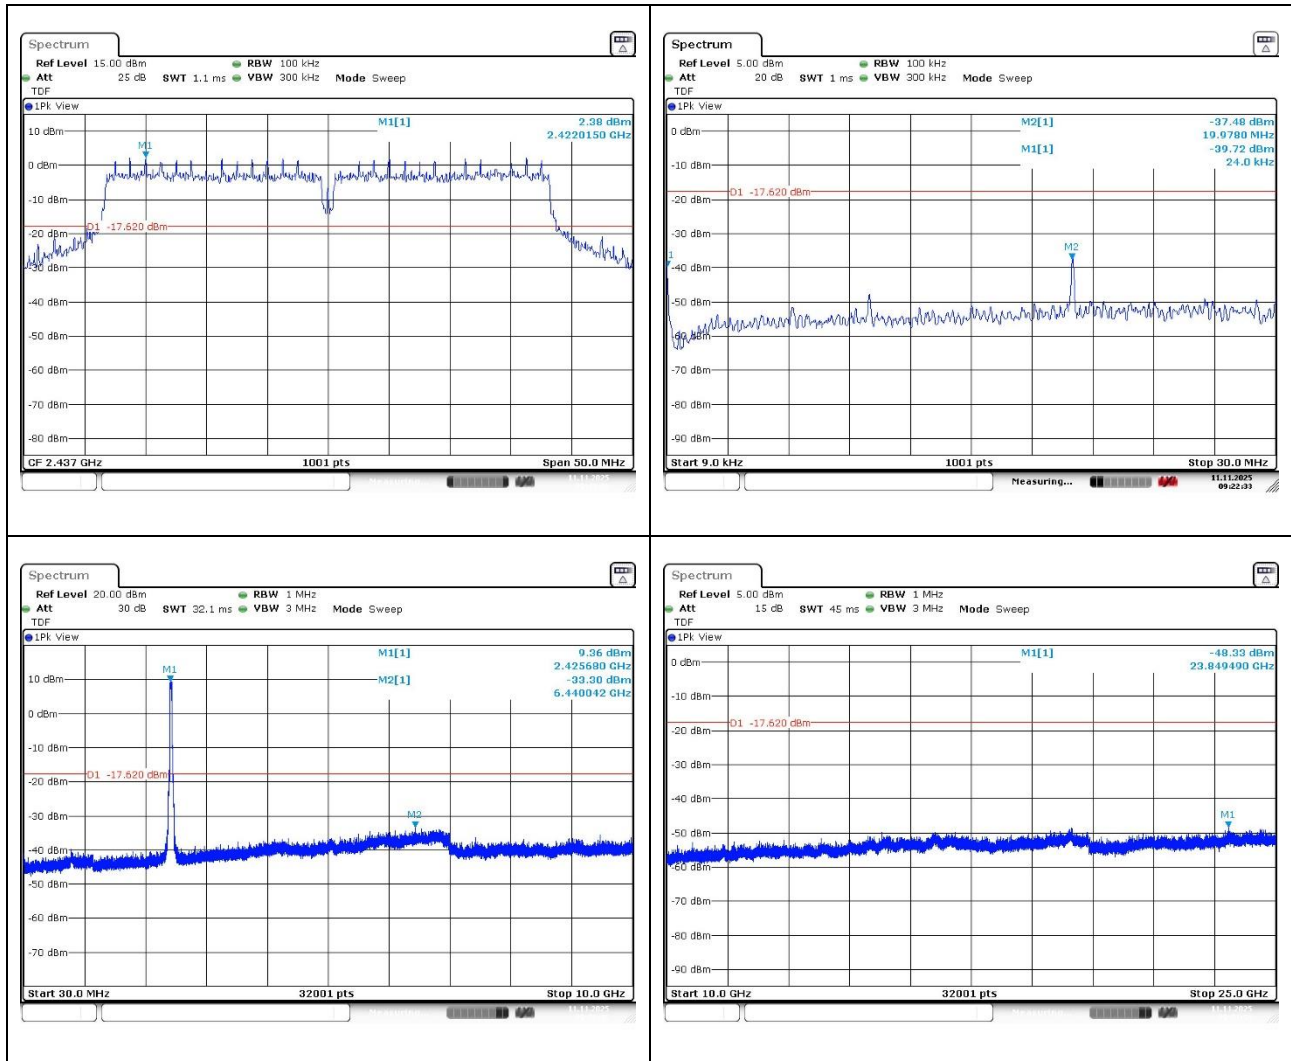

High Channel

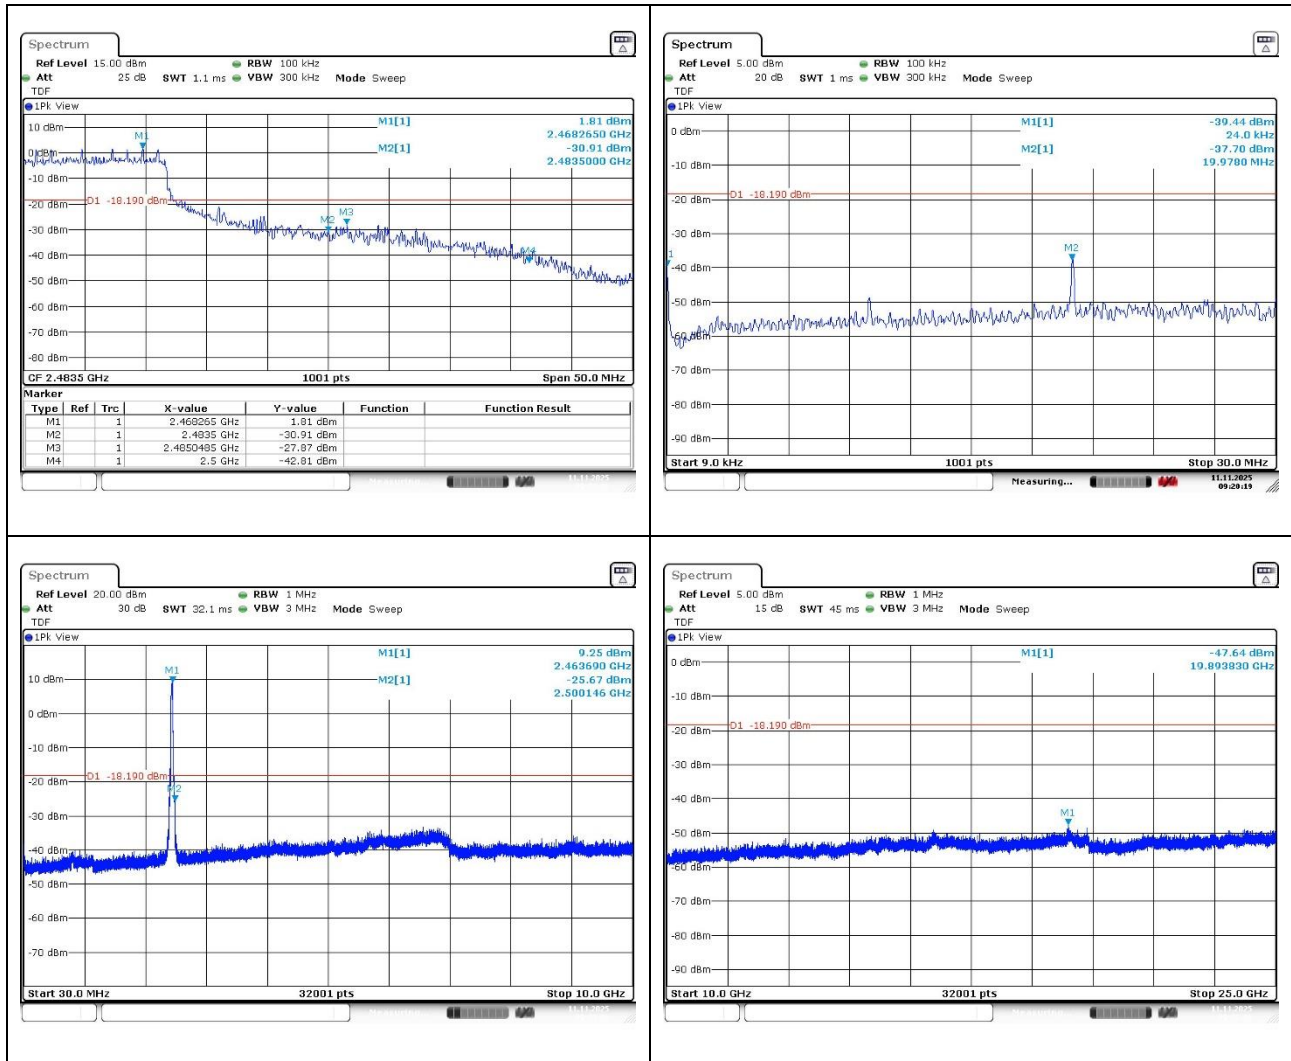

3. 6 dB Bandwidth & 99 % Bandwidth

3.1. Test Setup



3.2. Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.3. Test Procedure

3.3.1. 6 dB Bandwidth

The test follows section 11.8 DTS bandwidth of ANSI C63.10-2020.

Tests performed using section 11.8.1 Option 1.

- Option 1:

1. Set RBW to = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
2. Set the VBW $\geq [3 \times \text{RBW}]$.
3. Detector = peak.
4. Trace mode = max hold.
5. Sweep = No faster than coupled (auto) time.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the "-6 dB down amplitude". If a marker is below this "-6 dB down amplitude" value, then it shall be as close as possible to this value.

3.3.2. 99 % Bandwidth

The test follows section 6.9.3 of ANSI C63.10-2020.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $10 \log(\text{OBW/RBW})$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4. Test Results


Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 %

Mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Bandwidth (MHz)	Minimum Bandwidth (kHz)
11b	Low	2 412	10.246	13.546	500
	Middle	2 437	10.246	13.546	
	High	2 462	10.246	13.546	
11g	Low	2 412	16.614	17.713	
	Middle	2 437	16.672	17.829	
	High	2 462	16.614	17.771	
11n_HT20	Low	2 412	17.829	18.755	
	Middle	2 437	17.887	18.813	
	High	2 462	17.829	18.871	
11n_HT40	Low	2 422	36.932	37.858	
	Middle	2 437	36.816	37.858	
	High	2 452	36.816	37.858	


- Test plots
 - 6 dB Bandwidth

11b


Low Channel

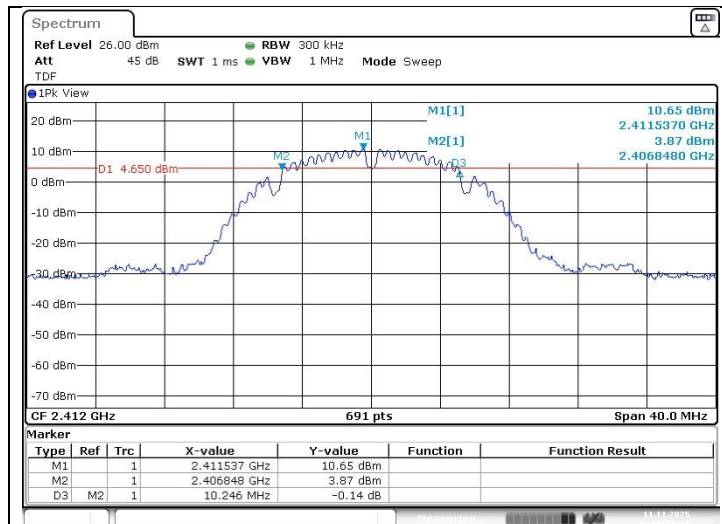

Middle Channel

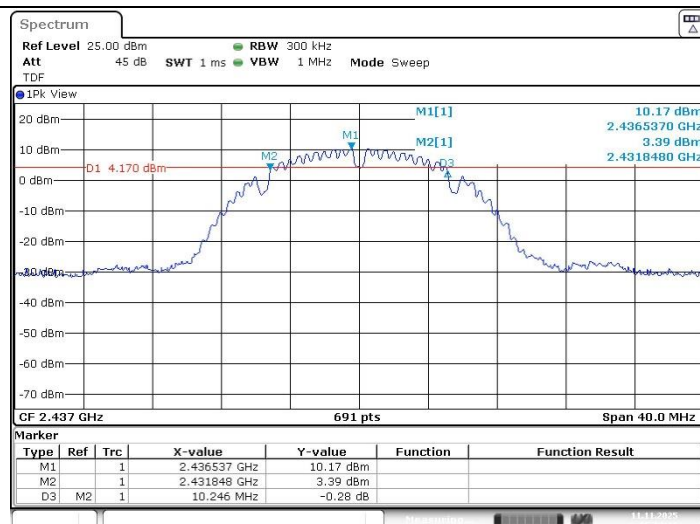


High Channel

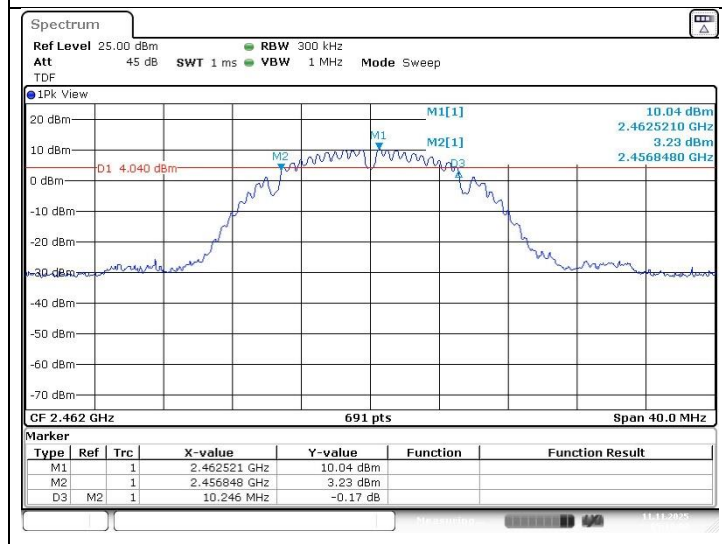


11g


Low Channel

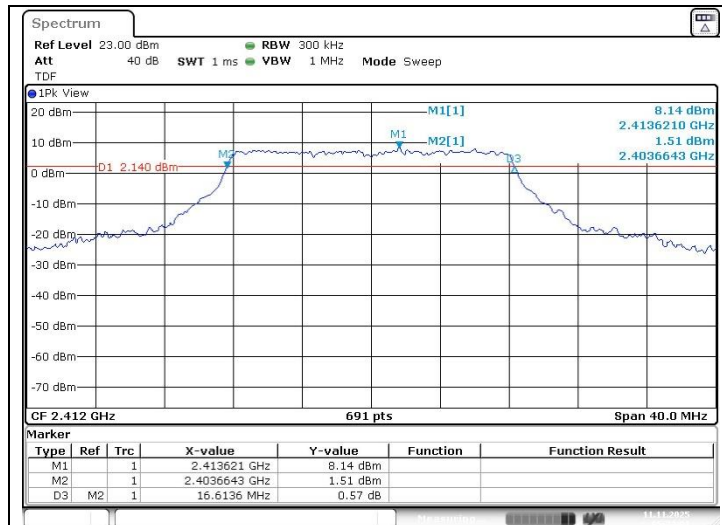

Middle Channel

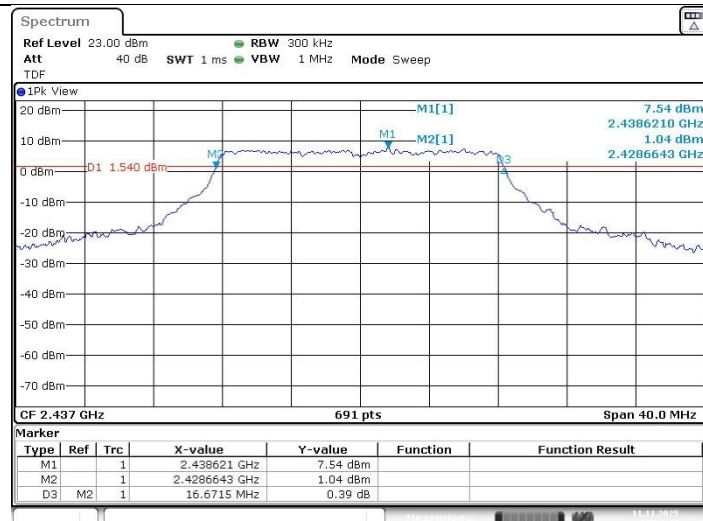


High Channel

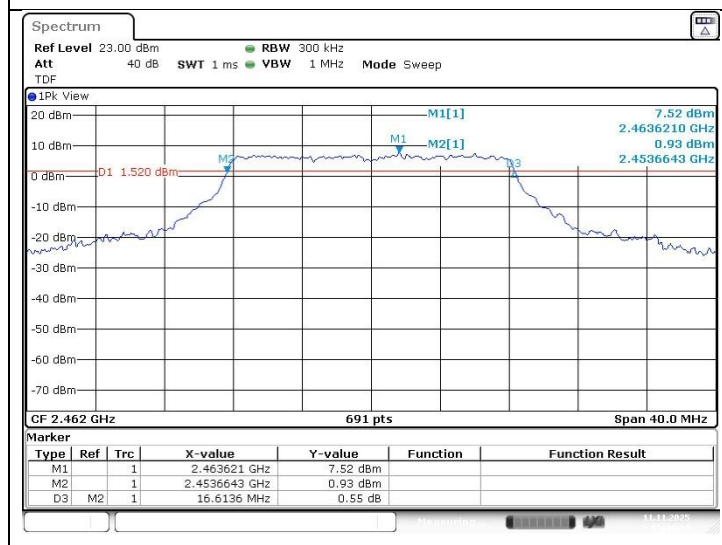


11n_HT20


Low Channel

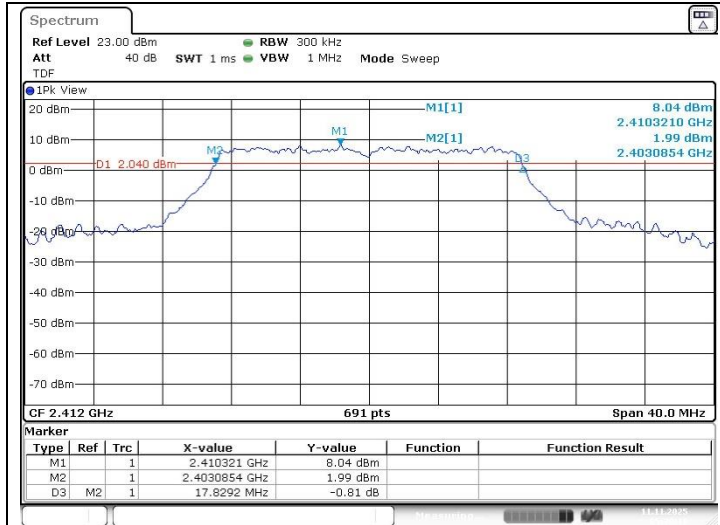

Middle Channel

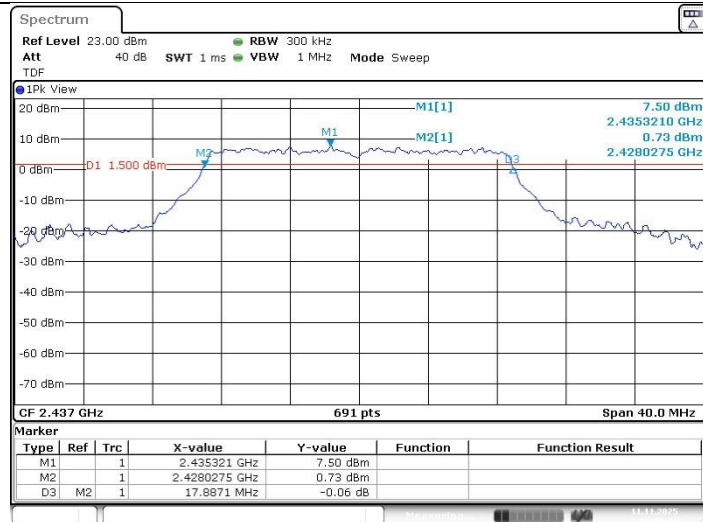

High Channel

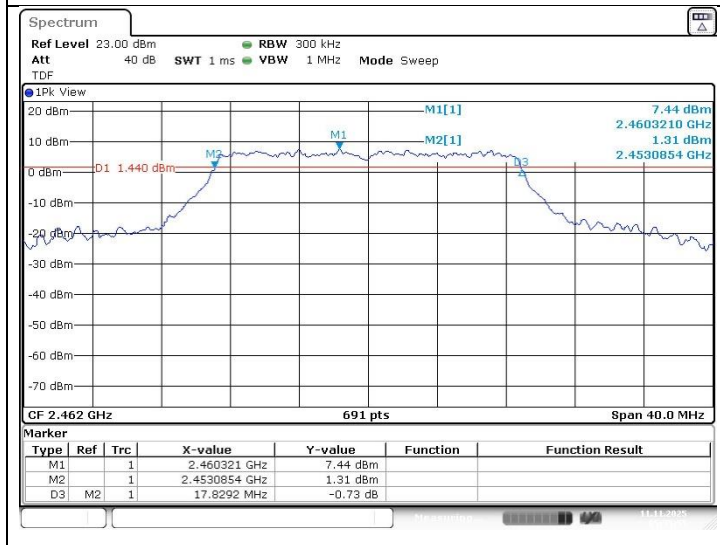


11n_HT40


Low Channel



Middle Channel

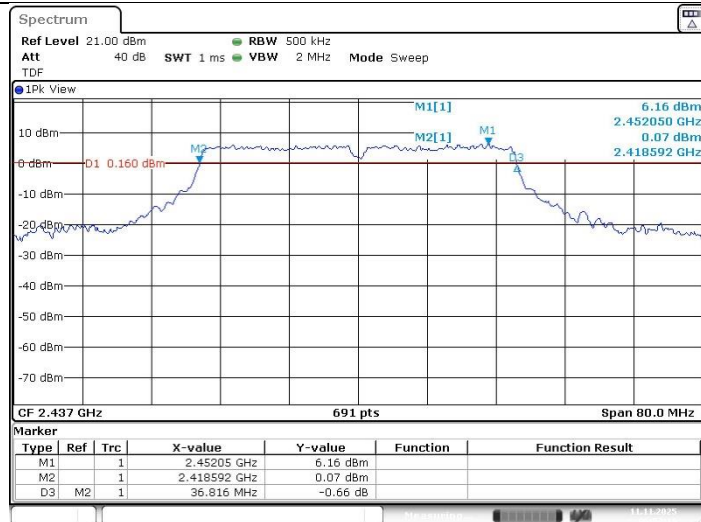


High Channel

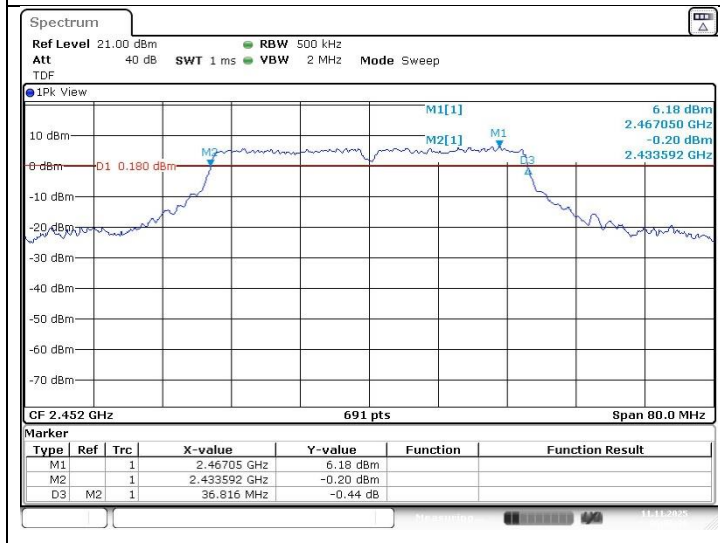


- 99% Bandwidth

11b


Low Channel

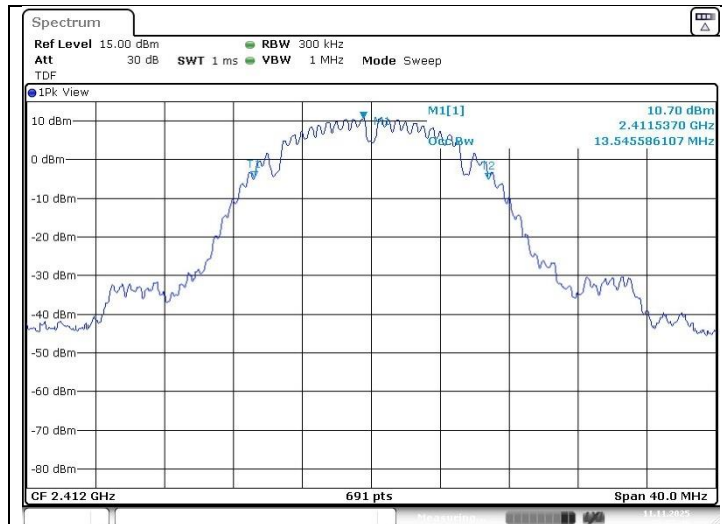

Middle Channel

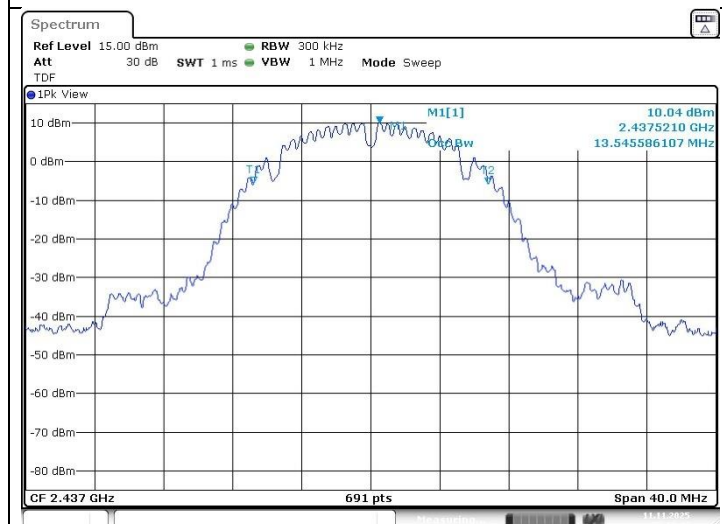


High Channel

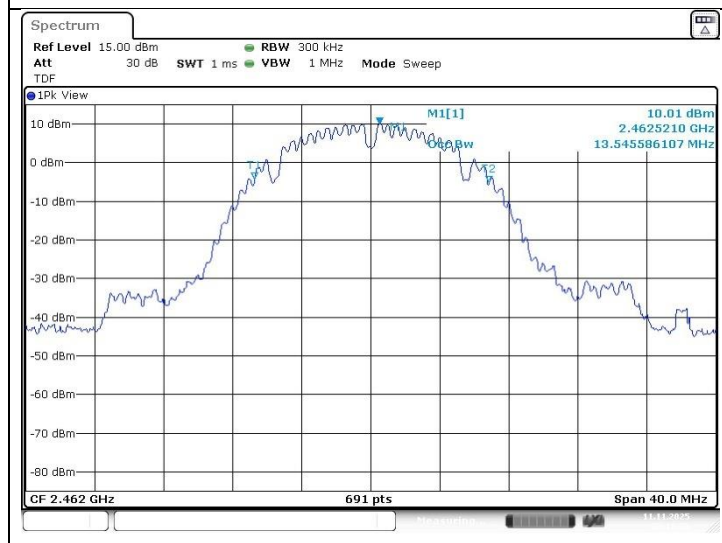


11g


Low Channel

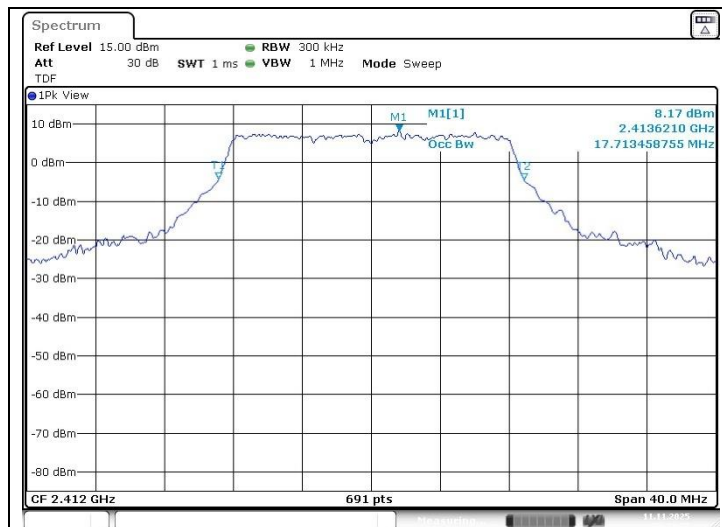

Middle Channel

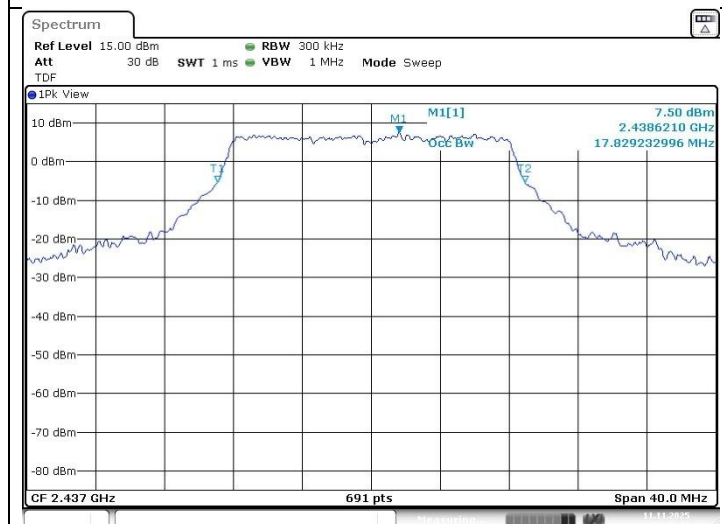


High Channel

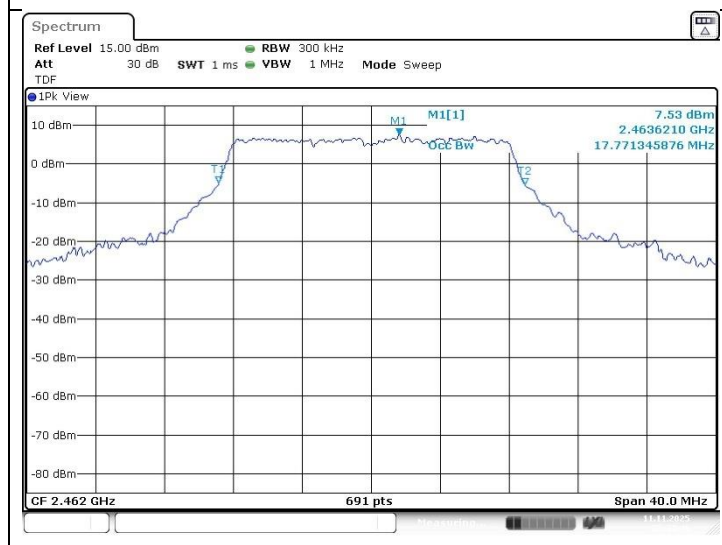


11n_HT20


Low Channel

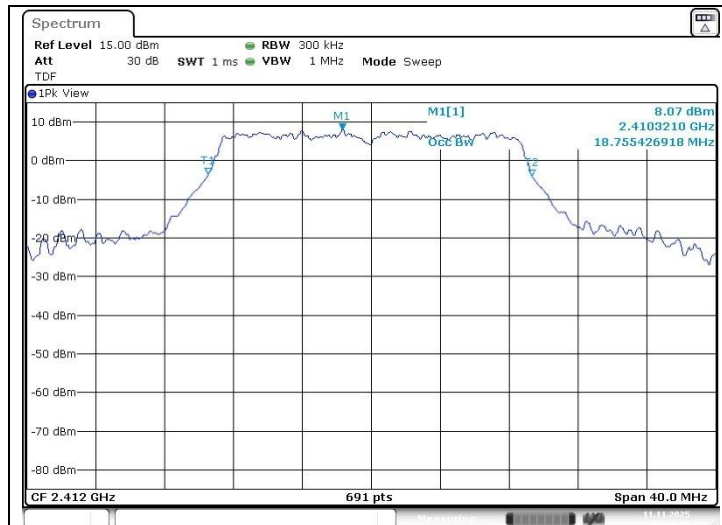

Middle Channel

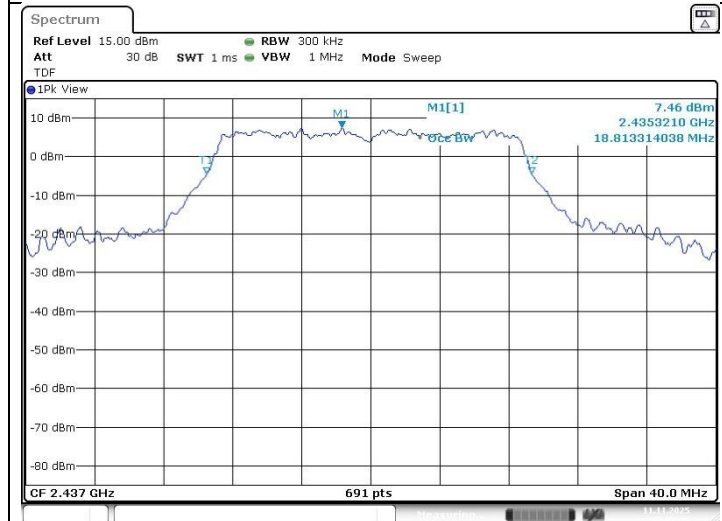


High Channel

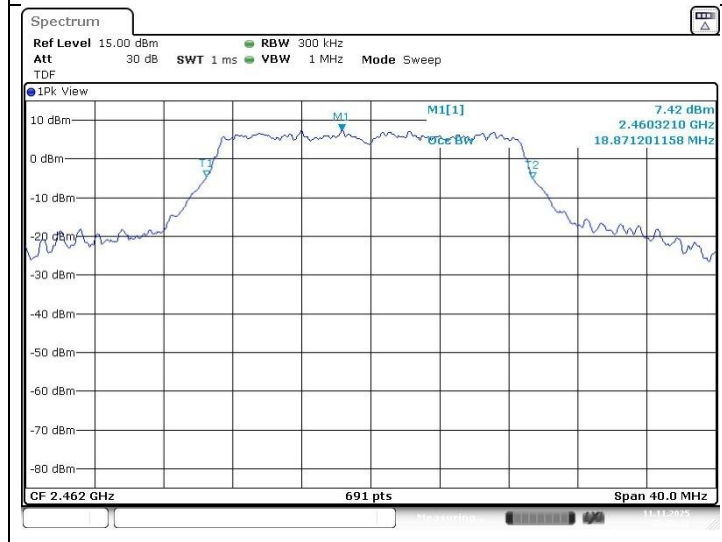


11n_HT40


Low Channel

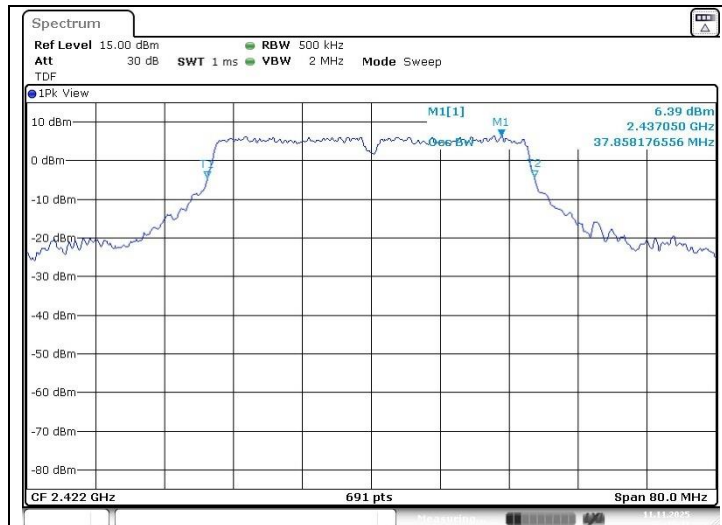

Middle Channel

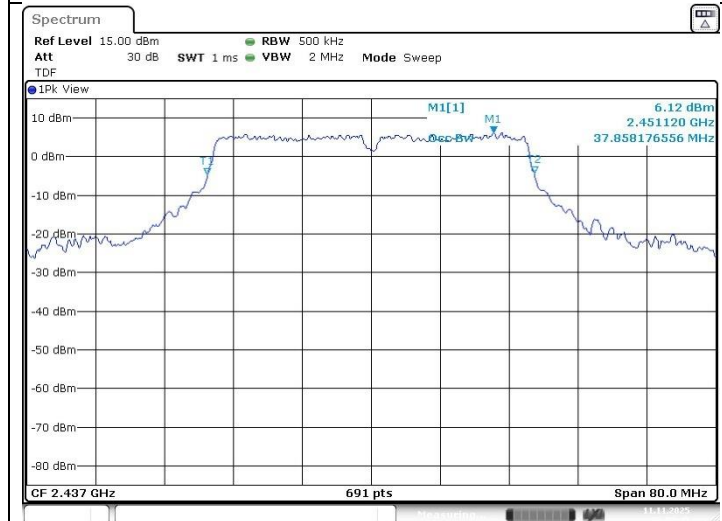


High Channel

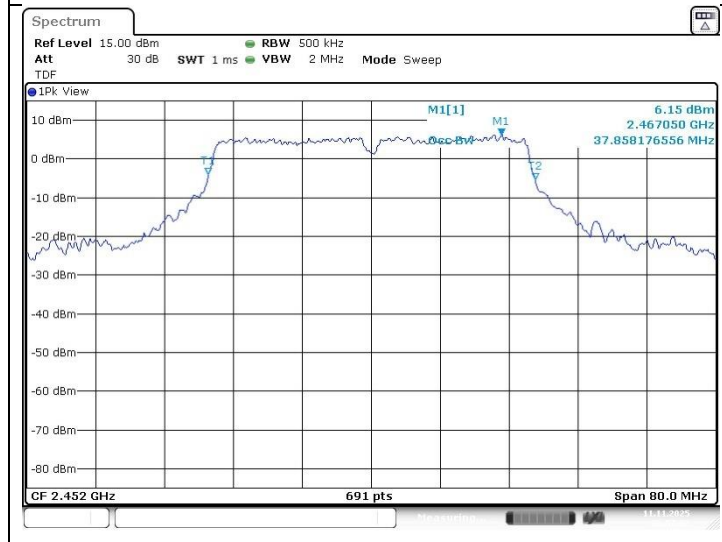

4. Maximum Peak Conducted Output Power

4.1. Test Setup

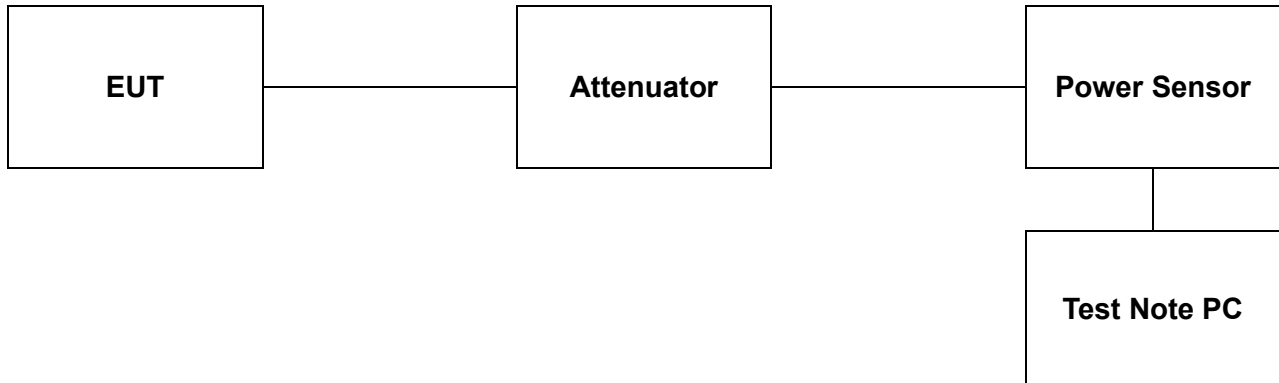

4.2. Limit

According to §15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3. Test Procedure

The test follows section 11.9.1.2 of ANSI C63.10-2020.

PKPM1 Peak-reading power meter method

- The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The test follows section 11.9.2.3.2 of ANSI C63.10-2020.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

- Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

Gate triggering can be implemented in such a way that the sweep of the instrument is only active during the burst period of the device. Any Gate triggering shall be performed on the full power portion of the pulses and care must be taken to ensure that static portions of the pulse are not included in the measurement (ensuring that the trace is averaged over the entire symbol range). All Gate triggered measurements shall be accompanied by a Gate setup plot in the test report.

Test program: (S/W name: R&S Power Viewer, Version: 3.2.0)

1. Initially overall offset for attenuator and cable loss is measured per frequency.
2. Measured offset is inserted in test program in advance of measurement for output power.
3. Power for each frequency (channel) of device is investigated as final result.
4. Final result reported on this section from R&S power viewer program includes with several factors and test program shows only final result.

4.4. Test Results

Ambient temperature : (23 ± 1) °C


Relative humidity : 47 %

Mode	Channel	Frequency (MHz)	Average Power Result (dB m)	Peak Power Result (dB m)	Limit (dB m)
11b	Low	2 412	<u>17.54</u>	<u>20.35</u>	30.00
	Middle	2 437	17.03	19.90	
	High	2 462	16.78	19.70	
11g	Low	2 412	<u>15.58</u>	<u>22.14</u>	
	Middle	2 437	15.19	21.71	
	High	2 462	15.09	21.50	
11n_HT20	Low	2 412	<u>15.56</u>	<u>22.40</u>	
	Middle	2 437	15.17	21.99	
	High	2 462	15.03	21.74	
11n_HT40	Low	2 422	<u>15.37</u>	<u>22.38</u>	
	Middle	2 437	15.02	22.08	
	High	2 452	14.88	21.88	


- Test plots

11b


Low Channel

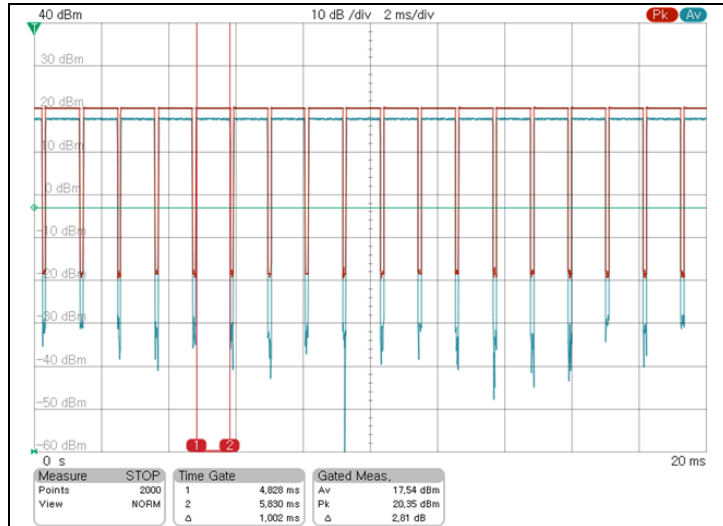

Middle Channel

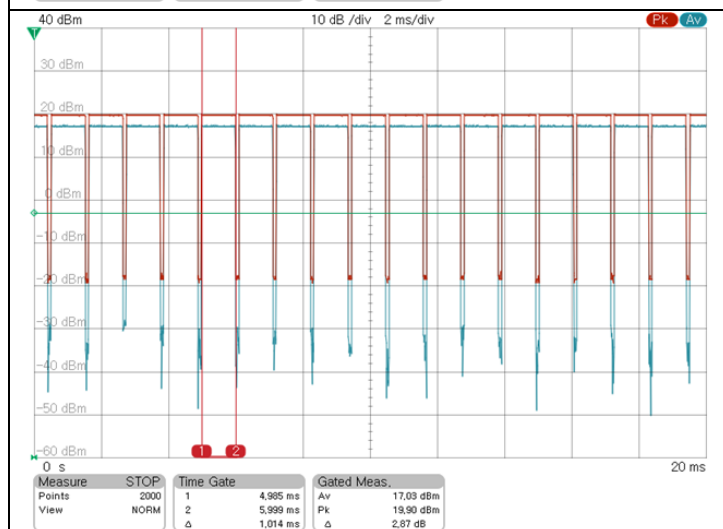


High Channel

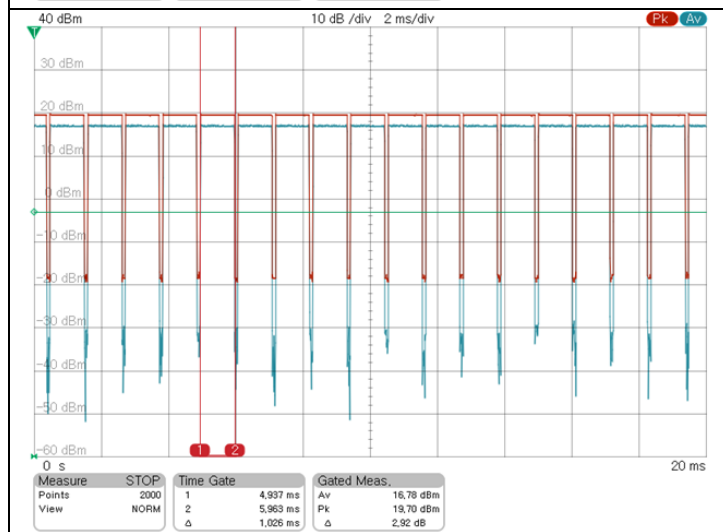


11g


Low Channel

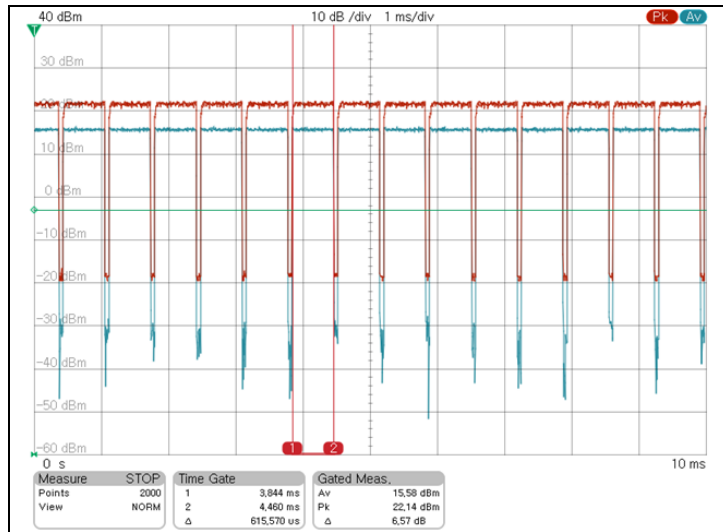

Middle Channel

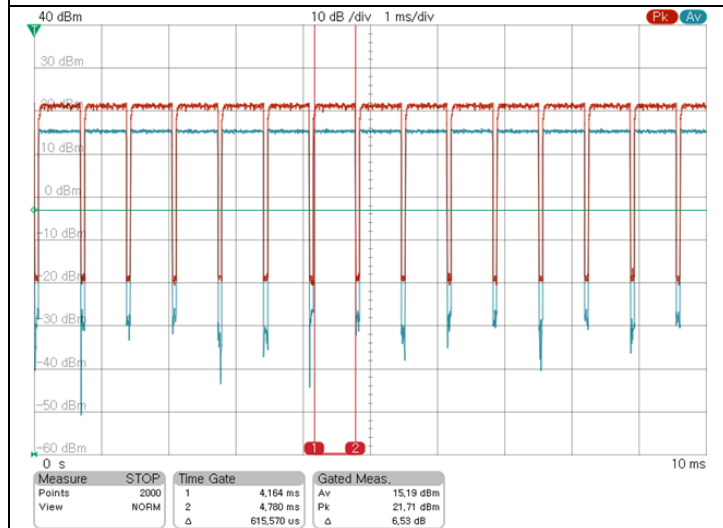


High Channel

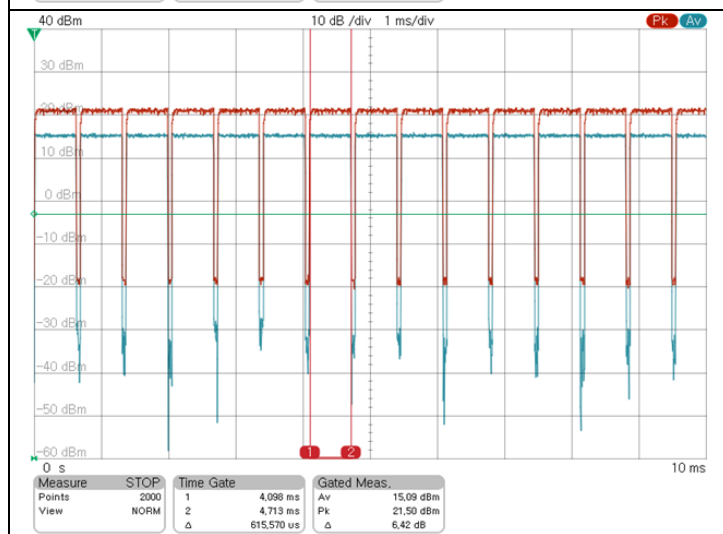


11n_HT20


Low Channel

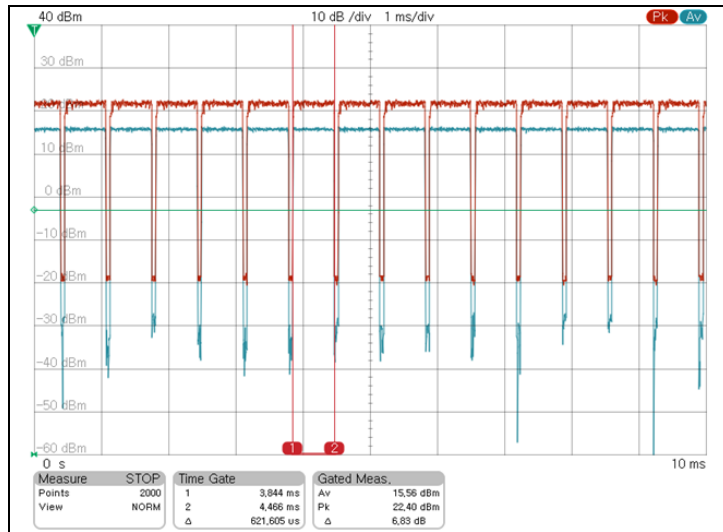

Middle Channel

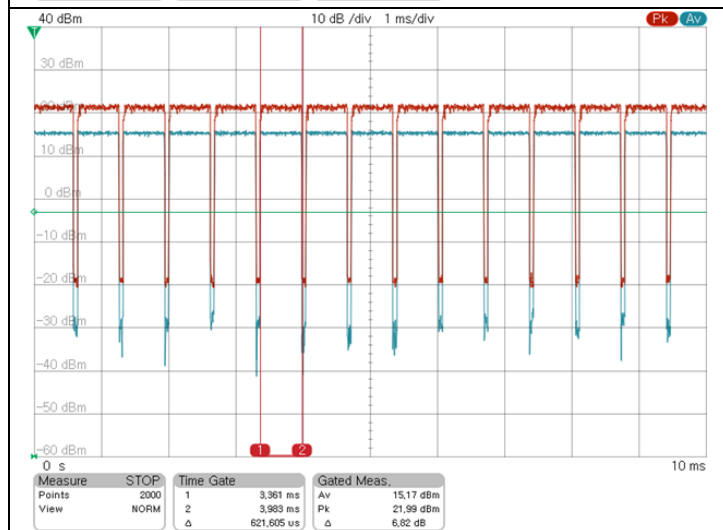


High Channel

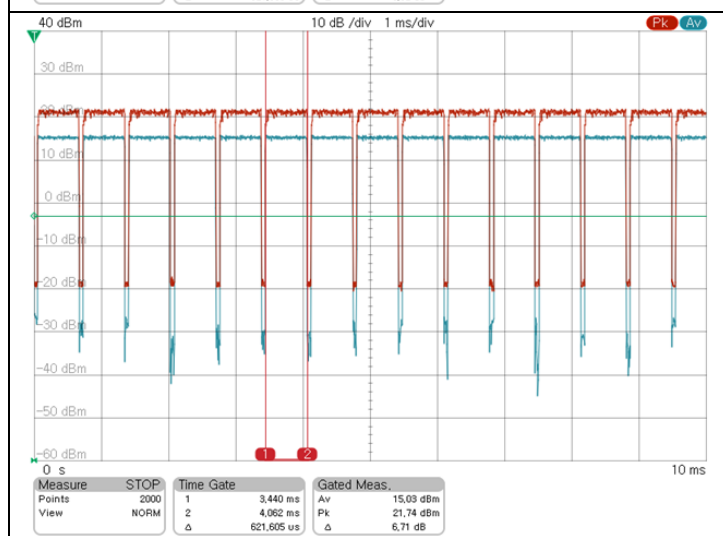


11n_HT40


Low Channel

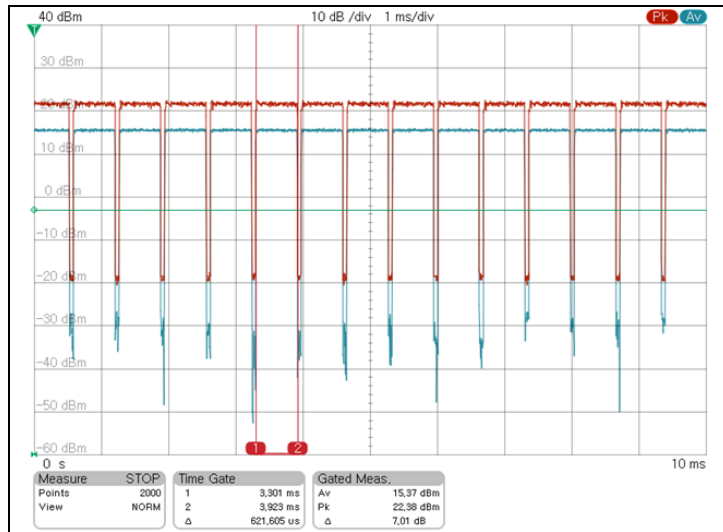

Middle Channel

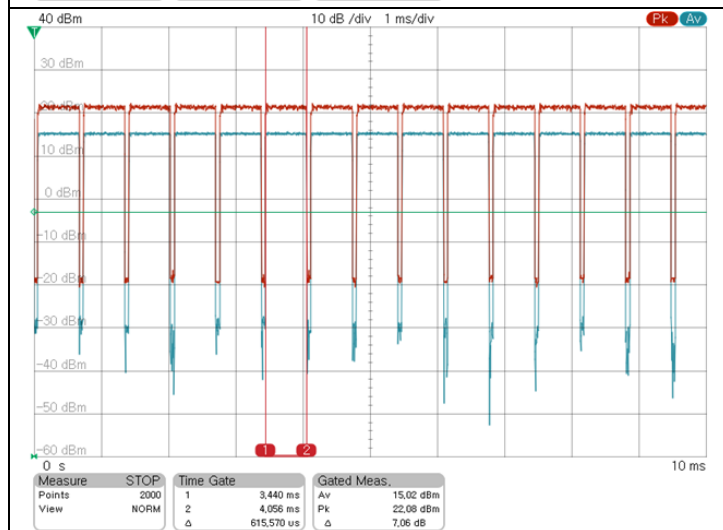

High Channel

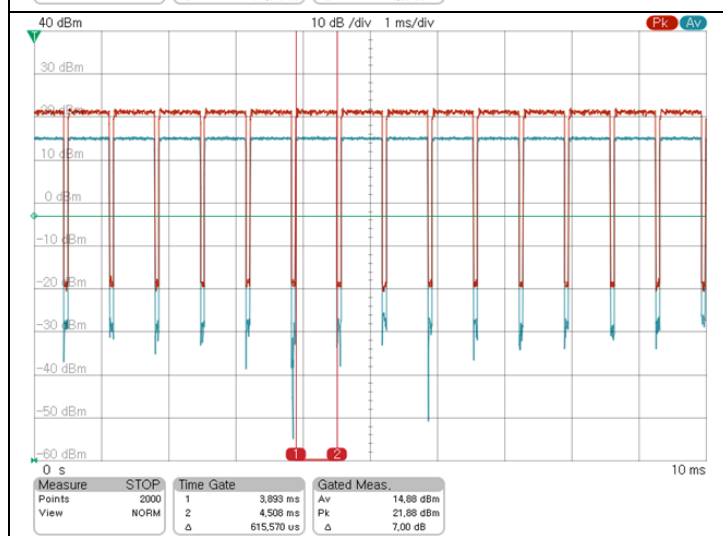

5. Power Spectral Density

5.1. Test Setup



5.2. Limit

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.3. Test Procedure

The measurements are recorded using the PKPSD measurement procedure in section 11.10.2 of ANSI C63.10-2020.

- This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span > 1.5 times the DTS bandwidth.
3. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Sweep time = No faster than coupled (auto) time.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Note;

- For test plots, the reading values shown in plots were final results because all path loss of the cable and attenuator were investigated and compensated to spectrum analyzer as TDF function.

5.4. Test Results


Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 %

Mode	Channel	Frequency (MHz)	Measured PSD (dB m/3 kHz)	Limit (dB m/3 kHz)
11b	Low	2 412	-5.53	8
	Middle	2 437	-6.13	
	High	2 462	-6.23	
11g	Low	2 412	-9.19	
	Middle	2 437	-9.43	
	High	2 462	-9.59	
11n_HT20	Low	2 412	-8.77	
	Middle	2 437	-9.28	
	High	2 462	-9.33	
11n_HT40	Low	2 422	-11.14	
	Middle	2 437	-10.50	
	High	2 452	-10.88	


- Test plots

11b


Low Channel

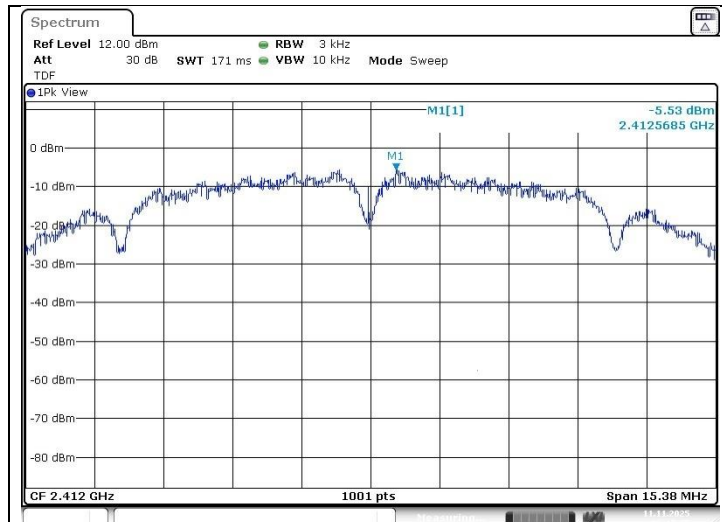

Middle Channel

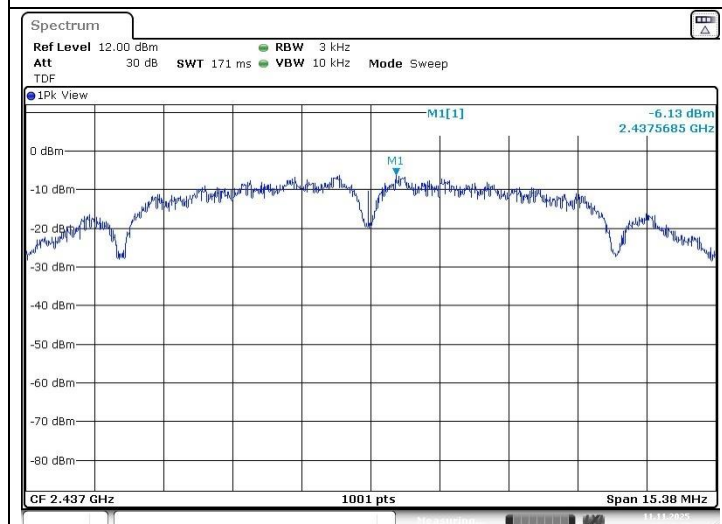


High Channel

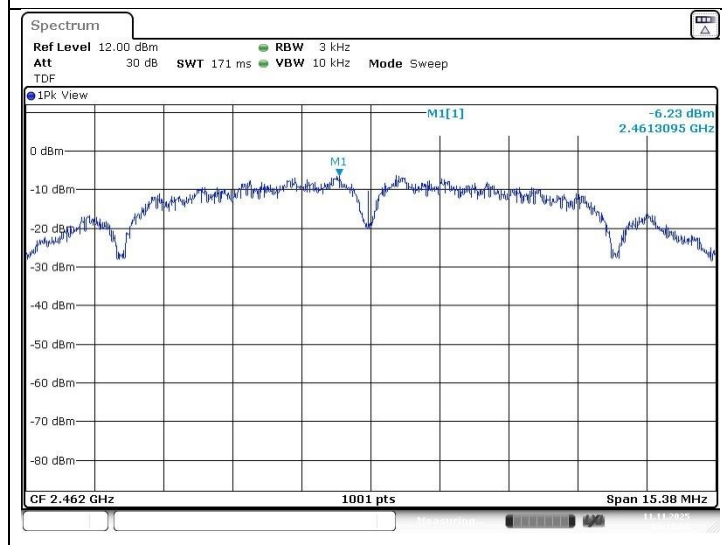


11g


Low Channel

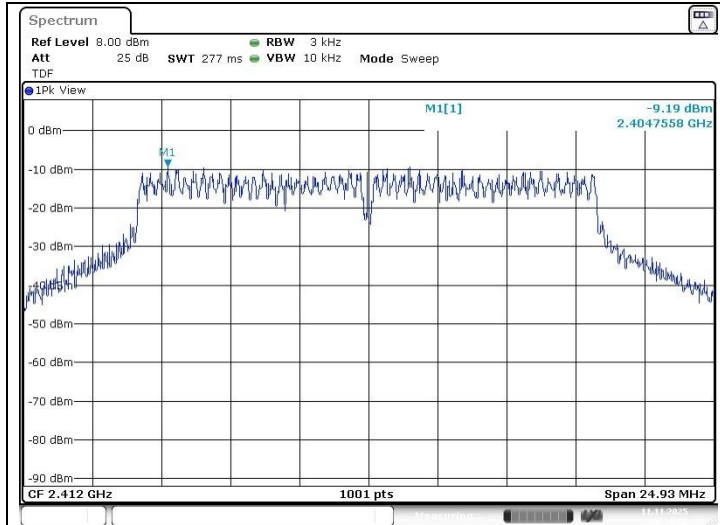

Middle Channel

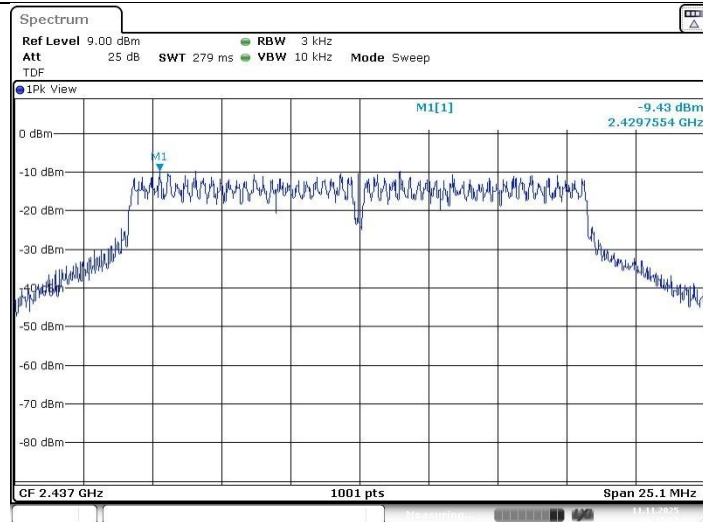


High Channel

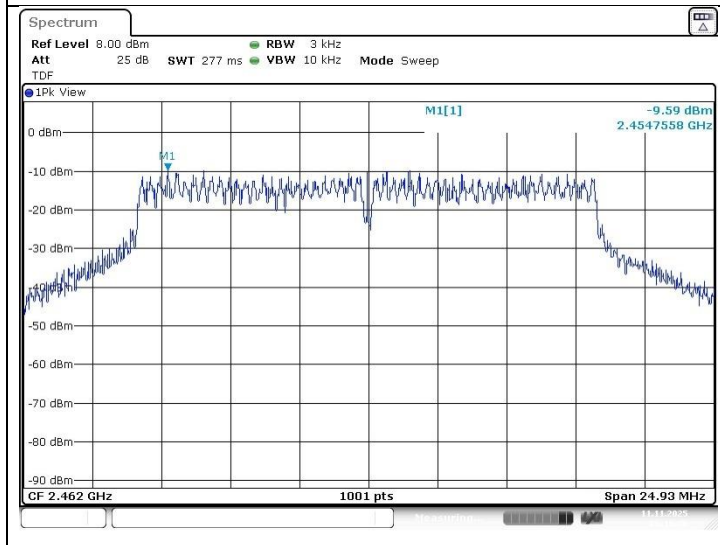


11n_HT20


Low Channel

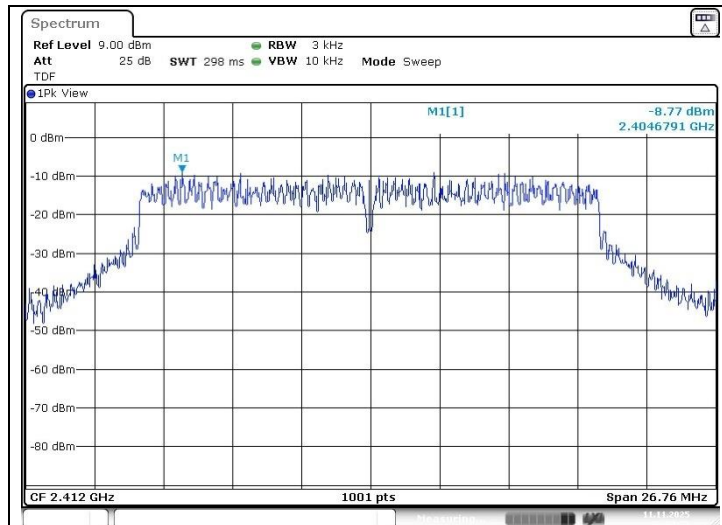

Middle Channel

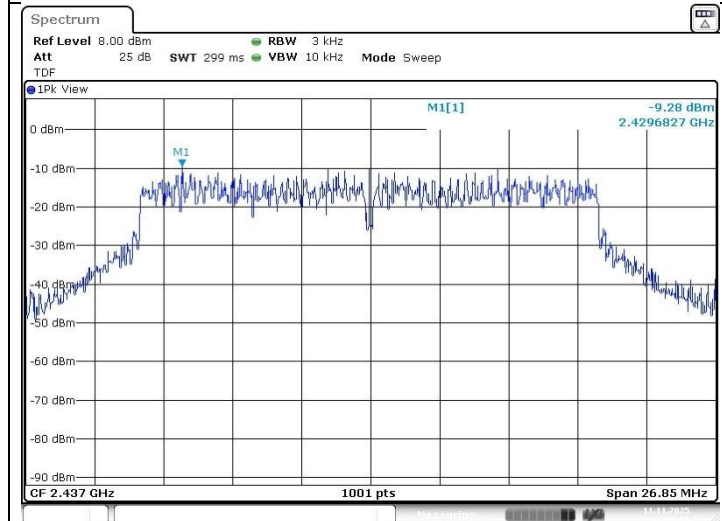


High Channel

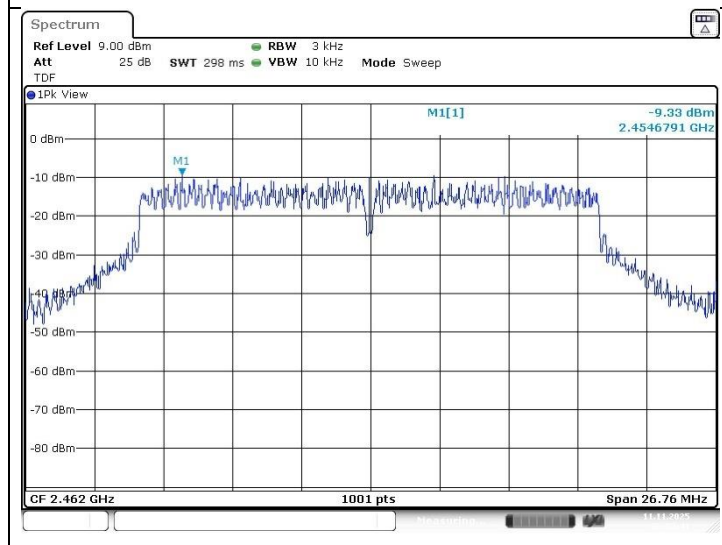


11n_HT40


Low Channel

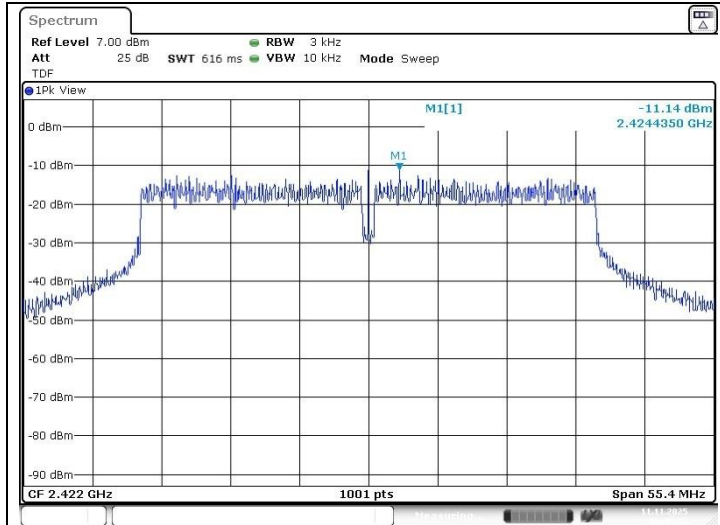

Middle Channel

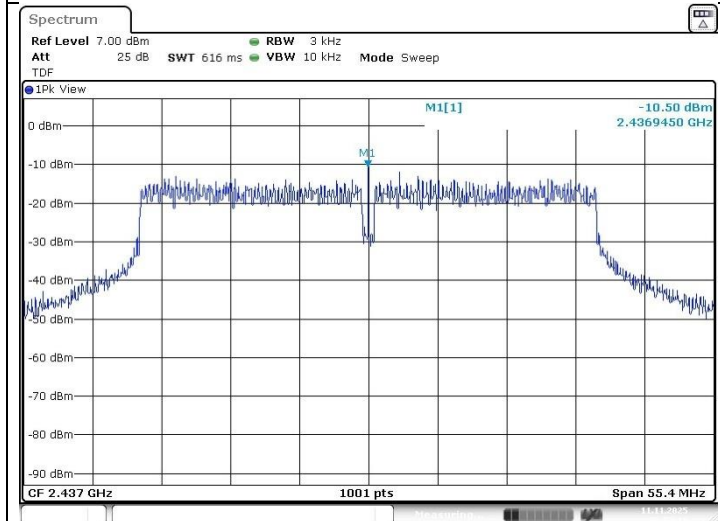


High Channel

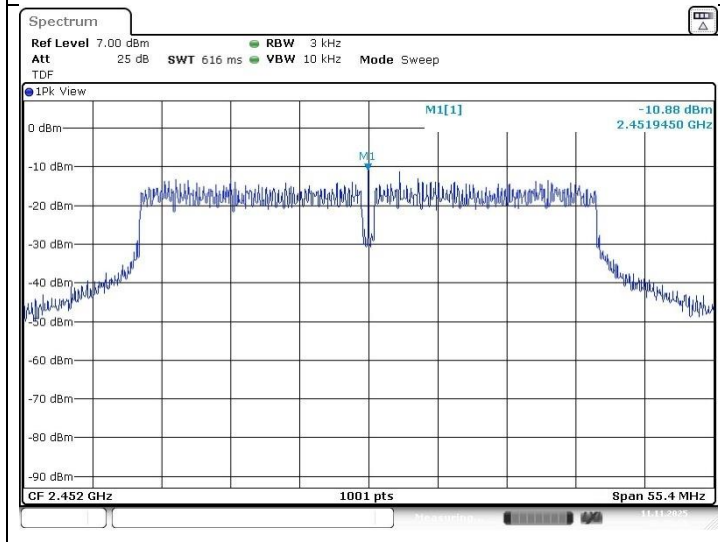

6. AC Power Line Conducted Emission

6.1. Test Setup

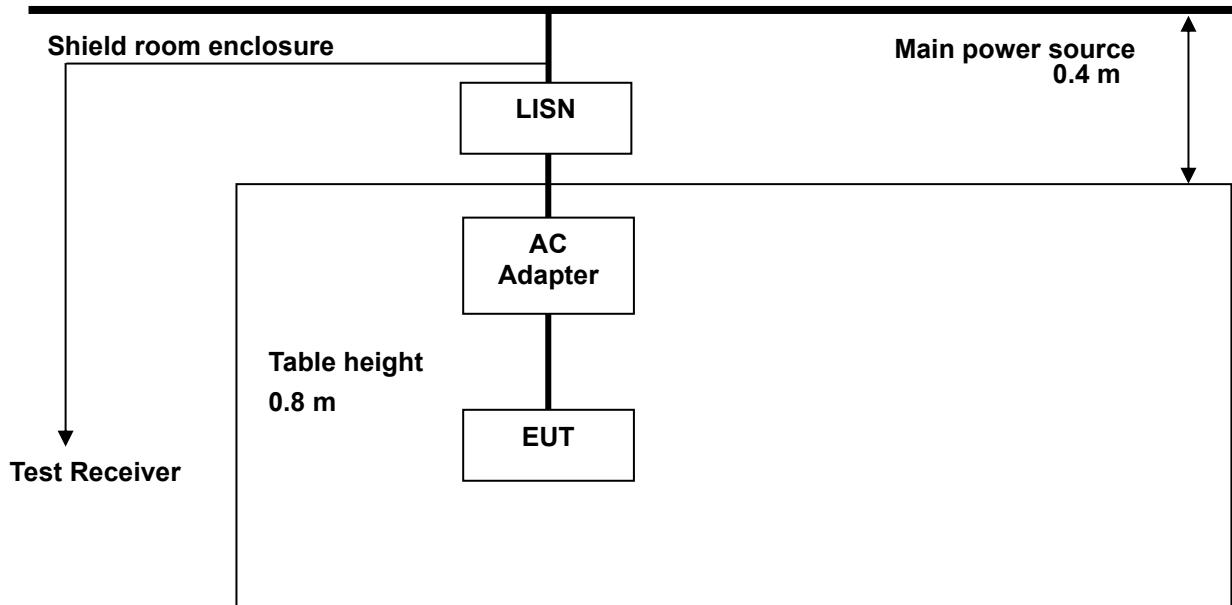

6.2. Limit

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 µH /50 ohms line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

6.3. Test Procedures

AC conducted emissions from the EUT were measured according to the dictates of ANSI C63.10-2020.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

6.4. Test Results

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 %

Frequency range : 0.15 MHz - 30 MHz
Measured Bandwidth : 9 kHz


Freq. (MHz)	Reading (dBμV)		Correction Factor (dB)	Level (dBμV)		Line	Limit (dBμV)		Margin (dB)	
	Quasi-peak	Average		Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.17	28.03	16.07	9.80	37.83	25.87	N	65.16	55.16	27.33	29.29
0.45	26.72	21.84	9.80	36.52	31.64	N	56.95	46.95	20.43	15.31
0.72	34.62	29.79	9.81	44.43	39.60	N	56.00	46.00	11.57	6.40
1.70	25.24	20.48	9.93	35.17	30.41	N	56.00	46.00	20.83	15.59
5.75	20.77	14.75	10.22	30.99	24.97	N	60.00	50.00	29.01	25.03
13.39	21.83	13.13	10.62	32.45	23.75	N	60.00	50.00	27.55	26.25
0.17	30.25	14.73	9.90	40.15	24.63	H	65.16	55.16	25.01	30.53
0.19	29.01	14.16	9.90	38.91	24.06	H	63.86	53.86	24.95	29.80
0.72	27.66	23.51	9.91	37.57	33.42	H	56.00	46.00	18.43	12.58
1.69	19.29	14.76	9.93	29.22	24.69	H	56.00	46.00	26.78	21.31
5.79	14.92	9.26	10.26	25.18	19.52	H	60.00	50.00	34.82	30.48
13.43	13.52	6.18	10.72	24.24	16.90	H	60.00	50.00	35.76	33.10

Remark;


- Line (H): Hot, Line (N): Neutral.
- All channels were investigated and the worst-case emissions were reported using **11n HT20 / Low channel.**
- The limit for Class B device(s) from 150 kHz to 30 MHz are specified in Section of the Title 47 CFR.
- Test from 150 kHz to 30 MHz was performed using the software of EMC32(V10.60.20) from R&S.
- Traces shown in plot were made by using a Quasi-peak detector and average detector.
- Deviations to the Specifications: None.
- Level (dBμV) = Reading (dBμV) + Correction Factor(dB)
- Correction Factor(dB) = LISN factor (dB) + Cable loss (dB)

- Test plots

Test mode: (Neutral)

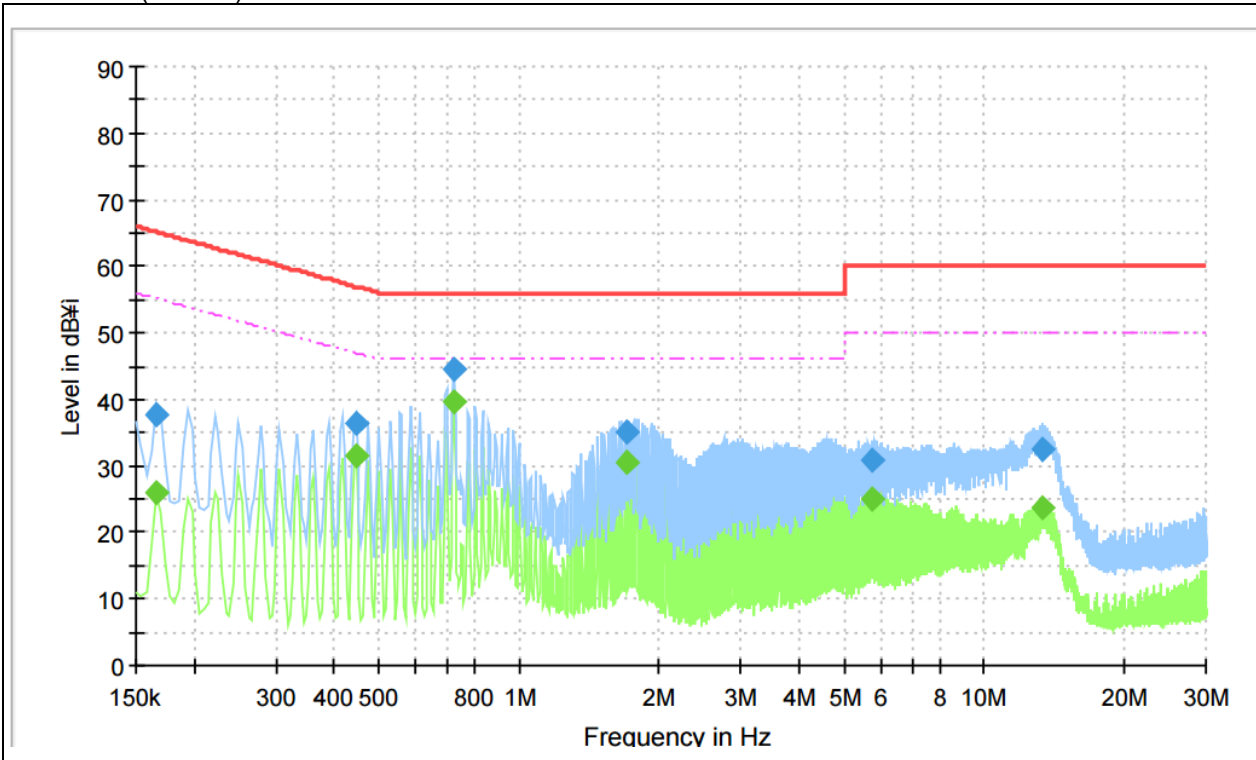

Test mode: (Hot)

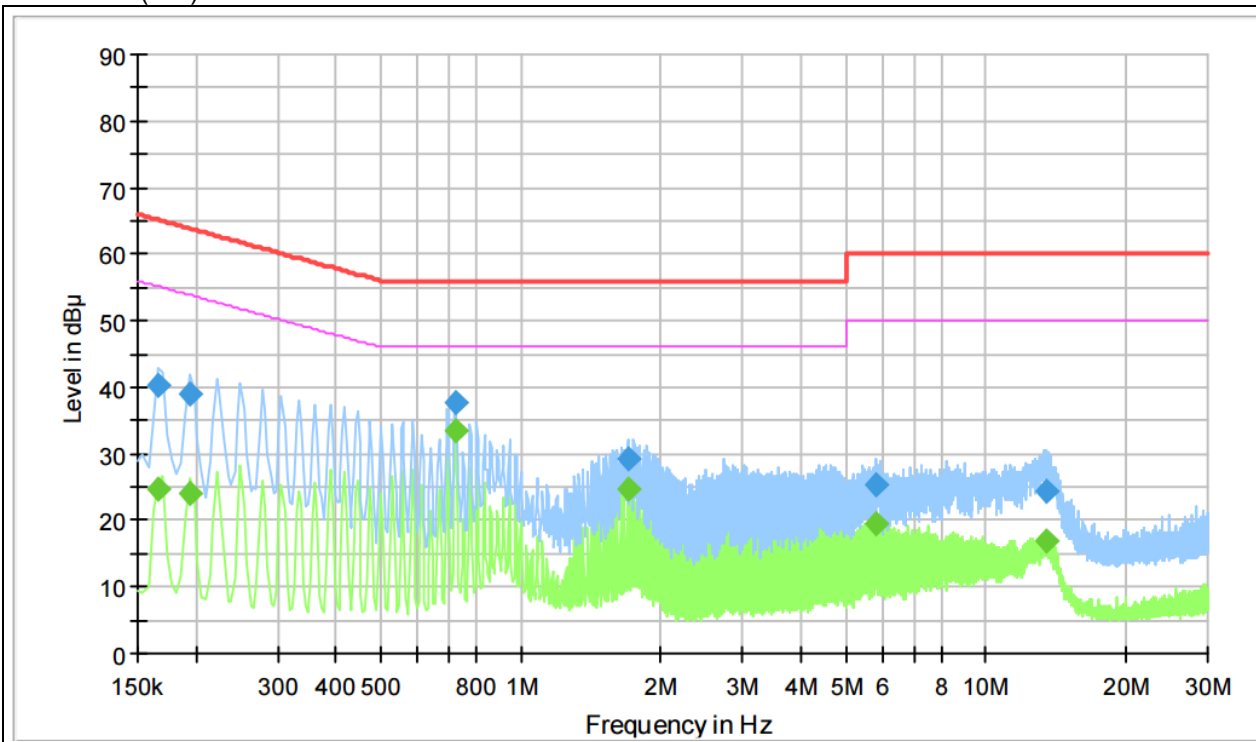

7. Antenna Requirement

7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d). And according to FCC 47 CFR Section §15.247(b) if transmitting antennas of directional gain greater than 6 dB i are used, the conducted output power shall be reduced appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dB i.

7.2. Antenna Connected Construction

Antenna used in this product is PCB Pattern Antenna with gain of -10.83 dB i.

- End of the Test Report -