


Appendix A3: Min emission bandwidth


Test Result B4


TestMode	Antenna	Frequency [MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.320	5736.520	5752.840	0.5	PASS
11A	Ant1	5785	15.840	5776.520	5792.360	0.5	PASS
11A	Ant1	5825	16.000	5816.560	5832.560	0.5	PASS
11N20SISO	Ant1	5745	16.360	5736.200	5752.560	0.5	PASS
11N20SISO	Ant1	5785	16.640	5776.160	5792.800	0.5	PASS
11N20SISO	Ant1	5825	17.560	5815.880	5833.440	0.5	PASS
11N40SISO	Ant1	5755	35.600	5736.760	5772.360	0.5	PASS
11N40SISO	Ant1	5795	35.760	5776.520	5812.280	0.5	PASS
11AC20SISO	Ant1	5745	16.120	5736.960	5753.080	0.5	PASS
11AC20SISO	Ant1	5785	16.520	5775.920	5792.440	0.5	PASS
11AC20SISO	Ant1	5825	16.880	5815.920	5832.800	0.5	PASS
11AC40SISO	Ant1	5755	35.440	5736.760	5772.200	0.5	PASS
11AC40SISO	Ant1	5795	35.760	5776.520	5812.280	0.5	PASS
11AC80SISO	Ant1	5775	75.200	5737.080	5812.280	0.5	PASS

Test Graphs B4

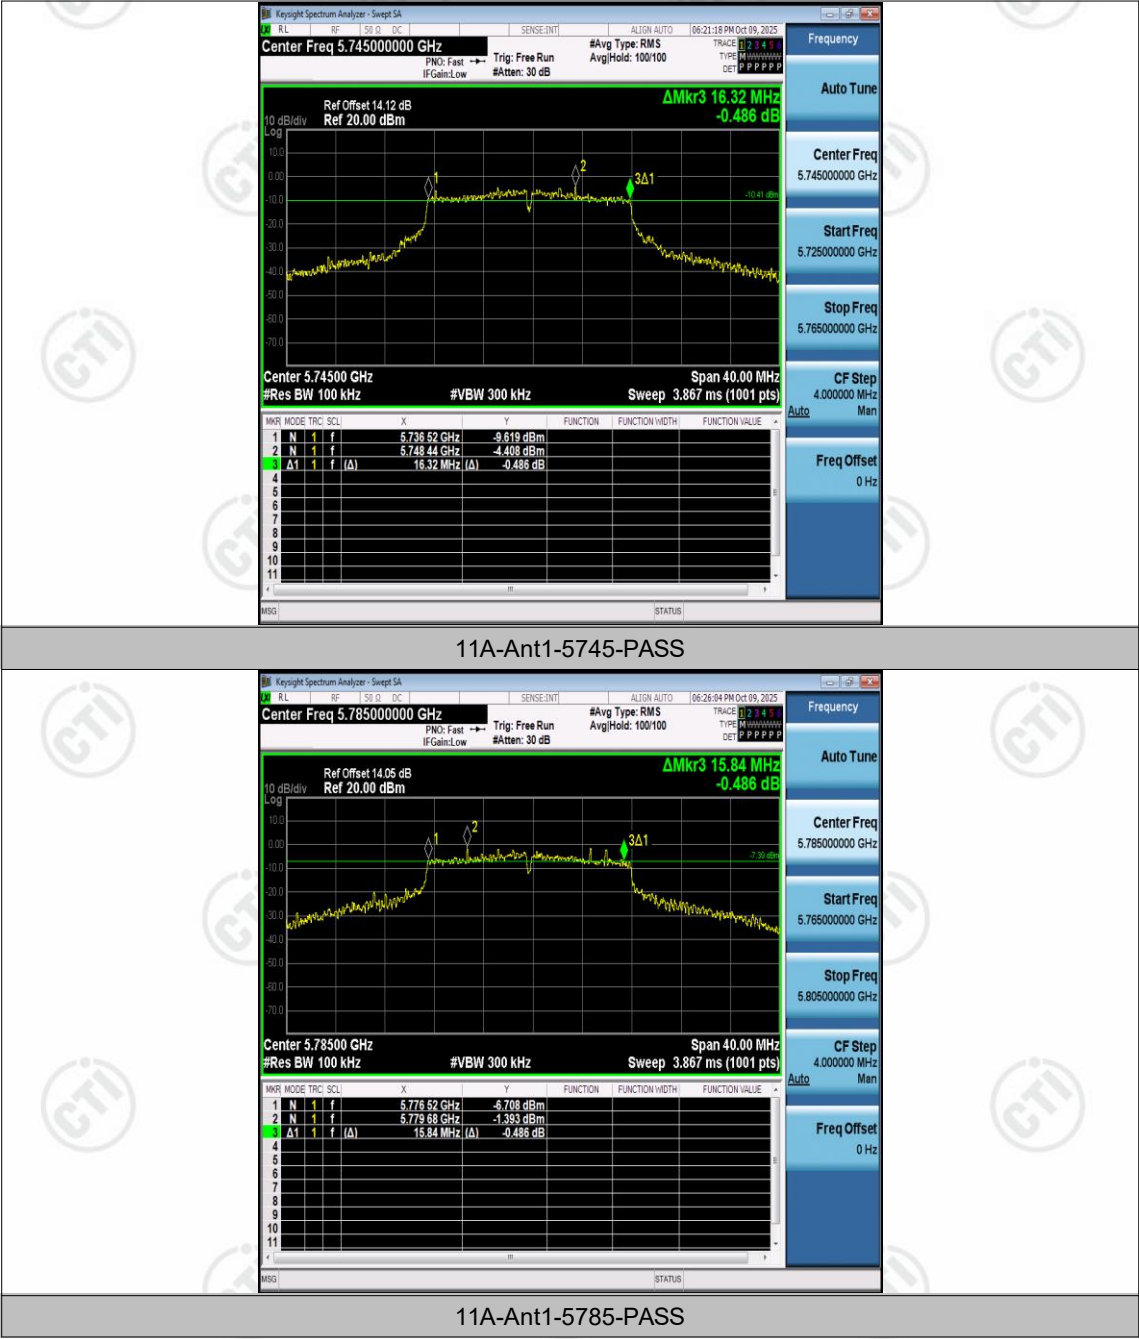





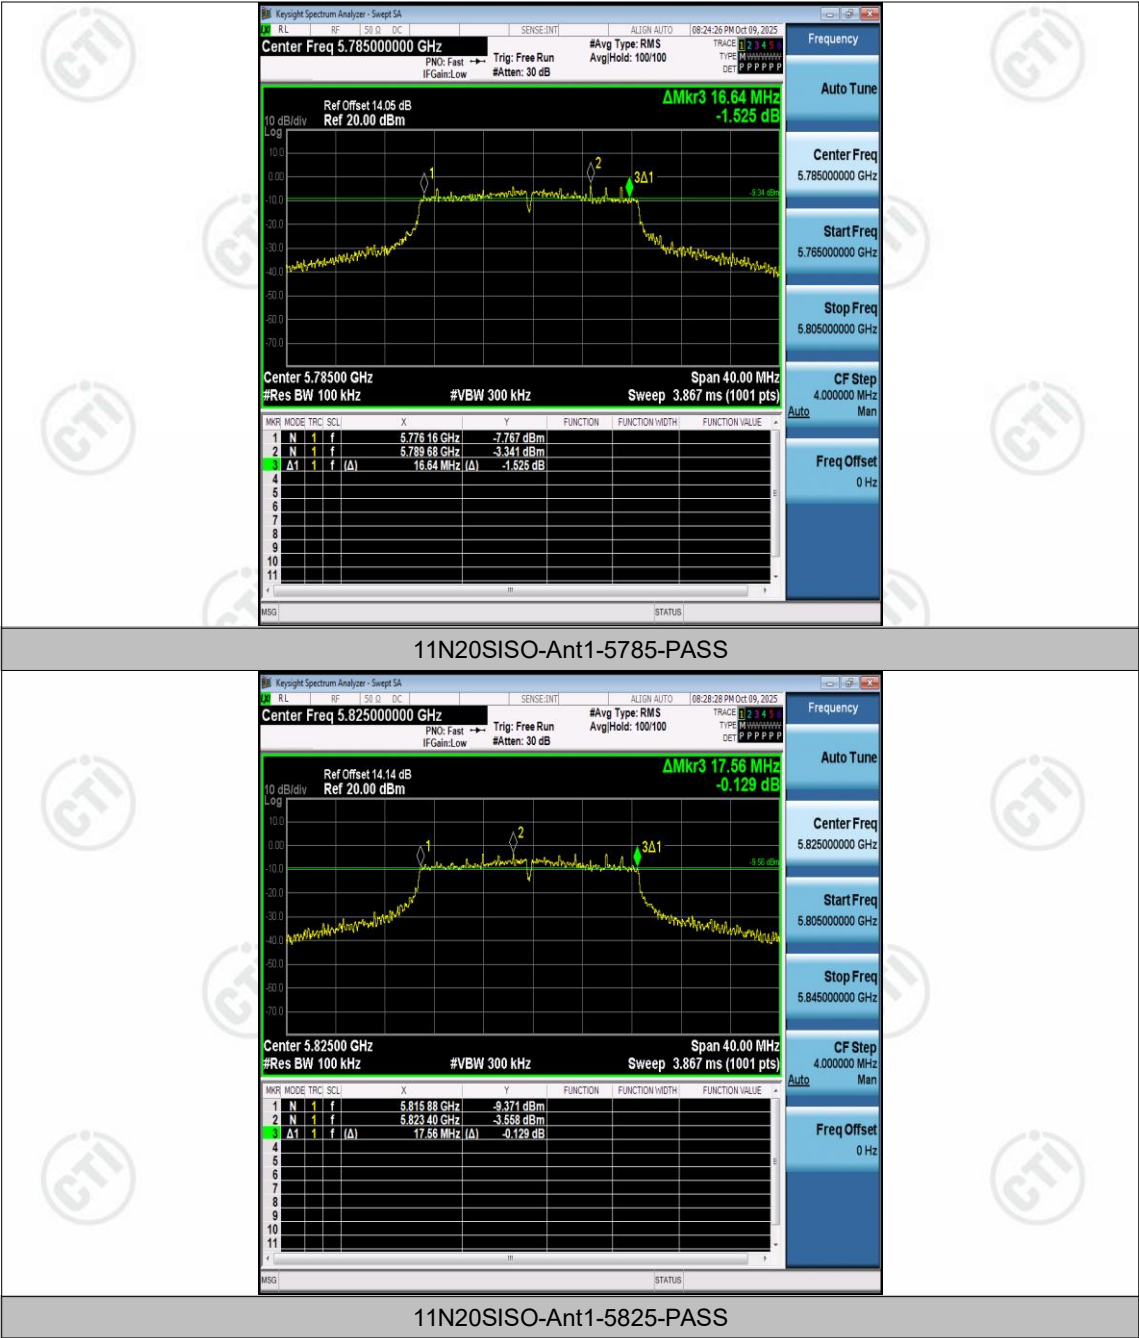

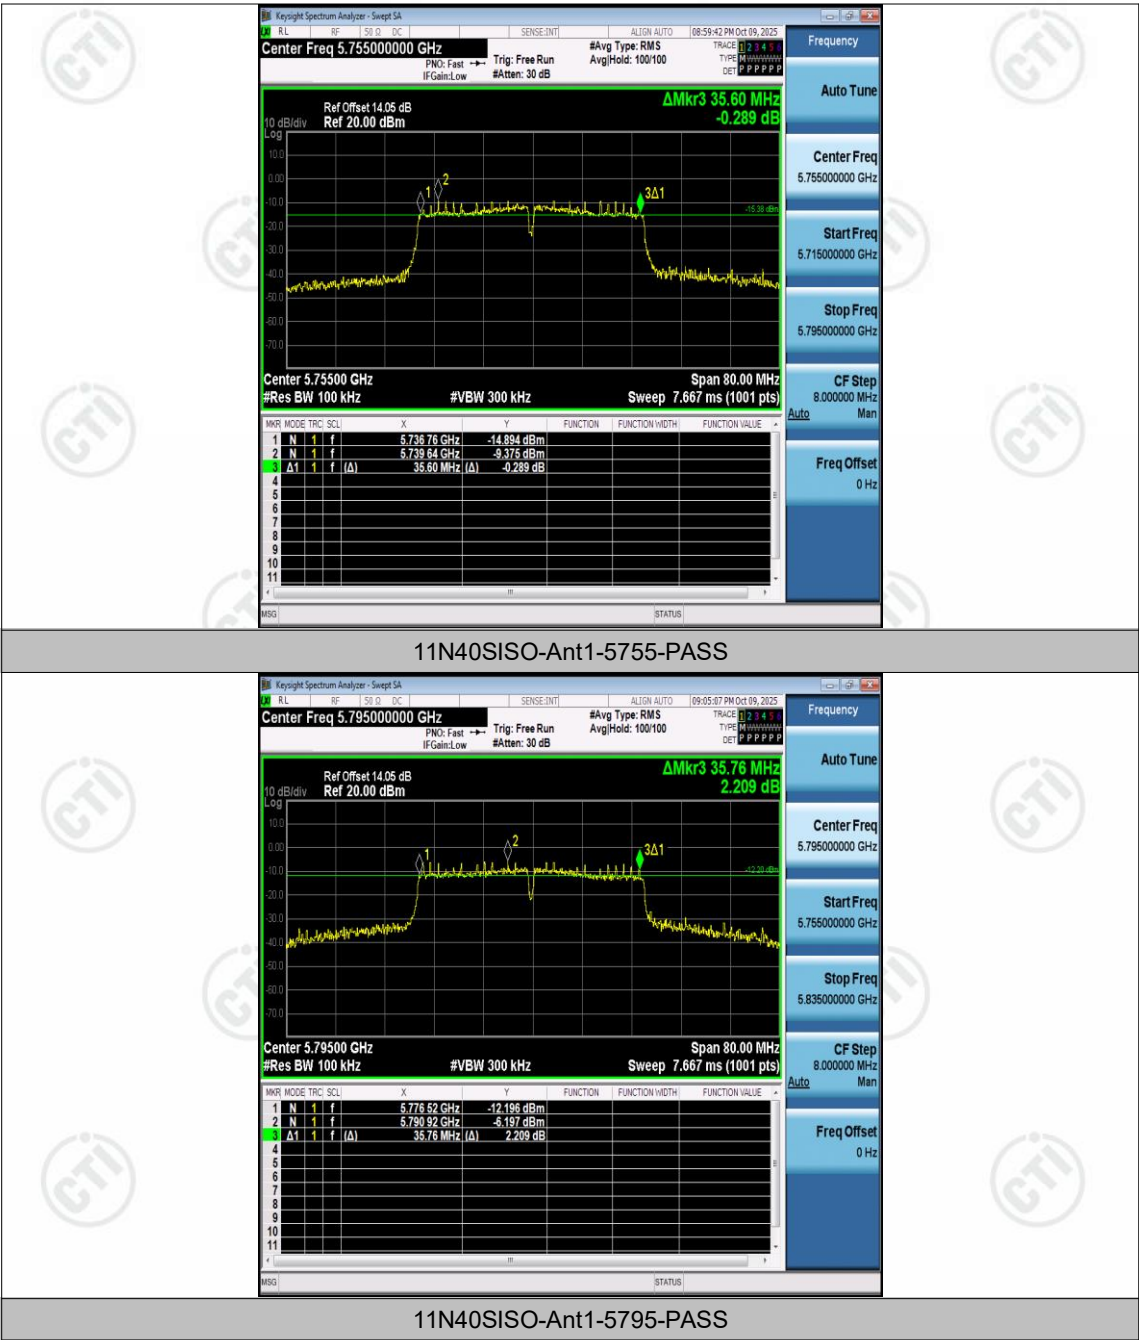



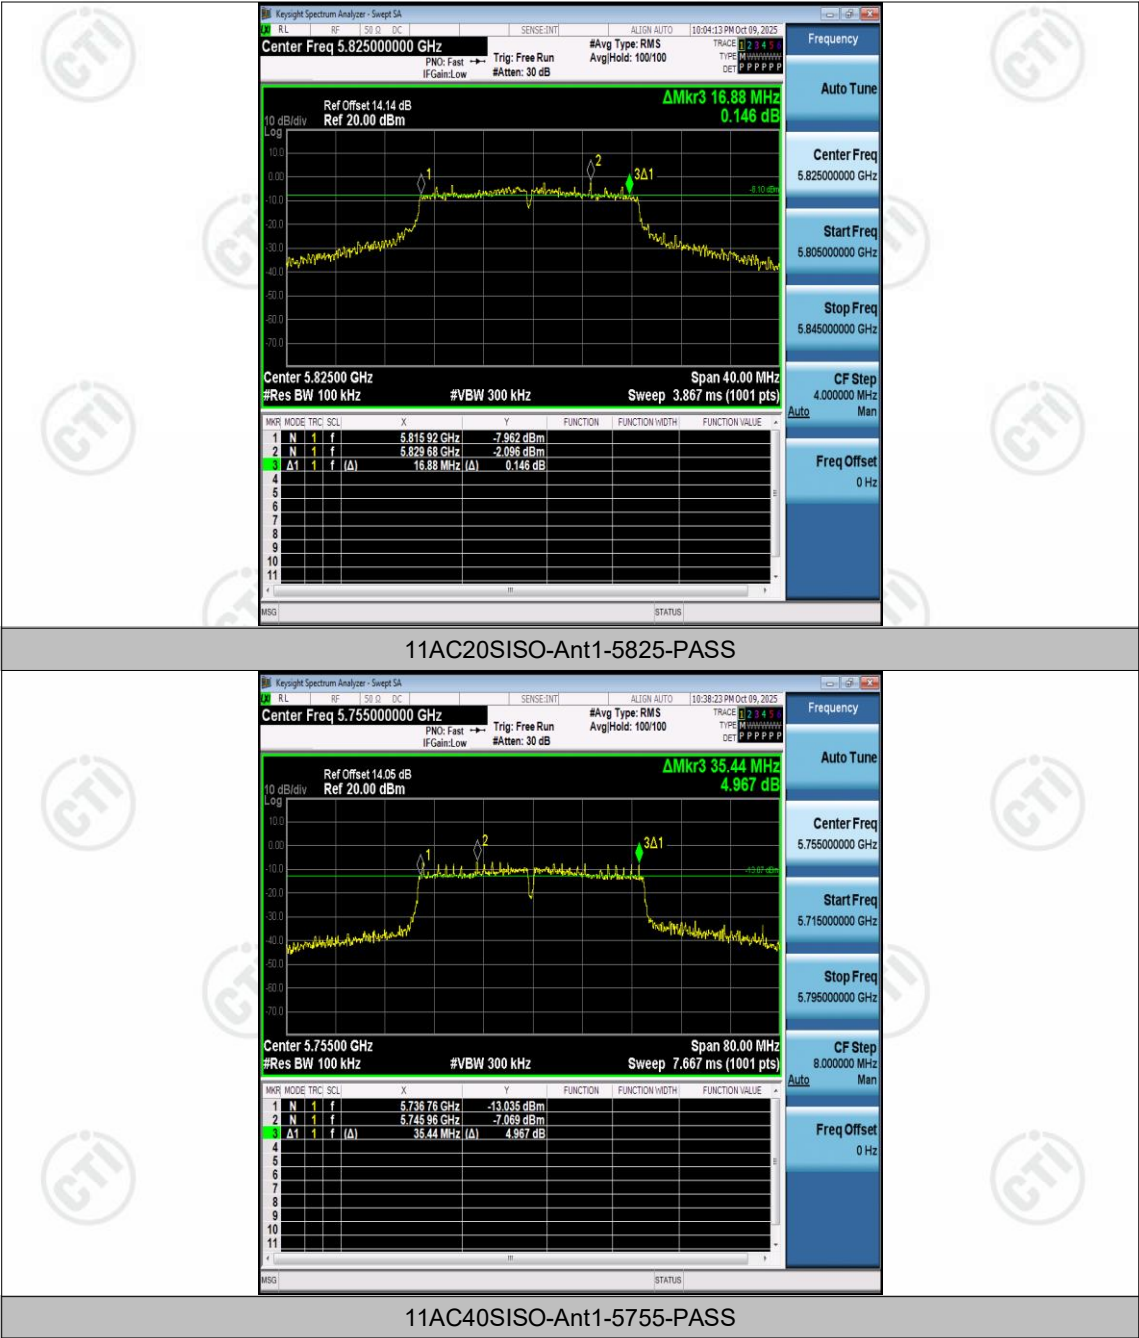

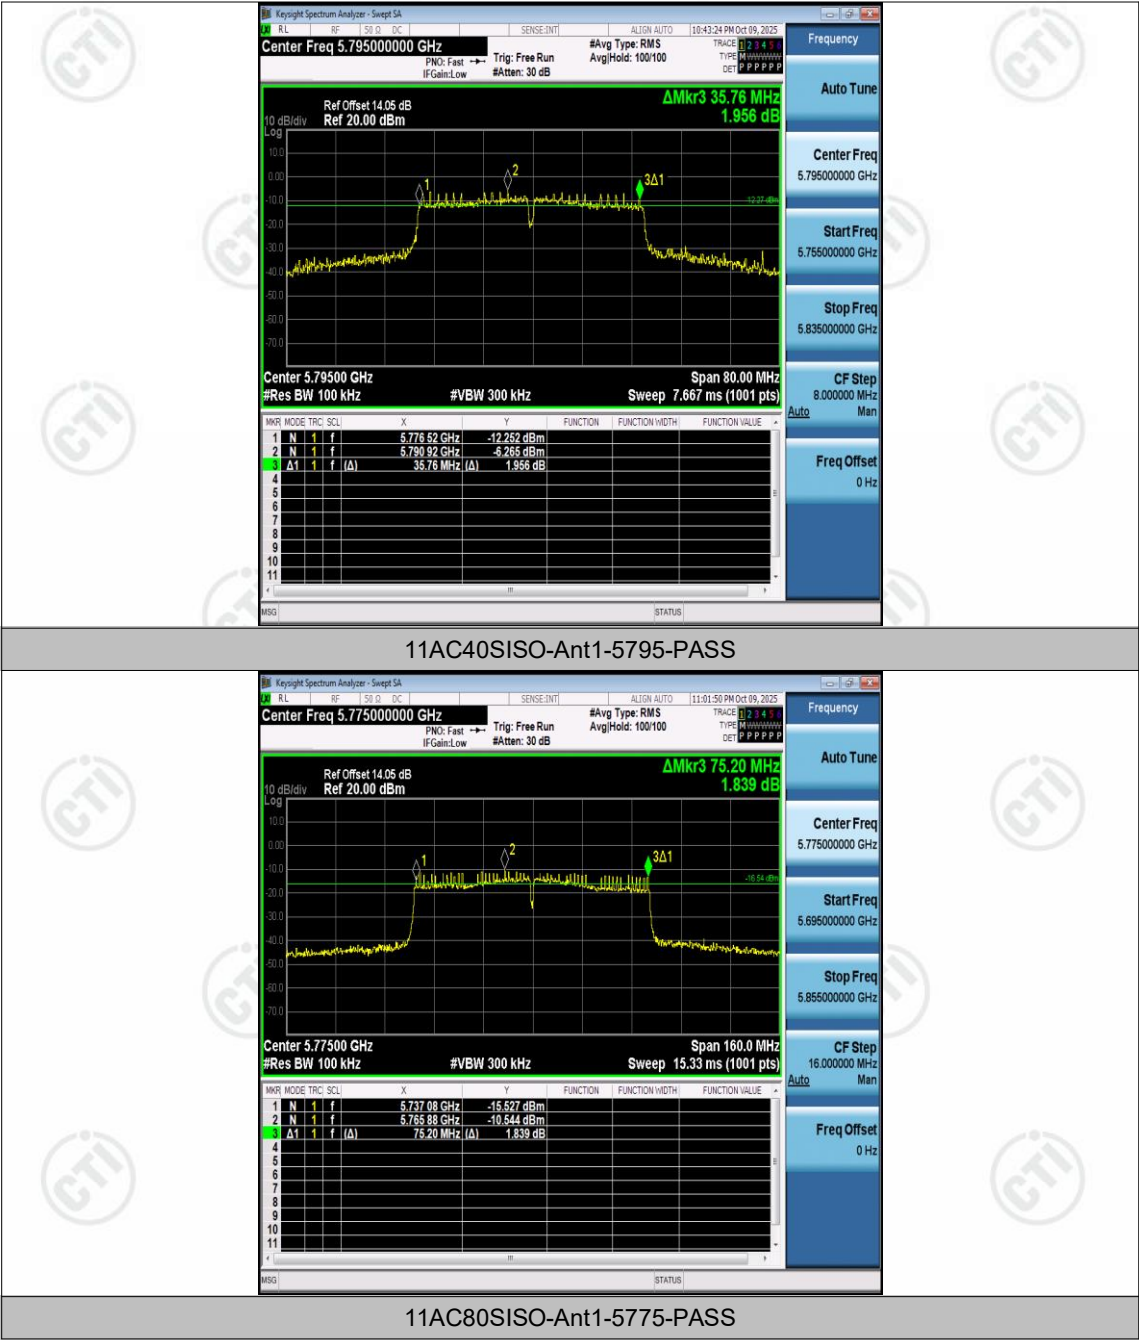

Appendix B: Duty Cycle

Test Result

TestMode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5180	1.43	1.53	93.46
11A	Ant1	5220	1.43	1.53	93.46
11A	Ant1	5240	1.43	1.53	93.46
11A	Ant1	5260	1.42	1.53	92.81
11A	Ant1	5300	1.42	1.53	92.81
11A	Ant1	5320	1.43	1.53	93.46
11A	Ant1	5500	1.43	1.53	93.46
11A	Ant1	5580	1.43	1.53	93.46
11A	Ant1	5700	1.43	1.53	93.46
11A	Ant1	5745	1.43	1.53	93.46
11A	Ant1	5785	1.43	1.53	93.46
11A	Ant1	5825	1.43	1.53	93.46
11N20SISO	Ant1	5180	1.34	1.44	93.06
11N20SISO	Ant1	5220	1.34	1.44	93.06
11N20SISO	Ant1	5240	1.34	1.44	93.06
11N20SISO	Ant1	5260	1.34	1.44	93.06
11N20SISO	Ant1	5300	1.34	1.44	93.06
11N20SISO	Ant1	5320	1.34	1.44	93.06
11N20SISO	Ant1	5500	1.34	1.44	93.06
11N20SISO	Ant1	5580	1.33	1.43	93.01
11N20SISO	Ant1	5700	1.33	1.43	93.01
11N20SISO	Ant1	5745	1.33	1.43	93.01
11N20SISO	Ant1	5785	1.33	1.43	93.01
11N20SISO	Ant1	5825	1.33	1.43	93.01
11N40SISO	Ant1	5190	0.67	0.77	87.01
11N40SISO	Ant1	5230	0.66	0.76	86.84
11N40SISO	Ant1	5270	0.67	0.77	87.01
11N40SISO	Ant1	5310	0.66	0.76	86.84
11N40SISO	Ant1	5510	0.67	0.77	87.01
11N40SISO	Ant1	5550	0.66	0.76	86.84
11N40SISO	Ant1	5670	0.67	0.77	87.01
11N40SISO	Ant1	5755	0.66	0.76	86.84
11N40SISO	Ant1	5795	0.00	0.10	100
11AC20SISO	Ant1	5180	1.34	1.44	93.06

11AC20SISO	Ant1	5220	1.34	1.45	92.41
11AC20SISO	Ant1	5240	0.18	0.28	64.29
11AC20SISO	Ant1	5260	1.35	1.45	93.10
11AC20SISO	Ant1	5300	1.34	1.44	93.06
11AC20SISO	Ant1	5320	1.34	1.44	93.06
11AC20SISO	Ant1	5500	1.34	1.44	93.06
11AC20SISO	Ant1	5580	1.34	1.44	93.06
11AC20SISO	Ant1	5700	1.34	1.44	93.06
11AC20SISO	Ant1	5745	1.35	1.45	93.10
11AC20SISO	Ant1	5785	1.34	1.45	92.41
11AC20SISO	Ant1	5825	1.34	1.44	93.06
11AC40SISO	Ant1	5190	0.67	0.77	87.01
11AC40SISO	Ant1	5230	0.66	0.77	85.71
11AC40SISO	Ant1	5270	0.67	0.77	87.01
11AC40SISO	Ant1	5310	0.67	0.77	87.01
11AC40SISO	Ant1	5510	0.67	0.77	87.01
11AC40SISO	Ant1	5550	0.67	0.77	87.01
11AC40SISO	Ant1	5670	0.67	0.77	87.01
11AC40SISO	Ant1	5755	0.67	0.77	87.01
11AC40SISO	Ant1	5795	0.67	0.77	87.01
11AC80SISO	Ant1	5210	0.33	0.43	76.74
11AC80SISO	Ant1	5290	0.33	0.44	75.00
11AC80SISO	Ant1	5530	0.33	0.43	76.74
11AC80SISO	Ant1	5610	0.33	0.43	76.74
11AC80SISO	Ant1	5775	0.33	0.43	76.74

Test Graphs

