

# FCC DFS Test Report

**FCC ID: 2BTG5-SYBRAN**

Test Report No.....: RF260618001-03-003

Product(s) Name.....: CODE27 Companion Hub

Model(s).....: SyBran-01

Trade Mark.....: CODE27

Applicant.....: SyBran Innovation Co., Ltd.

Address.....: 804, Bldg 5A, Block C, Chuangzhiyuncheng Phase II, Xingke 1st Rd, Xili  
St Nanshan, Shenzhen, China

Receipt Date.....: 2026.06.18

Test Date.....: 2026.06.22 ~ 2026.07.02

Issued Date.....: 2026.07.03

Standards.....: FCC CFR Title 47, Part 15, Subpart E  
FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01  
FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

| Prepared By:       | Checked By:       | Approved By:     |  |
|--------------------|-------------------|------------------|---------------------------------------------------------------------------------------|
| Jason Huang        | Black Ding        | Tim Zhang        |                                                                                       |
| <i>Jason Huang</i> | <i>Black Ding</i> | <i>Tim Zhang</i> |                                                                                       |

## Table of Contents

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1 . TEST LOCATION</b>                                    | <b>4</b>  |
| <b>2 . TEST ENVIRONMENT CONDITIONS</b>                      | <b>4</b>  |
| <b>3 . SUMMARY OF TEST RESULTS</b>                          | <b>4</b>  |
| <b>4 . GENERAL INFORMATION</b>                              | <b>5</b>  |
| 4.1 GENERAL DESCRIPTION OF EUT                              | 5         |
| 4.2 MAXIMUM OUTPUT POWER AND E.I.R.P.                       | 7         |
| 4.3 DESCRIPTION OF TEST MODES                               | 7         |
| 4.4 SUPPORT UNITS                                           | 7         |
| <b>5 . U-NII DFS RULE REQUIREMENTS</b>                      | <b>8</b>  |
| 5.1 WORKING MODES AND REQUIRED TEST ITEMS                   | 8         |
| 5.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS                 | 9         |
| <b>6 . MEASUREMENT INSTRUMENTS LIST</b>                     | <b>10</b> |
| <b>7 . DYNAMIC FREQUENCY SELECTION (DFS)</b>                | <b>11</b> |
| 7.1 DFS MEASUREMENT SYSTEM                                  | 11        |
| 7.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL            | 13        |
| 7.3 DEVIATION FROM TEST STANDARD                            | 13        |
| <b>8 . TEST RESULTS</b>                                     | <b>14</b> |
| 8.1 SUMMARY OF DFS TEST RESULT                              | 14        |
| 8.2 DFS DETECTION THRESHOLD                                 | 14        |
| 8.3 CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME | 15        |

## History of this test report

Original Report Issue Date: 2026.07.03

- No additional attachment
- Additional attachments were issued following record

| Attachment No. | Issue Date | Description |
|----------------|------------|-------------|
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |

## 1. TEST LOCATION

|                           |                                                                                             |
|---------------------------|---------------------------------------------------------------------------------------------|
| Company:                  | Shenzhen Haiyun Standard Technical Co., Ltd.                                                |
| Address:                  | No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China |
| CNAS Registration Number: | CNAS L18252                                                                                 |
| FCC Designation Number    | CN1340                                                                                      |
| CAB identifier            | CN0145                                                                                      |
| A2LA Certificate Number   | 6823.01                                                                                     |

## 2. TEST ENVIRONMENT CONDITIONS

| Test Item                         | Temperature | Humidity | Test Voltage | Tested By |
|-----------------------------------|-------------|----------|--------------|-----------|
| Dynamic Frequency Selection (DFS) | 23.3°C      | 51%      | DC 20V       | Elio Lin  |

## 3. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC CFR Title 47, Part 15, Subpart E |                                                                       |             |          |        |
|--------------------------------------|-----------------------------------------------------------------------|-------------|----------|--------|
| Standard(s)<br>Section               | Test Item                                                             | Test Result | Judgment | Remark |
| FCC 15.407(h)                        | Transmit Power Control (TPC) and<br>Dynamic Frequency Selection (DFS) | -----       | PASS     | -----  |

## 4. GENERAL INFORMATION

### 4.1 GENERAL DESCRIPTION OF EUT

|                             |                                                                                                                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sample No.                  | POC260618001-S001                                                                                                                                                                    |
| Product name                | CODE27 Companion Hub                                                                                                                                                                 |
| Model name                  | SyBran-01                                                                                                                                                                            |
| Trade Mark                  | CODE27                                                                                                                                                                               |
| Power supply                | DC 20V from adapter                                                                                                                                                                  |
| Adapter1 information        | Model name: A849-200225C-US1<br>Input: 100-240V~, 50/60Hz, 1.5A<br>Output: 5V===3A, 9V===3A, 12V===3A, 15V===3A,<br>20V===2.25A,<br>3.3-16V===3A 45W Max, 3.3-21V===2.25A 45W Max    |
| Adapter2 information        | Model name: TEKA-PC1A45WUS<br>Input: 100-240V~, 50/60Hz, 1.2A MAX<br>Output: 5.0V===3.0A 15.0W, 9.0V===3.0A 27.0W,<br>12.0V===3.0A 36.0W, 15.0V===3.0A 45.0W, 20.0V===2.25A<br>45.0W |
| Operation Frequency Band(s) | UNII-2A: 5250 MHz ~ 5350 MHz<br>UNII-2C: 5470 MHz ~ 5725 MHz                                                                                                                         |
| Modulation Type             | OFDM, OFDMA                                                                                                                                                                          |
| Data Rate (Mbps)            | IEEE 802.11a mode: 6/9/12/18/24/36/48/54<br>IEEE 802.11n mode: up to 300<br>IEEE 802.11ac mode: up to 866.6<br>IEEE 802.11ax mode: up to 1201                                        |
| Operating Mode(s)           | <input type="checkbox"/> Master<br><input checked="" type="checkbox"/> Client device without radar detection<br><input type="checkbox"/> Client device with radar detection          |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

| IEEE 802.11a<br>IEEE 802.11n20<br>IEEE 802.11ac20<br>IEEE 802.11ax20 |                 | IEEE 802.11n40<br>IEEE 802.11ac40<br>IEEE 802.11ax40 |                 | IEEE 802.11ac80<br>IEEE 802.11ax80 |                 |
|----------------------------------------------------------------------|-----------------|------------------------------------------------------|-----------------|------------------------------------|-----------------|
| UNII-2A                                                              |                 | UNII-2A                                              |                 | UNII-2A                            |                 |
| Channel                                                              | Frequency (MHz) | Channel                                              | Frequency (MHz) | Channel                            | Frequency (MHz) |
| 52                                                                   | 5260            | 54                                                   | 5270            | 58                                 | 5290            |
| 56                                                                   | 5280            | 62                                                   | 5310            |                                    |                 |
| 60                                                                   | 5300            |                                                      |                 |                                    |                 |
| 64                                                                   | 5320            |                                                      |                 |                                    |                 |

| IEEE 802.11a<br>IEEE 802.11n20<br>IEEE 802.11ac20<br>IEEE 802.11ax20 |                 | IEEE 802.11n40<br>IEEE 802.11ac40<br>IEEE 802.11ax40 |                 | IEEE 802.11ac80<br>IEEE 802.11ax80 |                 |
|----------------------------------------------------------------------|-----------------|------------------------------------------------------|-----------------|------------------------------------|-----------------|
| UNII-2C                                                              |                 | UNII-2C                                              |                 | UNII-2C                            |                 |
| Channel                                                              | Frequency (MHz) | Channel                                              | Frequency (MHz) | Channel                            | Frequency (MHz) |
| 100                                                                  | 5500            | 102                                                  | 5510            | 106                                | 5530            |
| 104                                                                  | 5520            | 110                                                  | 5550            | 122                                | 5610            |
| 108                                                                  | 5540            | 118                                                  | 5590            |                                    |                 |
| 112                                                                  | 5560            | 126                                                  | 5630            |                                    |                 |
| 116                                                                  | 5580            | 134                                                  | 5670            |                                    |                 |
| 120                                                                  | 5600            |                                                      |                 |                                    |                 |
| 124                                                                  | 5620            |                                                      |                 |                                    |                 |
| 128                                                                  | 5640            |                                                      |                 |                                    |                 |
| 132                                                                  | 5660            |                                                      |                 |                                    |                 |
| 136                                                                  | 5680            |                                                      |                 |                                    |                 |
| 140                                                                  | 5700            |                                                      |                 |                                    |                 |

#### 4.2 MAXIMUM OUTPUT POWER AND E.I.R.P.

| Frequency Band (MHz) | Max Output Power (dBm) | Max. e.i.r.p. (dBm) | Max. e.i.r.p. (mW) |
|----------------------|------------------------|---------------------|--------------------|
| 5250~5350            | 16.59                  | 22.15               | 164.06             |
| 5470~5725            | 17.40                  | 22.96               | 197.70             |

Note:

- 1) U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725GHz band shall employ a TPC mechanism. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

#### 4.3 DESCRIPTION OF TEST MODES

| Test Mode | Description              |
|-----------|--------------------------|
| Mode 1    | IEEE 802.11a: 5260MHz    |
| Mode 2    | IEEE 802.11n20: 5260MHz  |
| Mode 3    | IEEE 802.11ac20: 5260MHz |
| Mode 4    | IEEE 802.11ax20: 5260MHz |
| Mode 5    | IEEE 802.11n40: 5510MHz  |
| Mode 6    | IEEE 802.11ac40: 5510MHz |
| Mode 7    | IEEE 802.11ax40: 5510MHz |
| Mode 8    | IEEE 802.11ac80: 5530MHz |
| Mode 9    | IEEE 802.11ax80: 5530MHz |

Note:

1. All modes were tested and only the worst-case scenarios for mode4 and mode 9 were recorded.

#### 4.4 SUPPORT UNITS

| Support Equipment |                                   |                         |               |                             |
|-------------------|-----------------------------------|-------------------------|---------------|-----------------------------|
| No.               | Equipment                         | Brand Name              | Model Name    | Remarks                     |
| 1                 | Intelligent Wireless Access Point | Technity Solutions Inc. | TS-MWI3000W4P | FCC ID:<br>2ATAZ-MWI3000W4P |

## 5. U-NII DFS RULE REQUIREMENTS

### 5.1 WORKING MODES AND REQUIRED TEST ITEMS

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables below for the applicability of DFS requirements for each of the operational modes.

Applicability of DFS requirements prior to use a channel

| Requirement                    | Operational Mode |                                |                             |
|--------------------------------|------------------|--------------------------------|-----------------------------|
|                                | Master           | Client without radar detection | Client with radar detection |
| Non-Occupancy Period           | √                | Not required                   | √                           |
| DFS Detection Threshold        | √                | Not required                   | √                           |
| Channel Availability Check Tim | √                | Not required                   | Not required                |
| U-NII Detection Bandwidth      | √                | Not required                   | √                           |

Applicability of DFS requirements during normal operation

| Requirement                       | Operational Mode |                                |                             |
|-----------------------------------|------------------|--------------------------------|-----------------------------|
|                                   | Master           | Client without radar detection | Client with radar detection |
| DFS Detection Threshold           | √                | Not required                   | √                           |
| Channel Closing Transmission Time | √                | √                              | √                           |
| Channel Move Tim                  | √                | √                              | √                           |
| U-NII Detection Bandwidth         | √                | Not required                   | √                           |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client Without Radar Detection                       |
|-------------------------------------------------------------------|----------------------------------------------|------------------------------------------------------|
| U-NII Detection Bandwidth and Statistical Performance Check       | All BW modes must be tested                  | Not required                                         |
| Channel Move Time and Channel Closing Transmission Time           | Test using widest BW mode available          | Test using the widest BW mode available for the link |
| All other tests                                                   | Any single BW mode                           | Not required                                         |

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

## 5.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS

### DETECTION THRESHOLD VALUES

DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

| Maximum Transmit Power                                                              | Value<br>(See Notes 1, 2 and 3) |
|-------------------------------------------------------------------------------------|---------------------------------|
| e.i.r.p. $\geq$ 200 milliwatt                                                       | -64 dBm                         |
| e.i.r.p. < 200 milliwatt and<br>power spectral density < 10 dBm/MHz                 | -62 dBm                         |
| e.i.r.p. < 200 milliwatt that do not meet the power<br>spectral density requirement | -64 dBm                         |

**Note 1:** This is the level at the input of the receiver assuming a 0 dBi receive antenna.

**Note 2:** Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

**Note3:** e.i.r.p. is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

### TEST LIMIT

DFS Response Requirement Values

| Parameter                         | Value                                                                                                     |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------|
| Non-occupancy period              | Minimum 30 minutes                                                                                        |
| Channel Availability Check Time   | 60 seconds                                                                                                |
| Channel Move Time                 | 10 seconds. See Note 1.                                                                                   |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over<br>remaining 10 second period. See Notes 1 and 2. |
| U-NII Detection Bandwidth         | Minimum 100% of the UNII<br>99% transmission power bandwidth. See Note 3.                                 |

**Note 1:** Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

**Note 2:** The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

### PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms.

| Radar Type | Pulse Width<br>( $\mu$ sec) | PRI<br>( $\mu$ sec) | Number of Pulses | Minimum<br>Percentage of<br>Successful<br>Detection | Minimum<br>Number of<br>Trials |
|------------|-----------------------------|---------------------|------------------|-----------------------------------------------------|--------------------------------|
| 0          | 1                           | 1428                | 18               | See Note 1                                          | See Note 1                     |

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

## 6. MEASUREMENT INSTRUMENTS LIST

| No.                    | Name of Equipment                   | Manufacturer  | Model Number          | Serial Number          | Inventory No. | Last Calibration | Due Calibration |
|------------------------|-------------------------------------|---------------|-----------------------|------------------------|---------------|------------------|-----------------|
| RF Conducted Emissions |                                     |               |                       |                        |               |                  |                 |
| 1                      | MXA Signal Analyzer                 | Keysight      | N9010A                | MY51440158             | JLE087        | 2025/9/15        | 2026/9/14       |
| 2                      | Spectrum Analyzer                   | Rohde&Schwarz | FSV40-N               | 6625-01-588-5515       | JLE120        | 2026/1/19        | 2027/1/18       |
| 3                      | RF Control Unit                     | dsusoft       | JS0806-2              | 21G8060449             | JLE053        | 2026/2/27        | 2027/2/26       |
| 4                      | power supply unit                   | dsusoft       | JS0806-4ADC           | N/A                    | JLE055        | 2026/2/27        | 2027/2/26       |
| 5                      | VXG Signal Generator                | Keysight      | N5182B                | MY59100855             | JLE068        | 2026/4/8         | 2027/4/7        |
| 6                      | EXG Analog Signal Generator         | Keysight      | N5173B                | MY59101282             | JLE052        | 2026/2/27        | 2027/2/26       |
| 7                      | Wideband Radio Communication Tester | Rohde&Schwarz | CMW500                | 1201.0002K50-116064-Dt | JLE054        | 2026/2/27        | 2027/2/26       |
| 8                      | Test software                       | dsusoft       | JS1120-3 Ver.3.2.22.0 |                        |               |                  |                 |


## 7. DYNAMIC FREQUENCY SELECTION (DFS)

### 7.1 DFS MEASUREMENT SYSTEM

#### Test Procedure



1. Master device and client device are set up by conduction method as the following configuration.
2. The client device is connected to notebook and to access a IP address on wireless connection with the master device.
3. Then the master device is connected to another notebook to access a IP address.
4. Finally, let the two IP addresses run traffic with each other through the Run flow software “Lan test” to reach 17% channel loading as below.

#### Setup for Client with injection at the Master

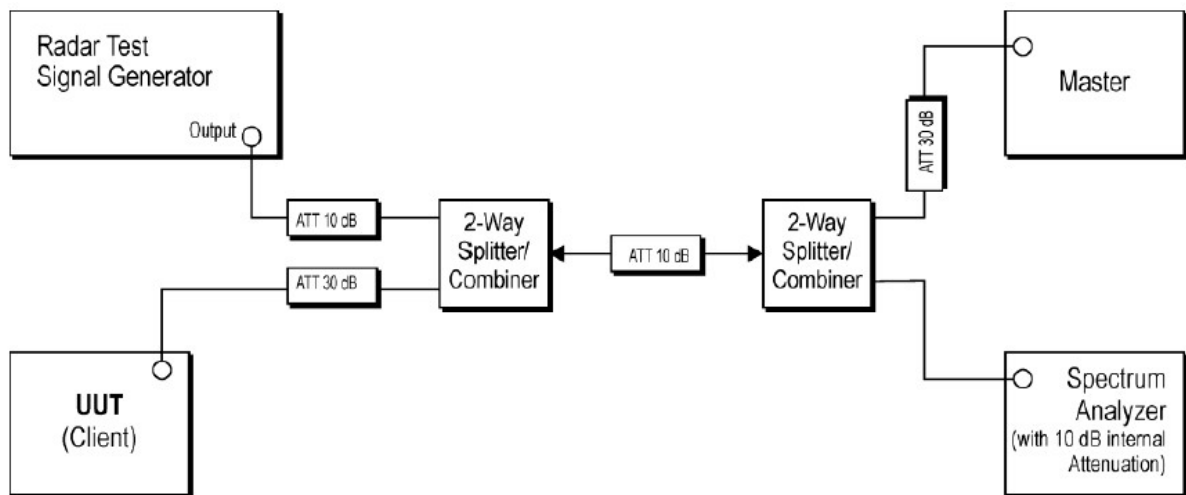

Radar Test Waveforms are injected into the Master.

## Channel Loading

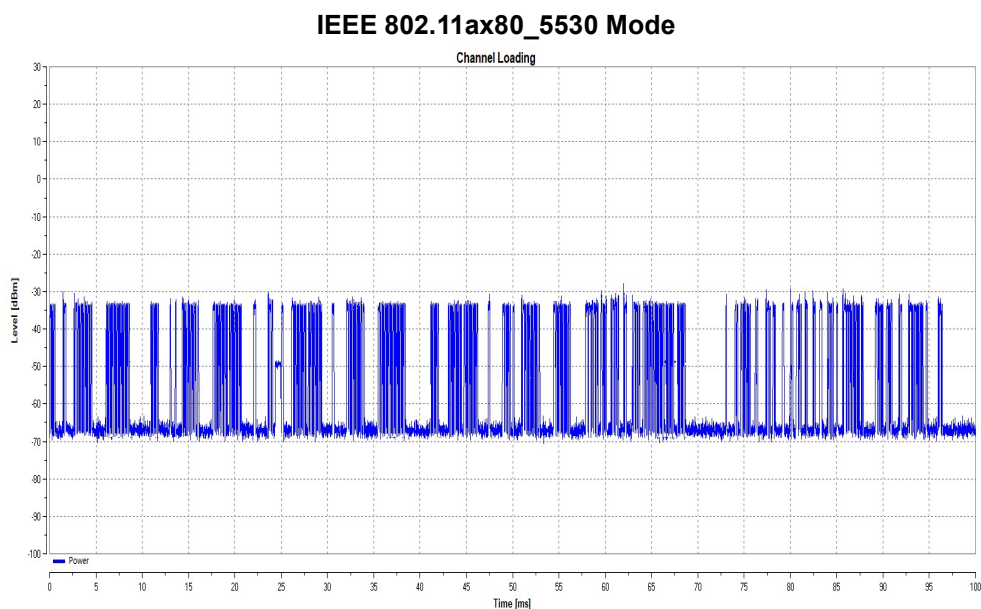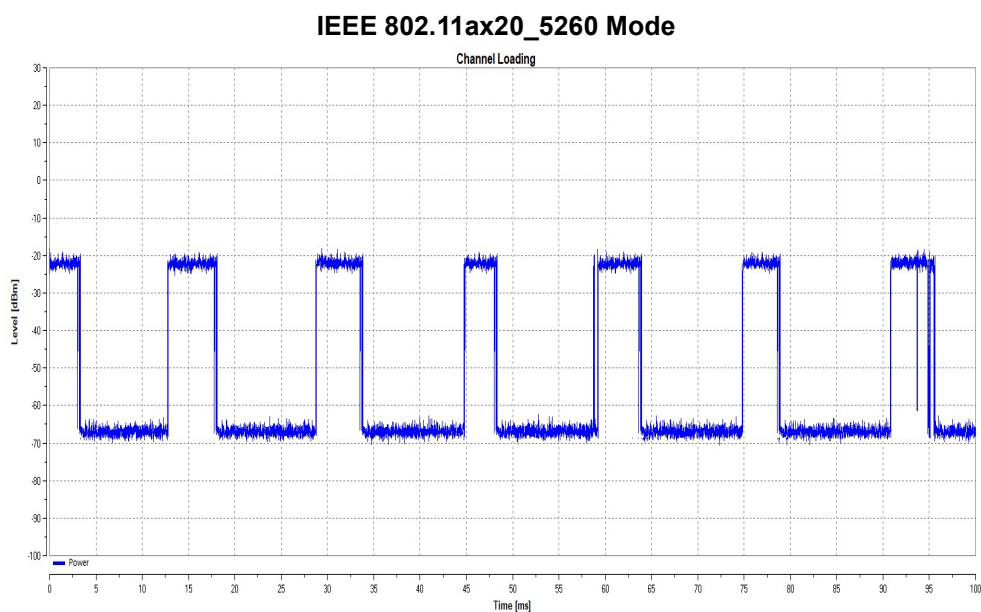

| Test Mode | Frequency[MHz] | Result | Limit [%] | Verdict |
|-----------|----------------|--------|-----------|---------|
| 11ax20    | 5260           | 35.72  | 17        | PASS    |
| 11ax80    | 5530           | 30.15  | 17        | PASS    |

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), additional combiner/dividers are inserted between the Master Combiner/Divider and the pad connected to the Master Device (and/or between the Slave Combiner/Divider and the pad connected to the Slave Device). Additional pads are utilized such that there is one pad at each RF port on each EUT.


## 7.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL

A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the master device and the signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of -62dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. Measure the amplitude and calculate the difference from -64 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of -64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.

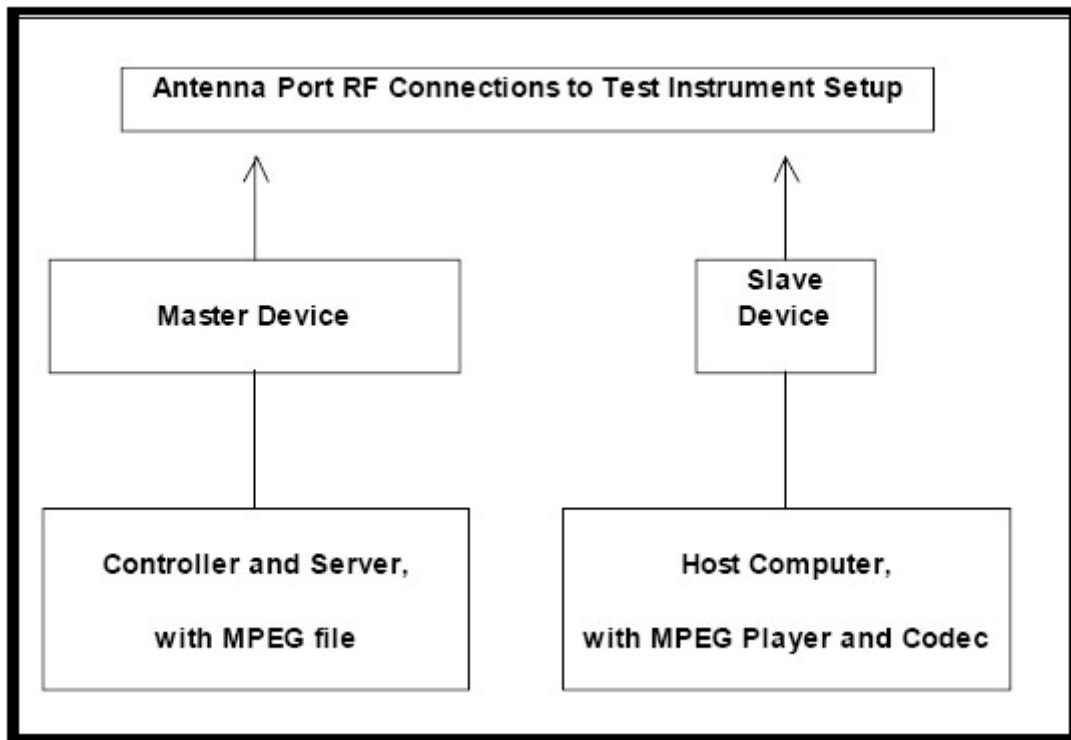

## 7.3 DEVIATION FROM TEST STANDARD

No deviation.

## 8. TEST RESULTS

### 8.1 SUMMARY OF DFS TEST RESULT


| Clause     | Test Parameter                    | Remarks    | Result |
|------------|-----------------------------------|------------|--------|
| FCC 15.407 | Channel Move Time                 | Applicable | Pass   |
|            | Channel Closing Transmission Time | Applicable | Pass   |

### 8.2 DFS DETECTION THRESHOLD

Calibration:



Note: Maximum Transmit Power is less than 200 milliwatt in this report, so detection threshold level is -62dBm

| Test Mode | Frequency[dbm] | Radar Type | Result | Limit[dbm] | Verdict |
|-----------|----------------|------------|--------|------------|---------|
| 11ax20    | 5260           | Type0      | -62.33 | -62        | PASS    |
| 11ax80    | 5530           | Type0      | -62.24 | -62        | PASS    |

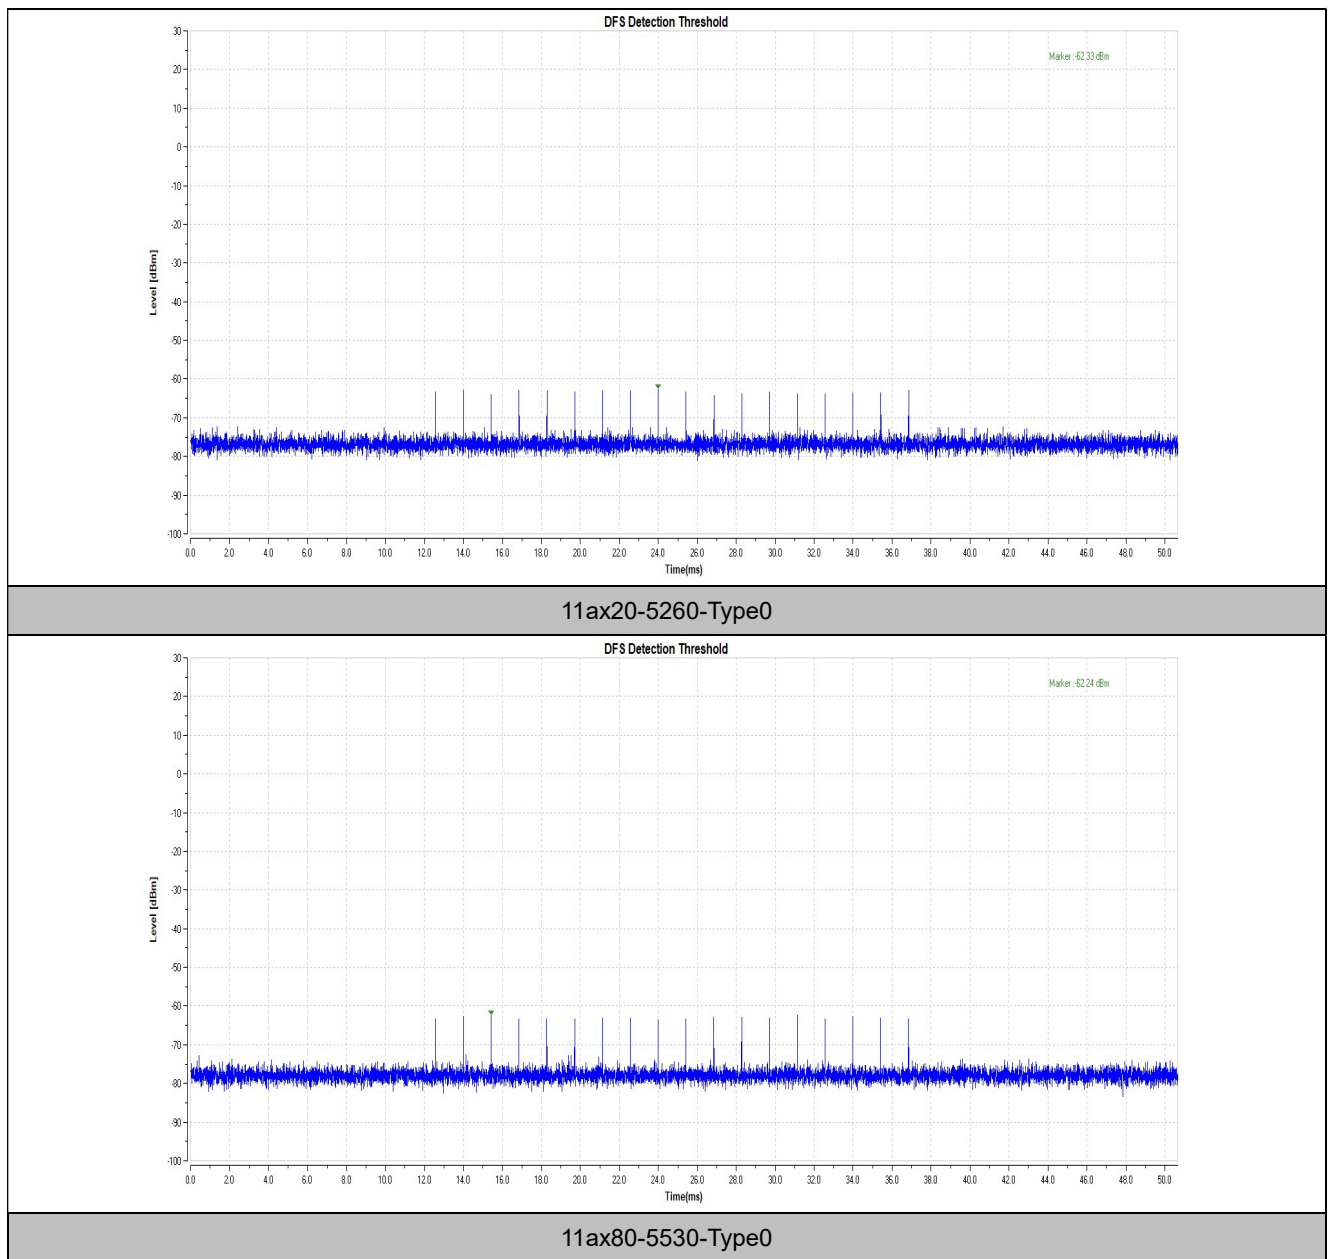

### 8.3 CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME

Radar signal 0

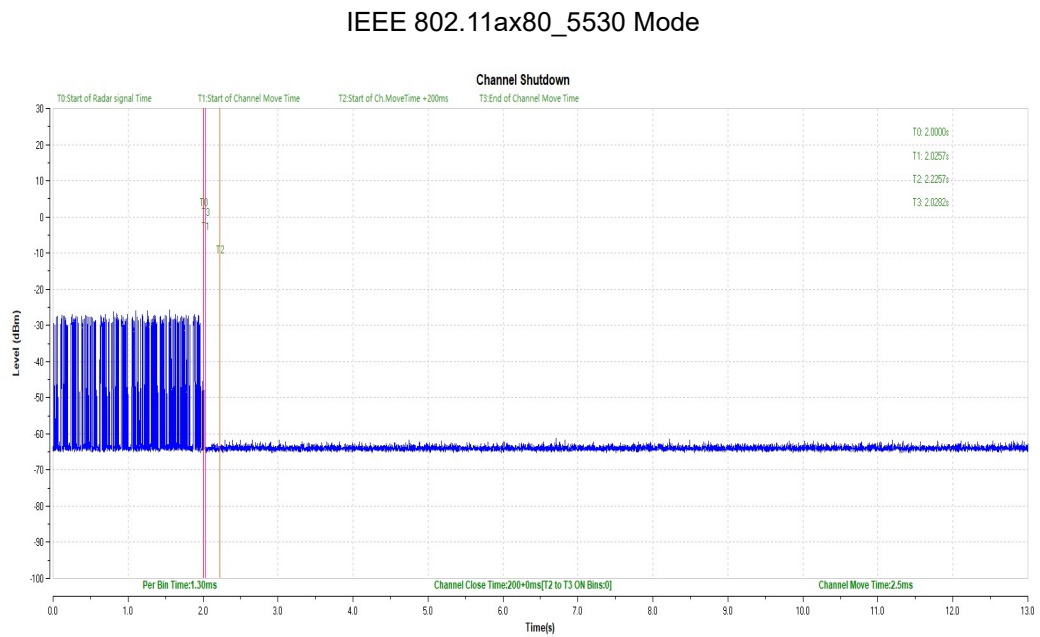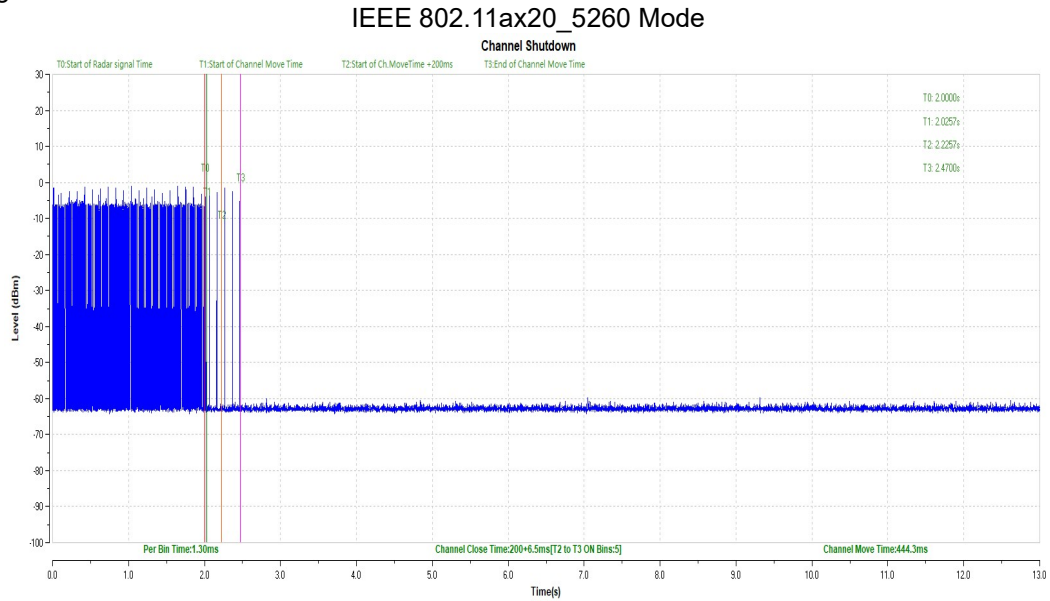

**Note:** T0 denotes the Radar Injection Start.

T1 denotes the start of Channel Move Time upon the end of the last Radar burst.

T2 denotes the data transmission time of 200ms from T1.

T3 denotes the end of Channel Move Time.

| Test Mode | Frequency[MHz] | CCTT[ms] | Limit[ms] | CMT[ms] | Limit[ms] | Verdict |
|-----------|----------------|----------|-----------|---------|-----------|---------|
| 11ax20    | 5260           | 200+6.5  | 200+60    | 444.3   | 10000     | PASS    |
| 11ax80    | 5530           | 200+0    | 200+60    | 2.5     | 10000     | PASS    |

## Statement

1. The report is invalid without the official seal or special seal of Shenzhen Haiyun Standard Technical Co., Ltd. (hereinafter referred to as the unit).
2. The report is invalid without the signature of the approver.
3. The report is invalid if altered arbitrarily.
4. The report shall not be partially copied without the written approval of the unit.
5. The reported test results are only valid for the tested samples.
6. If there is any objection to the test report, it shall be submitted to the test unit within 15 days from the date of receiving the report, and the overdue shall not be accepted.

## Shenzhen Haiyun Standard Technical Co., Ltd.

Address: Room 110, 111, 112, 113, 115, 116, Block B, Jinyuan Business Building, No. 302, Xixiang Avenue, Labor Community, Xixiang Street, Baoan District, Shenzhen, China

**End of Test Report**