


AppendixA: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	0.561	2407.721	2408.282	---	---
TX	Ant1	2440	0.561	2439.730	2440.291	---	---
TX	Ant1	2475	0.564	2474.721	2475.285	---	---

Test Graphs

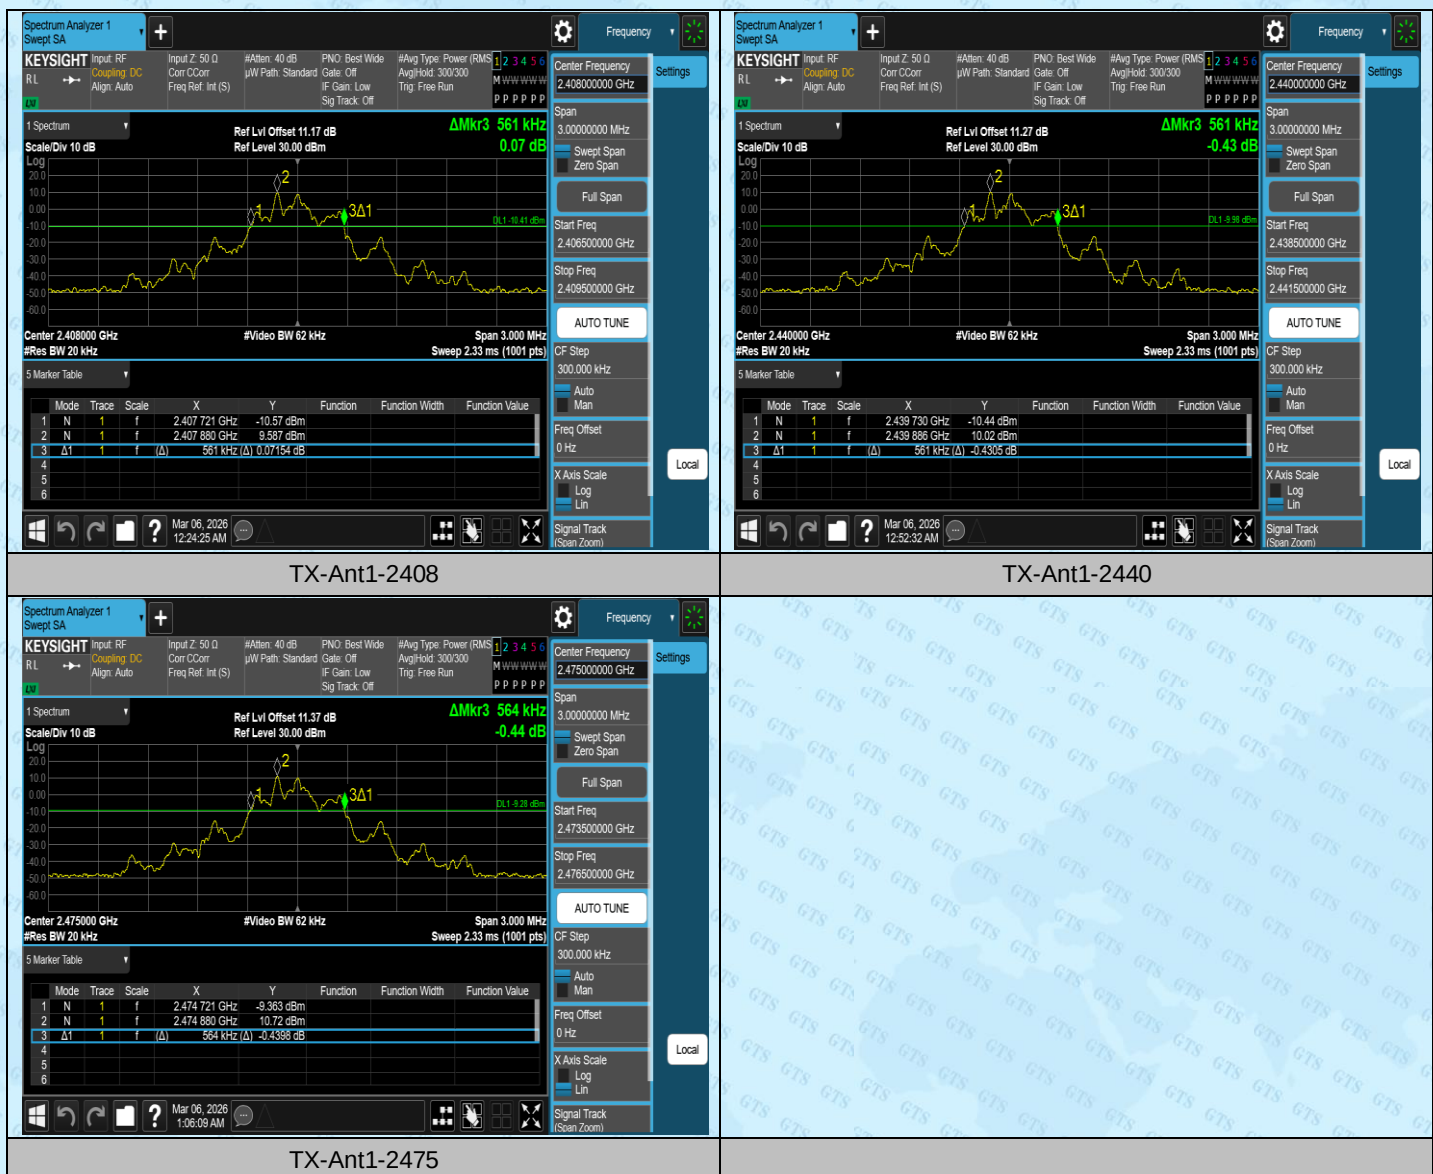

AppendixB: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2408	0.54639	2407.7278	2408.2742	---	---
TX	Ant1	2440	0.54129	2439.7359	2440.2772	---	---
TX	Ant1	2475	0.54634	2474.7289	2475.2752	---	---

Test Graphs



TX-Ant1-2408



TX-Ant1-2475



TX-Ant1-2440




AppendixC: Maximum conducted output power

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	2408	9.56	≤20.97	PASS
TX	Ant1	2440	10.09	≤20.97	PASS
TX	Ant1	2475	10.70	≤20.97	PASS

Test Graphs

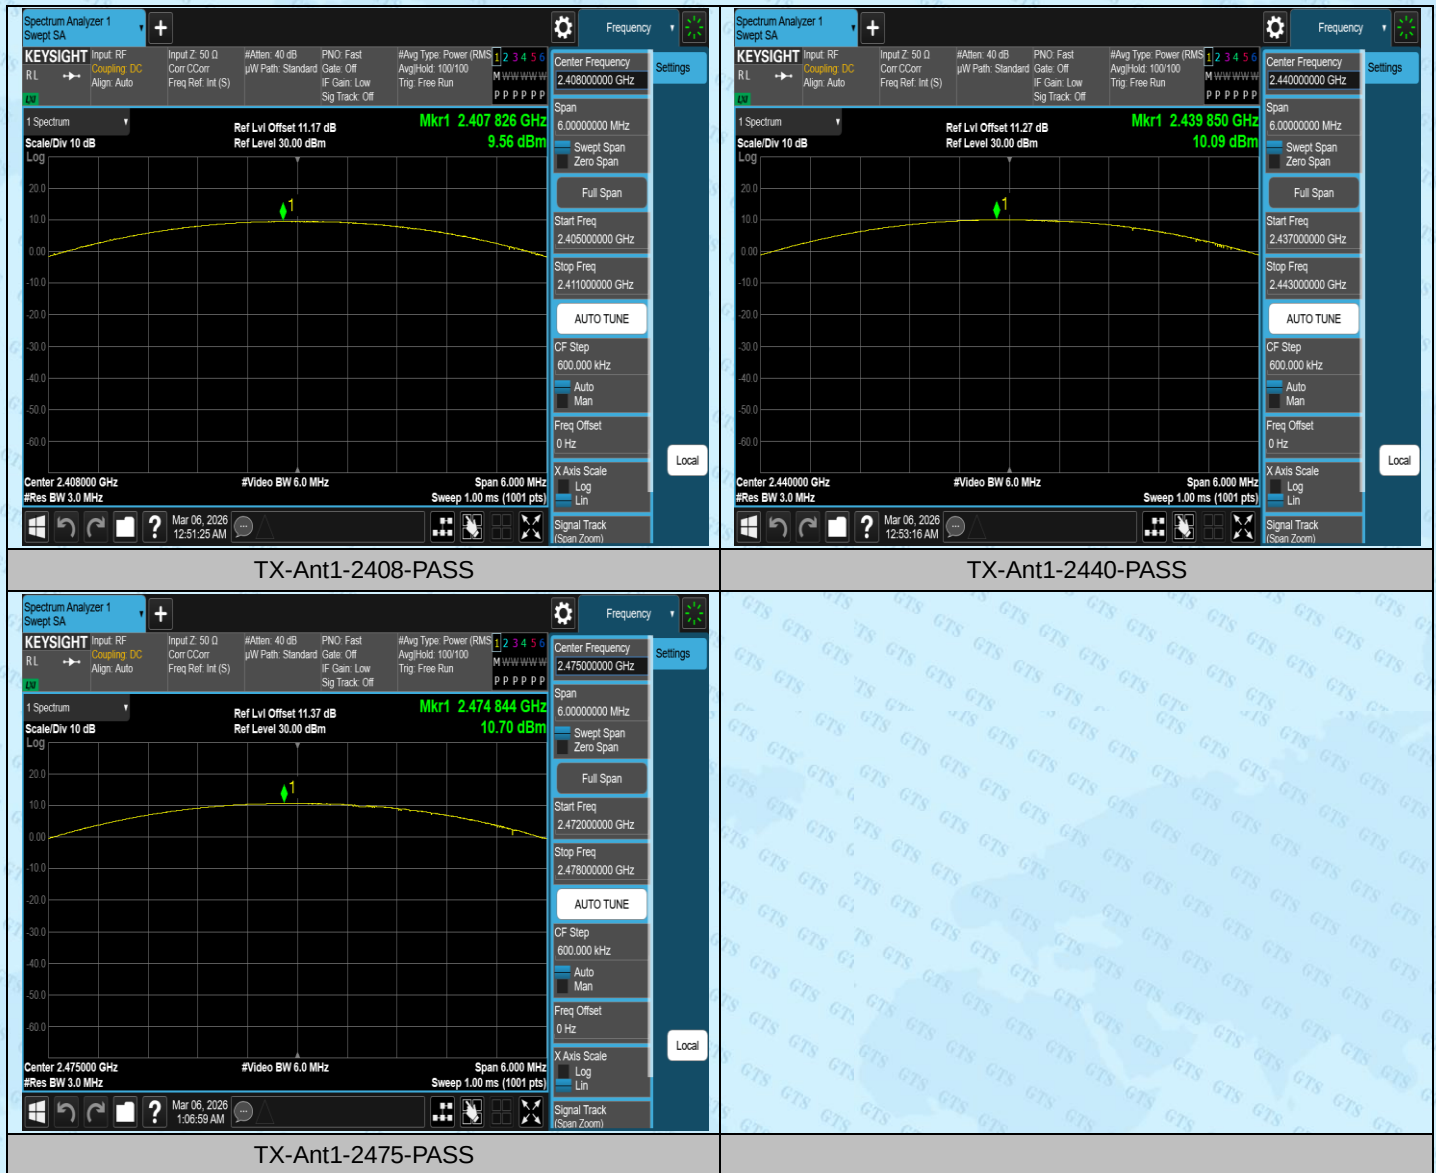

AppendixD: Carrier frequency separation

Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
TX	Ant1	Hop_2408	4.000	≥0.561	PASS
TX	Ant1	Hop_2440	4.000	≥0.561	PASS
TX	Ant1	Hop_2475	10.998	≥0.564	PASS


Test Graphs




AppendixE: Time of occupancy

Test Result

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
TX	Ant1	Hop_2408	0.7723	8	0.006	≤0.4	PASS
TX	Ant1	Hop_2440	0.7698	8	0.006	≤0.4	PASS
TX	Ant1	Hop_2475	0.7732	8	0.006	≤0.4	PASS

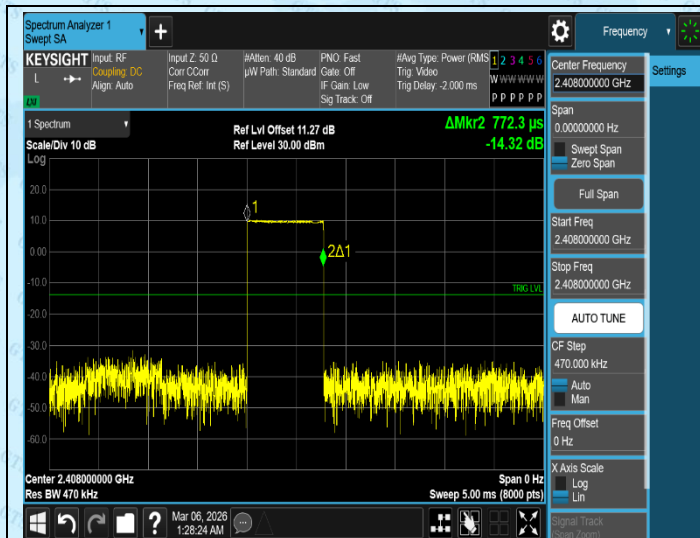


TX-Ant1-Hop_2408-PASS

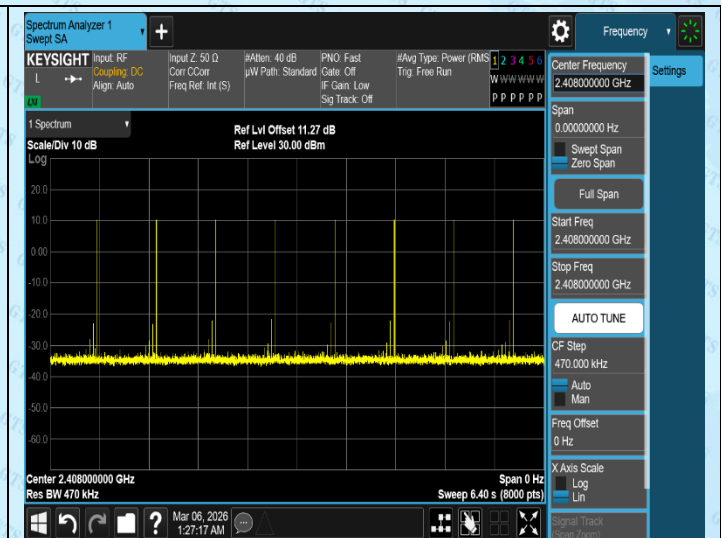


TX-Ant1-Hop_2408-PASS




TX-Ant1-Hop_2440-PASS

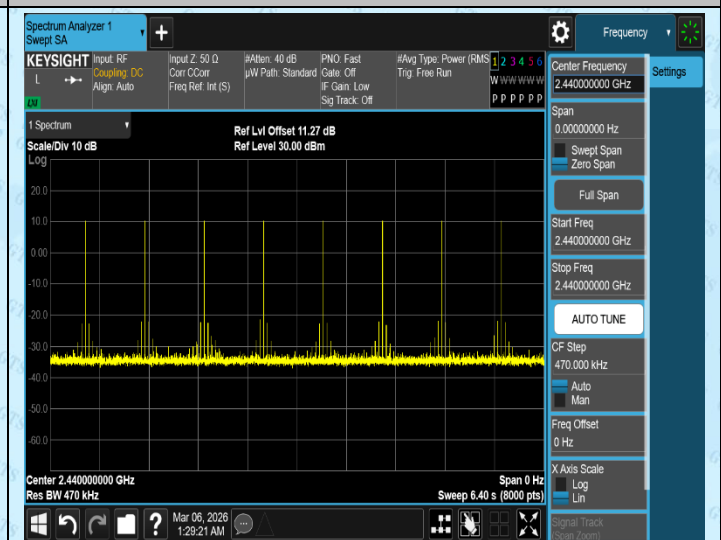

TX-Ant1-Hop_2440-PASS

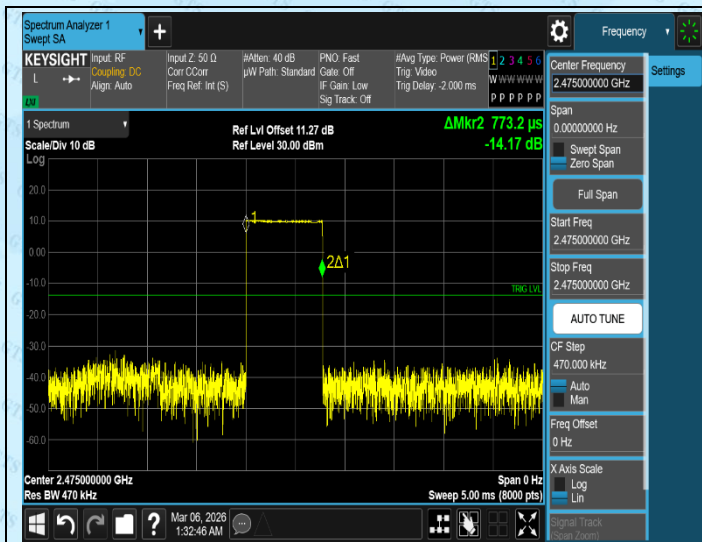

TX-Ant1-Hop_2475-PASS

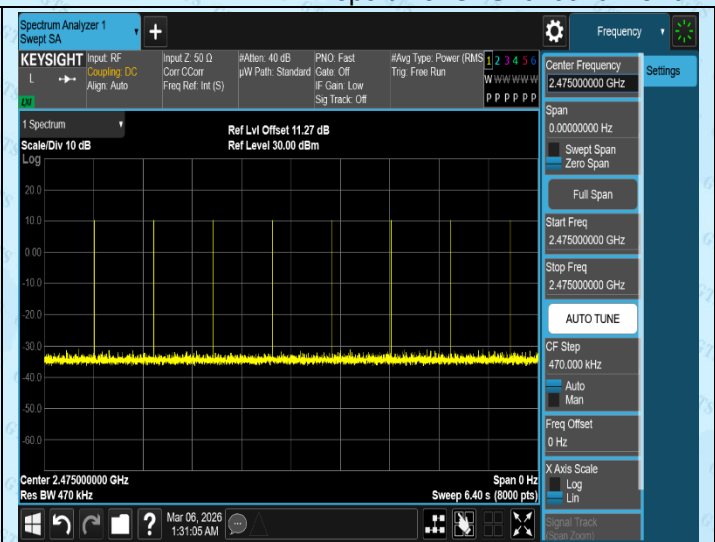


TX-Ant1-Hop_2475-PASS

AppendixF: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
TX	Ant1	Hop	16	≥15	PASS

Test Graphs

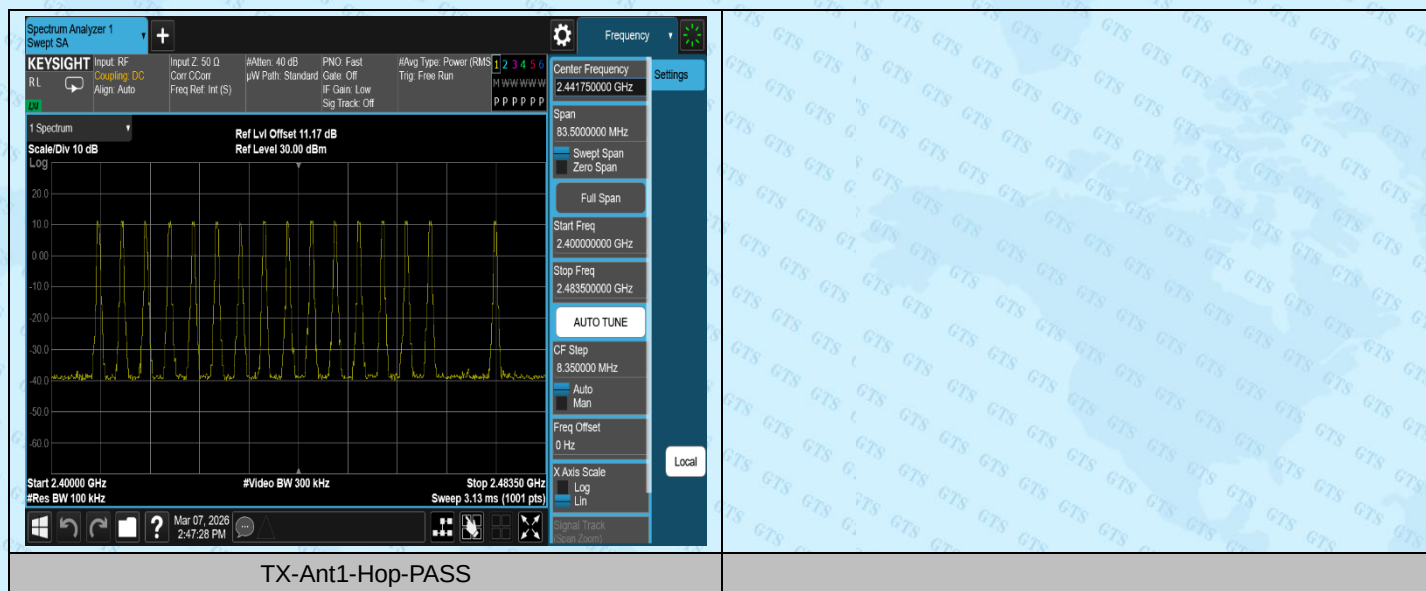


AppendixG:Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	Low	2408	9.48	-40.8	≤ -10.52	PASS
TX	Ant1	High	2475	10.61	-42.65	≤ -9.4	PASS
TX	Ant1	Low	Hop_2408	10.24	-46.29	≤ -9.76	PASS
TX	Ant1	High	Hop_2475	10.63	-46.12	≤ -9.37	PASS

Test Graphs

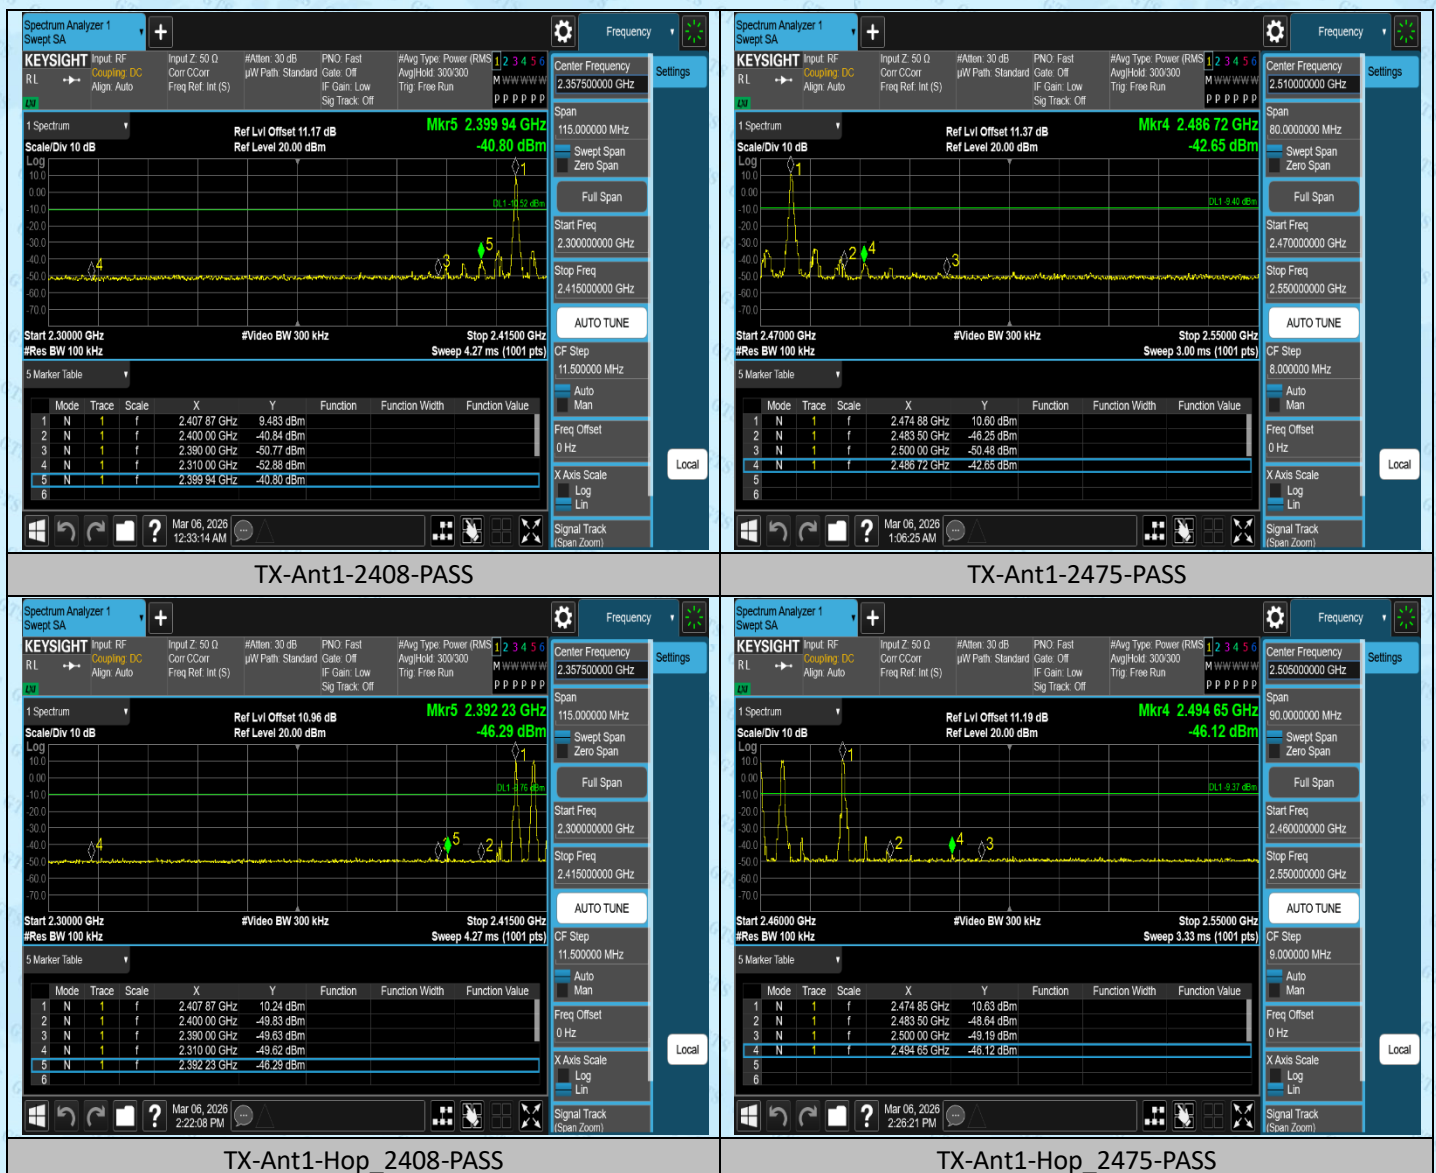


AppendixH:Conducted Spurious Emission

Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	2408	0~Reference	9.46	9.46	---	PASS
TX	Ant1	2408	30~1000	9.46	-63.16	≤-10.54	PASS
TX	Ant1	2408	1000~26500	9.46	-43.16	≤-10.54	PASS
TX	Ant1	2440	0~Reference	10.02	10.02	---	PASS
TX	Ant1	2440	30~1000	10.02	-63.24	≤-9.98	PASS
TX	Ant1	2440	1000~26500	10.02	-42.92	≤-9.98	PASS
TX	Ant1	2475	0~Reference	10.59	10.59	---	PASS
TX	Ant1	2475	30~1000	10.59	-62.04	≤-9.41	PASS
TX	Ant1	2475	1000~26500	10.59	-43.87	≤-9.41	PASS

Test Graphs

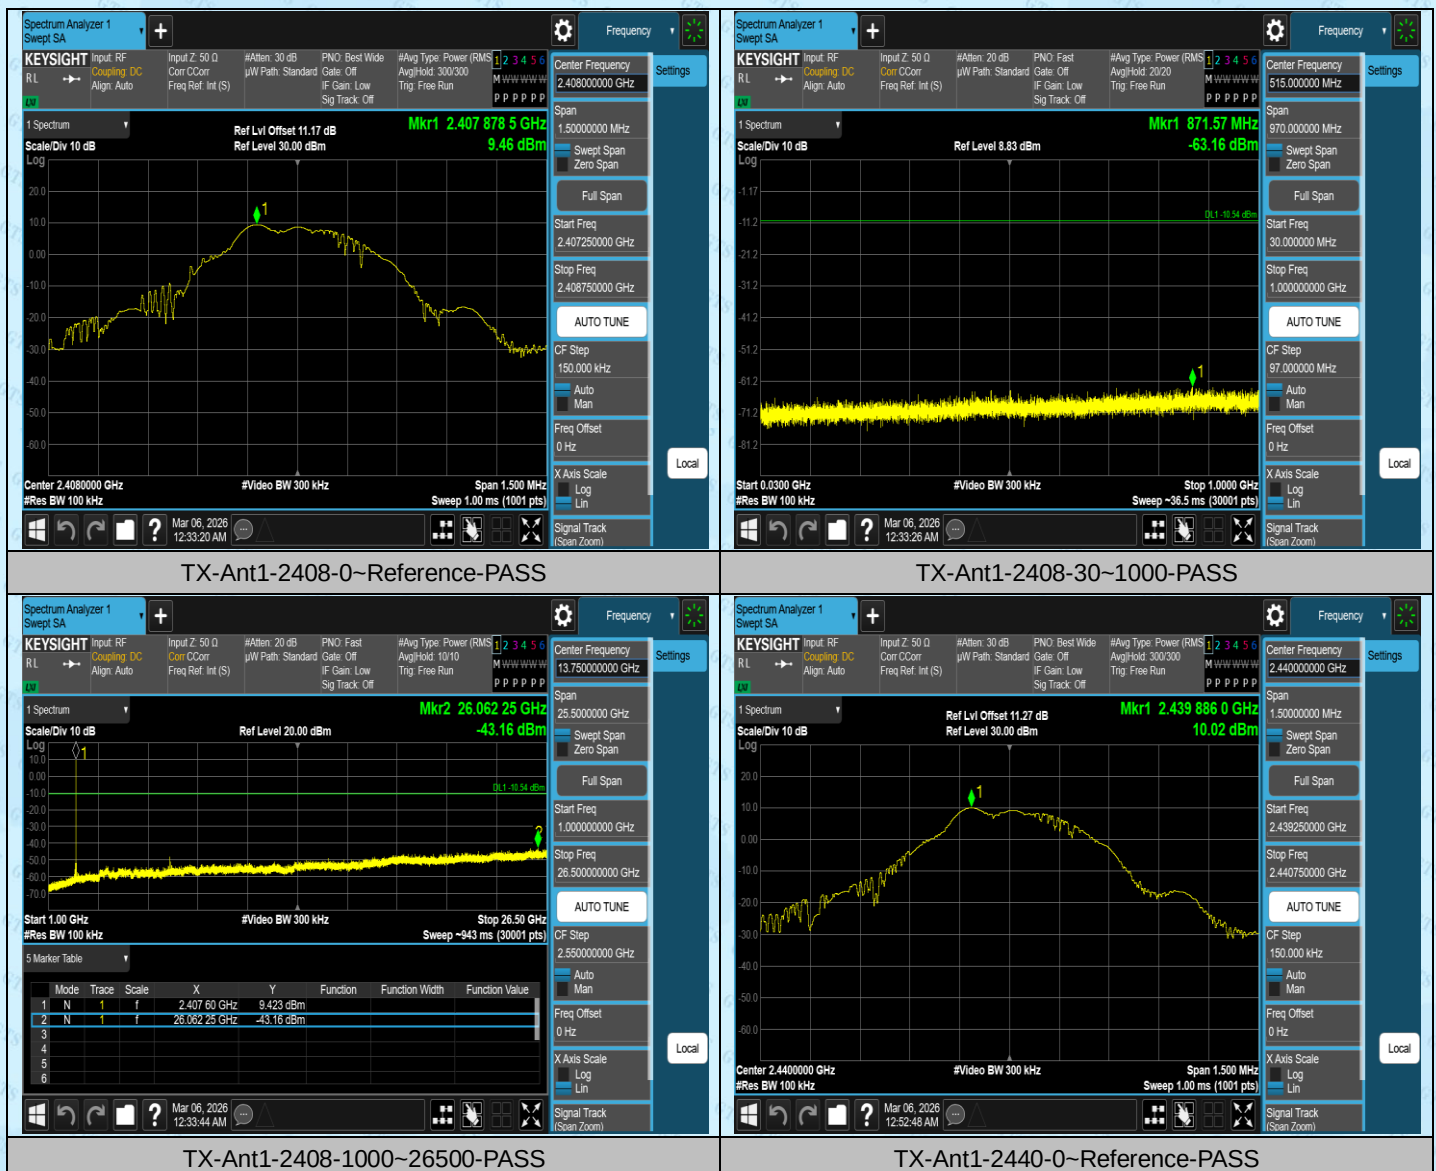

AppendixI: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
TX	Ant1	2408	0.77	3.30	23.33	---	---
TX	Ant1	2440	0.78	3.30	23.64	---	---
TX	Ant1	2475	0.78	3.30	23.64	---	---

Test Graphs



---End---