



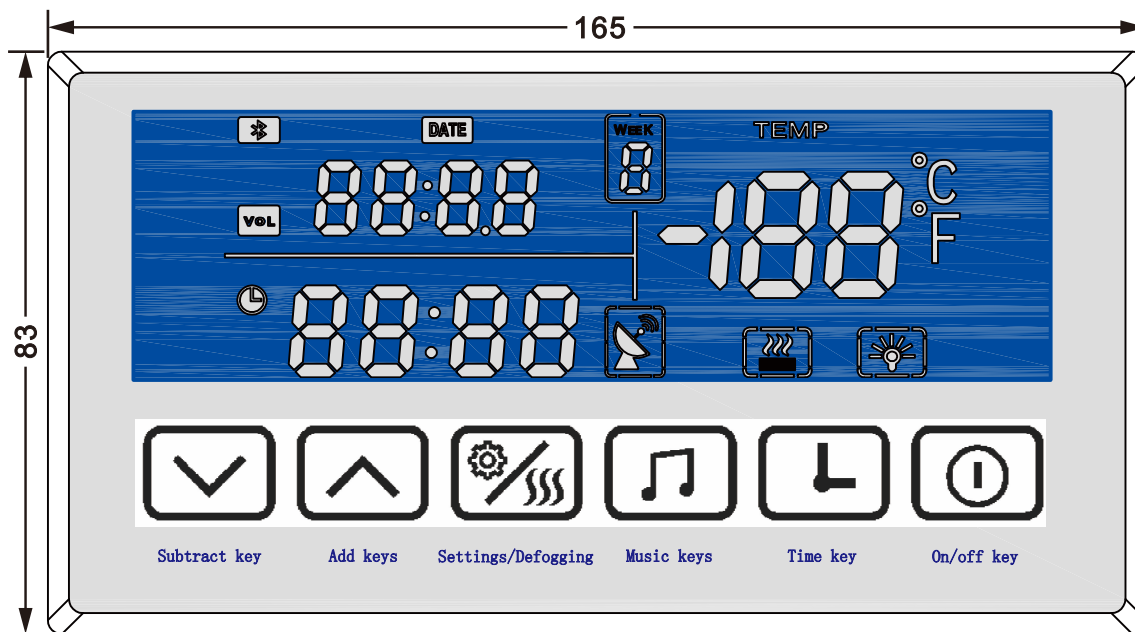


Thickness: 13mm

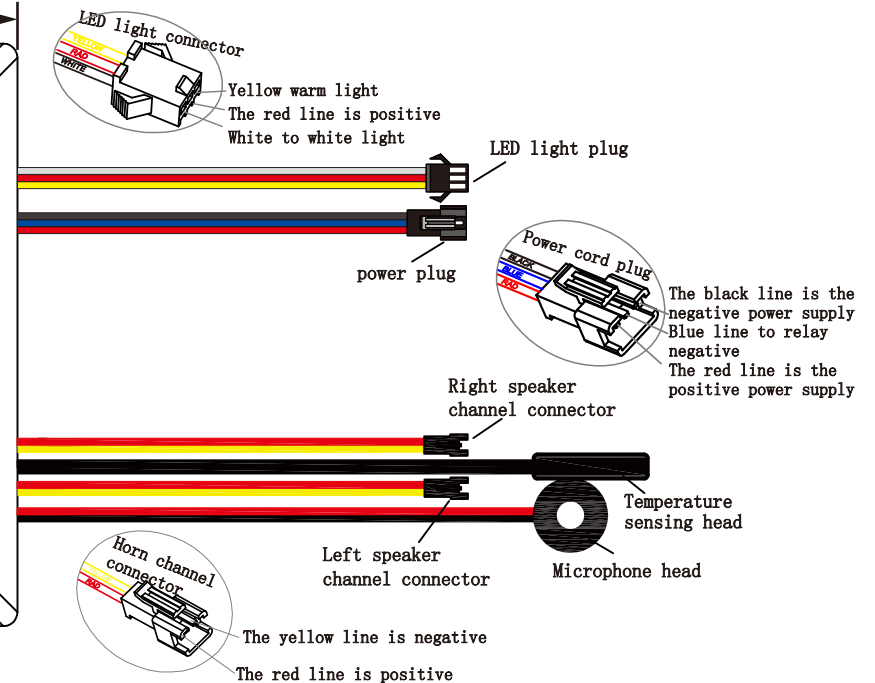

Company name	Huizhou Shuntranslation Technology Co., Ltd.	Drawing name	Instruction Manual for LCD Six-key Bluetooth Dual-color Controller	Proportional units	1:1mm
--------------	--	--------------	--	--------------------	-------

parameter	Input: DC12/24V Output: DC12/24V Max 5V				
-----------	--	--	--	--	--

Key function description	1. Tap the power key to turn on/off the light, tap continuously to switch color temperature (white-warm-dual color-off), long the light on to adjust the brightness infinitely, and tap again after 10 seconds of no operation to turn off the light. In standby mode, long press to enter screen off mode, or automatically enter the screen off mode after 30 seconds of no operation, the screen will automatically light up as long as the light is on, tap any to wake up and light up the screen in screen off mode (the screen off function needs to be set to on); 2. Long press the time key to enter the time setting, tap it again to set the time, year, month, day and week in turn, and the can be made by the /- key in the setting, long press the time key to save the setting content and exit the setting; 3. Tap the music key to turn on Bluetooth, long press to turn off Bluetooth, open the phone Bluetooth and find the name (AC696X_D) to connect Bluetooth, the Bluetooth icon stops flashing, tap play/pause music, tap this key to answer/hang up the phone when there is an incoming call; 4. Tap the Settings/Defog key to turn on and off the defogging function; long press the Settings/Defog key to enter the settings, switch, tap the /- key to adjust; 一、Mirror lamp countdown time code: LED (OFF-30-60-90-120 minutes selectable); 二、De-fog countdown code: JP (OFF-30-60-90-120 minutes selectable); 三、Radar setting sensing distance code: L (OFF-1-2-3---10 gears, the first gear is the closest, the 10 gear is the farthest); 四、Radar countdown code: L1 (10-20-30-45-60 seconds selectable); 五、Time format code: H(12H/24H); 六、Temperature code: 01(°C Celsius/° F Fahrenheit); 七、Keypress tone code: 02 (ON/OFF); 八、Automatic screen off function code: 03 (ON/OFF default is OFF); 九、After setting operations are completed, long press or exit and save settings after 1 minute interval. 5. Tap the plus key for previous track/long press for volume +; 6. Tap the minus key for next track/long press for volume -.				
--------------------------	--	--	--	--	--

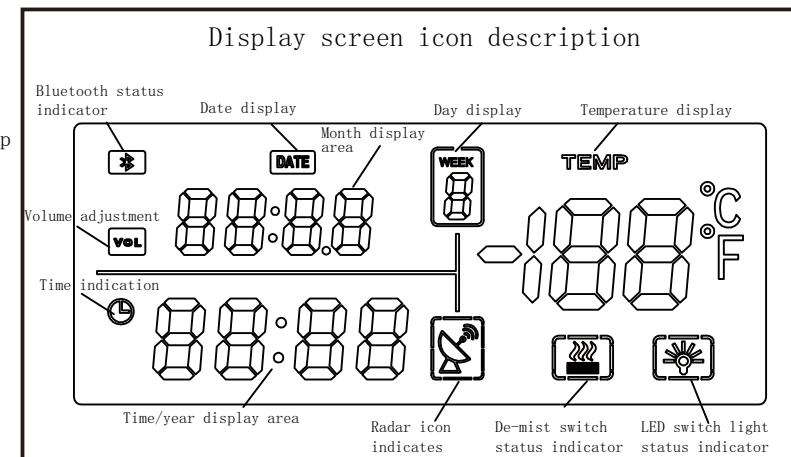

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by tuning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.