

SmartBoard UserManual



I. System description	1
1.1 System home page	1
1.2, sidebar	1
1.2.1 Function Introduction	1
1.2.2 Quick operation	2
1.2.3 Shortcut	4
1.2.4 Annotations	6
1.2.6 Sidebars	10
1.3, Status bar	18
1.4 System Settings	18
1.4.1, wireless and network	18
1.4.2 Personalization	20
1.4.3, input and output	22
1.4.4 System	23
1.4.6 Safety Options	26
1.4.6 About	27
I. Software description	27
2.1 Write on the whiteboard	27
2.1.1 Interface display	27
2.1.2 Menu	28
2.1.3 Basic operations	34
2.2 File browsing	42
2.2.1 Interface Introduction	42
2.2.2 Display mode	42
2.2.3 Toolbar	44
2.2.4 Expand the menu	45
2.3 Tablet Manager	46
2.4 Wireless screen transmission	50
2.4.1 Application instructions	50
2.4.2 Operation instructions	51
2.5 Drawing board	52
3.0 After-Sale Service.....	53

I. System description

1.1 Home page of the system

After the startup is completed, it will enter the main interface by default, as shown in the figure:




(1) The desktop has three components: return, home page, and multi-window

1.2, sidebar

1.2.1 Function Introduction

The sidebar is divided into left and right sidebars. Click the icon that


floats on the left/right side of the screen  、  You can call up the sidebar, and its expanded function buttons are the gadget expansion bar, application expansion bar, wired network, WiFi, Bluetooth, hotspot, volume and brightness progress bar, menu page, shutdown page, channel page in turn.

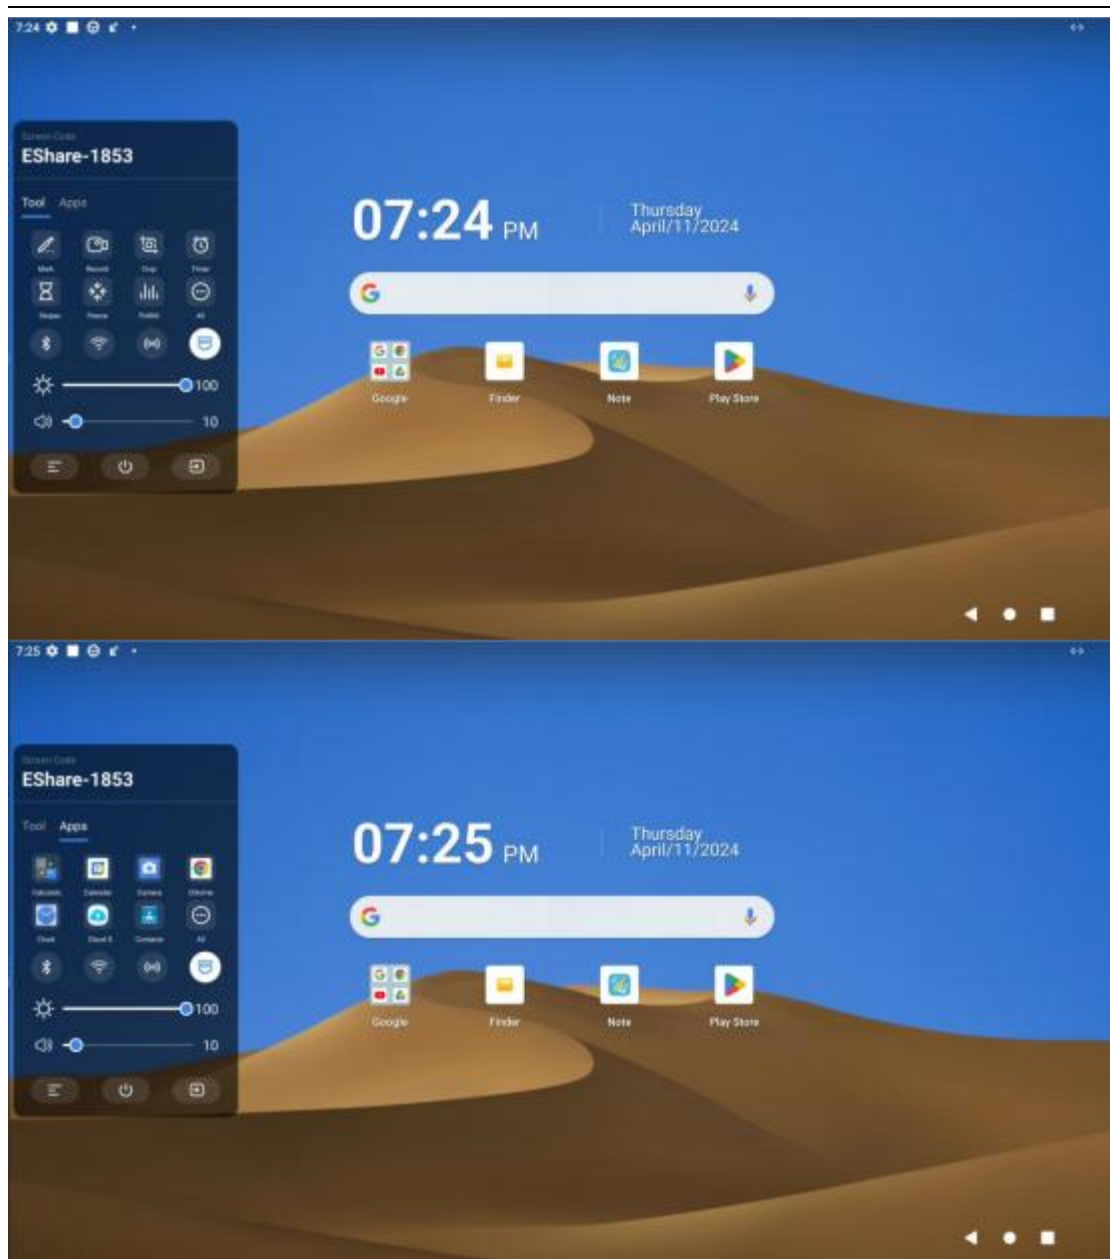

1.2.2 Quick operation

1. menu

click  The icon shows our menu, displays the pages of audio, screen, display, and adjust, which can be adjusted.

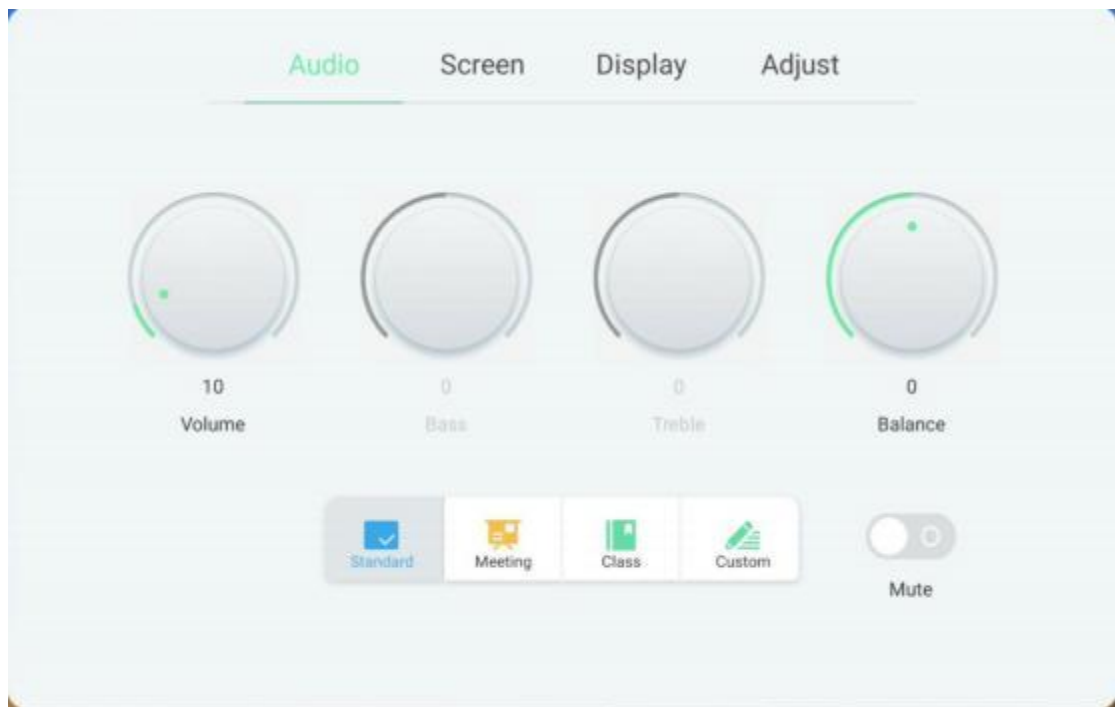


2. shut down

click  icon, enter the shutdown component interface. The functions are shutdown, sleep, and restart in sequence.



3. channel

click  icon, enter the channel interface, click to enter the corresponding channel.

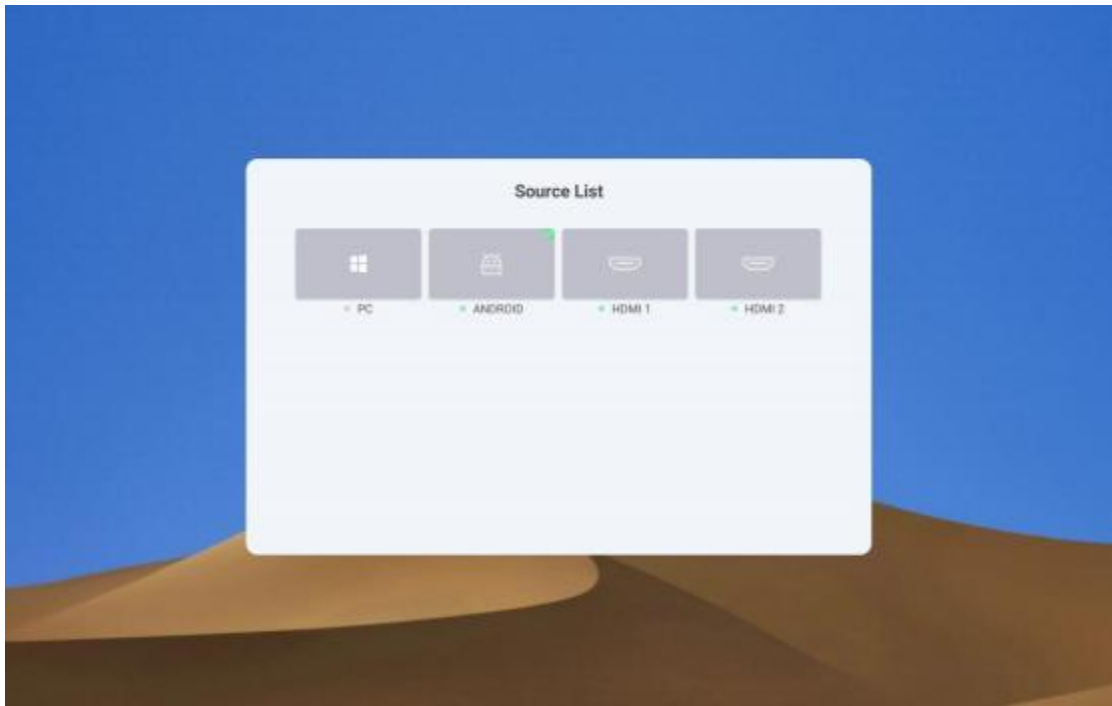


1.2.3 Shortcut

1. Google components



click icon, open and go to Google Apps, which is Google's all-in-one

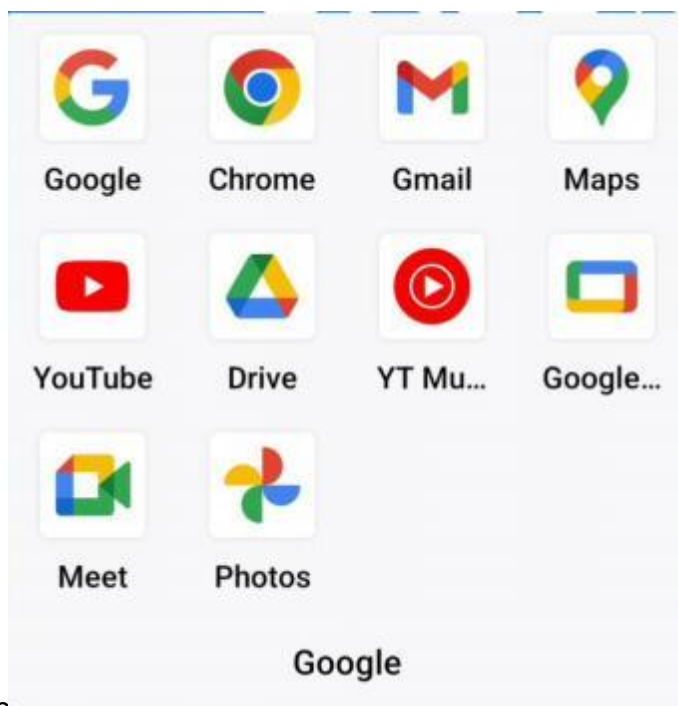

app



click Finder icon, open to enter the file management application.




click Note icon, open to enter the whiteboard application.




click Play Store icon, open and enter the Google Store app.

Click on the search bar to go directly to our Google search bar

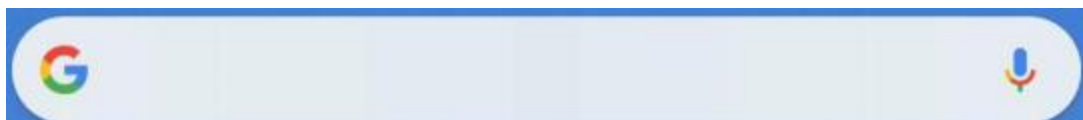


2. More apps

The up button brings up more app interfaces, including Google's component apps and common apps such as calculator, Esharepro screen casting, whiteboard, file management, tablet manager, Settings, etc.

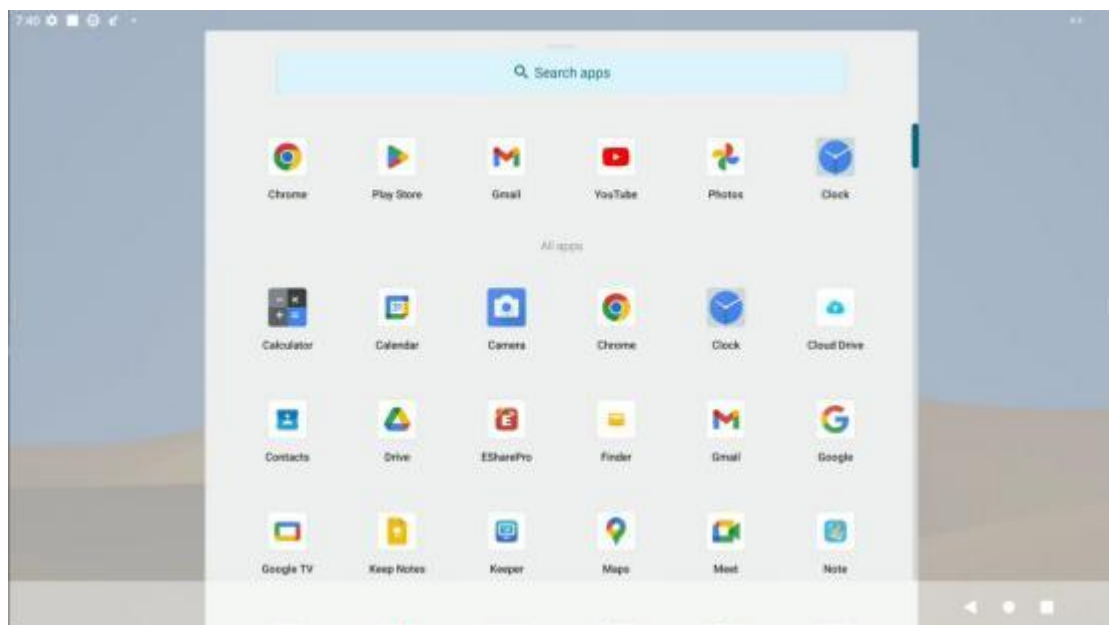

You can create shortcuts by touching and dragging the app icon to the desktop. When you drag the app icon, there is also an option to cancel the drag at the top. Drag


the icon to the top to remove the shortcut.

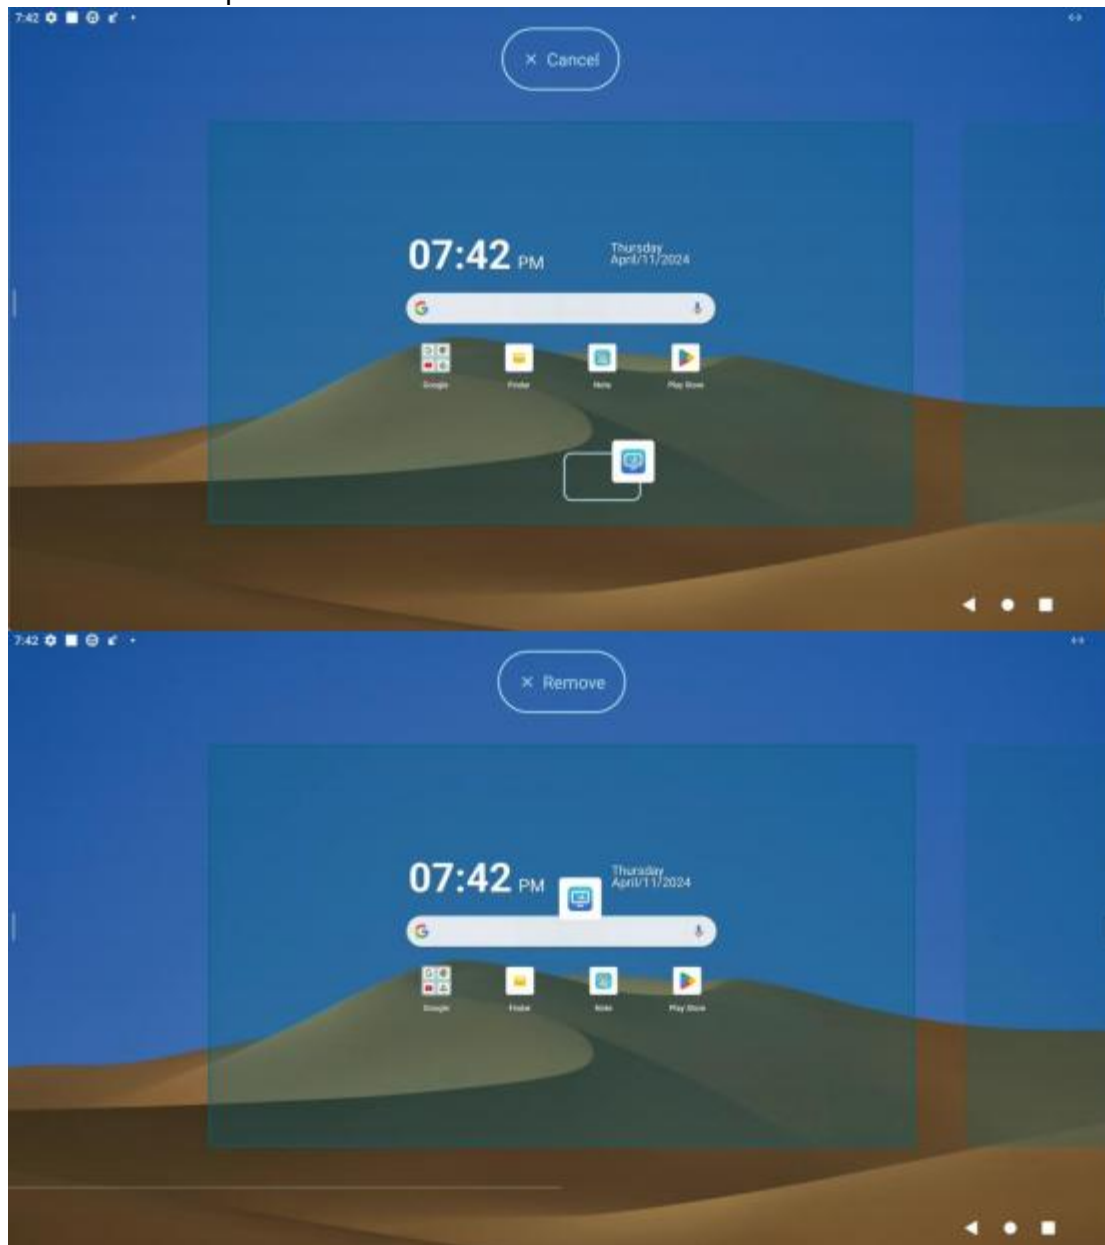

1.2.4 Annotations



click  Click the icon to open the annotation.

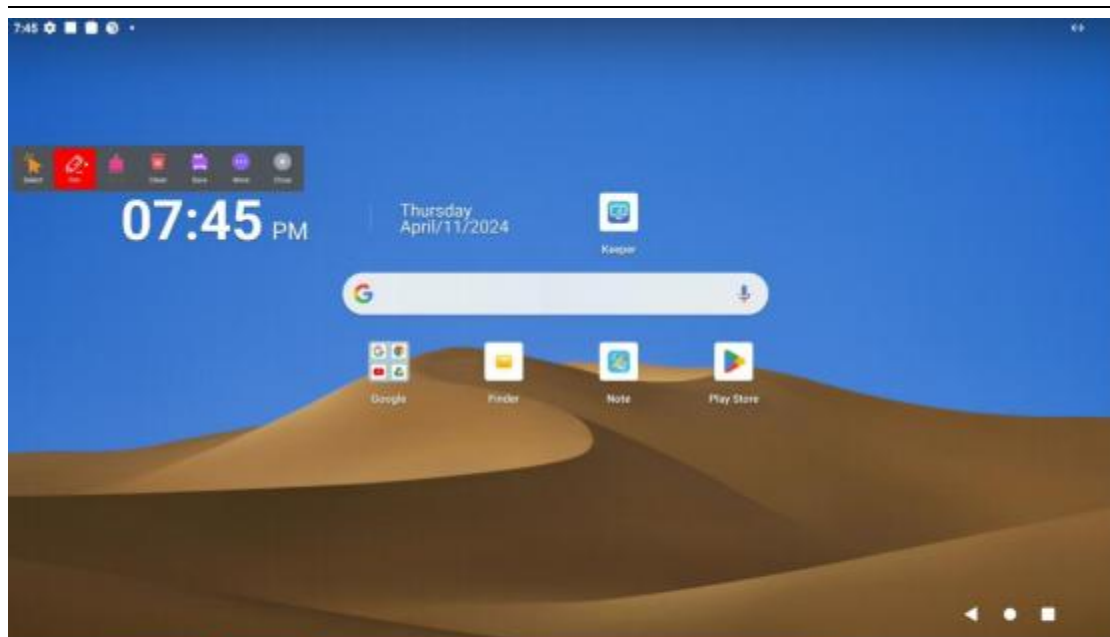

tool bar

direction for use:





- (1) click  icon, enter the brush mode, click again to call up the writing



menu


You can set the brush color and size.




- (2) click  The icon, cut back to the selection mode, needs to save the annotated content, the hover bar will not disappear.



- (3) click  icons highlight the content.





- (4) click  icon, clears all annotation traces from the interface.




- (5) click  icon, save the current annotation to a PNG file.




- a. click  The icon opens the file browser and goes directly to the annotation file save directory, as shown in the figure

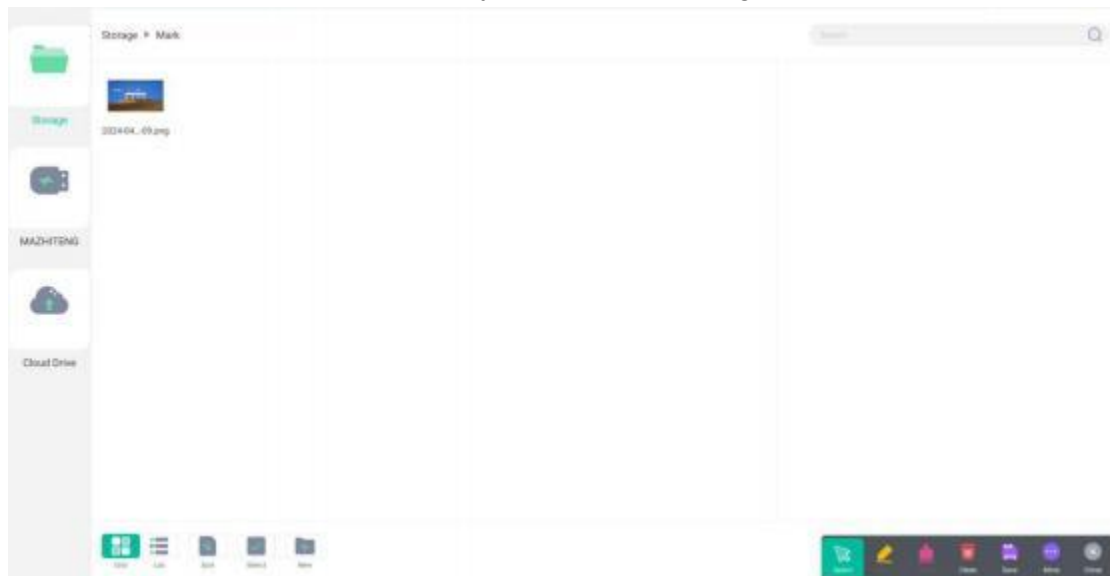



- b. click  The icon inserts the entire current annotation into the whiteboard application, as shown in the figure



- c. click  The icon generates a QR code, which users can scan to download the current annotated file or share the file by sharing the QR code.



- d. click  The icon invokes the cloud disk account

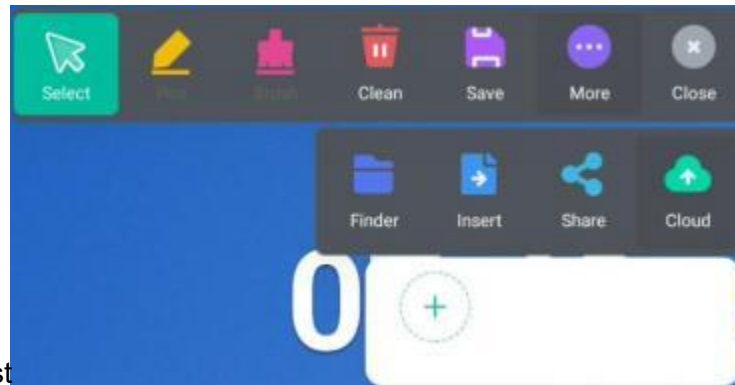

list You can upload


the current annotation file to the cloud disk, and click the list is empty  Add a cloud disk account.

The Advanced Settings section is about our volume, screen, display and adjustment. You can also select some specific scene mode, such as conference mode, classroom mode or custom mode.

1.2.6 Sidebars



click The sidebar has annotations, screen recording, screen capture, voting, frozen screen, countdown, mini player, PIP, and calculator. You can also directly open wifi, Bluetooth, wired network, and hotspot.

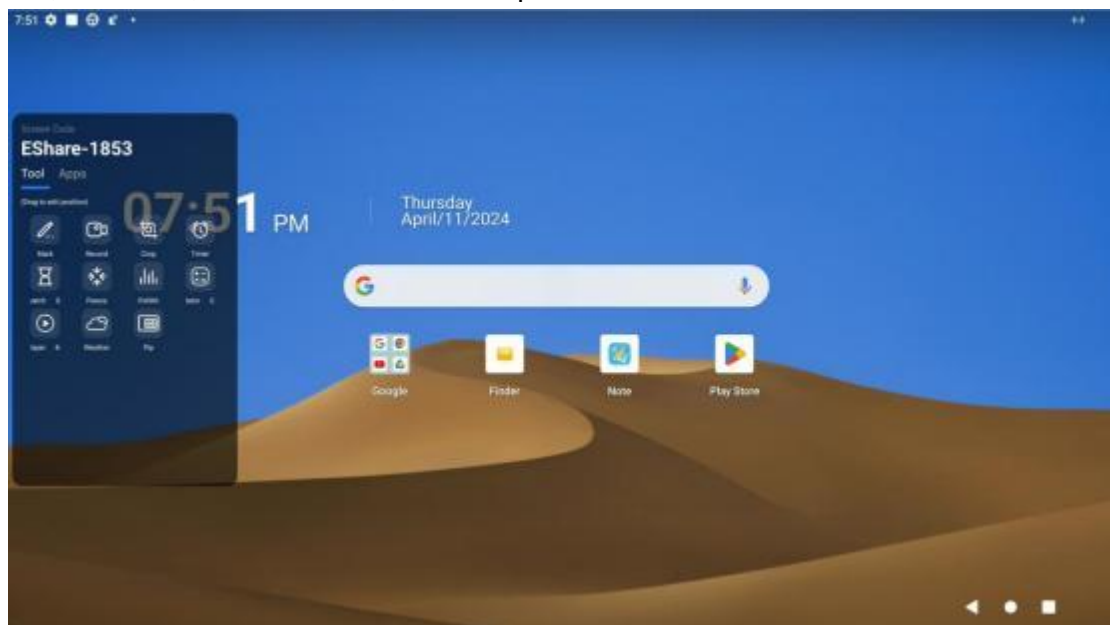


Long press any icon to drag the tool icon to customize the order or reset these tools.

(1) Countdown




click  icon, enter the countdown function, set the countdown time by touching and sliding, click "Start" to start the countdown, and ring the bell after the end.

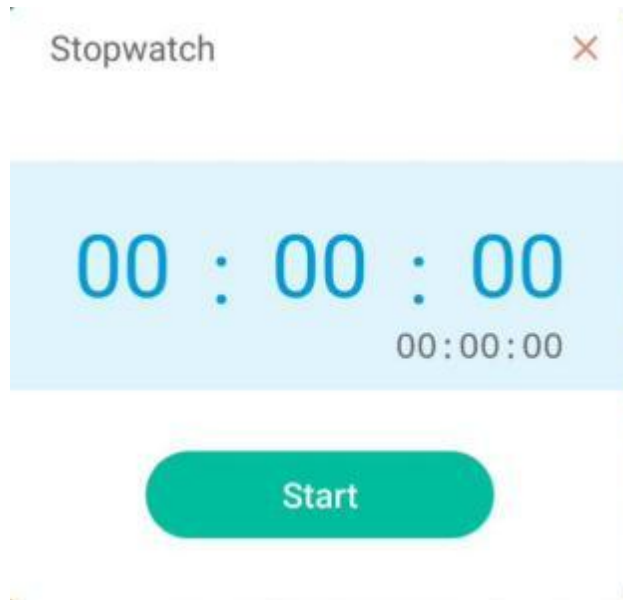

(2) Screen recording



click  The icon appears by touching and dragging.




, The position can be moved



a. click  The icon can set the resolution and path of the saved screen recording, as shown in the figure:



b. click  The screen recording will start after the 3-second countdown

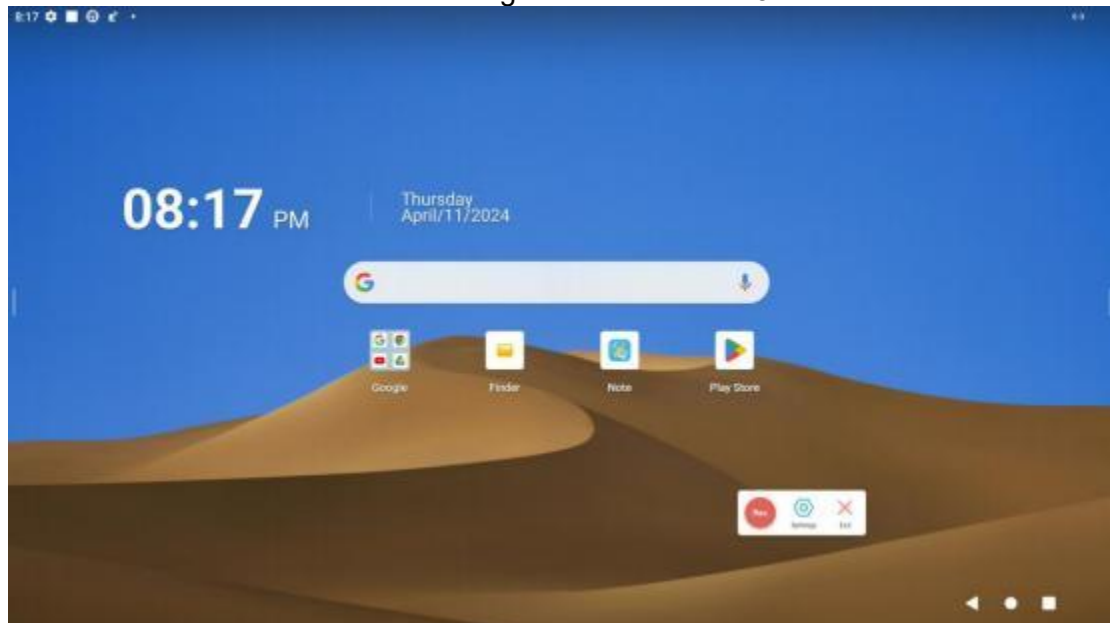

Click here  You can pause the recording and click again  You can continue

recording. Click  Exhibitions turn into  Click again to


collapse , click  End recording and save. After saving, it will prompt whether to open the file for viewing.





c. click  Exit the screen recording tool.

(3) stopwatch

click  Icon, enter the stopwatch tool, click  The icon starts the timer. Click  Turn off the timing tool.

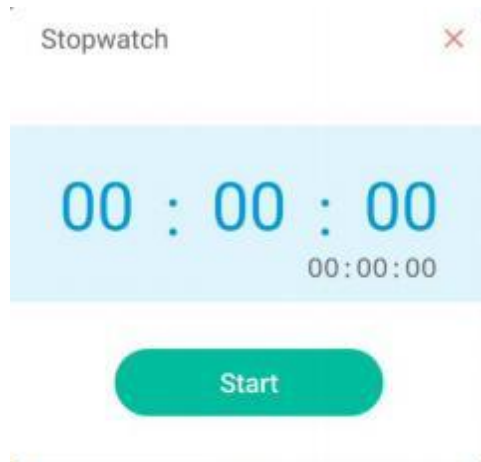


You can pause the timing after you start it  Or the number of statistics  After the pause, the timing can continue  Or reset the timer .

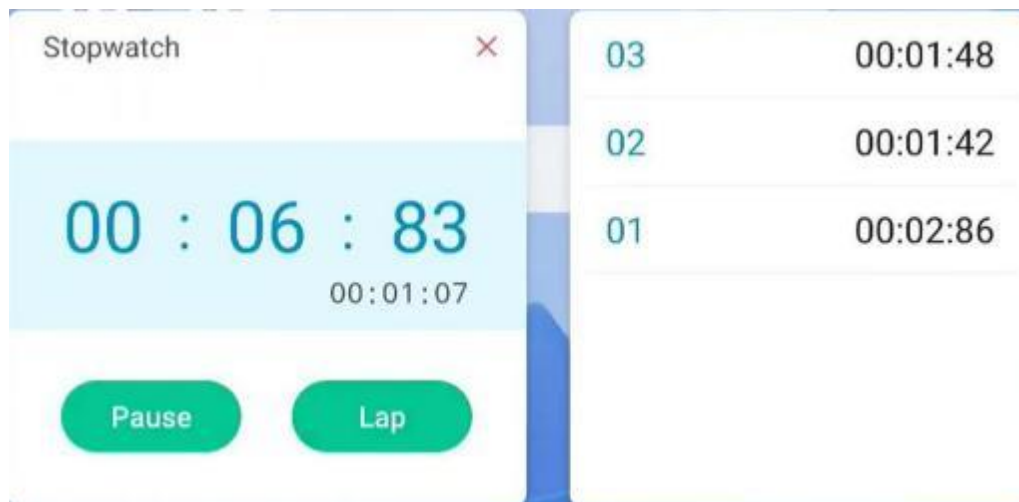

(4) Frozen screen

click  After the icon, the current interface will remain unchanged. You can zoom in and out to view the current interface.

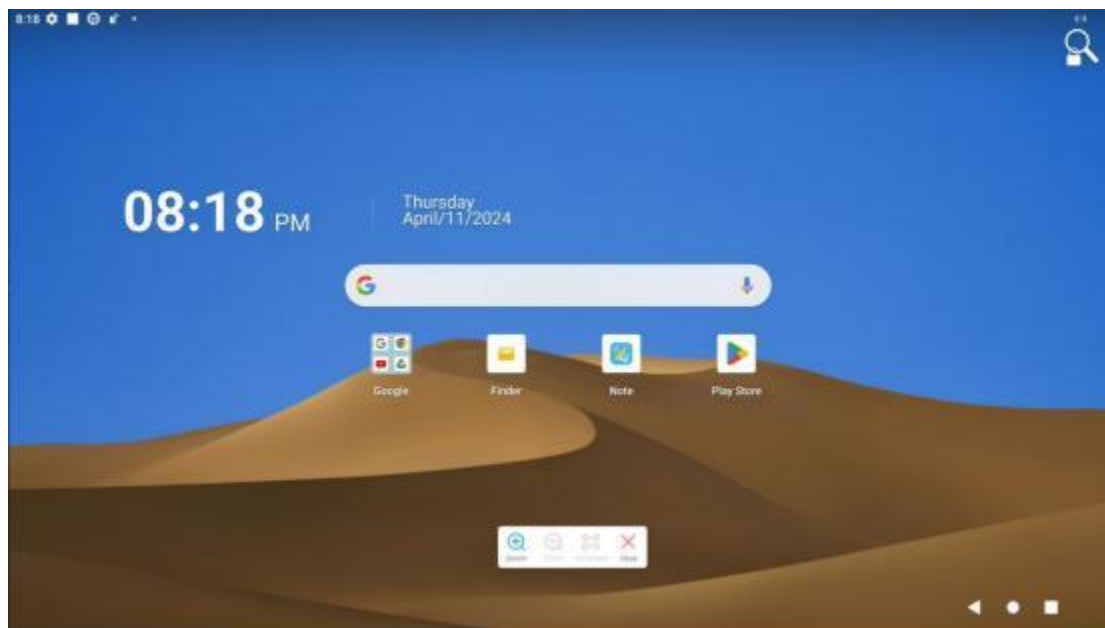

(5) screen capture

click  The icon enters the screenshot mode, and you can touch and drag the position and size of the screenshot box, and click  Take screenshots and save them (the save path will be displayed), or click  Cancel screenshot. Click  Hold down the entire screen and click again  Click to restore the previous size  Screenshots will be inserted into the quick whiteboard operation and edited.




(6) Weather Manager

click  Tap to take a photo and display the Weather Manager interface.



(7) Voting machines


click  The icon enters the voting Settings. In the quick mode, you can touch and drag the number of digital setting options. There are two functions to check whether it is anonymous or multiple selection. After setting, a voting QR code can be generated, and users can vote by scanning the code. In the advanced mode, more options will be generated by the QR code.

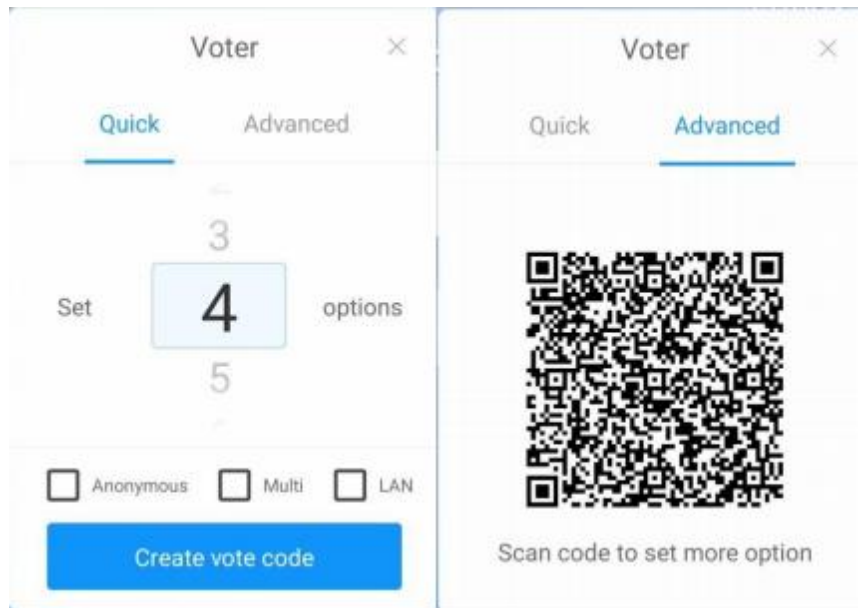

(8) mini player




click The icon goes to the mini player

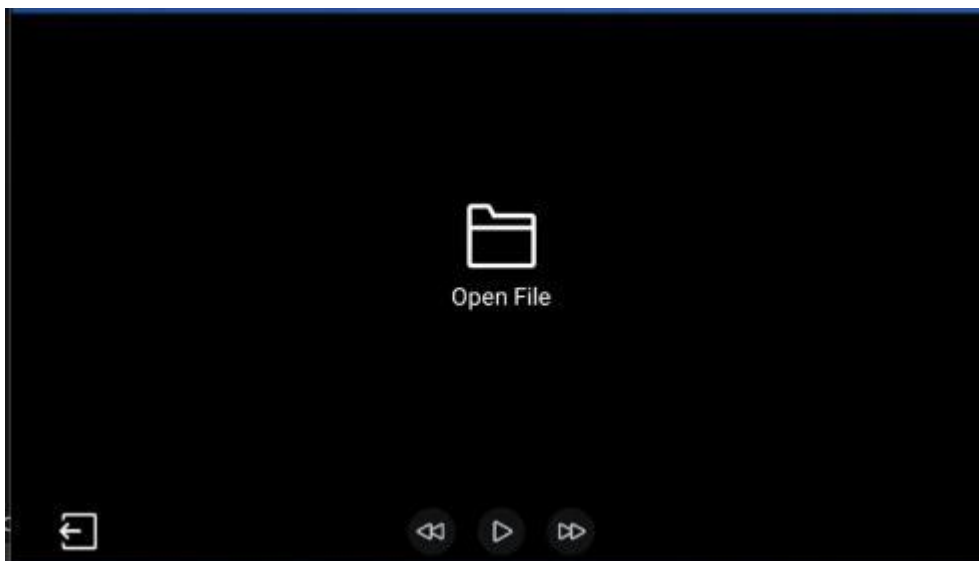

(9) counter




click Tap to enter the calculator

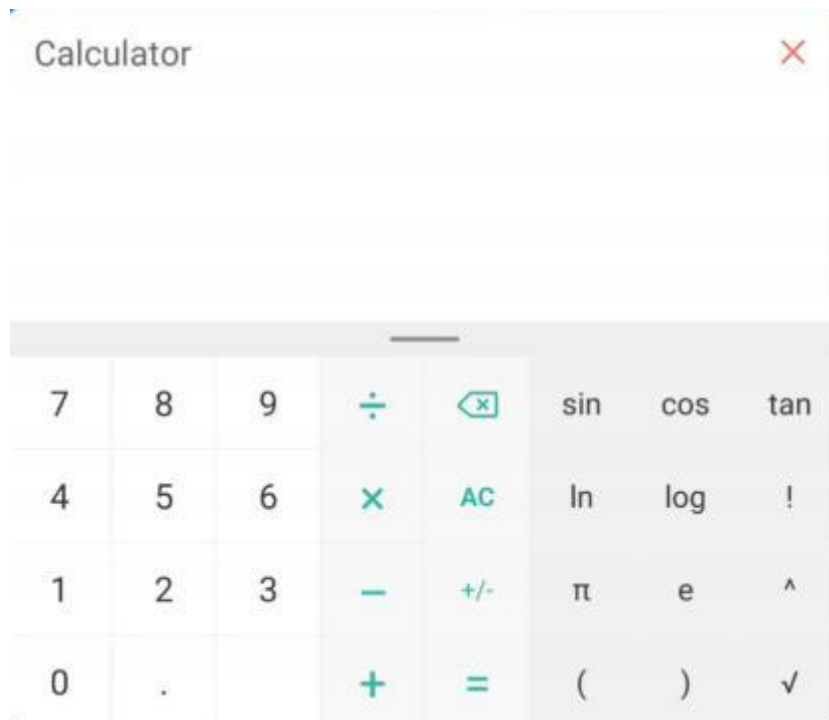

(10) PIP picture in picture



click The icon opens the picture-in-picture function

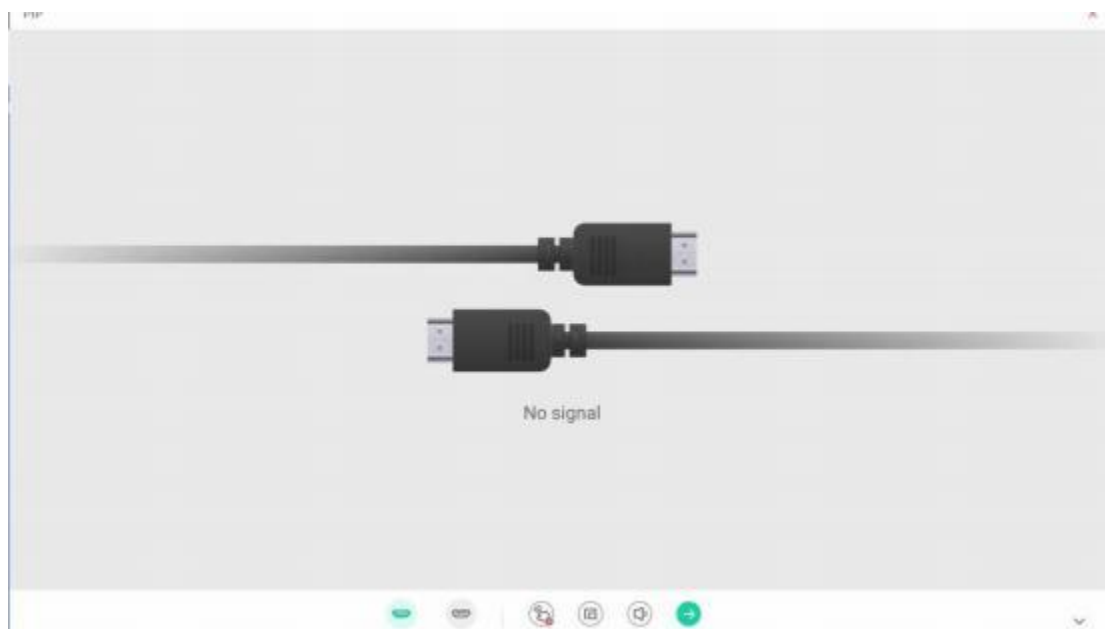

1.3, Status bar

The status bar is in the upper right corner of the main interface. It displays the network status of the current machine, and can also be used as a shortcut to hot spots, Ethernet, wireless network (WIFI), and a screen transfer code. As shown in the figure:

(1) Click : Enter the hotspot Settings interface. This icon can also indicate the status of the hotspot switch, which is currently on.


(2) Click : Enter the Ethernet Settings interface. This icon also indicates the Ethernet connection status, which is currently not connected.

(3) Click : Enter the WIFI Settings interface. This icon also indicates the WIFI connection status, which is not connected at present.


1.4 System Settings

The system Settings mainly include wireless and network, personalization, input and output, system and other functions.


1.4.1, wireless and network

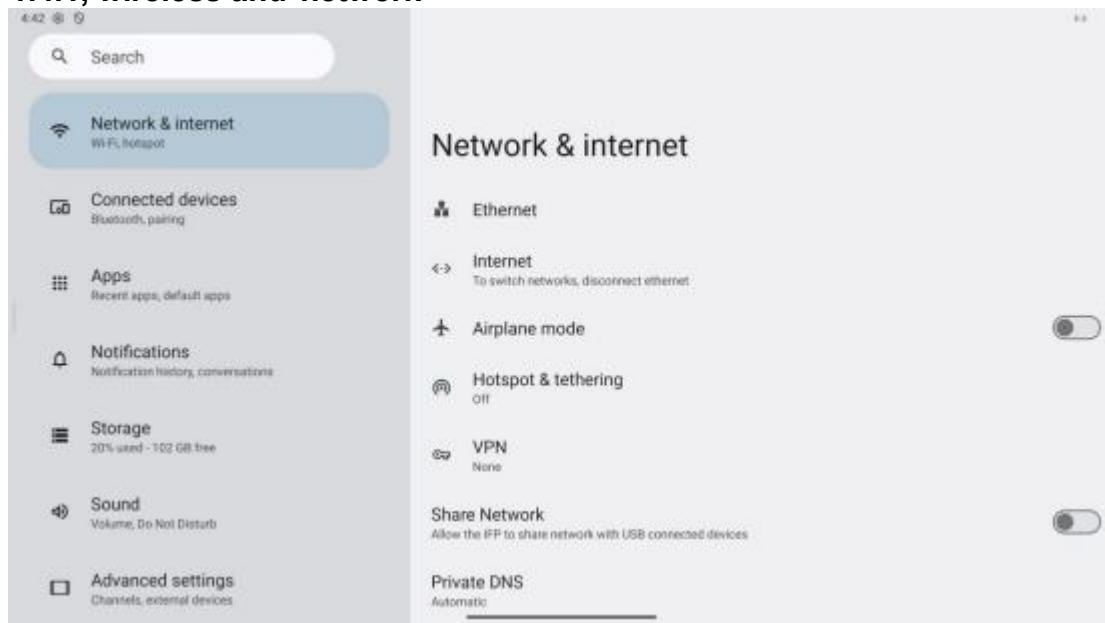


(1) Ethernet: Set the Ethernet function to on or off, you can automatically obtain IP address or manually set IP and gateway and other Ethernet information.

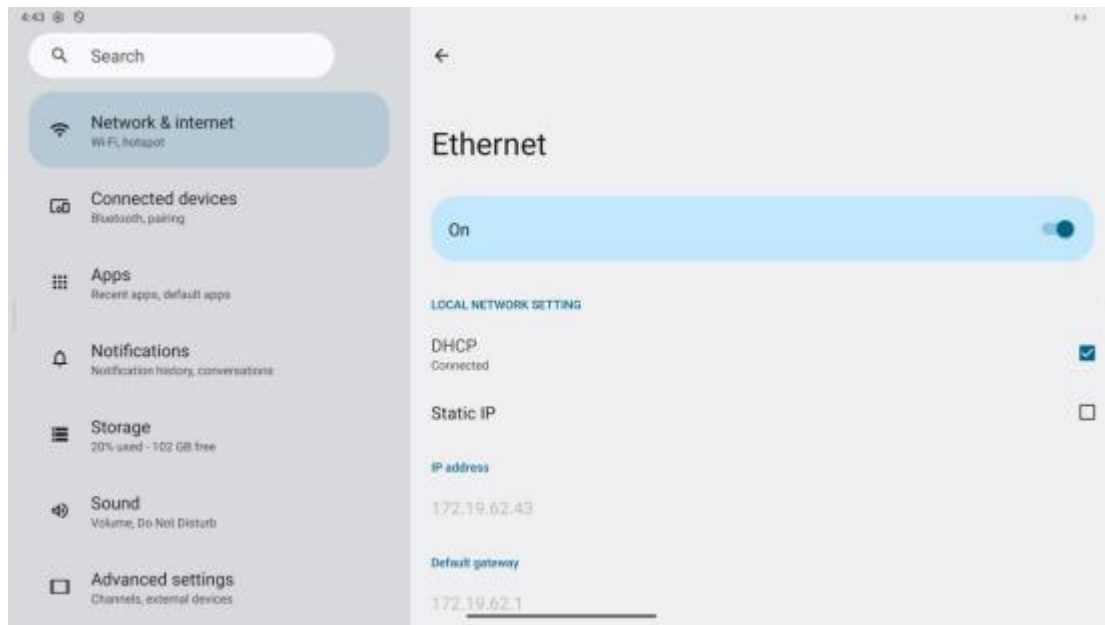


(2) WI-FI: Set the status of WIFI switch. After opening, it can automatically obtain and display the available network.

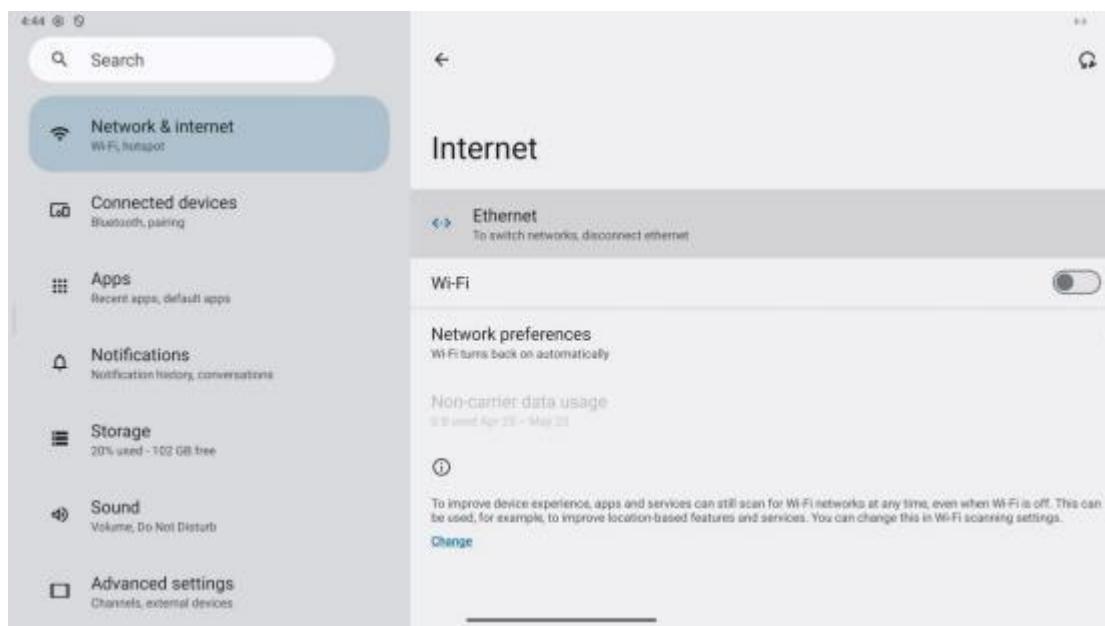


(3) Hotspot: Set the hotspot to open or close, and configure the hotspot name and password.

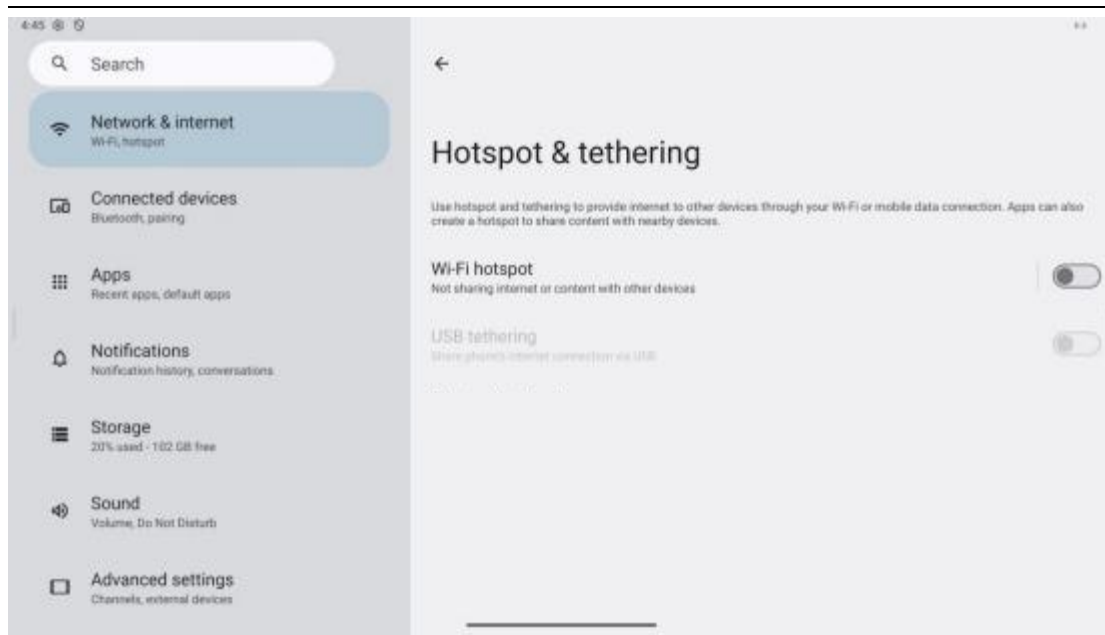

1.4.2 Personalization

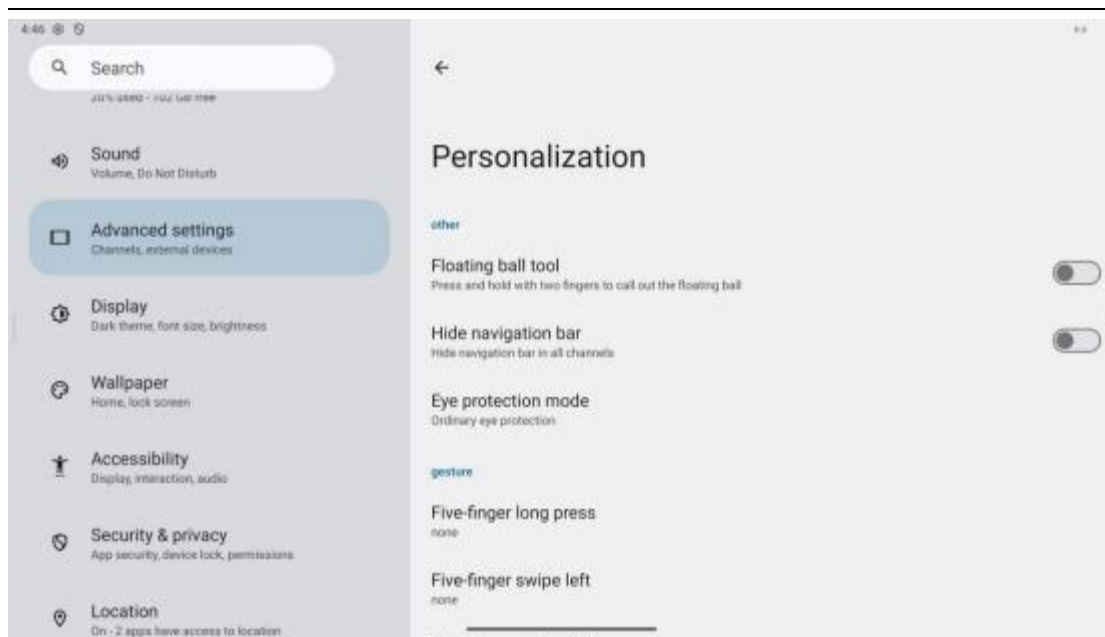


(1) Wallpaper: You can set a static wallpaper and add a custom wallpaper.

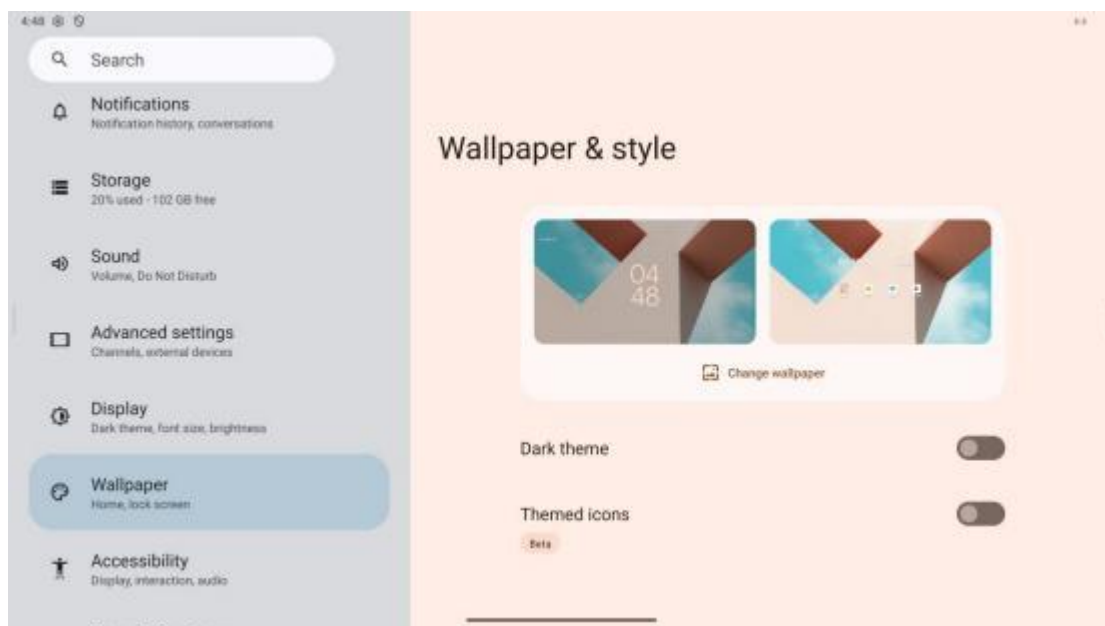


(2) Floating ball tool

Two fingers call up the floating ball, which can be a series of quick operations including home page, return, whiteboard, Settings, etc., or you can customize it as shown in the figure below

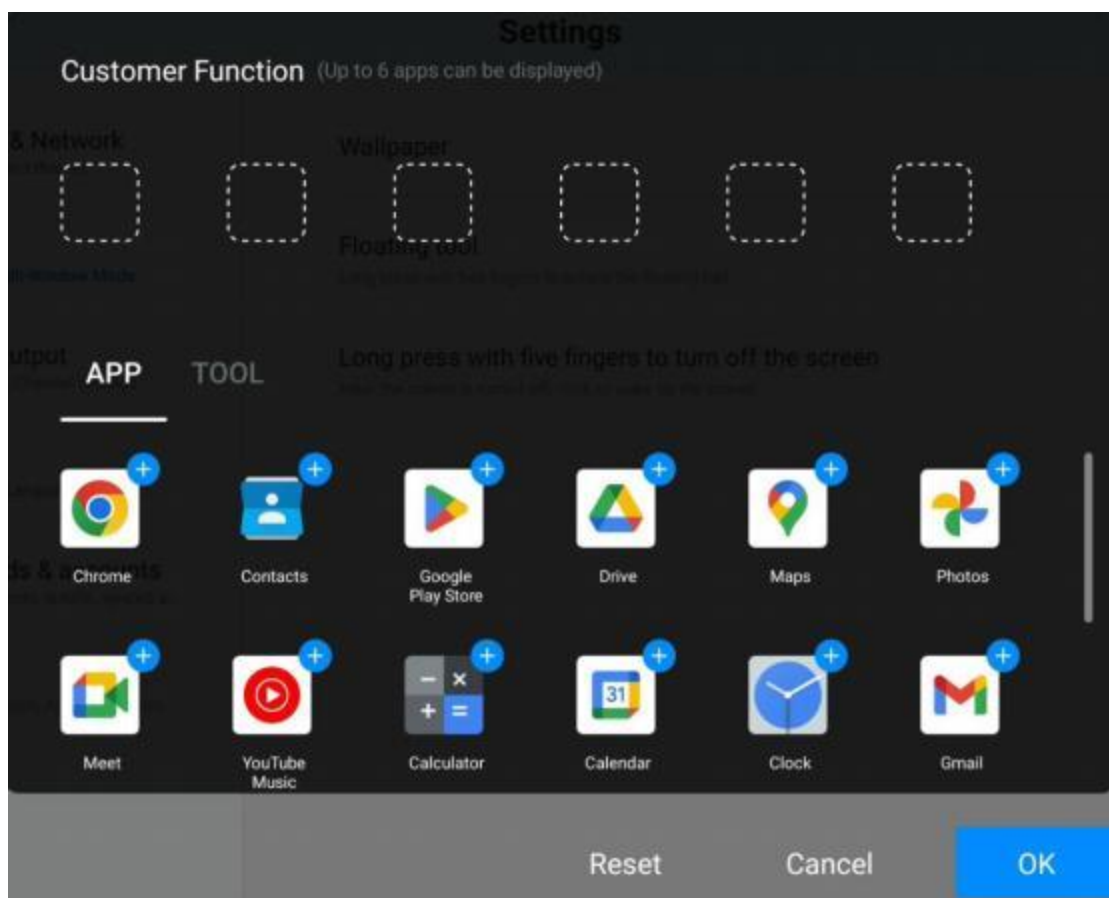


(3) Long press with five fingers to turn off the screen: After setting, long press with five fingers can turn off the screen or wake up the screen.

1.4.3, input and output

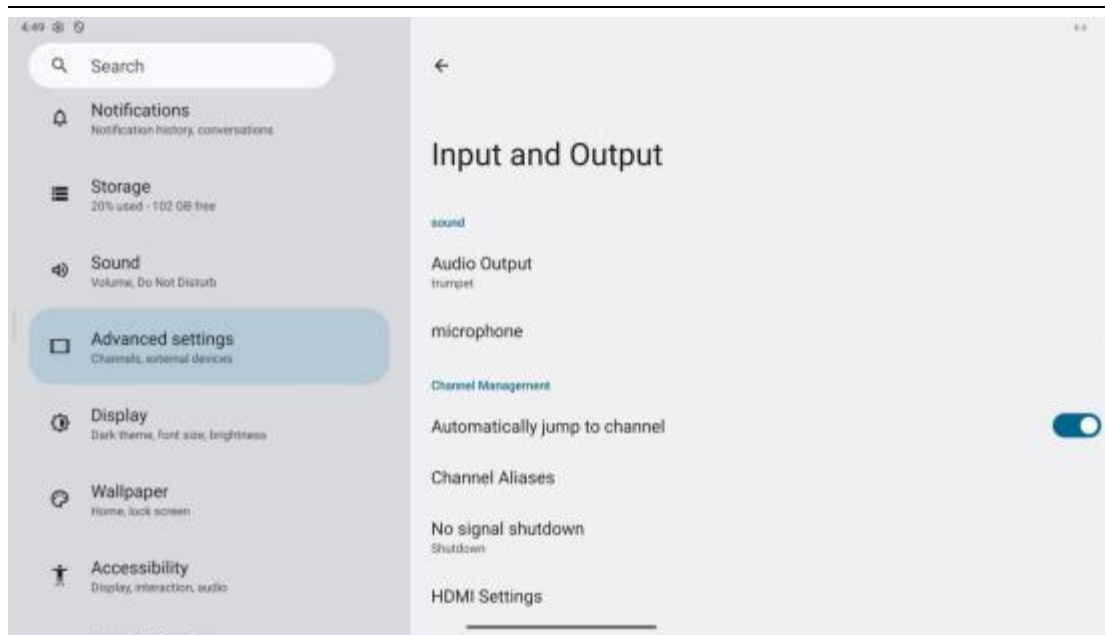


- (1) sound:
 - a. You can turn on or off the touch sound
- (2) device management:
 - a. Turn on or off the USB lock
 - b. microphone
- (3) Input Settings: You can set the alias of input channel

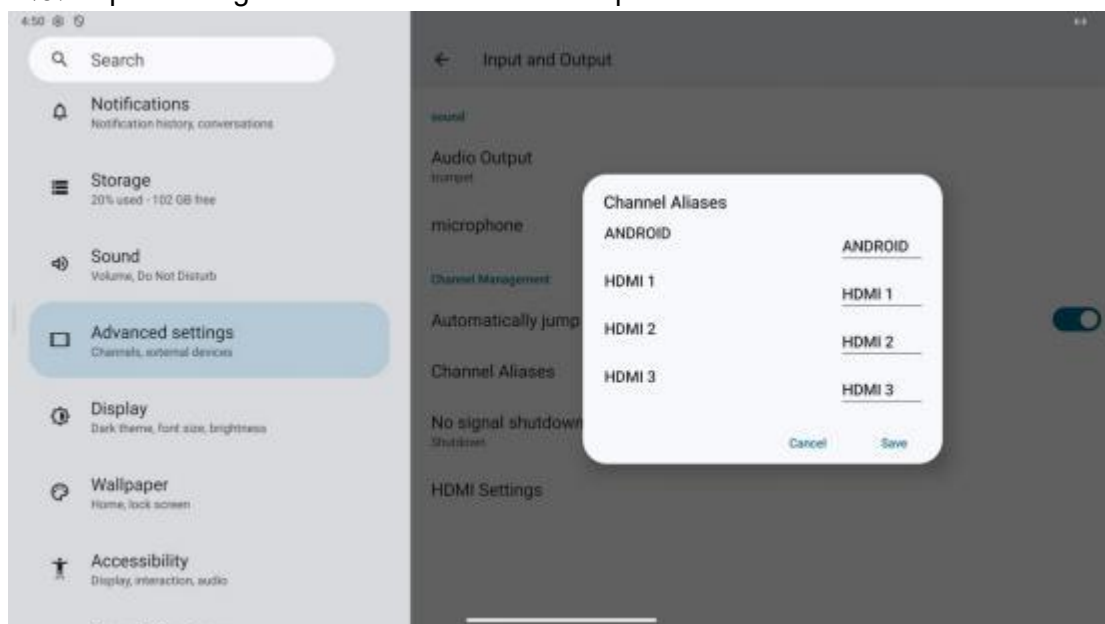


- (4) External signal source display Settings: HDMI OUT Format 1080P_60Hz and 3840 x 2160_60Hz are optional.
- (5) External signal source display Settings: TYPEC OUT Format 1080P_60Hz and 3840 x 2160_60Hz are optional.


1.4.4 System

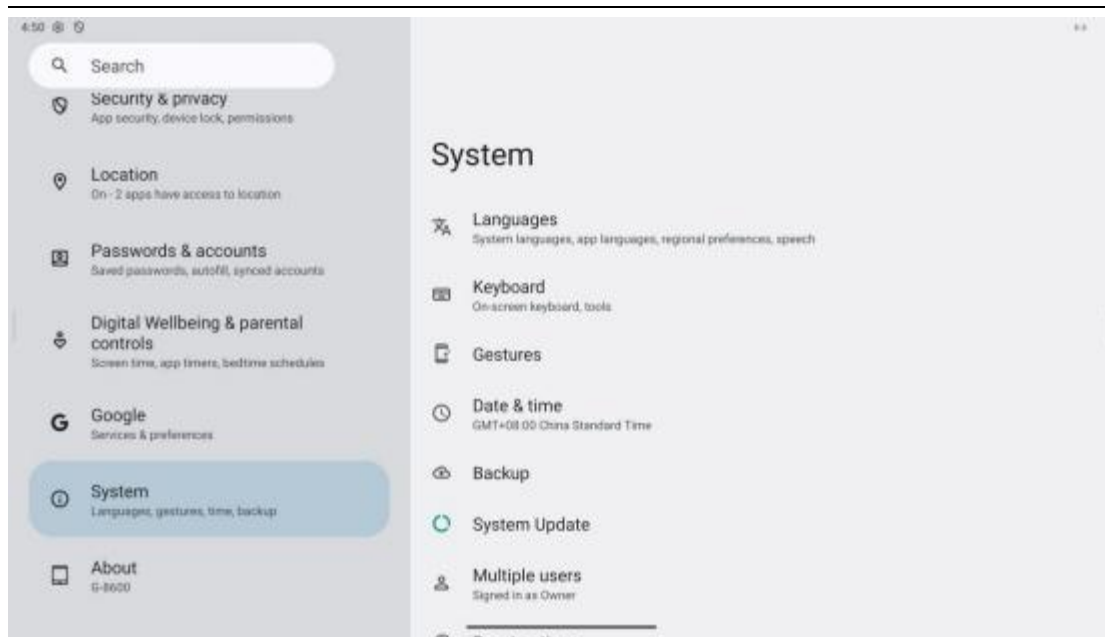


(1) Date and time: optional 12/24 hour system, optional to use network time, date format and time zone can be set.

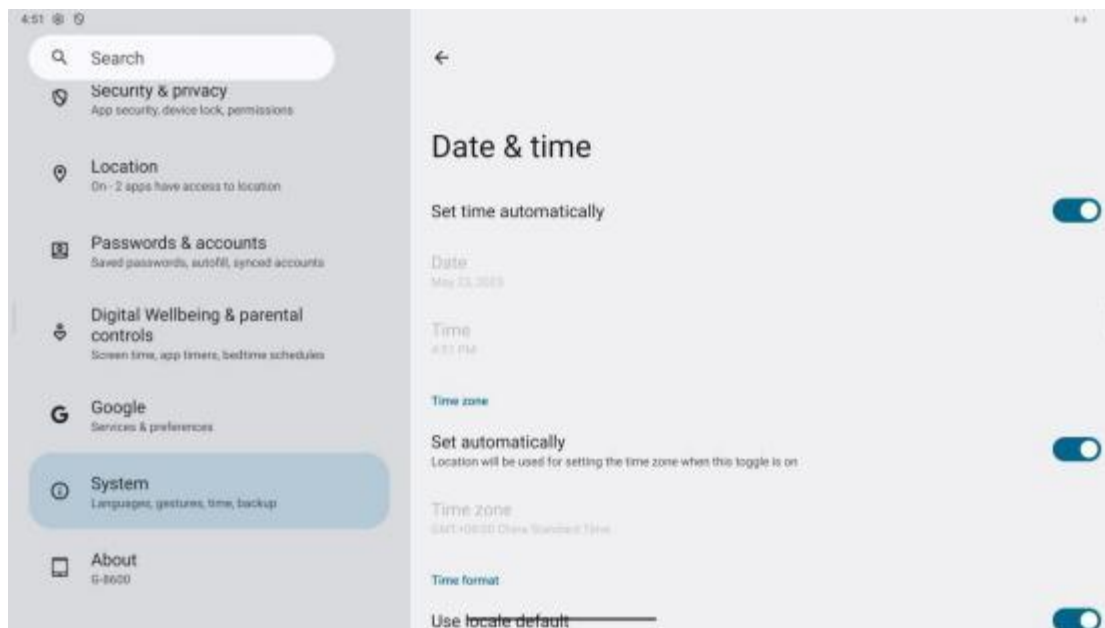


(2) Language and keyboard: set the system language, switch input method, virtual keyboard physical keyboard options.

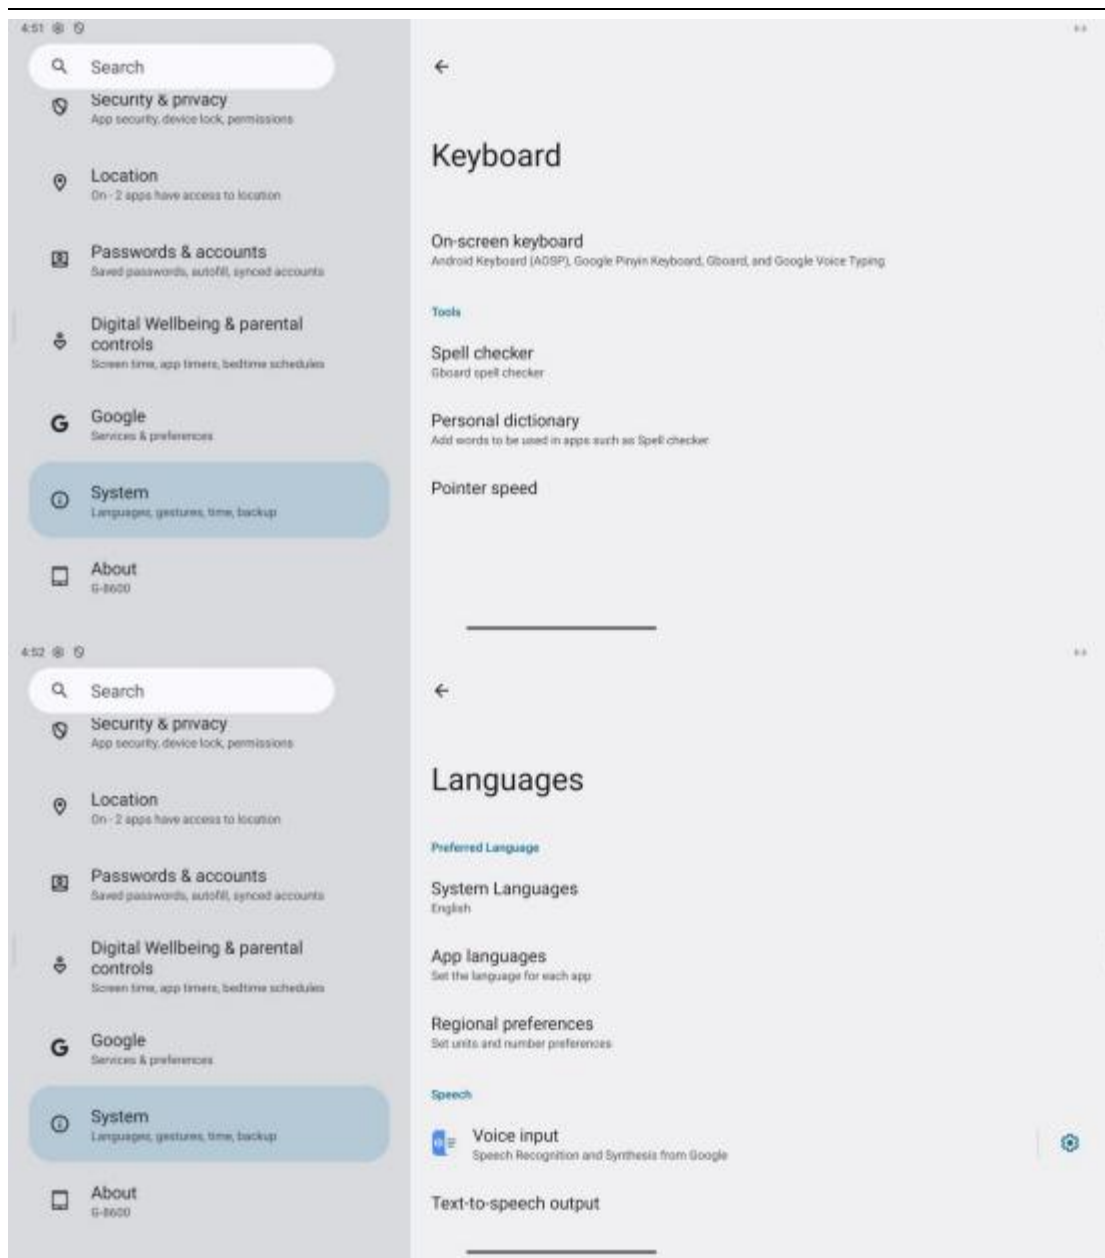

(3) Storage: View internal storage usage, as well as running memory usage.

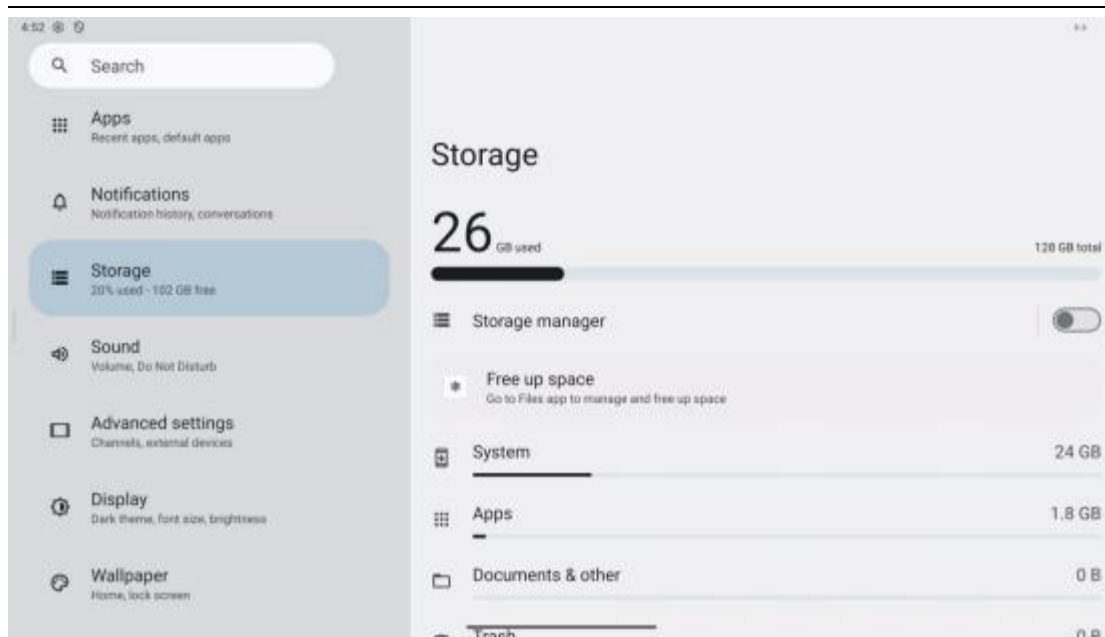


(4) Power on and off: power on channel, scheduled power on/off plan, shutdown message, screen saver time sleep time, screen saver display.

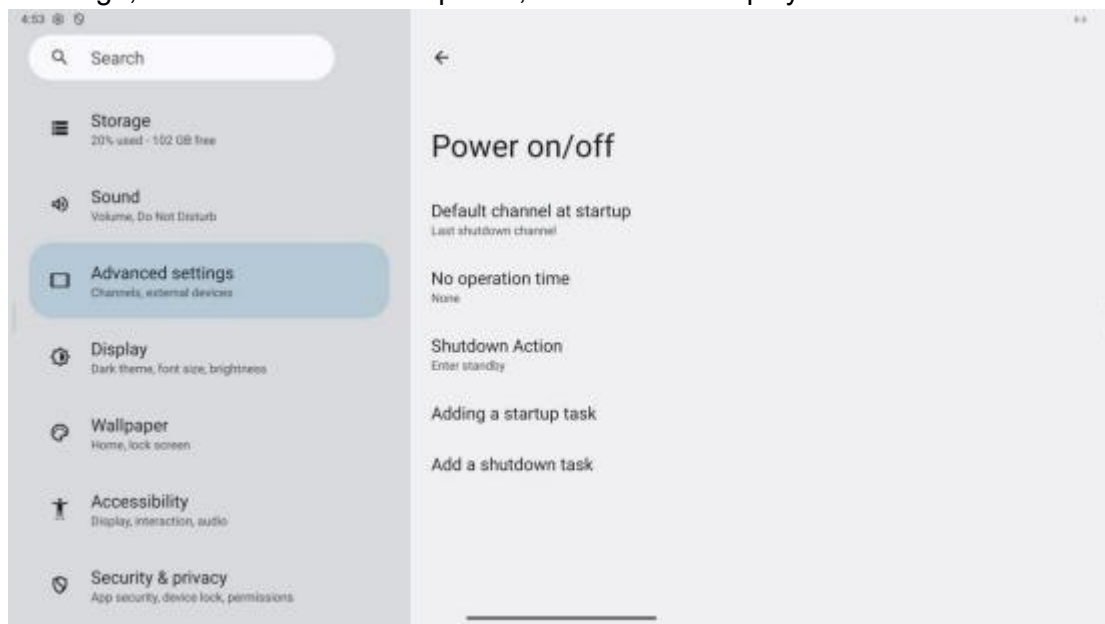

(5) System upgrade: can detect the latest upgrade package for upgrade.


(6) Restore factory Settings: The data will be cleared and then restored to factory Settings.

1.4.6 Safety Options

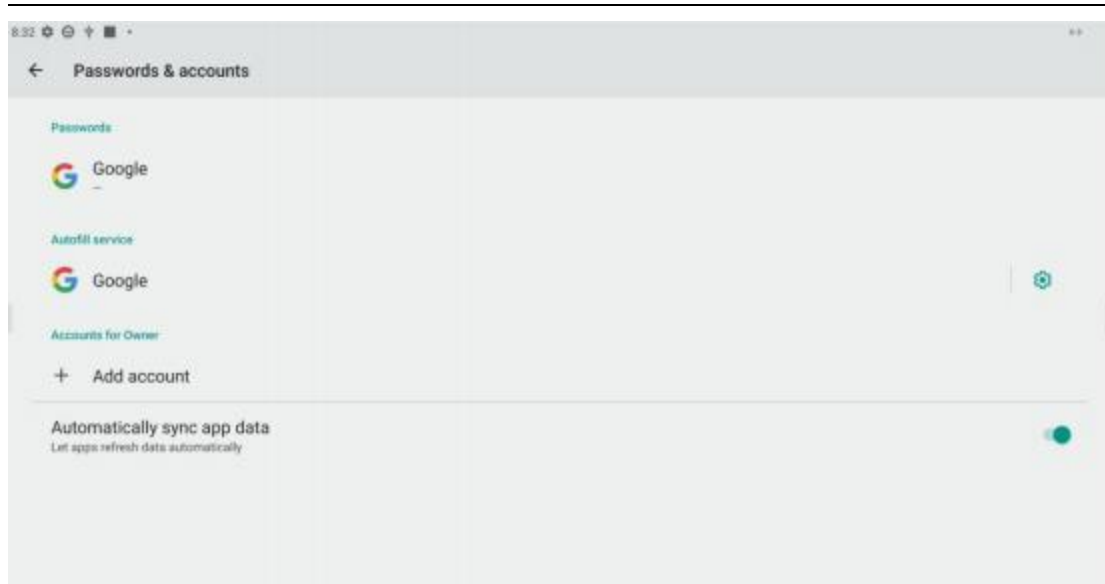

1. Google account, you need to log in before you can set it up.

1.4.6 About

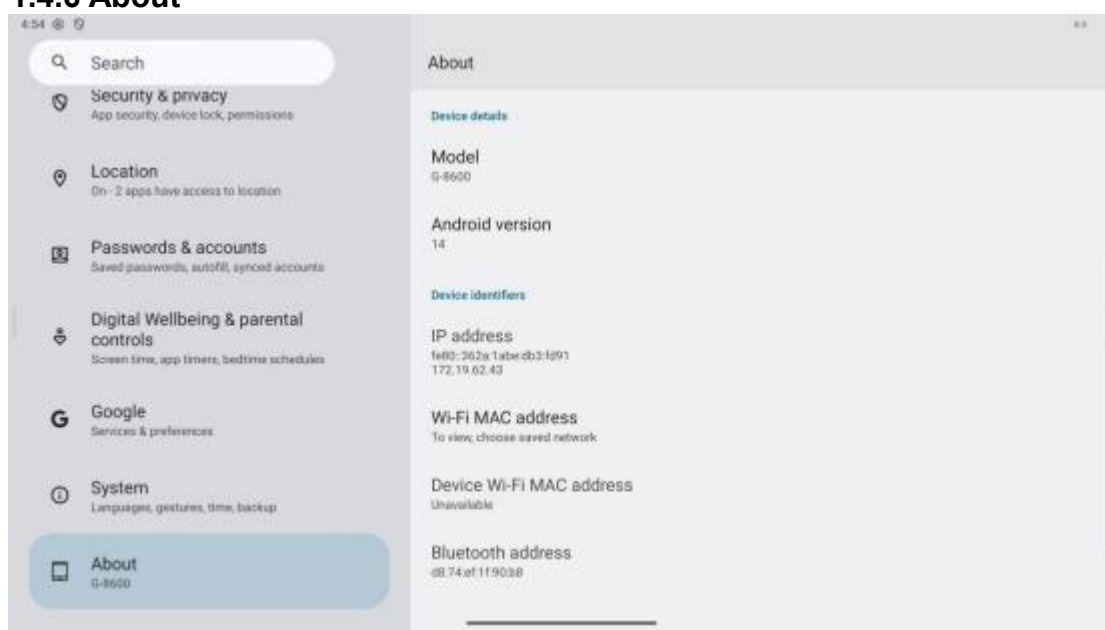

I. Software description

2.1 Write on the whiteboard


2.1.1 Interface display

Click the whiteboard writing icon on the main screen




To start the

whiteboard software, select the default brush tool in the whiteboard and write directly.

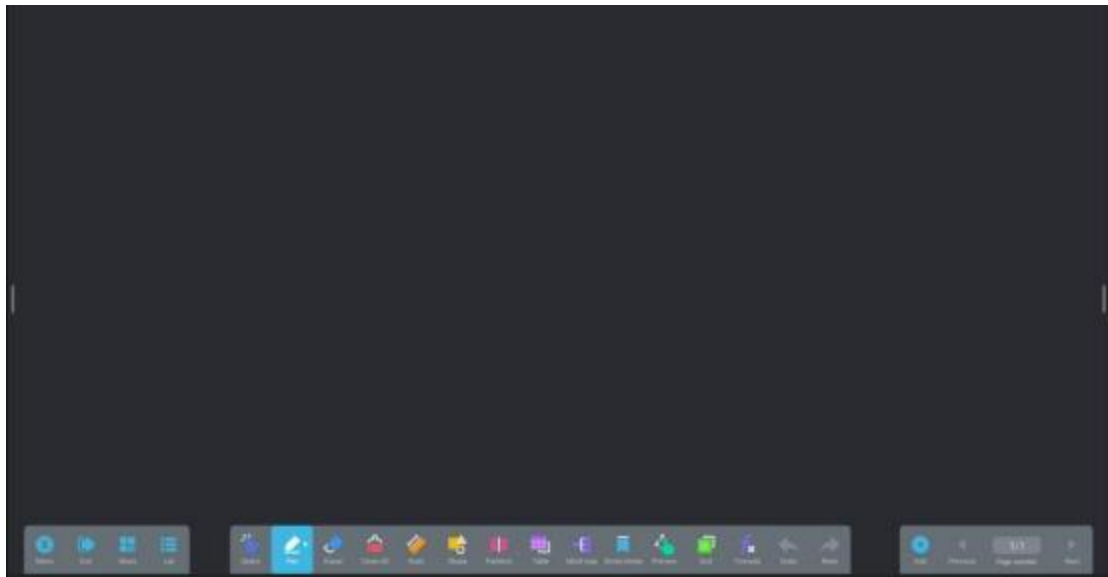


2.1.2 Menu

Click the lower left corner of the interface  The icon pops up and displays the lower content menu:

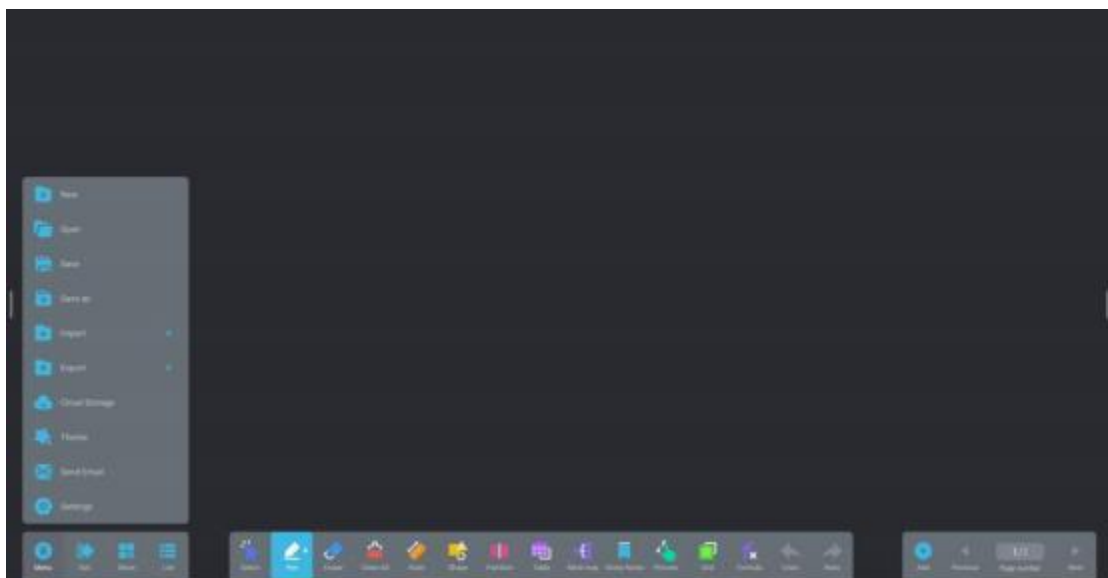


Menu content function description:

- (1) New: Click  Icon: Create a new whiteboard interface. When the previous interface is not saved, it will prompt whether to save or not. The newly created interface can perform editing, saving and other operations.
- (2) Open: Click  Icon: Open and save the file in the whiteboard file directory, click the file to open directly, and can carry out functions such as editing and saving again.

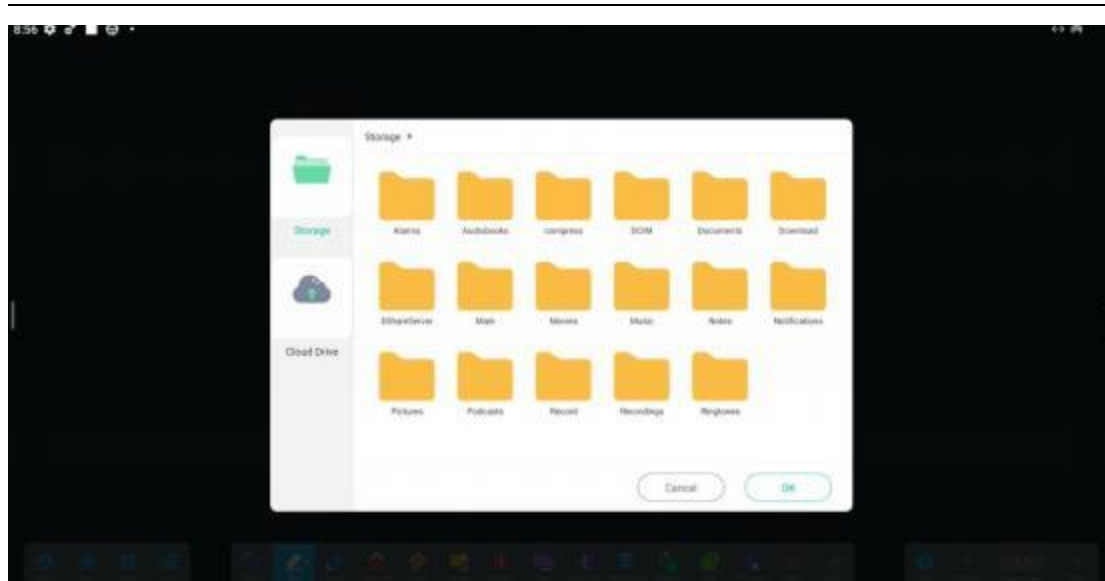



(3) Save: Click  Save icon, save the current writing content. The default time is named and saved. Users can customize the name and save. Users can choose to save the whiteboard file in built-in storage or U disk.

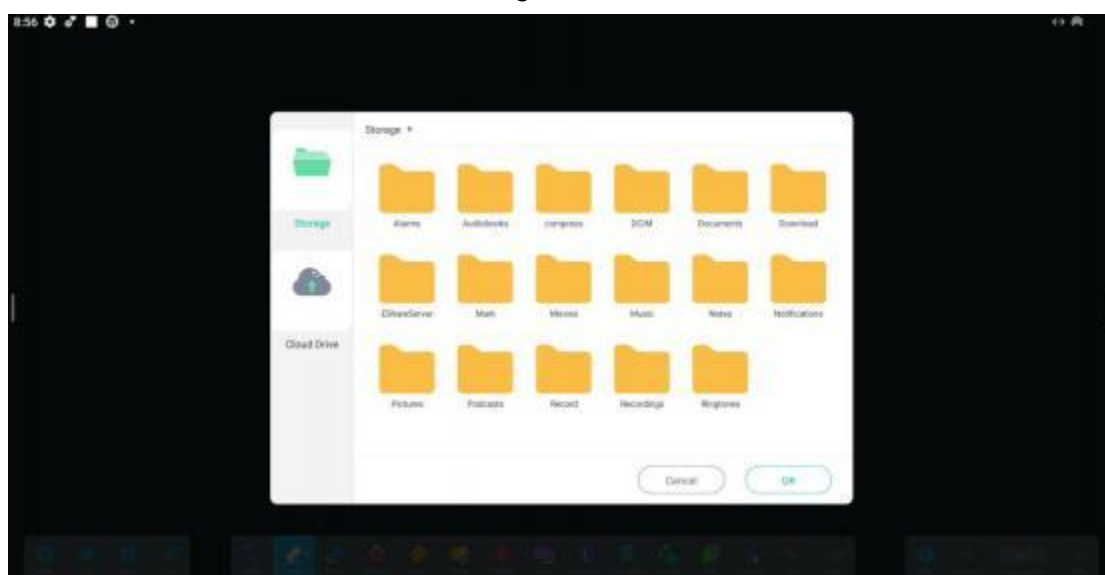


(4) Save as: Click  Save as icon, which is similar to the save function, just saves to another file.

(5) Import: Click  Import icon, select the file format to import, then select the path of the file to import, and confirm the import.

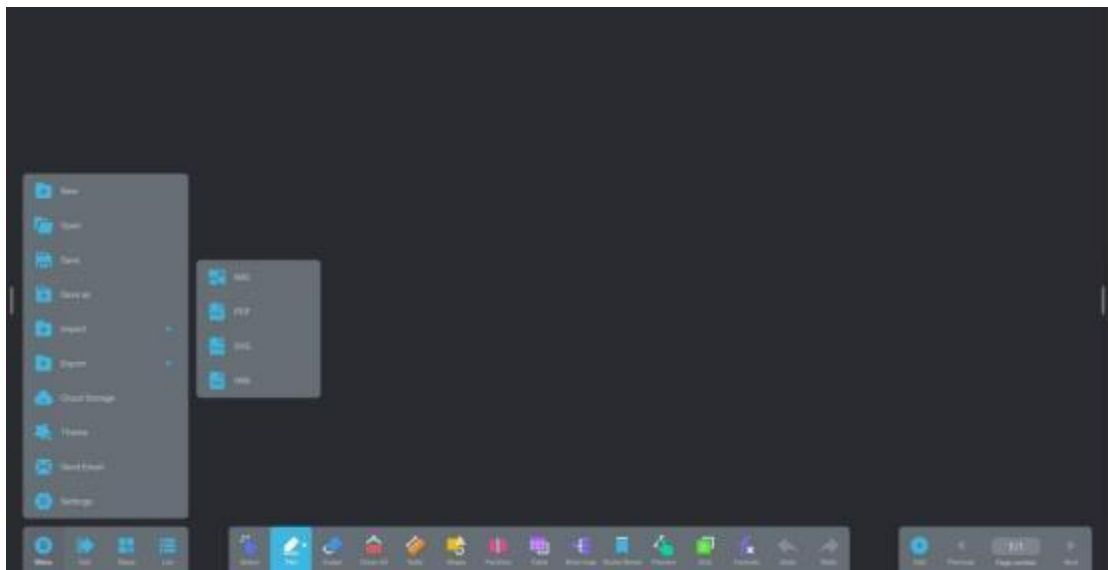


(6) Export: Click  Icon, select the file format you want to export, and then select the path where the exported file will be saved. You can customize the name and save it.

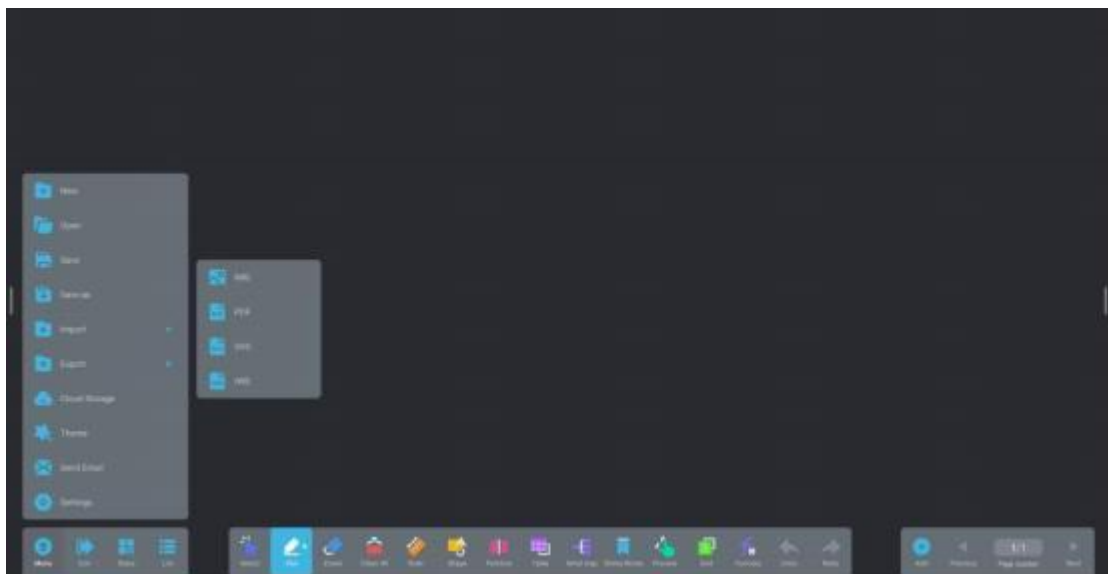


(7) Cloud disk: Click  Icon, select the type of cloud disk to use, and you can upload it to the cloud disk after login.




(8) Theme: Click  Theme. The icon can set the template and background, as shown in the figure:

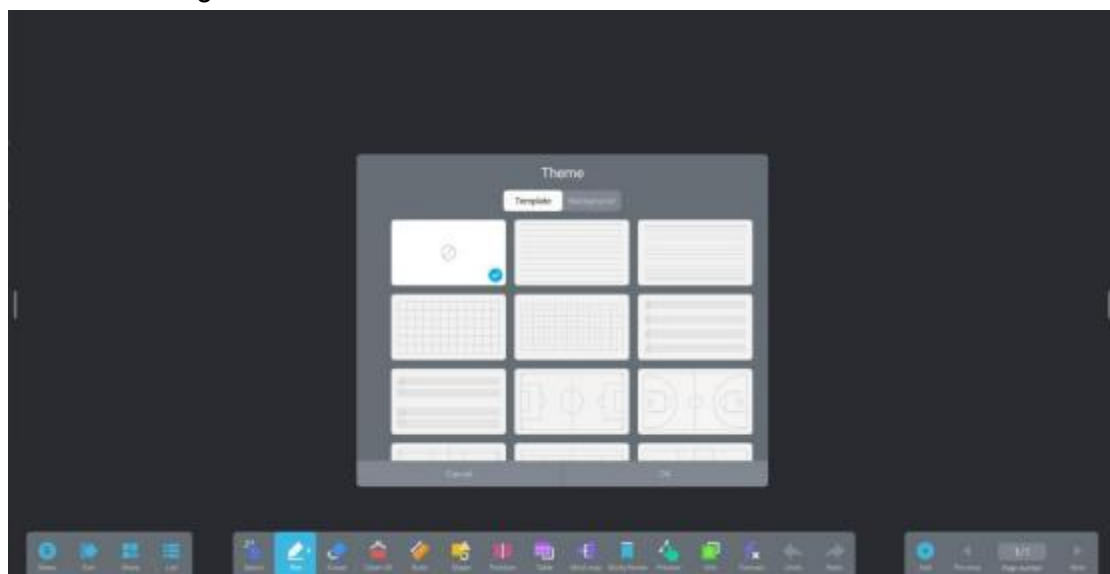


(9) Send email: Click  Send Email. The icon will save the current whiteboard content and send it by email. You need to set the administrator user email address.

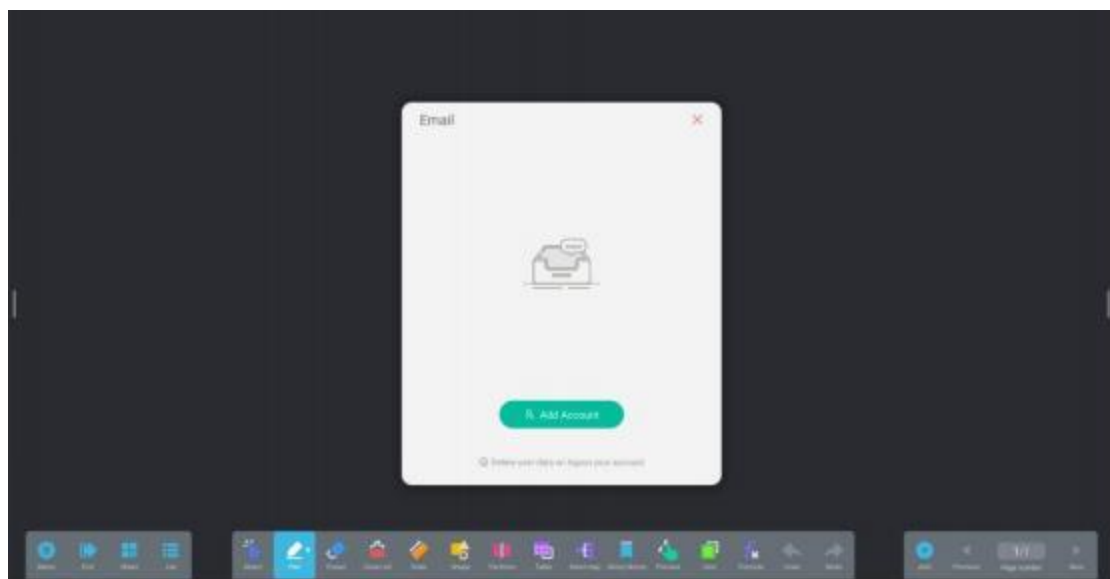

(10) Settings: Click  Settings. The icon allows you to set the eraser mode, enable multi-finger writing, and enable automatic brightness adjustment and custom toolbar.

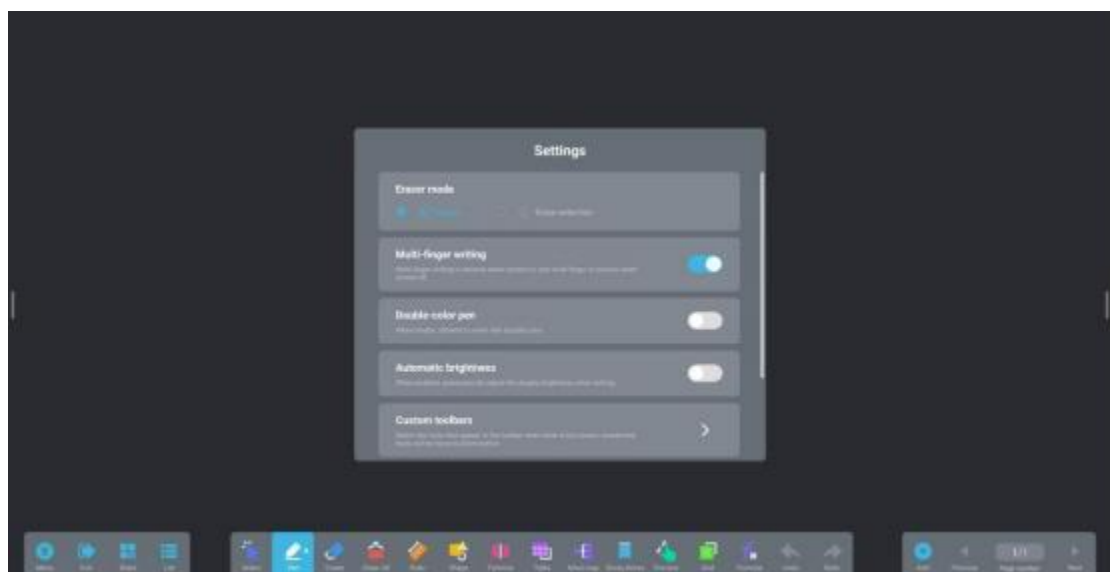

Custom toolbar: In addition to some tools being locked in the toolbar, you can set whether other tools are displayed in the toolbar.

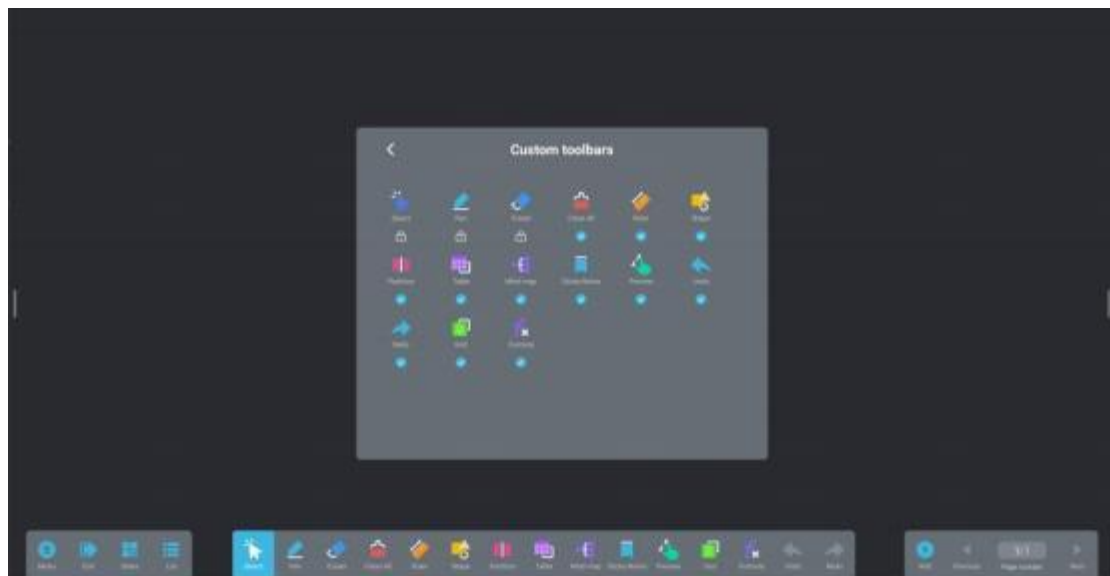

(11) Exit: Click  After the icon, the whiteboard application will be exited. If there is unsaved content, it will ask whether to save it, and then directly return to the main interface.



(12) Share: Click  After the icon, the current whiteboard content will be exported and a QR code will be generated. By scanning the code, the whiteboard file can be downloaded. Users can share the QR code to share the whiteboard file. This function requires Internet connection.



(13) List: Click the icon to enter the file list. In the current interface, you can create a new file, rename an existing file, view the path and delete the file.




2.1.3 Basic operations


In addition to basic functions such as selection, writing, erasing and page management, the whiteboard also has auxiliary widgets such as ruler, graphics, tables, mind maps, notes, roaming, and four-line grids.

(1) Choice



click. The icon can be moved, colored, beautified, searched, flipped, placed on top, deleted, cloned, rotated and zoomed in the selected mode from the writing mode to the selection mode.

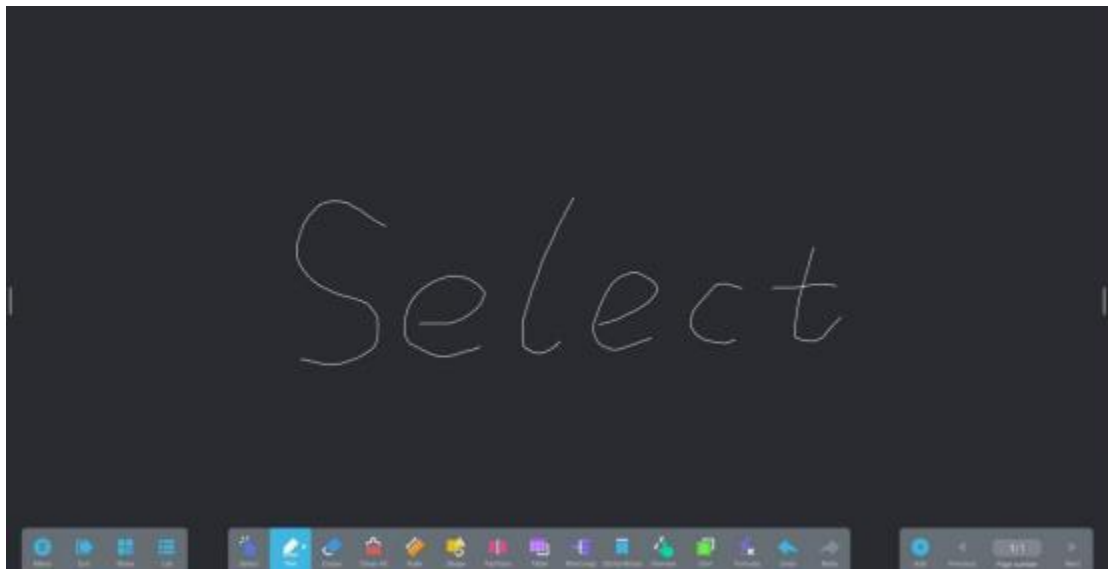

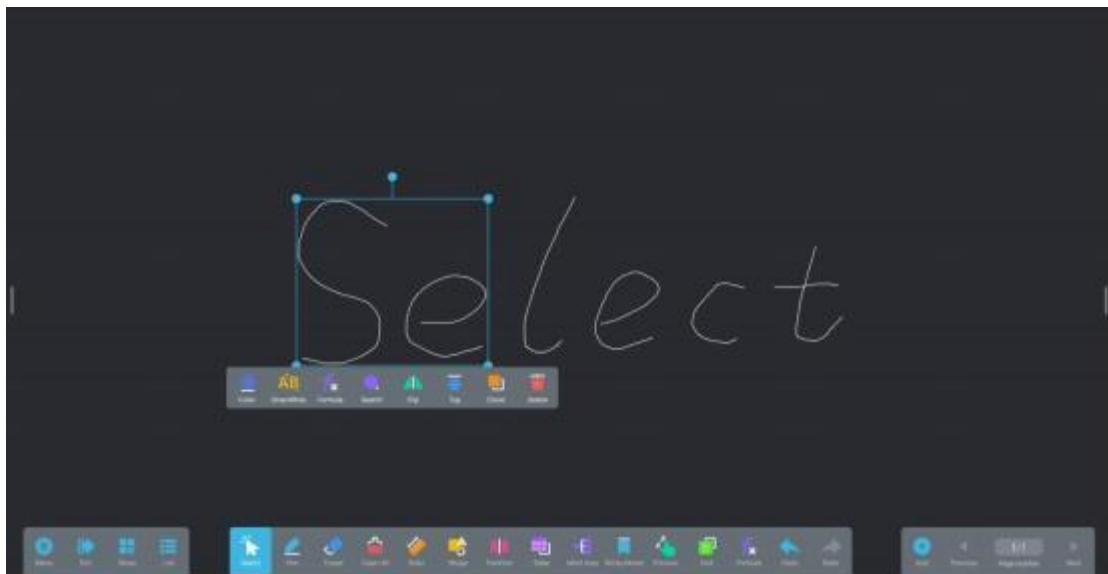

(2) write




click  icon, enter the writing mode, which is also the default mode after the application is opened. Click again to select the pen type, color and thickness  The icon opens the palette to customize the brush color.



(3) rubber



click  The icon enters the eraser mode, and the writing content can be erased by touching. Click the icon again to adjust the size of the eraser range.

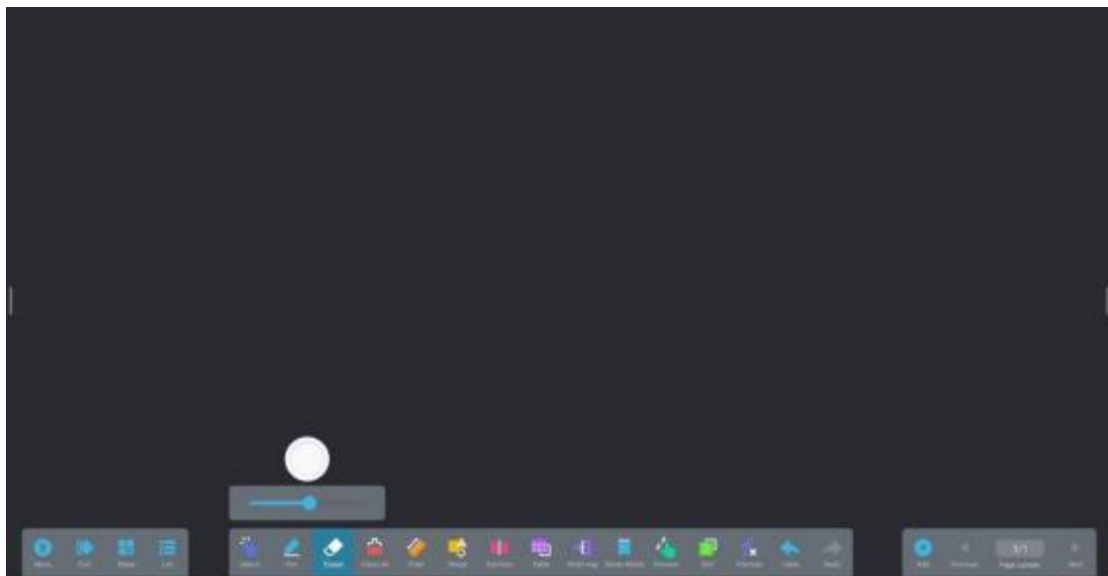

(4) clean up




click icon, completely erase the writing content and shape of the current




page. If you want to restore the erased content, click The icon is removed by clicking.

(5) rule



click icon, you can choose the type of long ruler, right triangle ruler and protractor. The scale edge of the ruler can draw a straight line and show the length, and the protractor can measure angles and draw any Angle.

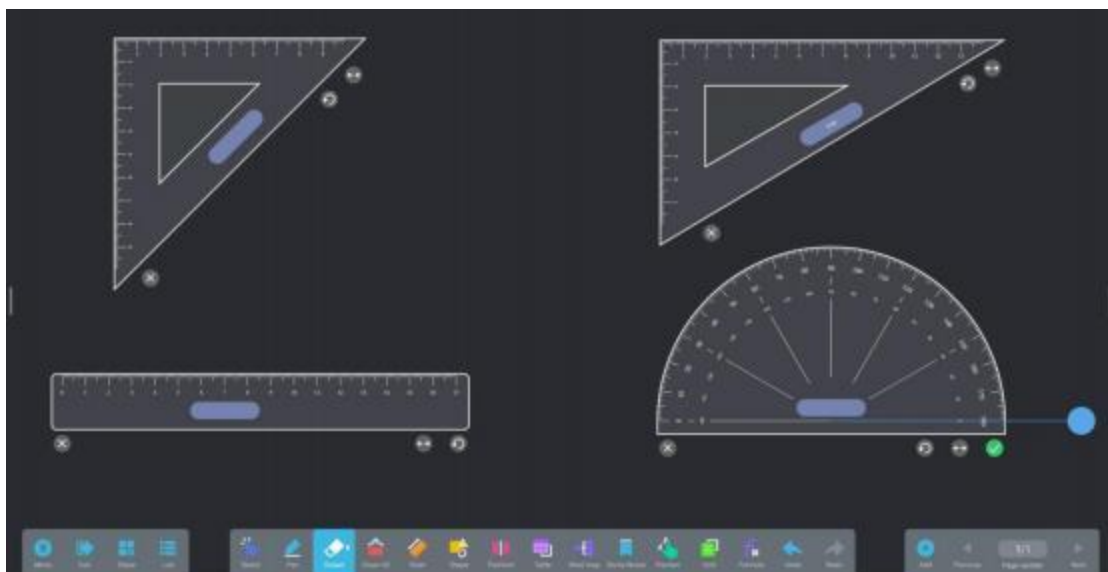


(6) figure



click The icon can draw standard graphics by touching and dragging on the whiteboard interface. Click again to select the shape of the graphics, switch between planar graphics and three-dimensional graphics, and customize the color.



Click The icon can be intelligently beautified according to the rough shape you draw, and become a regular shape.

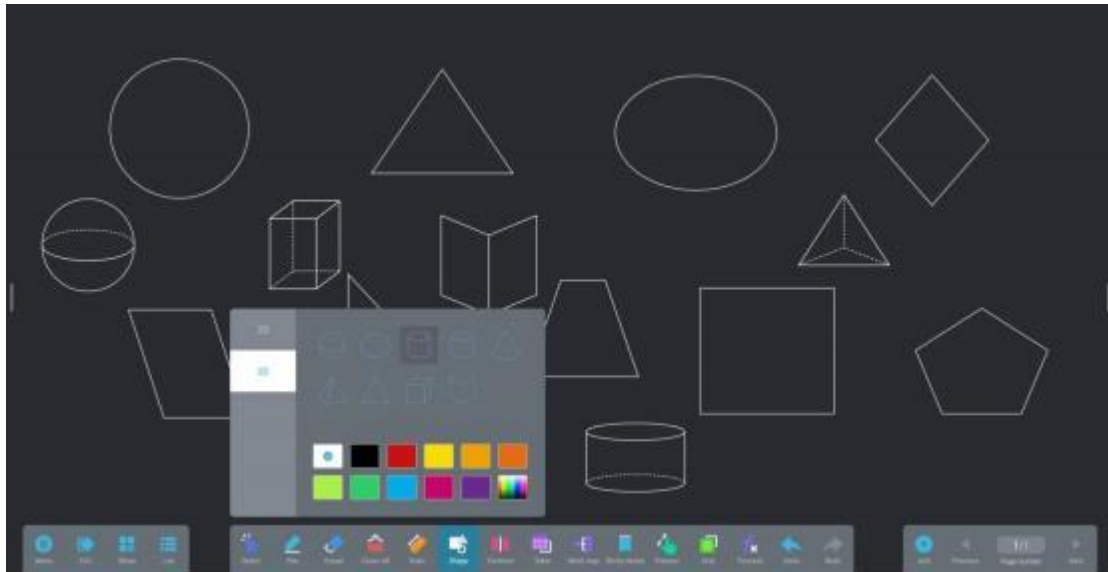

(7) table





click Icon, touch and drag to select the size of the table,




click Insert icon into table.




click The icon enters the selection mode to drag and edit the table.

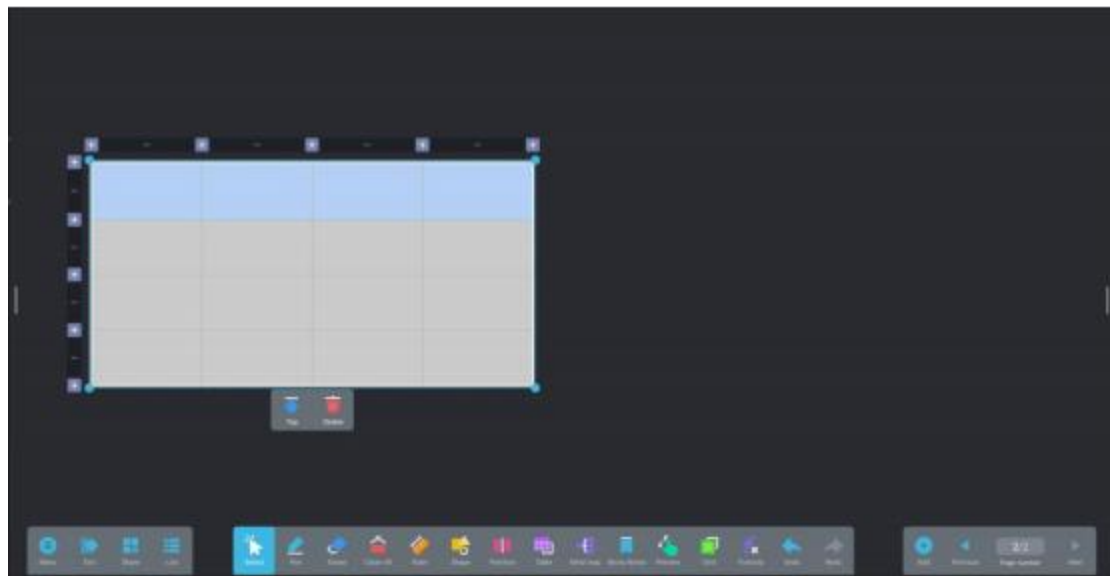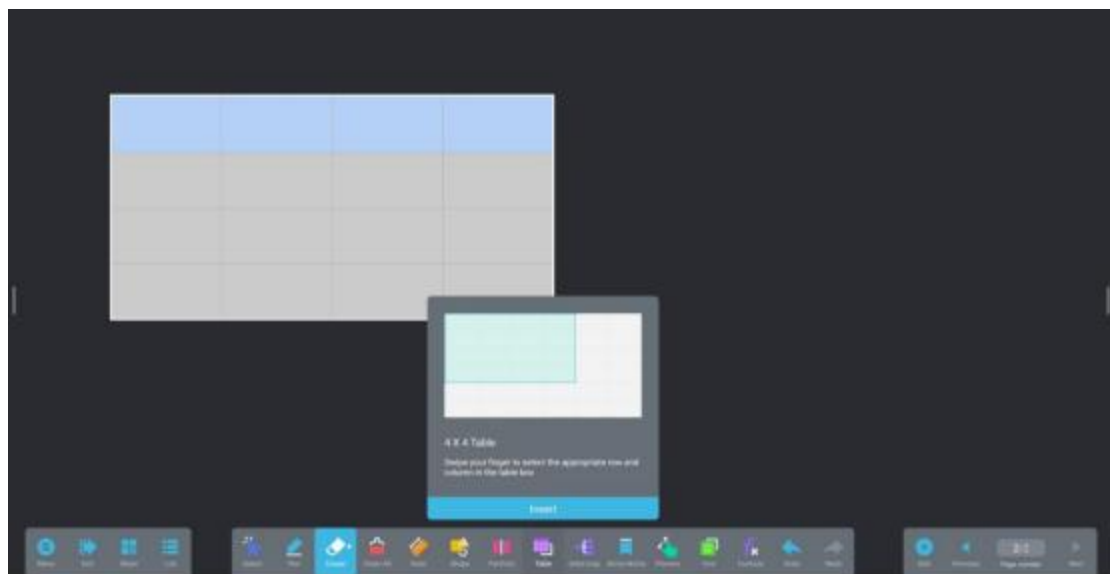

(8) mind map




click  The icon will insert an initial mind map on the current page, and you can edit it by clicking on the nodes to form a mind map.



click  You can add a child node in the direction of the current node and




click  A deletion query will be deleted and the current node can be deleted by confirmation.

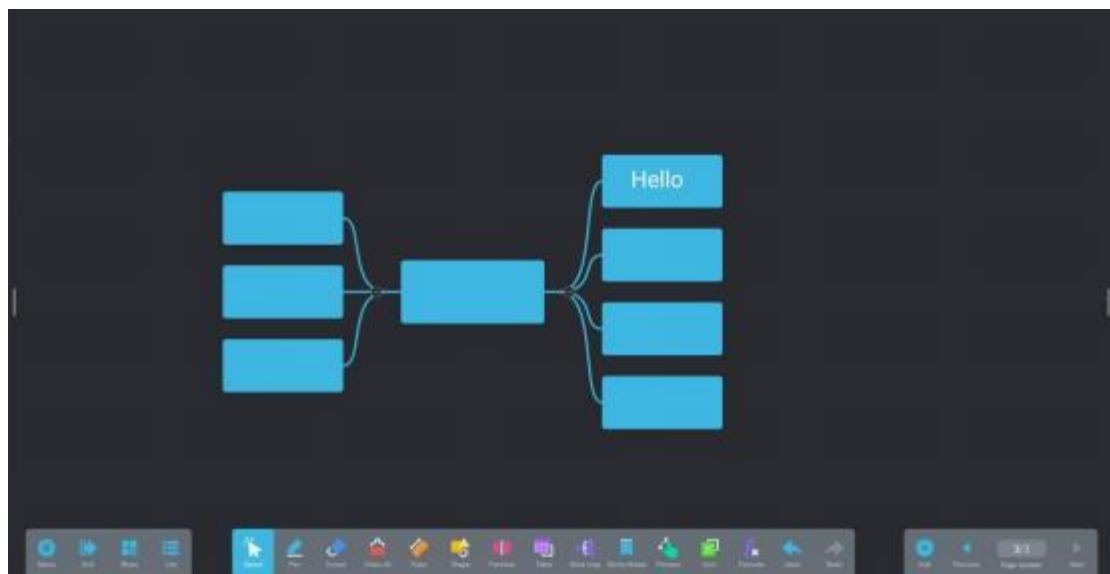

(9) note

click  icon, enter the note editor, enter the note content through the soft

keyboard, side  You can select the color of the note and click  You can successfully add a note.





(10) go on a pleasure trip




click The icon enters the roaming mode, and the whole page (the whole) can be zoomed in and out by multi-finger touch to facilitate browsing.

(11) Four-line grid



click The icon is inserted into the four-line grid, and the text is automatically beautified when written within the four-line grid. Only English beautification is supported.

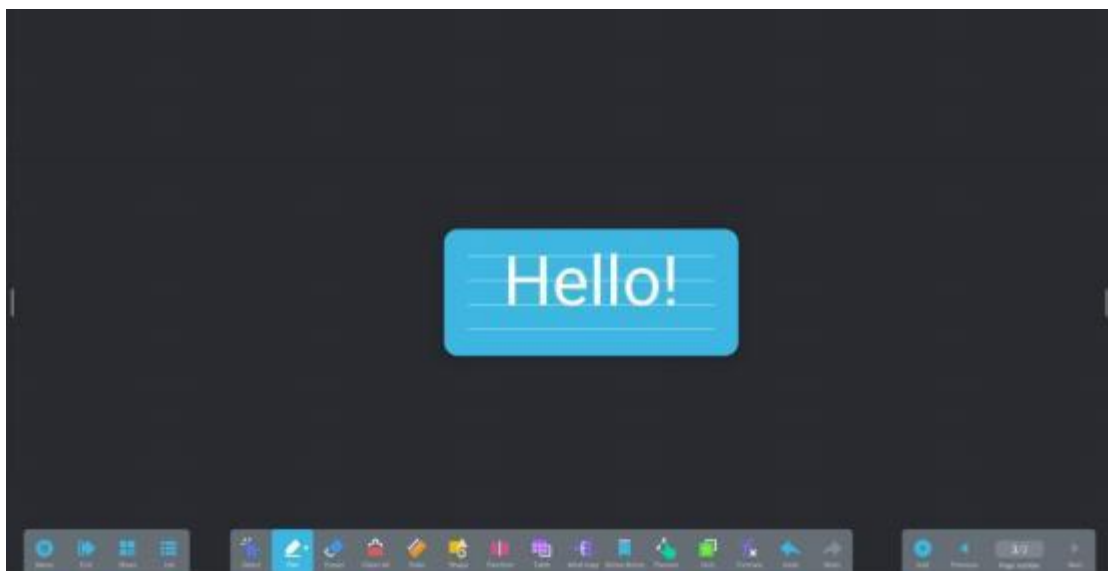

(12) Withdrawal and restoration



click. The icon can undo the operation before it is saved. It can be undone



several times. When you want to revert the undo, you can click it. The icon restores the undo operation, similarly, can be restored many times.

(13) Add pages




When we want to add a new page, click. The icon adds a new page and cuts the current interface to the new page.


(14) Page selection




When there are multiple pages, you can click. And. The icon can be



used to switch pages, or you can click it. View thumbnails of all pages and select a thumbnail to switch or delete.

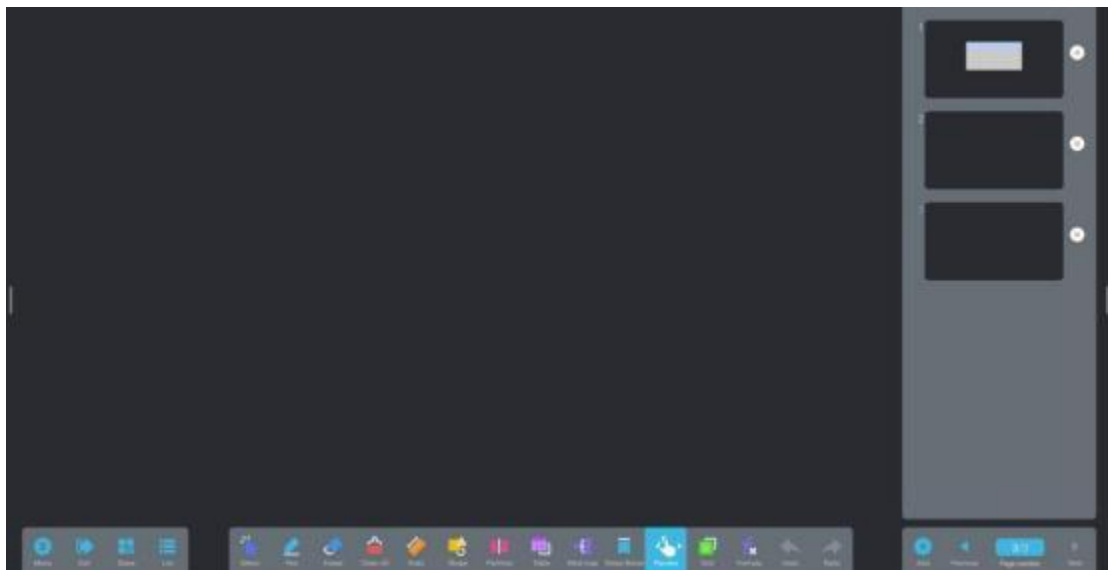

(15) Multiple writing

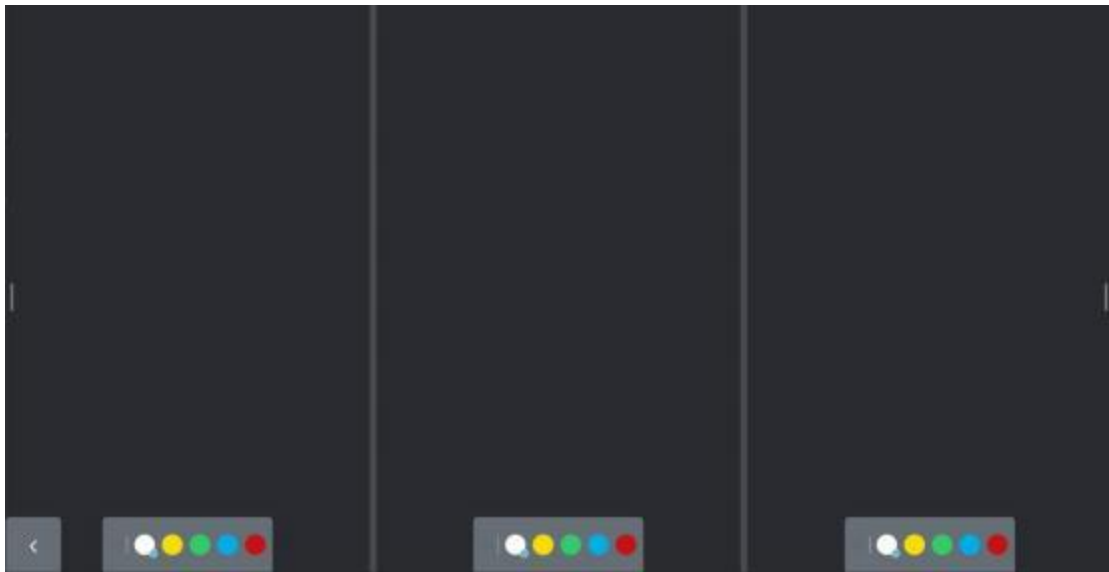


2.2 File browsing

2.2.1 Interface Introduction




click The icon enters the file browsing application, and the local files and cloud hard disk are displayed on the left side of the file browser.

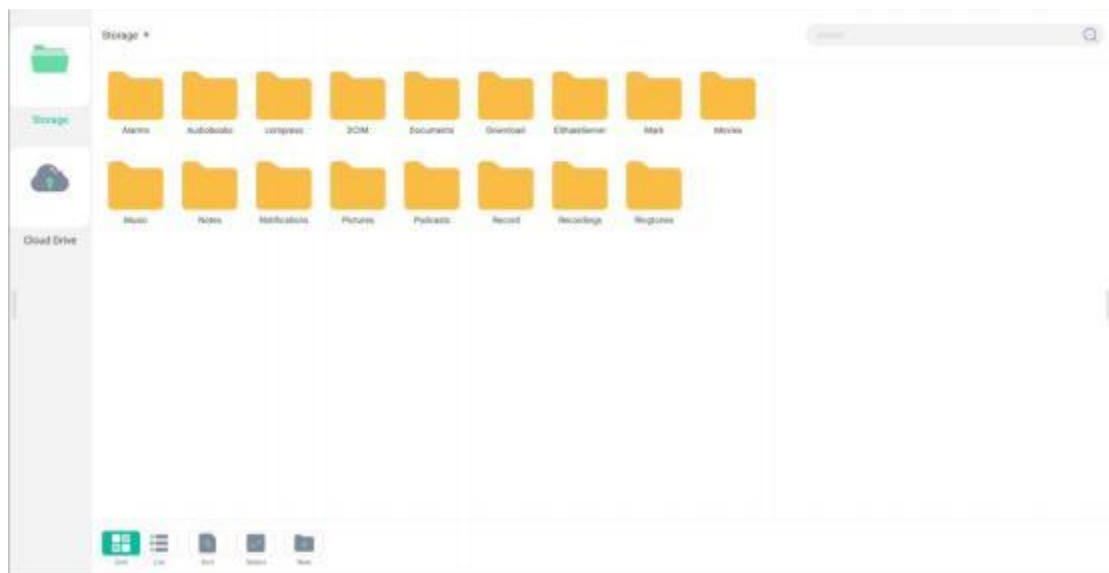


2.2.2 Display mode


(1) Sorting:

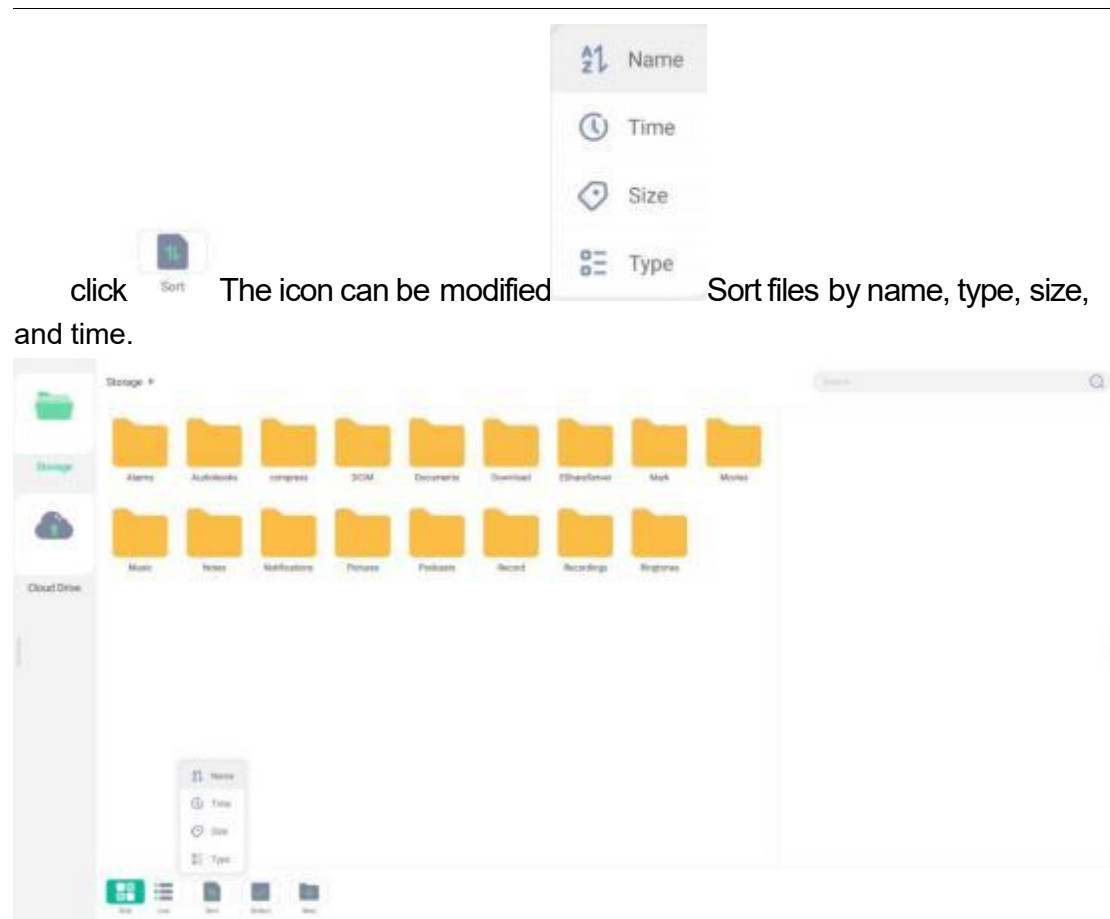

(3) Display format:

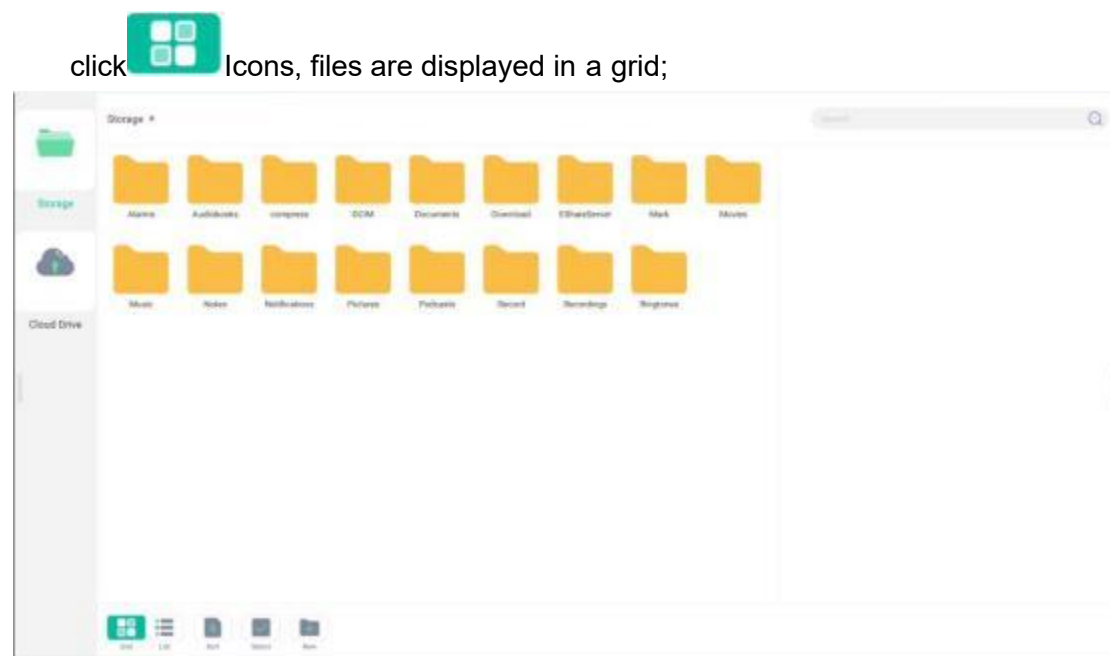


click List Icons, files are displayed in list form.

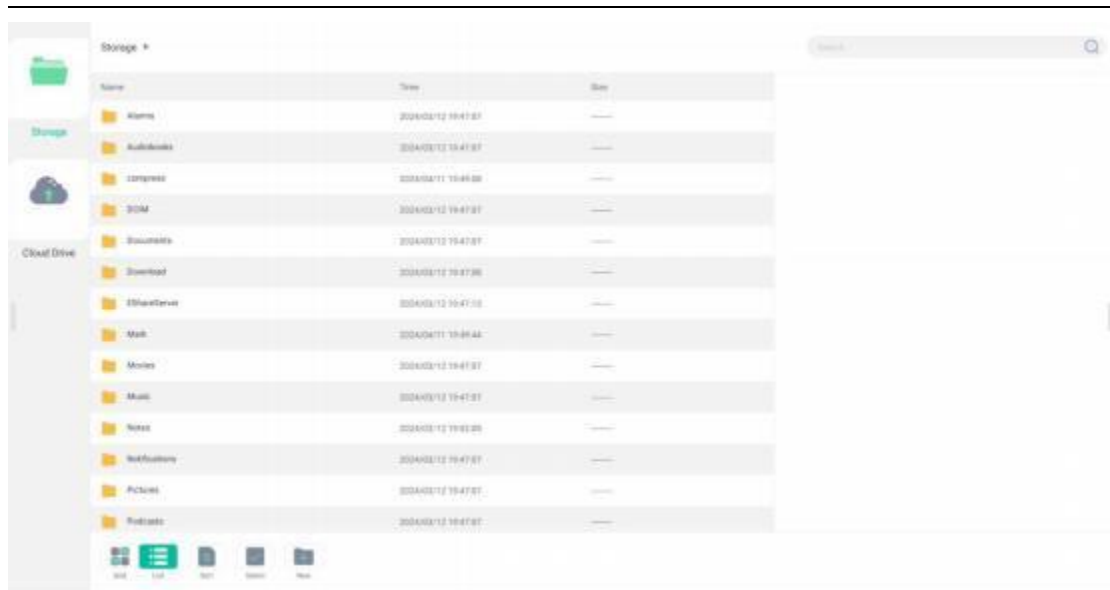

2.2.3 Toolbar


(1) Search:

click  The icon enters the file name and searches for the file in the current directory.

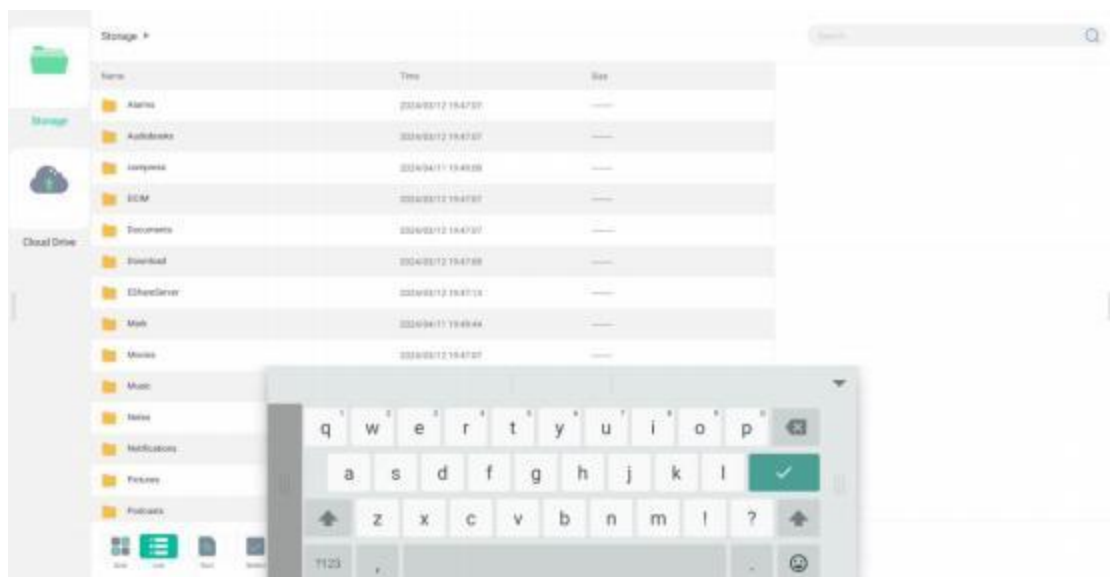

(3) New construction:


click  Icon, you can create a new folder. As shown in the figure:

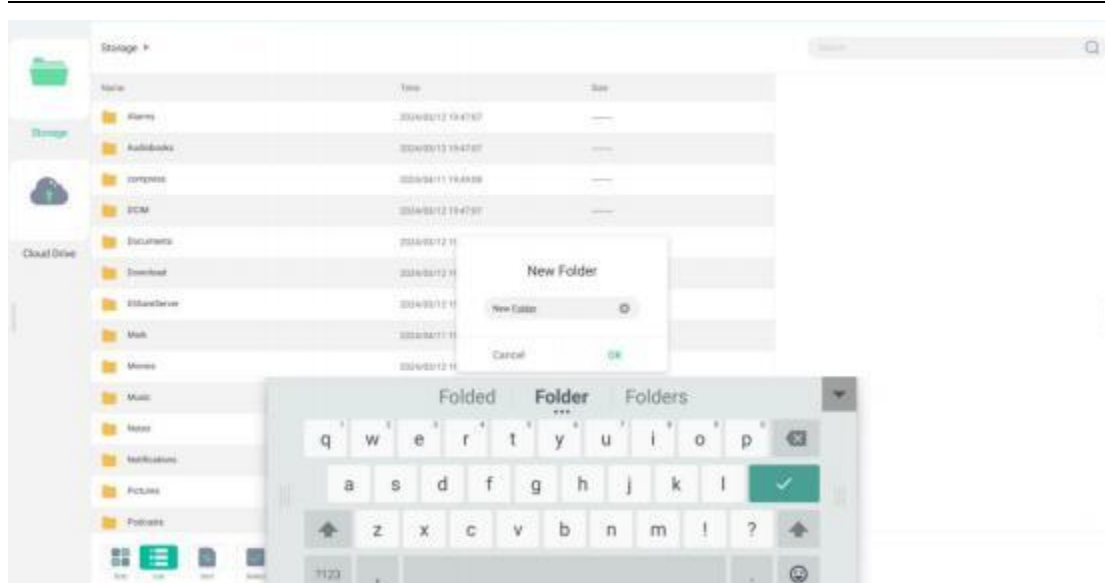


2.2.4 Expand the menu




click **Select** The icon can perform file operations on the file. As shown in the figure:

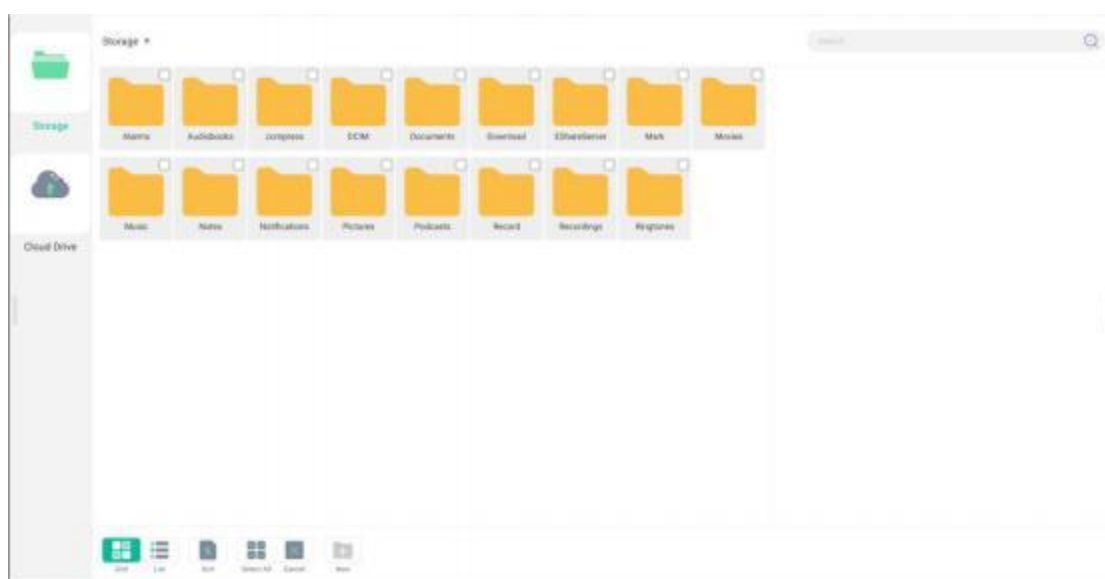


a. Click the upper right corner of the folder  The box indicates that the file is selected,

b. click  The icon selects all the files in the current directory, as shown in the figure:

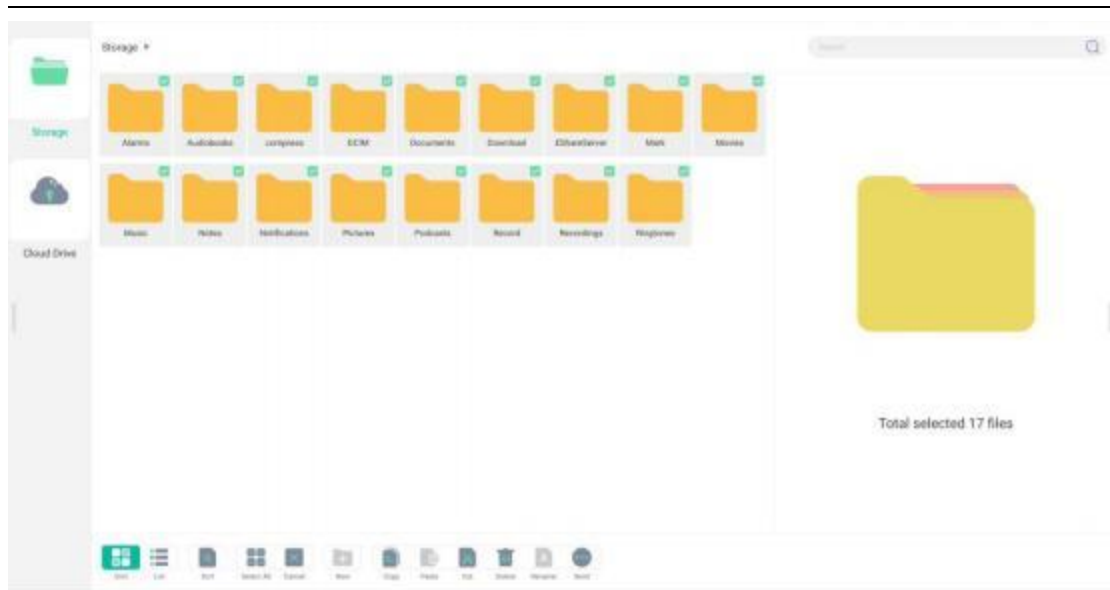

- c. click  The icon cancels the selection of the selected content
- d. click  The icon copies the selected file to the clipboard
- e. click  The icon cuts the selected file to the clipboard
- f. click  You can paste the contents of the clipboard to the current directory
- g. click  The icon can delete the selected file content
- h. click  Icon, rename the selected file (only one at a time), as shown in the figure:

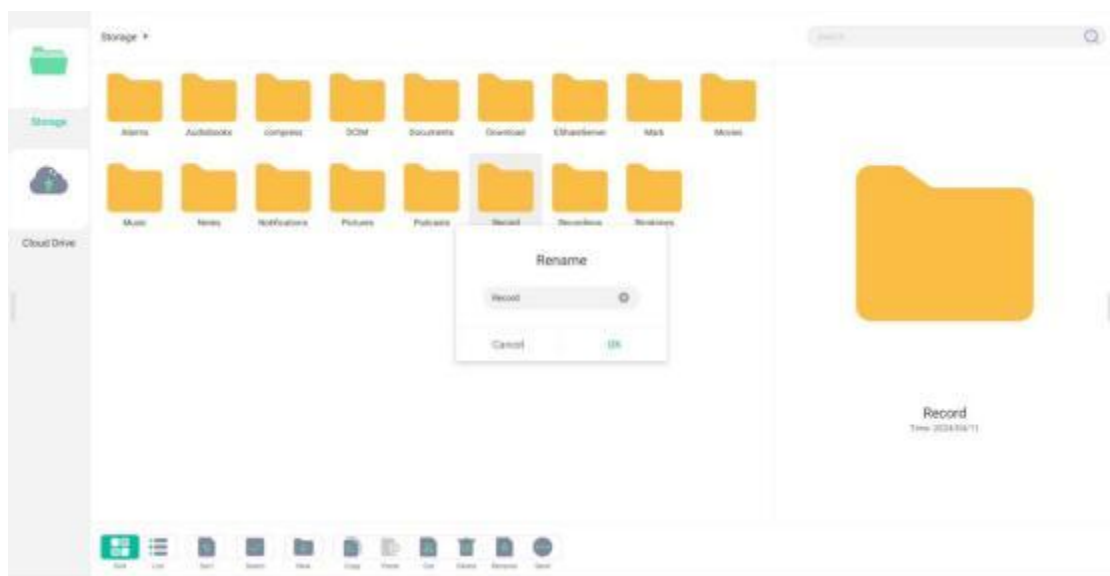

2.3 Tablet Manager



click  Click the icon to enter the application. Click the icon to enter the main page of the application as shown in the figure



(1) Click the home page icon




(2) Click the application icon to display




Click the icon to view version information.




(3) Click to automatically clean up useless files.

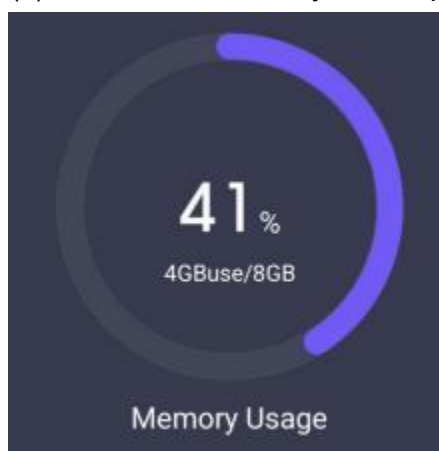

(4) Click one-click memory optimization and garbage cleaning.

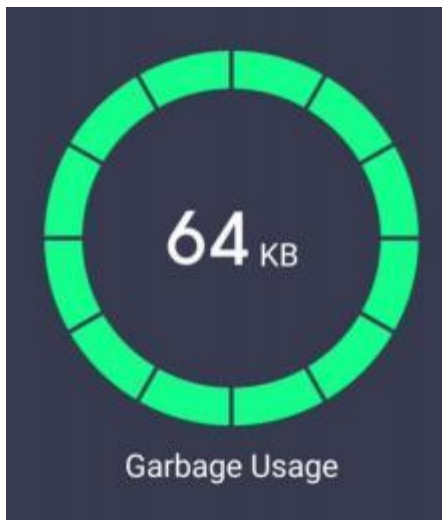


(5) Click the network icon to view the network status and click the network again

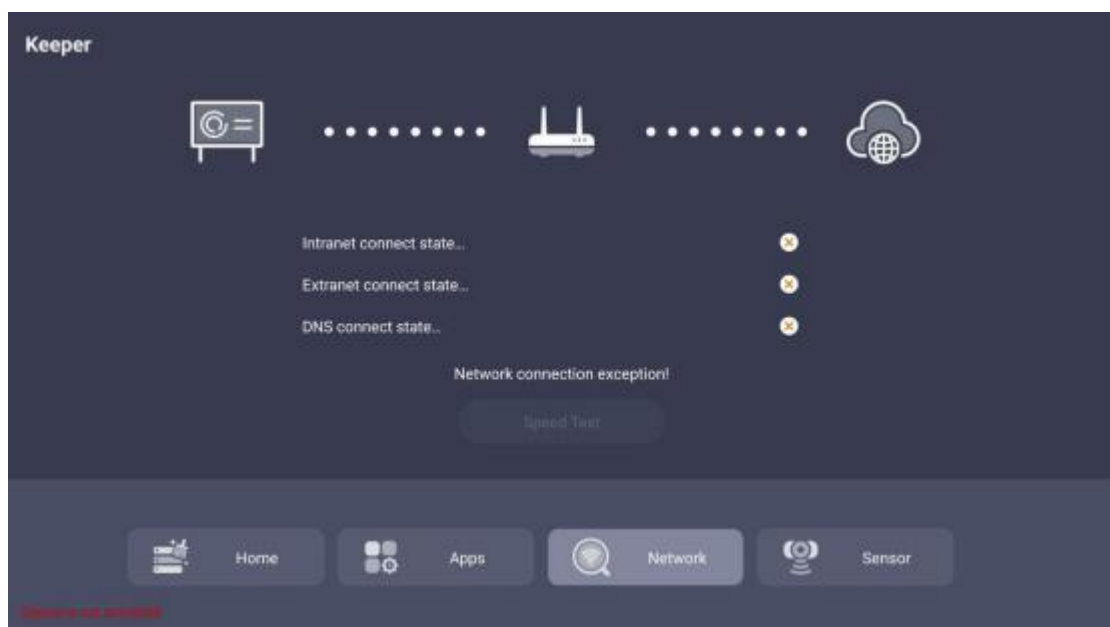

Click on the network speed again to display the current network fluctuation



(6) Click the sensor to display the following. If there is a sensor device, you can open it

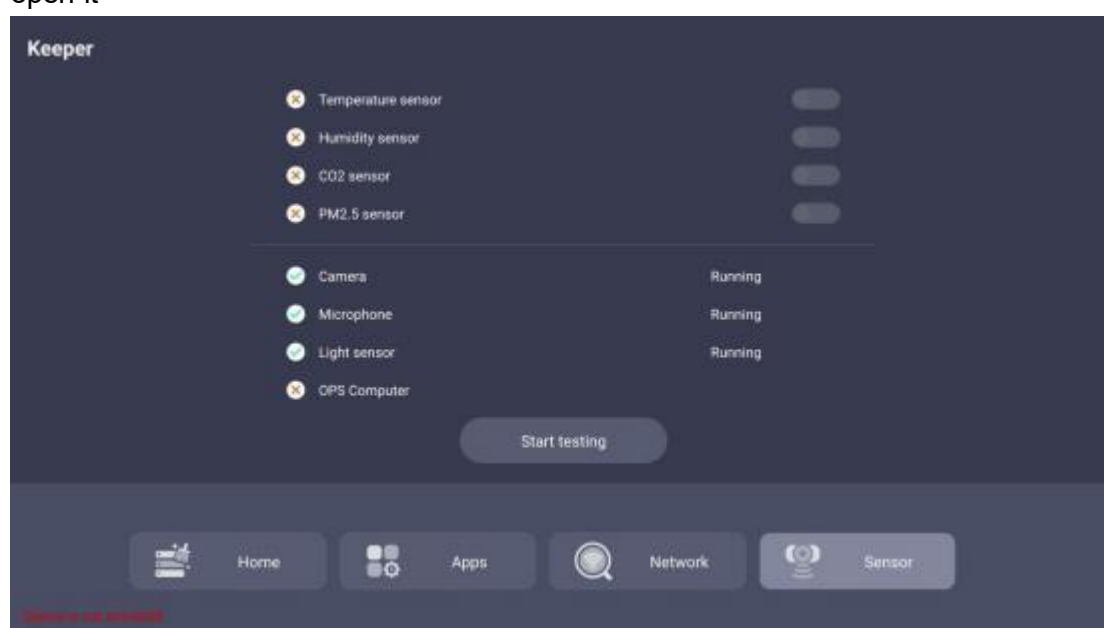



2.4 Wireless screen transmission


2.4.1 Application instructions

The main function of this application is to wirelessly transmit the content of the mobile phone, tablet or computer to the conference all-in-one machine, and truly realize the wireless screen transmission function between the projection device and the projected device (note: the mobile phone, tablet or computer should be in the same LAN as the conference tablet).

2.4.2 Operation instructions



Click on the main screen  The icon enters the main interface of the application, as shown in the figure:

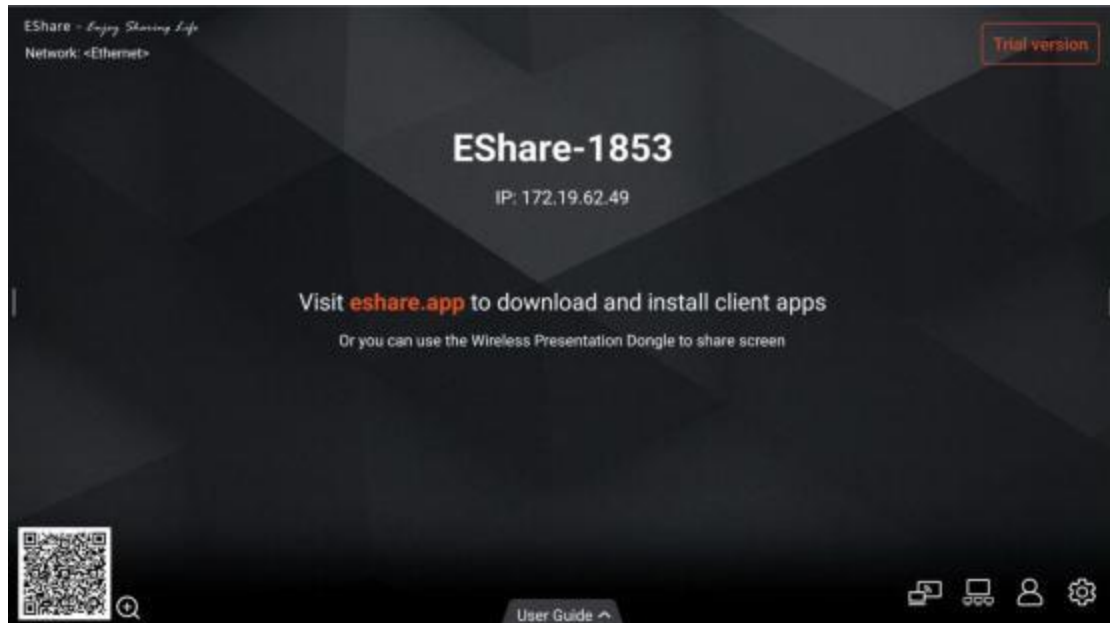

operation declaration:

- a. After the mobile phone or tablet is connected to the Internet, scan the code to download and install the client. (The IOS system does not need to install the client); download and install the screen transfer assistant client according to the download address on the computer.
- b. After installation, the device and the all-in-one machine use the same network. Android phones can open the screen transfer assistant to scan the QR code to transfer the screen, Apple phones can open the AirPlay connection device to transfer the screen, and computers can also successfully transfer the screen by entering the screen transfer code.

2.5 Drawing board

Add a new drawing board application



1. After-sale service

Thank you for choosing our products! We are committed to providing you with excellent after-sales service to ensure your complete satisfaction. More Help and Quesiton, Just Feel Free to Contact the Manufacturer.

Warranty and Returns

30-Day Return Policy: If you are not satisfied with your purchase, you can return it within 30 days for a full refund or exchange. The product must be in its original condition and packaging.

1-Year Warranty: All our products come with a 1-year warranty covering any manufacturing defects. If you encounter any issues, we will repair or replace the item at no additional cost.

Customer Support

Contact Us: If you have any questions or need assistance, please contact us through Amazon's messaging system. We aim to respond within 24 hours.

Technical Support: Our team is available to provide technical support and troubleshooting for any product-related issues.

Easy Process

Fast Resolution: We strive to resolve all issues quickly and efficiently to minimize any inconvenience.

Your satisfaction is our top priority. Shop with confidence knowing that we are here to support you every step of the way.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.