

Appendix 5.8G


HT250613015--M-055--FCC ID--5.8GWIFI

FCC_5.8G_WIFI (Part15.407) Test Data


1. -6dB Emission Bandwidth

Condition	Antenna	Mode	Frequency(MHz)	-6dB_Emission_Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5745.00	16.401	0.500	Pass
NVNT	ANT1	802.11a	5785.00	16.087	0.500	Pass
NVNT	ANT1	802.11a	5825.00	16.392	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	16.604	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	16.907	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	16.019	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	17.693	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	17.725	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	17.713	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	35.142	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	35.173	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	36.377	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	36.467	0.500	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	75.911	0.500	Pass


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11a_5745_20M

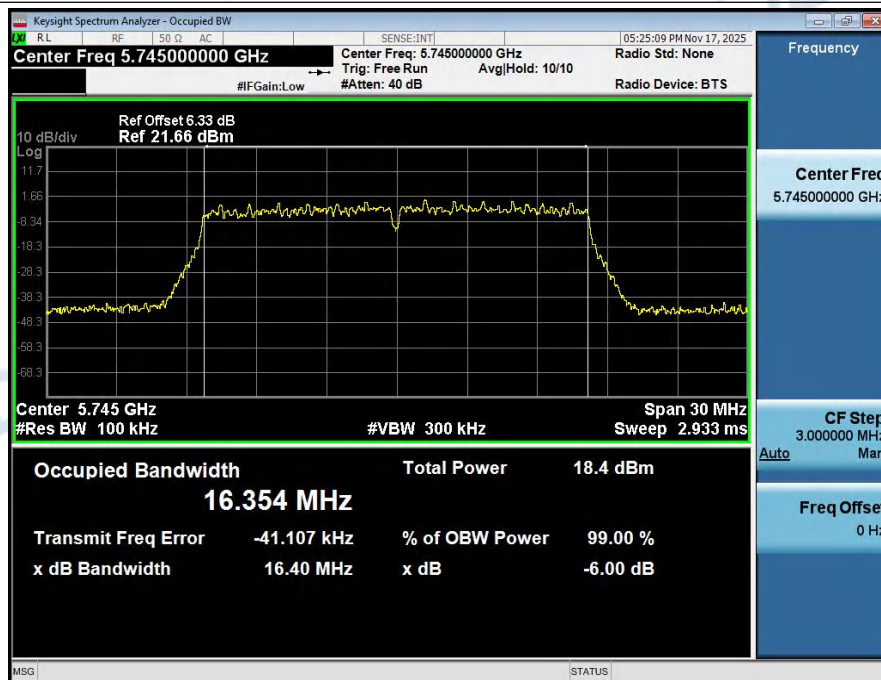


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11a_5785_20M

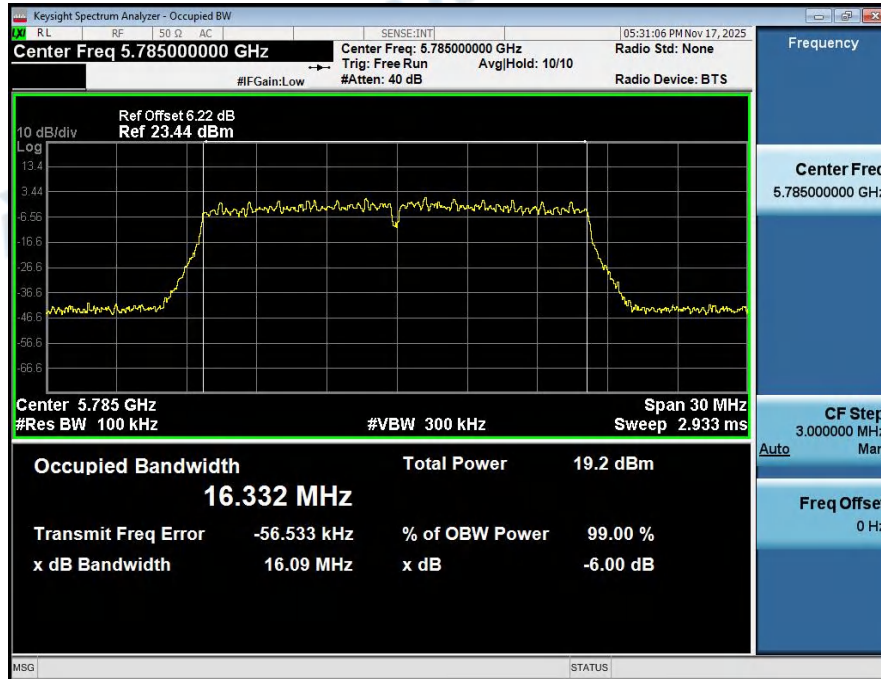


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11a_5825_20M

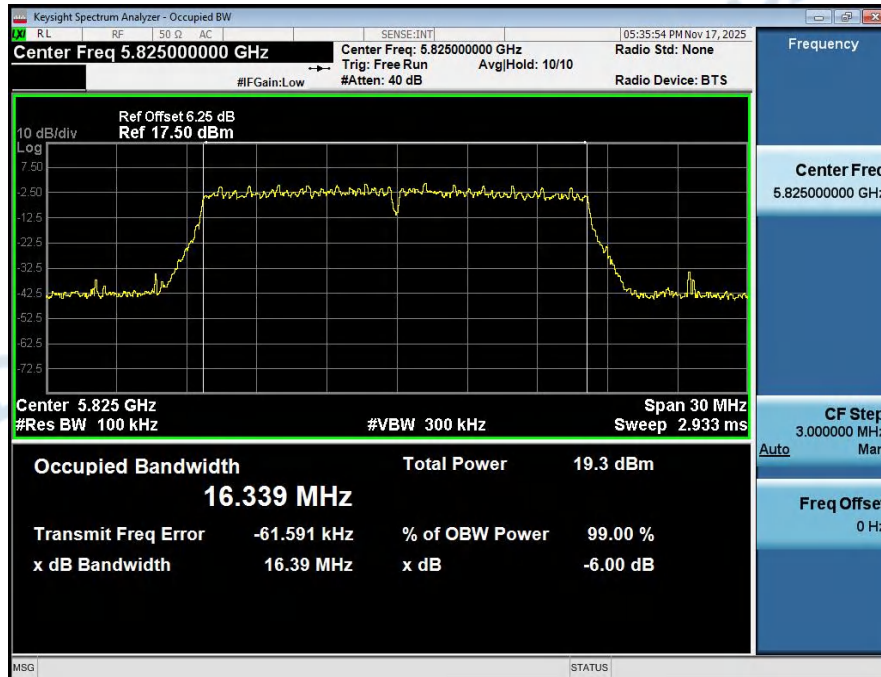


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT20)_5745_20M

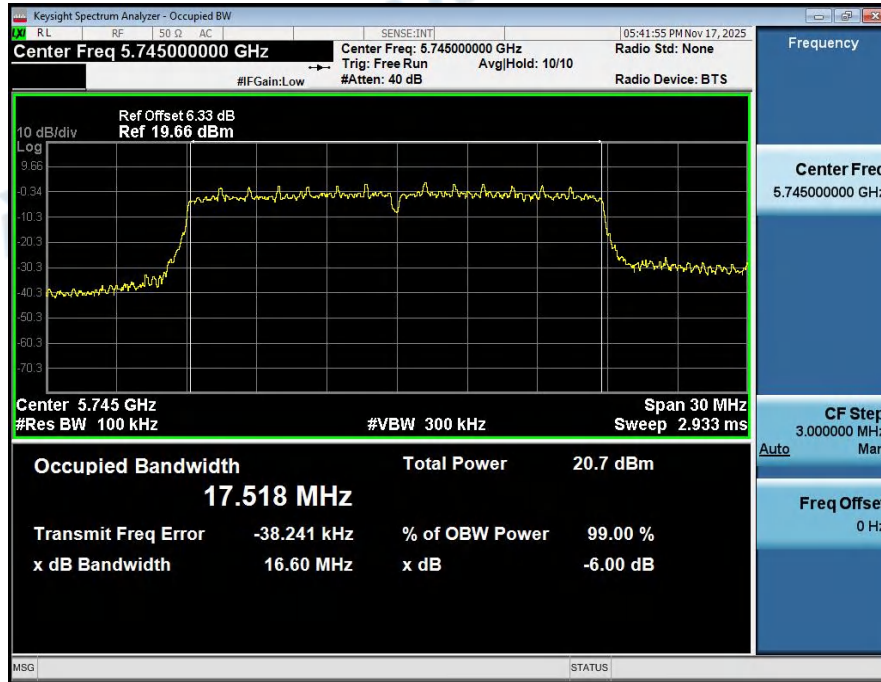


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT20)_5785_20M

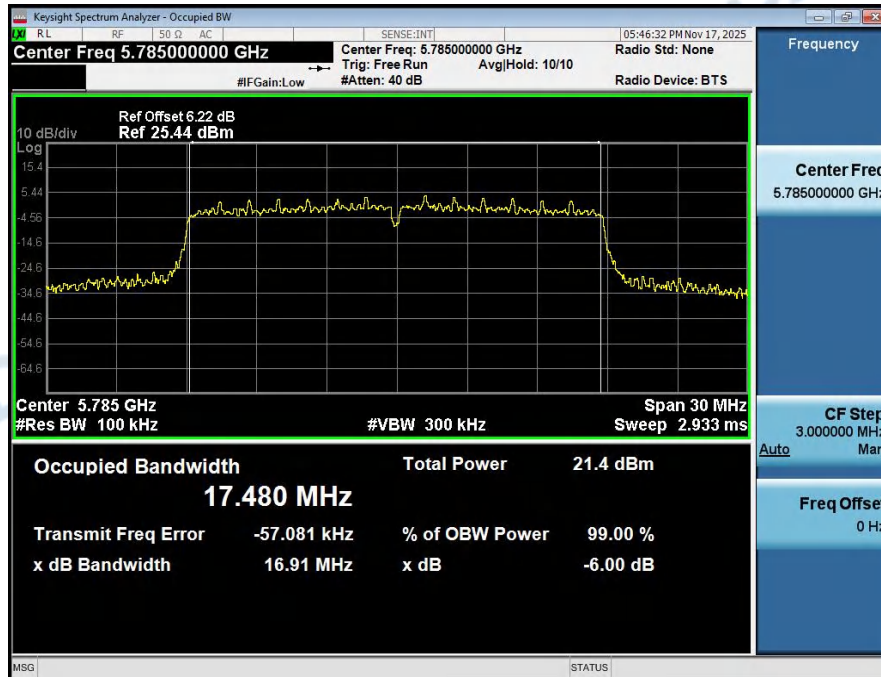


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT20)_5825_20M

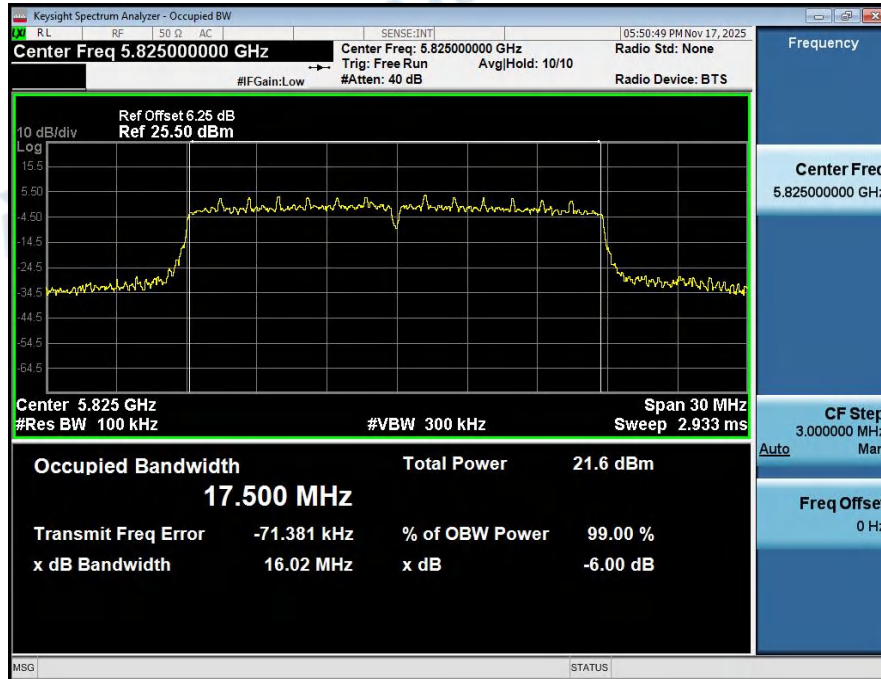


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5745_20M

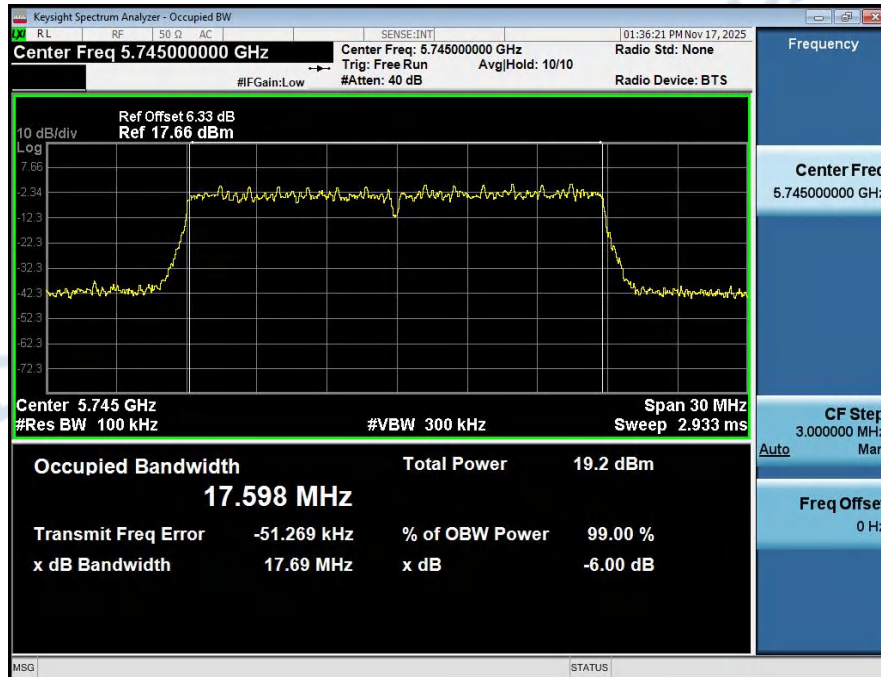


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5785_20M

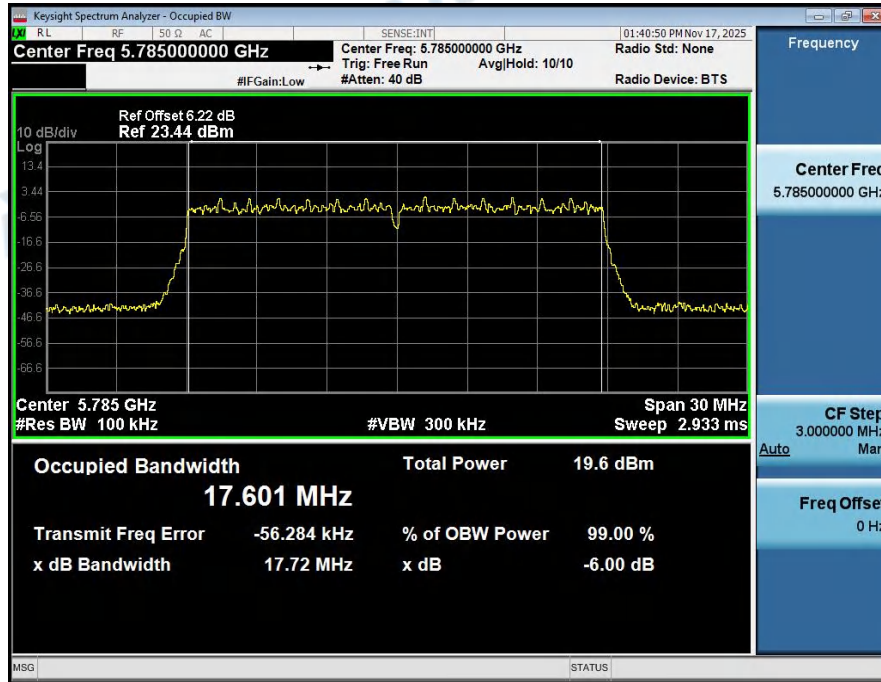


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5825_20M

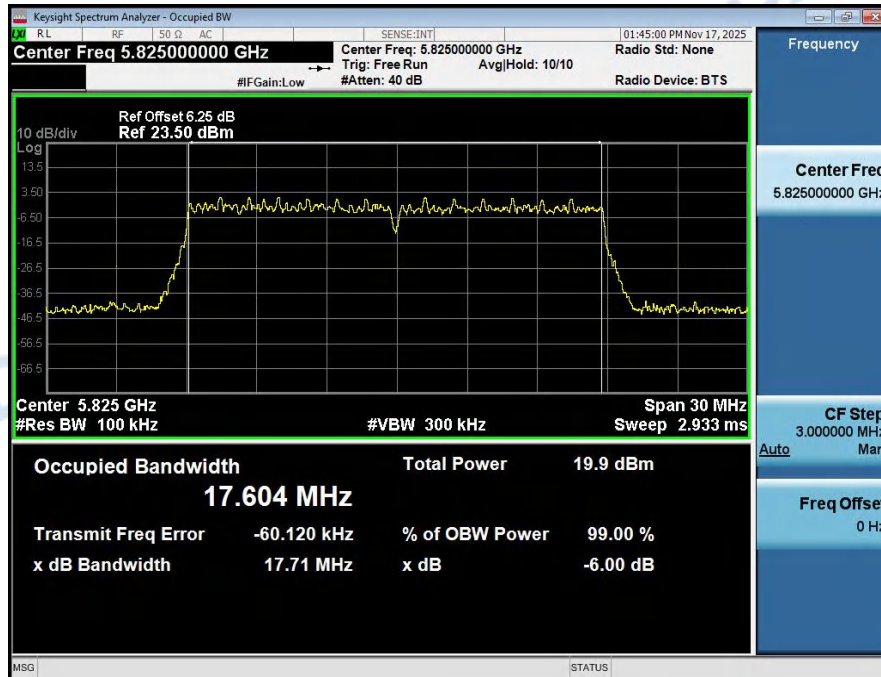


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT40)_5755_40M

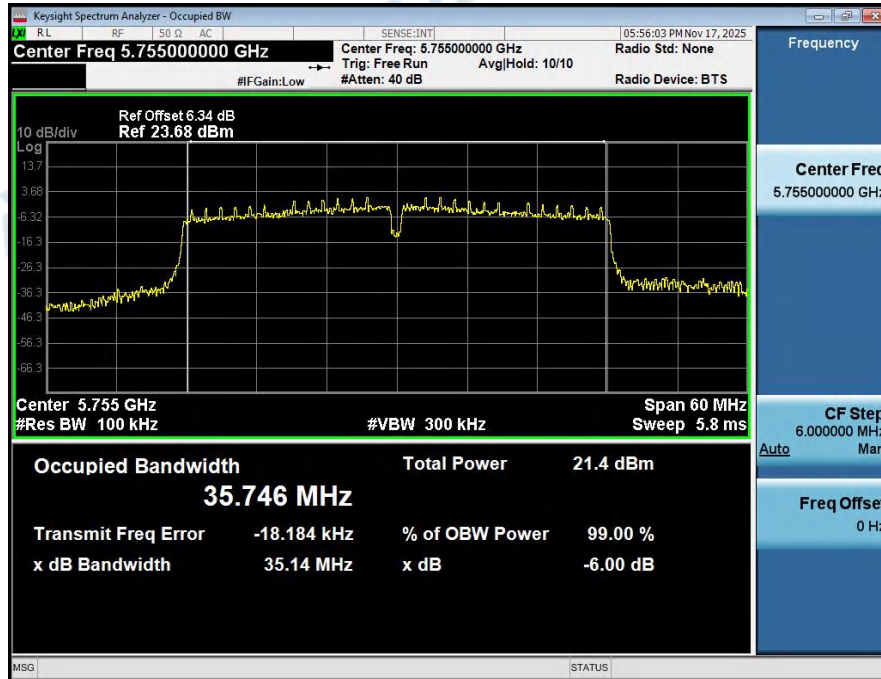


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11n(HT40)_5795_40M

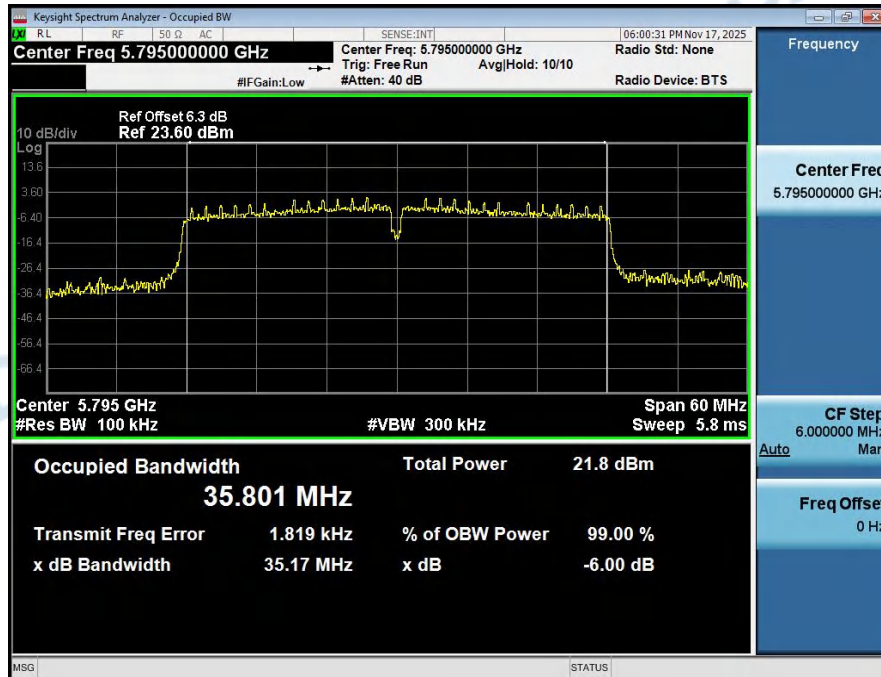


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5755_40M

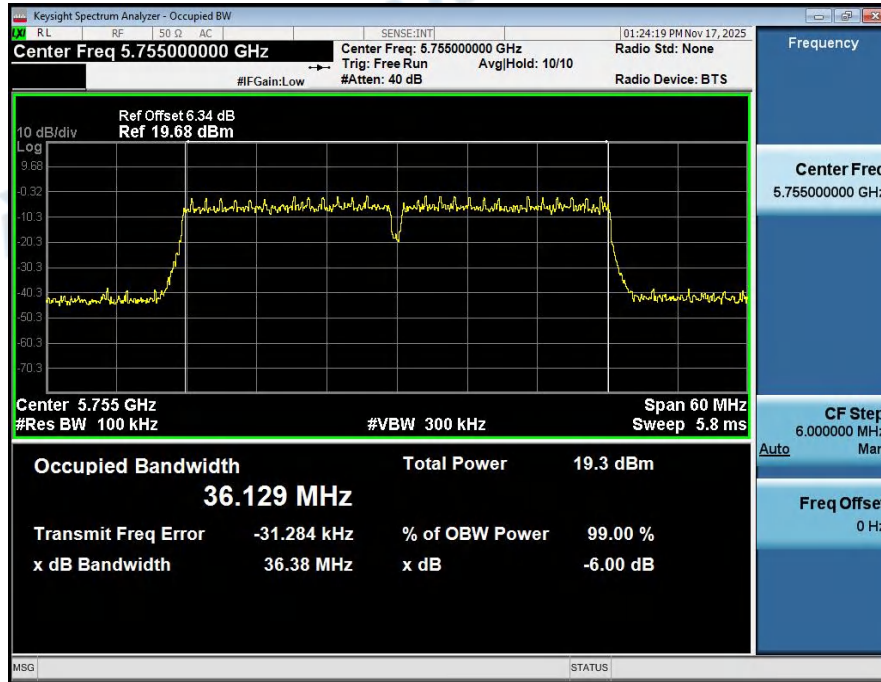

-6dB_Emission_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5795_40M

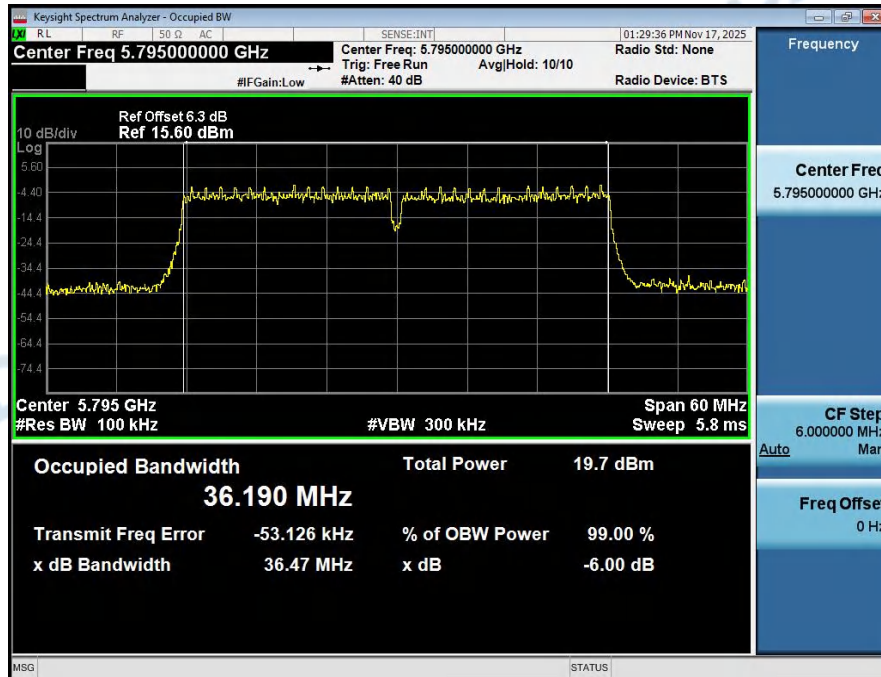


-6dB_Emission_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5775_80M

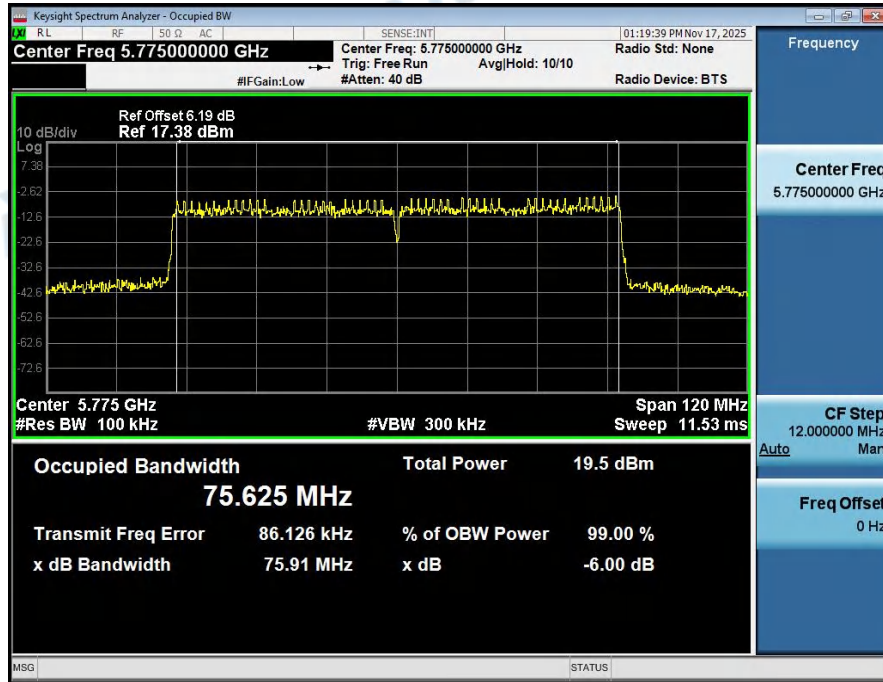


3. Duty Cycle

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5745.00	76.92	1.14
NVNT	ANT1	802.11a	5785.00	69.23	1.60
NVNT	ANT1	802.11a	5825.00	75.00	1.25
NVNT	ANT1	802.11n(HT20)	5745.00	85.71	0.67
NVNT	ANT1	802.11n(HT20)	5785.00	85.71	0.67
NVNT	ANT1	802.11n(HT20)	5825.00	85.71	0.67
NVNT	ANT1	802.11ac(VHT20)	5745.00	62.50	2.04
NVNT	ANT1	802.11ac(VHT20)	5785.00	62.50	2.04
NVNT	ANT1	802.11ac(VHT20)	5825.00	62.50	2.04
NVNT	ANT1	802.11n(HT40)	5755.00	69.23	1.60
NVNT	ANT1	802.11n(HT40)	5795.00	76.92	1.14
NVNT	ANT1	802.11ac(VHT40)	5755.00	57.14	2.43
NVNT	ANT1	802.11ac(VHT40)	5795.00	57.14	2.43
NVNT	ANT1	802.11ac(VHT80)	5775.00	50.00	3.01

Duty_Cycle_NVNT_ANT1_802_11a_5745

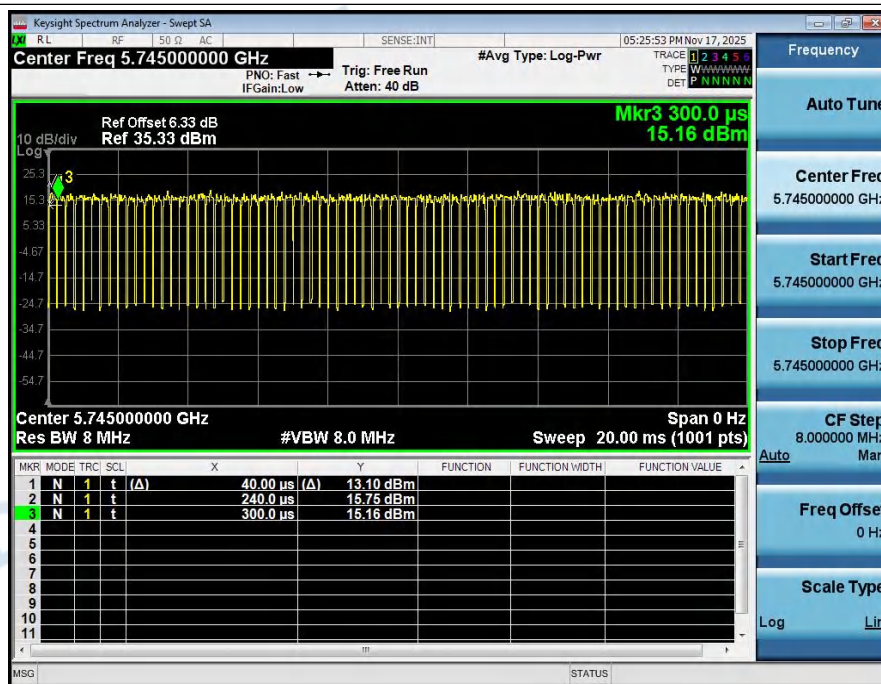

Duty_Cycle_NVNT_ANT1_802_11a_5785

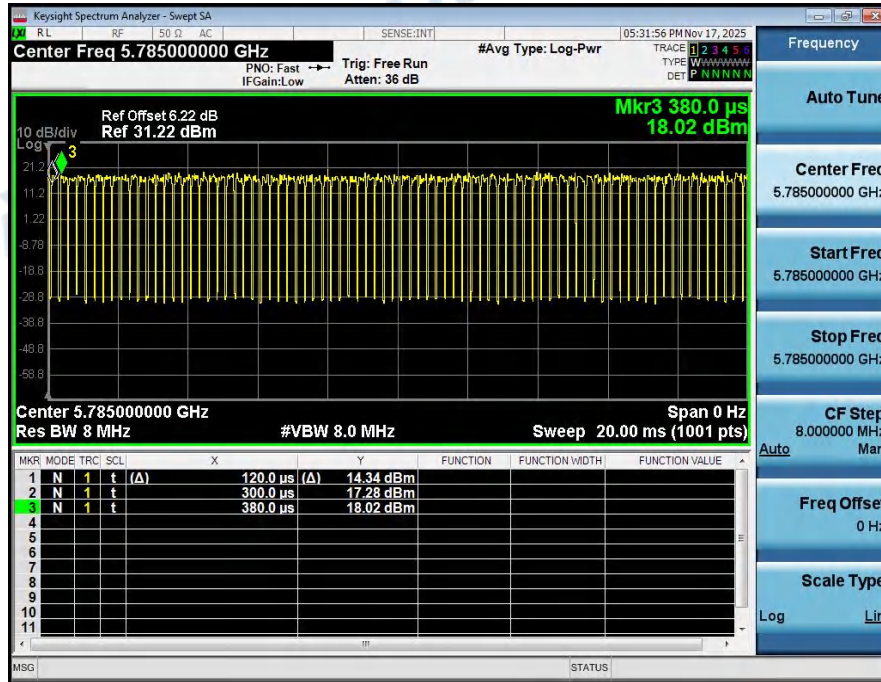

Duty_Cycle_NVNT_ANT1_802_11a_5825




4. Maximum Conducted Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	9.80	1.14	10.94	30	Pass
NVNT	ANT1	802.11a	5785.00	10.65	1.60	12.25	30	Pass
NVNT	ANT1	802.11a	5825.00	10.90	1.25	12.15	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	13.14	0.67	13.81	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	13.86	0.67	14.53	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	14.09	0.67	14.76	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	9.94	2.04	11.98	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	10.54	2.04	12.58	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	10.81	2.04	12.85	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	13.06	1.60	14.66	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	13.44	1.14	14.58	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	9.51	2.43	11.94	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	9.89	2.43	12.32	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	8.96	3.01	11.97	30	Pass

5. Power Spectral Density

Condition	Antenna	Modulation	Frequency (MHz)	PSD_SA (dBm/RBW)	Duty factor (dB)	RB factor(dB)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
NVNT	ANT1	802.11a	5745.00	-2.86	1.14	-0.09	-1.81	30	Pass
NVNT	ANT1	802.11a	5785.00	-2.94	1.60	-0.09	-1.43	30	Pass
NVNT	ANT1	802.11a	5825.00	-2.96	1.25	-0.09	-1.79	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	0.28	0.67	-0.09	0.87	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	0.08	0.67	-0.09	0.67	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	0.40	0.67	-0.09	0.98	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	0.29	2.04	-0.09	2.25	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	-0.20	2.04	-0.09	1.75	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	-0.01	2.04	-0.09	1.95	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	-1.52	1.60	-0.09	-0.01	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	-2.14	1.14	-0.09	-1.09	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	-1.80	2.43	-0.09	0.54	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	-2.06	2.43	-0.09	0.29	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	-6.12	3.01	-0.09	-3.20	30	Pass

Note: $\text{PSD}(500\text{KHz}) = \text{PSD_SA} + \text{RB factor}$; $\text{RB factor} = 10 * \log(500/510) = -0.09\text{dB}$; $\text{PSD}(\text{dBm}/500\text{kHz}) = \text{PSD_SA}(\text{dBm}/\text{RBW}) + \text{Duty factor}(\text{dB}) + \text{RB factor}(\text{dB})$

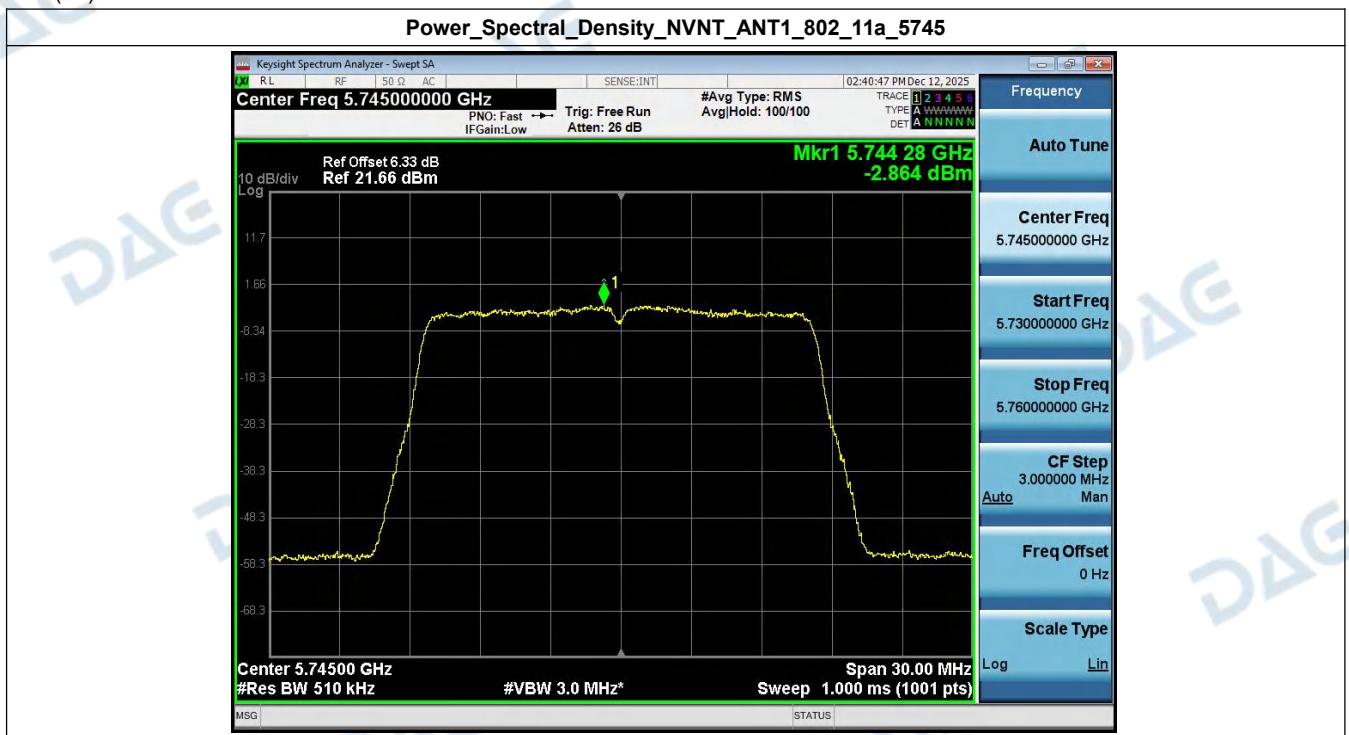

Power_Spectral_Density_NVNT_ANT1_802_11a_5785



Power_Spectral_Density_NVNT_ANT1_802_11a_5825



Power_Spectral_Density_NVNT_ANT1_802_11n(HT20)_5745



Power_Spectral_Density_NVNT_ANT1_802_11n(HT20)_5785



Power_Spectral_Density_NVNT_ANT1_802_11n(HT20)_5825



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT20)_5745



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT20)_5785



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT20)_5825



Power_Spectral_Density_NVNT_ANT1_802_11n(HT40)_5755



Power_Spectral_Density_NVNT_ANT1_802_11n(HT40)_5795



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT40)_5755



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT40)_5795



Power_Spectral_Density_NVNT_ANT1_802_11ac(VHT80)_5775




6. Bandedge

Condition	Antenna	Modulation	TX_Frequency (MHz)	Frequency Area(MHz)	Frequency(MHz)	Amplitude (dBm/MHz)	Limit (dBm/MHz)	Result
NVNT	ANT1	802.11a	LCH	5565-5655	5605.770	-47.53	-27.00	Pass
NVNT	ANT1	802.11a	LCH	5655-5700	5657.835	-48.24	-24.67	Pass
NVNT	ANT1	802.11a	LCH	5700-5720	5707.920	-47.67	12.22	Pass
NVNT	ANT1	802.11a	LCH	5720-5725	5724.005	-44.16	24.73	Pass
NVNT	ANT1	802.11a	HCH	5850-5855	5854.065	-46.65	17.73	Pass
NVNT	ANT1	802.11a	HCH	5855-5875	5863.020	-44.94	13.35	Pass
NVNT	ANT1	802.11a	HCH	5875-5920	5913.250	-47.98	-21.45	Pass
NVNT	ANT1	802.11a	HCH	5920-6005	5930.880	-43.85	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5565-5655	5596.320	-47.89	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5655-5700	5659.410	-47.49	-23.37	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5700-5720	5720.000	-42.51	15.60	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5720-5725	5723.935	-34.49	24.57	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5850-5855	5852.705	-45.68	20.83	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5855-5875	5867.240	-45.56	12.17	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5875-5920	5902.315	-47.61	-12.46	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5920-6005	5936.235	-43.48	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5565-5655	5650.590	-47.17	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5655-5700	5660.940	-48.27	-22.12	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5700-5720	5703.980	-46.90	11.11	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5720-5725	5723.300	-38.23	23.12	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5850-5855	5854.795	-45.15	16.07	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5855-5875	5869.900	-46.77	11.43	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5875-5920	5918.920	-47.90	-26.11	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5920-6005	5927.310	-43.36	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5595-5655	5639.640	-48.07	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5655-5700	5659.275	-47.80	-23.49	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5700-5720	5717.520	-40.62	14.91	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5720-5725	5721.845	-40.56	19.81	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5850-5855	5854.220	-45.53	17.38	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5855-5875	5867.240	-46.40	12.17	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5875-5920	5909.245	-47.50	-18.16	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5920-5955	5935.015	-43.37	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5595-5655	5647.080	-48.24	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5655-5700	5687.895	-47.89	0.05	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5700-5720	5706.860	-43.78	11.92	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5720-5725	5721.445	-42.03	18.89	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5850-5855	5854.815	-45.85	16.02	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5855-5875	5873.340	-47.00	10.46	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5875-5920	5914.375	-47.30	-22.38	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5920-5955	5940.510	-43.77	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5650-5655	5654.470	-47.50	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5655-5700	5674.935	-48.00	-10.61	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5700-5720	5708.120	-47.17	12.27	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5720-5725	5720.920	-46.56	17.70	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5850-5855	5852.455	-37.51	21.40	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5855-5875	5868.580	-38.79	11.80	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5875-5920	5882.875	-46.77	3.53	Pass


NVNT	ANT1	802.11ac(VHT80)	MCH	5920-5925	5922.470	-43.94	-27.00	Pass
------	------	-----------------	-----	-----------	----------	--------	--------	------

Note: The test data did not compensate for the antenna gain. The test margin is greater than the sum of the antenna gain and the cable loss, therefore the test meets the requirements.


Bandedge_NVNT_ANT1_802_11a_5745

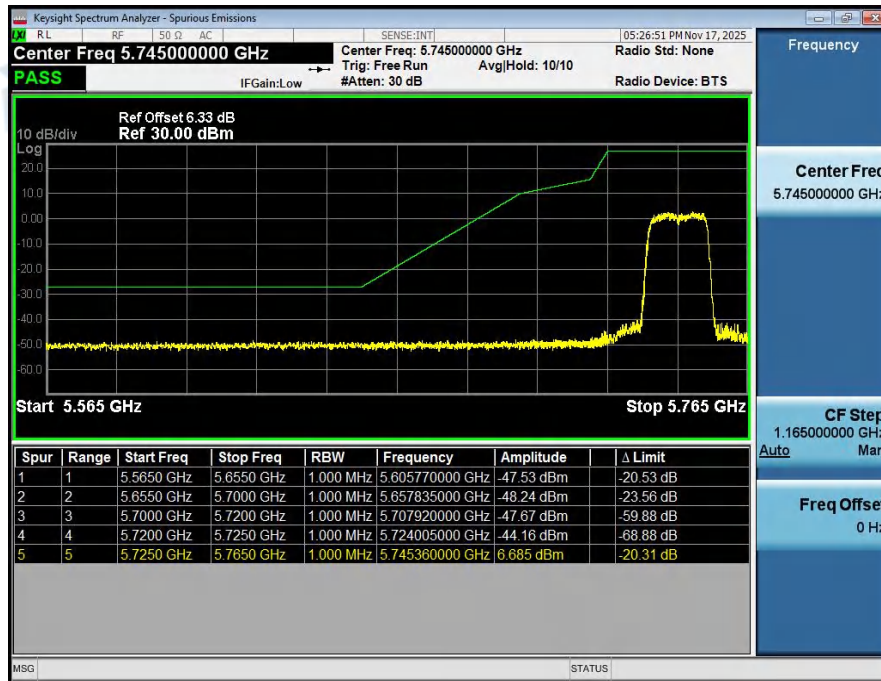


Bandedge_NVNT_ANT1_802_11a_5825

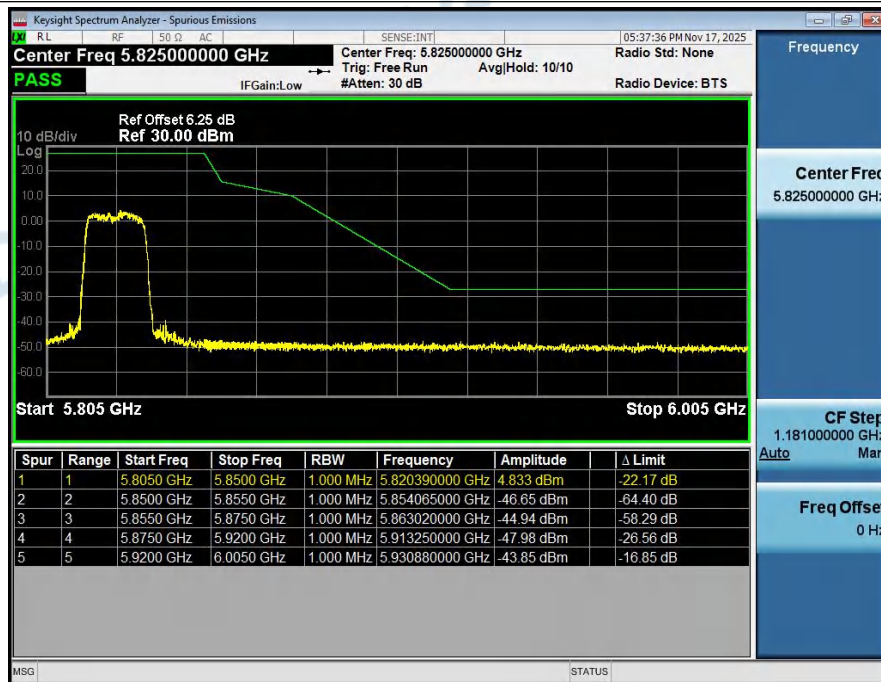


Bandedge_NVNT_ANT1_802_11n(HT20)_5745

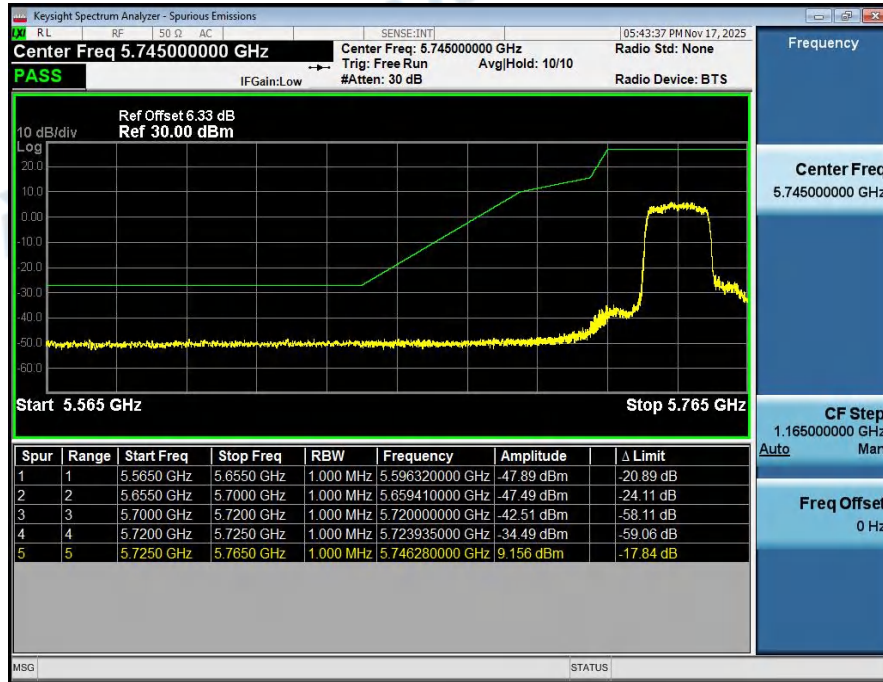


Bandedge_NVNT_ANT1_802_11n(HT20)_5825

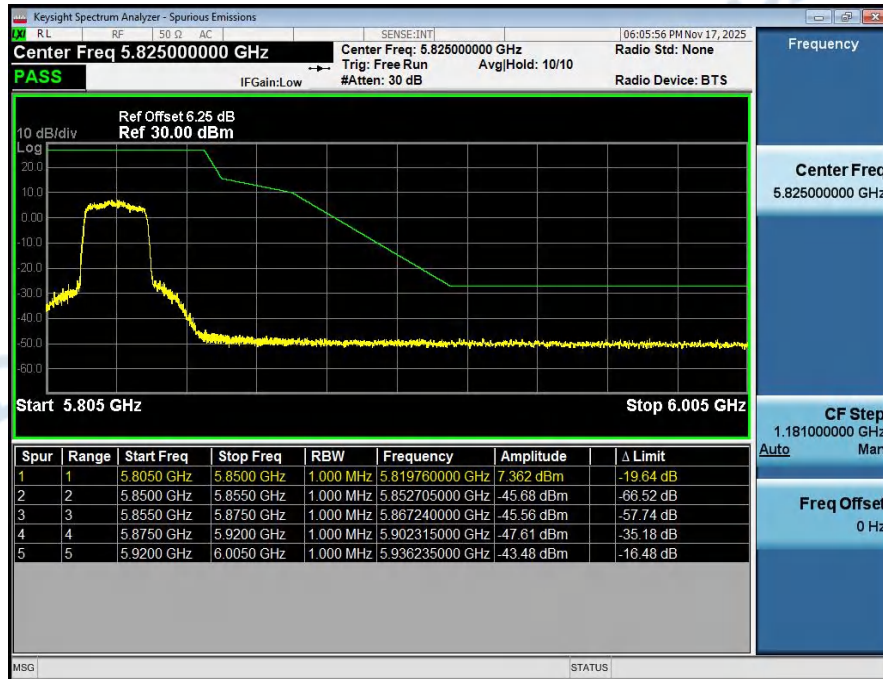


Bandedge_NVNT_ANT1_802_11ac(VHT20)_5745

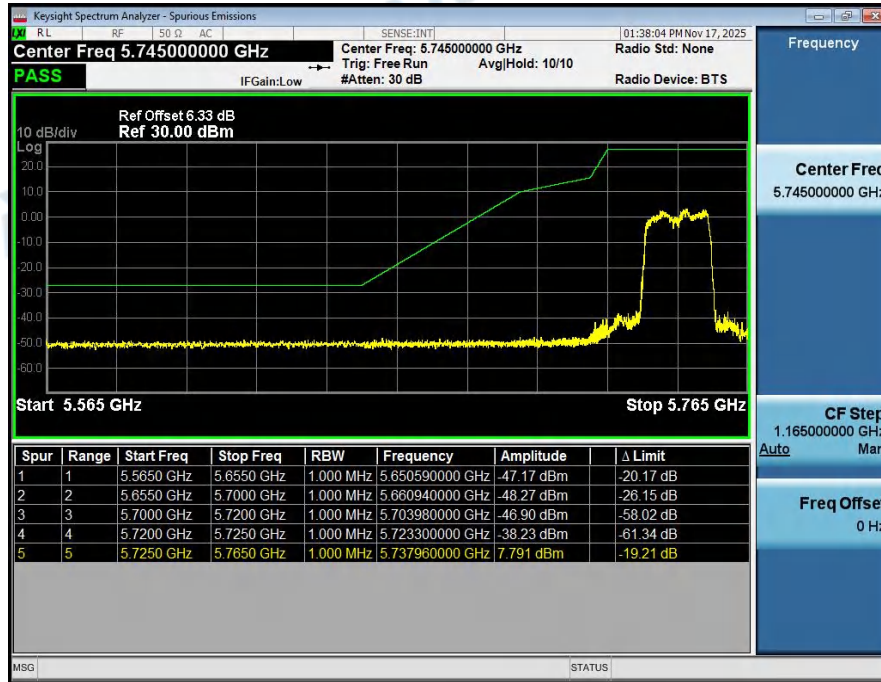


Bandedge_NVNT_ANT1_802_11ac(VHT20)_5825

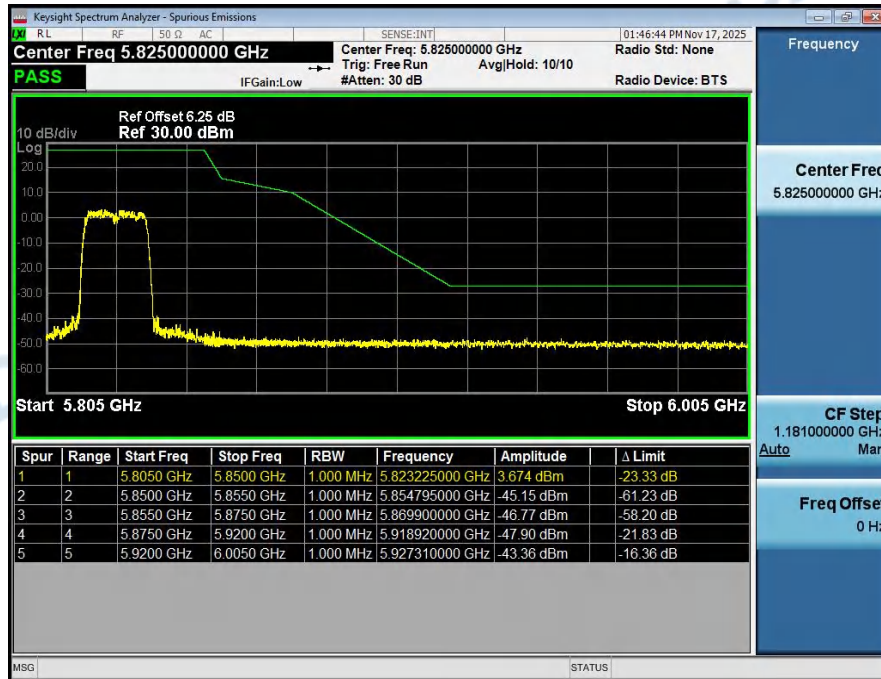


Bandedge_NVNT_ANT1_802_11n(HT40)_5755

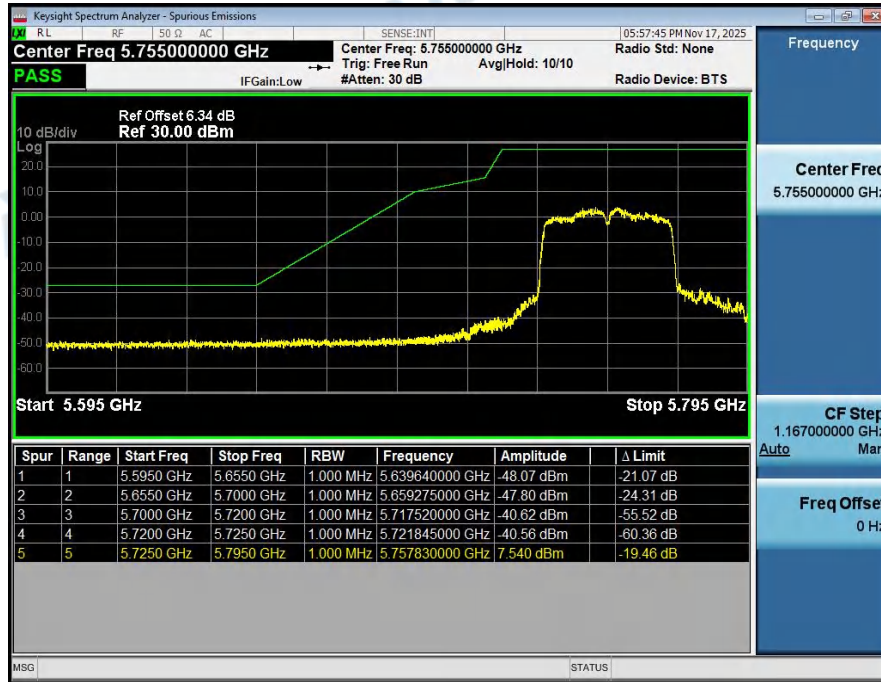


Bandedge_NVNT_ANT1_802_11n(HT40)_5795

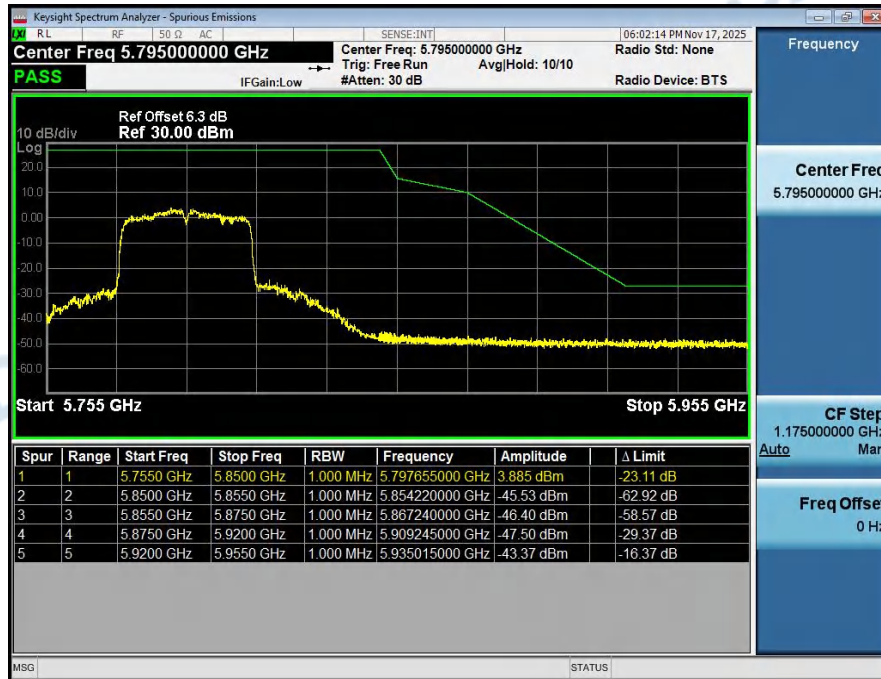


Bandedge_NVNT_ANT1_802_11ac(VHT40)_5755

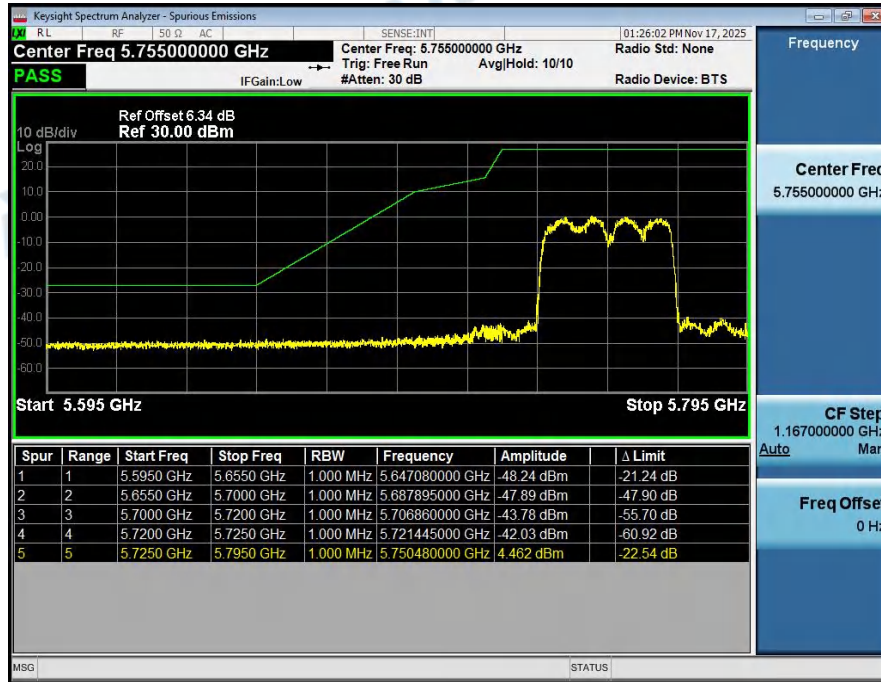

Bandedge_NVNT_ANT1_802_11ac(VHT40)_5795

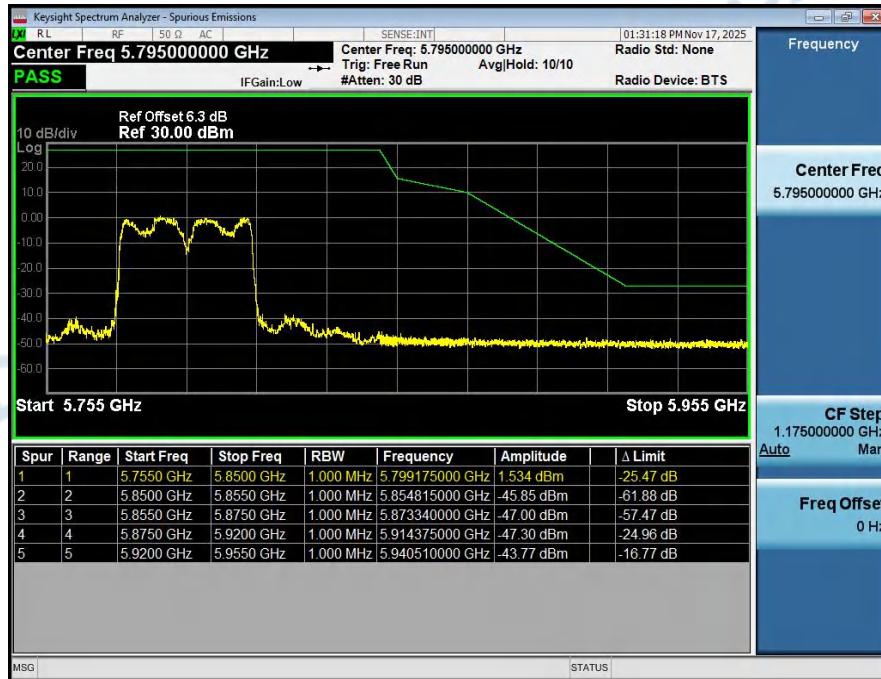

Bandedge_NVNT_ANT1_802_11ac(VHT80)_5775_low

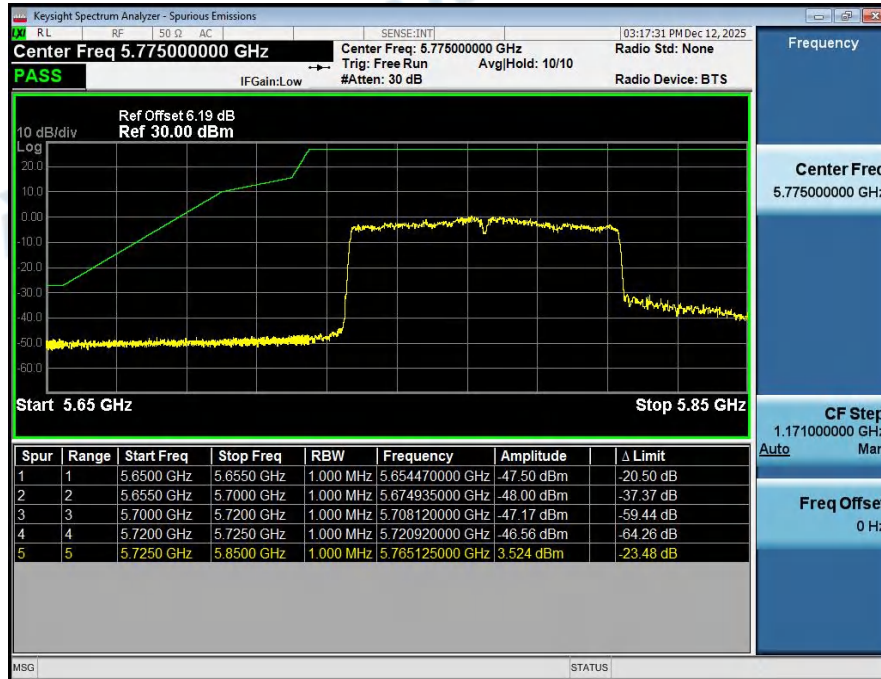

Bandedge_NVNT_ANT1_802_11ac(VHT80)_5775_up




7. Spurious Emission


Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark Frequency(MHz)	Spurious level (dBm/MHz)	Limit (dBm/MHz)	Result
NVNT	ANT1	802.11a	5745.00	25033.56	-36.83	-27	Pass
NVNT	ANT1	802.11a	5785.00	25038.86	-36.95	-27	Pass
NVNT	ANT1	802.11a	5825.00	24932.98	-36.82	-27	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	25105.03	-37.11	-27	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	25001.80	-37.66	-27	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	25134.15	-37.03	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	25012.39	-37.39	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	25052.09	-37.37	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	24948.86	-37.37	-27	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	25065.33	-37.33	-27	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	24977.97	-37.15	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	25062.68	-36.53	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	25094.44	-36.59	-27	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	24996.50	-37.15	-27	Pass

Note: The test data did not compensate for the antenna gain. The test margin is greater than the sum of the antenna gain and the cable loss, therefore the test meets the requirements.


Spurious_Emission_NVNT_ANT1_802_11a_5745

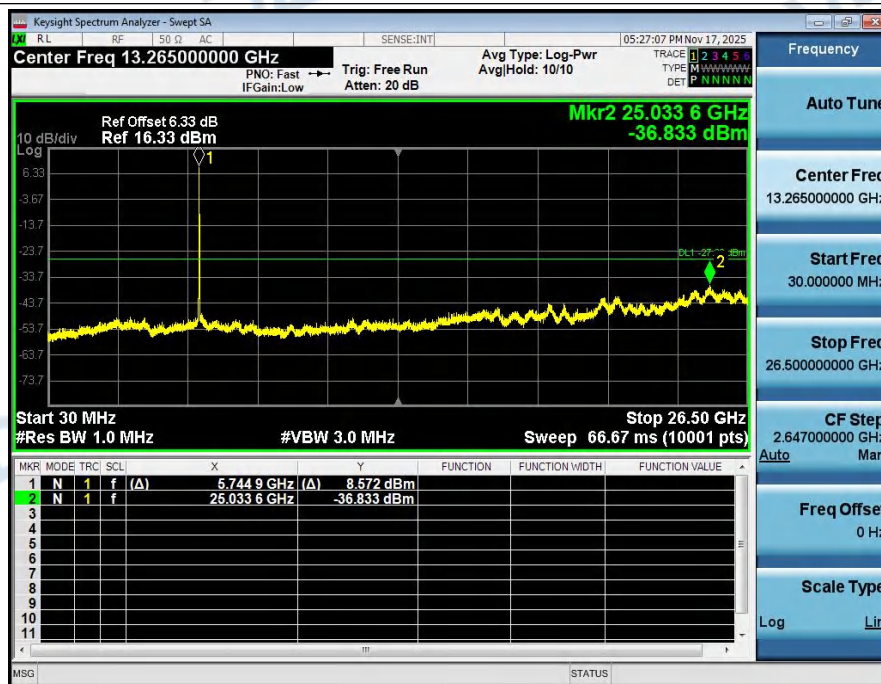


Spurious_Emission_NVNT_ANT1_802_11a_5785

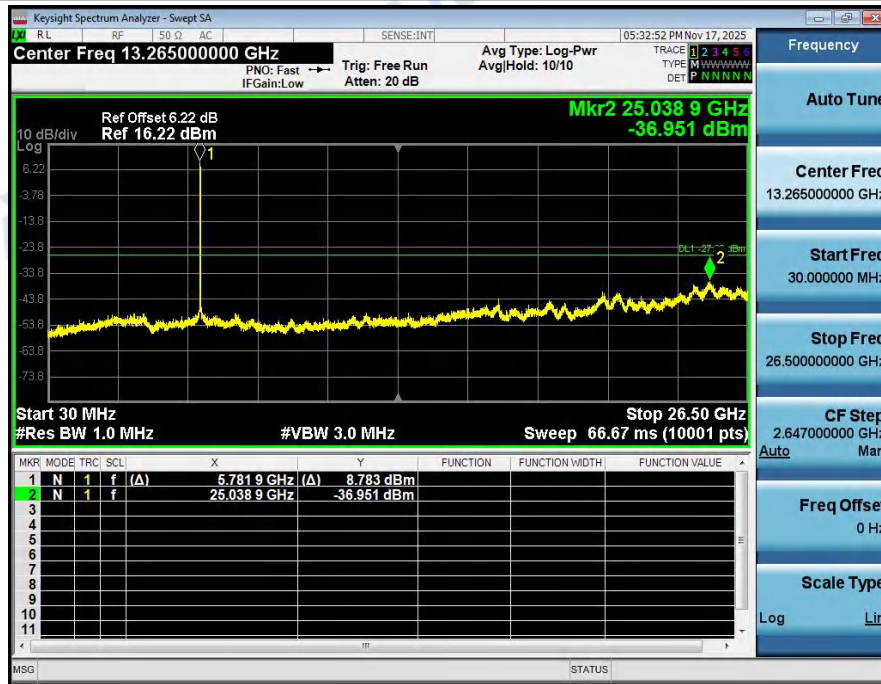


Spurious_Emission_NVNT_ANT1_802_11a_5825

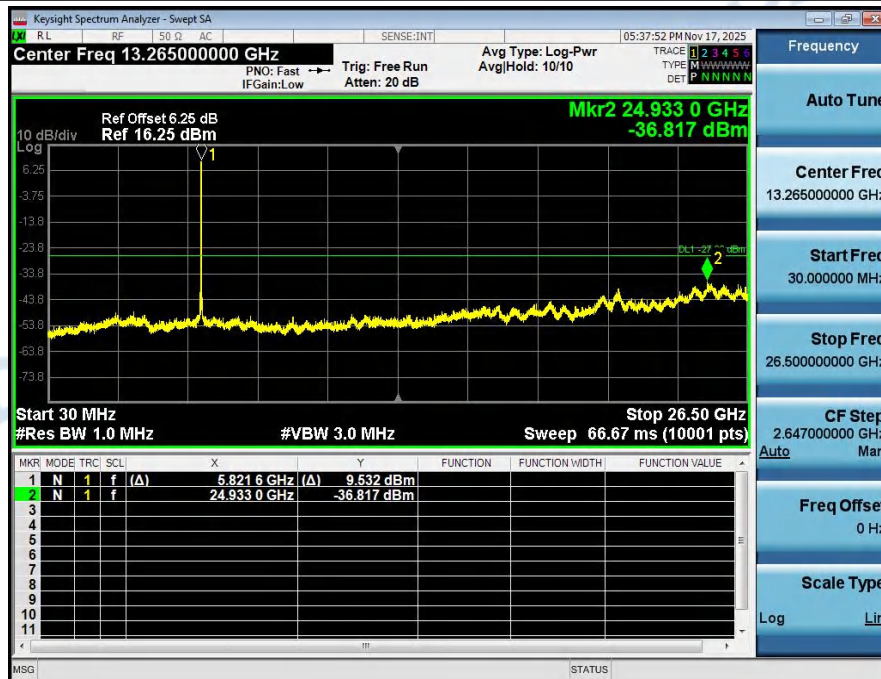


Spurious_Emission_NVNT_ANT1_802_11n(HT20)_5745

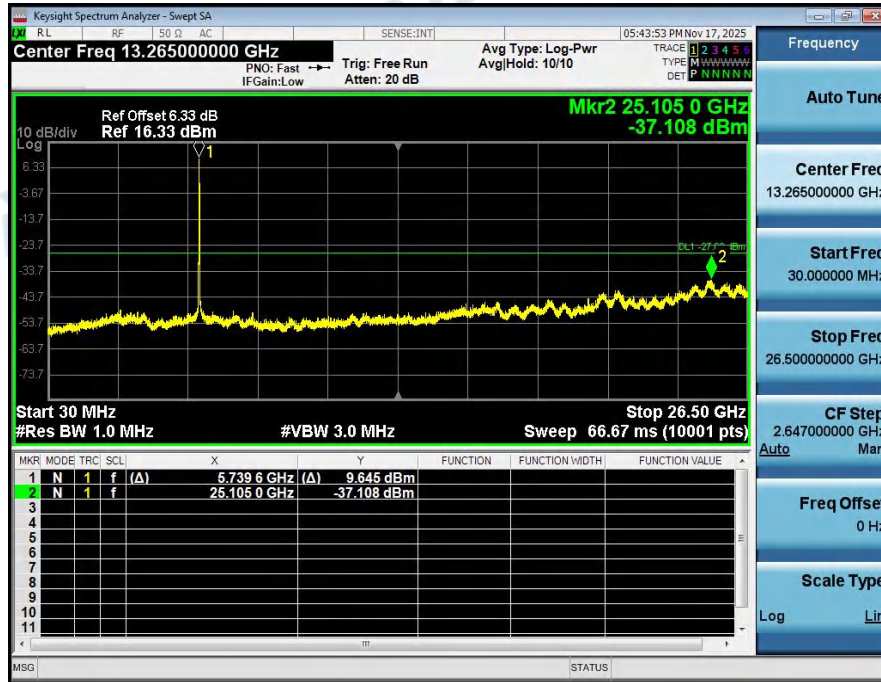


Spurious_Emission_NVNT_ANT1_802_11n(HT20)_5785

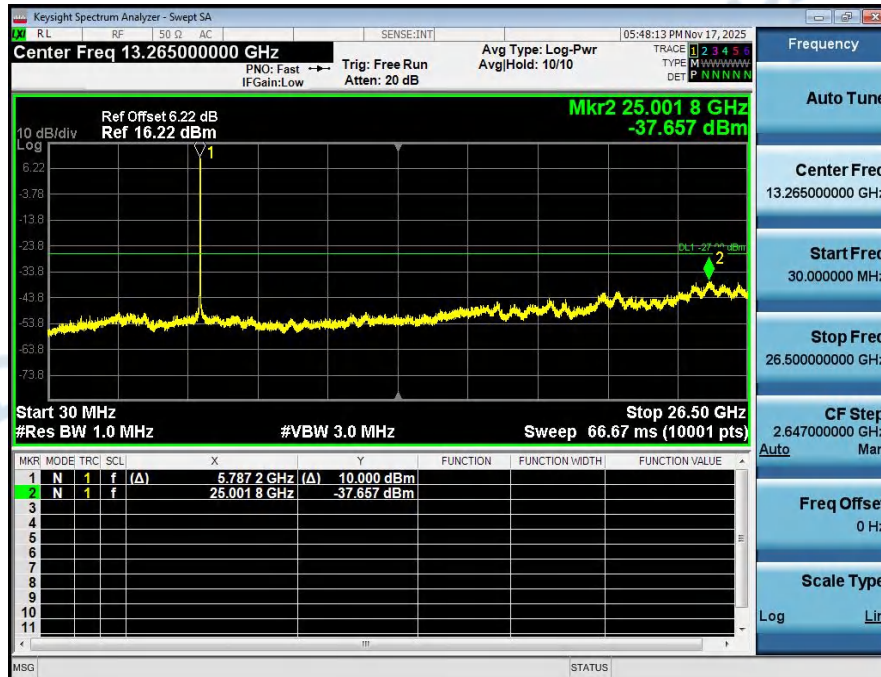


Spurious_Emission_NVNT_ANT1_802_11n(HT20)_5825

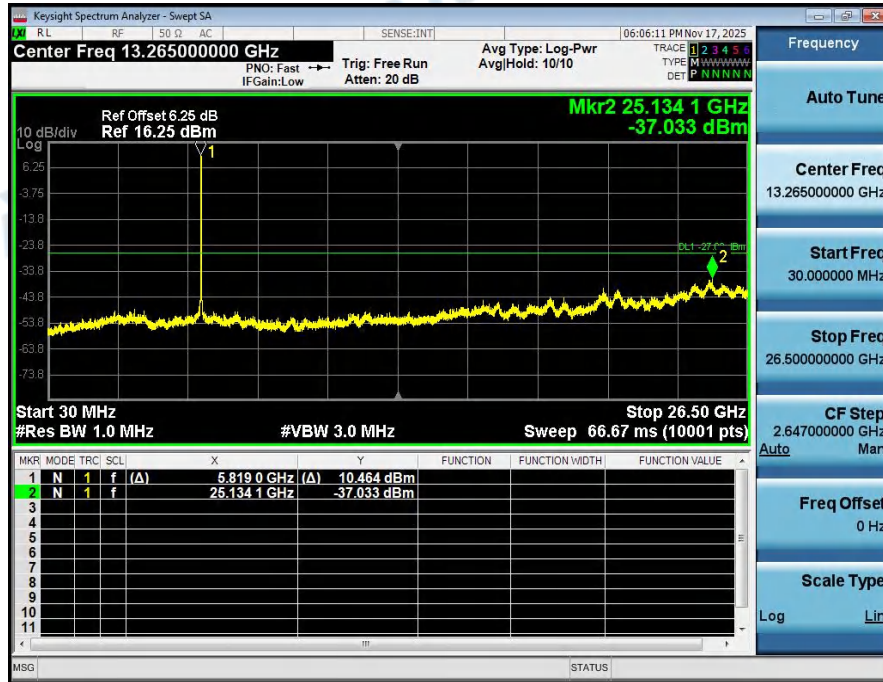


Spurious_Emission_NVNT_ANT1_802_11ac(VHT20)_5745

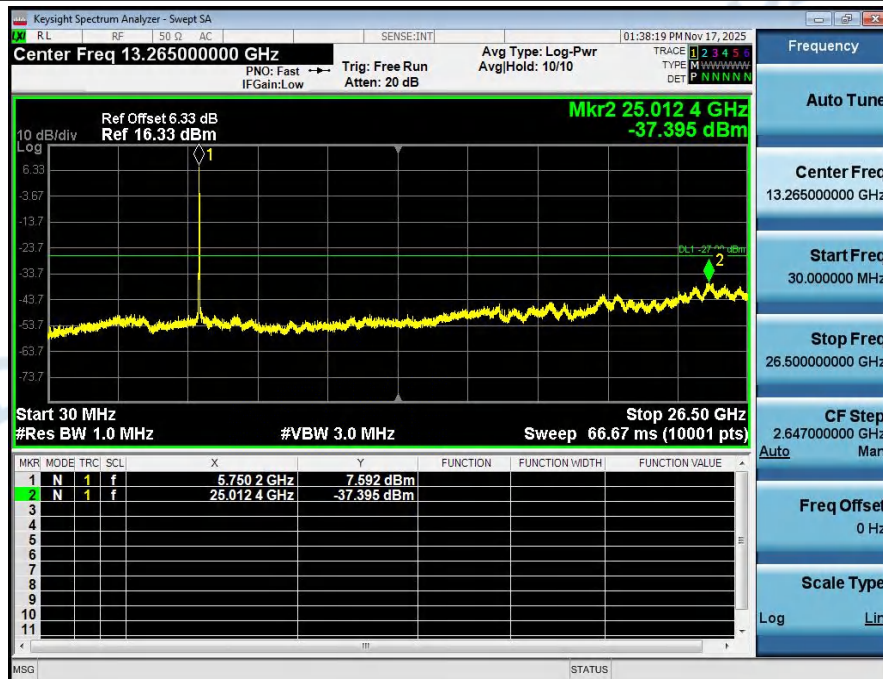


Spurious_Emission_NVNT_ANT1_802_11ac(VHT20)_5785

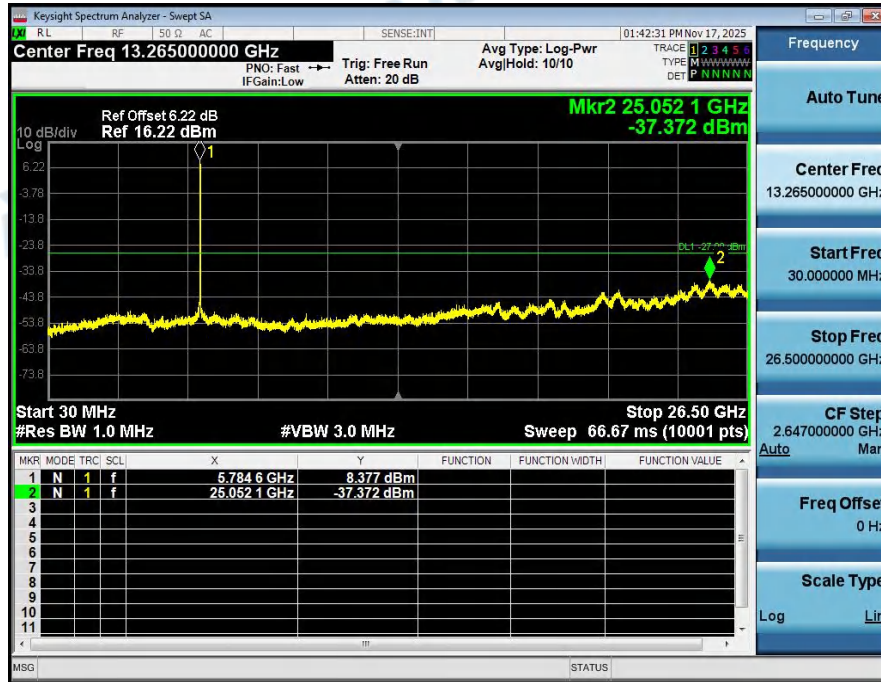


Spurious_Emission_NVNT_ANT1_802_11ac(VHT20)_5825

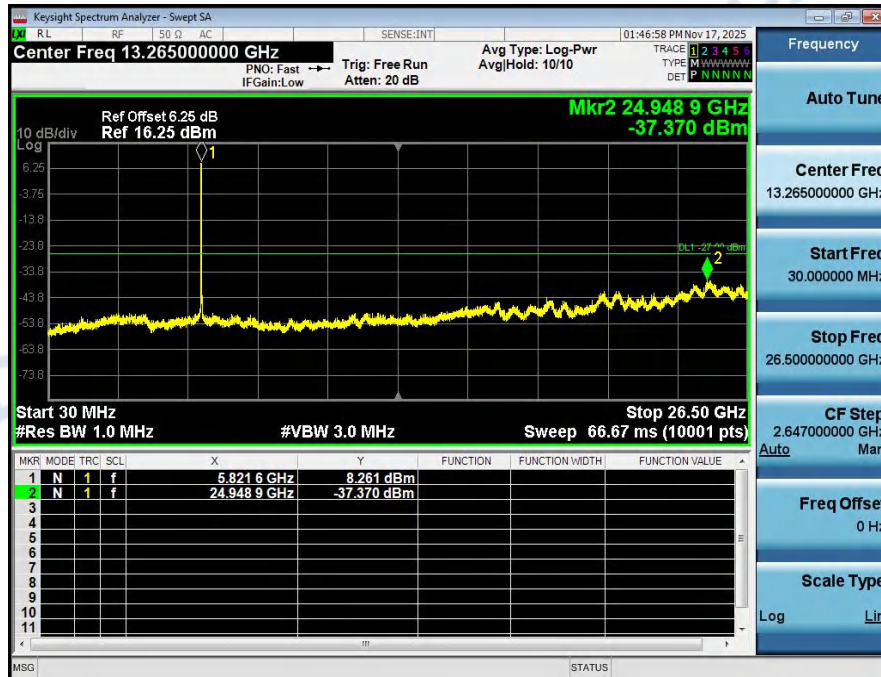


Spurious_Emission_NVNT_ANT1_802_11n(HT40)_5755

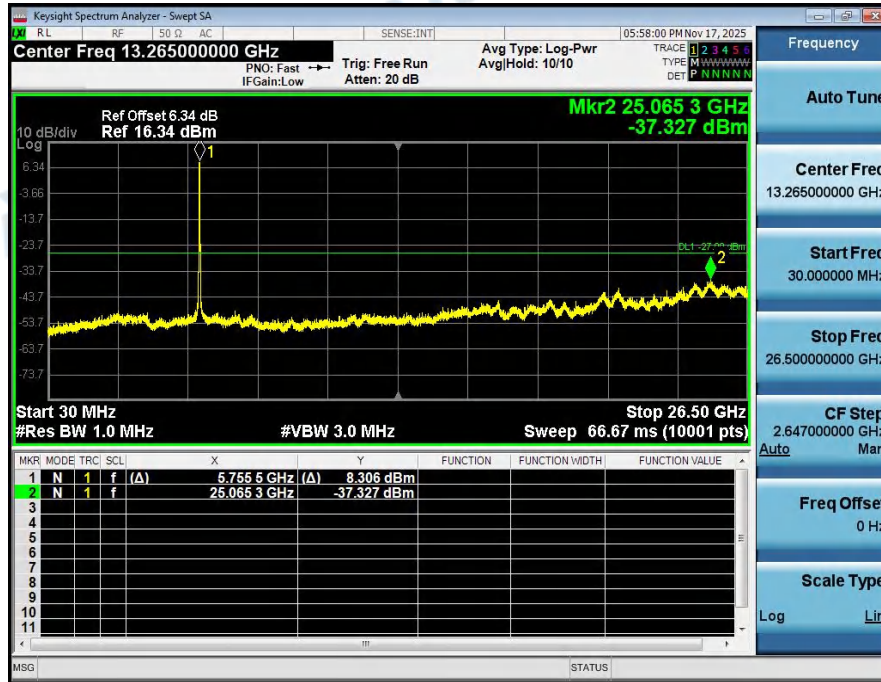


Spurious_Emission_NVNT_ANT1_802_11n(HT40)_5795

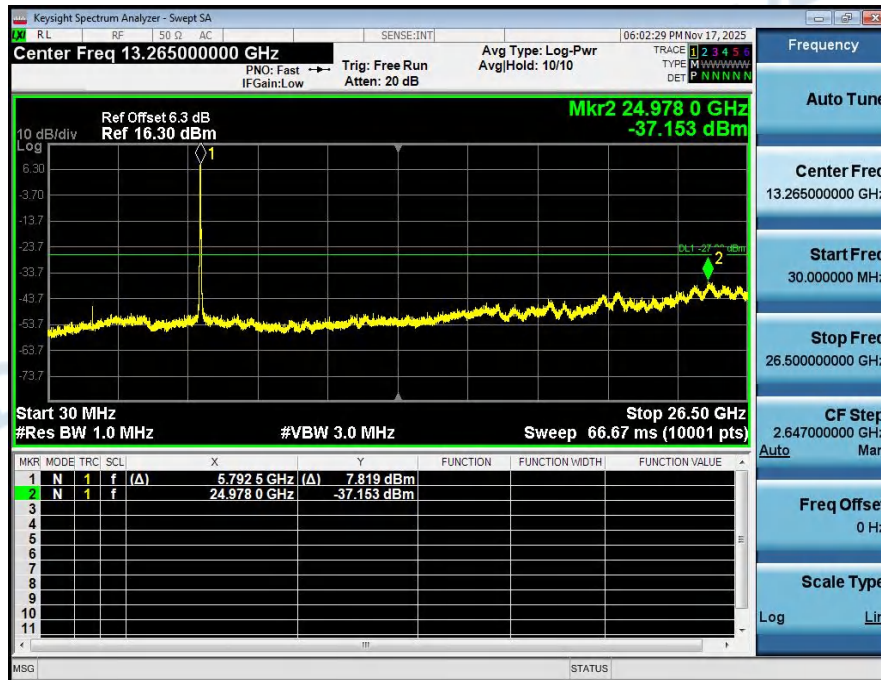


Spurious_Emission_NVNT_ANT1_802_11ac(VHT40)_5755

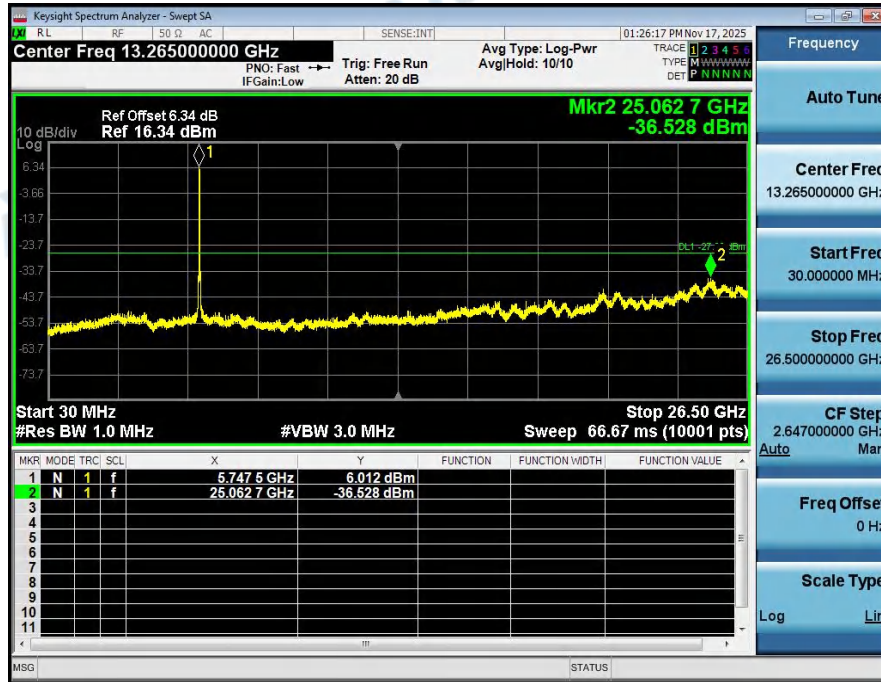

Spurious_Emission_NVNT_ANT1_802_11ac(VHT40)_5795

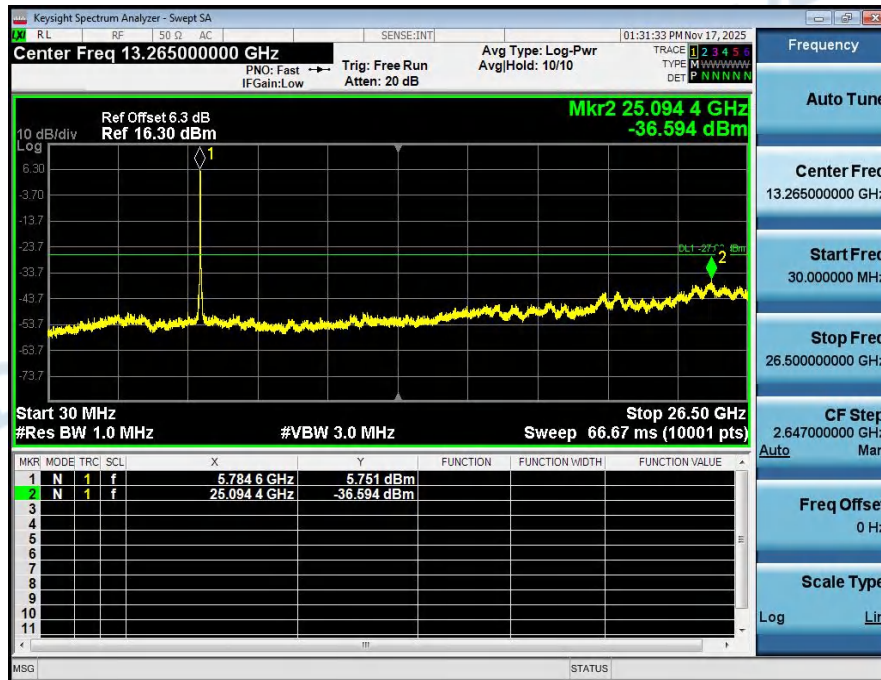

Spurious_Emission_NVNT_ANT1_802_11ac(VHT80)_5775

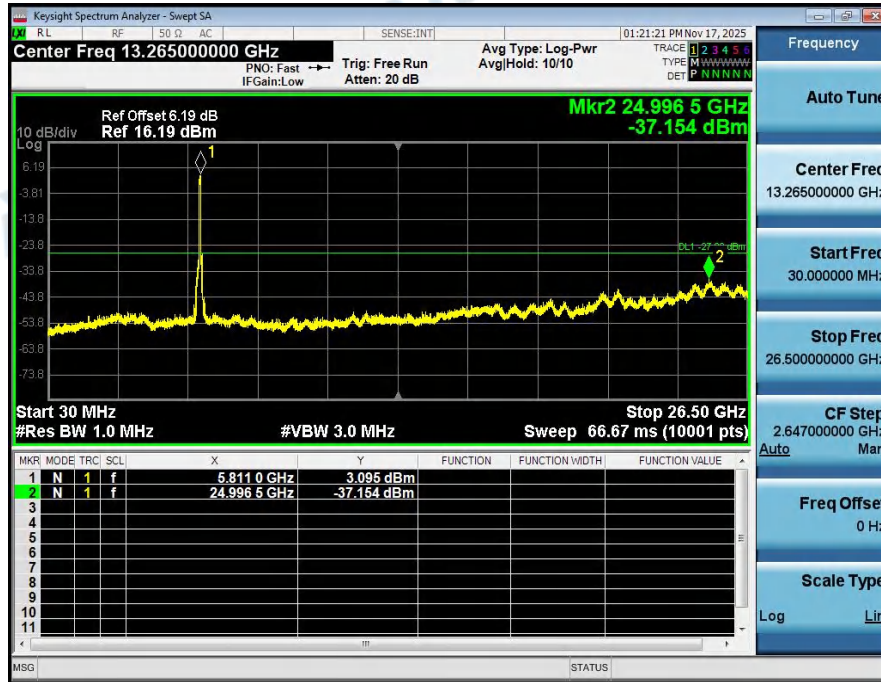

8. Frequency Stability

Condition	Antenna	Modulation	Frequency (MHz)	Fc(MHz)	Fl(MHz)	Fh(MHz)	Limit(MHz)	Result
55degrees C&&3.80V	ANT1	802.11a	5745.00	5744.954	5736.592	5753.316	5725~5850	Pass
45degrees C&&3.80V	ANT1	802.11a	5745.00	5744.958	5736.720	5753.196	5725~5850	Pass
35degrees C&&3.80V	ANT1	802.11a	5745.00	5744.964	5736.804	5753.124	5725~5850	Pass
25degrees C&&3.80V	ANT1	802.11a	5745.00	5744.964	5736.864	5753.064	5725~5850	Pass
15degrees C&&3.80V	ANT1	802.11a	5745.00	5744.964	5736.932	5752.996	5725~5850	Pass
5degrees C&&3.80V	ANT1	802.11a	5745.00	5744.970	5736.992	5752.948	5725~5850	Pass
-5degrees C&&3.80V	ANT1	802.11a	5745.00	5744.978	5737.056	5752.900	5725~5850	Pass
-15degrees C&&3.80V	ANT1	802.11a	5745.00	5744.992	5737.124	5752.860	5725~5850	Pass
25degrees C&&4.37V	ANT1	802.11a	5745.00	5744.986	5737.176	5752.796	5725~5850	Pass
25degrees C&&3.80V	ANT1	802.11a	5745.00	5744.994	5737.220	5752.768	5725~5850	Pass
25degrees C&&3.23V	ANT1	802.11a	5745.00	5744.996	5737.284	5752.708	5725~5850	Pass
55degrees C&&3.80V	ANT1	802.11a	5785.00	5784.968	5776.656	5793.280	5725~5850	Pass
45degrees C&&3.80V	ANT1	802.11a	5785.00	5784.964	5776.780	5793.148	5725~5850	Pass
35degrees C&&3.80V	ANT1	802.11a	5785.00	5784.954	5776.840	5793.068	5725~5850	Pass
25degrees C&&3.80V	ANT1	802.11a	5785.00	5784.948	5776.904	5792.992	5725~5850	Pass
15degrees C&&3.80V	ANT1	802.11a	5785.00	5784.952	5776.964	5792.940	5725~5850	Pass
5degrees C&&3.80V	ANT1	802.11a	5785.00	5784.948	5777.028	5792.868	5725~5850	Pass
-5degrees C&&3.80V	ANT1	802.11a	5785.00	5784.958	5777.092	5792.824	5725~5850	Pass
-15degrees C&&3.80V	ANT1	802.11a	5785.00	5784.972	5777.136	5792.808	5725~5850	Pass
25degrees C&&4.37V	ANT1	802.11a	5785.00	5784.964	5777.188	5792.740	5725~5850	Pass
25degrees C&&3.80V	ANT1	802.11a	5785.00	5784.952	5777.252	5792.652	5725~5850	Pass
25degrees C&&3.23V	ANT1	802.11a	5785.00	5784.964	5777.304	5792.624	5725~5850	Pass
55degrees C&&3.80V	ANT1	802.11a	5825.00	5824.950	5816.612	5833.288	5725~5850	Pass
45degrees C&&3.80V	ANT1	802.11a	5825.00	5824.930	5816.720	5833.140	5725~5850	Pass
35degrees C&&3.80V	ANT1	802.11a	5825.00	5824.936	5816.804	5833.068	5725~5850	Pass
25degrees C&&3.80V	ANT1	802.11a	5825.00	5824.948	5816.860	5833.036	5725~5850	Pass
15degrees C&&3.80V	ANT1	802.11a	5825.00	5824.938	5816.932	5832.944	5725~5850	Pass
5degrees C&&3.80V	ANT1	802.11a	5825.00	5824.934	5816.988	5832.880	5725~5850	Pass
-5degrees C&&3.80V	ANT1	802.11a	5825.00	5824.938	5817.048	5832.828	5725~5850	Pass
-15degrees C&&3.80V	ANT1	802.11a	5825.00	5824.922	5817.088	5832.756	5725~5850	Pass
25degrees C&&4.37V	ANT1	802.11a	5825.00	5824.922	5817.148	5832.696	5725~5850	Pass
25degrees C&&3.80V	ANT1	802.11a	5825.00	5824.928	5817.204	5832.652	5725~5850	Pass
25degrees C&&3.23V	ANT1	802.11a	5825.00	5824.930	5817.260	5832.600	5725~5850	Pass

***** End of Report *****