



V8plus 操作说明

V8plus instructions

产品描述: 头盔蓝牙对讲耳机主要用于户外活动、职业使用或特定工作场景中，提供实时的 2 人或者多人无线通信功能，方便用户与他人保持联系和沟通；同时提供音频播放功能、语音导航、免提通话等功能，方便用户在不同场景中使用。优秀的防水设计和降噪功能可以适应不同的户外工作或运动环境。

Product description: The helmet Bluetooth intercom headset is primarily designed for outdoor activities, professional engagements, or specialized work environments, offering real-time wireless communication capabilities for two or more individuals, thereby facilitating seamless interaction and connectivity amongst users. Equipped with functionalities such as audio playback, voice-guided navigation, and hands-free calling, it offers convenience for users across various contexts. The exceptional waterproof design and effective noise cancellation allow for various outdoor work or sports settings.

注意事项:

1: 在空旷环境使用信号最佳，避开变压器，高压线，信号基站等设备；

Notes: 1: Optimal headphone performance can be achieved in open spaces, while avoiding the proximity of devices such as transformers, high-voltage power lines, and signal base stations;

2: 产品标示的信号距离是最远距离，实际使用中受到周围环境影响，信号距离会有变化；

2: The signal distance indicated for the product represents the maximum range, but in actual usage, it may be subject to environmental factors that can affect the signal range;

3: 麦克风和喇叭单元接近时，有可能产生共鸣，拉开距离就可以；


3: When the microphone and speaker units are nearby, resonance may occur. Simply increase the distance between them to prevent this;

一、按键说明: (加指示图)

I. Button instructions: (a diagram attached)

1: 电话键 2: 音量“+” 3: 音量“--” 4: 对讲按键 A、B、C、D、E、F、G

1: Telephone button 2: Volume "+" 3: Volume "--" 4: Intercom button : A、B、C、D、E、F、G

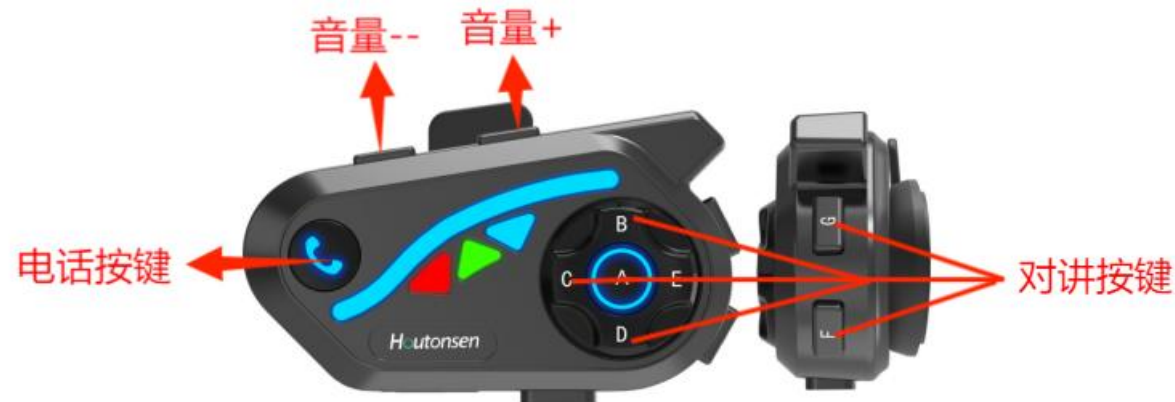

二、开机和关机:

II. Power On and Off:

1: 开机/关机: 长按“电话按键”和“对讲按键 A” 3 秒开机, 有提示音和播报当前剩余电量。

1: Power on/off: long press“Phone button” and“Intercom button A” 3 seconds boot, there is a sound and broadcast the current remaining power.

三、提示语言切换: 关机后, 同时按住“对讲按键 A”和“音量+” 2 秒, 可进行语音切换。

III. Tips for language switching: To switch the language, press and hold the "Intercom button A" and the "Volume+" button simultaneously for 2s after shutting down.

四、蓝牙功能

IV. Bluetooth functions

1: 蓝牙信号激活: 开机后, 长按电话键 3 秒, 提示音“配对”, 指示灯红蓝交替闪, 此时激活蓝牙信号, 可进行连接。

1: **Bluetooth signal activation: Upon powering on, press and hold the Telephone button for 3s. You will hear a prompt saying "Pairing" and the indicator light will flash alternately in red and blue. At this point, the Bluetooth signal becomes active, allowing for connection.**

2: 对讲模式下, 如何配对蓝牙: 对讲模式下单击任意对讲键, 挂断对讲通话, 指示灯蓝色慢闪; 长按电话按键, 指示灯红蓝交替闪, 此时可以进行蓝牙配对。

2: **How to pair Bluetooth In the intercom mode: In the intercom mode, click any intercom button, hang up the intercom call, the indicator light blue slow flash; long press the phone key, the indicator light red and blue flash alternately, at this time can be paired with Bluetooth.**

3: 对讲模式下, 蓝牙和对讲两个模式切换方法: 单击对讲键挂断对讲, 耳机自动进入蓝牙模式; 再次单击对讲按键, 切换为对讲模式。

3: **How to switch between the Bluetooth and intercom modes in the intercom modes: Simply press the Intercom button to end the intercom session, and the headset will automatically enter the Bluetooth mode; Press the intercom button again to switch to intercom mode.**

4: 有配对记录的耳机, 开机之后, 单击对讲按键, 等待 1~2 秒, 可自动连接上对讲信号。

4: **Headset with pairing record, after powering on, click the intercom button, wait for 1~2 seconds, and the intercom signal can be automatically connected.**

5: 清除蓝牙和对讲配对记录: 关机后, 对讲按键 A、“音量+”、“音量--”三个按键同时按 5 秒, 指示灯亮起, 提示音“清除配对记录”。

5: **Clear Bluetooth and intercom pairing records: After powering off, the Intercom button A, "volume +" and "volume--" three buttons are pressed at the same time for 5 seconds, the indicator light is on, and the prompt tone is "clear pairing record".**

6: 蓝牙模式切换到对讲模式: 单击任意对讲键。

6: **Switch the Bluetooth mode to the intercom mode: Click any Intercom button.**

五、对讲功能

V. Intercom function

1: 对讲模式配对操作:

1: **Pairing in the speaker mode :**

1) 选择一台对讲耳机当主机, 其他的作为副机, 通过对讲键 A、B、C、D、E、F、G 对副机进行编号, 具体操作如下:

1) Choose an intercom headset as the host, the other as the auxiliary, through the intercom keys A, B, C, D, E, F, G to number the auxiliary, the specific operation is as follows:

1、主机与副机 A 配对操作：主机长按对讲按键 A，指示灯红蓝色交替闪烁，第一台副机长按对讲按键 A，指示灯红蓝色交替闪烁，此时主机与副机进行对讲信号配对，1~2 秒后信号配对成功，信号灯绿色亮起，提示音：对讲已配对，这一台副机的编号是 A；

1. Pairing operation between the host and the auxiliary machine A: the host presses and holds the intercom button A, the indicator light flashes red and blue alternately, the first auxiliary machine presses the intercom button A, the indicator light flashes red and blue alternately, at this time, the host and the auxiliary machine carry out intercom signal pairing, 1~2 seconds later, the signal pairing is successful, the signal light is green, and the prompt sound: the intercom has been paired, and the number of this auxiliary machine is A;

2、主机与副机 B 配对操作：断开与副机 A 的对讲连接，主机长按对讲按键 B，指示灯红蓝色交替闪烁，第二台副机长按对讲按键 B，指示灯红蓝色交替闪烁，此时主机与副机进行对讲信号配对，1~2 秒后信号配对成功，信号灯绿色亮起，提示音：对讲已配对，这一台副机的编号是 B；

2. The host and the auxiliary machine B pairing operation: disconnect the intercom connection with the auxiliary machine A, the host long press the intercom button B, the indicator light flashes red and blue alternately, the second auxiliary pilot presses the intercom button B, the indicator light flashes red and blue alternately, at this time, the host and the auxiliary machine carry out intercom signal pairing, 1~2 seconds later, the signal pairing is successful, the signal light is green, and the prompt sound: the intercom has been paired, and the number of this auxiliary machine is B;

3、主机与副机 C 配对操作：断开与副机 B 的对讲连接，主机长按对讲按键 C，指示灯红蓝色交替闪烁，第三台副机长按对讲按键 C，指示灯红蓝色交替闪烁，此时主机与副机进行对讲信号配对，1~2 秒后信号配对成功，信号灯绿色亮起，提示音：对讲已配对，这一台副机的编号是 C；

3. Pairing operation between the host and the auxiliary machine C: disconnect the intercom connection with the auxiliary machine B, the host press and hold the intercom button C, the indicator light flashes red and blue alternately, the third auxiliary captain presses the intercom button C, the indicator light flashes red and blue alternately, at this time the host and the auxiliary machine carry out intercom signal pairing, 1~2 seconds later, the signal pairing is successful, the signal light is green, and the prompt sound: the intercom has been paired, and the number of this auxiliary machine is C;

4、主机与副机 D 配对操作：断开与副机 C 的对讲连接，主机长按对讲按键 D，指示灯红蓝色交替闪烁，第四台副机长按对讲按键 D，指示灯红蓝色交替闪烁，此时主机与副机进行对讲信号配对，1~2 秒后信号配对成功，信号灯绿色亮起，提示音：对讲已配对，这一台副机的编号是 D；

4. Pairing operation between the host and the auxiliary machine D: disconnect the intercom connection with the auxiliary machine C, the host presses and holds the intercom button D, the indicator light flashes red and blue alternately, the fourth auxiliary machine presses the intercom button D, the indicator light flashes red and blue alternately, at this time the host and the auxiliary machine carry out intercom signal pairing, 1~2 seconds after the signal pairing is successful, the signal light is green, and the prompt sound: the intercom has been paired, and the number of this auxiliary machine is D;

5、主机与副机 E 配对操作：断开与副机 D 的对讲连接，主机长按对讲按键 E，指示灯红蓝色交替闪烁，第五台副机长按对讲按键 E，指示灯红蓝色交替闪烁，此时主机与副机进行对讲信号配对，1~2 秒后信号配对成功，信号灯绿色亮起，提示音：对讲已配对，这一台副机的编号是 E；

5. The host and the auxiliary machine E pairing operation: disconnect the intercom connection with the auxiliary machine D, the host press and hold the intercom button E, the indicator light flashes red and blue alternately, the fifth co-pilot presses the intercom button E, the indicator light flashes red and blue alternately, at this time, the host and the auxiliary machine carry out intercom signal pairing, 1~2 seconds after the signal pairing is successful, the signal light is green, prompt tone: the intercom has been paired, the number of this auxiliary machine is E;

6、依此类推，直至主机的 7 个对讲信号完全配好；

6. And so on, until the 7 intercom signals of the host are fully matched;

2: 主机副机之间相互呼叫的操作：

2: The operation of calling each other between the host and the slave:

1) 主机呼叫副机的操作：

1) The operation of the host calling the slave:

1、主机通过对讲按键 A、B、C、D、E、F、G 呼叫对应的副机

1. The host calls the corresponding auxiliary machine through the intercom buttons A, B, C, D, E, F, G

2、蓝牙模式下，单击对讲按键就可以呼叫对应的副机

2. In Bluetooth mode, click the intercom button to call the corresponding auxiliary machine

3、对讲模式下，需要先单击任意对讲按键断开当前的对讲信号，再单击对讲按键呼叫对应的副机

3. In intercom mode, you need to click any intercom button to disconnect the current intercom signal, and then click the intercom button to call the corresponding auxiliary machine

2) 副机呼叫主机的操作：

2) The operation of the secondary machine to call the host:

1、副机单击编号对应的对讲按键就可以呼叫主机

1. The auxiliary machine can call the host by clicking the intercom button corresponding to the number

2、如果主机对讲信号未占用时，可直接接通对讲

2. If the host intercom signal is not occupied, the intercom can be directly connected

3、如果主机对讲信号被占用时，需要主机单击电话按键接通对讲，方可接通对讲信号

3. If the host intercom signal is occupied, the host needs to click the telephone button to connect the intercom before the intercom signal can be connected

3: 与不带对讲的耳机产生对讲操作:

3: Intercom operations with headsets without a built-in microphone:

1) 开机后, 长按对讲键 2 秒, 指示灯: 红蓝灯交替闪, 提示音: “配对”, 不需要任何按键操作, 配对成功后, 绿色指示灯亮起;

1) Upon powering on, press and hold the Intercom button for 2s. The indicator light will flash alternately in red and blue, accompanied by a prompt tone "Pairing." No need for any keystrokes. After a successful pairing, the green indicator will light up.

2) 不带对讲的蓝牙耳机也要在蓝牙搜索状态, 不需要任何按键操作, 等待配对成功即可。

2) Bluetooth headset without intercom should also search for status in Bluetooth, no need for any key operation, just wait for the pairing to be successful.

4: 对讲模式下, 超出对讲距离, 自动进入对讲待机状态, 等待进入对讲信号范围, 自动连接。

4: While in intercom mode, if the communication distance exceeds the operational range, the device will automatically enter standby mode, awaiting reentry into the intercom signal coverage. Subsequently, it will establish an automatic connection.

5: 有配对记录的耳机, 开机之后, 单击对应的对讲按键就可以重新对讲。

5: Headphones with pairing records, after powering on, click the corresponding intercom button to re-intercom.

6: 清除蓝牙和对讲配对记录: 关机后, 对讲按键 A、“音量+”、“音量--”三个按键同时按 5 秒, 指示灯亮起, 提示音“清除配对记录”。

6: Clear Bluetooth and intercom pairing records: After powering off, the Intercom button A, "volume +" and "volume--" three buttons are pressed at the same time for 5 seconds, the indicator light is on, and the prompt tone is "clear pairing record".

7: 蓝牙模式切换到对讲模式: 单击对讲键。

7: Switch from Bluetooth mode to intercom mode: Press the intercom button.

六、电话功能:

VI. Telephone functions:

1: 接听/挂断电话: 来电时, 单击电话键, 即可接听或者挂断来电;

1: Answer/hang up: When receiving a phone call, simply press the Telephone button to answer or end the call;

2: 拒接电话: 来电时, 长按 2 秒电话键, 即可拒接电话;

2: To reject a call: simply double-tap the Telephone button when you receive an incoming call;

3: 来电自动接听: 来电时, 响铃 8 秒后自动接听电话;

3: Automatic call answering: Upon receiving an incoming call, the headphones will automatically answer after 8s of ringing;

4: 语音助手功能: 三击电话按键, 开启语音助手功能;

4: Voice assistant: Triple tap the phone button to turn on the voice assistant function;

七、音乐播放和音乐分享功能:

VII. Music playback and music sharing:

1: 音乐播放:

1: Music playback:

1) 音量加减: 单击音量 “+” 加音量, 单击音量 “-” 减音量

Adjusting volume: Press the "+" button to increase the volume. Press the "-" button to decrease the volume.

2) 切换歌曲: 长按 2 秒音量 “+” 即下一首, 长按 2 秒音量 “-” 即上一首

Change the song: Press and hold the volume "+" for 2s to skip to the next track, and press and hold the volume "-" for 2s to go back to the previous track.

3) 暂停播放: 单击电话按键

Pause playback: Press the Telephone button.

2: 音乐分享:

2: Music sharing:

1) 对讲模式下, 对讲耳机同时连接对讲和蓝牙信号之后, 在音乐播放时, 同时 “音量+” 和 “音量-” 按键, 提示音: “音乐分享”, 即可把音乐分享给另外一台对讲耳机。

1) Bluetooth mode, after the intercom earphone is connected to the intercom and Bluetooth signal at the same time, when the music is playing, Press and hold the Volume+ and Volume- buttons at the same time, and the prompt tone: "Music Sharing", you can share the music to another intercom earphone.

2) 音乐分享只能分享给最后一个对讲的那台耳机, 比如主机和副机 B 进行对讲, 音乐分享只能分享给副机 B, 如果要分享给副机 C, 那就需要先与副

机 C 进行对讲连接，然后再进行音乐分享；

2) Music sharing can only be shared with the last intercom earphone, such as the host and auxiliary B for intercom, music sharing can only be shared with secondary machine B, if you want to share with auxiliary machine C, then you need to connect with the auxiliary machine C first, and then share the music;

八、LED 灯开启和关闭：开机后，同时按住“音量+”和“电话按键”，LED 灯切换一种亮灯模式，总共有 4 种模式。

VIII. LED light on and off: After powering on, Press and hold the "Volume +" and "Phone buttons" at the same time, and the LED light switches to one light mode, there are 4 modes in total.

九、恢复出厂设置：关机状态下，对讲按键 A、音量“+”、音量“-”三个按键同时长按 5 秒，指示灯亮起，提示音“清除配对记录”。

IX. Resetting: Clear Bluetooth and intercom pairing records: After powering off, the Intercom button A, "volume +" and "volume--" three buttons are pressed at the same time for 5 seconds, the indicator light is on, and the prompt tone is "clear pairing record".

十、产品信息：

X. Product information:

产品名称 Product name	对讲耳机 Intercom headset
蓝牙名称 Bluetooth name	V8plus
蓝牙版本 Bluetooth version	V5.2
耳机重量 Weight	48g (±5g)
耳机尺寸 Dimensions	
蓝牙协议 Bluetooth protocol	

电池类型 Type of battery	聚合物锂电池 Polymer lithium battery
电池容量 Battery capacity	850mAH
充电时间 Charging duration	2 小时 2hrs
通话时间 Call duration	25 小时 25hrs
待机时间 Standby duration	600 小时 600hrs
防水等级 Waterproof rating	IP67
是否与其他品牌对讲耳机连接 Can it be connected to intercom headsets of other brands?	可以 Yes

FCC Statement:

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. Caution: Any changes or modifications not expressly approved by the party