


TRONICMASTER

Digital Calendar


Powered by **AiMOR**

Model: **DZRL-01**

Please read this user manual before use

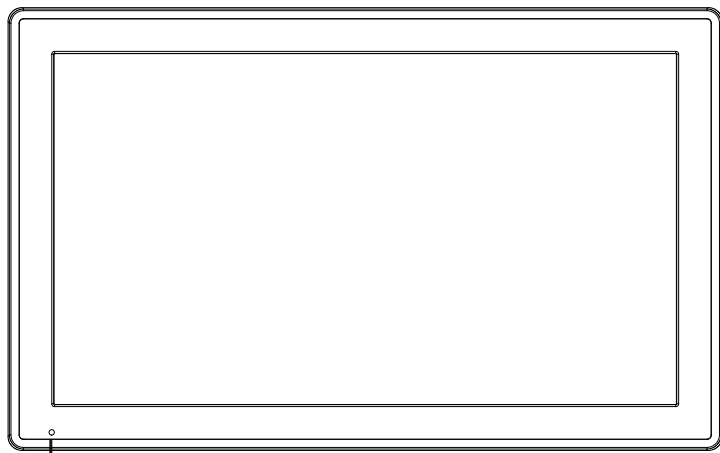

Light sensing

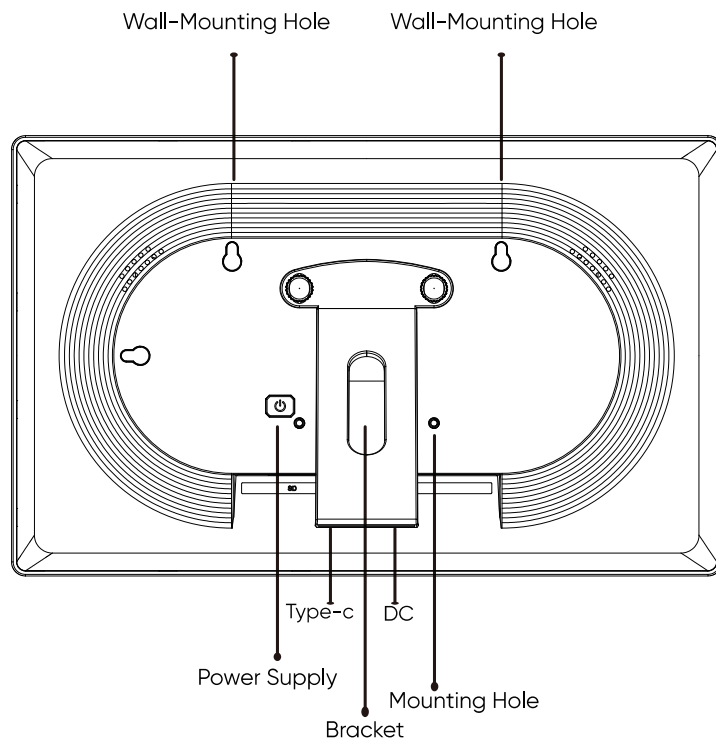

Power Button

- **To Turn On:** Press and hold the power button for approximately 5 seconds until the device powers on.
- **To Turn Screen On/Off:** While the device is on, briefly press the power button once to toggle the screen on or off.
- **To Turn Off:** Press and hold the power button for about 2 seconds to access the power-off menu on the screen.

Important Safety Note

To prevent potential damage, do not unplug the power adapter from the device while it is powered on.

Product Specification	
Screen	15.6" Touchscreen (16:9)
Resolution	1920*1080 FHD
WI-FI	2.4GHz
CPU	A333
Memory	3GB DDR3
Storage*	32G

Before You Begin Installation

Choosing the Right Location

- 1 Mounting Height:** For comfortable viewing, install the device at eye level for all intended users.
- 2 Wall Space:** Ensure the chosen location has ample space to accommodate the device in either horizontal or vertical orientation.
- 3 Wall Safety:** Do not drill into areas containing wall studs, electrical wiring, or plumbing. If unsure, consult a building plan or professional.

Pre-Installation Safety Check

Power Off: Unplug the device from the electrical outlet.

Dry Environment: Ensure the installation area and your hands are completely dry.

Required tools



Electric Drill




Hammer




Wall Protection Tape

Other accessories inside the packaging box



Power Adapter



Bracket



Two Screws



Two Expansion Anchors

The included screws and expansion anchors are suitable for drywall, brick, concrete, or tile walls.

Download AiMOR app on your mobile phone

To share your schedule with compatible calendar devices worldwide, please first download the free AiMOR app on your mobile device.

Search for "AiMOR" in the App Store (iOS) or Google Play (Android) to download the AiMOR app.



Tap the device sharing icon "⌘" on the AiMOR Calendar. A pop-up will appear with a unique code, valid for 12 hours.

Next, open the AiMOR app on your phone. Tap the "+" icon in the device tab, enter the code from your AiMOR Calendar, and confirm. Your mobile app will then connect to the device.

You can share this code with friends and family. They can add the AiMOR Calendar to sync schedules, create household chores, and more. There is no limit to the number of connected mobile users.

Bind and Connect Devices


To synchronize your schedule with AiMOR Calendar, you need to connect the AiMOR app to the AiMOR Calendar device. Follow the steps below for connection:



Download the
"AiMOR APP"
through your mobile
phone




Open the calendar's
member manage-
ment settings




Open calendar
sharing



View the calendar
sharing code




Enter the calendar
code in the "AiMOR
APP" to bind the
calendar



You can now
synchronize your
mobile phone with
the calendar

Introduction to Functions on Device Homepage:

Main Functions on Homepage

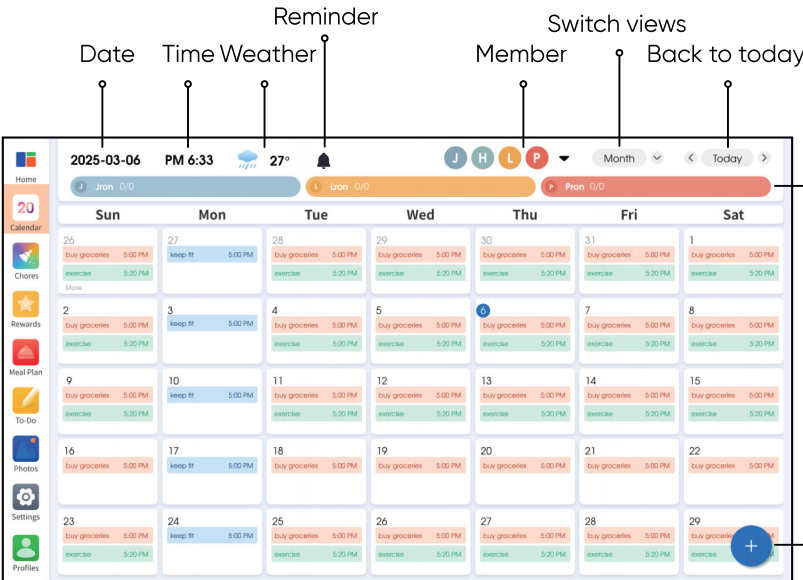


Upload photos


Transmission from mobile to device



Notification

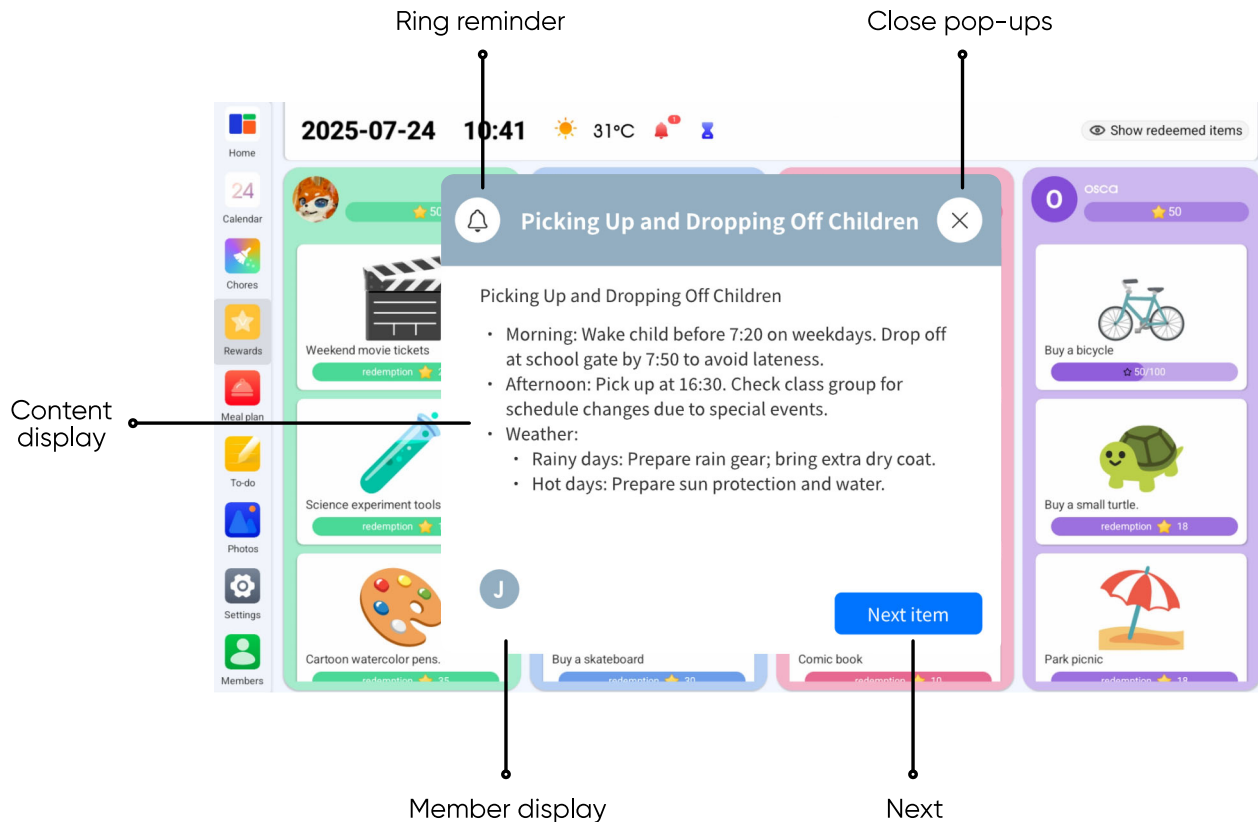


Message notification

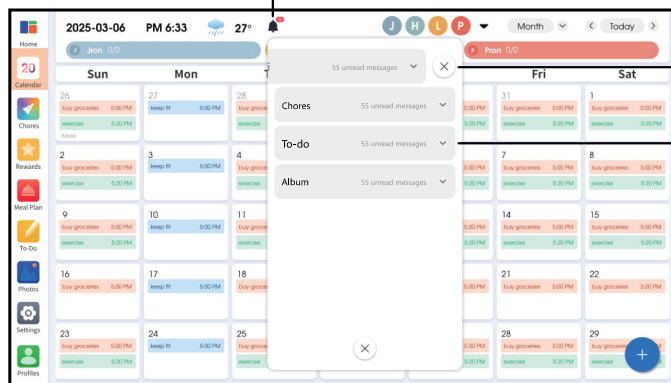

Swipe right to delete

Reminder information category

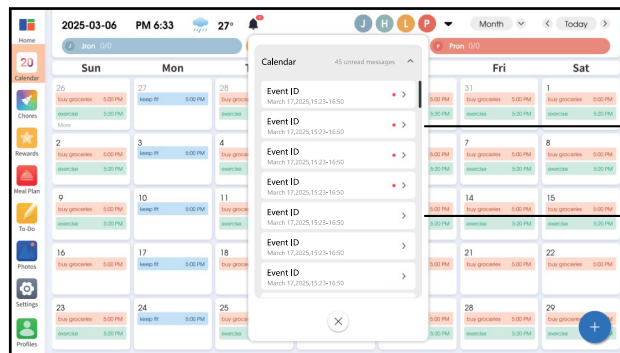


Unread status

Read status

Weather - Set Time Zone


Navigate to Device Settings - General - Weather Location to ensure that the weather positioning is accurate

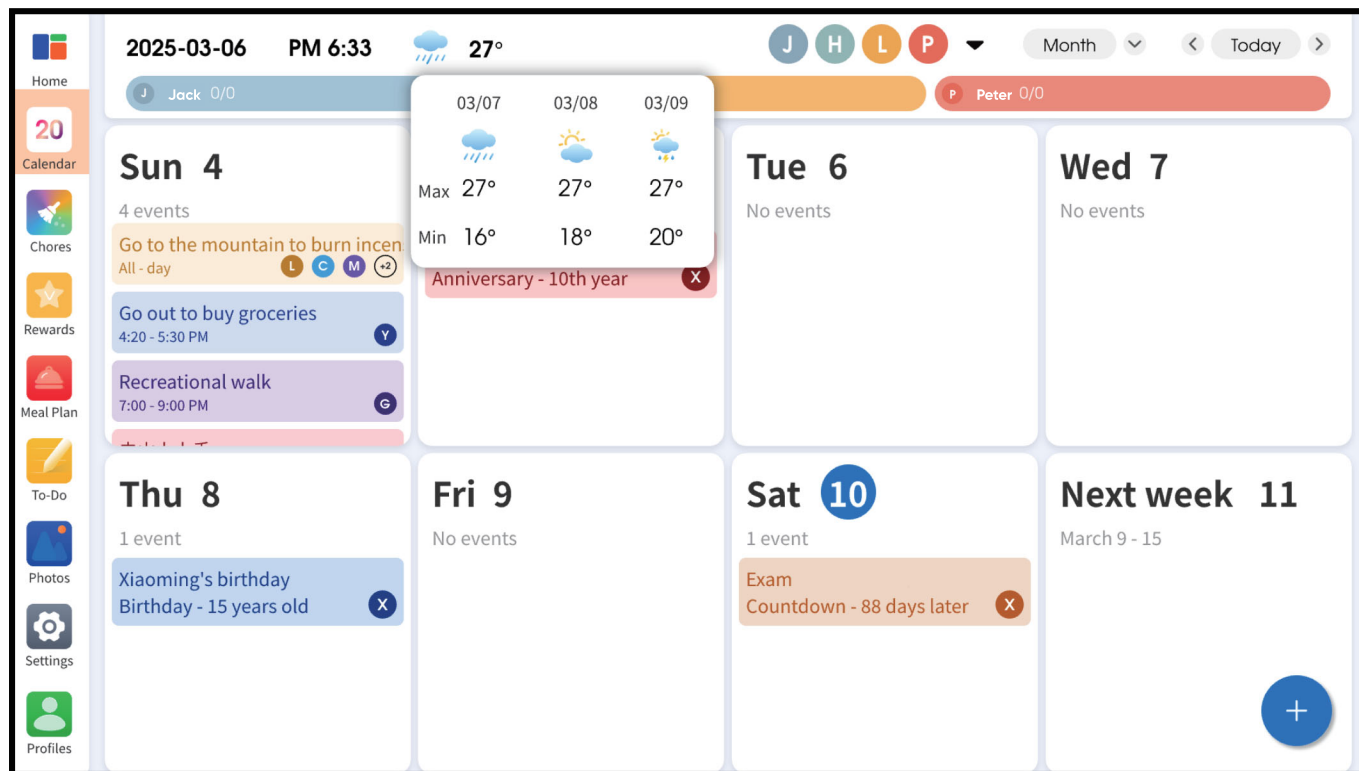

Introduction to Main Functional Pages on Mobile App:


Smart Creation, Star Assignment, Reward Creation, Catering Plans: Smart Recipe Creation, Synchronized Import, Member Management, Photo Upload

Synchronized Import:

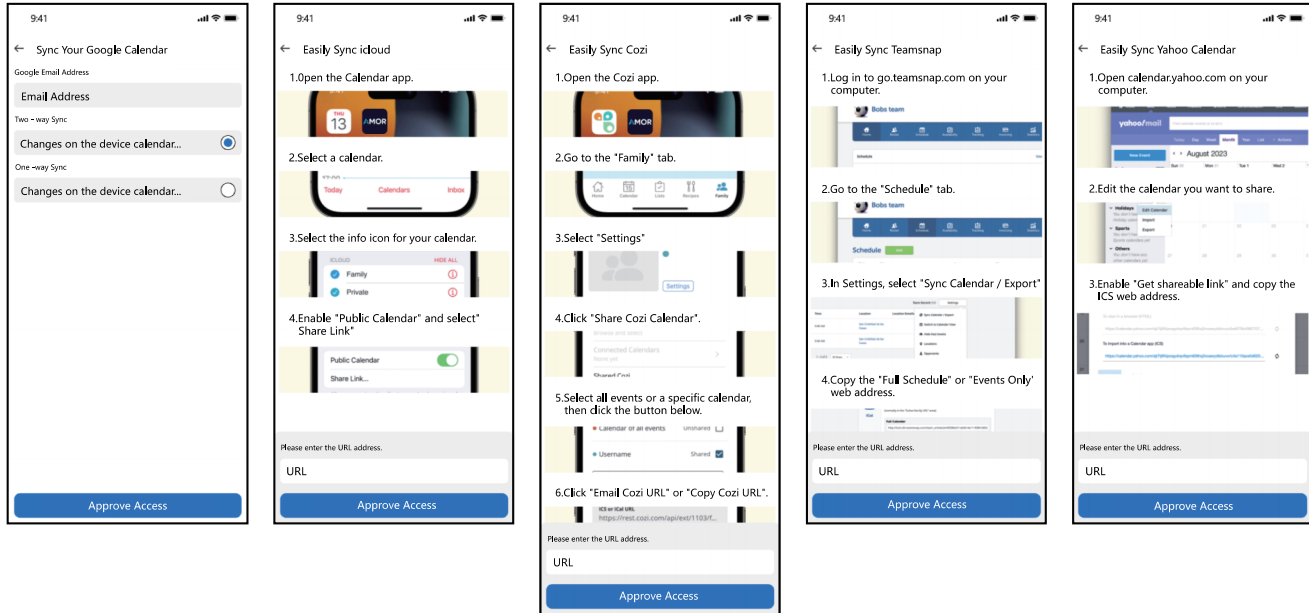

Star Assignment:

Create rewards and set rules together.
When you have collected enough stars, you can redeem our pre-agreed rewards with them! Rewards can be items or a special experience.
Rewards are created by parents on the mobile app, and children can view their rewards and progress on the device.

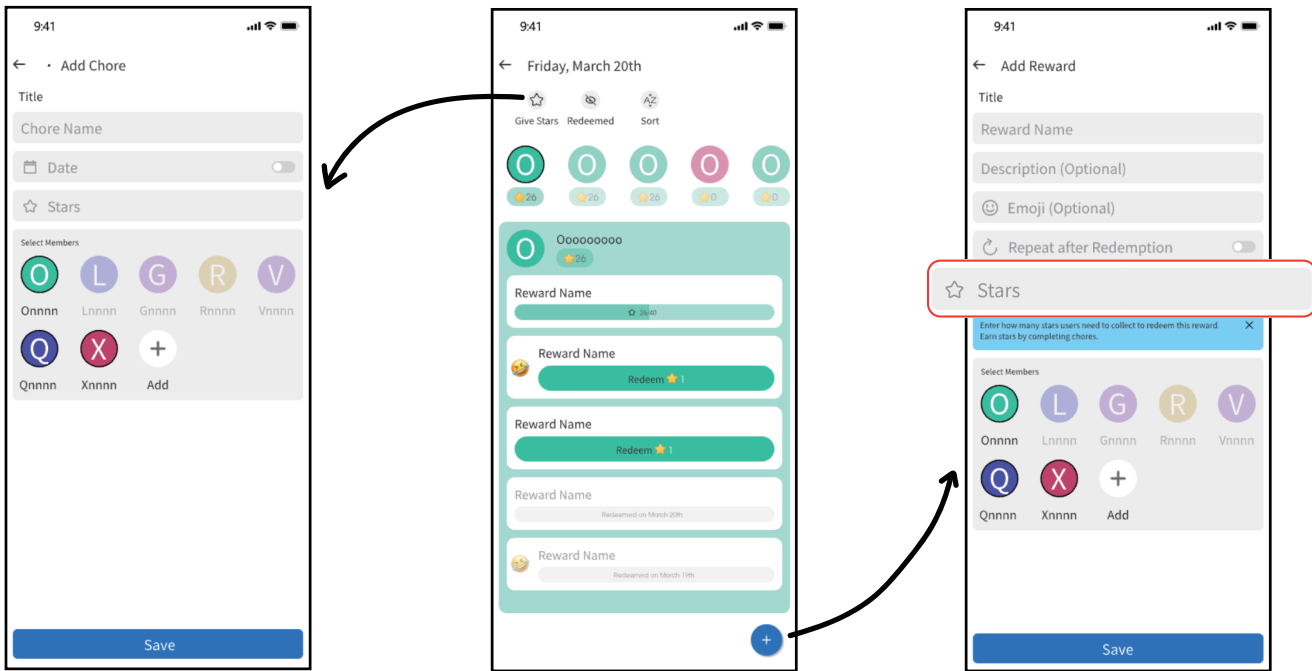

Wi-Fi & Server Status

 Refer to the status icons on your device.

Wi-Fi Icon:

-  (Full Bars): Strong Wi-Fi signal, connected.
-  Not connected to a Wi-Fi network.

Server Icon:

-  Connecting to the server.
-  Disconnected from the server.

Factory Reset

Warning: This Action Cannot Be Undone.

Performing a factory reset will permanently delete all data from your device. This includes all photos, videos, contacts, and personalized settings.

Warranty & Contact

Limited One-Year Warranty

We offer a one-year limited warranty on all products, valid from the original date of purchase and subject to the following terms:

- 1 Coverage:** If a defect in materials or workmanship is found during the warranty period, we will, at our option, repair or replace the device at no charge.
- 2 Exclusions:** This warranty does not cover damage resulting from accident, misuse, liquid exposure, unauthorized modifications, or service by anyone other than our authorized Service Center.
- 2 Limitation of Liability:** We shall not be liable for any incidental or consequential damages arising from the use or inability to use the product.

All information in this manual is current at the time of publication. We reserve the right to make product or documentation changes without prior notice.

Help & About

User guide

Opens the quick start guide that is shown during initial setup of the frame.

Check for Updates

Check for available software updates and download/install them on your frame.

Feedback

We strive to continuously improve our product and user experience. If you have any questions, comments, or suggestions, please reach out to us by email or through the support feature in the AiMOR app.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC warning:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Contact Us

Thanks for choosing our digital photo frame. If you have any questions or problems with our products, feel free to contact our customer support team at

shenhuaShu2018@hotmail.com

We typically respond within 24 hours. Your satisfaction is our priority.

DISCLAIMER

EN: We reserve the right to change product specifications and update this information from time to time.

DE: wir behalten uns das Recht vor, Produktspezifikationen zu ändern und diese Informationen von Zeit zu Zeit zu aktualisieren.



Shenzhen Shen Hua Shu Technology Co., Ltd.
Room 201-11, Building A2, Zhongbaotong, No. 34, Changfa West Road, Dafabu
Community, Bantian Subdistrict, Longgang District, Shenzhen City

Contact Us

For any inquiries, feel free to contact us. We will respond as soon as possible.

E-mail: ShenhuaShu2018@hotmail.com

Manufacturer/Hersteller: Shenzhen Shen Hua Shu Technology Co., Ltd.

Address: Room 201-11, Building A2, Zhongbaotong, No. 34, Changfa West Road, Dafabu Community, Bantian Subdistrict, Longgang District, Shenzhen City