

Appendix RF test data for BLE

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	1.646	1.876	87.74	0.57	0.03
		2440	1.645	1.875	87.73	0.57	0.03
		2480	1.645	1.875	87.73	0.57	0.03

1.2 Test Graph

1.2.1 Ant1

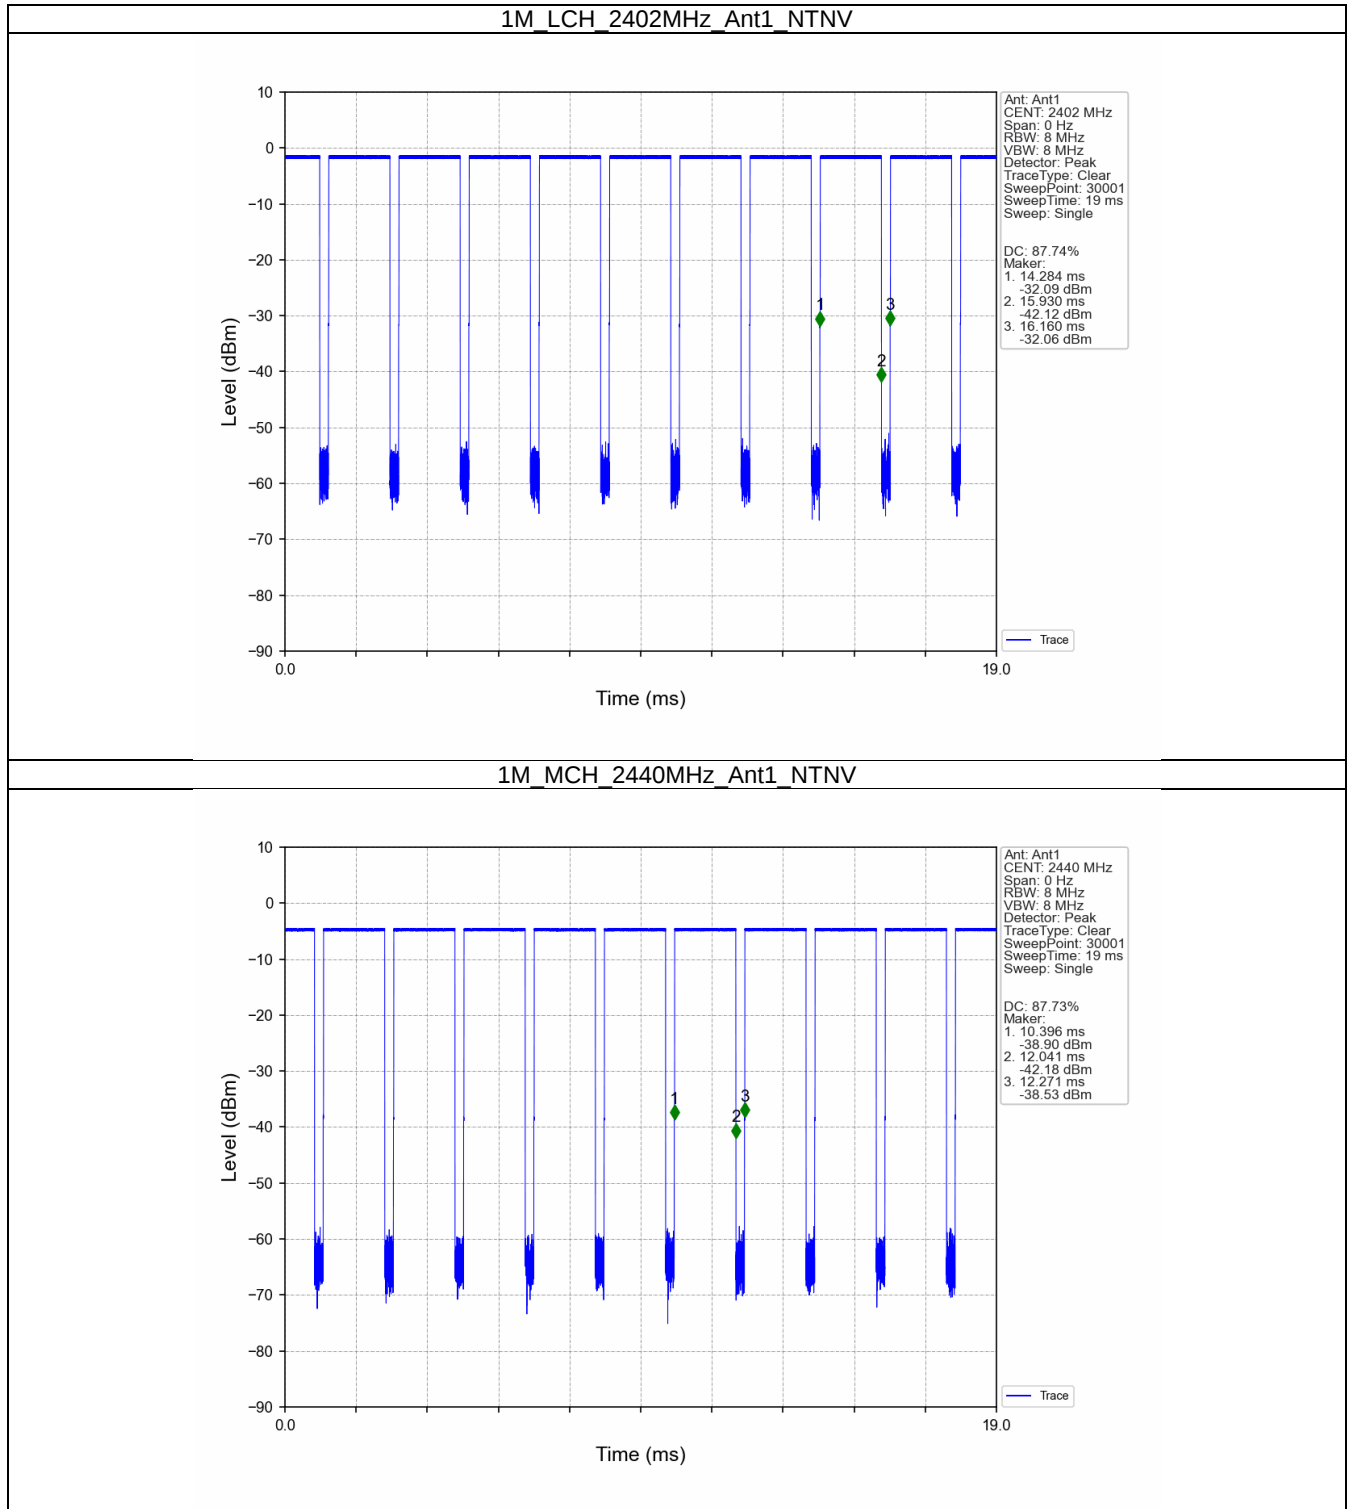

1M_HCH_2480MHz_Ant1_NTNV

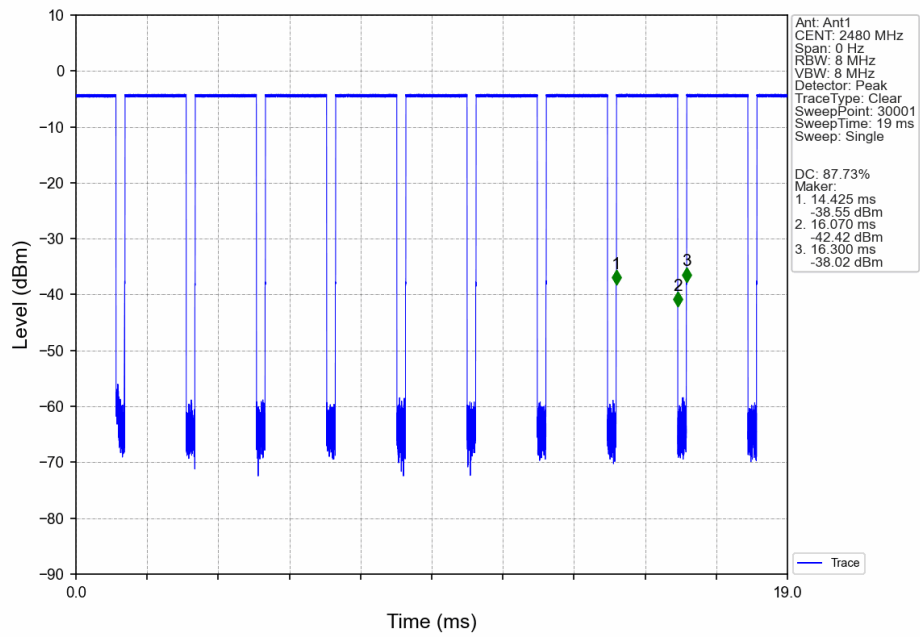

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.016	/	Pass
		2440	1	1.018	/	Pass
		2480	1	1.020	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.670	≥ 0.5	Pass
		2440	1	0.669	≥ 0.5	Pass
		2480	1	0.666	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

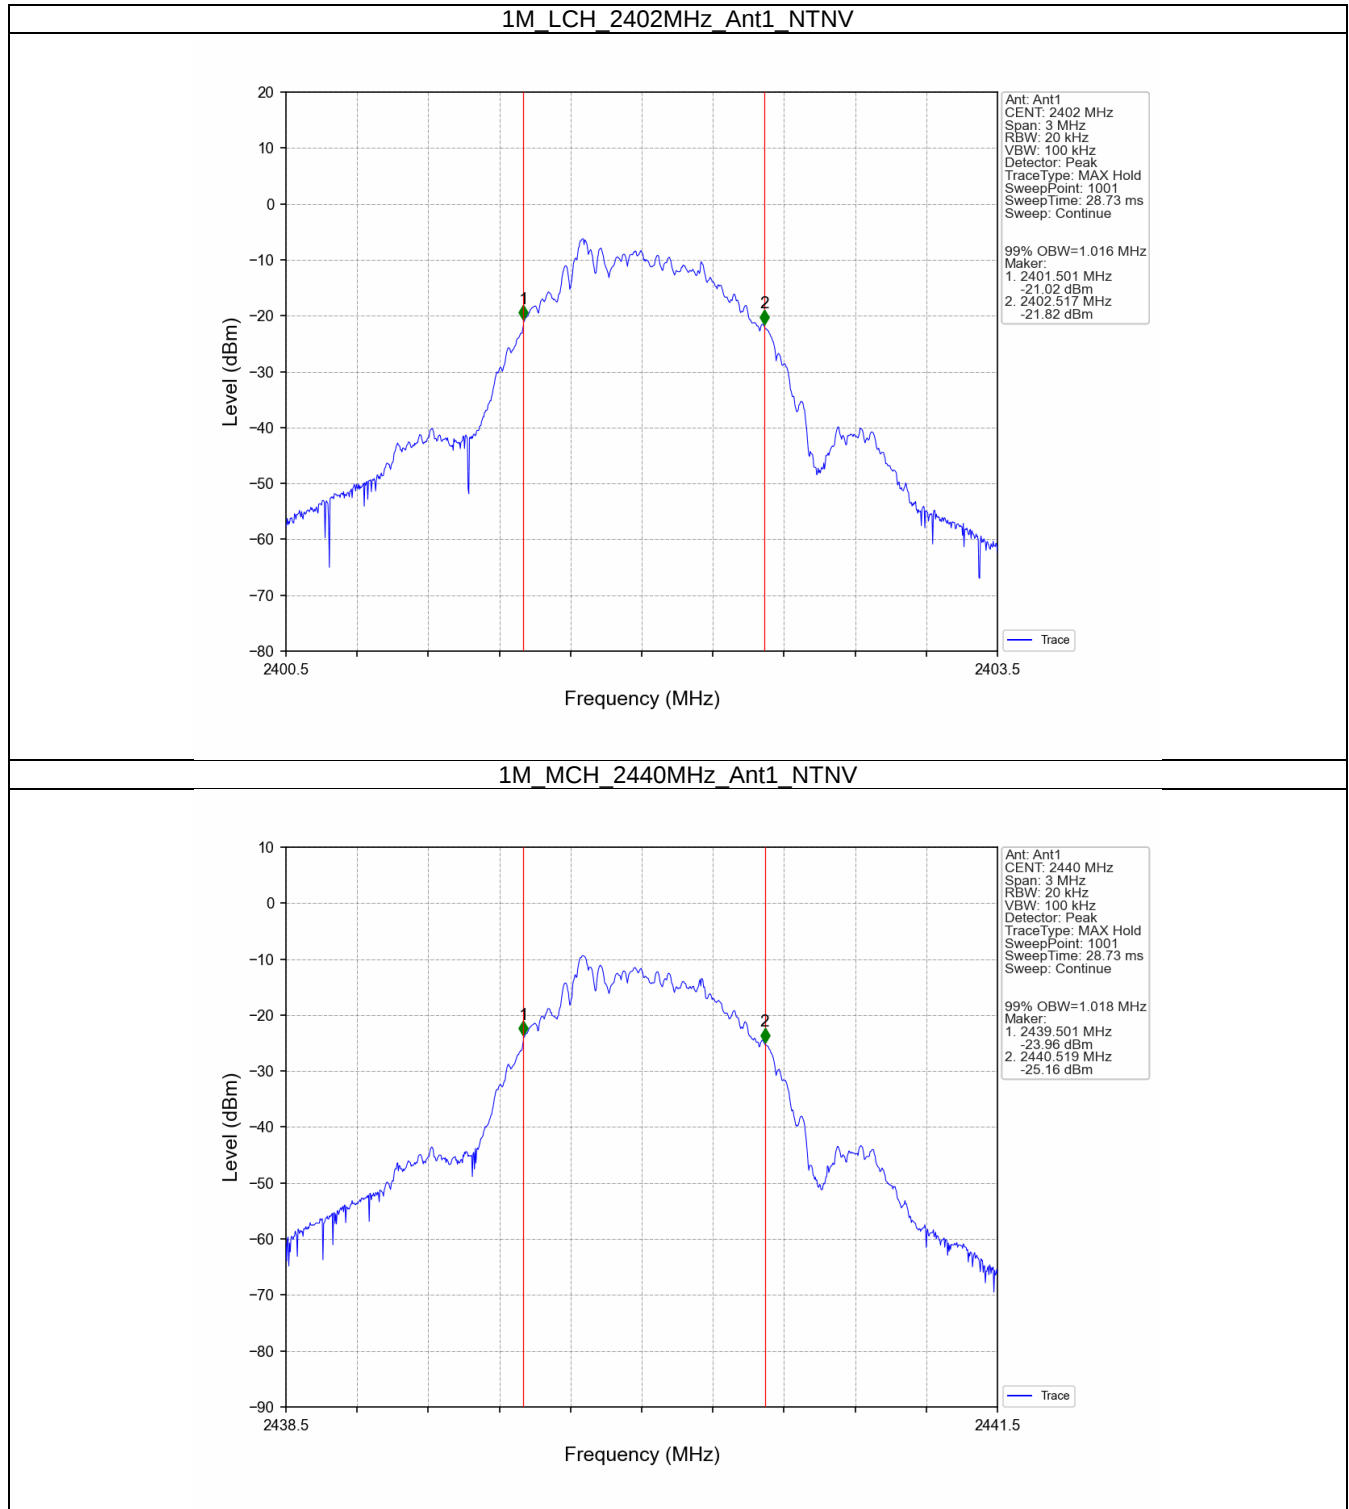


1M_HCH_2480MHz_Ant1_NTNV

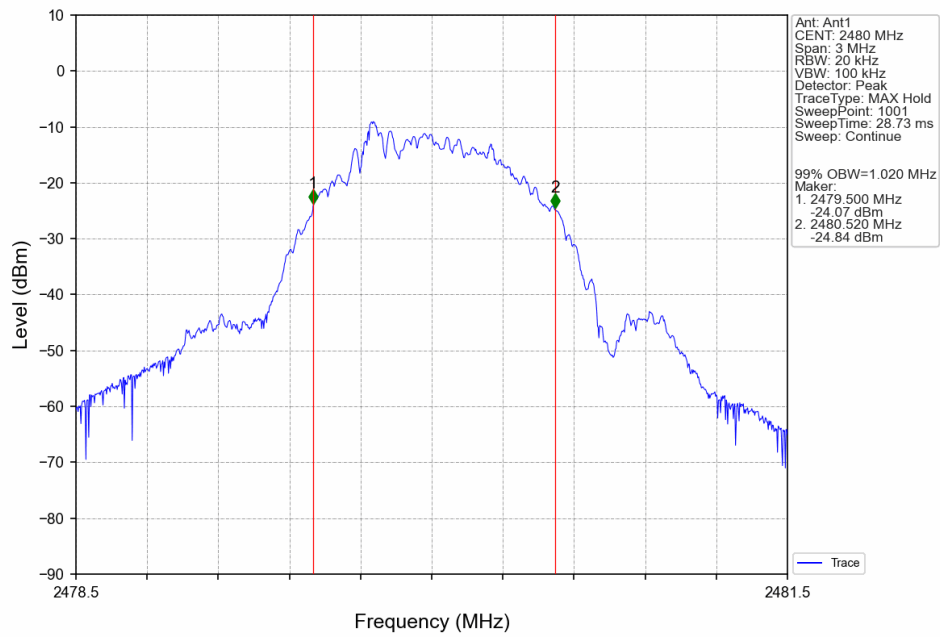

2.2.2 6dB BW

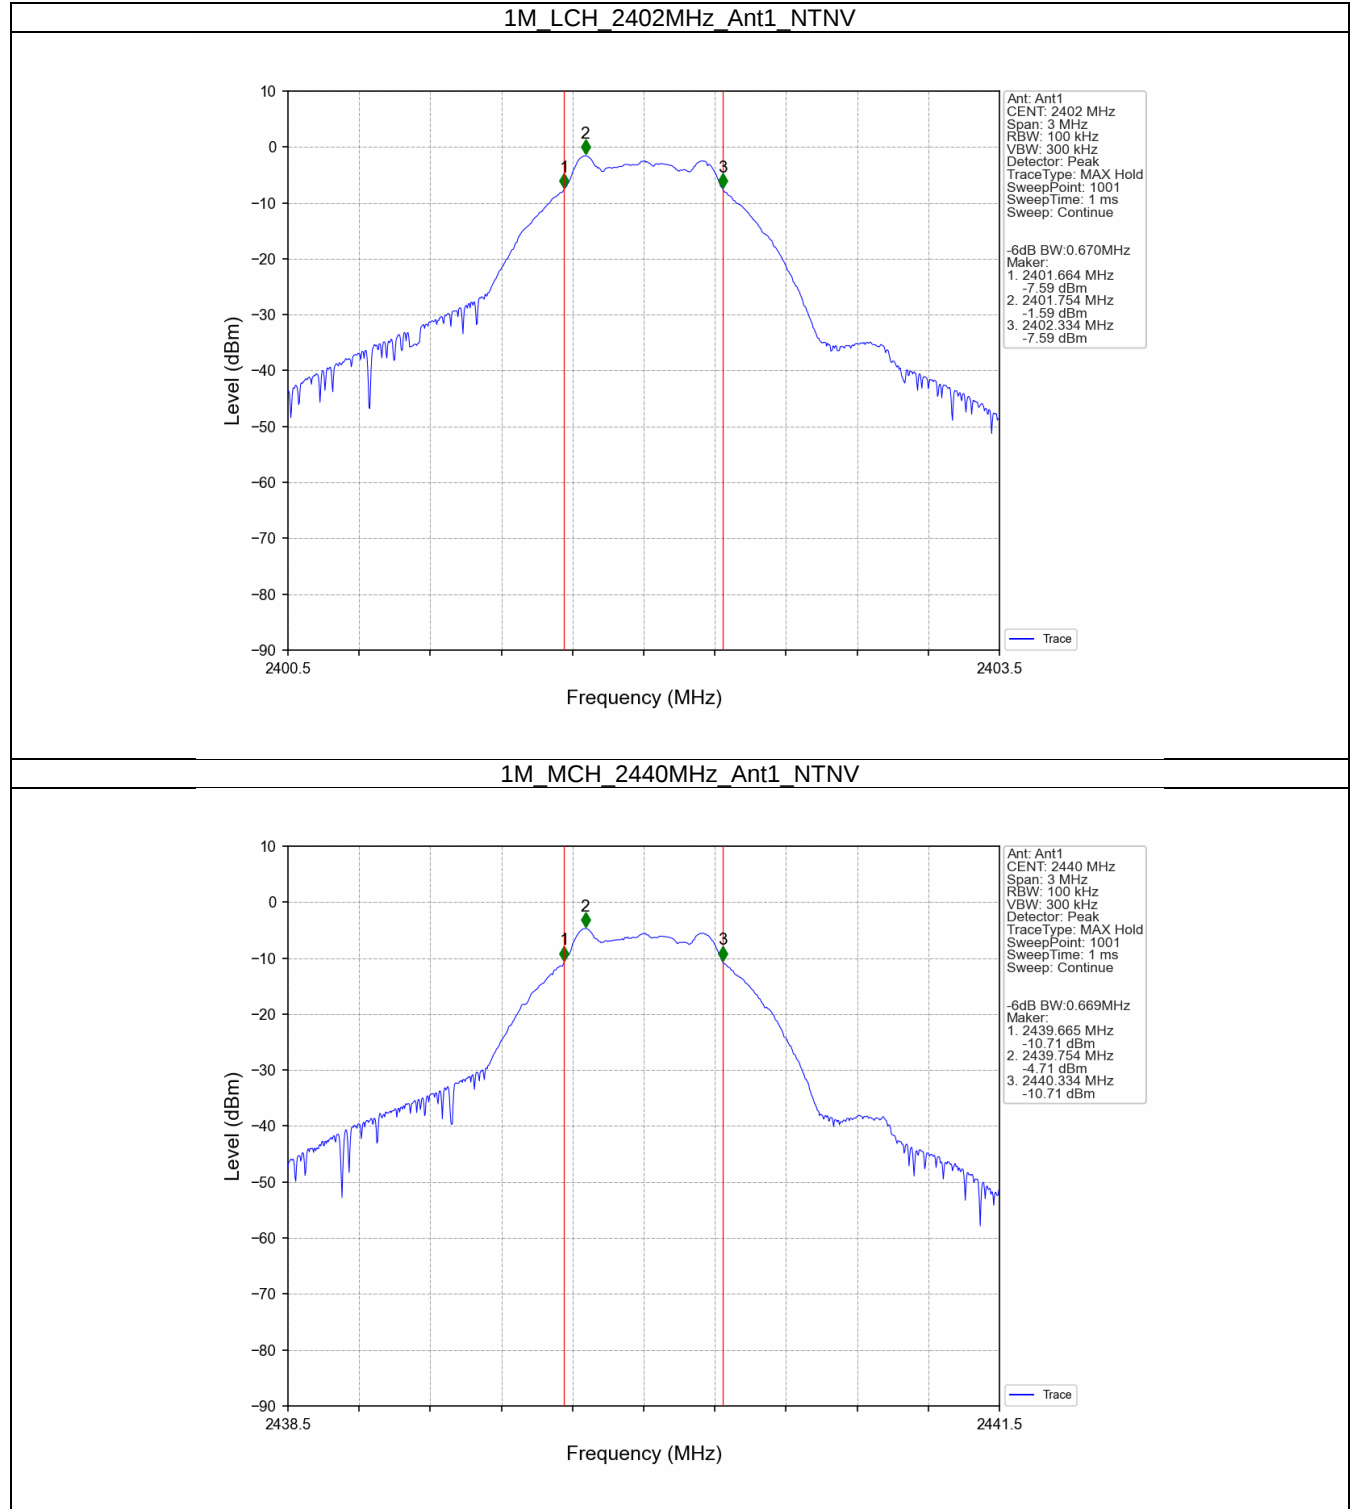

1M_HCH_2480MHz_Ant1_NTNV

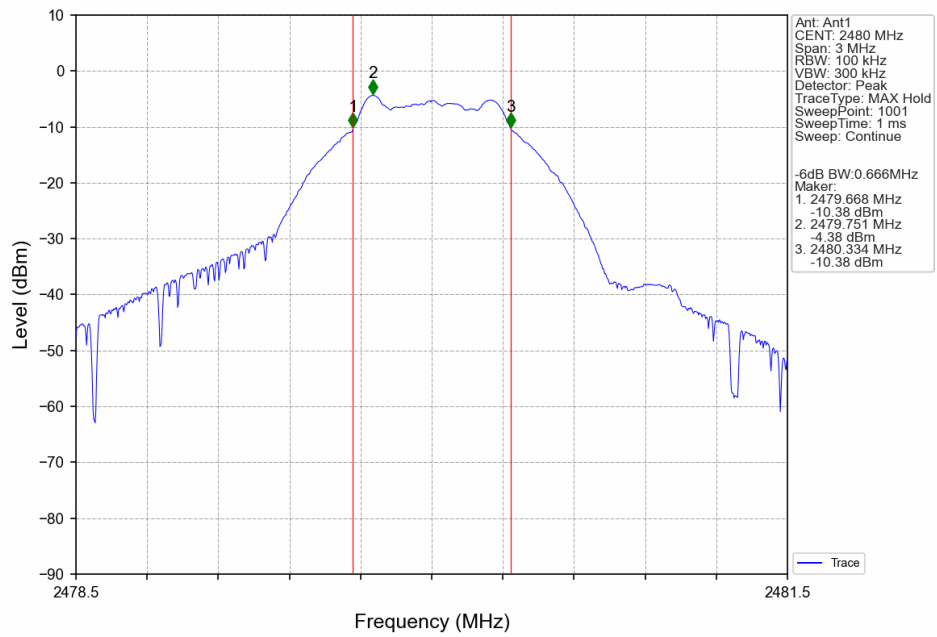

3. Maximum Conducted Output Power


3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-1.32	<=30	Pass
		2440	-4.56	<=30	Pass
		2480	-4.21	<=30	Pass

3.2 Test Graph

3.2.1 Power

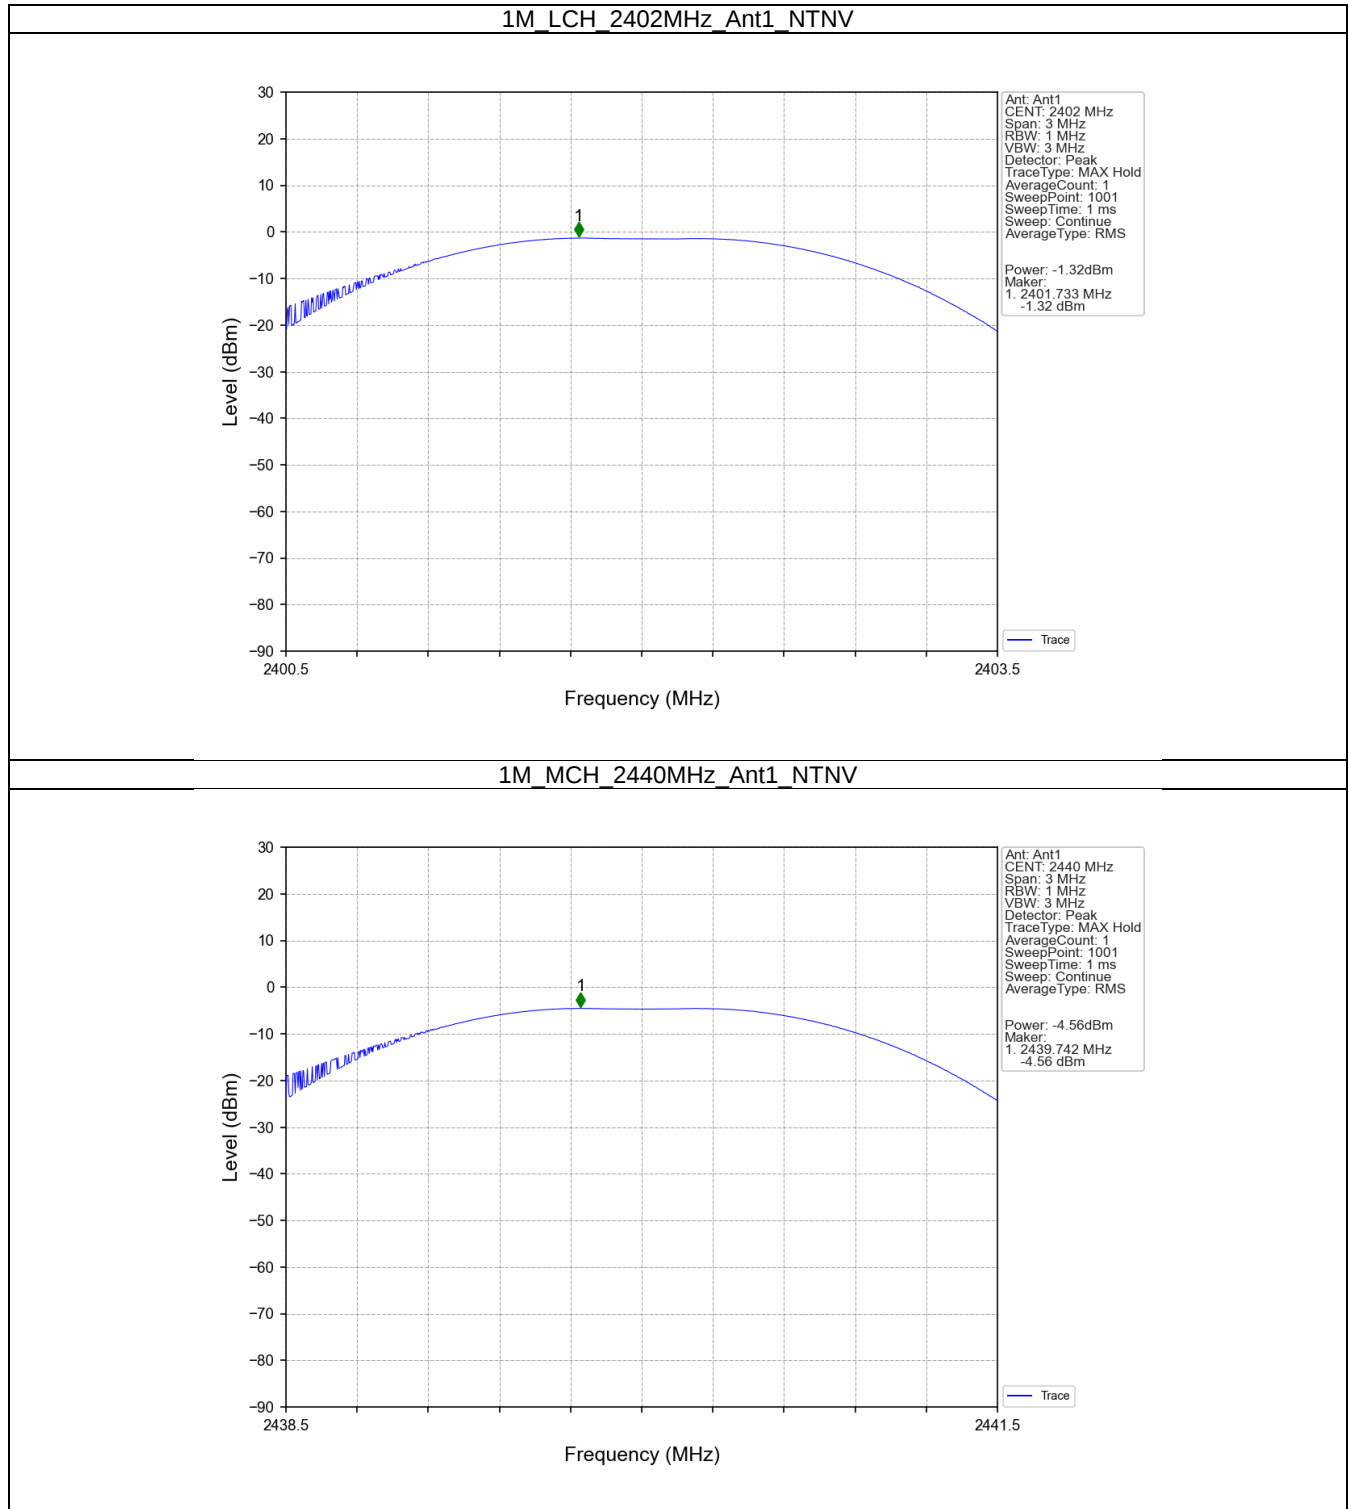

1M_HCH_2480MHz_Ant1_NTNV

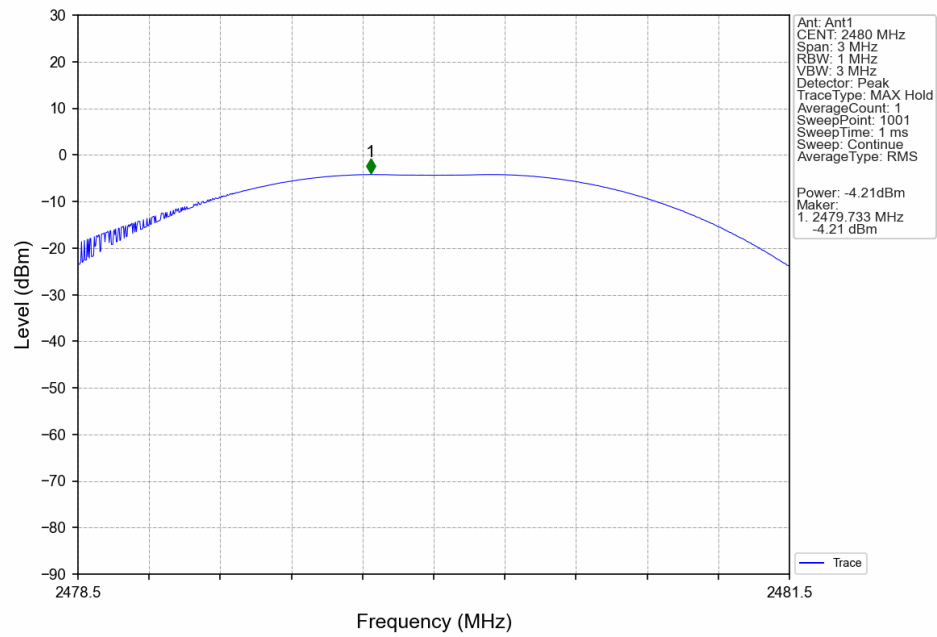

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-1.61	<=8	Pass
		2440	-4.72	<=8	Pass
		2480	-4.35	<=8	Pass

4.2 Test Graph

4.2.1 PSD

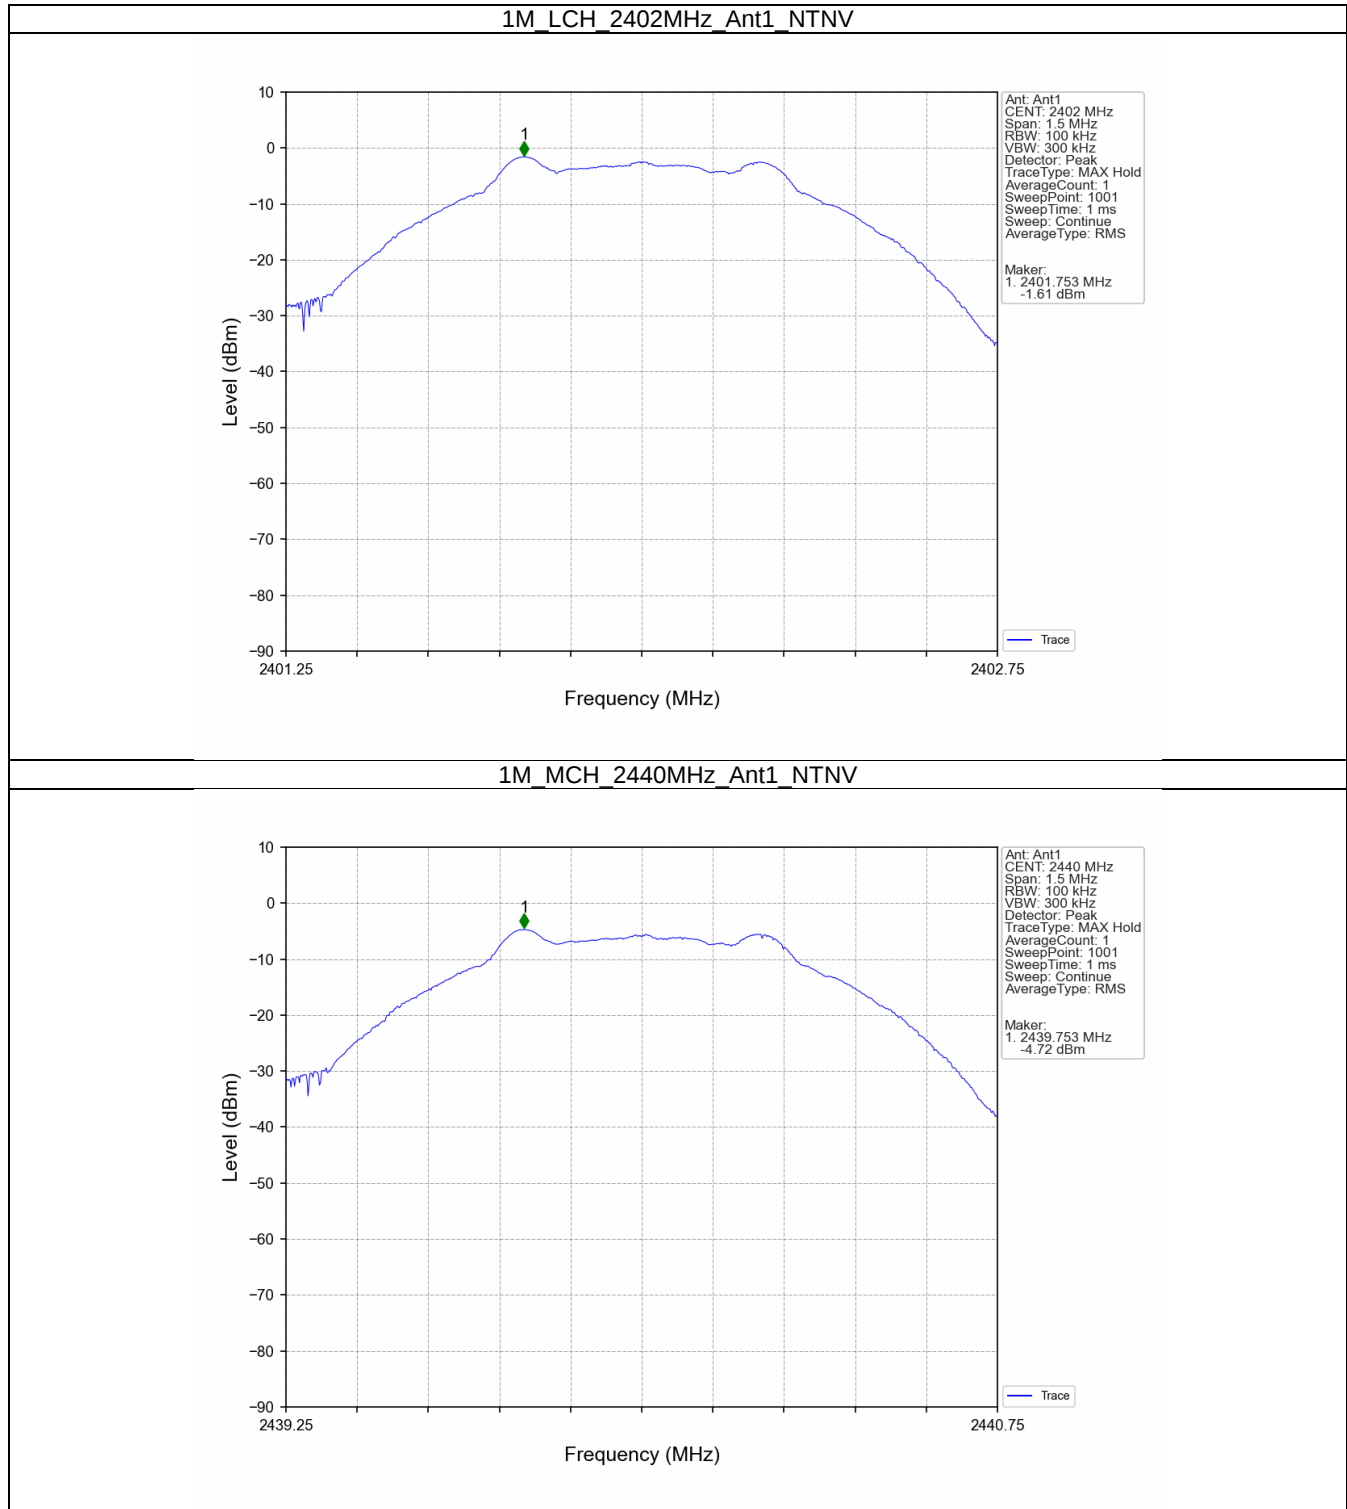

1M_HCH_2480MHz_Ant1_NTNV

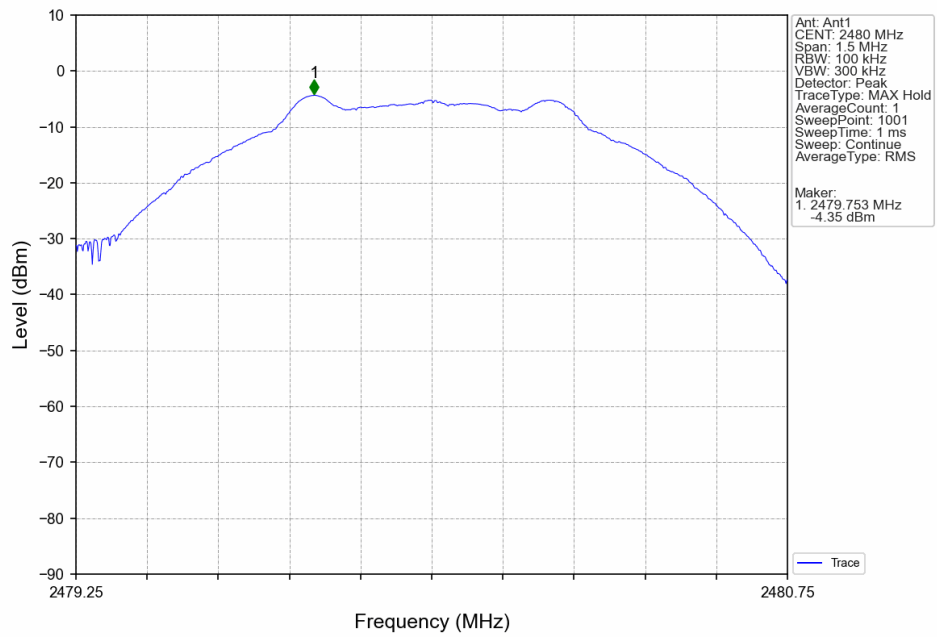

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-1.60
		2440	1	-4.69
		2480	1	-4.39

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-1.60	-21.60	Pass
		2440	1	-4.69	-24.69	Pass
		2480	1	-4.39	-24.39	Pass

5.2 Test Graph


5.2.1 Ref

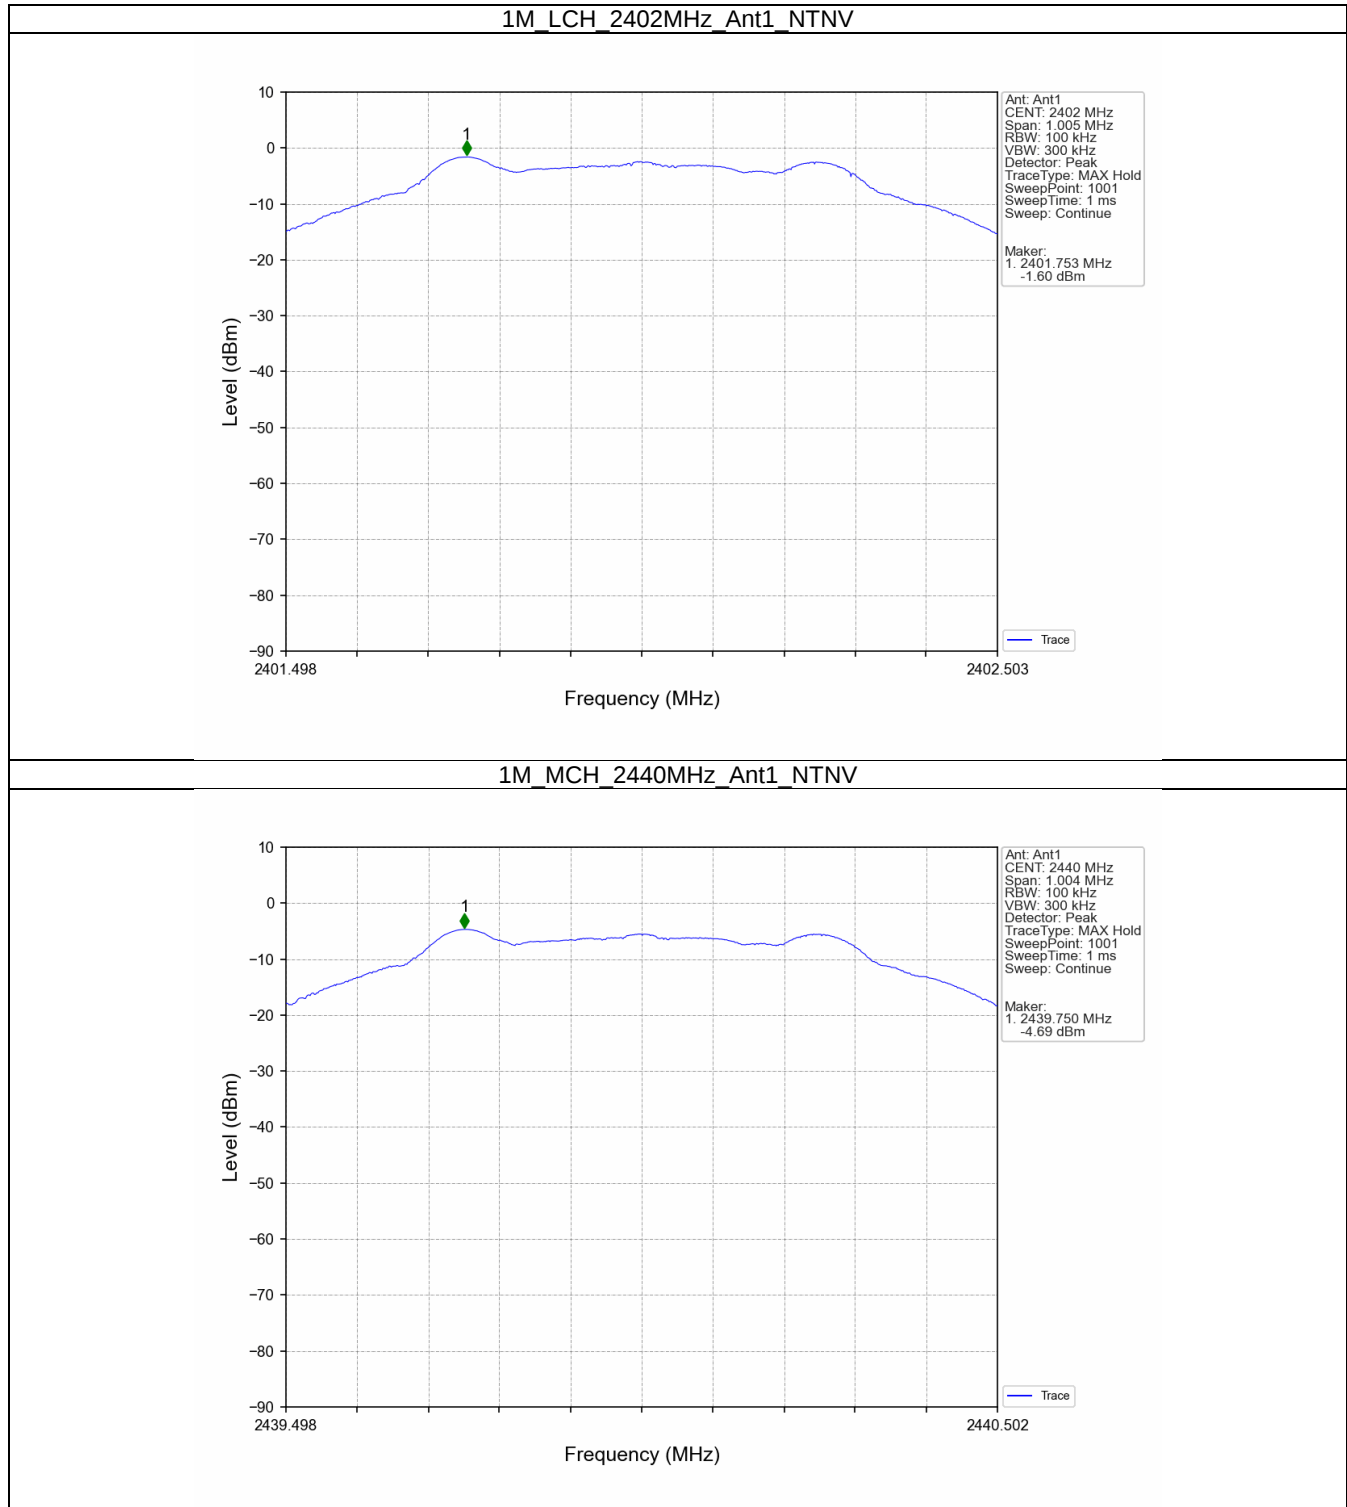


1M_HCH_2480MHz_Ant1_NTNV

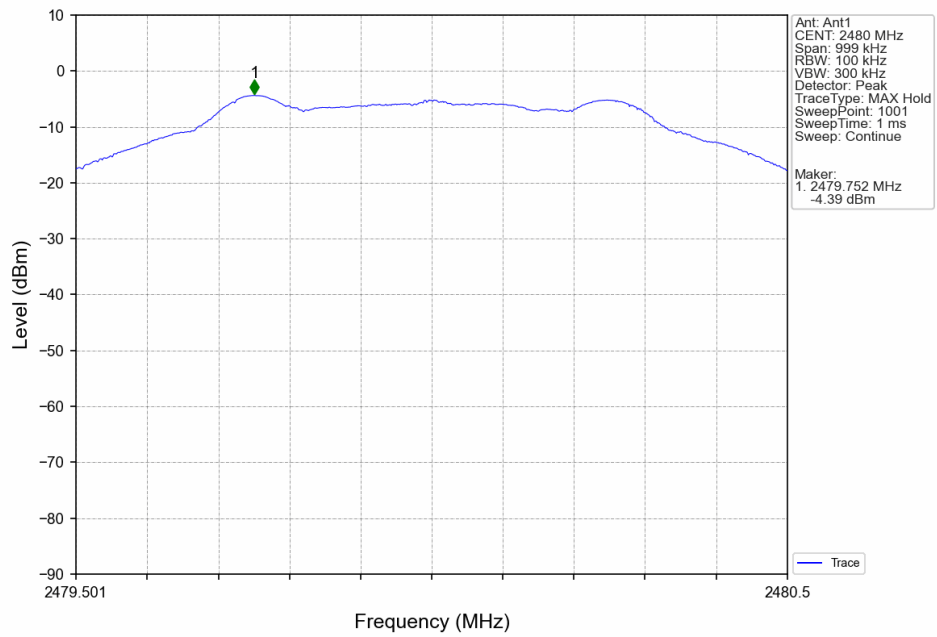


5.2.2 CSE

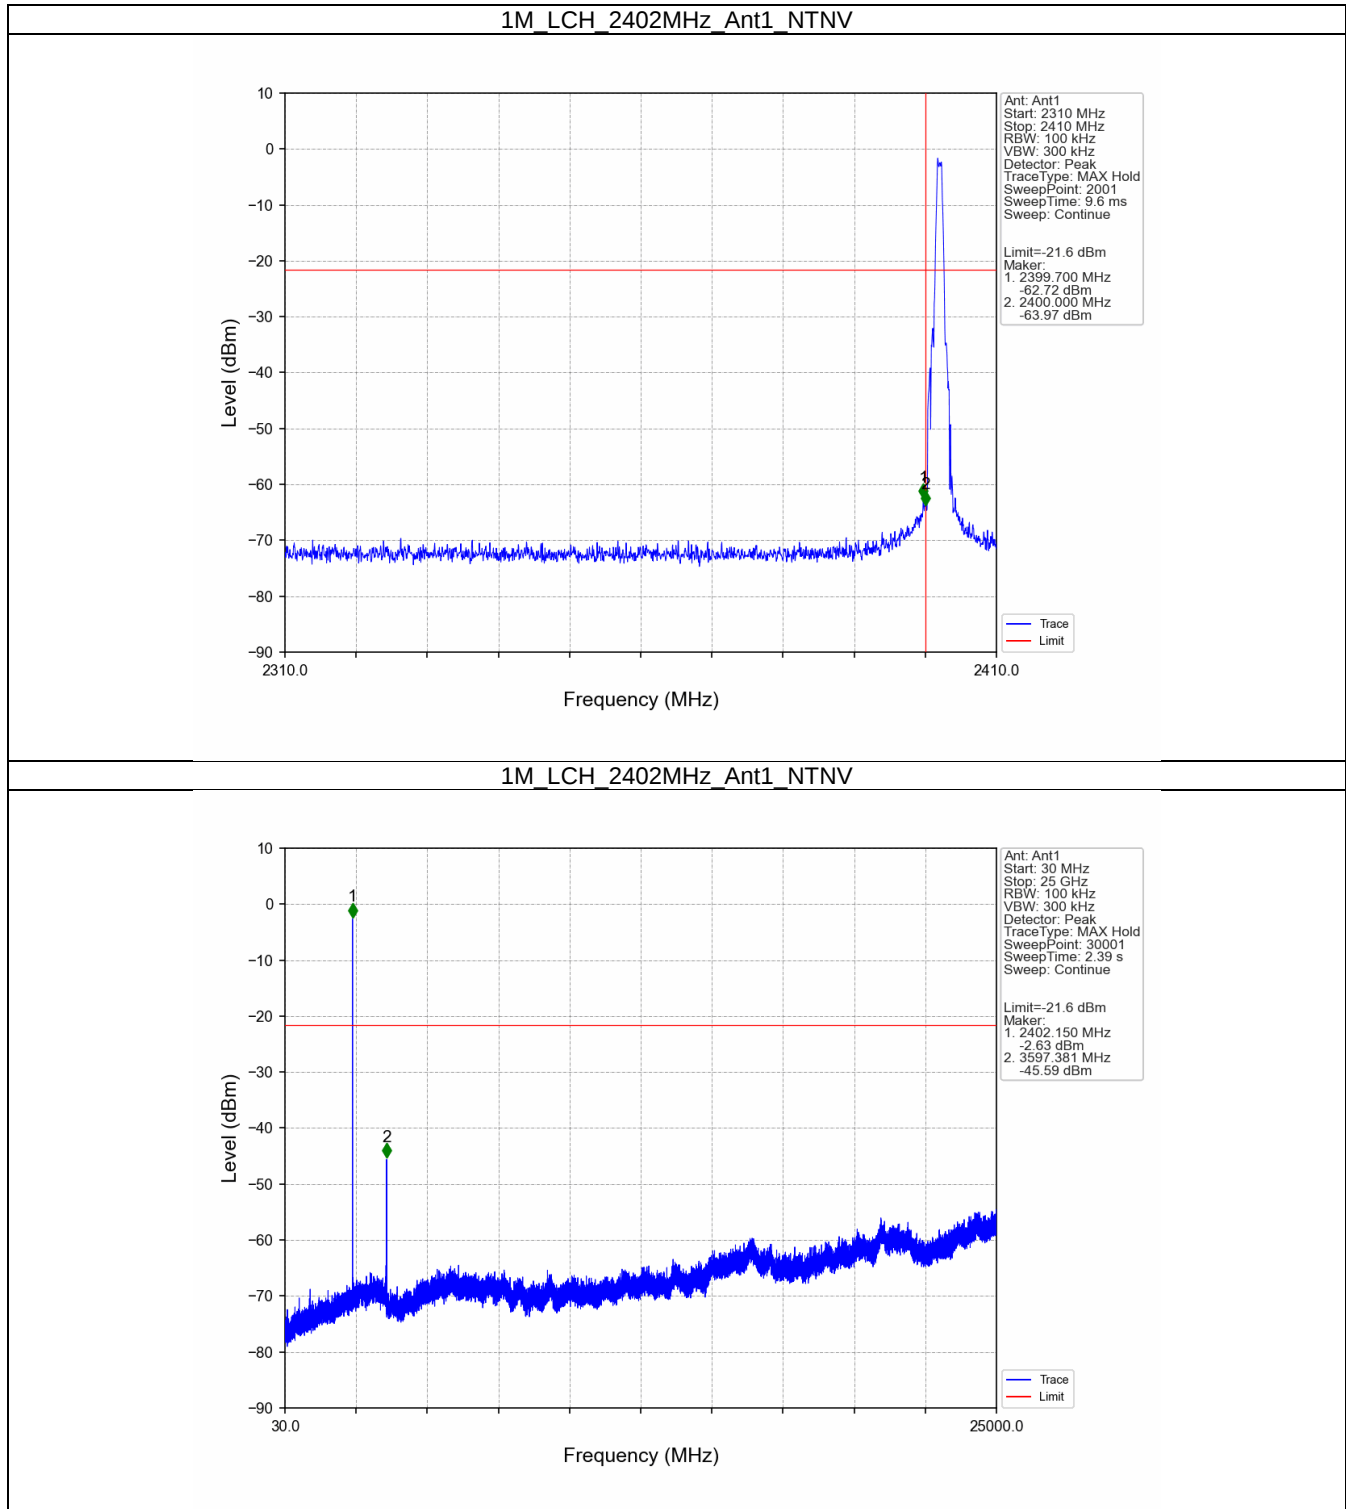


1M_MCH_2440MHz_Ant1_NTNV

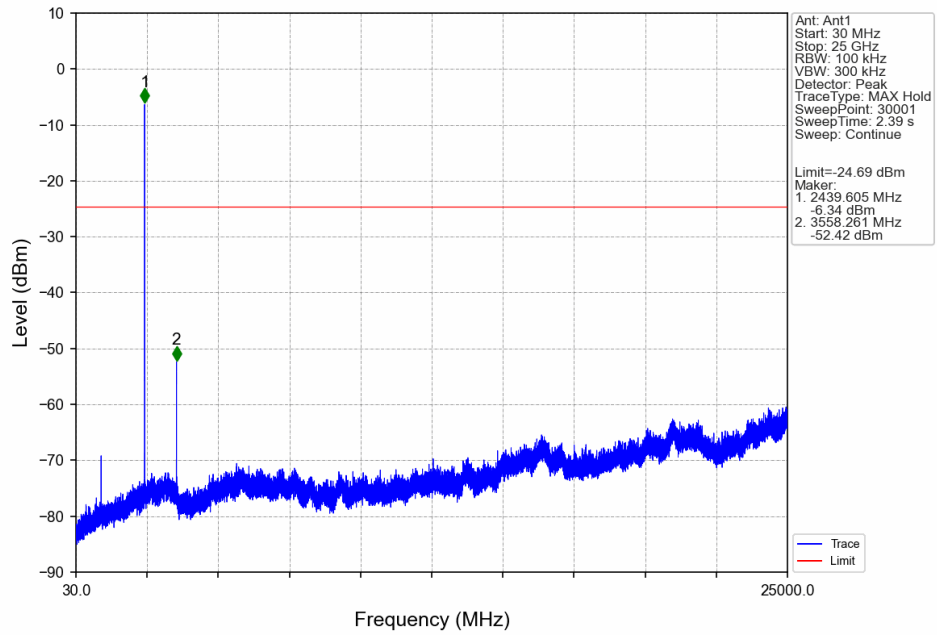

1M_HCH_2480MHz_Ant1_NTNV

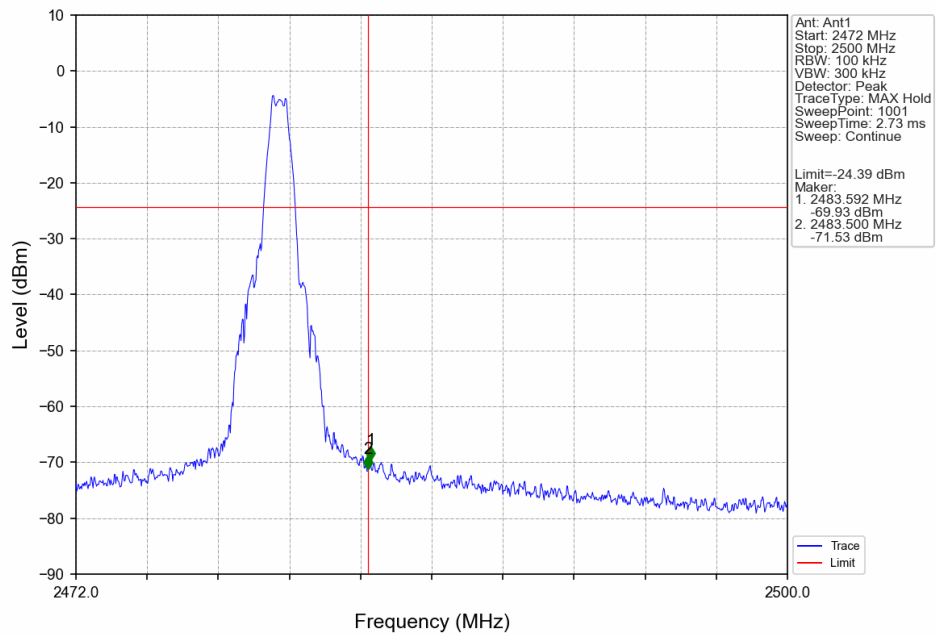

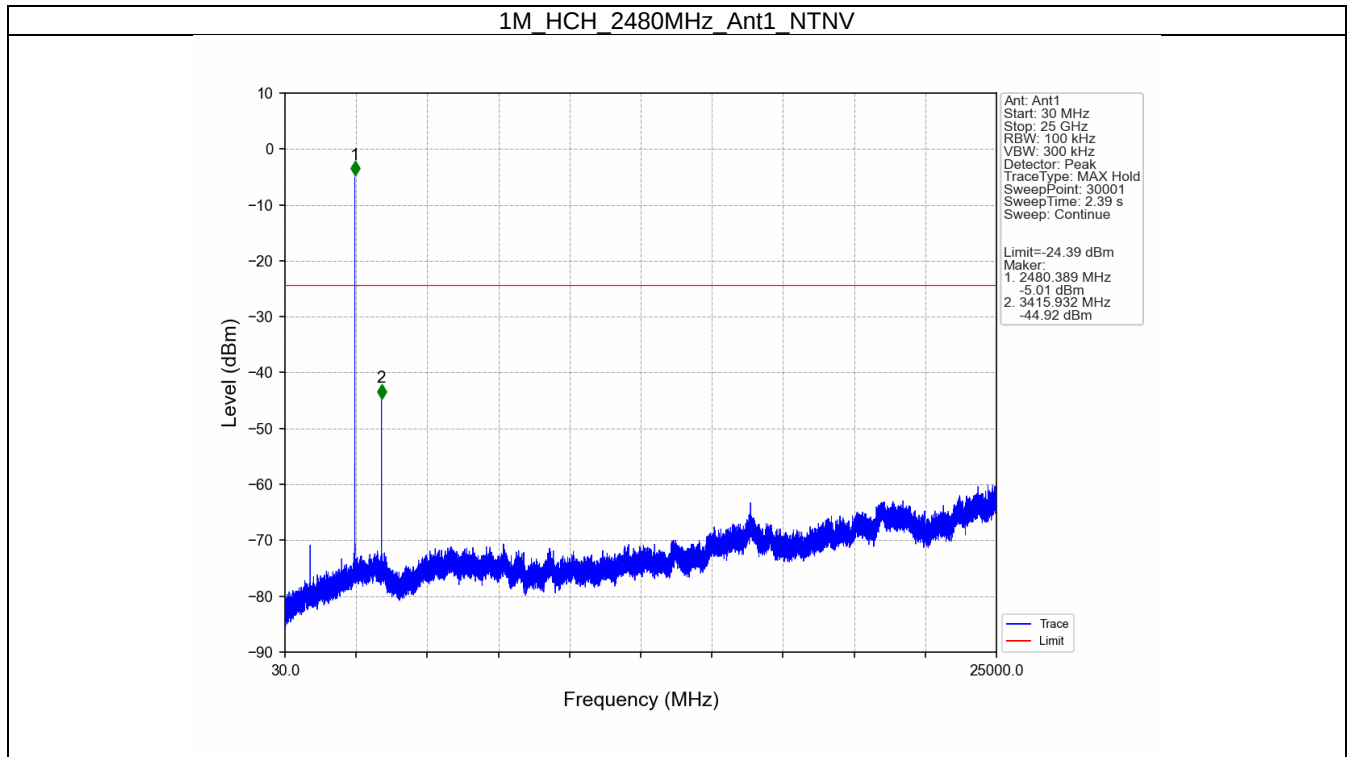

***** End of Report *****