


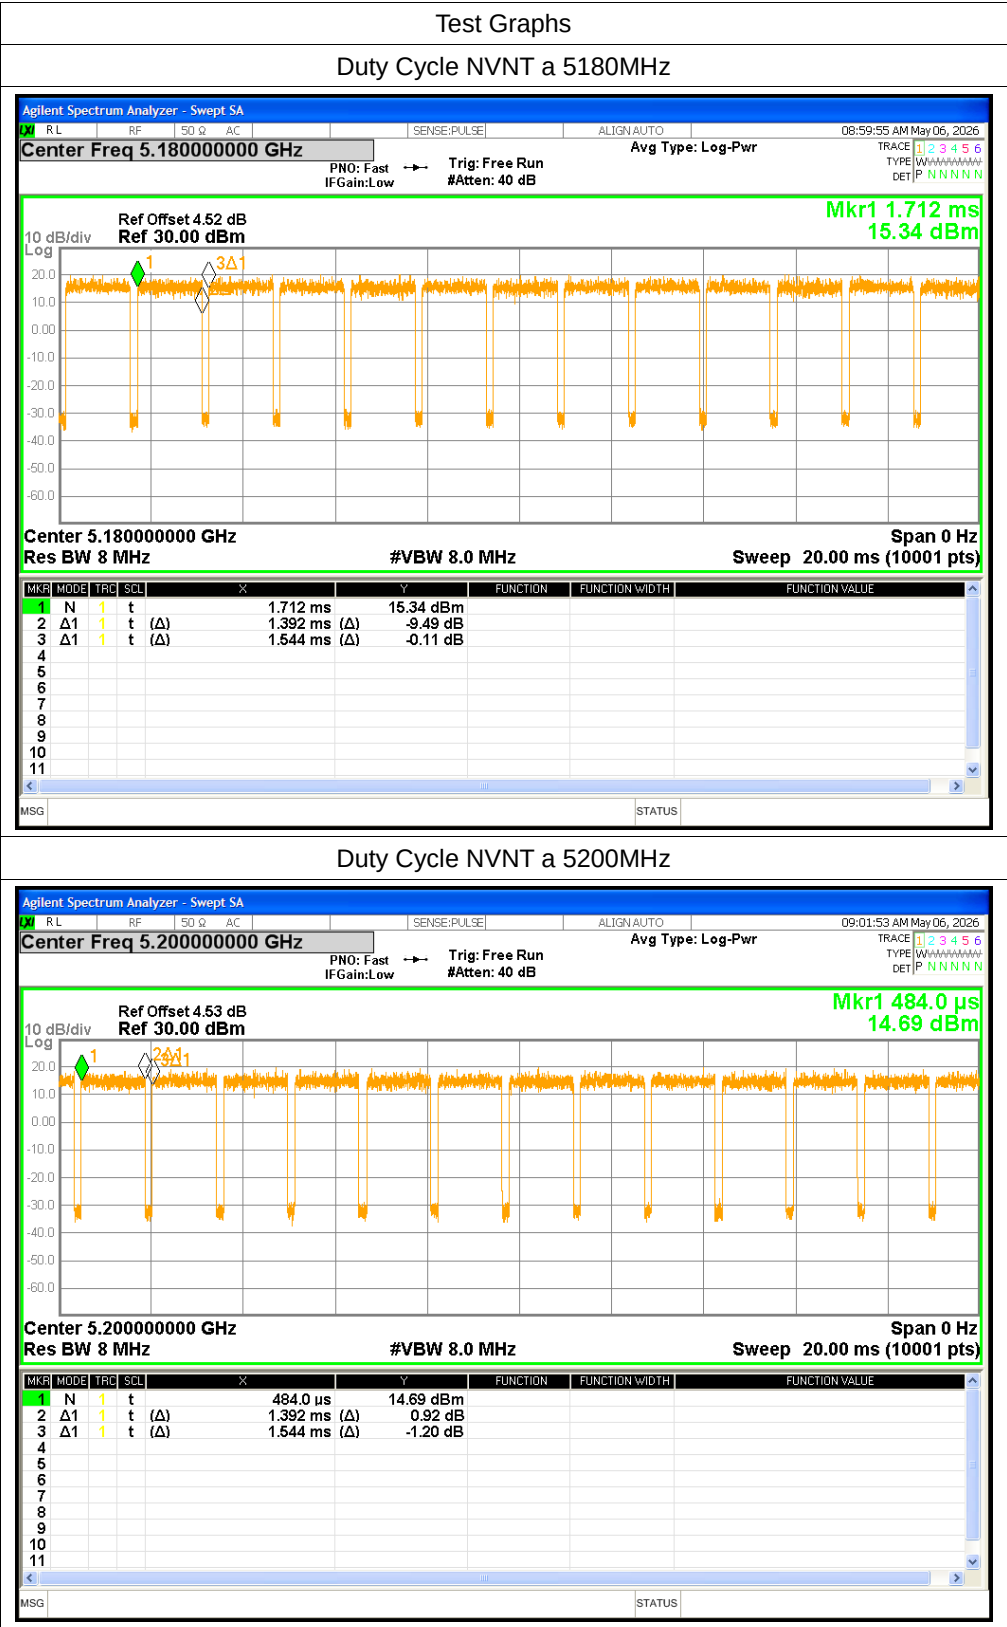



Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5180	1.392	1.544	90.16	0.45	0.72	0.18
NVNT	a	5200	1.392	1.544	90.16	0.45	0.72	0.16
NVNT	a	5240	1.392	1.544	90.16	0.45	0.72	0.16
NVNT	n20	5180	1.173	1.326	88.46	0.53	0.85	0.13
NVNT	n20	5200	1.173	1.326	88.46	0.53	0.85	0.18
NVNT	n20	5240	1.173	1.326	88.46	0.53	0.85	0.16
NVNT	n40	5190	0.585	0.738	79.27	1.01	1.71	0.22
NVNT	n40	5230	0.588	0.741	79.35	1	1.7	0.22
NVNT	ac20	5180	1.185	1.338	88.57	0.53	0.84	0.13
NVNT	ac20	5200	1.185	1.338	88.57	0.53	0.84	0.16
NVNT	ac20	5240	1.185	1.338	88.57	0.53	0.84	0.17
NVNT	ac40	5190	0.591	0.744	79.44	1	1.69	0.11
NVNT	ac40	5230	0.591	0.744	79.44	1	1.69	0.14
NVNT	ac80	5210	0.296	0.439	67.43	1.71	3.38	0.11


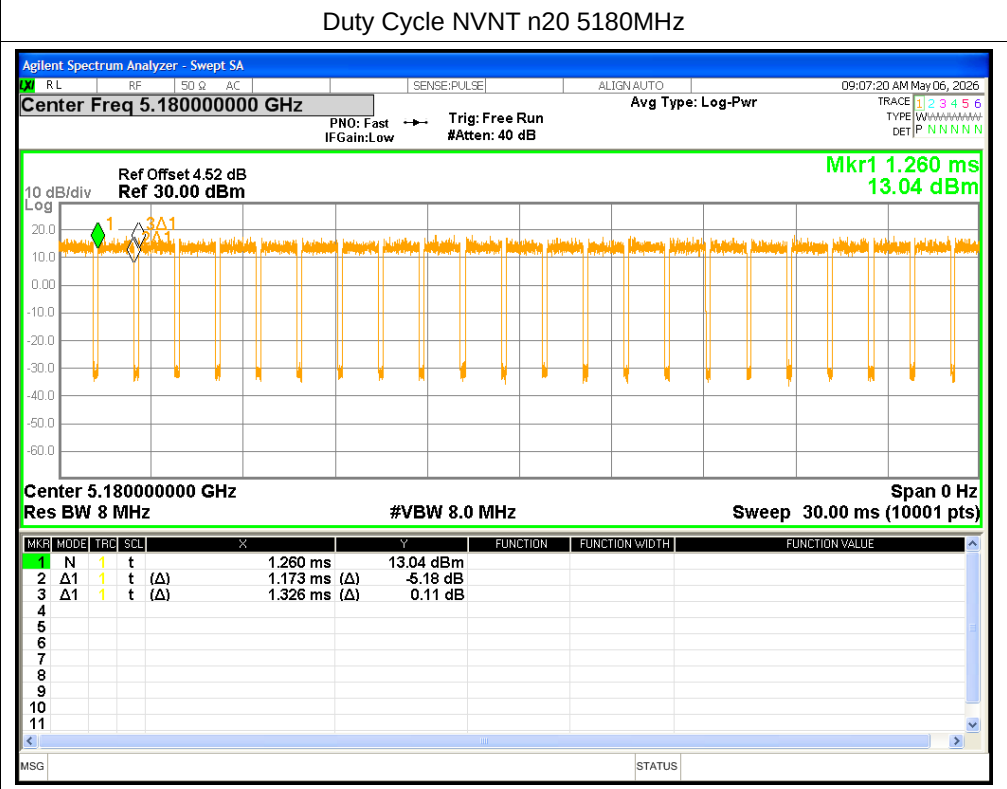


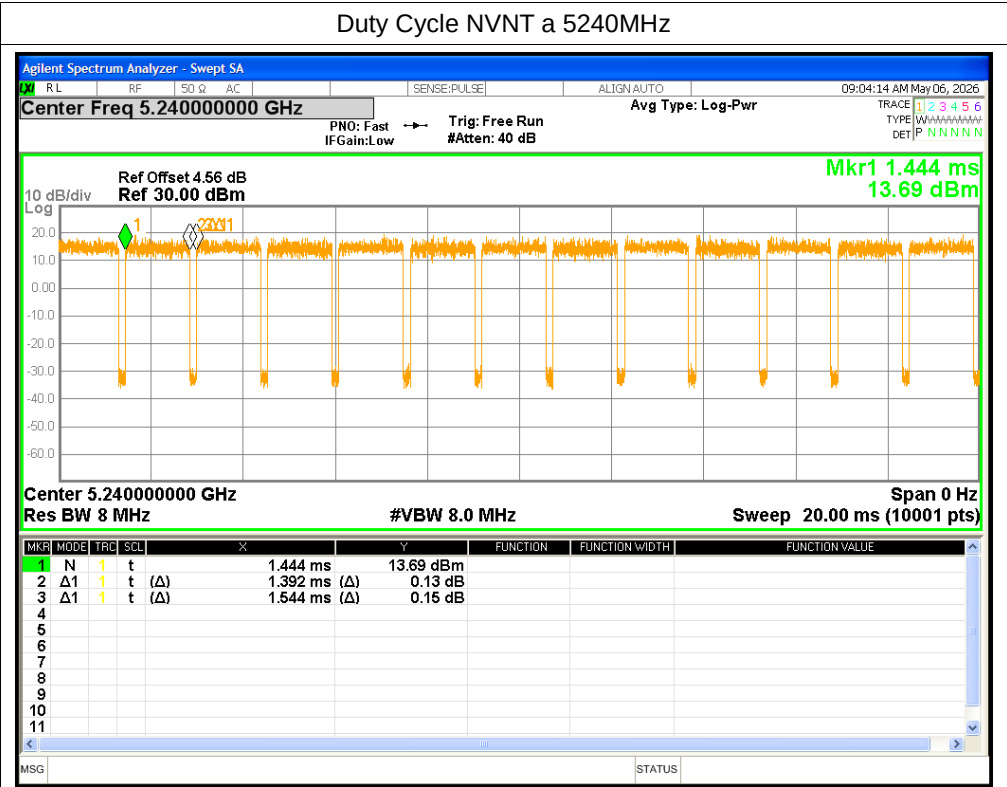


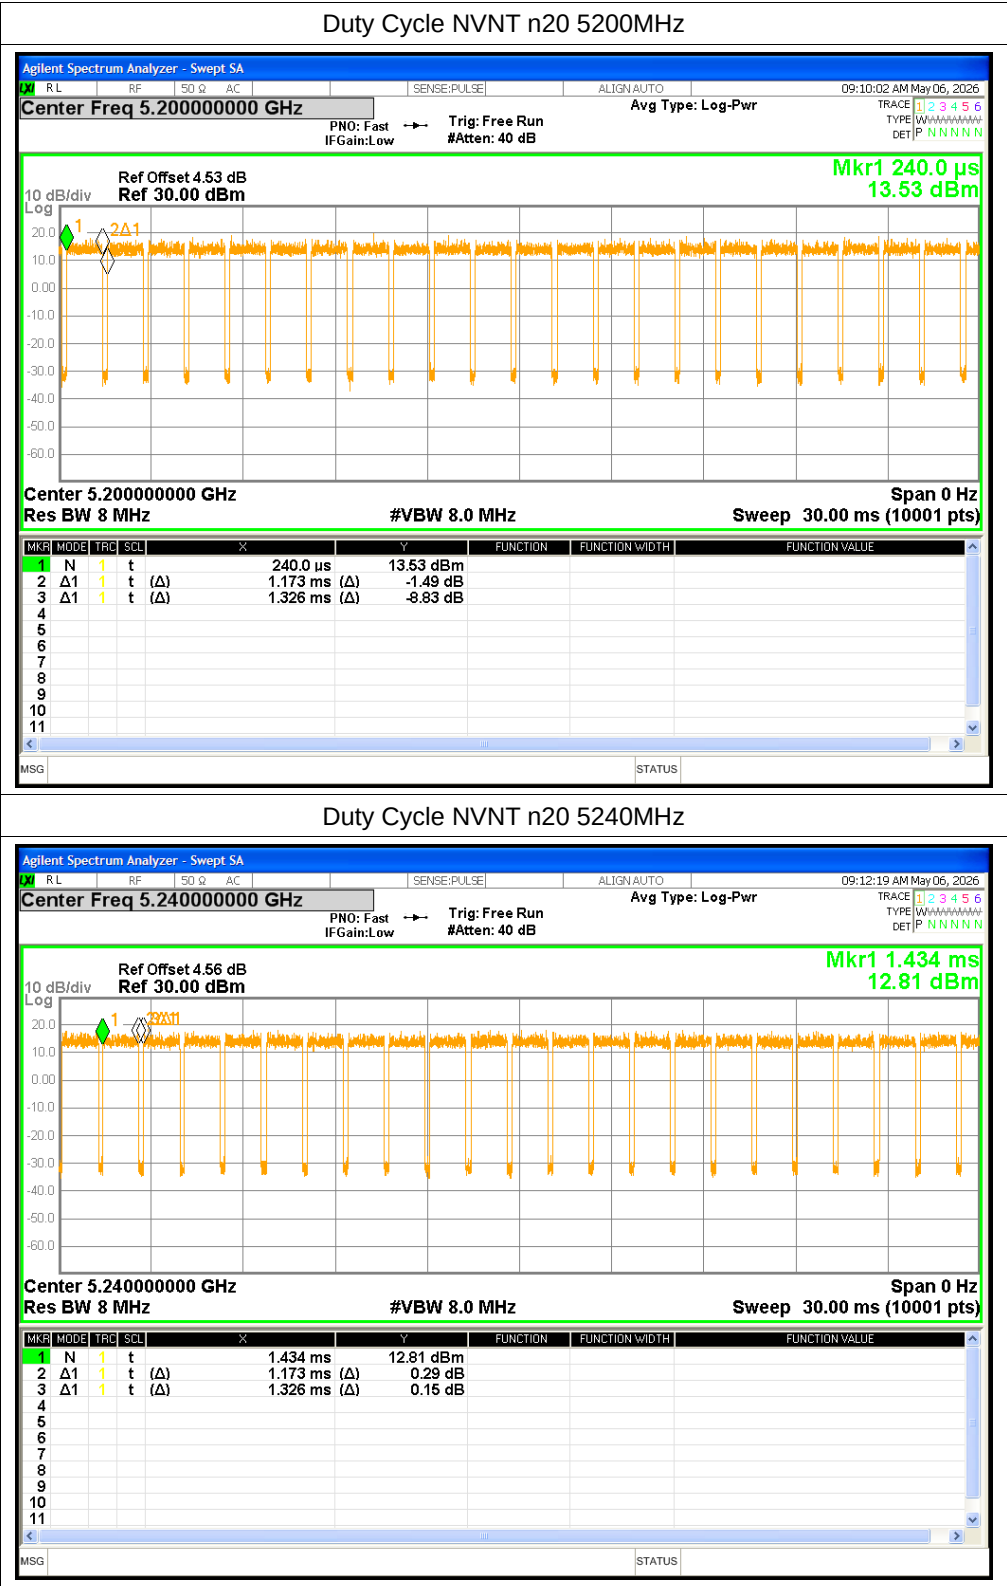

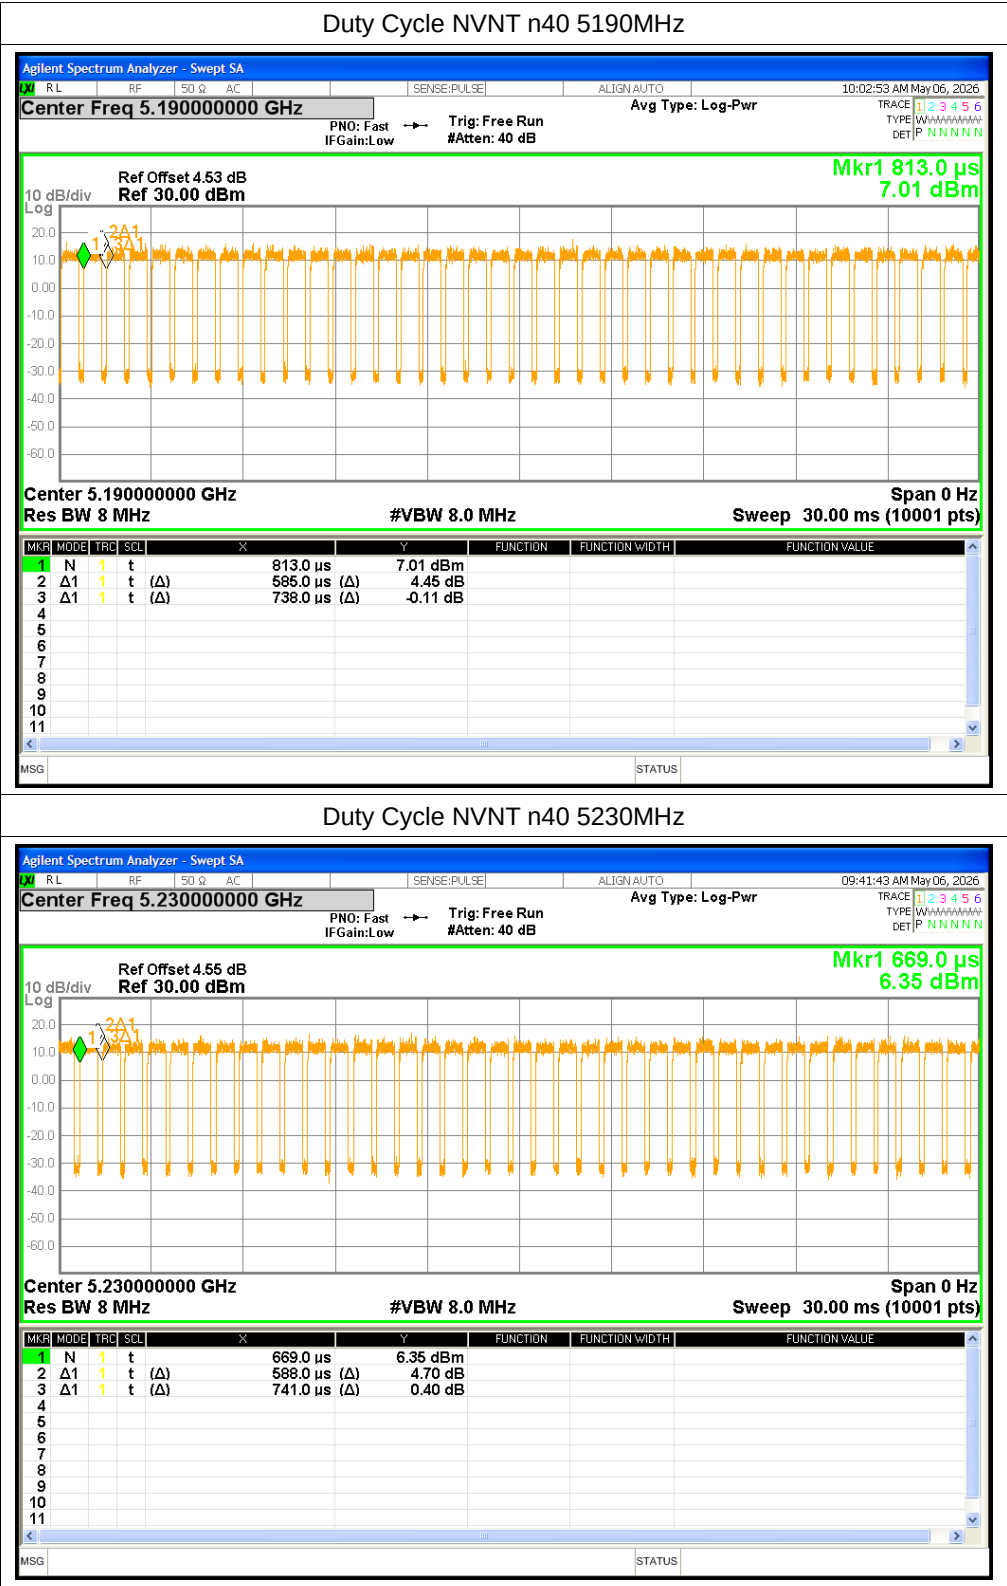


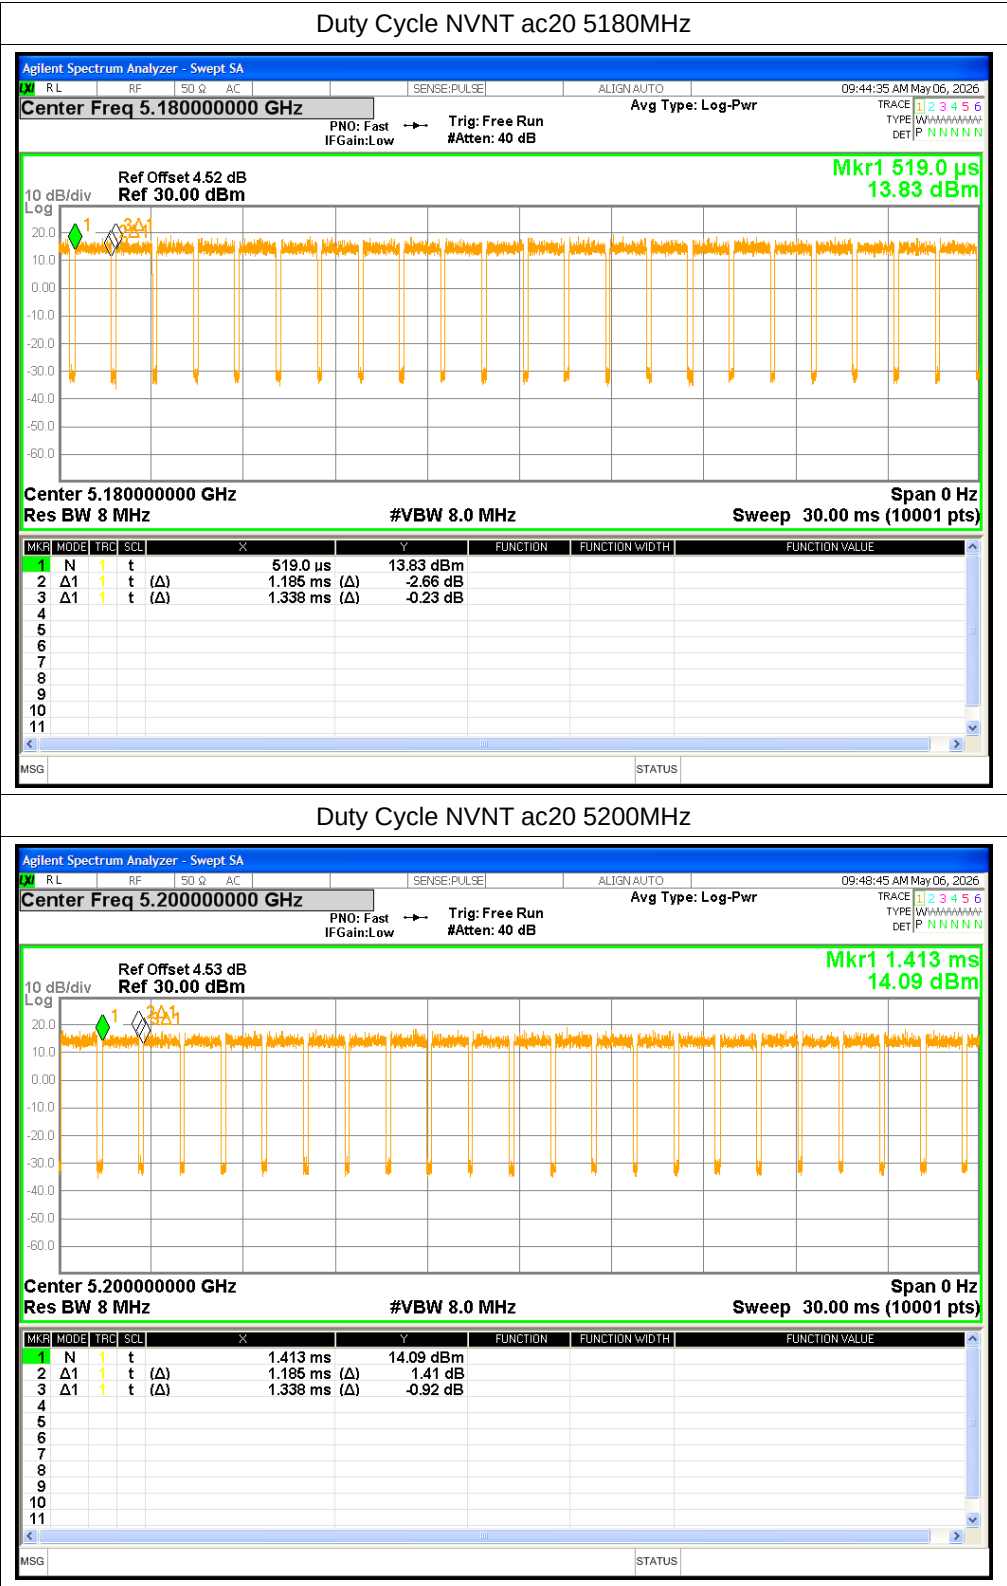


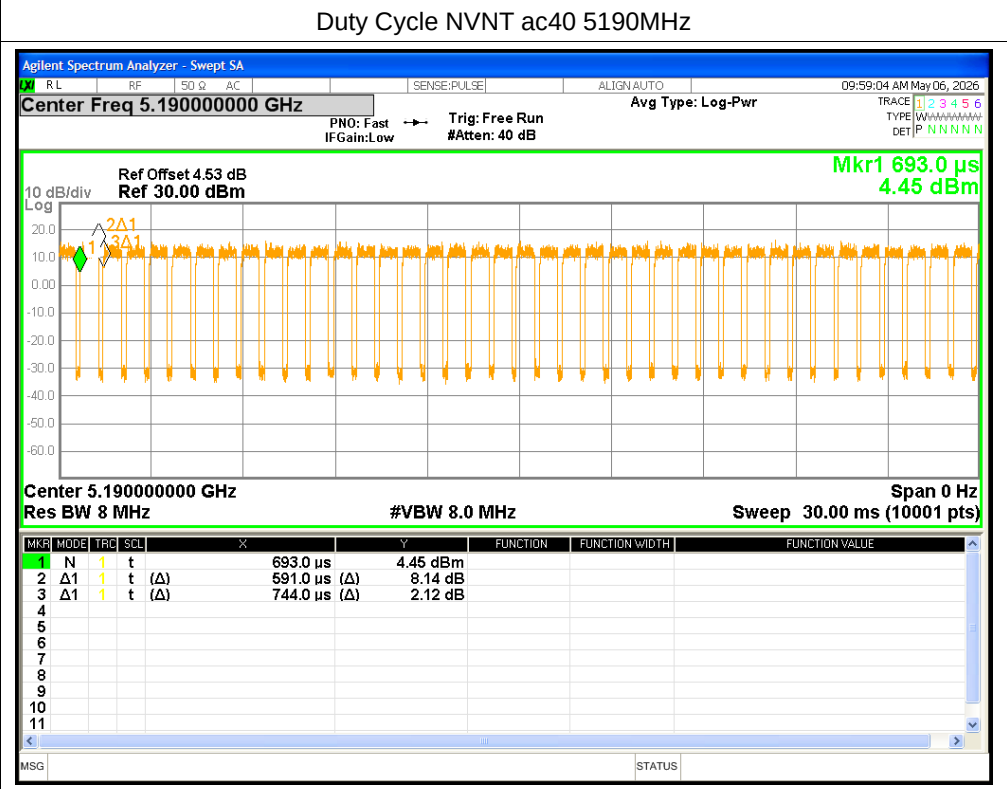
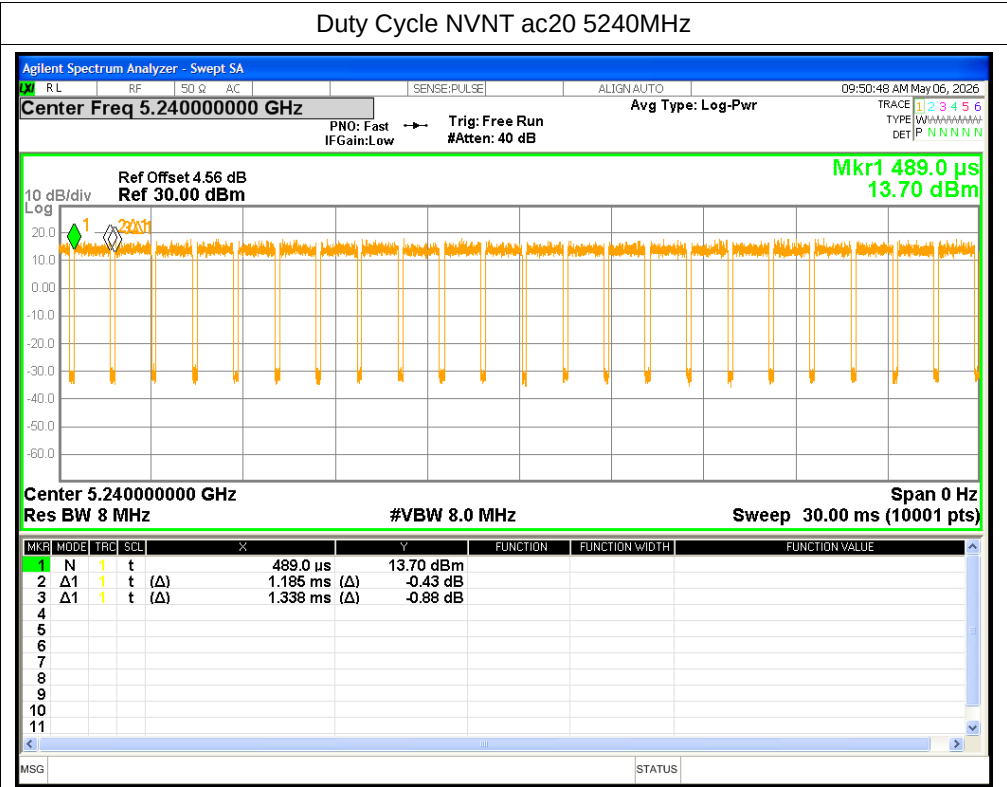



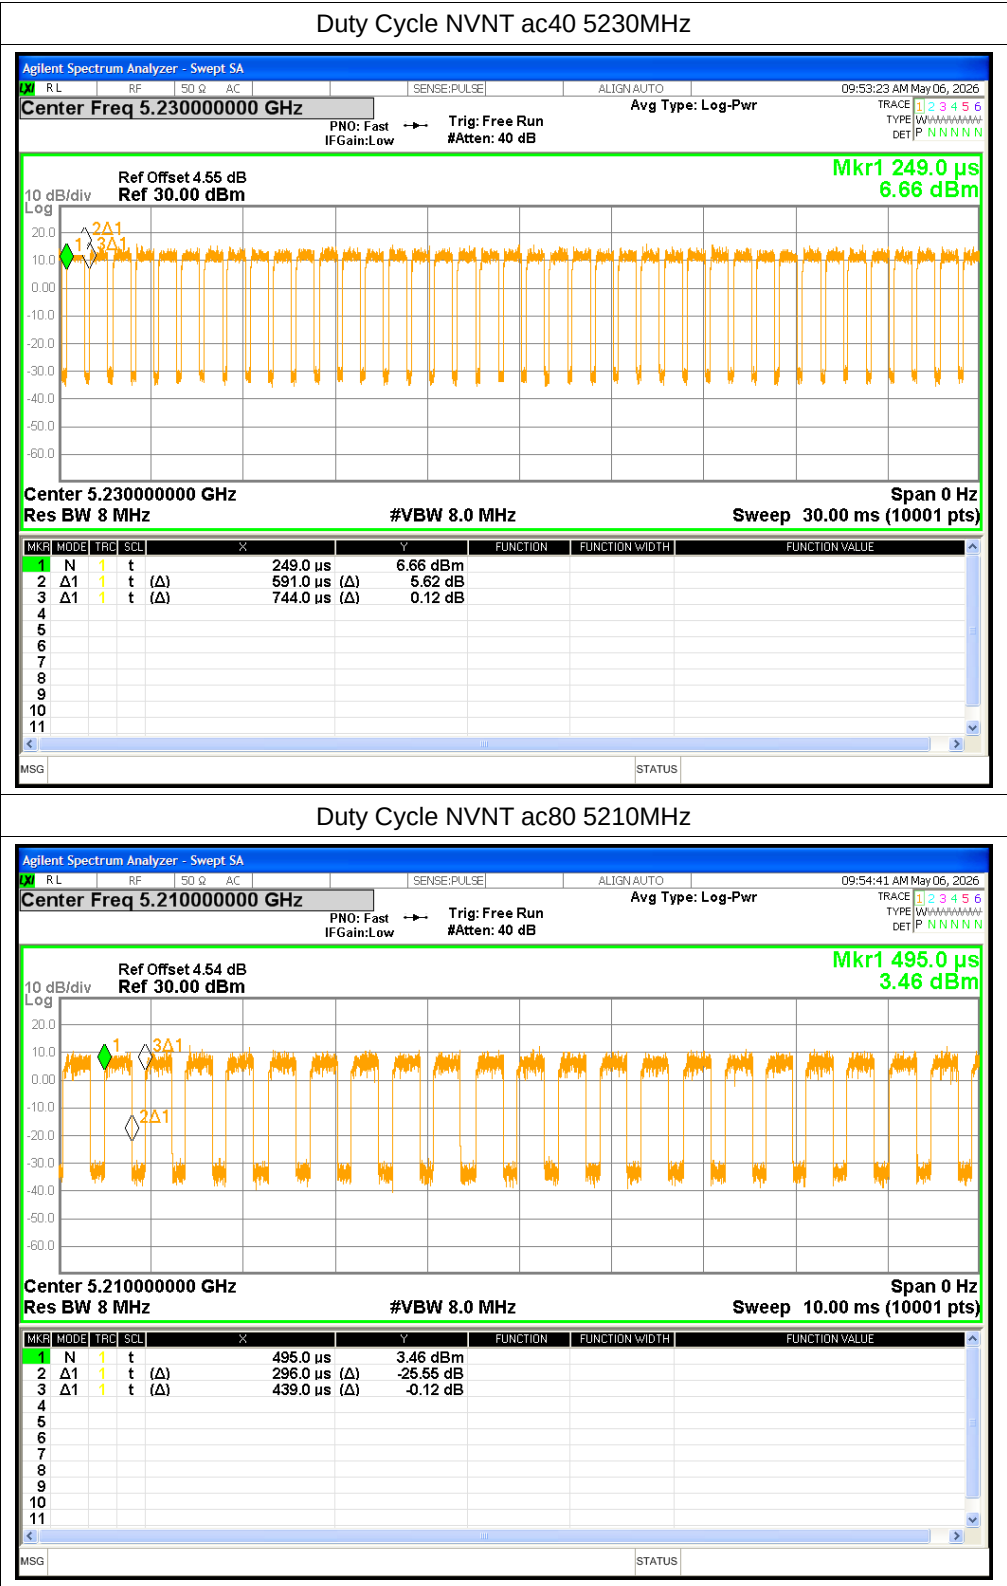




Maximum Output Power



Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	12.95	0.45	13.4	<=24	Pass
NVNT	a	5200	12.2	0.45	12.65	<=24	Pass
NVNT	a	5240	12.13	0.45	12.58	<=24	Pass
NVNT	n20	5180	11.68	0.53	12.21	<=24	Pass
NVNT	n20	5200	11.28	0.53	11.81	<=24	Pass
NVNT	n20	5240	11.24	0.53	11.77	<=24	Pass
NVNT	n40	5190	11.51	1.01	12.52	<=24	Pass
NVNT	n40	5230	11.47	1	12.47	<=24	Pass
NVNT	ac20	5180	11.59	0.53	12.12	<=24	Pass
NVNT	ac20	5200	11.2	0.53	11.73	<=24	Pass
NVNT	ac20	5240	11.08	0.53	11.61	<=24	Pass
NVNT	ac40	5190	11.56	1	12.56	<=24	Pass
NVNT	ac40	5230	11.26	1	12.26	<=24	Pass
NVNT	ac80	5210	10.35	1.71	12.06	<=24	Pass

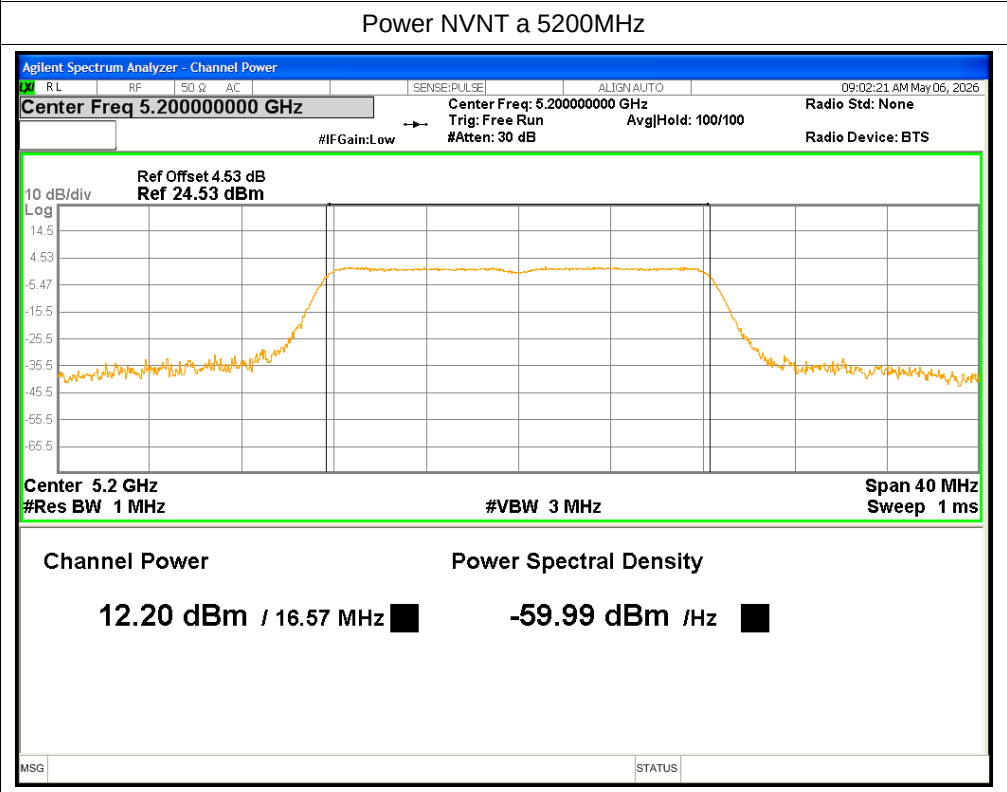
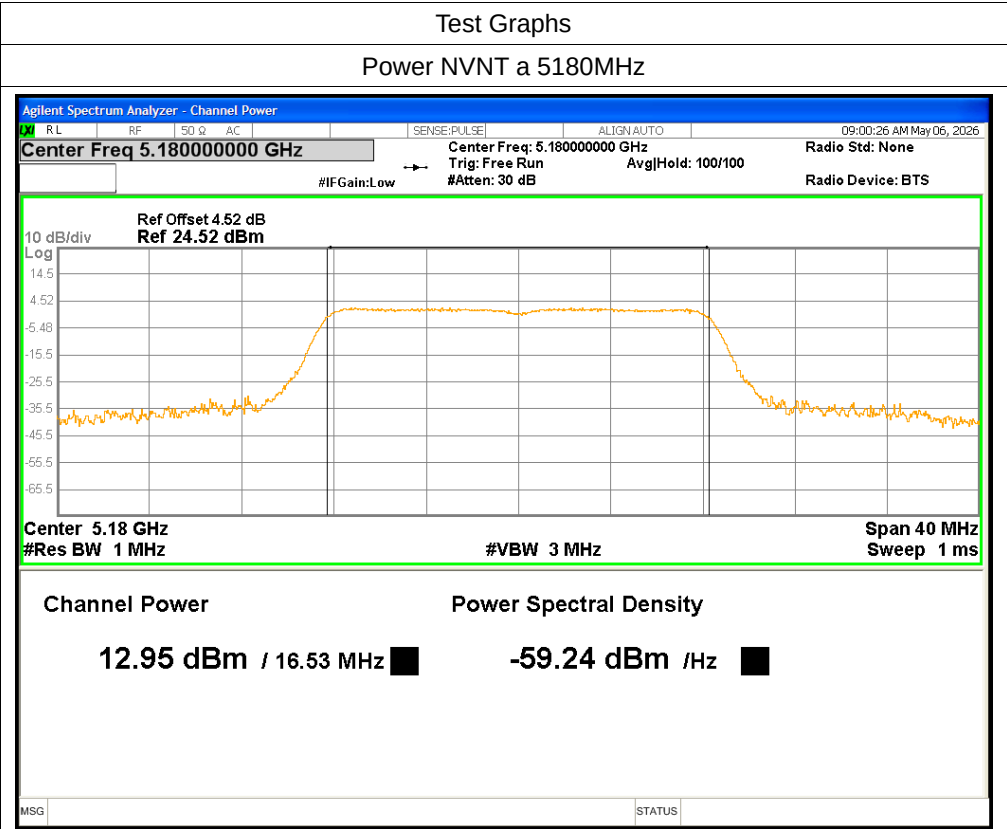


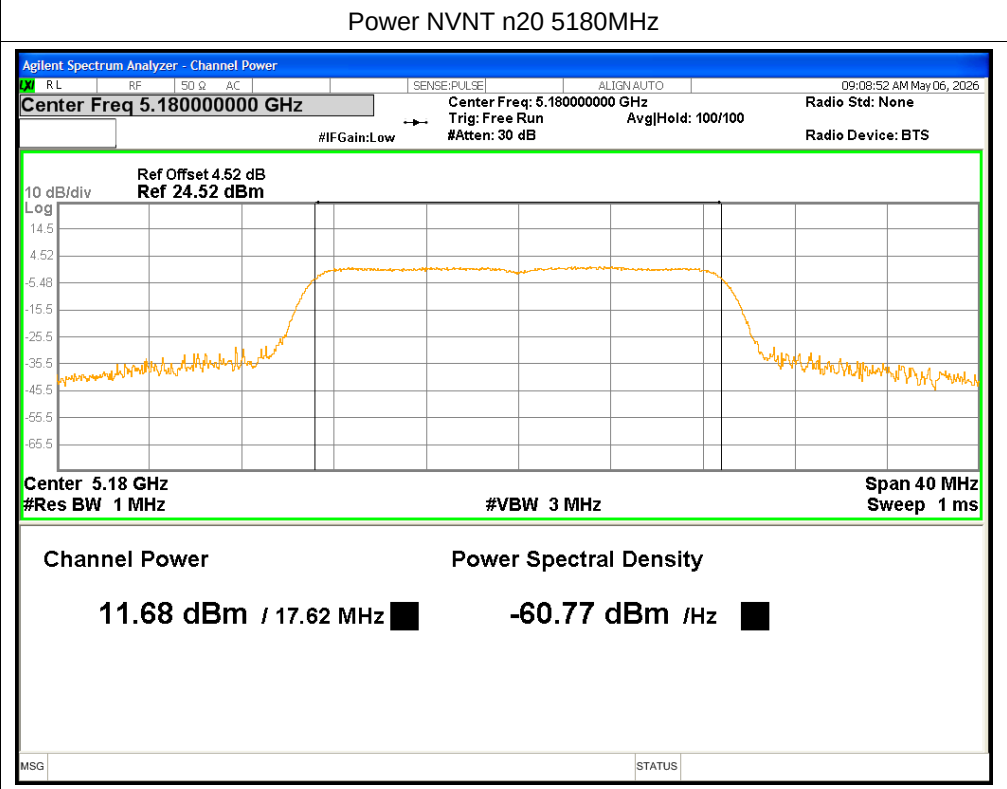
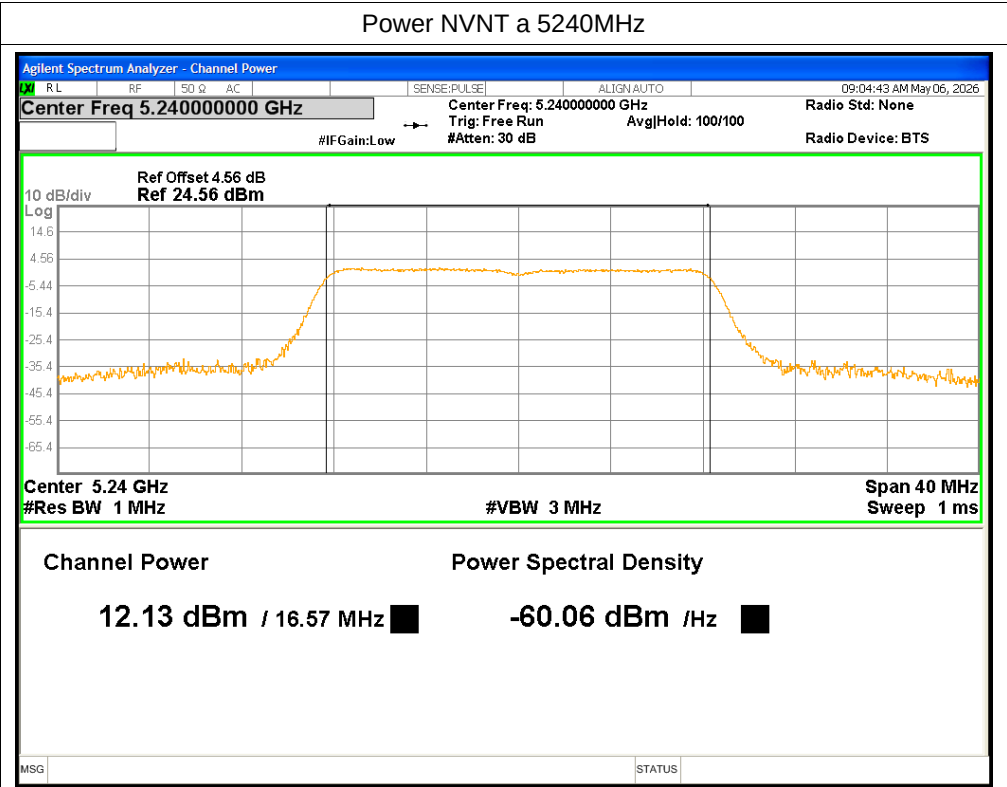


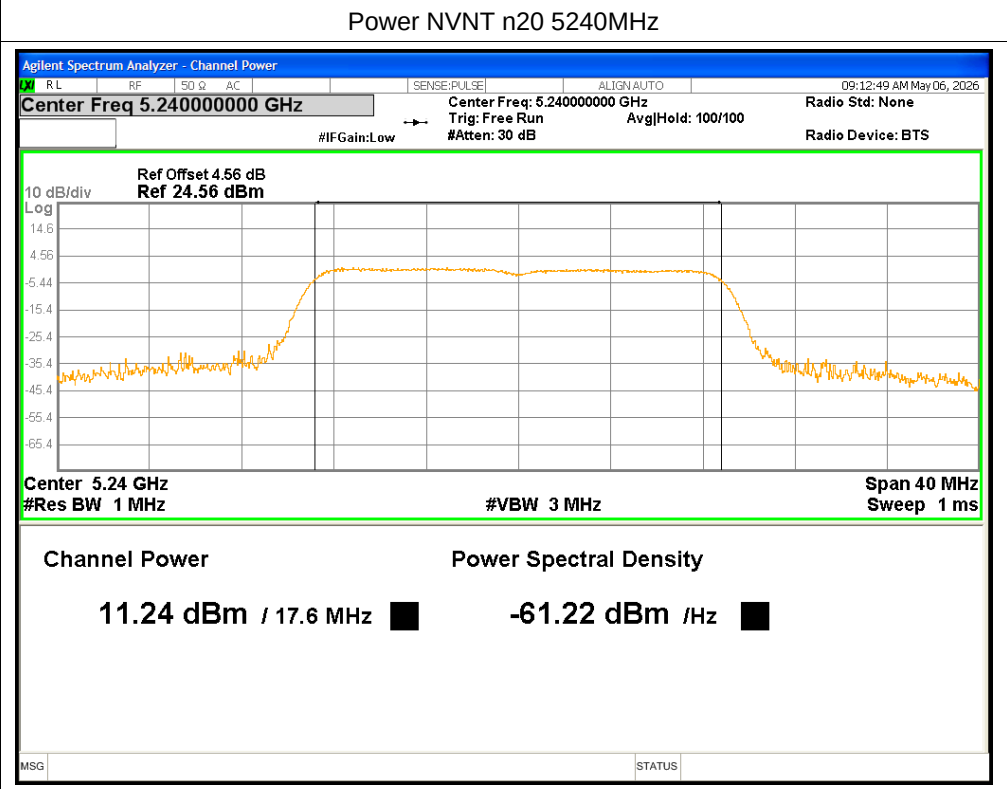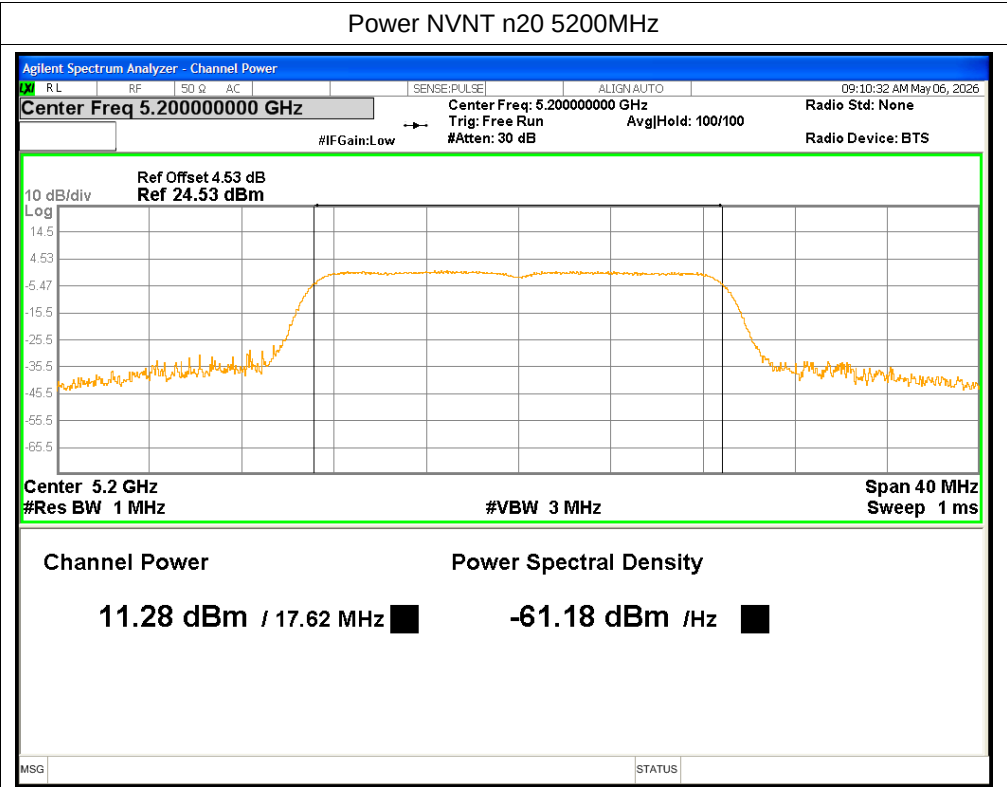

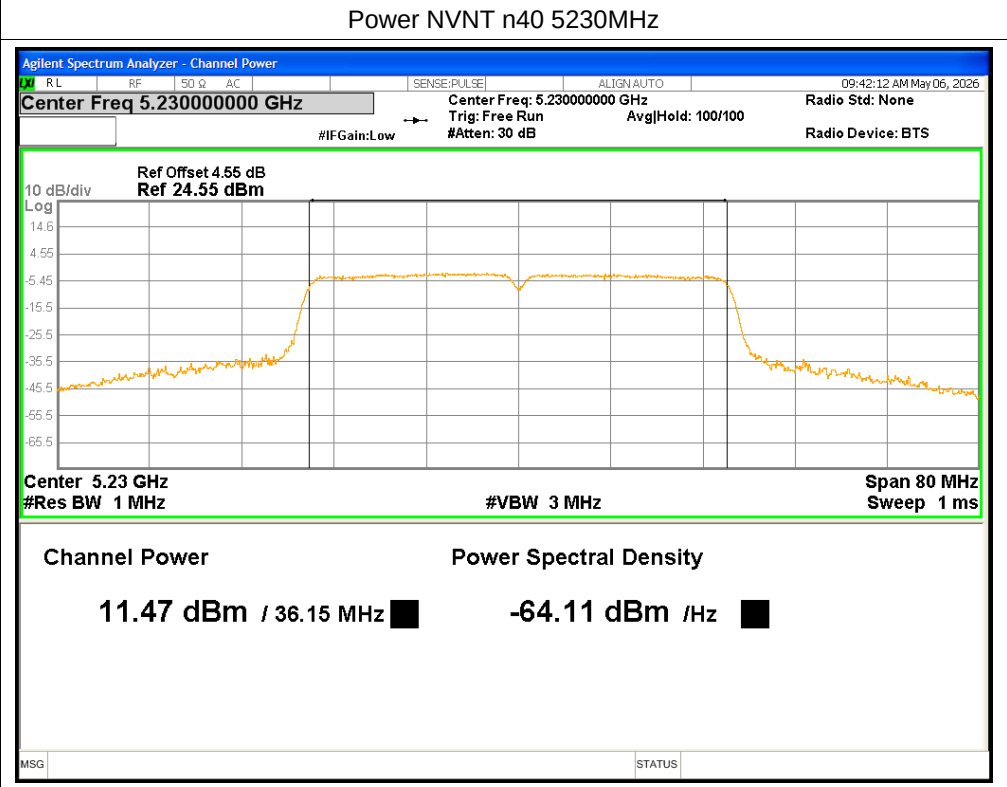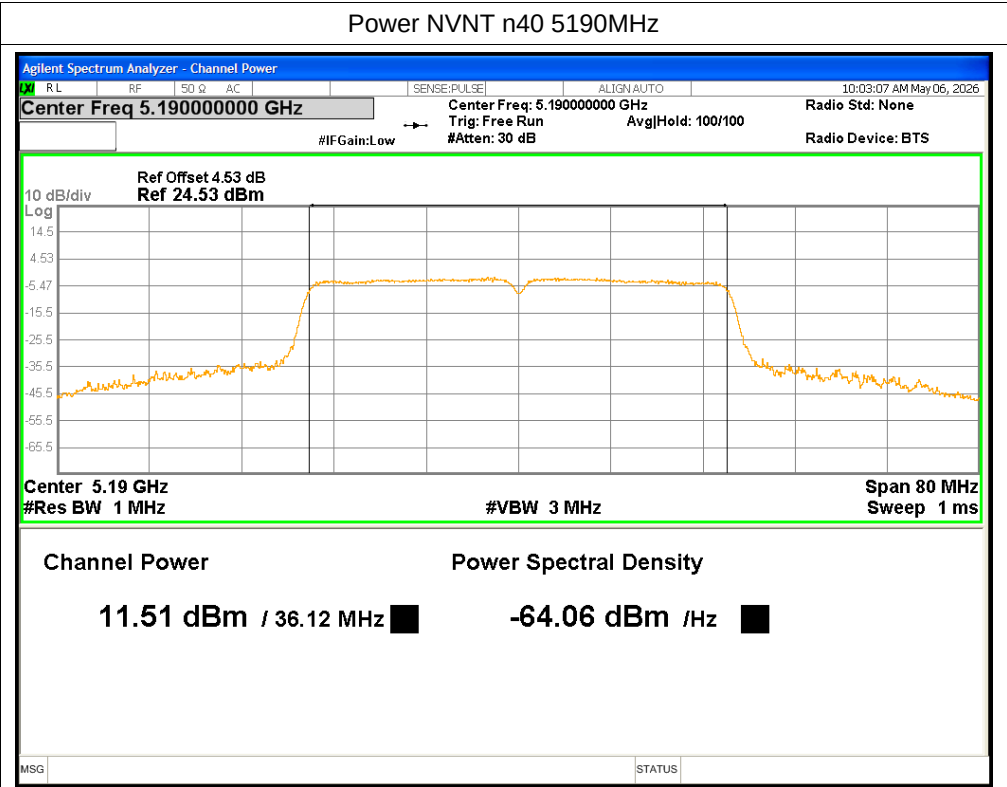

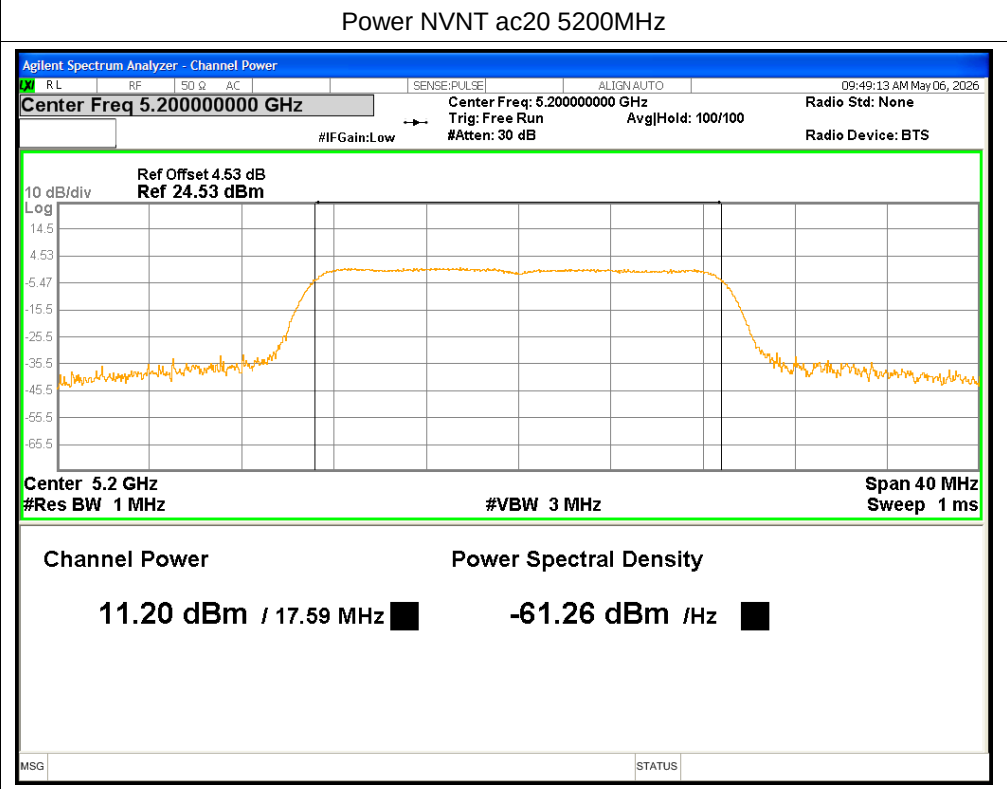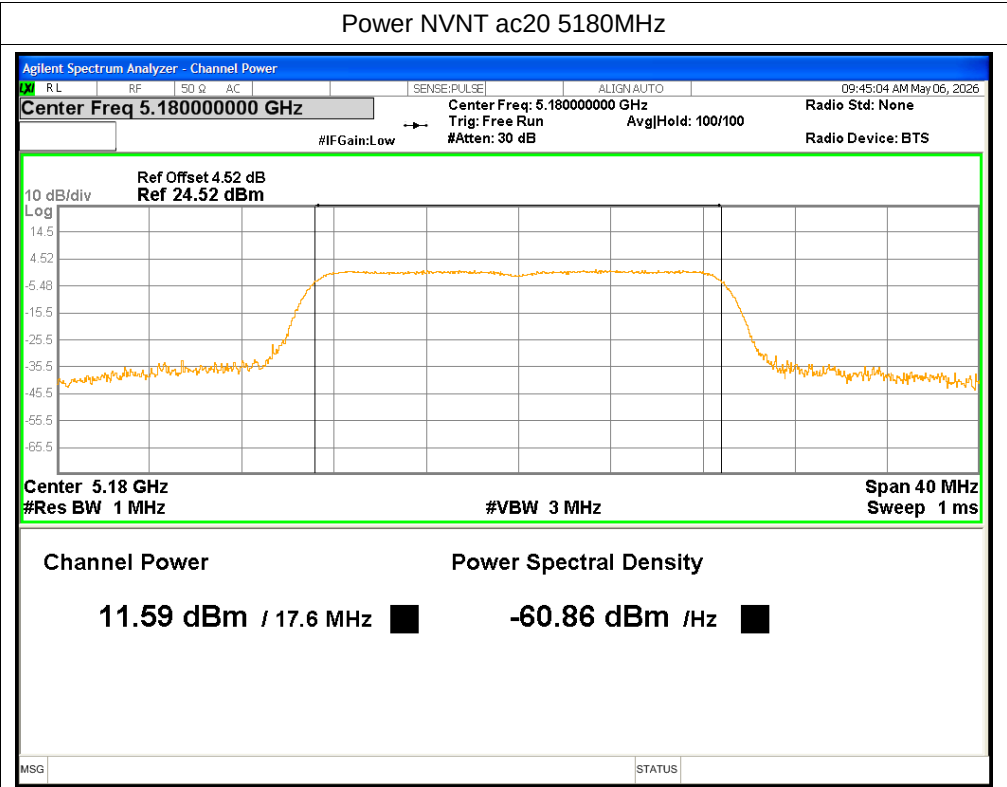


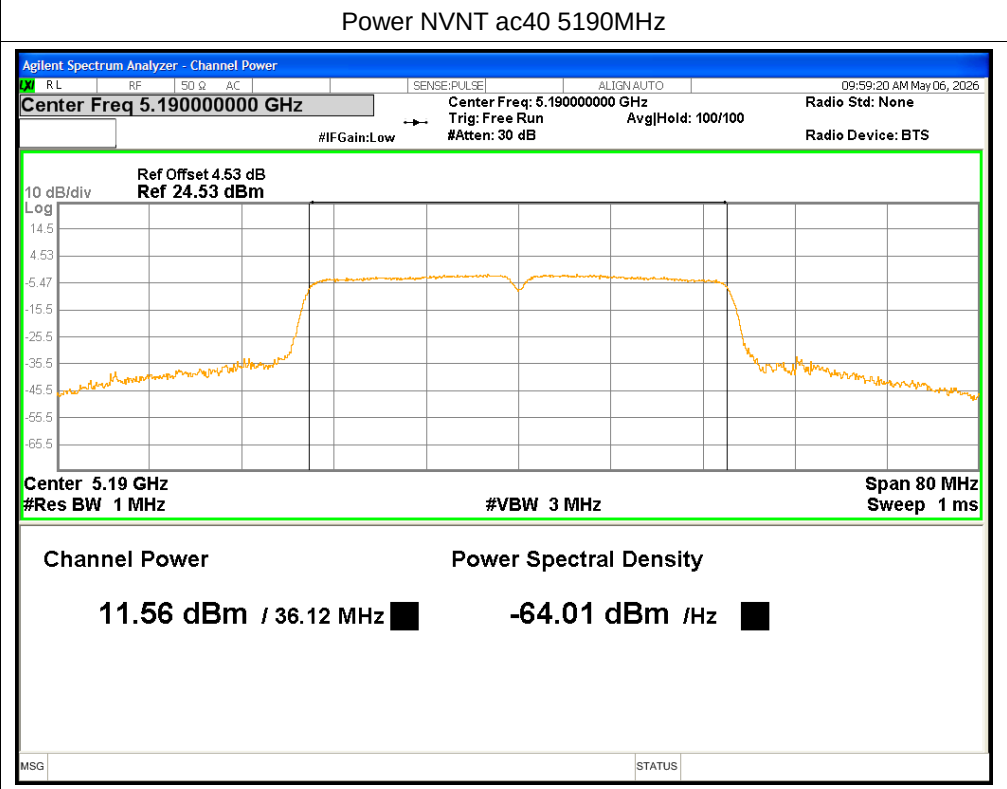
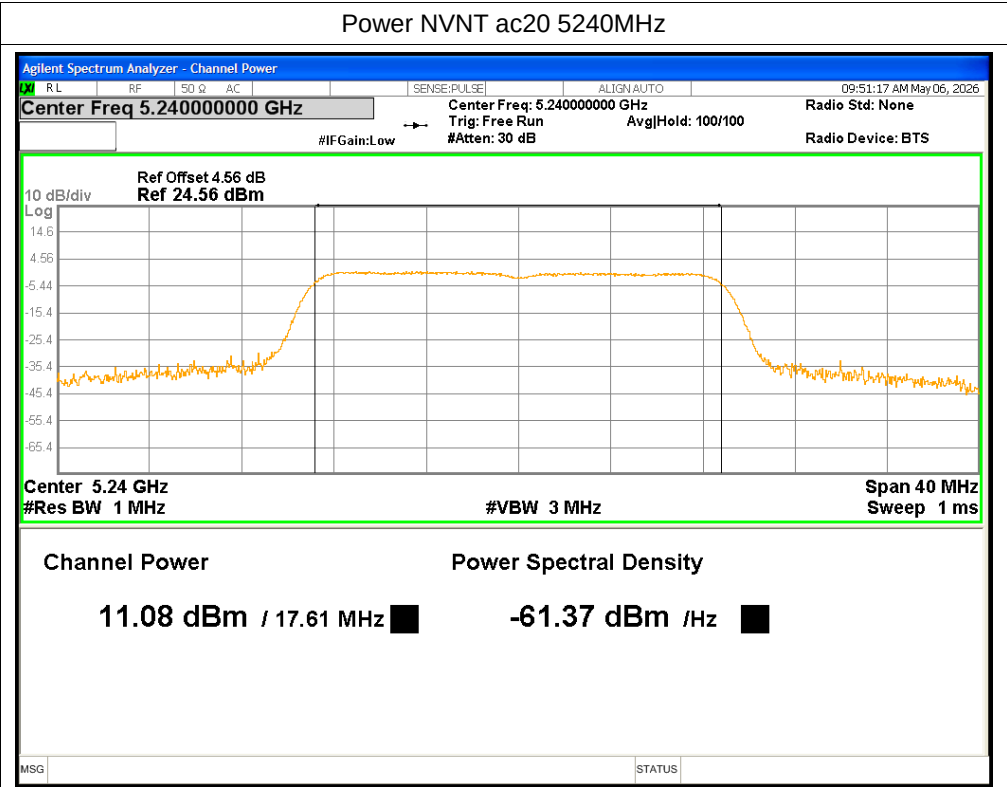


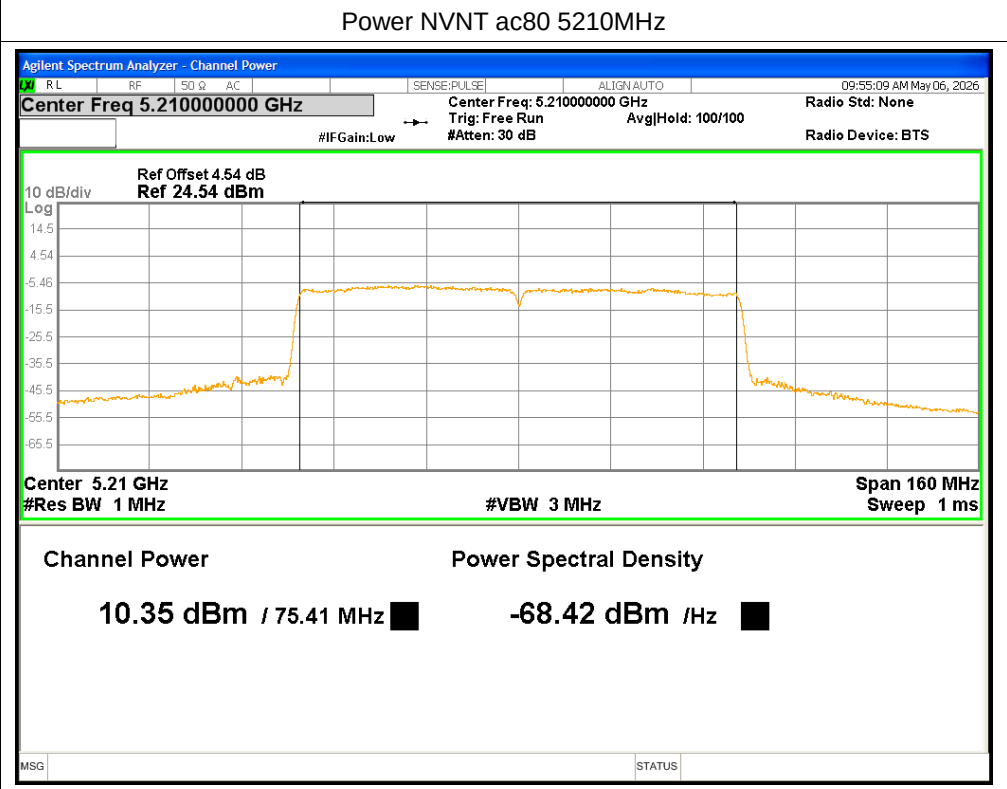
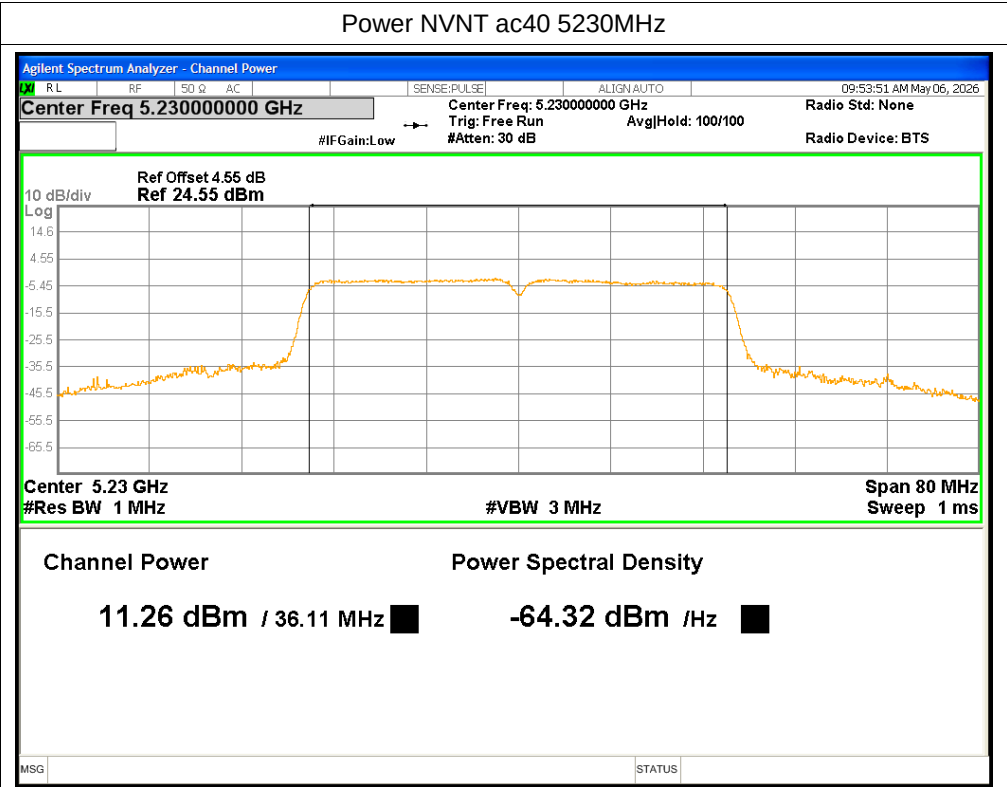




-26dB Bandwidth



Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	26.14	Pass
NVNT	a	5200	27.19	Pass
NVNT	a	5240	26.68	Pass
NVNT	n20	5180	28.44	Pass
NVNT	n20	5200	28.87	Pass
NVNT	n20	5240	27.92	Pass
NVNT	n40	5190	47.77	Pass
NVNT	n40	5230	53.86	Pass
NVNT	ac20	5180	27.25	Pass
NVNT	ac20	5200	27.59	Pass
NVNT	ac20	5240	27.47	Pass
NVNT	ac40	5190	53.16	Pass
NVNT	ac40	5230	54.34	Pass
NVNT	ac80	5210	87.86	Pass


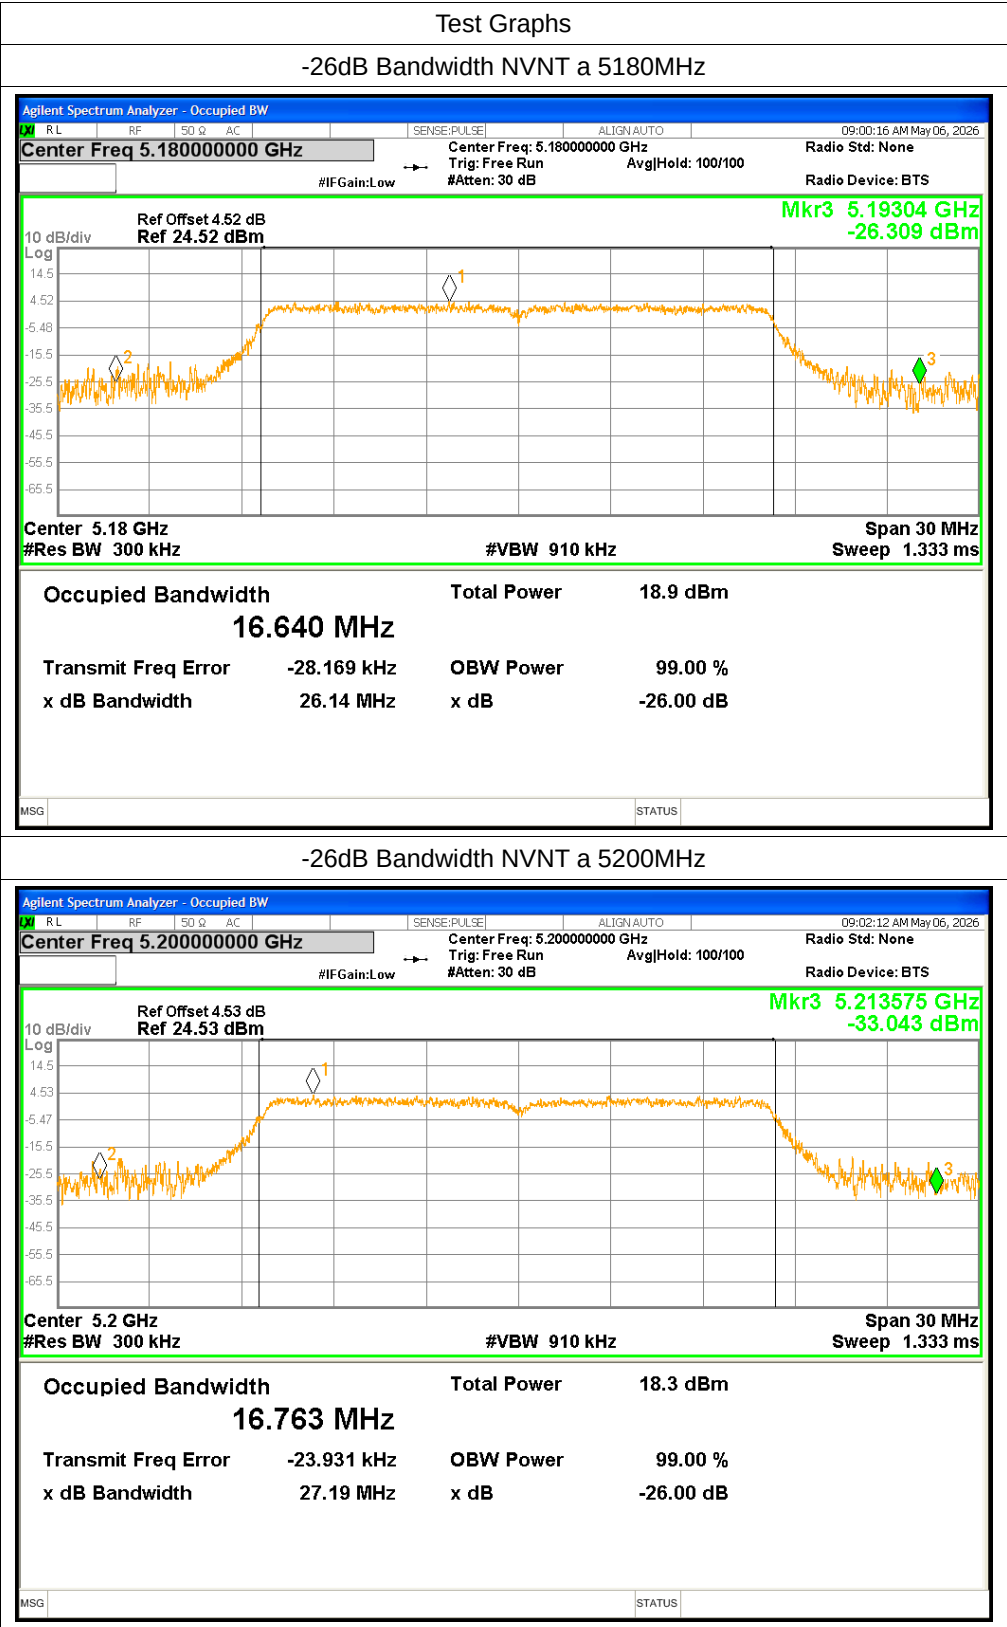


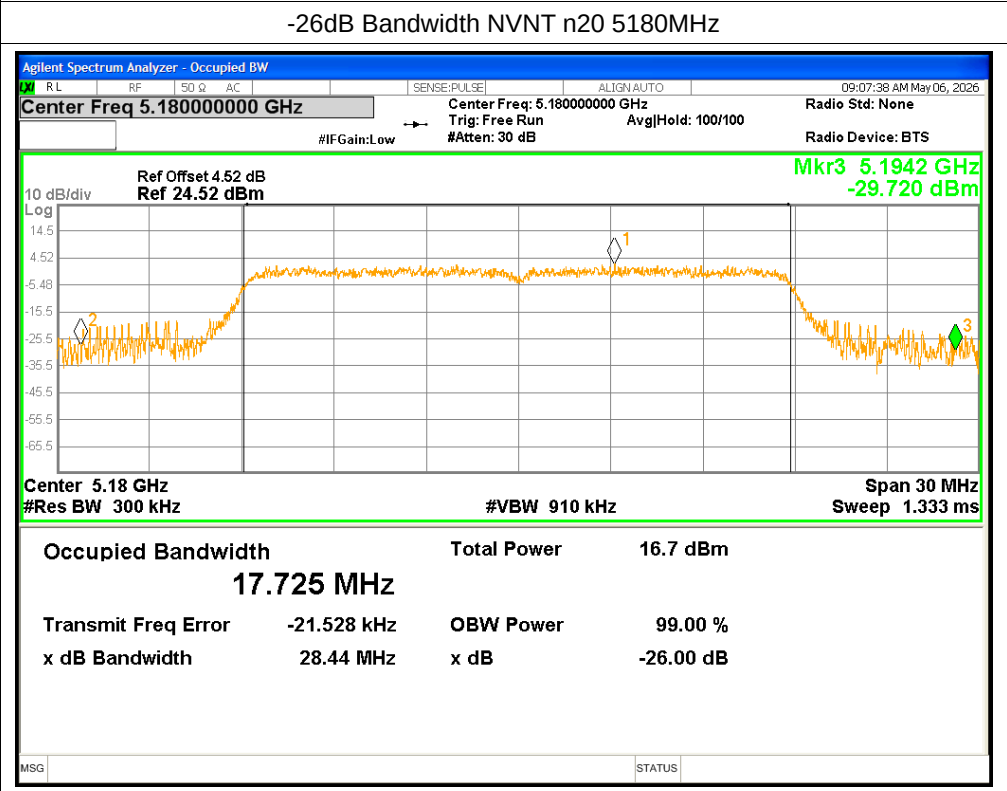
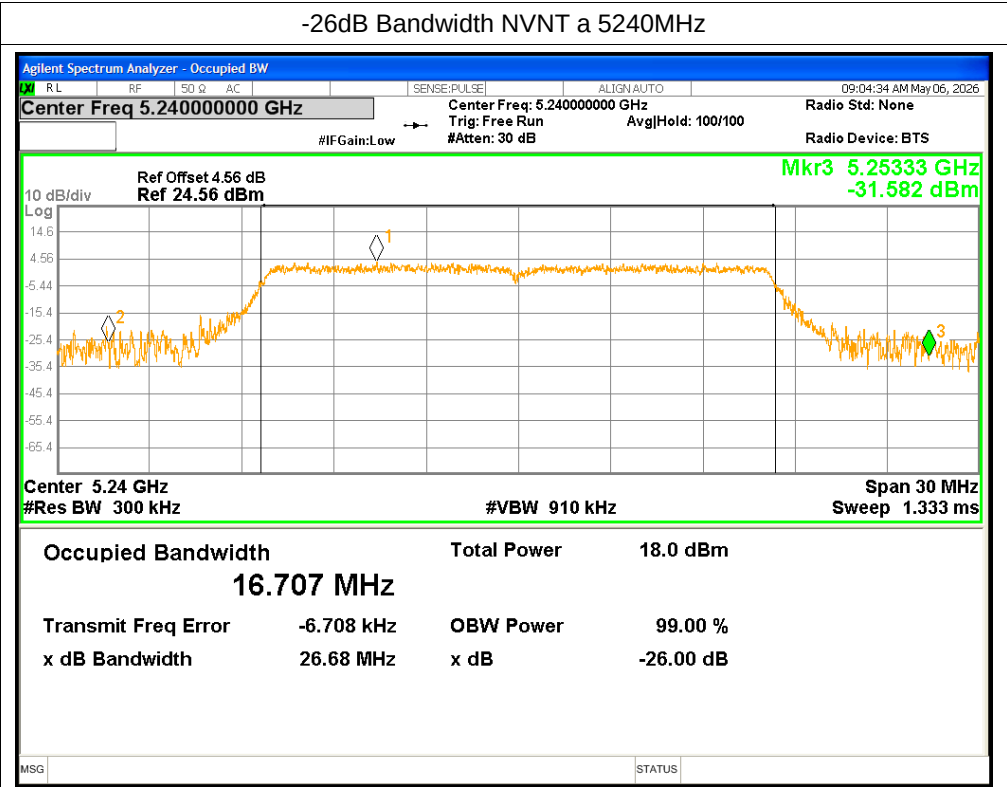


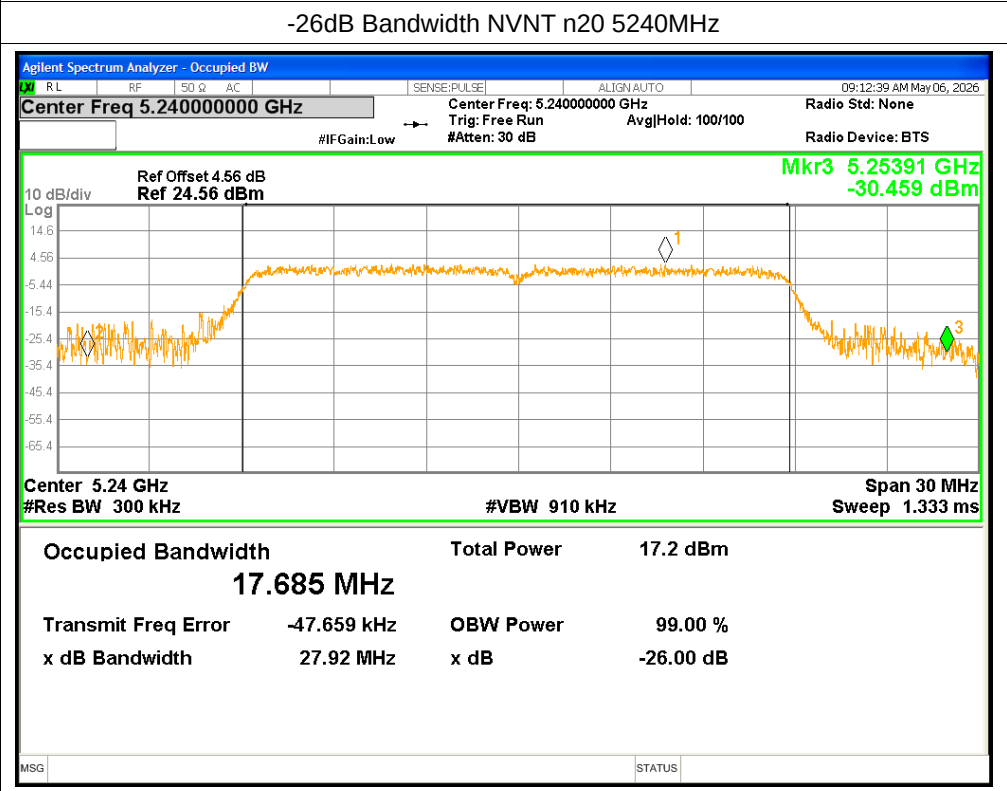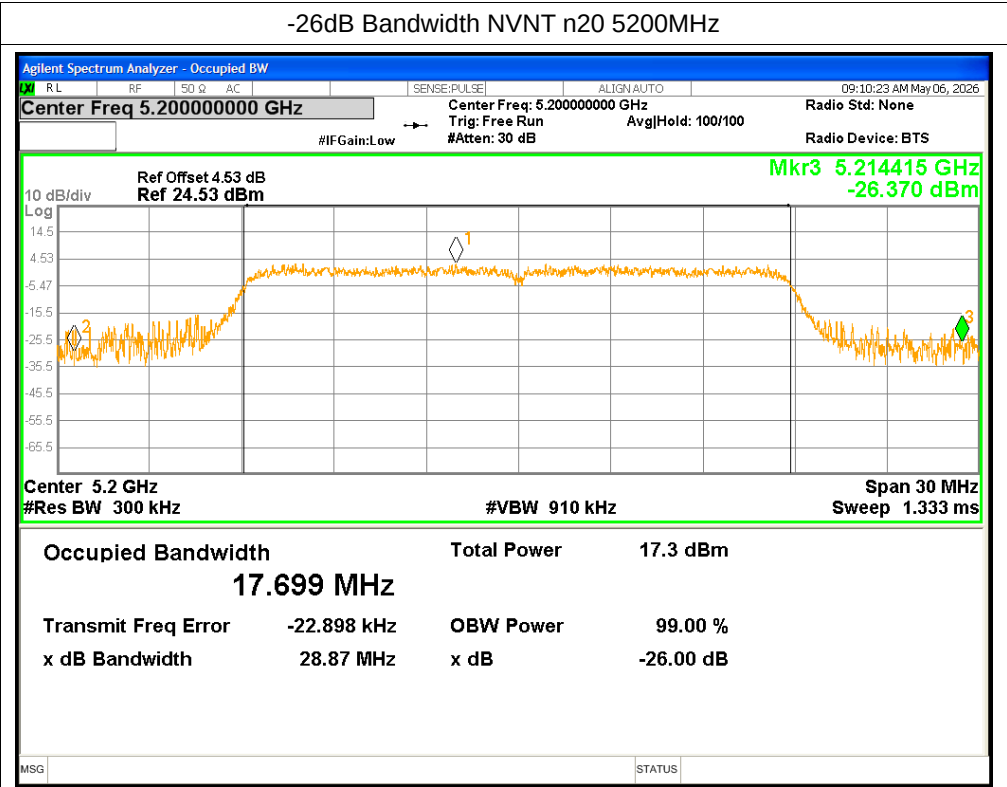

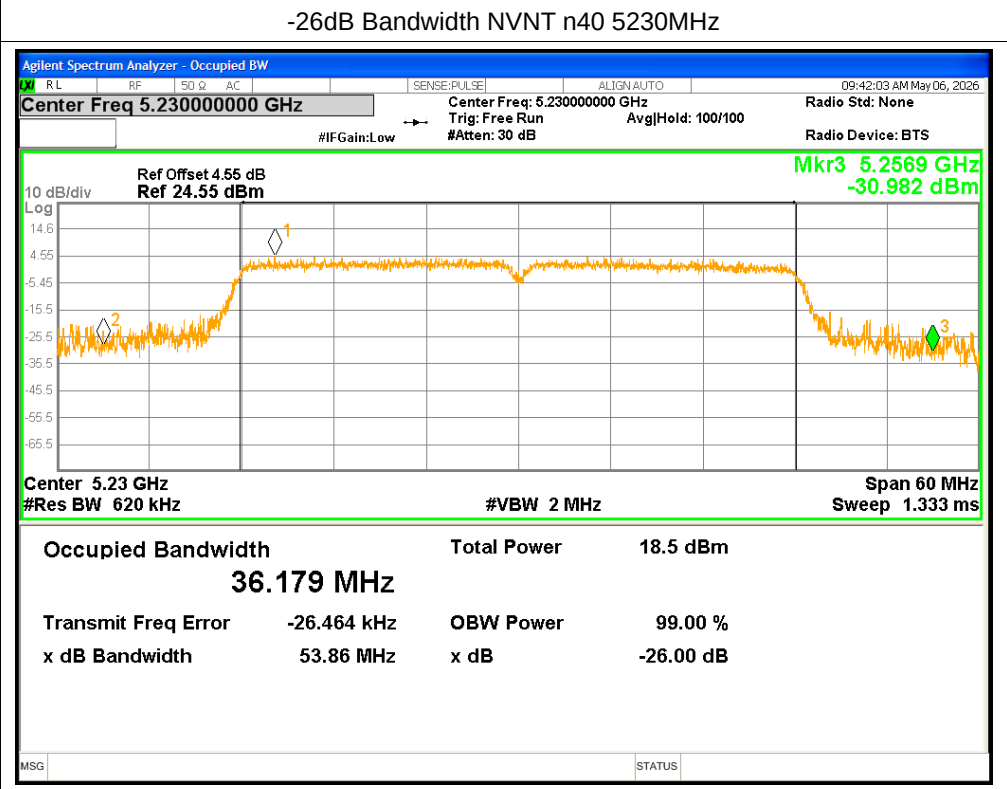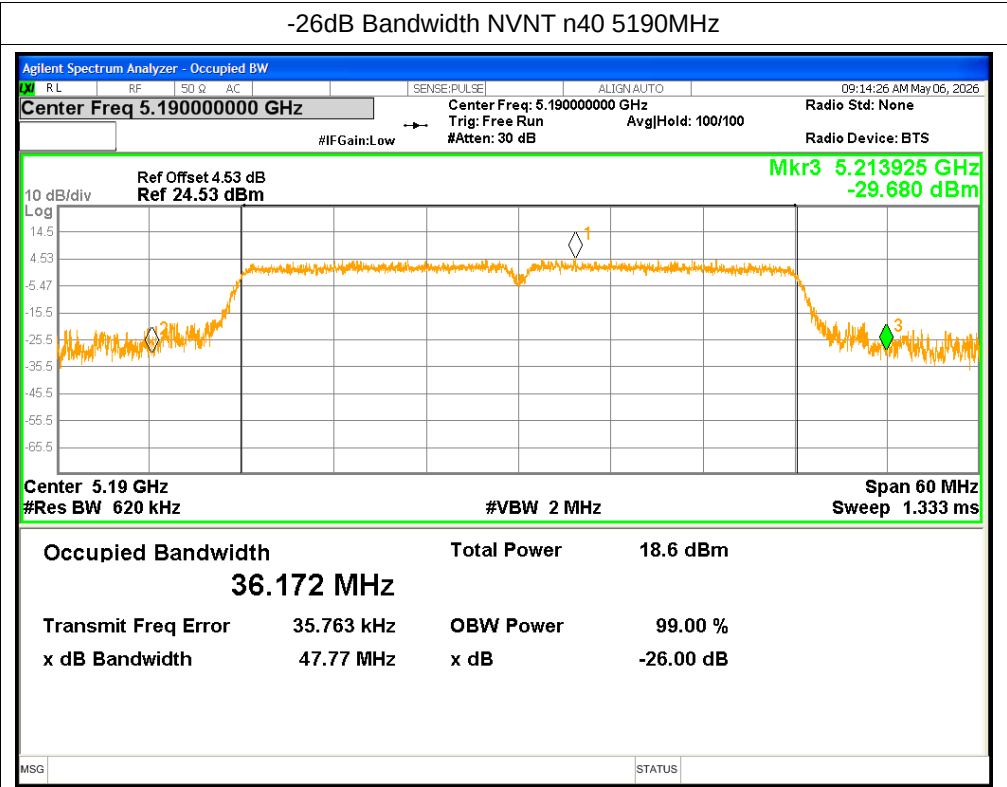

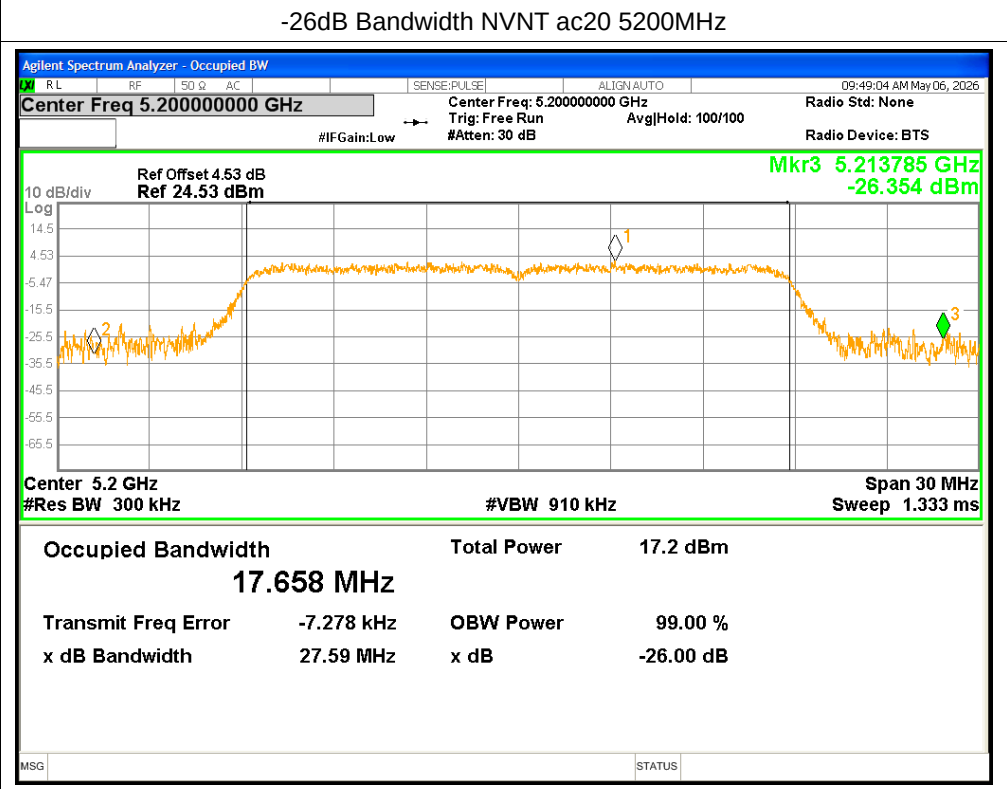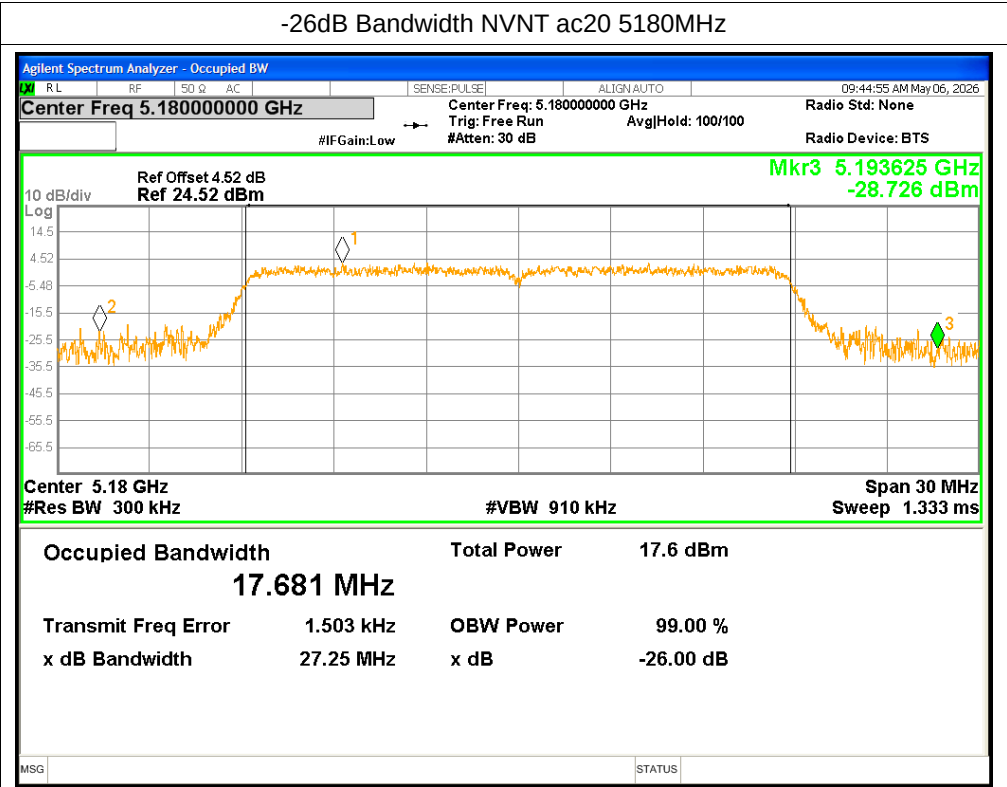


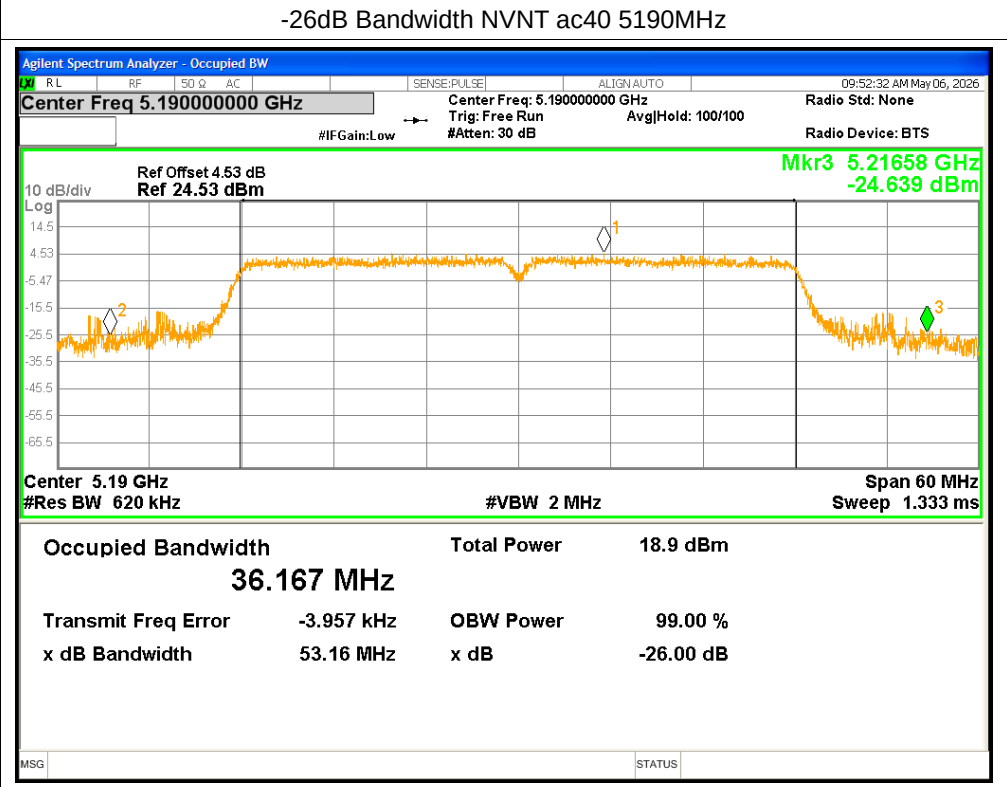
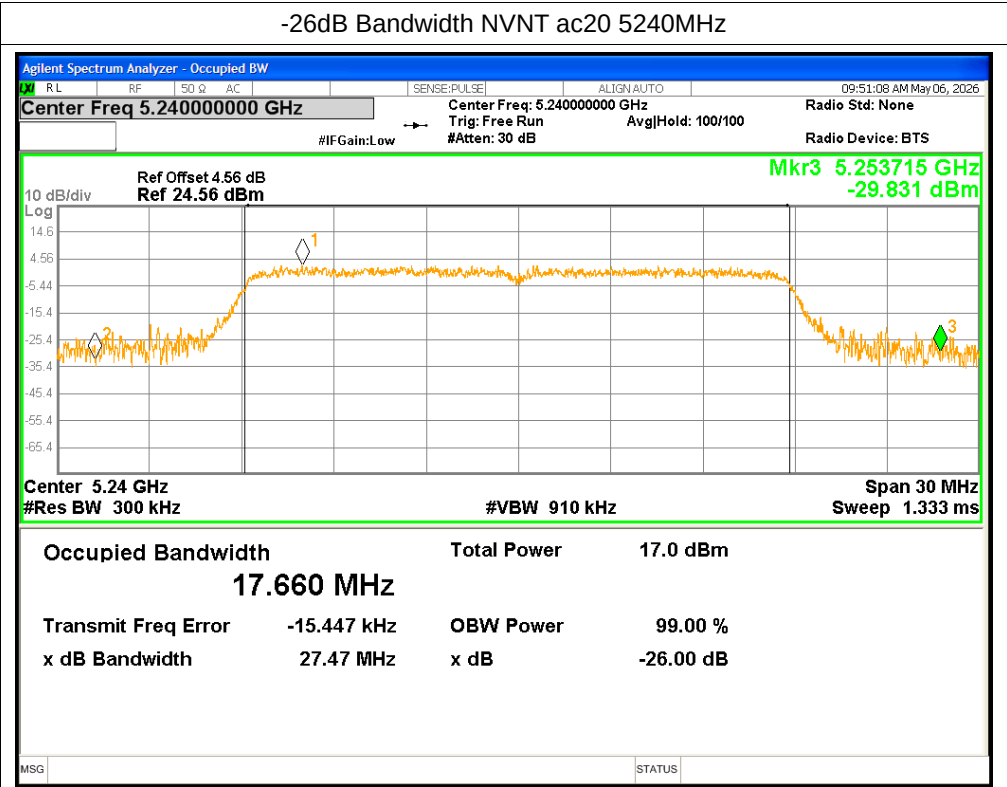


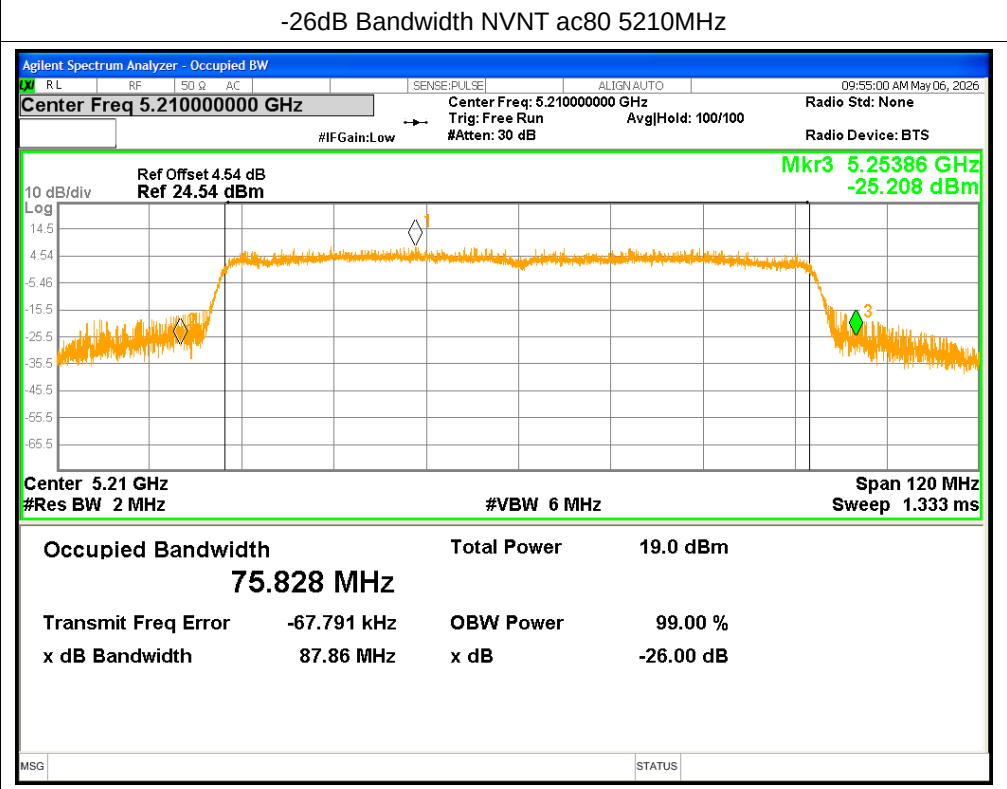
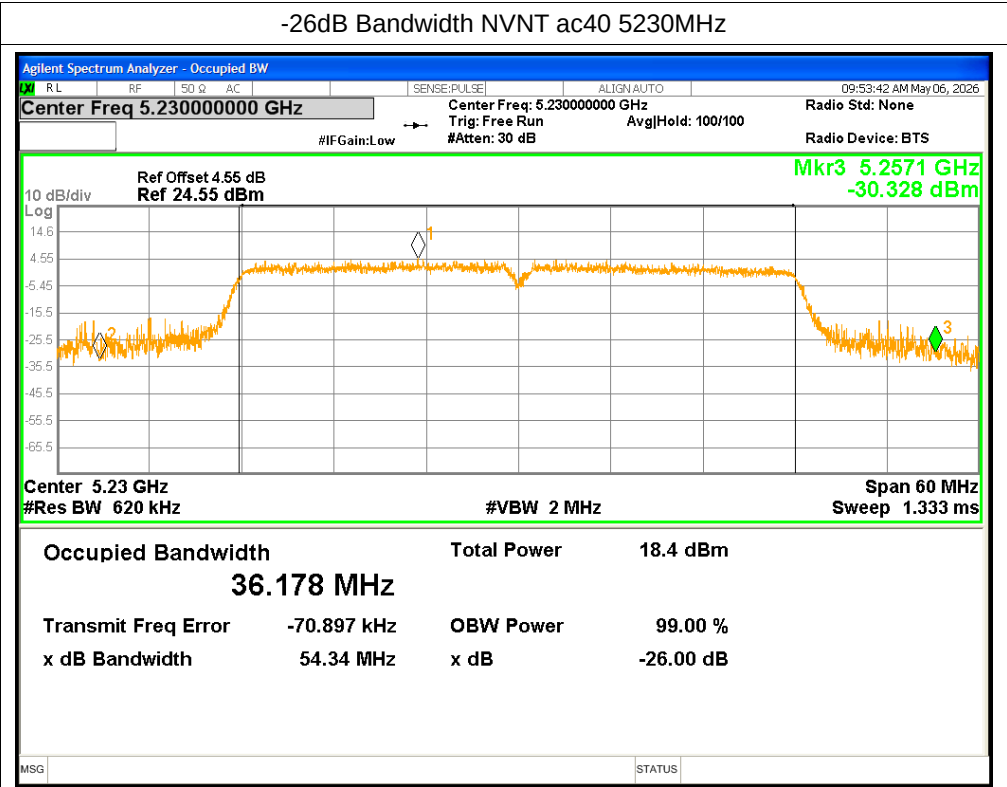




Occupied Channel Bandwidth



Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.527
NVNT	a	5200	16.57
NVNT	a	5240	16.567
NVNT	n20	5180	17.616
NVNT	n20	5200	17.62
NVNT	n20	5240	17.6
NVNT	n40	5190	36.115
NVNT	n40	5230	36.147
NVNT	ac20	5180	17.597
NVNT	ac20	5200	17.593
NVNT	ac20	5240	17.607
NVNT	ac40	5190	36.12
NVNT	ac40	5230	36.11
NVNT	ac80	5210	75.408


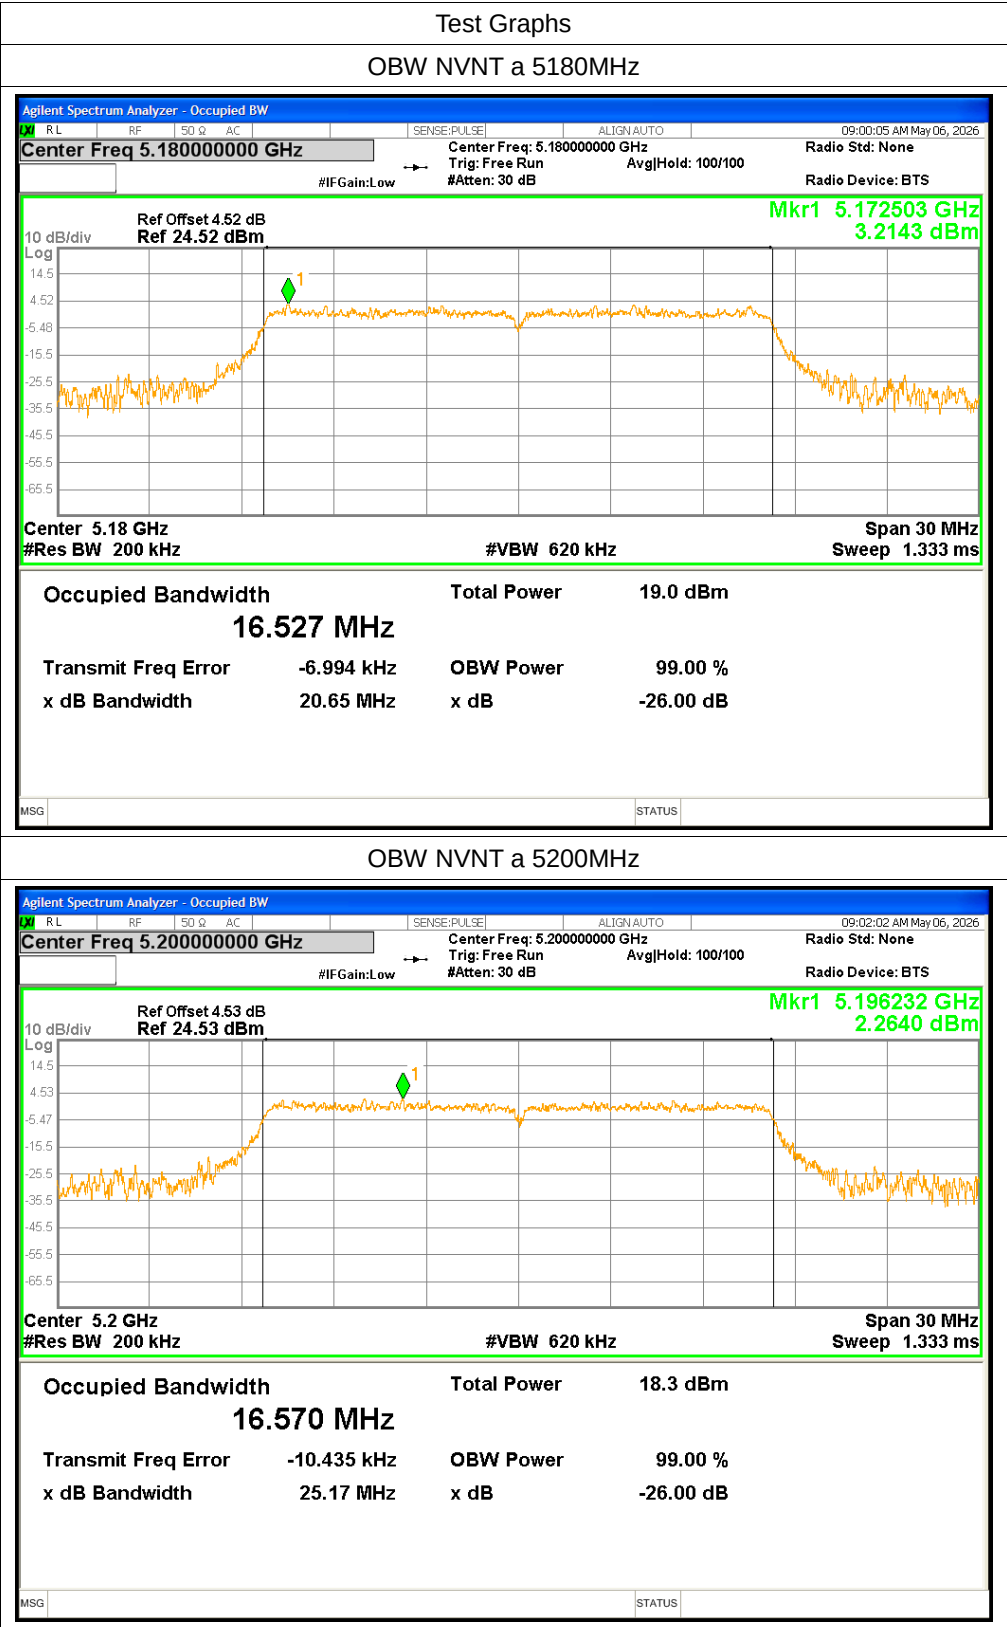


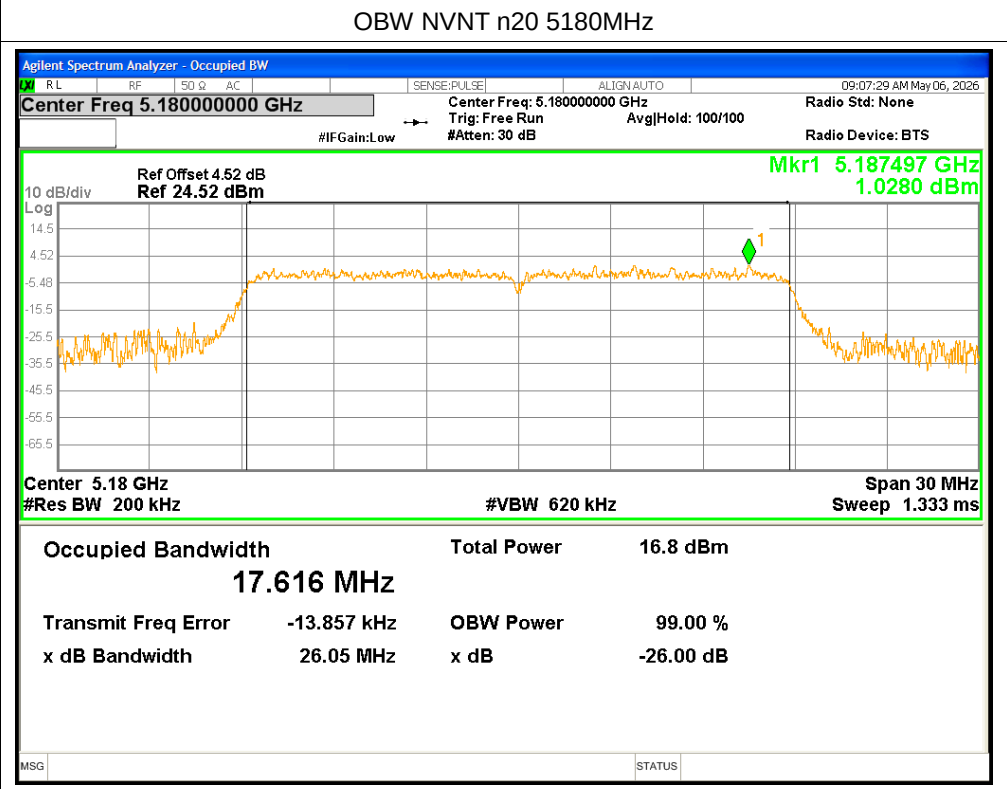
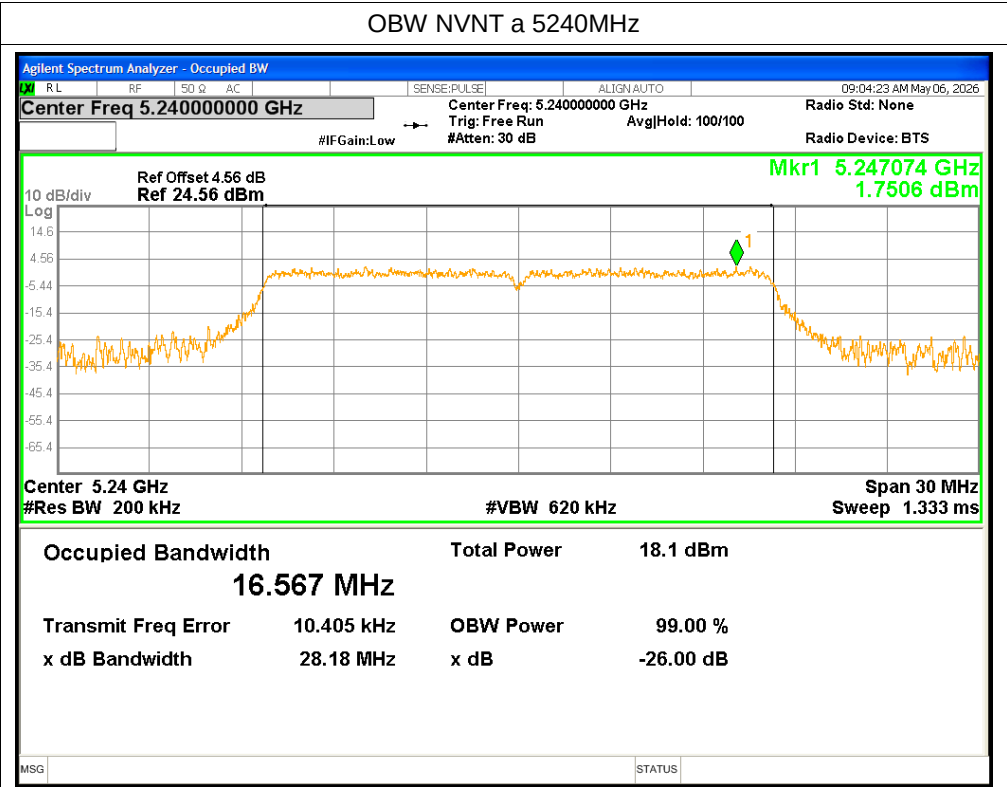


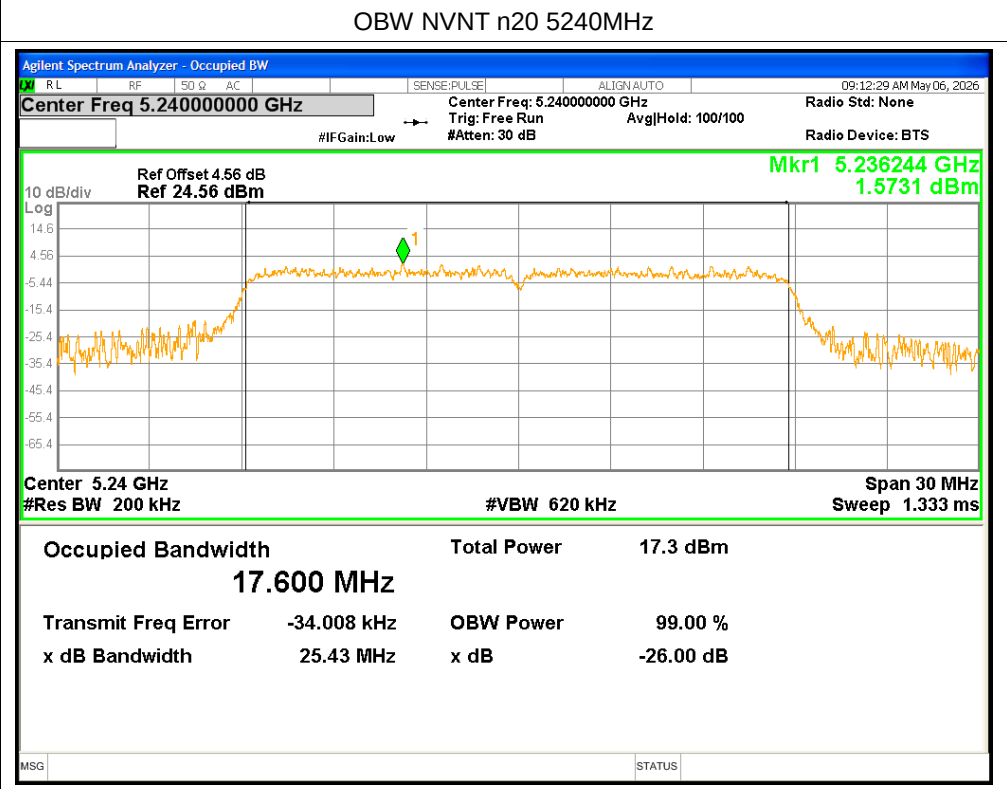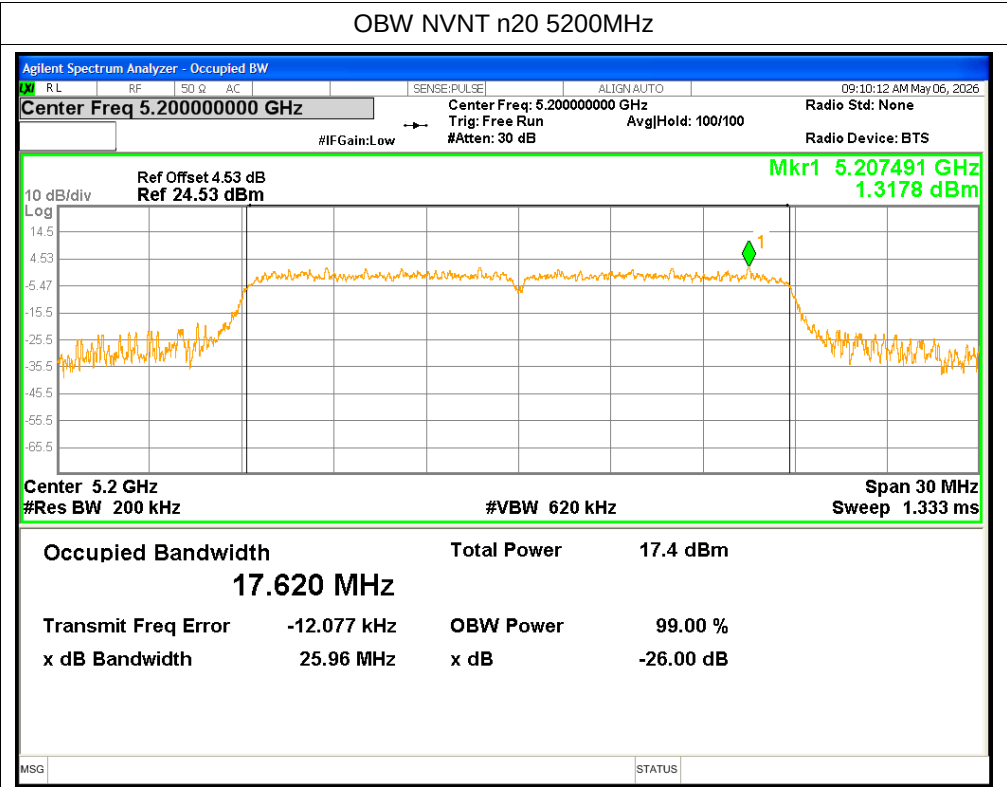

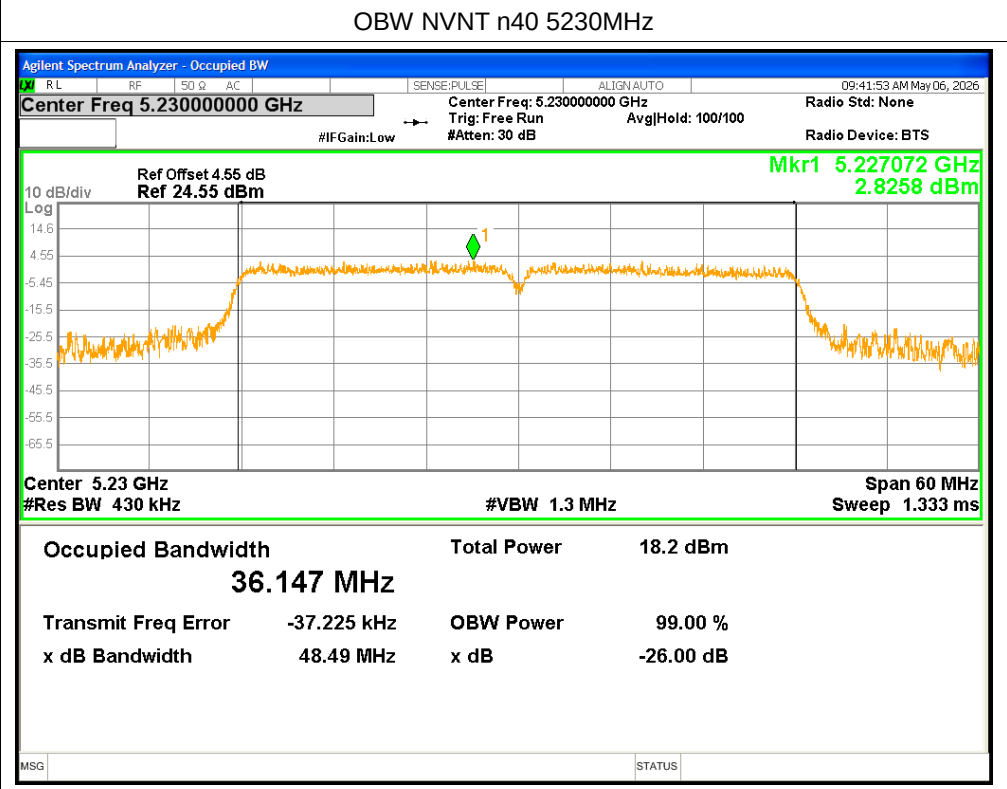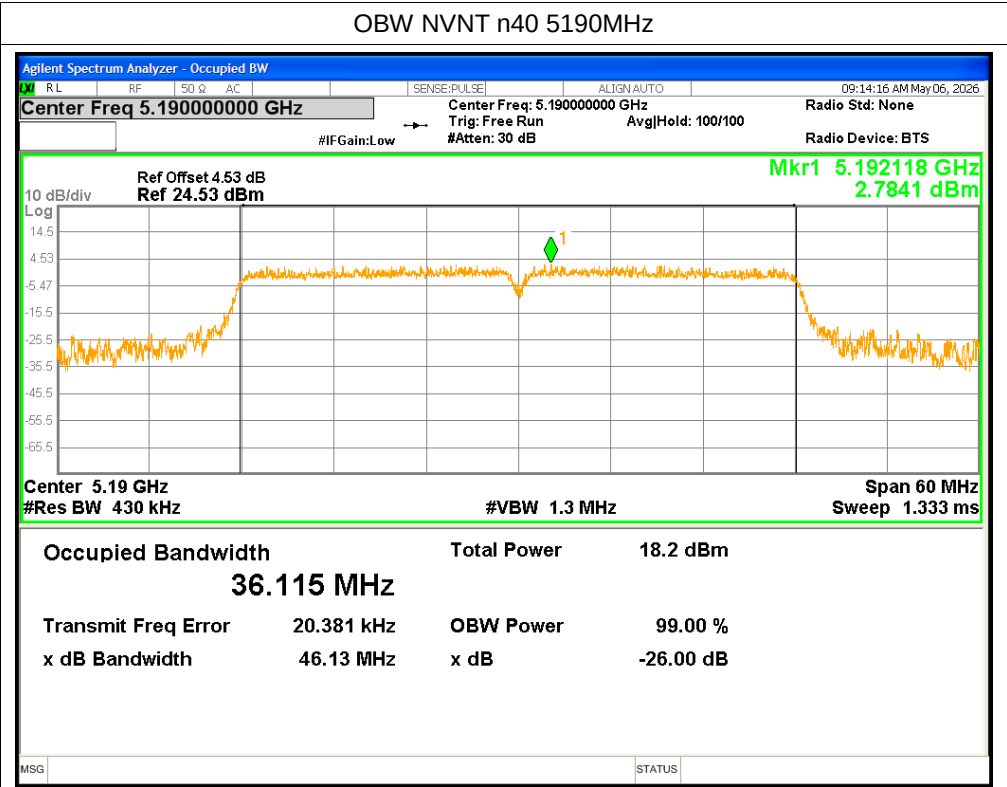

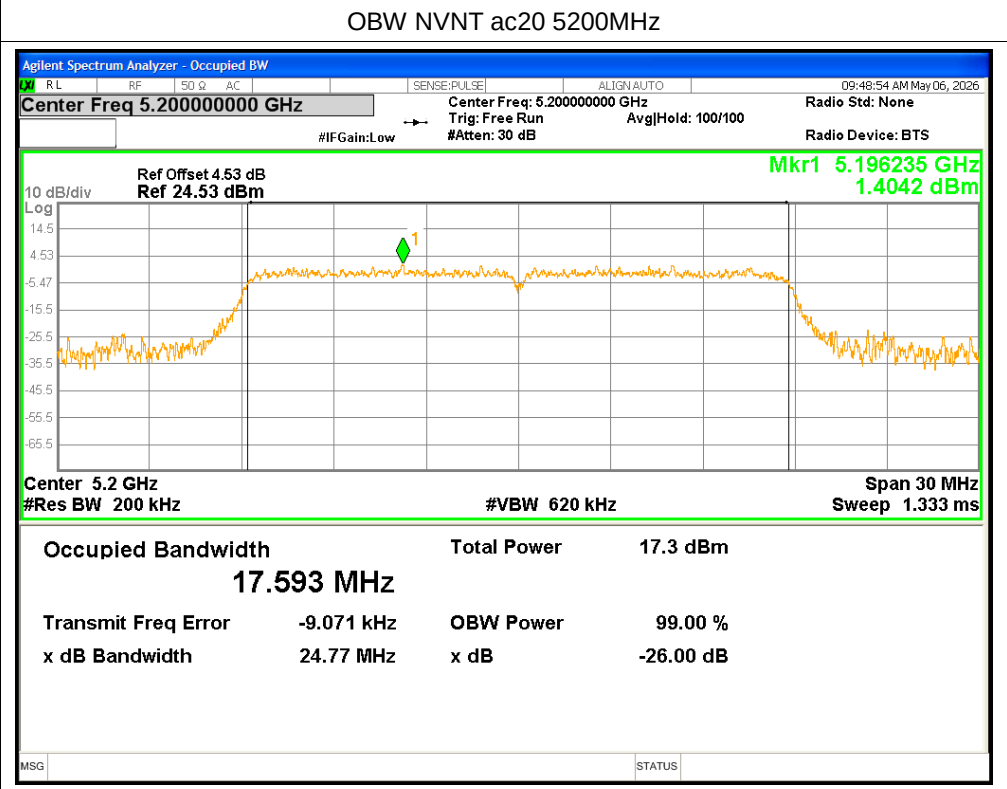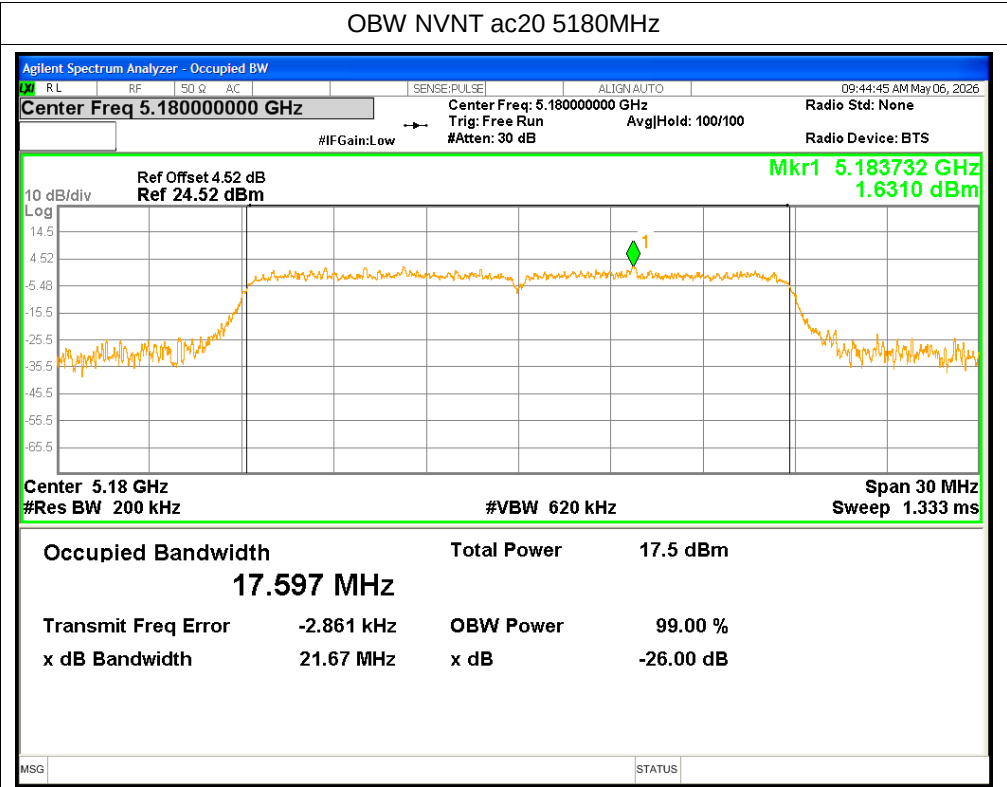

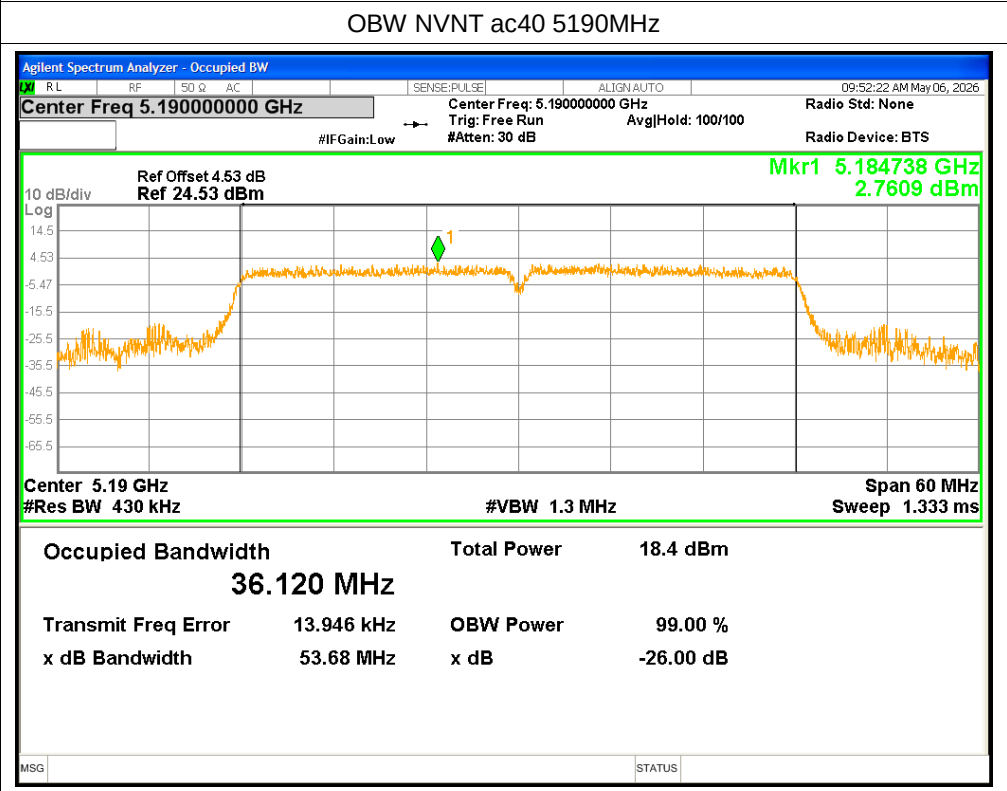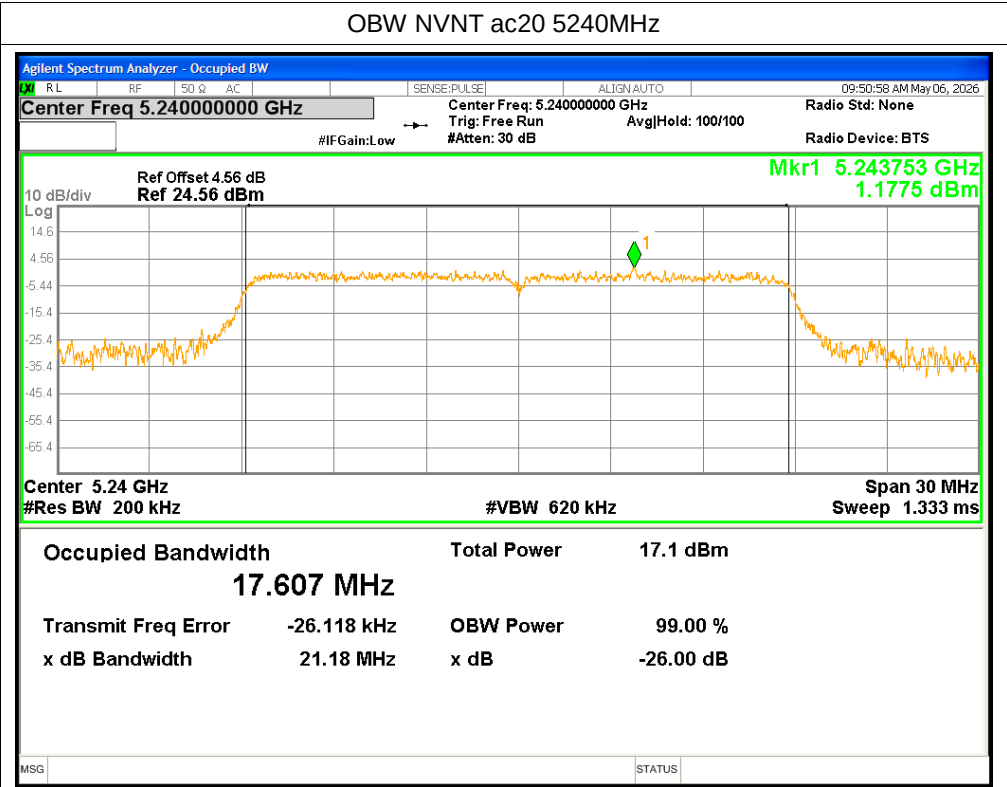

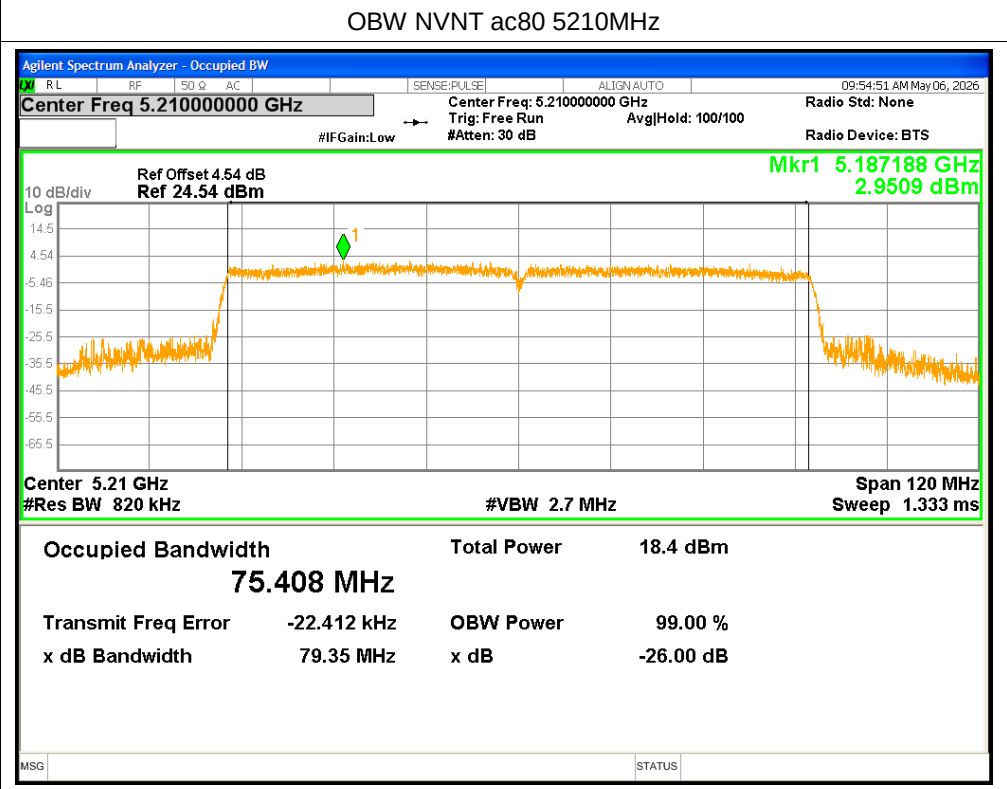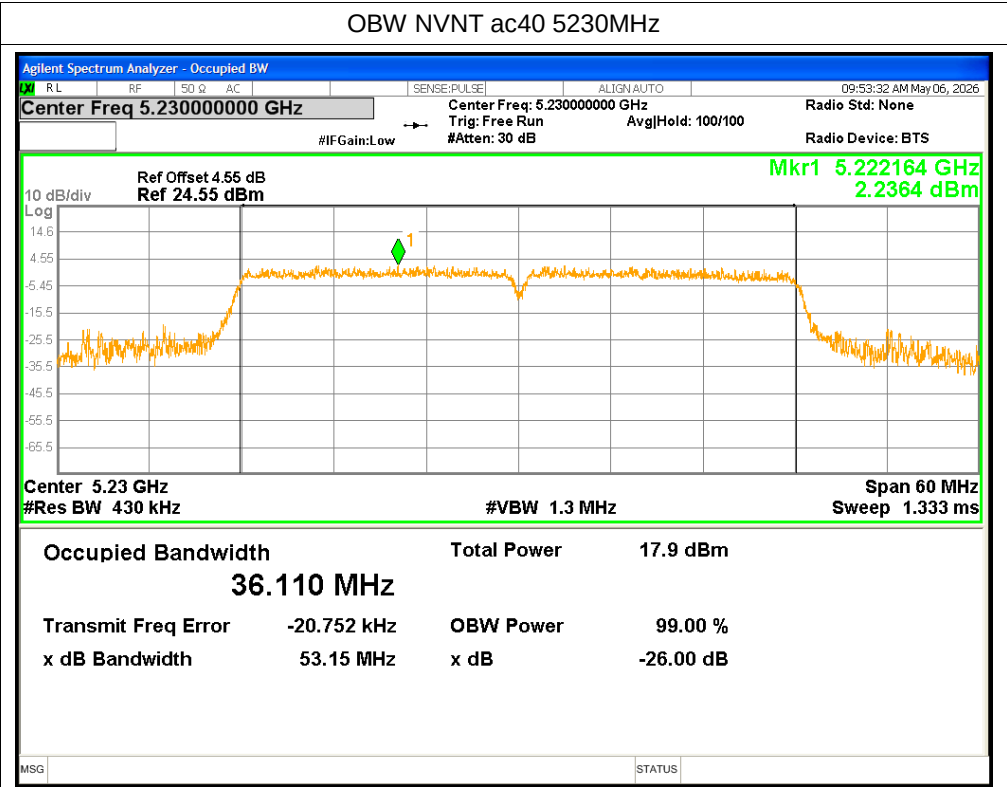

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	2.578	0.45	3.028	<=11	Pass
NVNT	a	5200	1.799	0.45	2.249	<=11	Pass
NVNT	a	5240	1.63	0.45	2.08	<=11	Pass
NVNT	n20	5180	1.054	0.53	1.584	<=11	Pass
NVNT	n20	5200	0.569	0.53	1.099	<=11	Pass
NVNT	n20	5240	0.535	0.53	1.065	<=11	Pass
NVNT	n40	5190	-1.872	1.01	-0.862	<=11	Pass
NVNT	n40	5230	-1.891	1	-0.891	<=11	Pass
NVNT	ac20	5180	1.03	0.53	1.56	<=11	Pass
NVNT	ac20	5200	0.399	0.53	0.929	<=11	Pass
NVNT	ac20	5240	0.478	0.53	1.008	<=11	Pass
NVNT	ac40	5190	-1.924	1	-0.924	<=11	Pass
NVNT	ac40	5230	-1.931	1	-0.931	<=11	Pass
NVNT	ac80	5210	-5.644	1.71	-3.934	<=11	Pass

