


RF Test Data


Duty Cycle	2
Maximum Peak Conducted Output Power	5
-6dB Bandwidth	6
Occupied Channel Bandwidth	9
Maximum Power Spectral Density Level	12
Band Edge	15
Conducted RF Spurious Emission	17

Duty Cycle


TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle[%]	DC Factor [dB]
11B	Ant1	2412	19.00	19.00	100.00	0.00
11B	Ant1	2437	49.00	49.00	100.00	0.00
11B	Ant1	2462	19.00	19.00	100.00	0.00
11G	Ant1	2412	5.48	5.75	95.30	0.21
11G	Ant1	2437	5.48	5.76	95.14	0.22
11G	Ant1	2462	5.49	5.77	95.15	0.22
11N20SISO	Ant1	2412	0.55	0.82	67.07	1.73
11N20SISO	Ant1	2437	0.55	0.82	67.07	1.73
11N20SISO	Ant1	2462	0.55	0.90	61.11	2.14

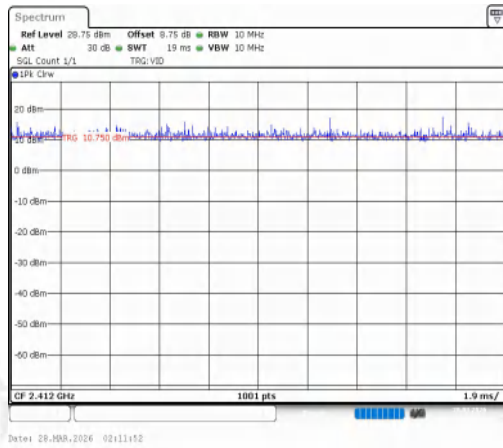

NTNV-11B-Ant1-2412

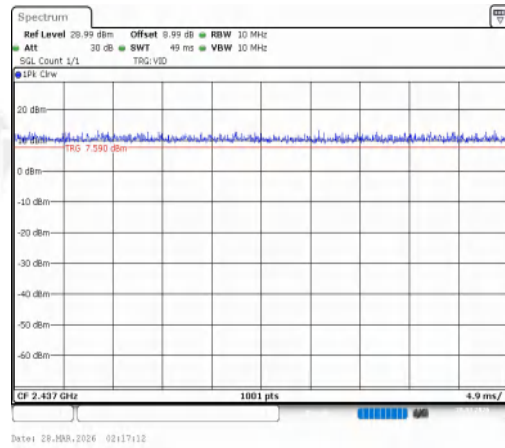


NTNV-11B-Ant1-2437

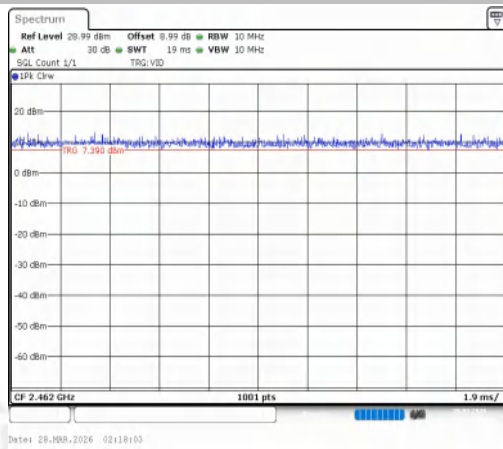


NTNV-11B-Ant1-2462




NTNV-11G-Ant1-2412

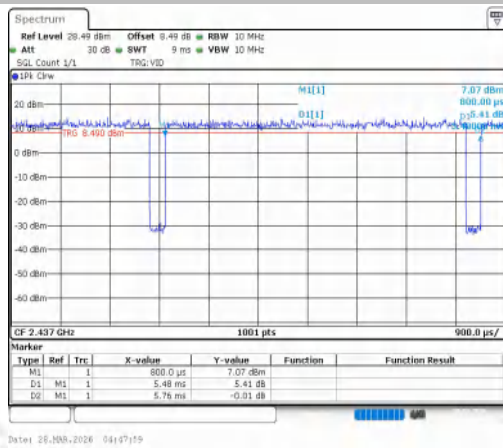


NTNV-11G-Ant1-2437

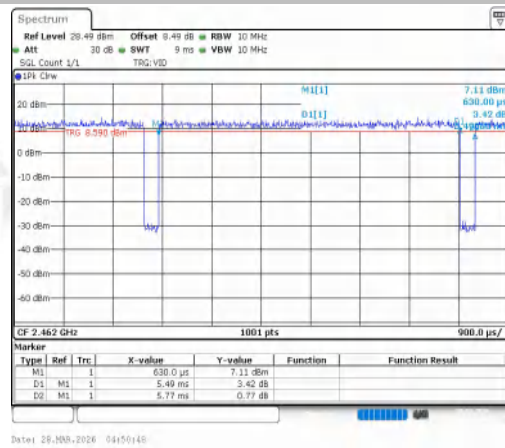


NTNV-11G-Ant1-2462

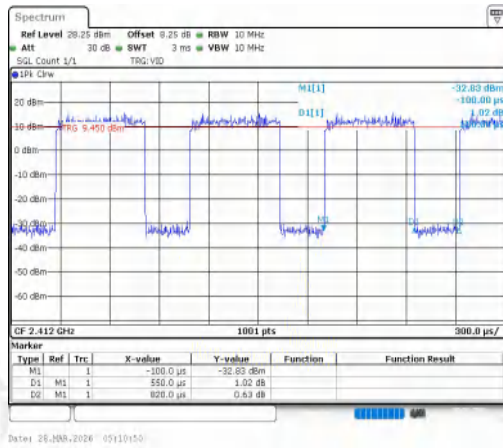

NTNV-11N20SISO-Ant1-2412

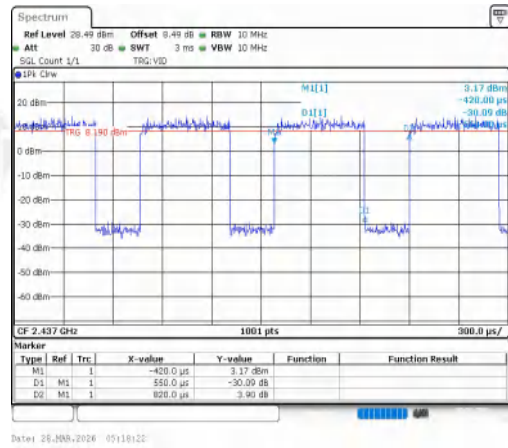

NTNV-11N20SISO-Ant1-2437

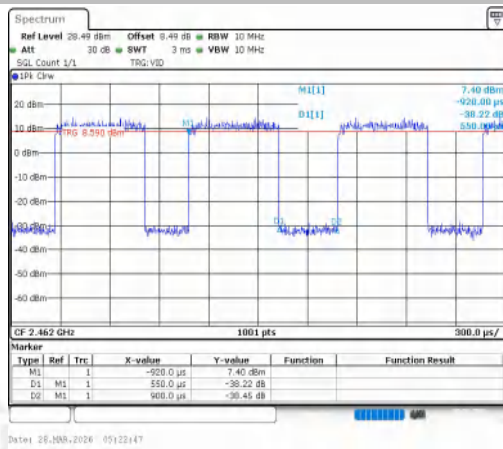


NTNV-11N20SISO-Ant1-2462

Maximum Peak Conducted Output Power


Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	8.16	≤ 30.00	PASS
11B	Ant1	2437	9.24	≤ 30.00	PASS
11B	Ant1	2462	9.54	≤ 30.00	PASS
11G	Ant1	2412	9.20	≤ 30.00	PASS
11G	Ant1	2437	9.65	≤ 30.00	PASS
11G	Ant1	2462	9.69	≤ 30.00	PASS
11N20SISO	Ant1	2412	9.12	≤ 30.00	PASS
11N20SISO	Ant1	2437	8.07	≤ 30.00	PASS
11N20SISO	Ant1	2462	8.14	≤ 30.00	PASS

-6dB Bandwidth

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.16	2407.44	2416.60	0.5	PASS
11B	Ant1	2437	9.16	2432.40	2441.56	0.5	PASS
11B	Ant1	2462	9.16	2457.44	2466.60	0.5	PASS
11G	Ant1	2412	16.52	2403.76	2420.28	0.5	PASS
11G	Ant1	2437	16.44	2428.80	2445.24	0.5	PASS
11G	Ant1	2462	16.52	2453.76	2470.28	0.5	PASS
11N20SISO	Ant1	2412	17.60	2403.24	2420.84	0.5	PASS
11N20SISO	Ant1	2437	17.80	2428.04	2445.84	0.5	PASS
11N20SISO	Ant1	2462	17.52	2453.32	2470.84	0.5	PASS

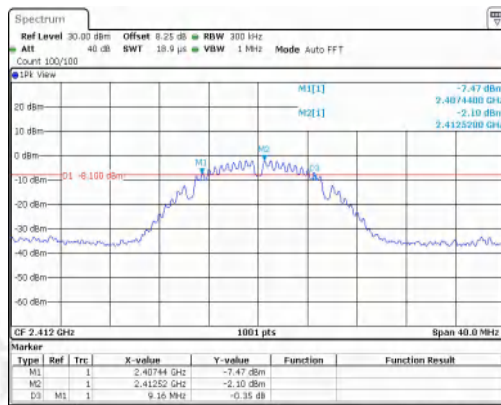


Date: 28-Nov-2026 04:16:11

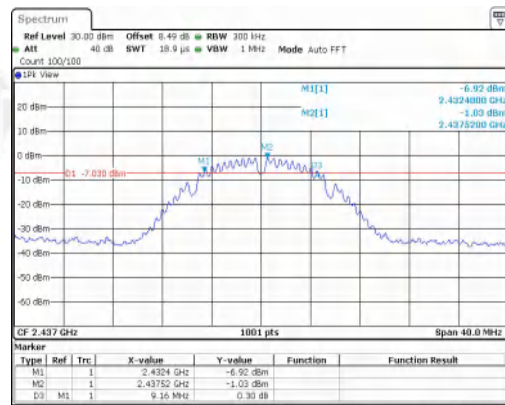


Date: 28-Nov-2026 04:15:13

11B-Ant1-2412-PASS

11B-Ant1-2437-PASS

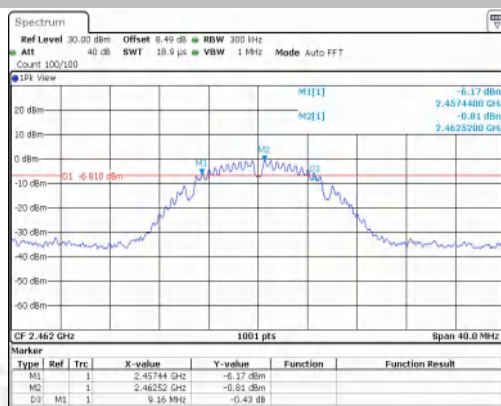


Date: 28-Nov-2026 04:12:57

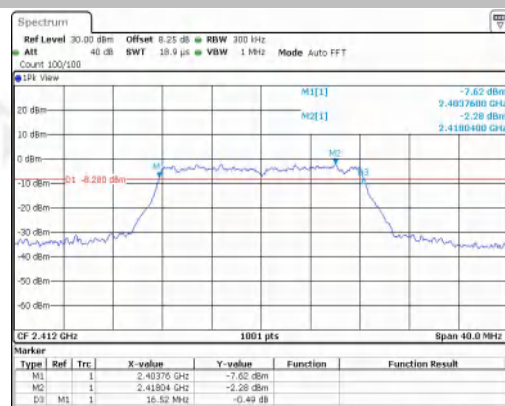


Date: 28-Nov-2026 04:15:11

11B-Ant1-2462-PASS

11G-Ant1-2412-PASS

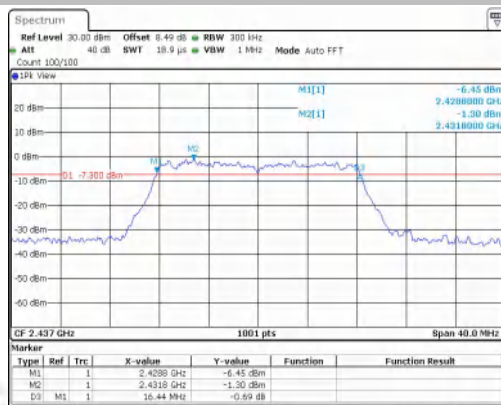


Date: 28-Nov-2026 04:10:17

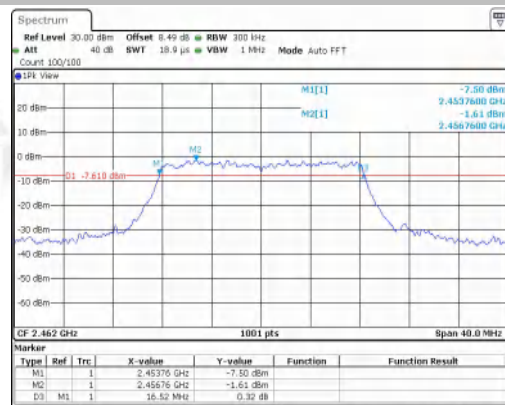


Date: 28-Nov-2026 04:10:16

11G-Ant1-2437-PASS


11G-Ant1-2462-PASS

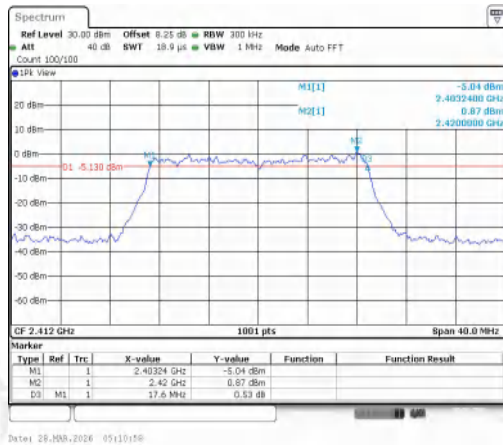

11N20SISO-Ant1-2412-PASS

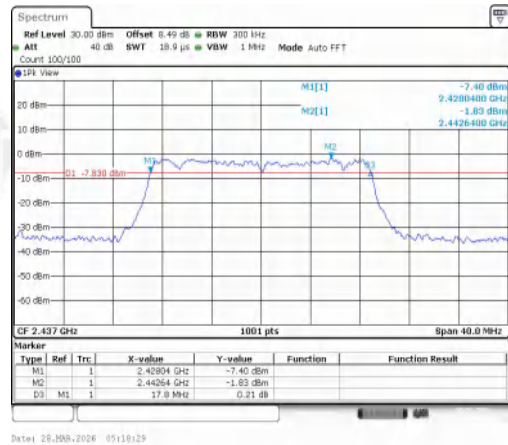


11N20SISO-Ant1-2437-PASS

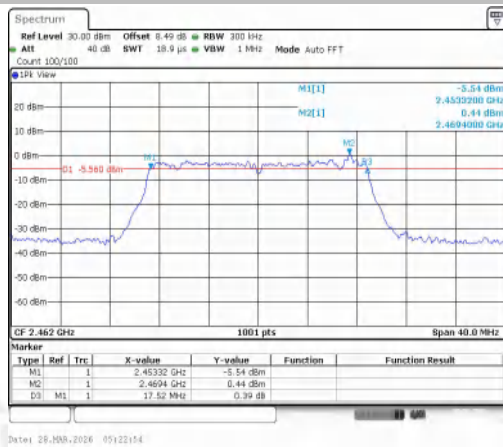


11N20SISO-Ant1-2462-PASS

Occupied Channel Bandwidth


Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.826	2405.1269	2418.9530	---	---
11B	Ant1	2437	13.666	2430.1269	2443.7932	---	---
11B	Ant1	2462	13.506	2455.3267	2468.8332	---	---
11G	Ant1	2412	17.622	2403.3287	2420.9510	---	---
11G	Ant1	2437	17.383	2428.2488	2445.6314	---	---
11G	Ant1	2462	17.542	2453.2488	2470.7912	---	---
11N20SISO	Ant1	2412	18.062	2403.0090	2421.0709	---	---
11N20SISO	Ant1	2437	18.142	2427.8891	2446.0310	---	---
11N20SISO	Ant1	2462	18.062	2452.9690	2471.0310	---	---

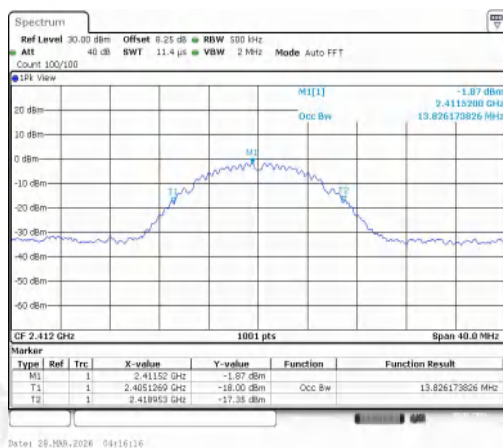


11B-Ant1-2412

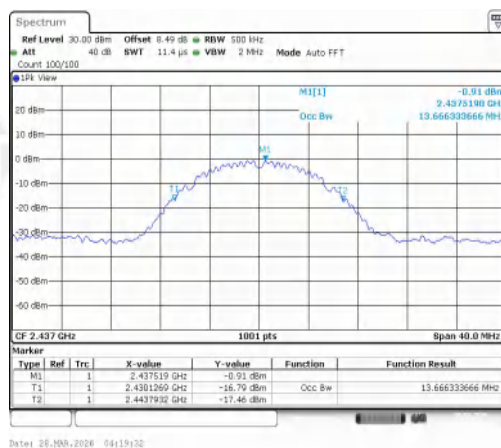


11B-Ant1-2437

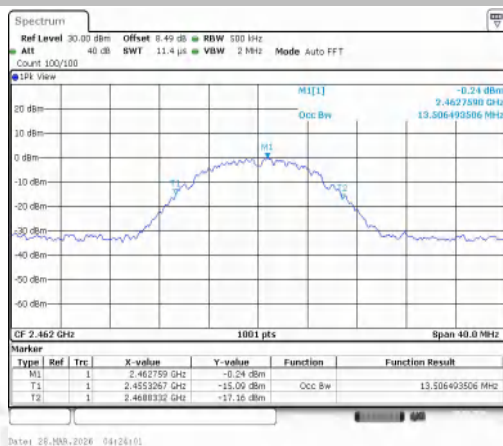


11B-Ant1-2462

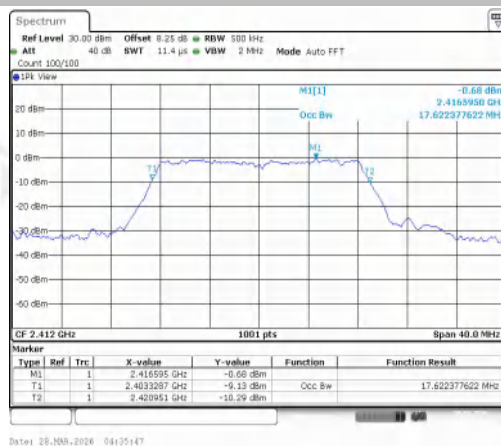


11G-Ant1-2412

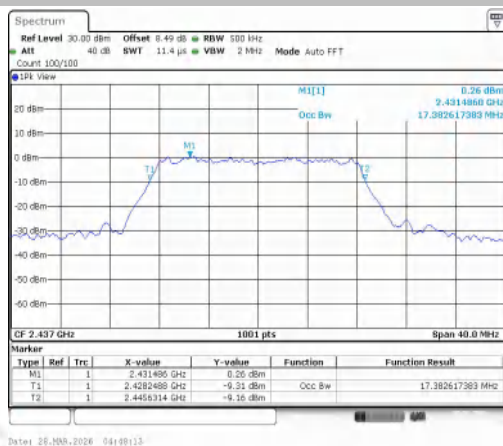


11G-Ant1-2437

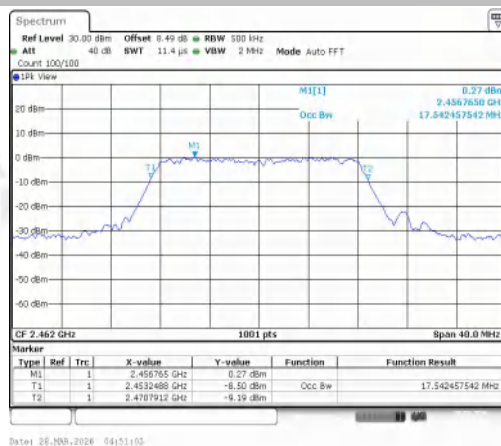


11G-Ant1-2462

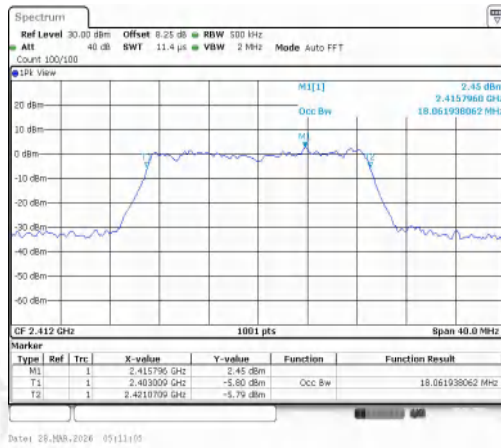

11N20SISO-Ant1-2412

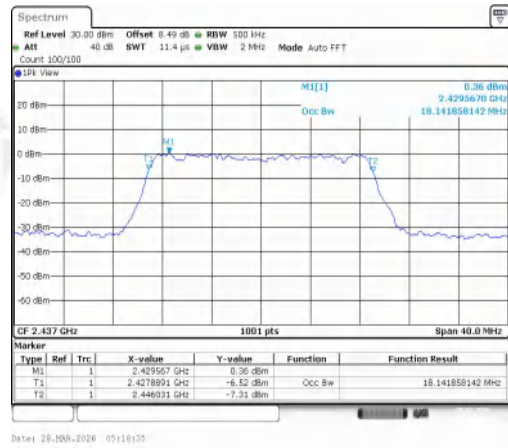


11N20SISO-Ant1-2437

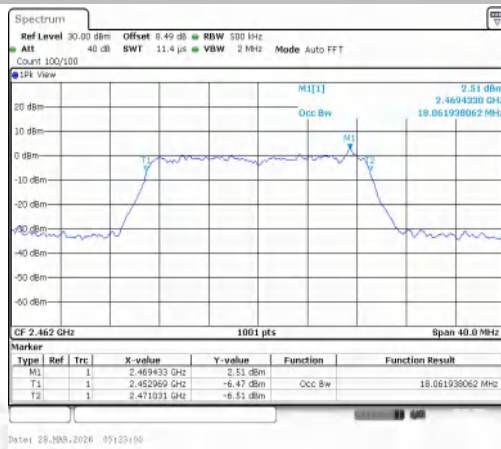


11N20SISO-Ant1-2462

Maximum Power Spectral Density Level


TestMode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-24.53	≤8.00	PASS
11B	Ant1	2437	-24.38	≤8.00	PASS
11B	Ant1	2462	-24.34	≤8.00	PASS
11G	Ant1	2412	-26.26	≤8.00	PASS
11G	Ant1	2437	-25.57	≤8.00	PASS
11G	Ant1	2462	-24.96	≤8.00	PASS
11N20SISO	Ant1	2412	-22.46	≤8.00	PASS
11N20SISO	Ant1	2437	-23.94	≤8.00	PASS
11N20SISO	Ant1	2462	-22.19	≤8.00	PASS

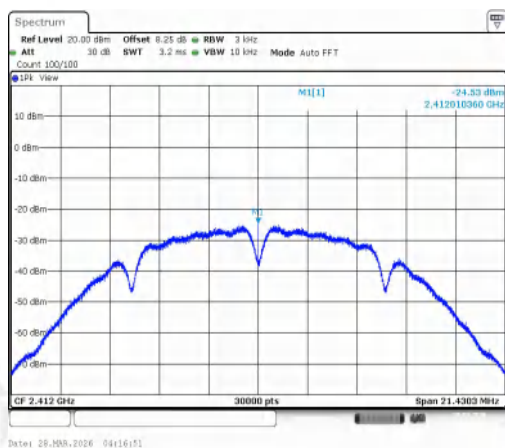


11B-Ant1-2412-PASS

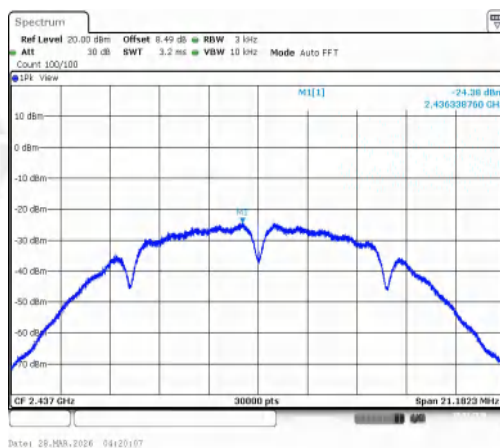


11B-Ant1-2437-PASS

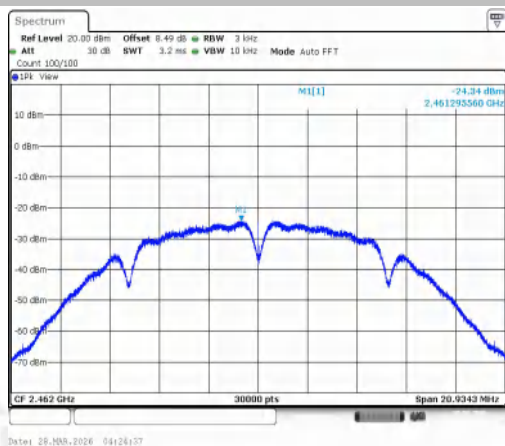


11B-Ant1-2462-PASS

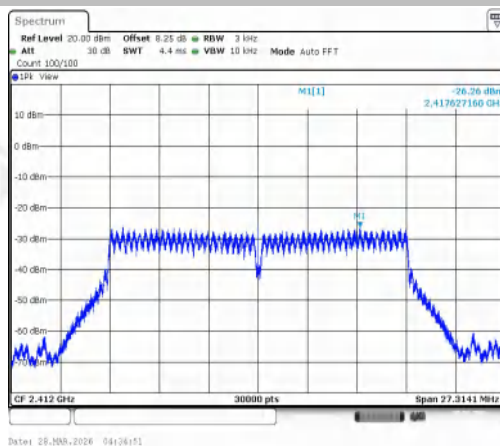


11G-Ant1-2412-PASS

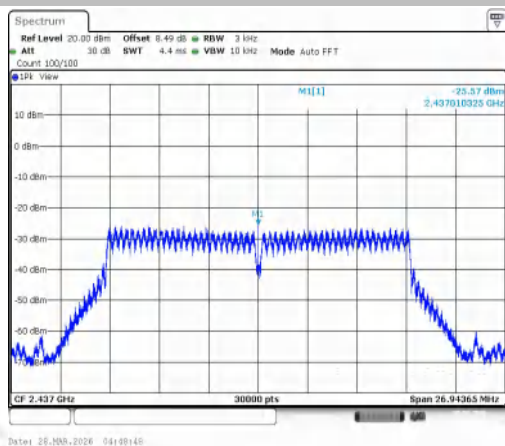


11G-Ant1-2437-PASS

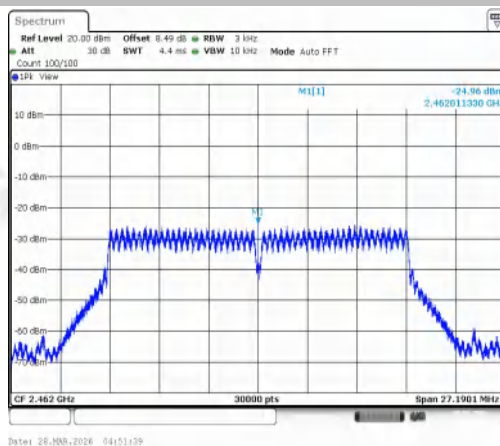


11G-Ant1-2462-PASS

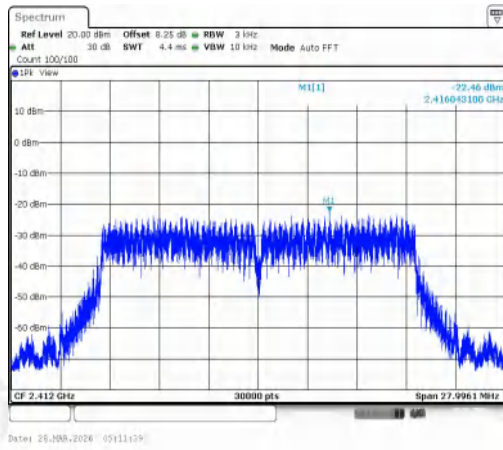

11N20SISO-Ant1-2412-PASS

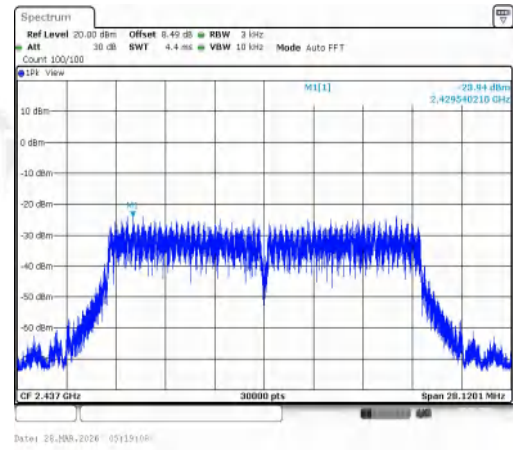


11N20SISO-Ant1-2437-PASS

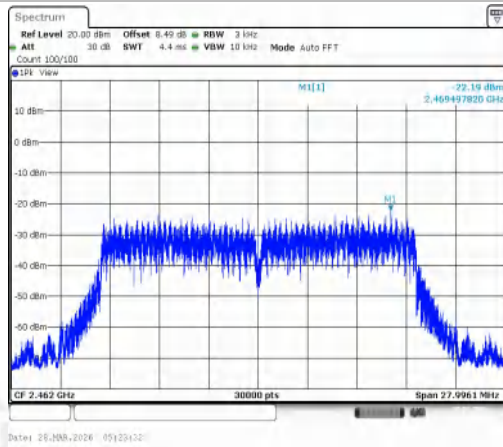


11N20SISO-Ant1-2462-PASS

Band Edge


TestMode	Antenna	ChName	Frequency[MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	-4.01	-42.39	≤ -34.01	PASS
11B	Ant1	High	2462	-4.54	-44.96	≤ -34.54	PASS
11G	Ant1	Low	2412	-4.05	-41.61	≤ -34.05	PASS
11G	Ant1	High	2462	-3.97	-45.15	≤ -33.97	PASS
11N20SISO	Ant1	Low	2412	-4.45	-41.41	≤ -34.45	PASS
11N20SISO	Ant1	High	2462	-4.12	-45.42	≤ -34.12	PASS

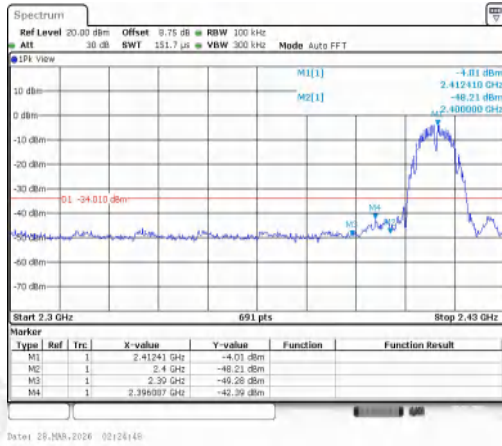


11B-Ant1-2412-PASS

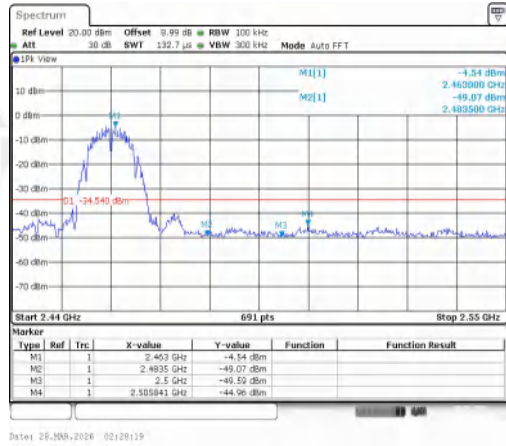


11B-Ant1-2462-PASS

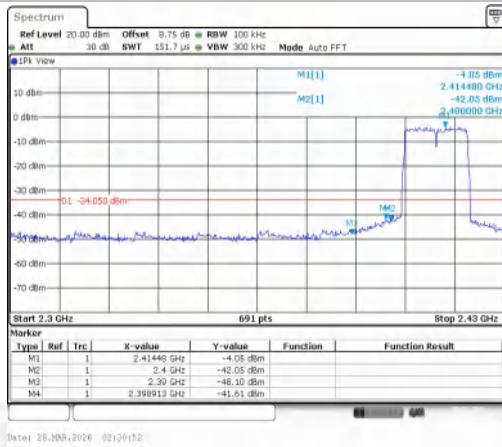


11G-Ant1-2412-PASS

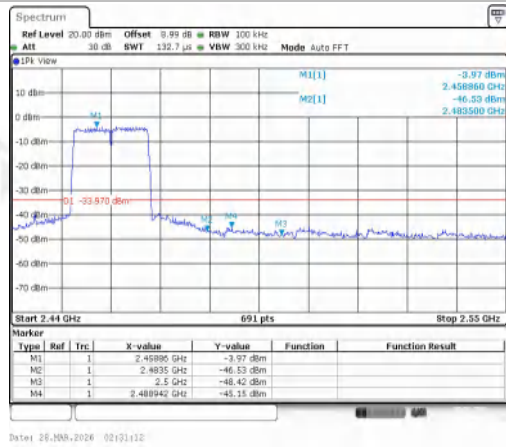

11G-Ant1-2462-PASS

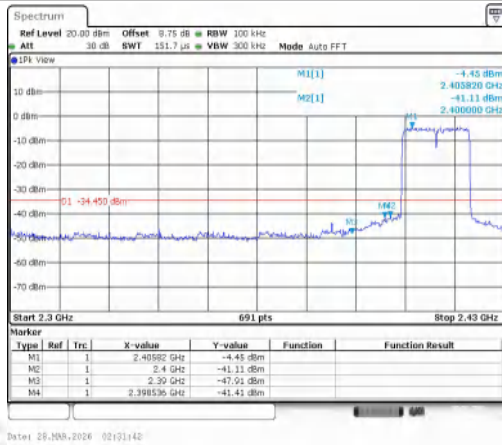


11N20SISO-Ant1-2412-PASS

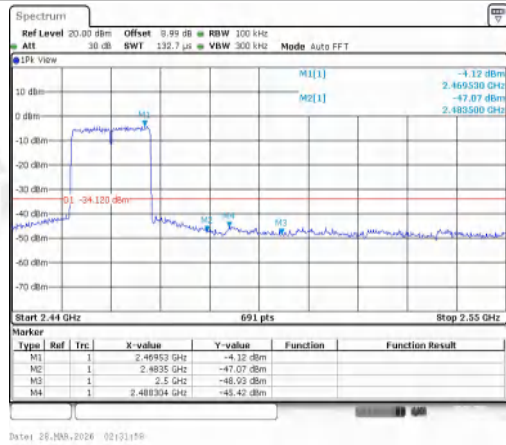


11N20SISO-Ant1-2462-PASS

Conducted RF Spurious Emission


TestMode	Antenna	Frequency[MHz]	Freq Range [Mhz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	-2.60	-2.60	---	PASS
11B	Ant1	2412	30~1000	-2.60	-57.77	≤-22.6	PASS
11B	Ant1	2412	1000~26500	-2.60	-31.37	≤-22.6	PASS
11B	Ant1	2437	0~Reference	-1.59	-1.59	---	PASS
11B	Ant1	2437	30~1000	-1.59	-57.53	≤-21.59	PASS
11B	Ant1	2437	1000~26500	-1.59	-32.04	≤-21.59	PASS
11B	Ant1	2462	0~Reference	-1.21	-1.21	---	PASS
11B	Ant1	2462	30~1000	-1.21	-57.97	≤-21.21	PASS
11B	Ant1	2462	1000~26500	-1.21	-32.68	≤-21.21	PASS
11G	Ant1	2412	0~Reference	-4.62	-4.62	---	PASS
11G	Ant1	2412	30~1000	-4.62	-57.98	≤-24.62	PASS
11G	Ant1	2412	1000~26500	-4.62	-39.11	≤-24.62	PASS
11G	Ant1	2437	0~Reference	-3.67	-3.67	---	PASS
11G	Ant1	2437	30~1000	-3.67	-57.41	≤-23.67	PASS
11G	Ant1	2437	1000~26500	-3.67	-40.45	≤-23.67	PASS
11G	Ant1	2462	0~Reference	-3.92	-3.92	---	PASS
11G	Ant1	2462	30~1000	-3.92	-58.32	≤-23.92	PASS
11G	Ant1	2462	1000~26500	-3.92	-40.08	≤-23.92	PASS
11N20SISO	Ant1	2412	0~Reference	-3.19	-3.19	---	PASS
11N20SISO	Ant1	2412	30~1000	-3.19	-58.47	≤-23.19	PASS
11N20SISO	Ant1	2412	1000~26500	-3.19	-35.46	≤-23.19	PASS
11N20SISO	Ant1	2437	0~Reference	-3.88	-3.88	---	PASS
11N20SISO	Ant1	2437	30~1000	-3.88	-58.36	≤-23.88	PASS
11N20SISO	Ant1	2437	1000~26500	-3.88	-40.6	≤-23.88	PASS
11N20SISO	Ant1	2462	0~Reference	-3.96	-3.96	---	PASS
11N20SISO	Ant1	2462	30~1000	-3.96	-58.47	≤-23.96	PASS
11N20SISO	Ant1	2462	1000~26500	-3.96	-40.24	≤-23.96	PASS

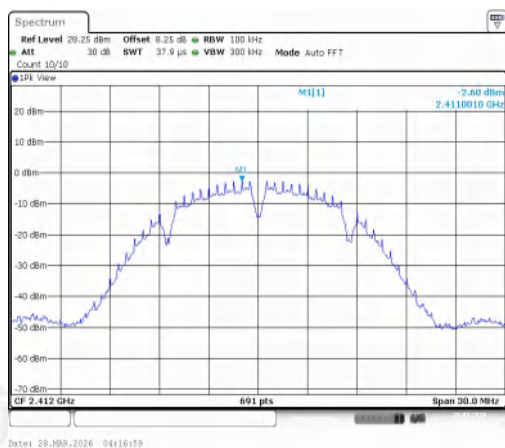


11B-Ant1-2412-0~Reference-PASS

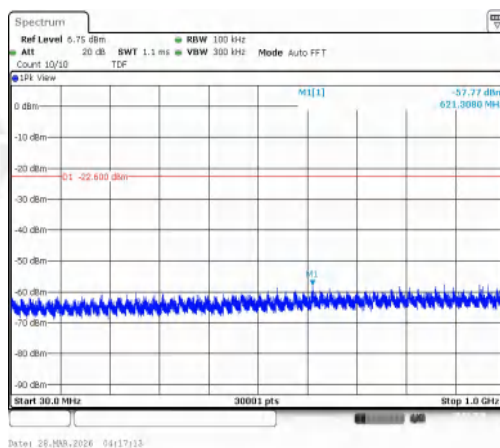


11B-Ant1-2412-30~1000-PASS

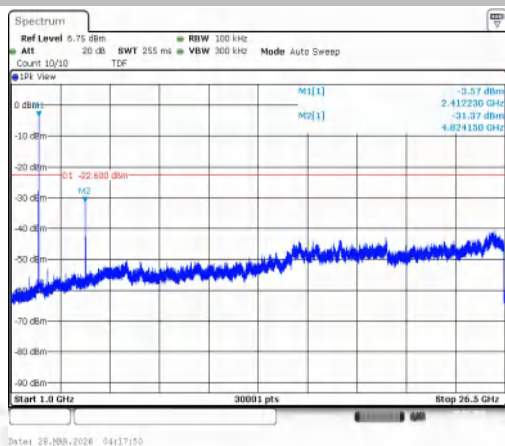


11B-Ant1-2412-1000~26500-PASS

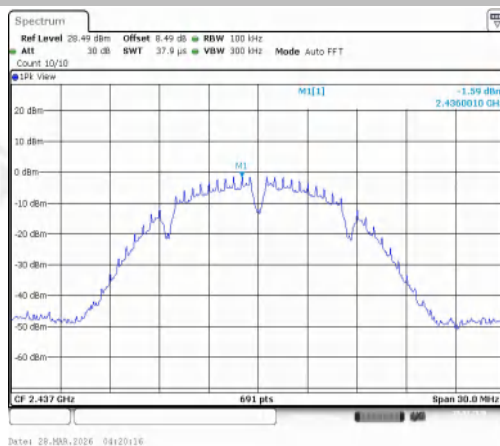


11B-Ant1-2437-0~Reference-PASS

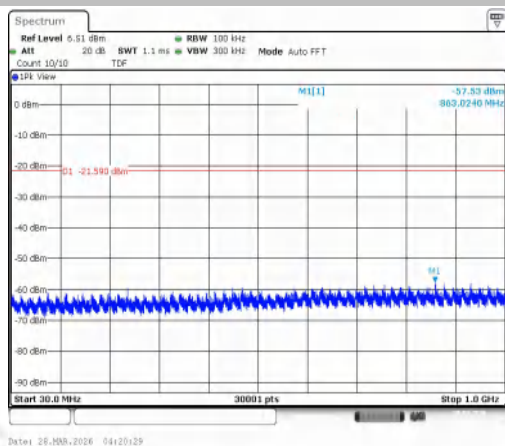


11B-Ant1-2437-30~1000-PASS

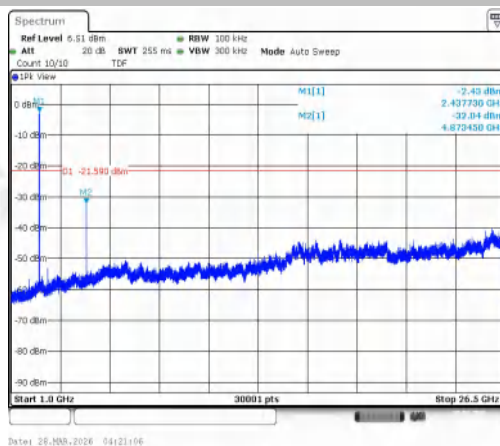


11B-Ant1-2437-1000~26500-PASS

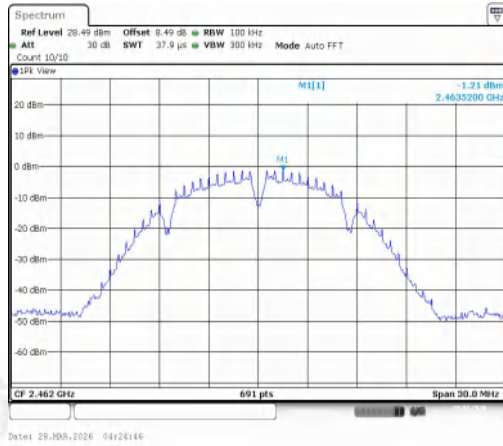


11B-Ant1-2462-0~Reference-PASS

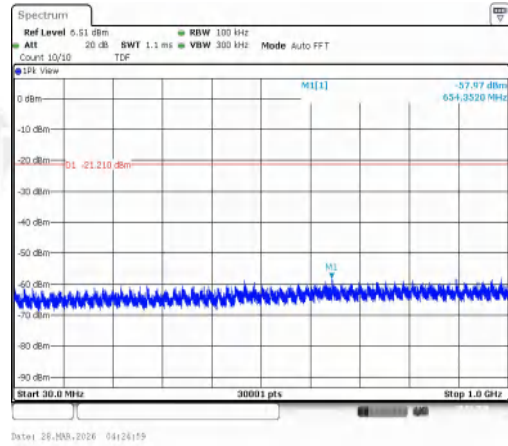


11B-Ant1-2462-30~1000-PASS

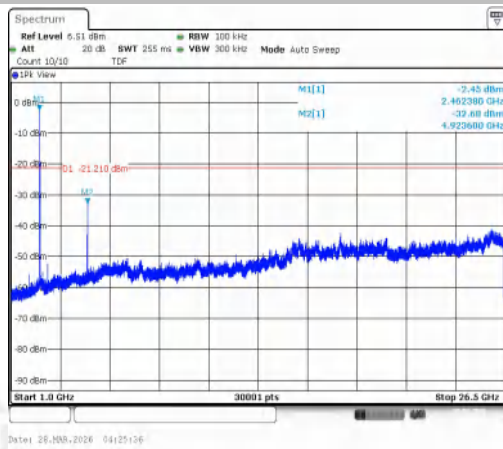


11B-Ant1-2462-1000~26500-PASS

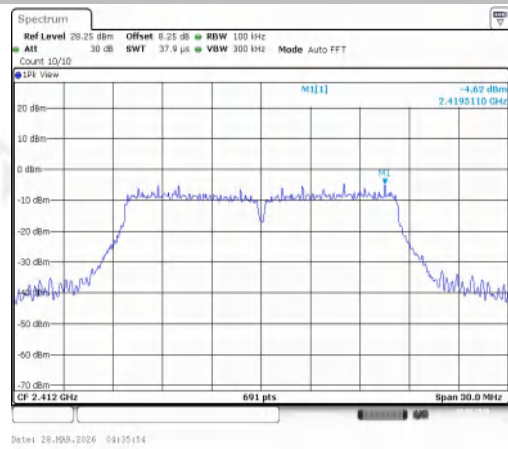


11G-Ant1-2412-0~Reference-PASS

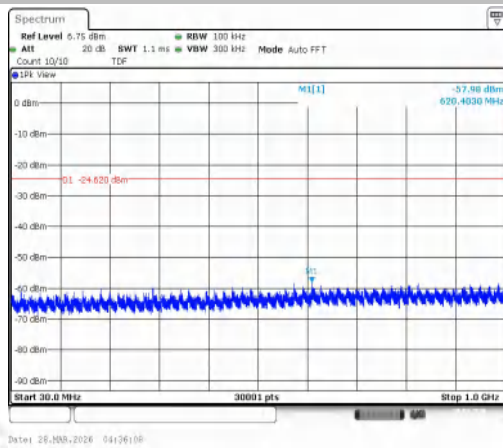


11G-Ant1-2412-30~1000-PASS

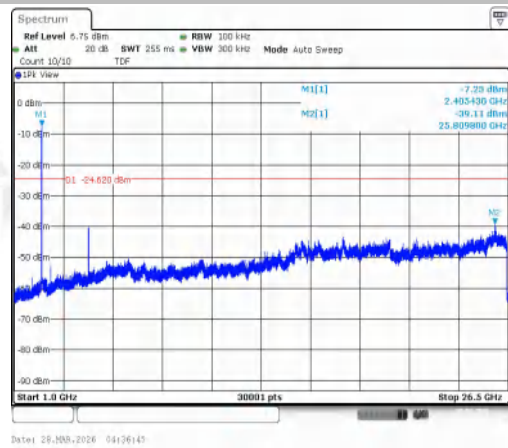


11G-Ant1-2412-1000~26500-PASS

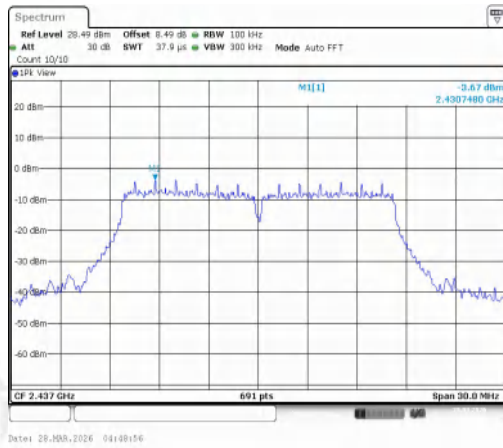


11G-Ant1-2437-0~Reference-PASS

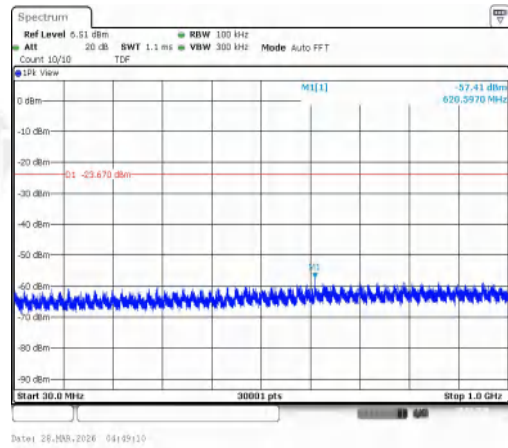


11G-Ant1-2437-30~1000-PASS

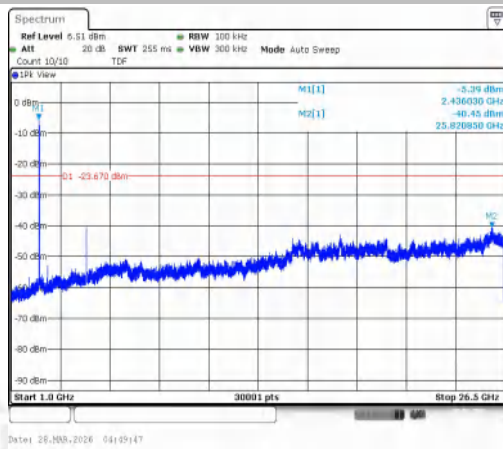


11G-Ant1-2437-1000~26500-PASS

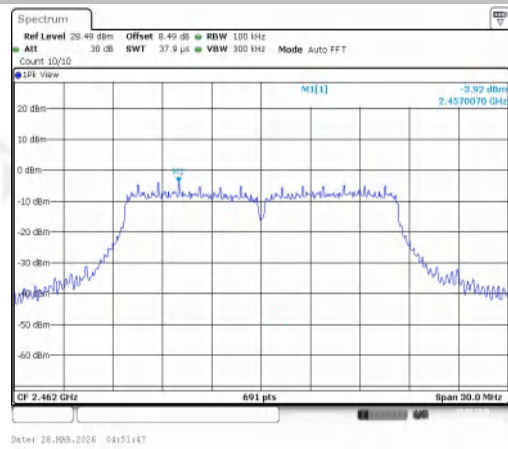



11G-Ant1-2462-0~Reference-PASS

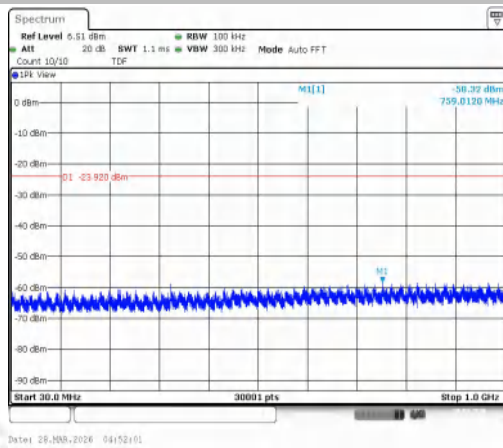

11G-Ant1-2462-30~1000-PASS


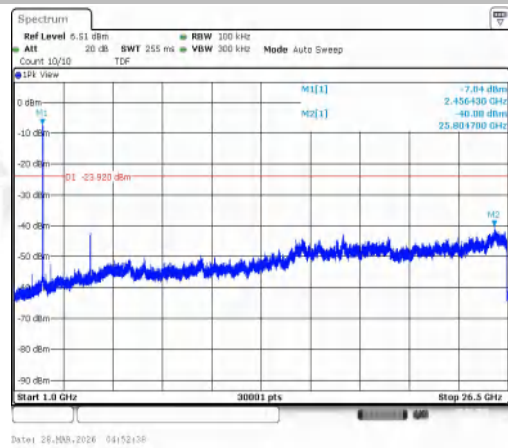


11G-Ant1-2462-1000~26500-PASS

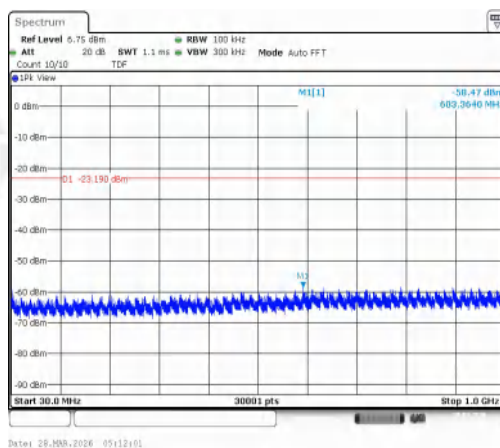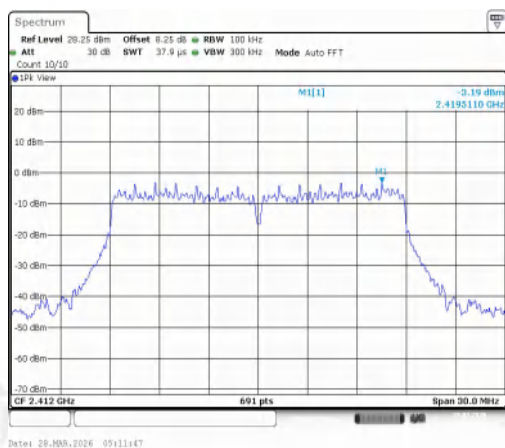



11N20SISO-Ant1-2412-0~Reference-PASS

11N20SISO-Ant1-2412-30~1000-PASS

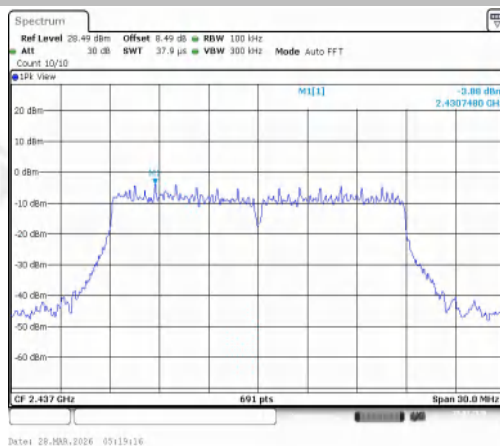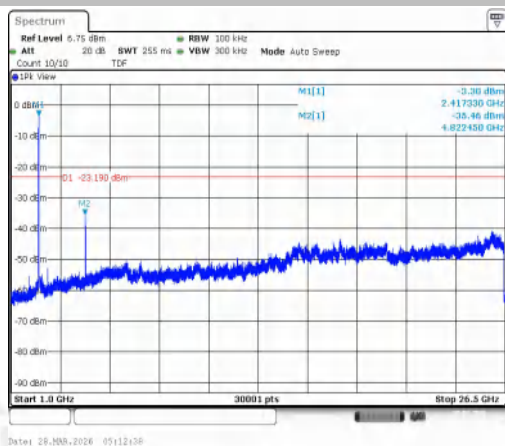


11N20SISO-Ant1-2412-1000~26500-PASS

11N20SISO-Ant1-2437-0~Reference-PASS

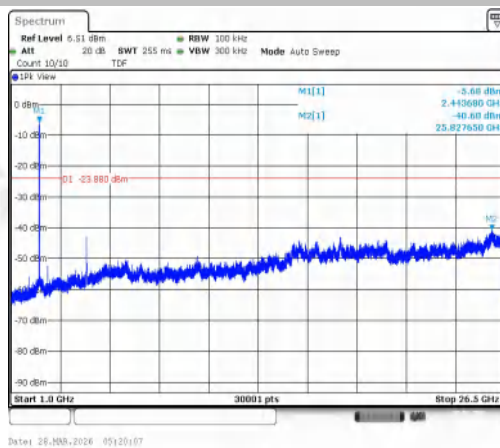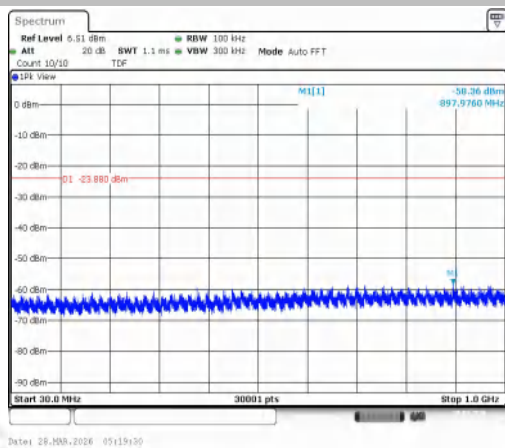


11N20SISO-Ant1-2437-30~1000-PASS


11N20SISO-Ant1-2437-1000~26500-PASS

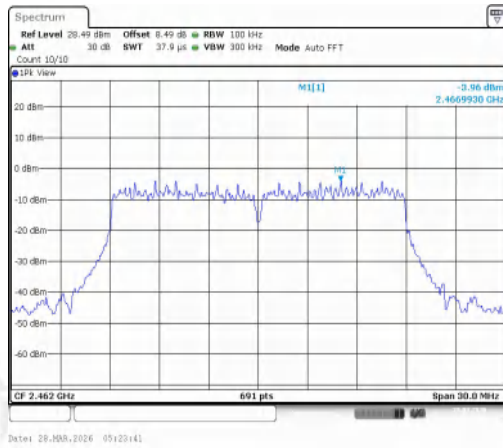

11N20SISO-Ant1-2462-0~Reference-PASS

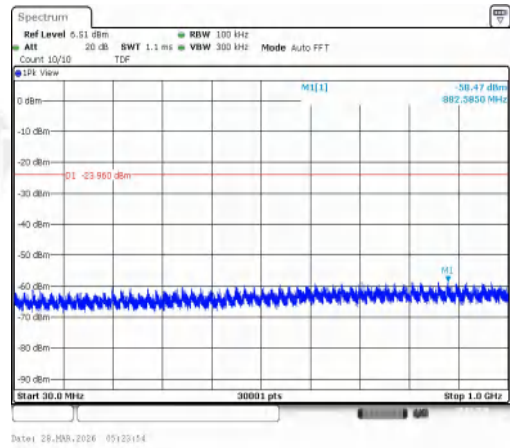

11N20SISO-Ant1-2462-30~1000-PASS

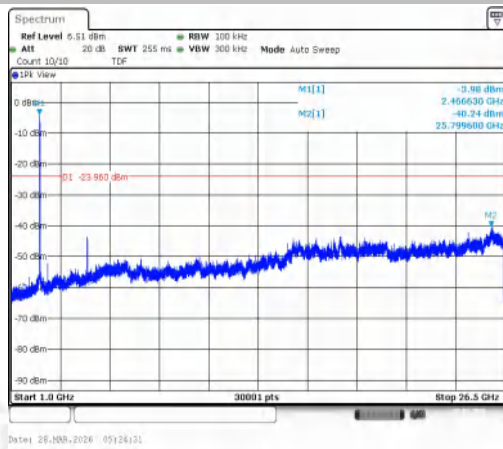

11N20SISO-Ant1-2462-1000~26500-PASS