


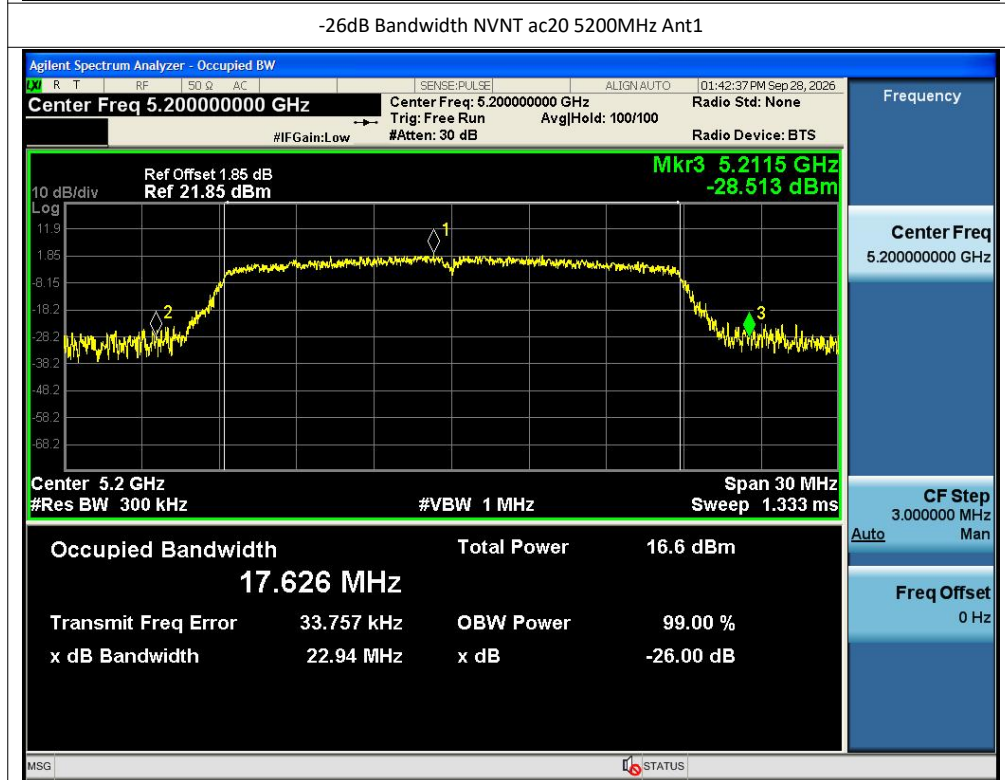


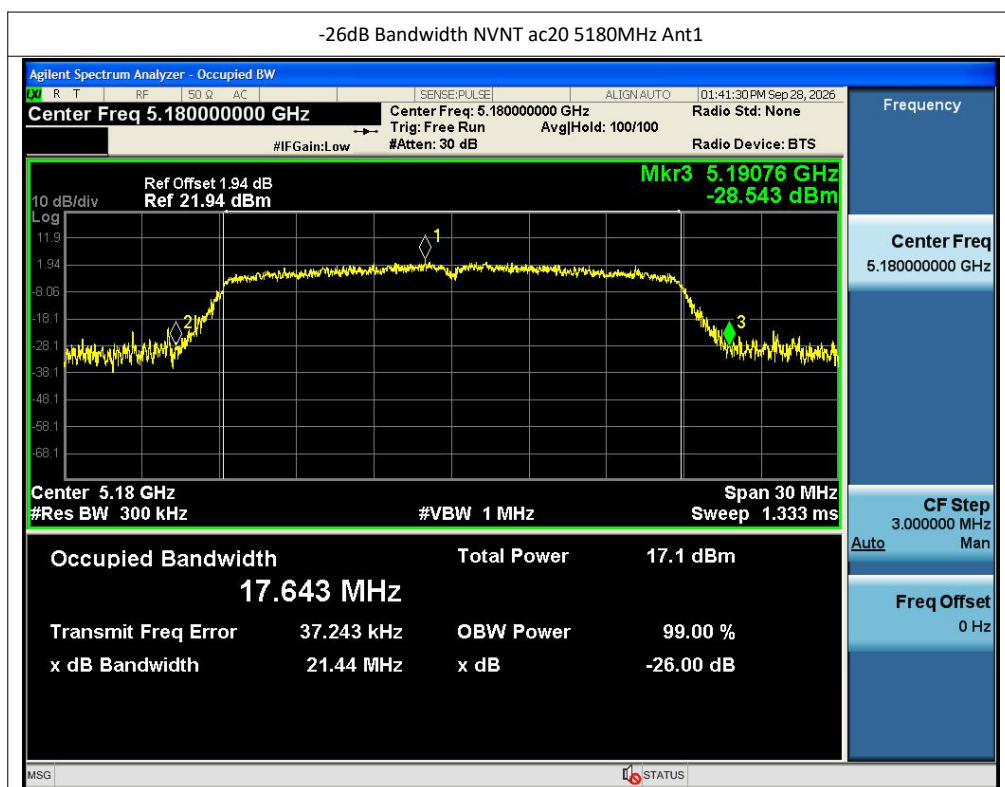

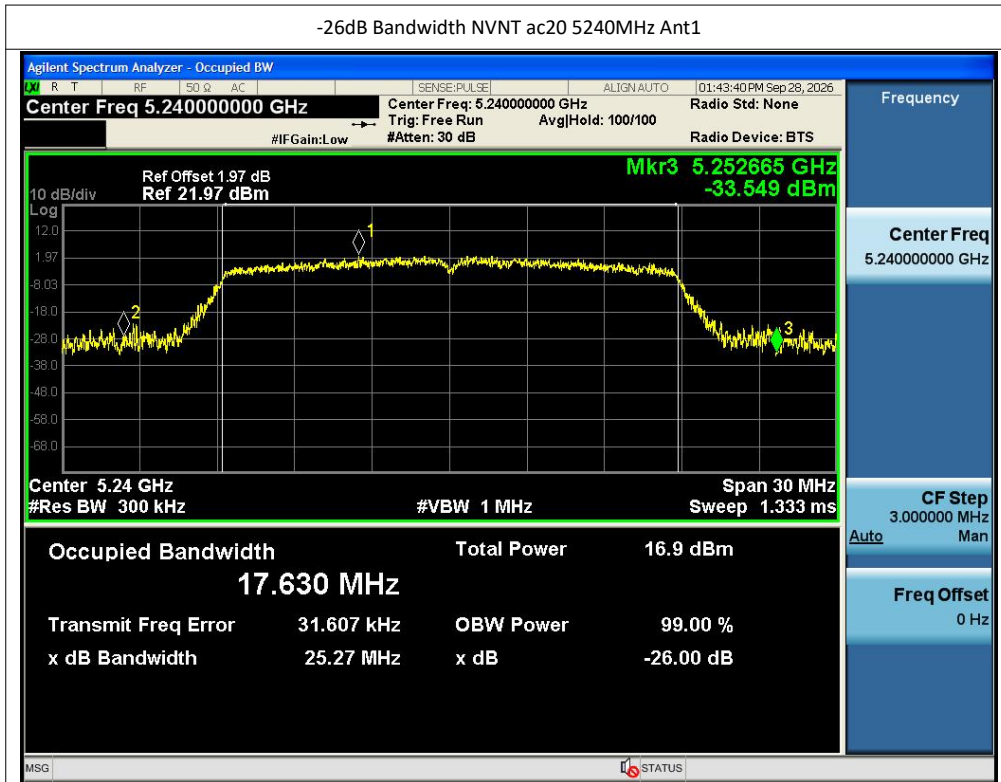

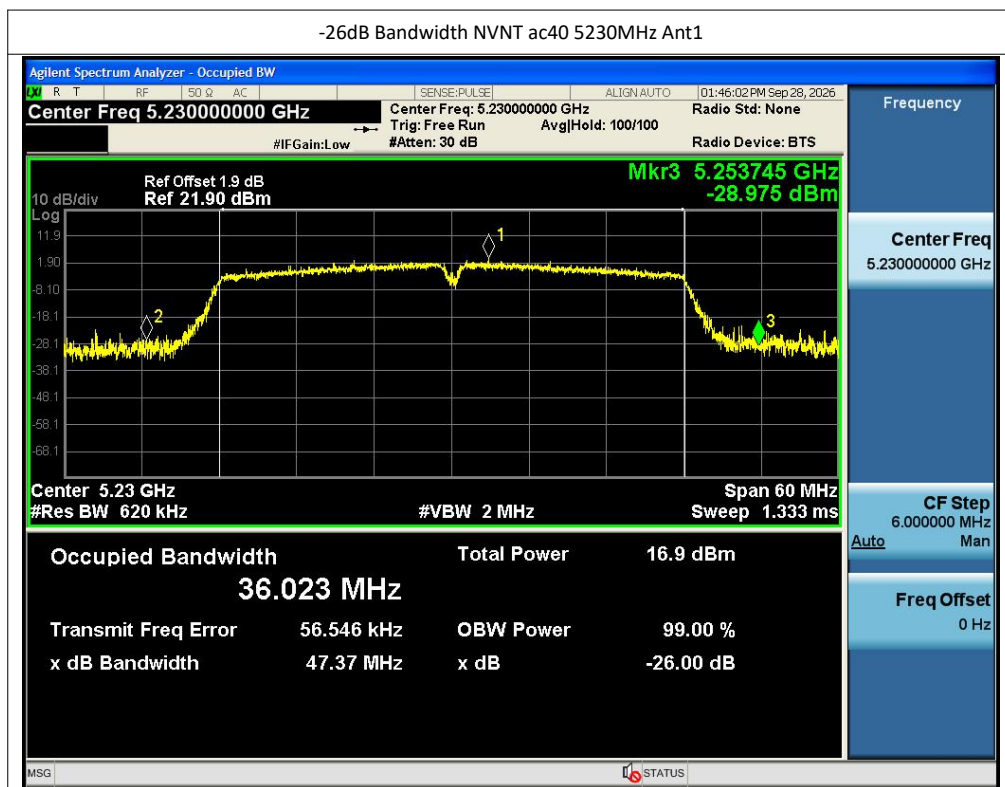


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.418
NVNT	a	5200	Ant1	16.461
NVNT	a	5240	Ant1	16.446
NVNT	n20	5180	Ant1	17.624
NVNT	n20	5200	Ant1	17.563
NVNT	n20	5240	Ant1	17.604
NVNT	n40	5190	Ant1	36.056
NVNT	n40	5230	Ant1	35.988
NVNT	ac20	5180	Ant1	17.565
NVNT	ac20	5200	Ant1	17.569
NVNT	ac20	5240	Ant1	17.554
NVNT	ac40	5190	Ant1	36.013
NVNT	ac40	5230	Ant1	35.928



Test Graphs



OBW NVNT a 5180MHz Ant1


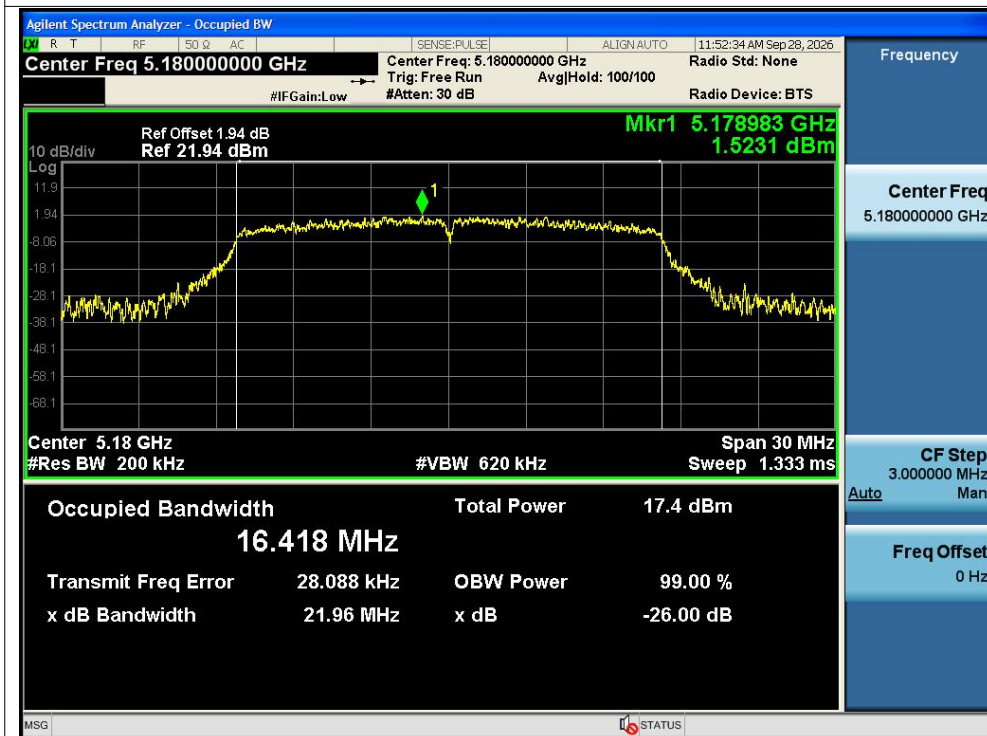




OBW NVNT a 5200MHz Ant1


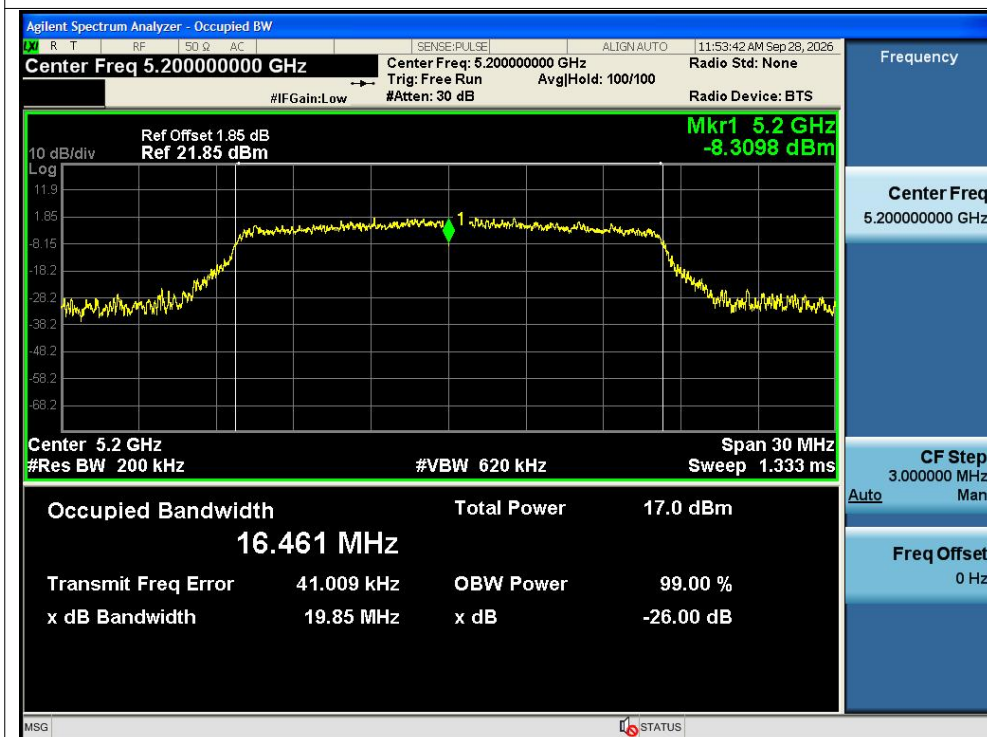


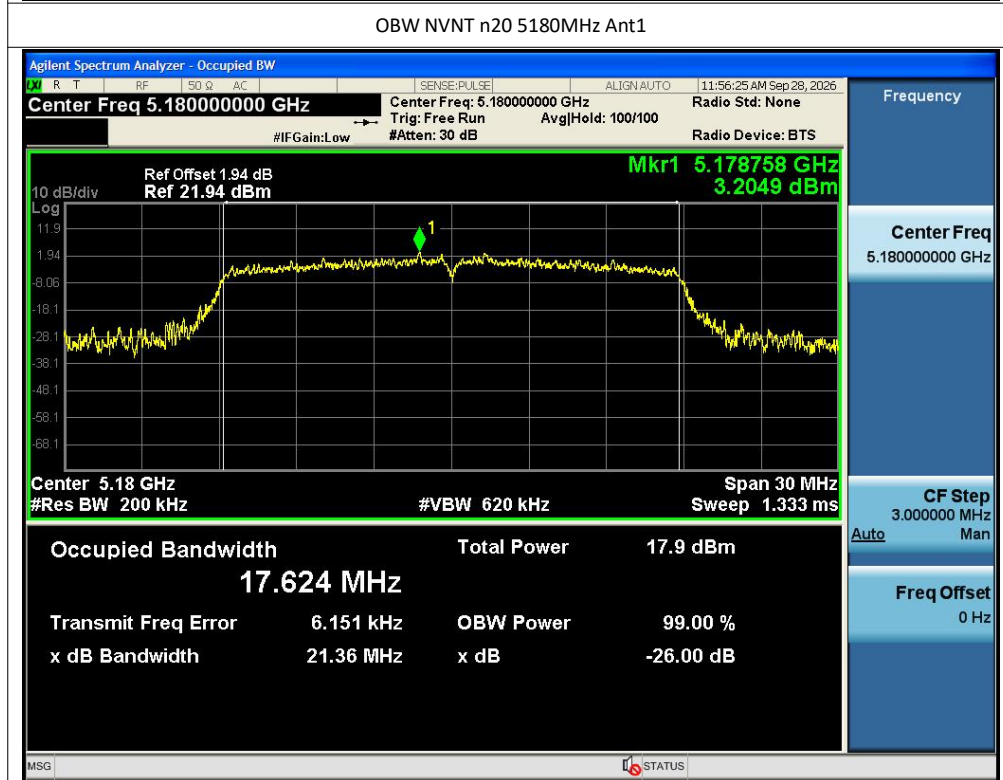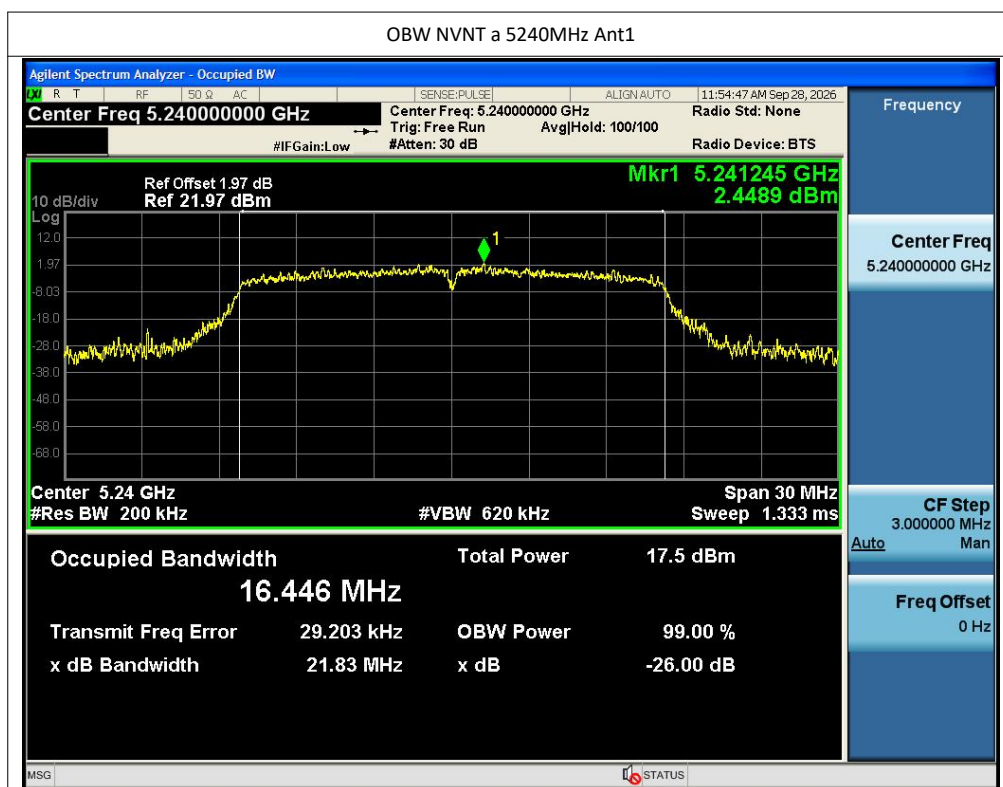


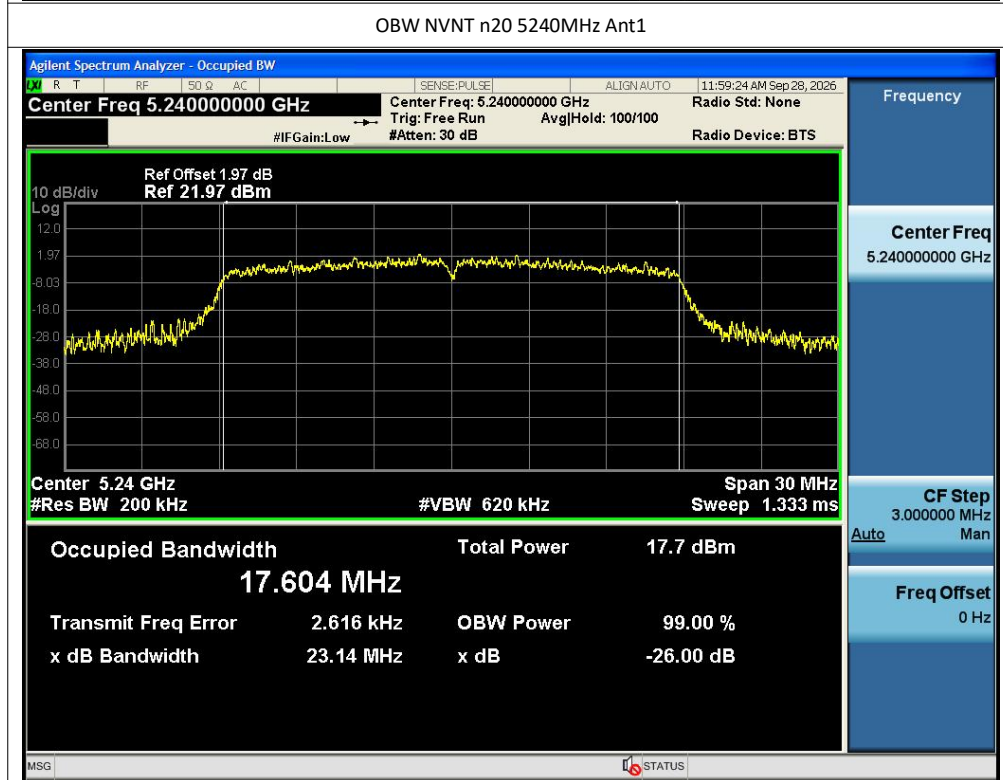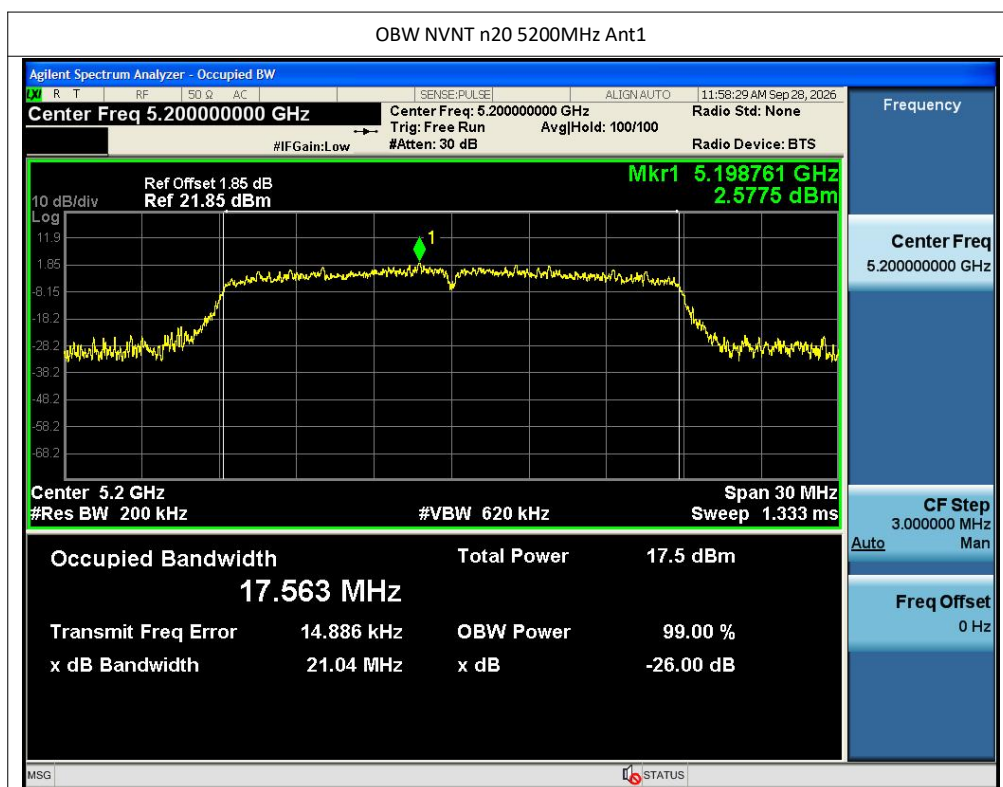

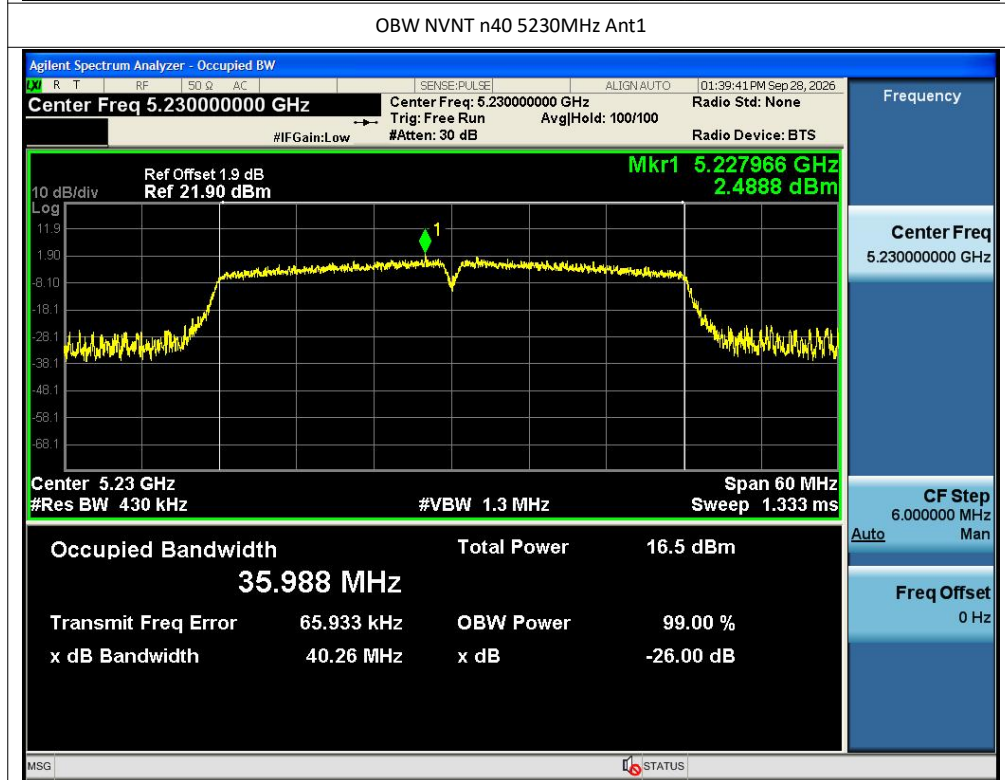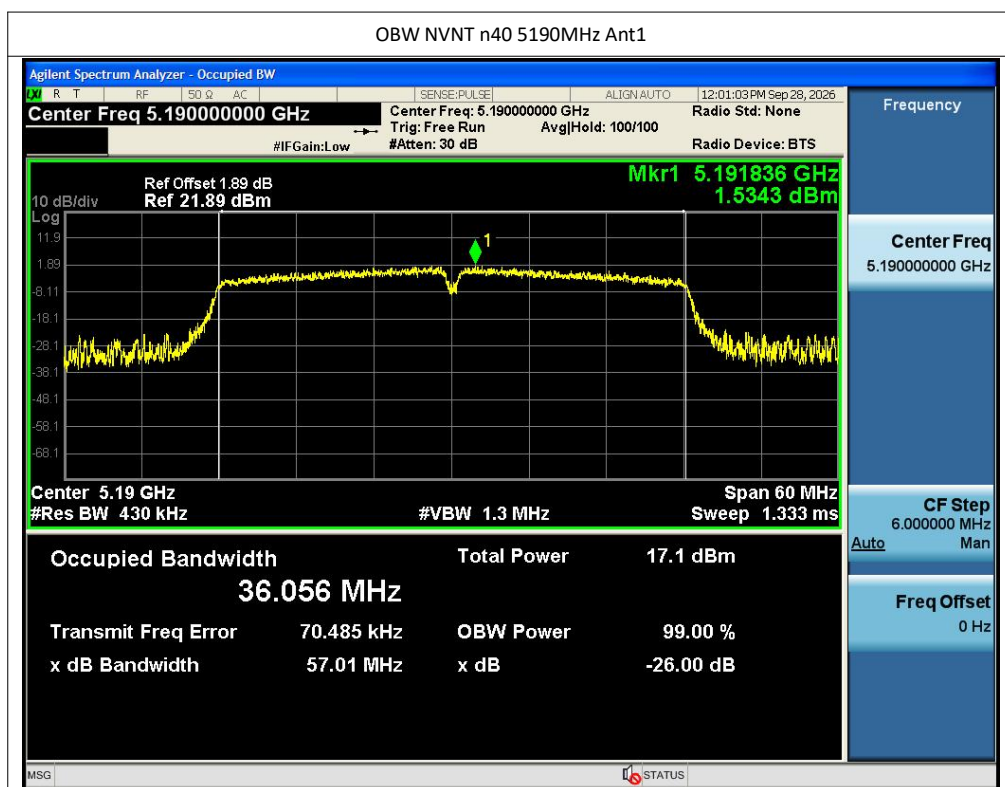

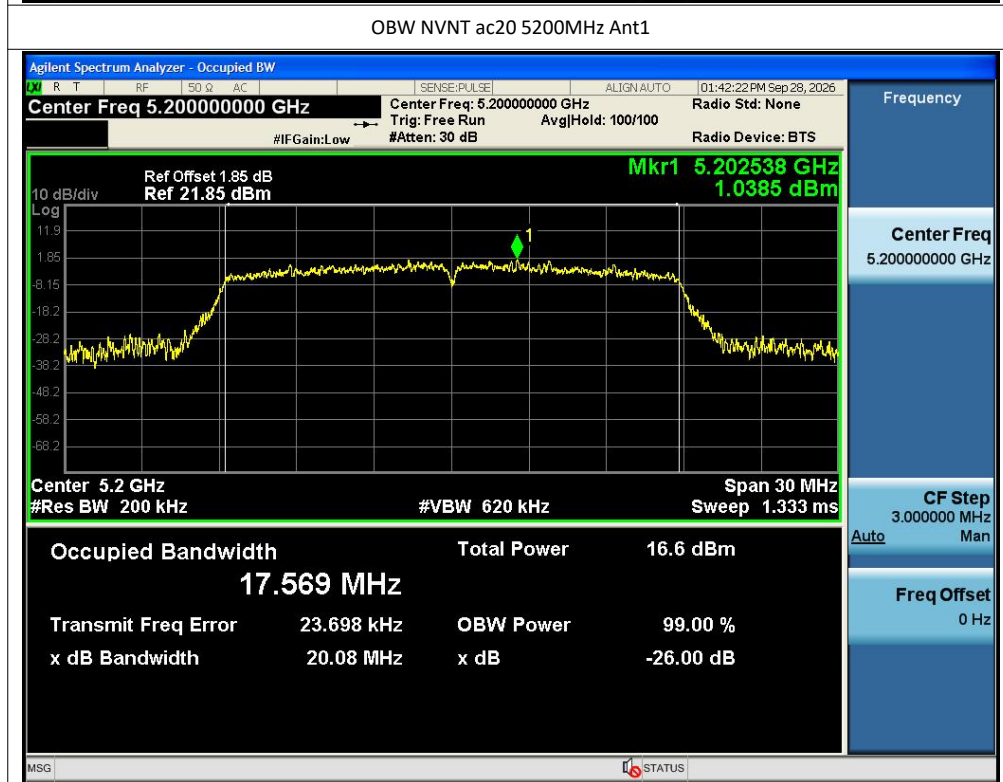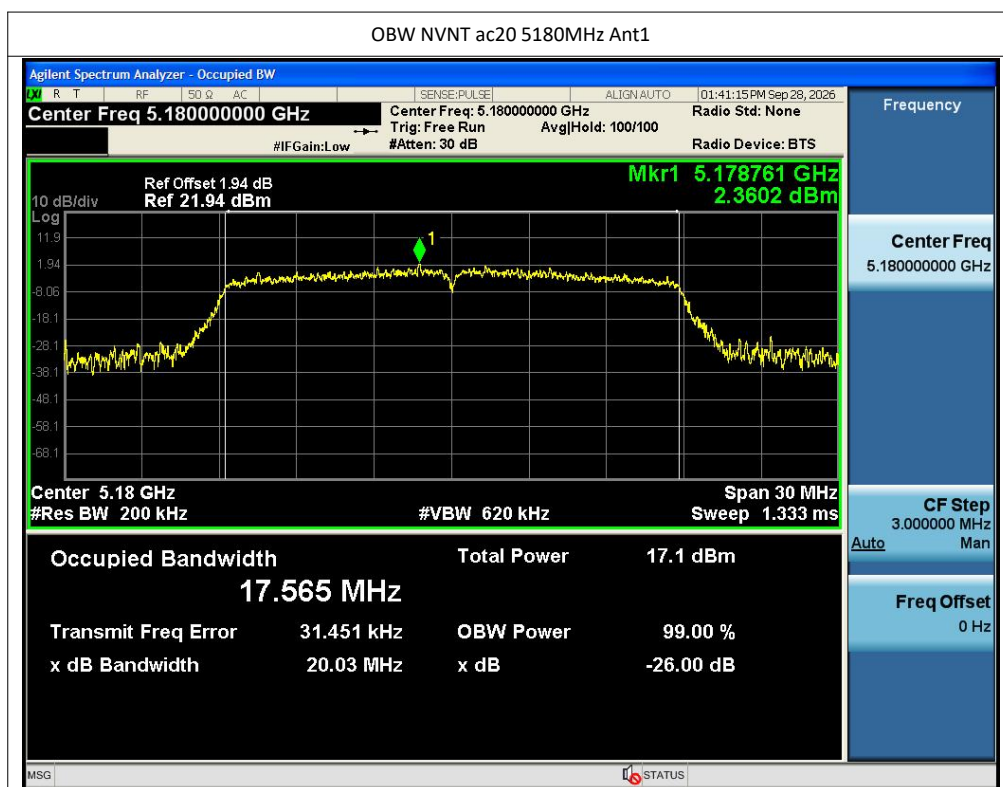

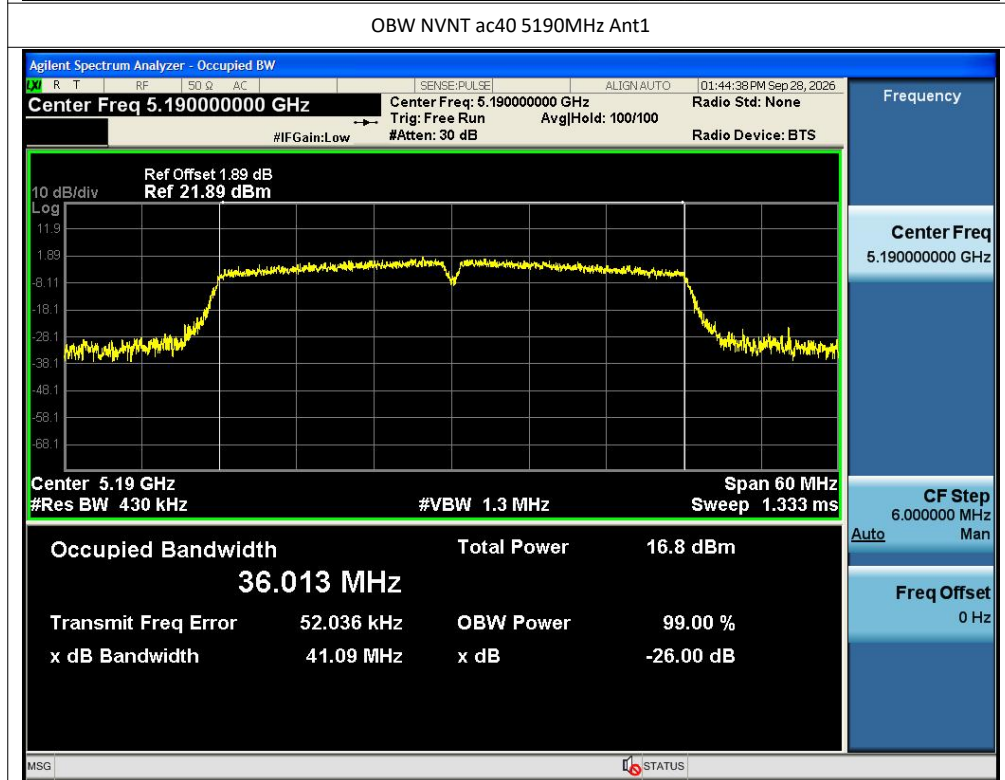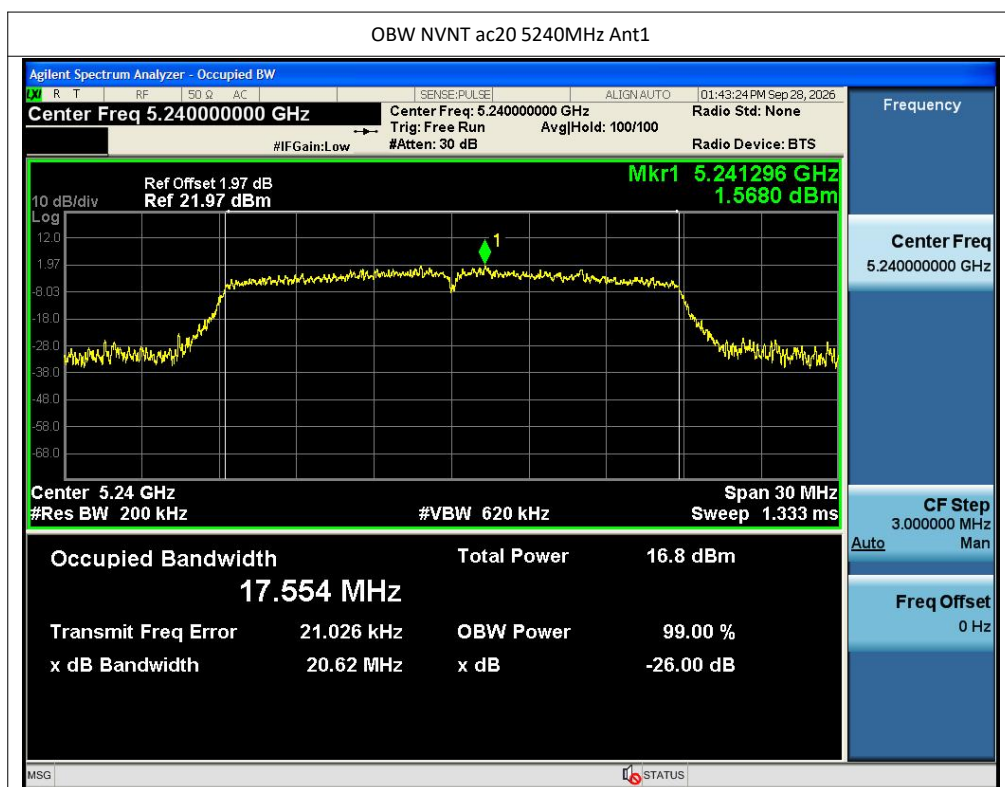

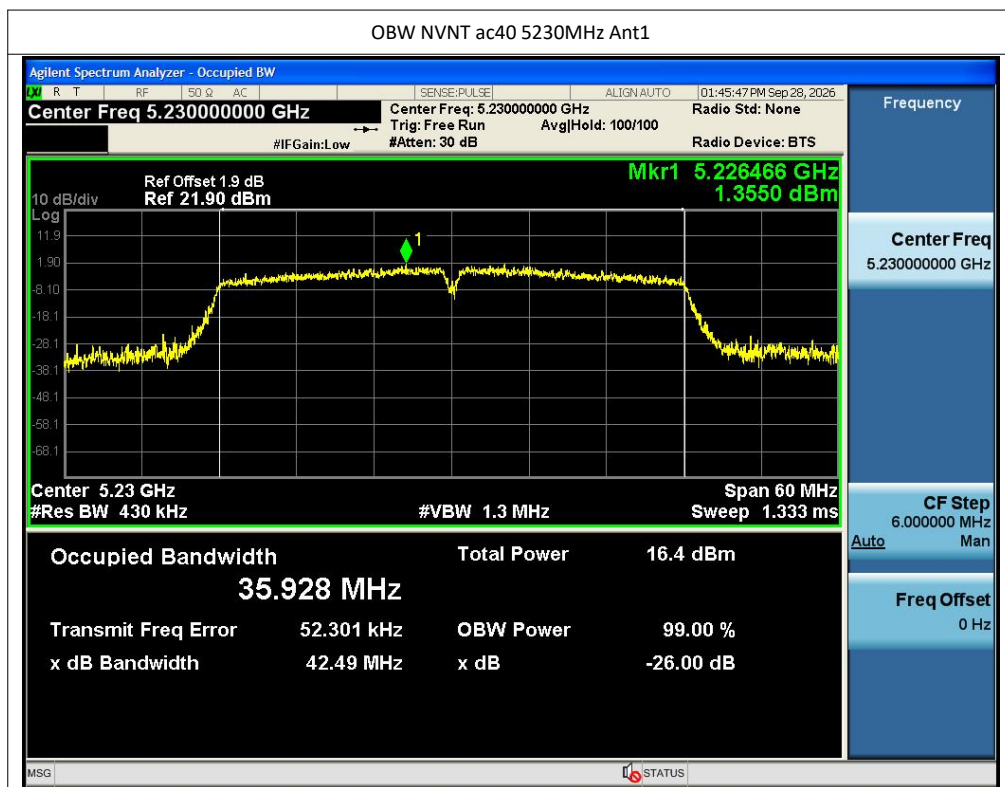


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	2.07	0.13	2.2	11	Pass
NVNT	a	5200	Ant1	1.78	0.13	1.91	11	Pass
NVNT	a	5240	Ant1	2.25	0.13	2.38	11	Pass
NVNT	n20	5180	Ant1	2.77	0.14	2.91	11	Pass
NVNT	n20	5200	Ant1	1.83	0.14	1.97	11	Pass
NVNT	n20	5240	Ant1	2.12	0.14	2.26	11	Pass
NVNT	n40	5190	Ant1	-1.37	0.27	-1.1	11	Pass
NVNT	n40	5230	Ant1	-2.19	0.27	-1.92	11	Pass
NVNT	ac20	5180	Ant1	1.69	0.14	1.83	11	Pass
NVNT	ac20	5200	Ant1	1.17	0.14	1.31	11	Pass
NVNT	ac20	5240	Ant1	1.43	0.14	1.57	11	Pass
NVNT	ac40	5190	Ant1	-1.73	0.27	-1.46	11	Pass
NVNT	ac40	5230	Ant1	-1.4	0.28	-1.12	11	Pass



Test Graphs



PSD NVNT a 5180MHz Ant1


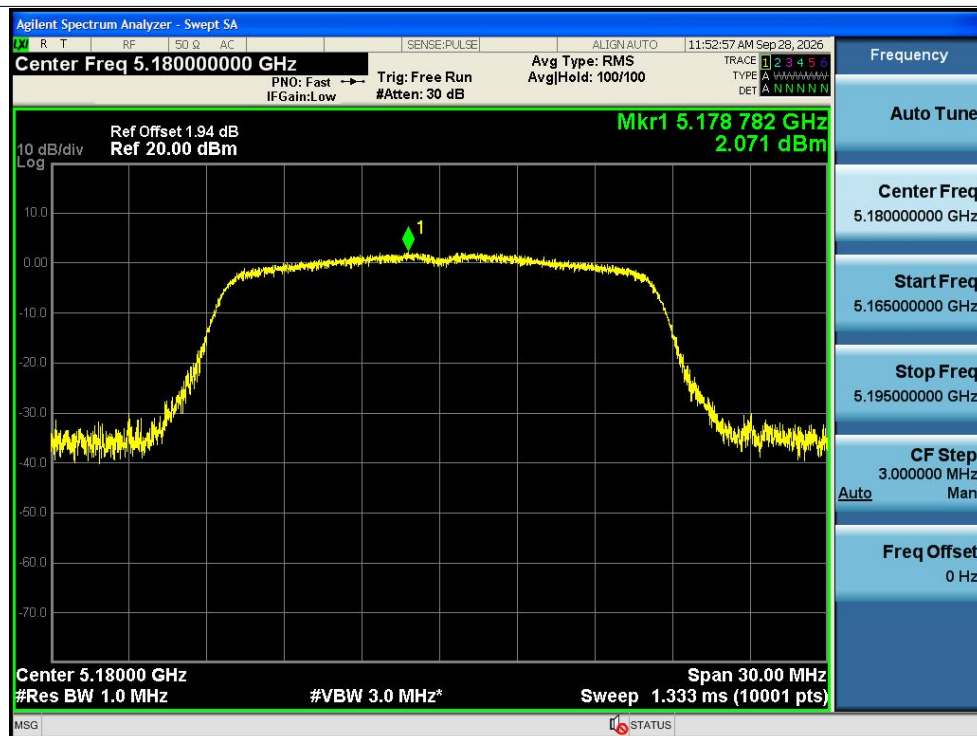




PSD NVNT a 5200MHz Ant1


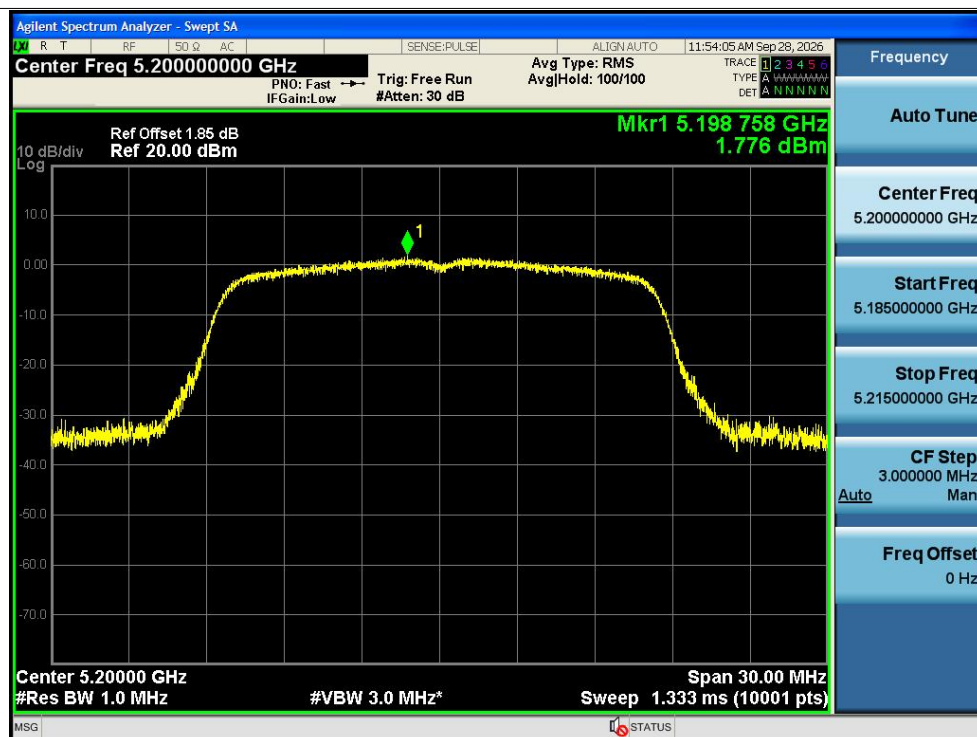


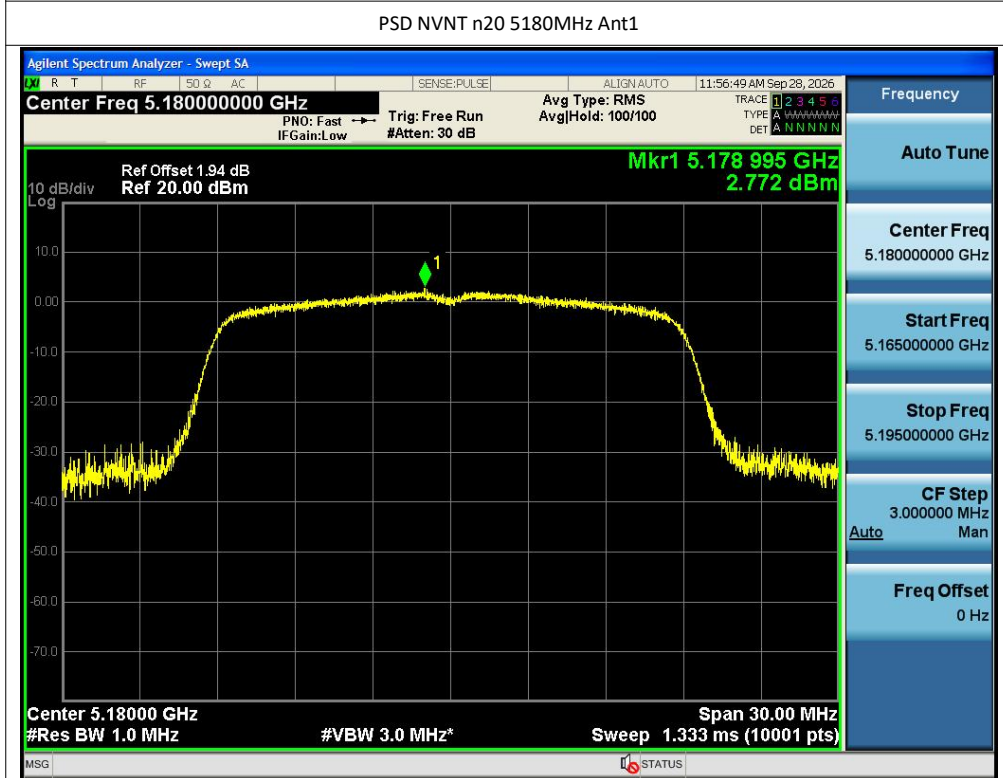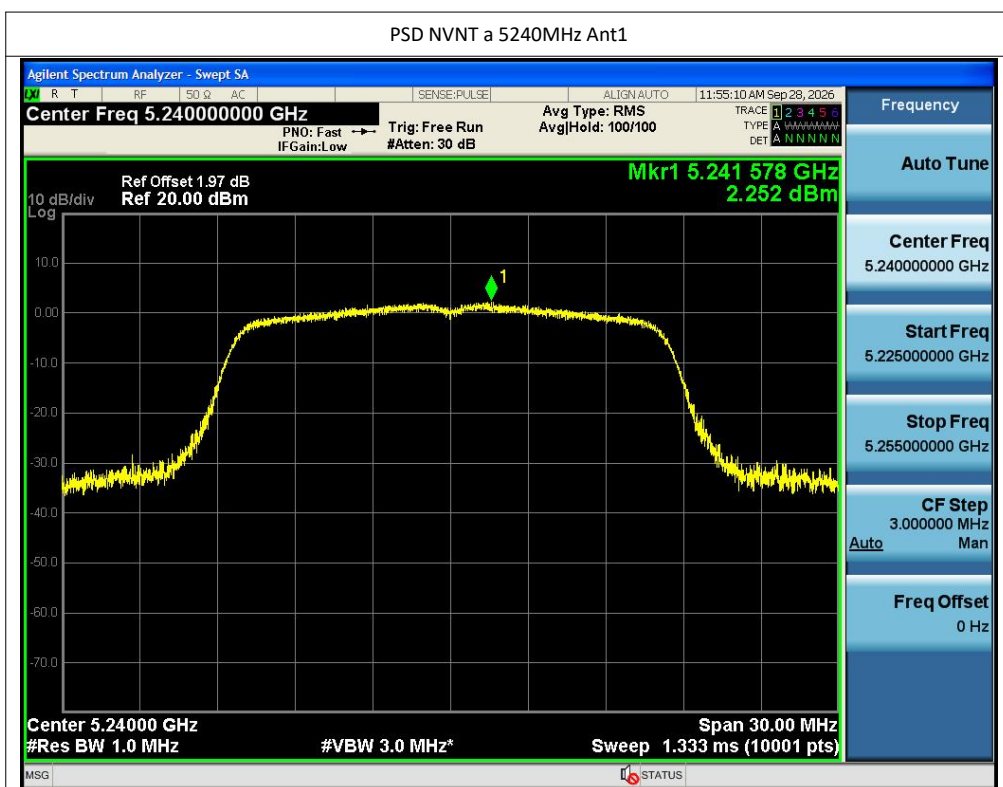


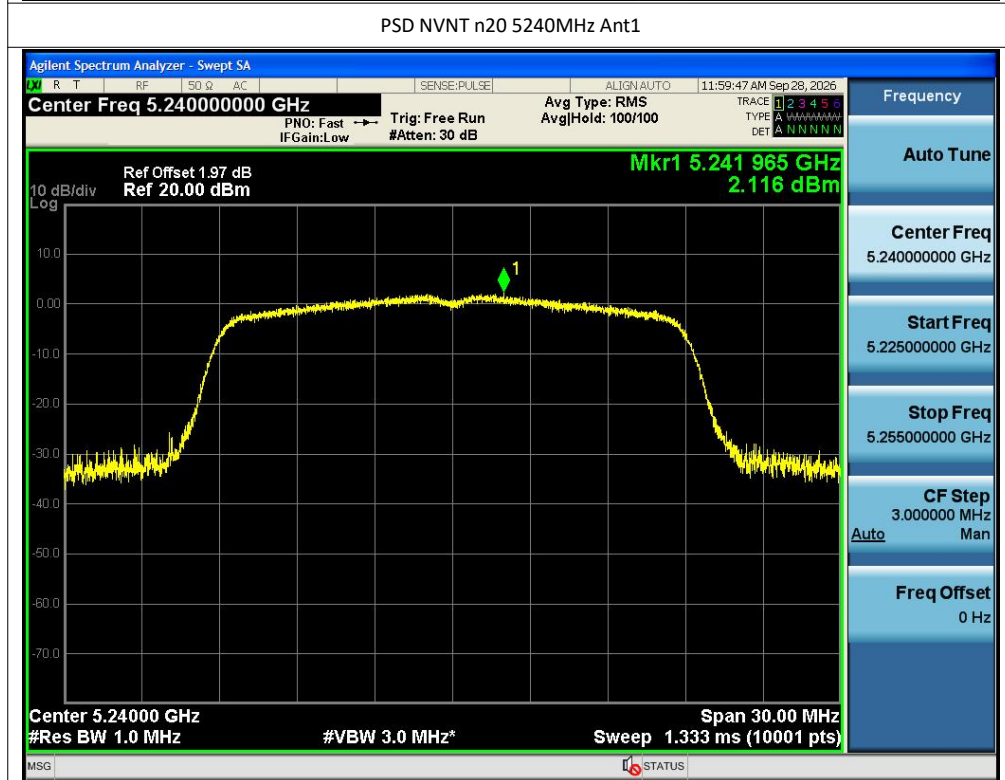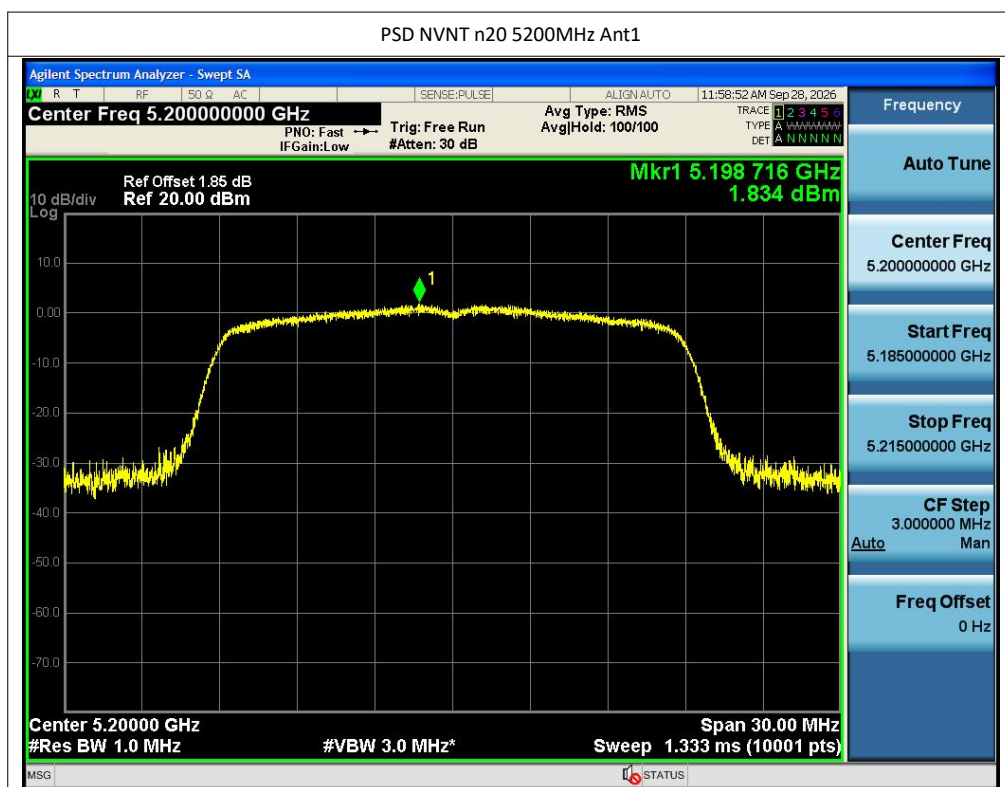

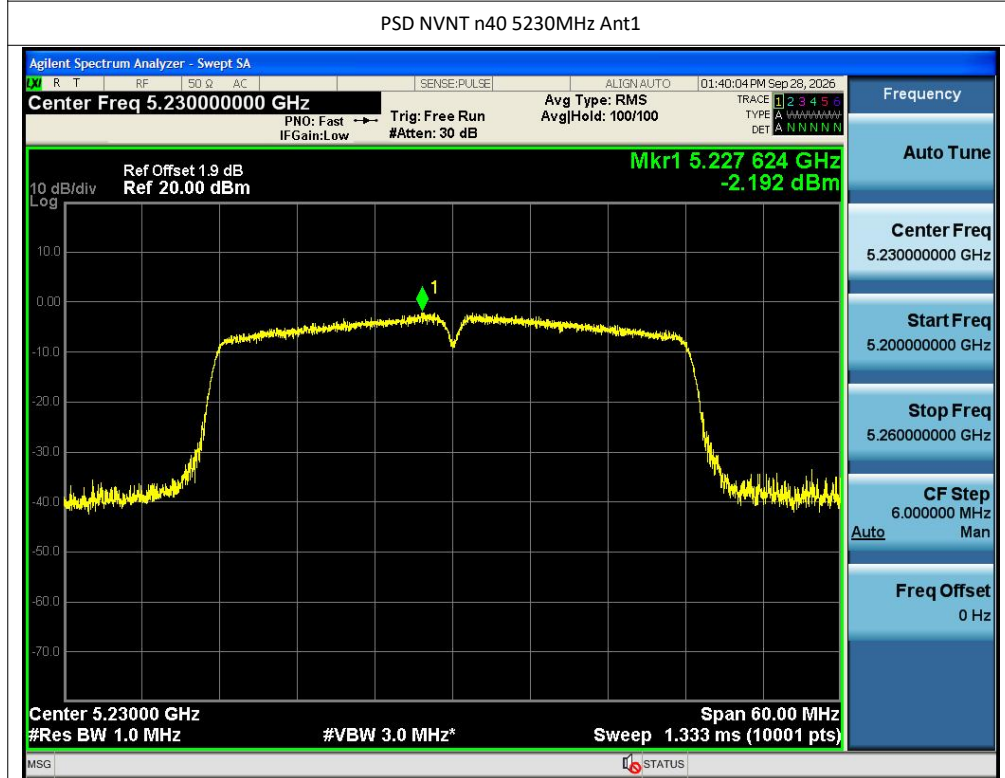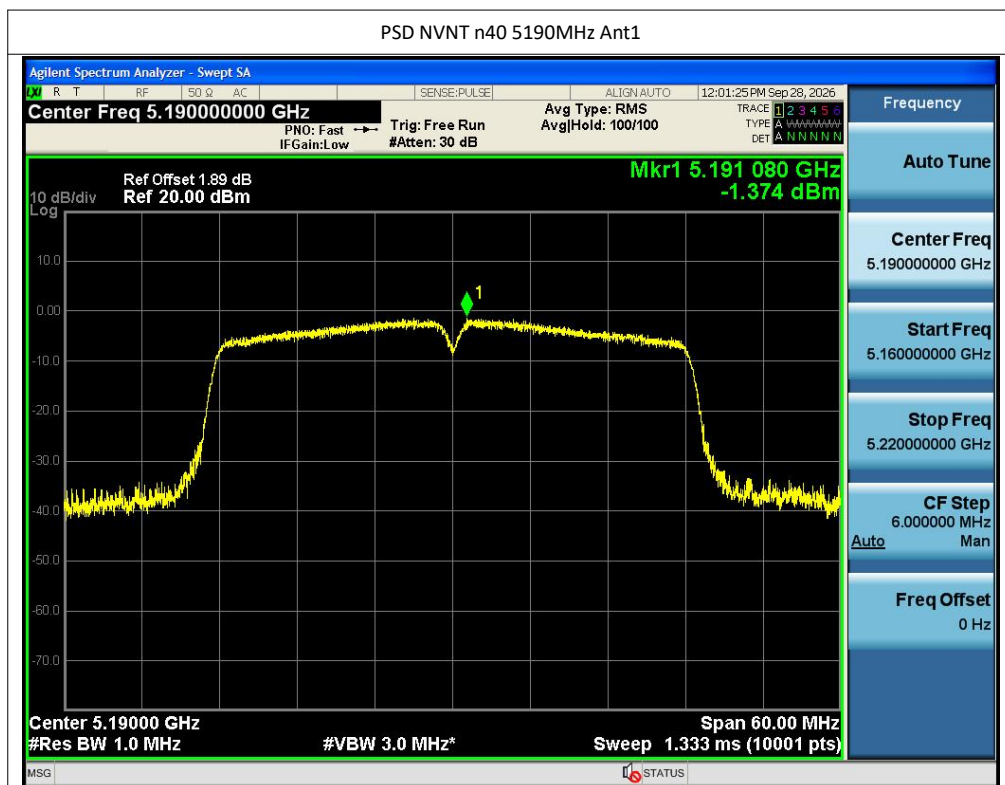

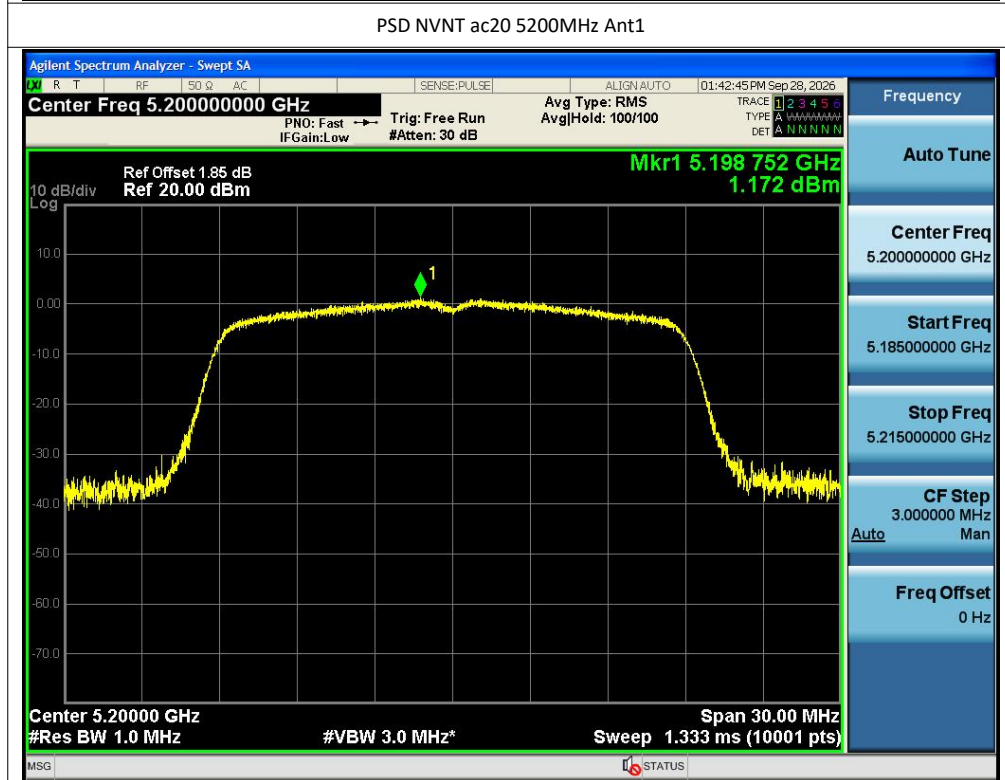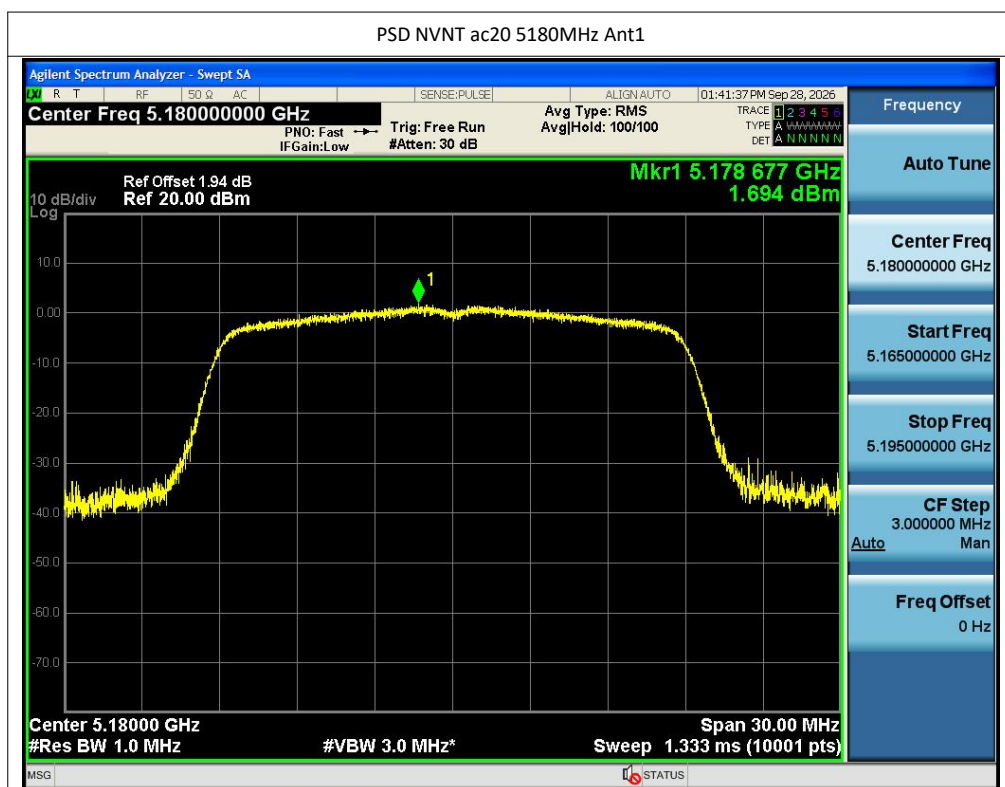

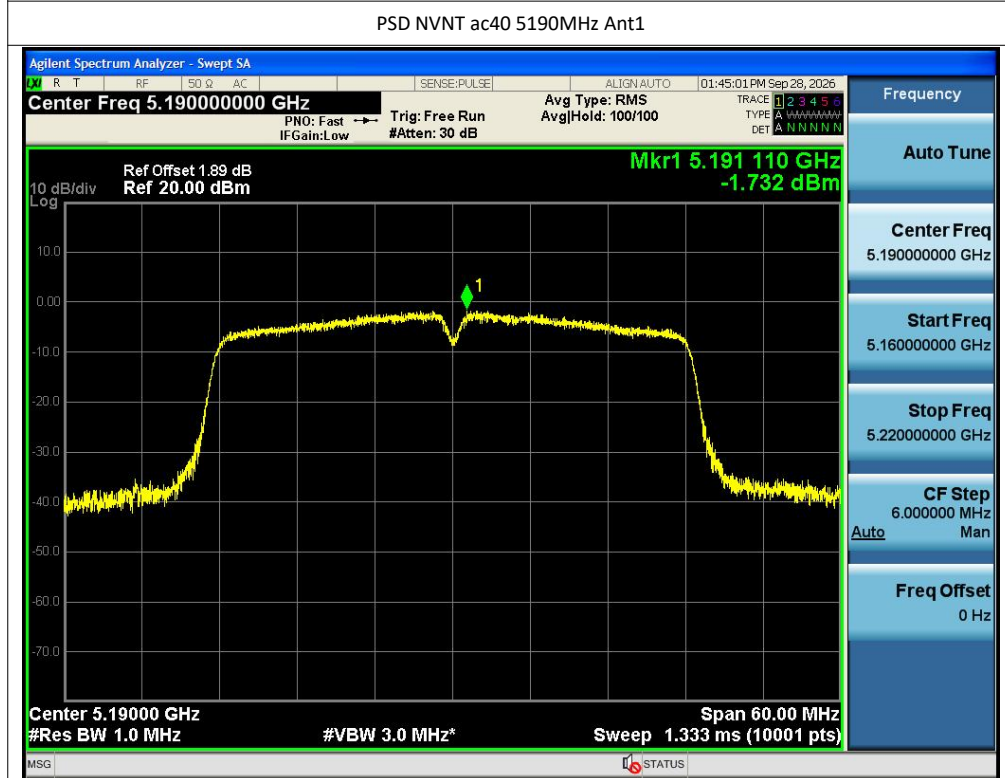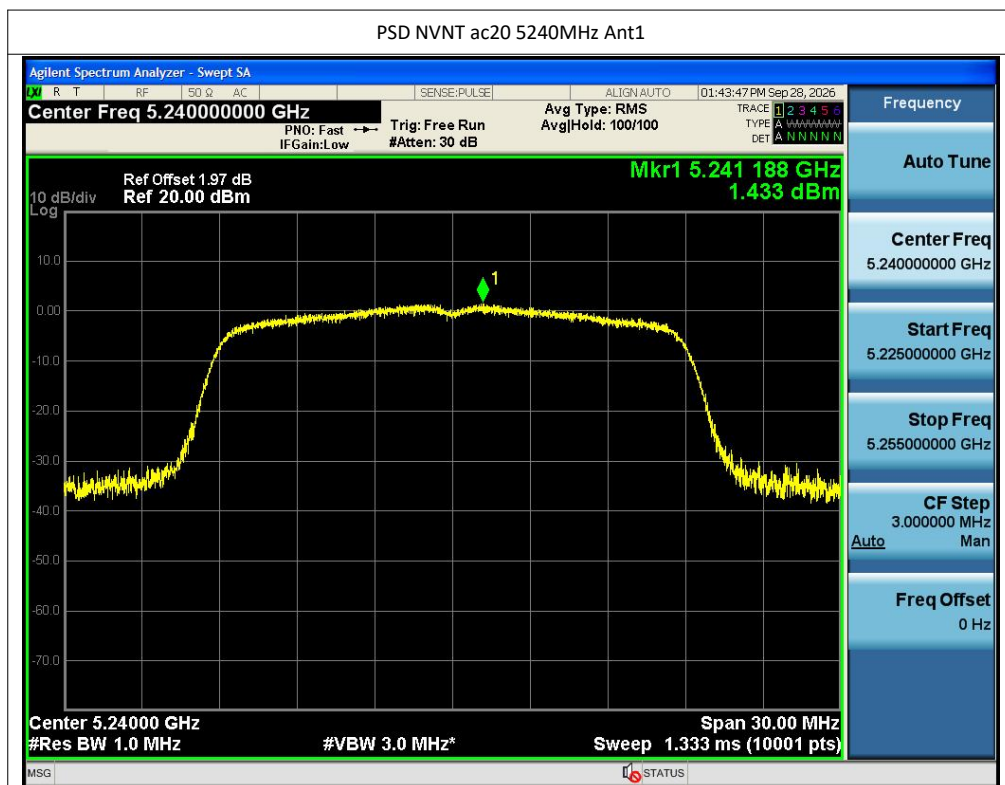

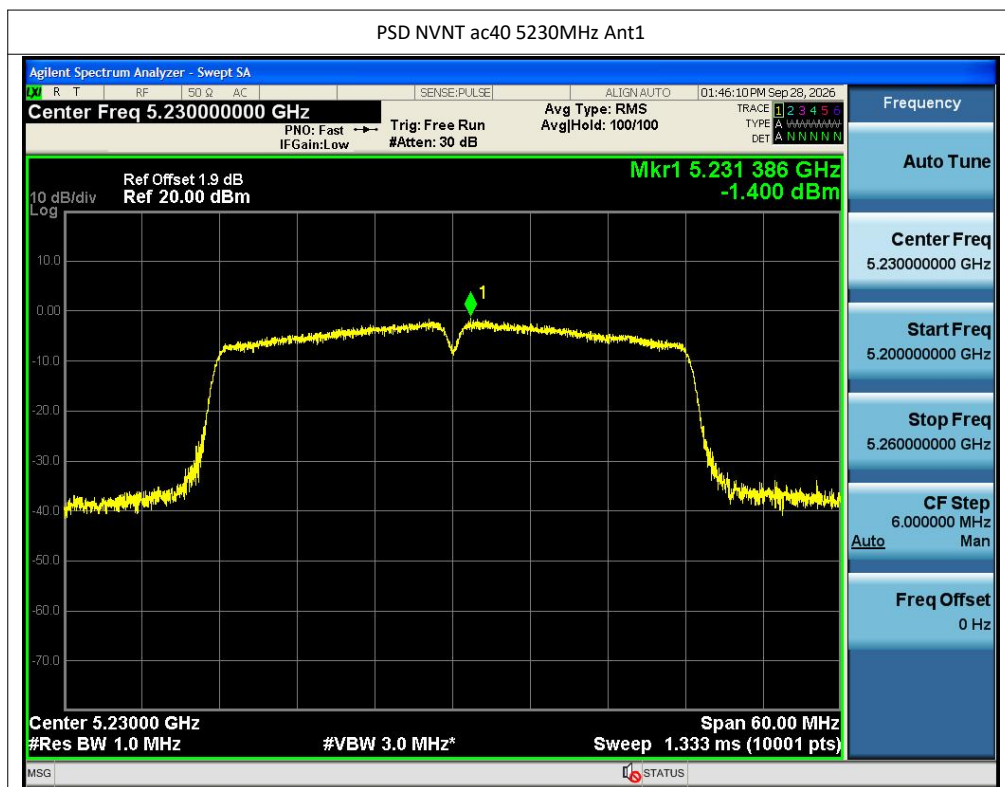

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-28.23	-27	Pass
NVNT	a	5240	Ant1	-44	-27	Pass
NVNT	n20	5180	Ant1	-30.23	-27	Pass
NVNT	n20	5240	Ant1	-44.07	-27	Pass
NVNT	n40	5190	Ant1	-27.69	-27	Pass
NVNT	n40	5230	Ant1	-42.47	-27	Pass
NVNT	ac20	5180	Ant1	-27.35	-27	Pass
NVNT	ac20	5240	Ant1	-44.4	-27	Pass
NVNT	ac40	5190	Ant1	-37.66	-27	Pass
NVNT	ac40	5230	Ant1	-43.8	-27	Pass

Test Graphs

Band Edge NVNT a 5180MHz Low Ant1



Band Edge NVNT a 5240MHz High Ant1



