



FCC ID EDR
FCC_BT (Part15.247) Test Data
Report No.: BKC26010305AE-2
FCC ID :2BUK8-JLCH2001

Table of Contents


1. Duty Cycle	2
2. -20dB Bandwidth	7
3. 99% Occupied Bandwidth	12
4. Peak Output Power	17
5. Spurious Emissions	22
6. Bandedge	31
7. Carrier Frequencies Separation (Hopping)	44
8. Number of Hopping Channel (Hopping)	49
9. Dwell Time (Hopping)	51

1. Duty Cycle


Condition	Antenna	Rate	Frequency (MHz)	Dutycycle(%)	Duty_factor
NVNT	ANT1	1-DH1	2402.00	30.16	5.21
NVNT	ANT1	1-DH1	2441.00	31.75	4.98
NVNT	ANT1	1-DH1	2480.00	30.65	5.14
NVNT	ANT1	2-DH1	2402.00	33.33	4.77
NVNT	ANT1	2-DH1	2441.00	33.33	4.77
NVNT	ANT1	2-DH1	2480.00	32.26	4.91
NVNT	ANT1	3-DH1	2402.00	30.65	5.14
NVNT	ANT1	3-DH1	2441.00	31.75	4.98
NVNT	ANT1	3-DH1	2480.00	31.75	4.98

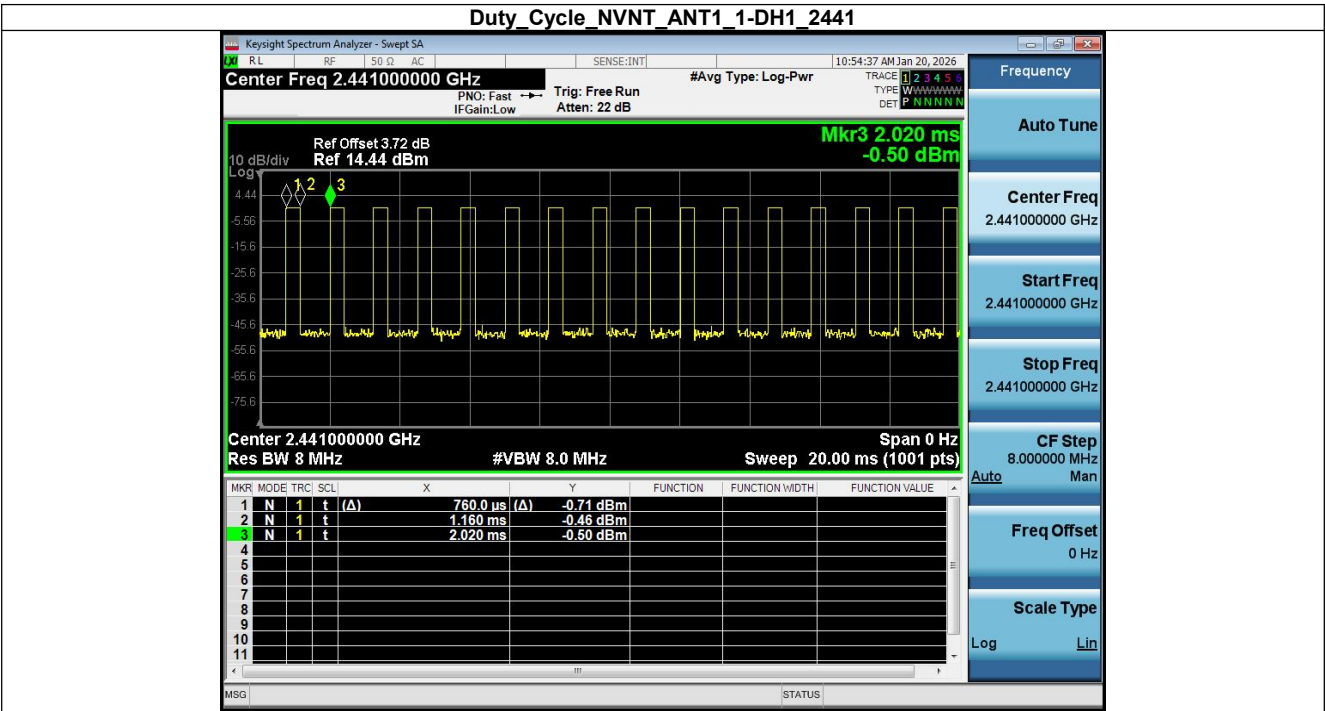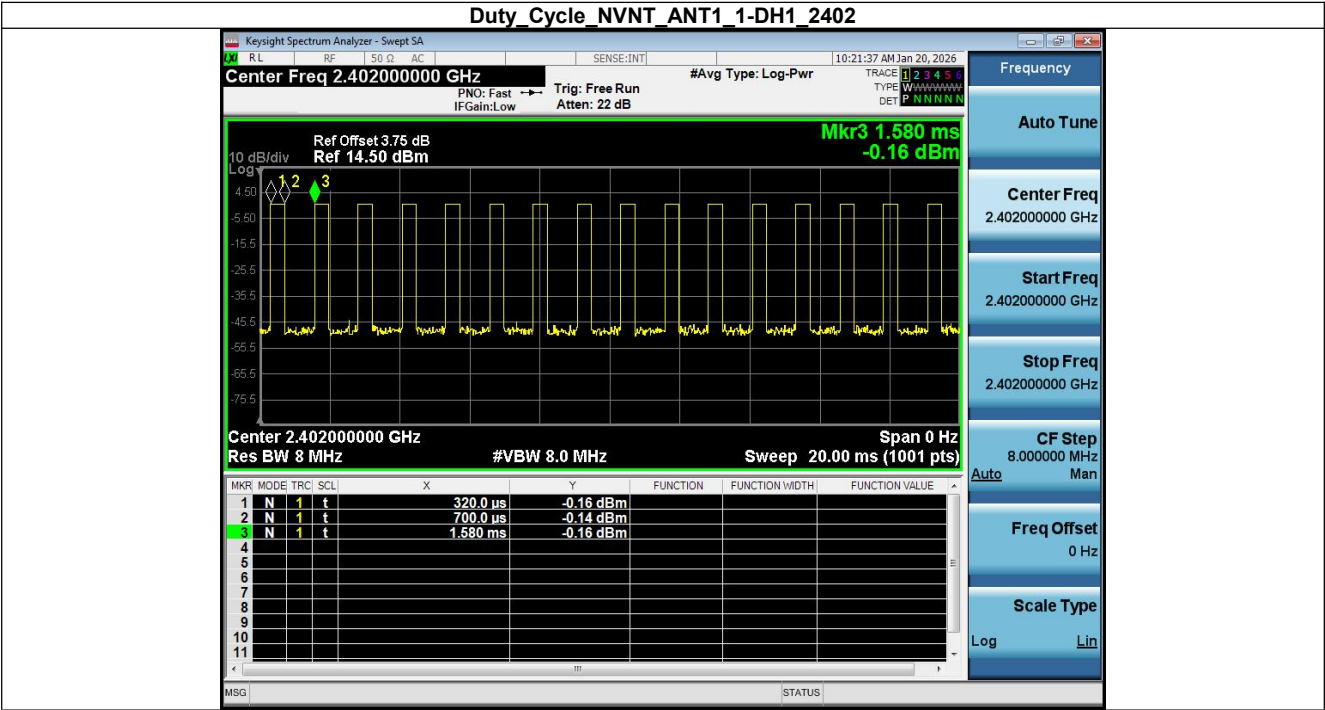


Duty Cycle_NVNT_ANT1_1-DH1_2480

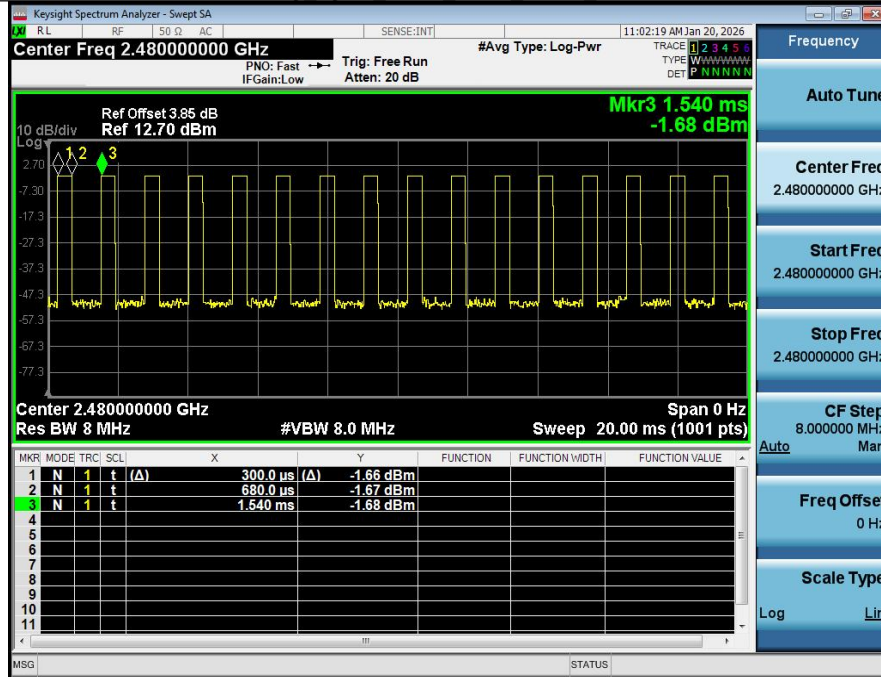


Duty Cycle_NVNT_ANT1_2-DH1_2402

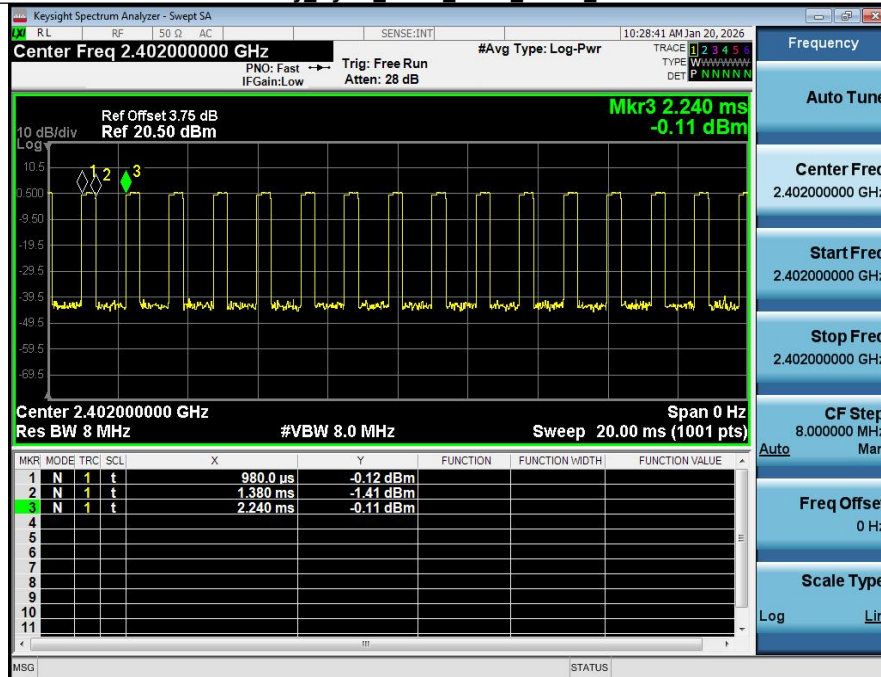


Duty Cycle_NVNT_ANT1_2-DH1_2441

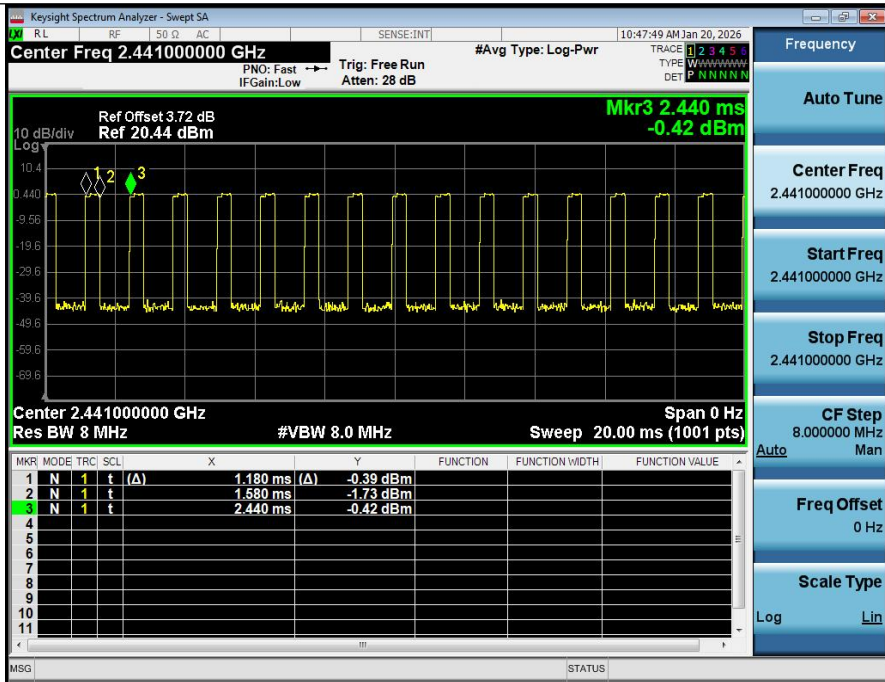


Duty Cycle_NVNT_ANT1 2-DH1_2480

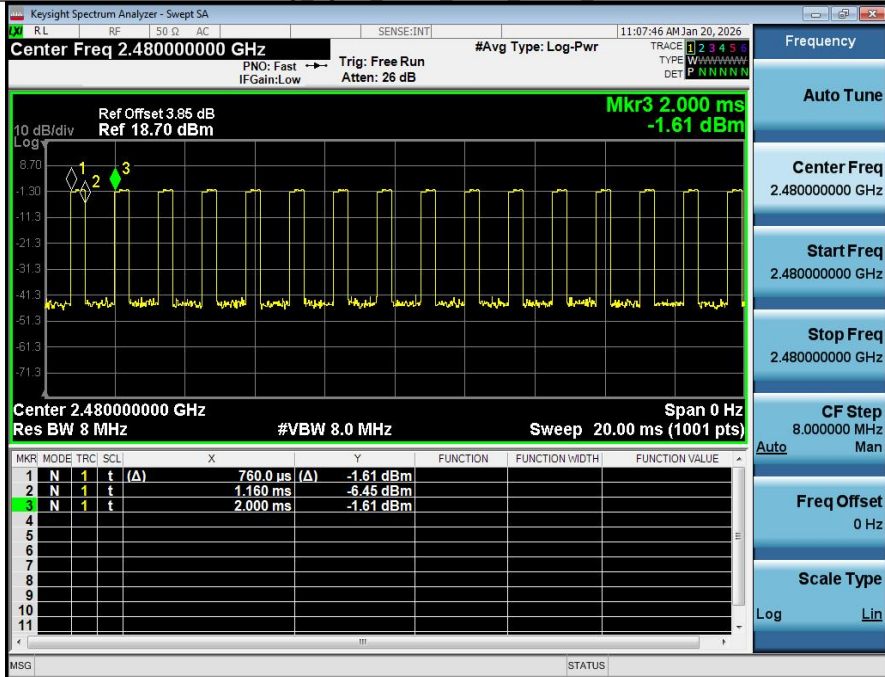


Duty Cycle_NVNT_ANT1 3-DH1_2402

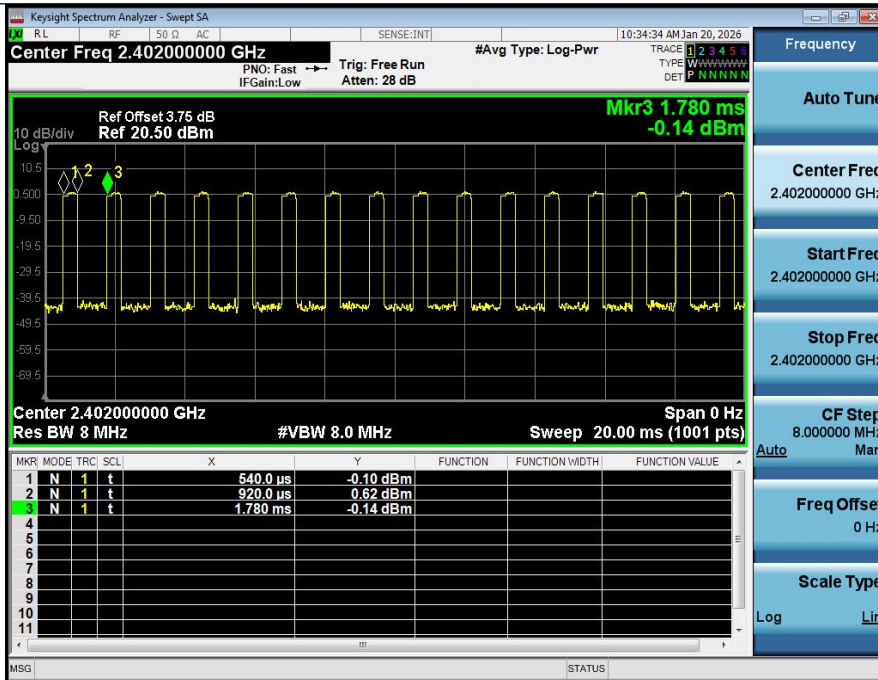

Duty Cycle_NVNT_ANT1_3-DH1_2441


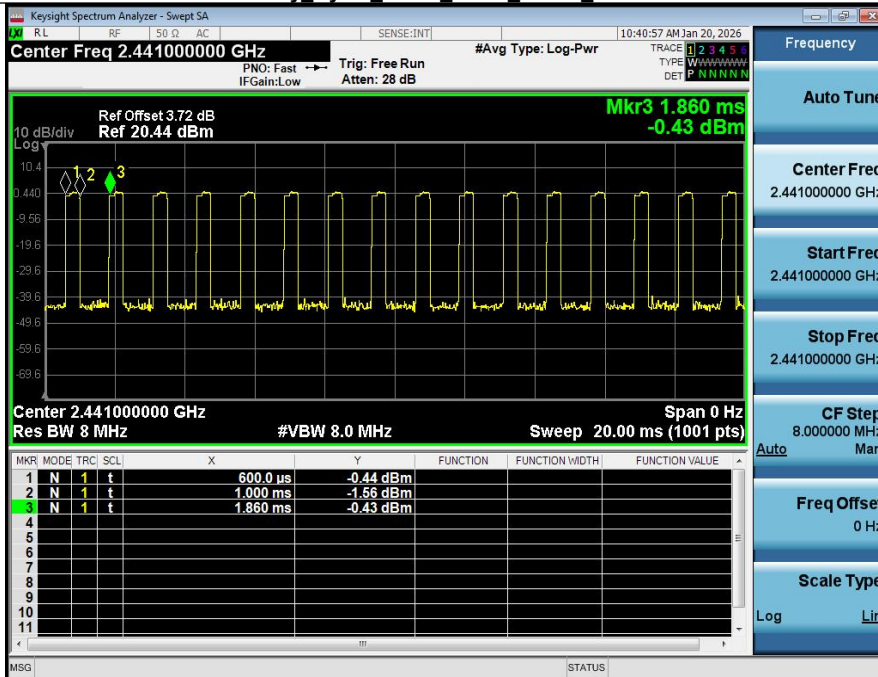


Duty Cycle_NVNT_ANT1_3-DH1_2480

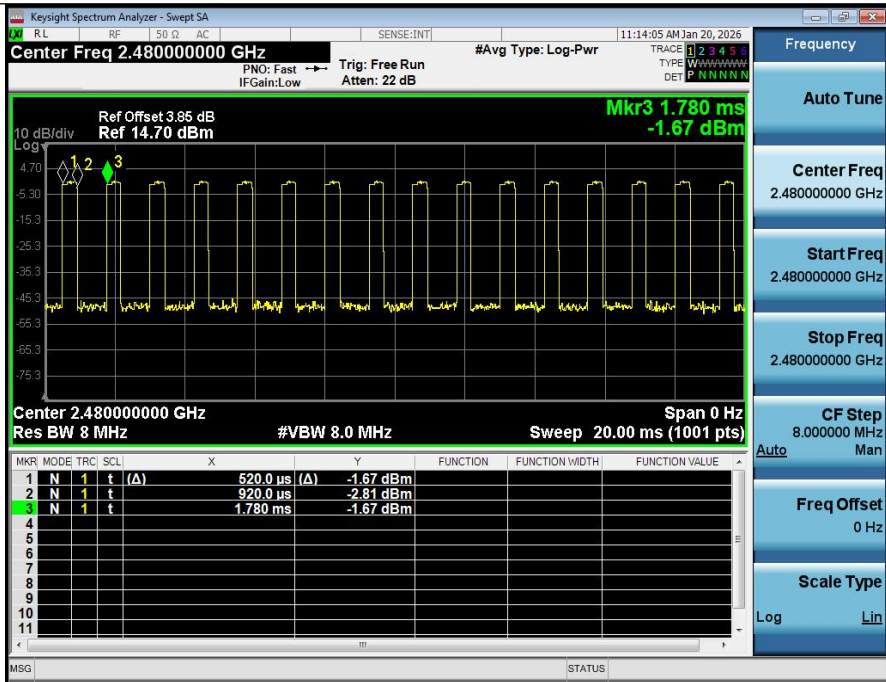

2. -20dB Bandwidth


Condition	Antenna	Modulation	Frequency (MHz)	-20dB BW(MHz)	if larger than CFS
NVNT	ANT1	1-DH1	2402.00	0.880	No
NVNT	ANT1	1-DH1	2441.00	0.880	No
NVNT	ANT1	1-DH1	2480.00	0.879	No
NVNT	ANT1	2-DH1	2402.00	1.256	Yes
NVNT	ANT1	2-DH1	2441.00	1.256	Yes
NVNT	ANT1	2-DH1	2480.00	1.252	Yes
NVNT	ANT1	3-DH1	2402.00	1.248	Yes
NVNT	ANT1	3-DH1	2441.00	1.245	Yes
NVNT	ANT1	3-DH1	2480.00	1.245	Yes

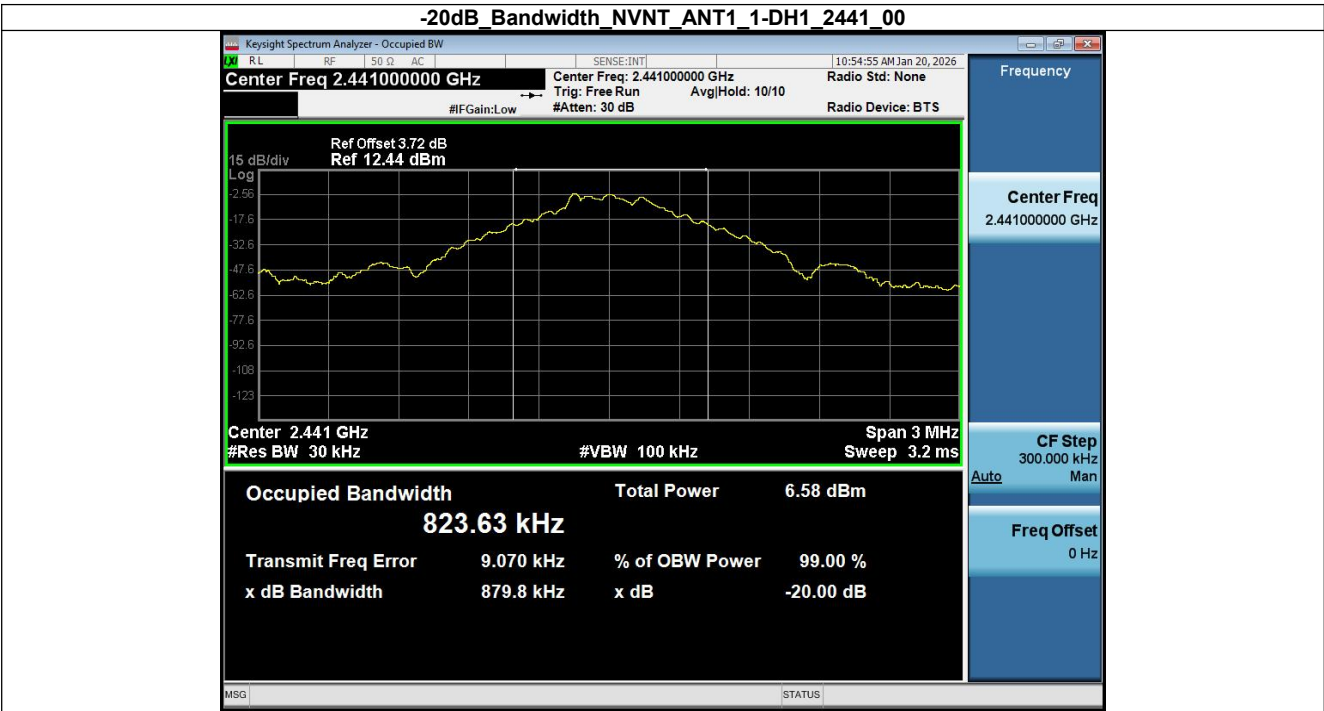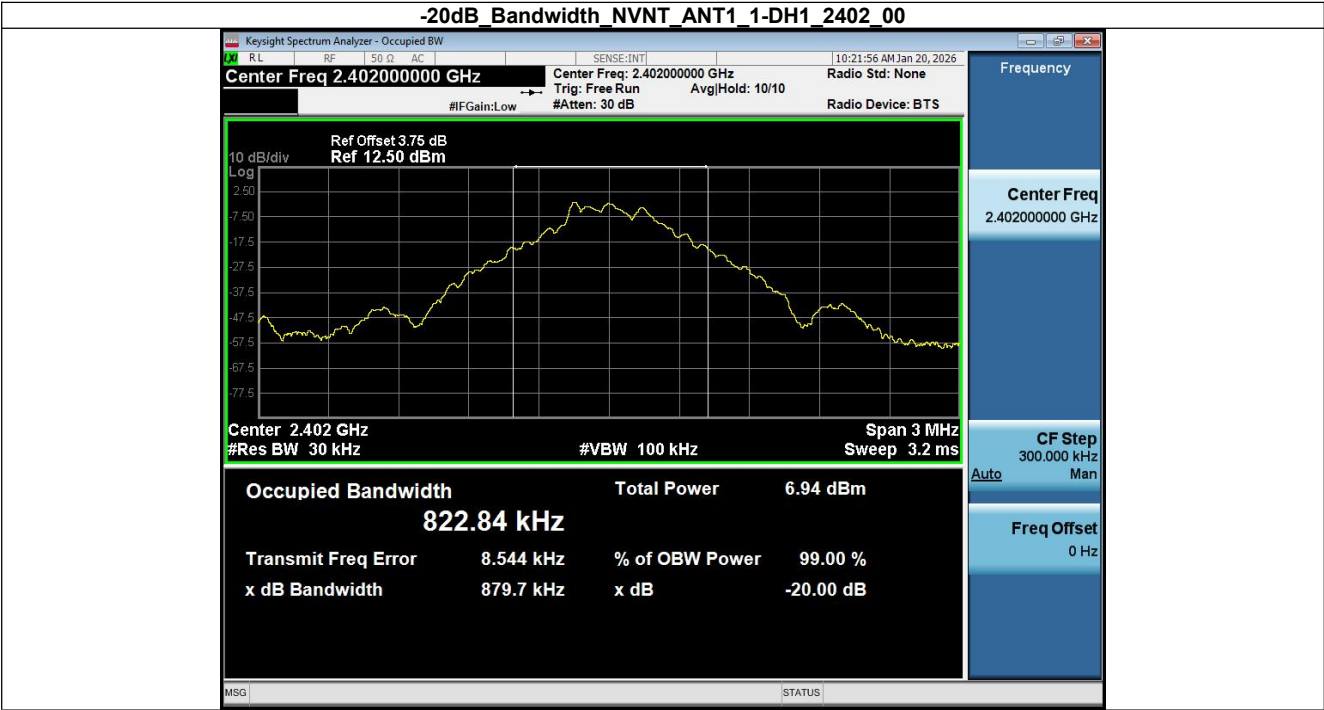


-20dB_Bandwidth_NVNT_ANT1_1-DH1_2480_00



-20dB_Bandwidth_NVNT_ANT1_2-DH1_2402_00

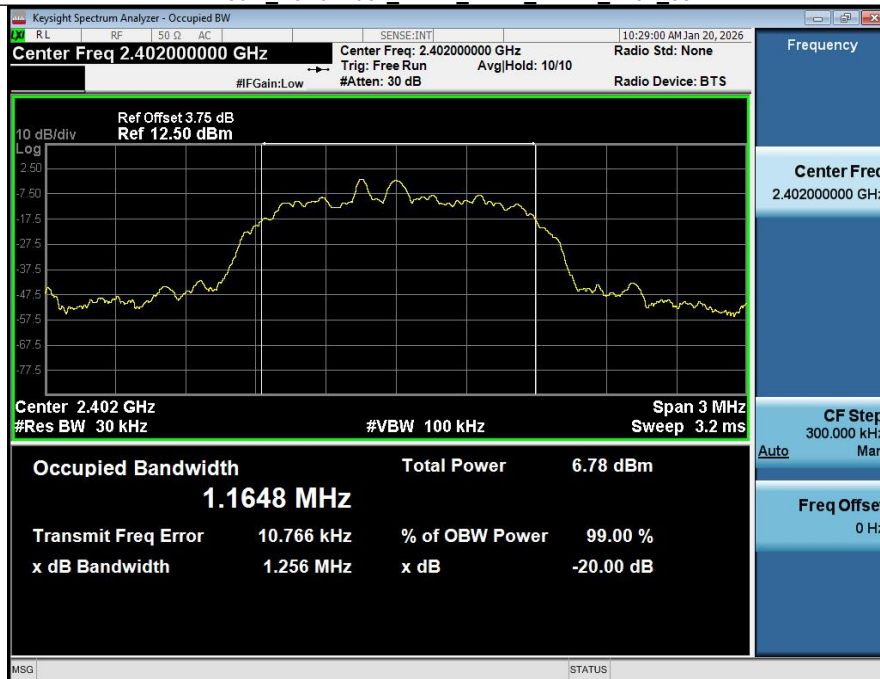

-20dB_Bandwidth_NVNT_ANT1_2-DH1_2441_00

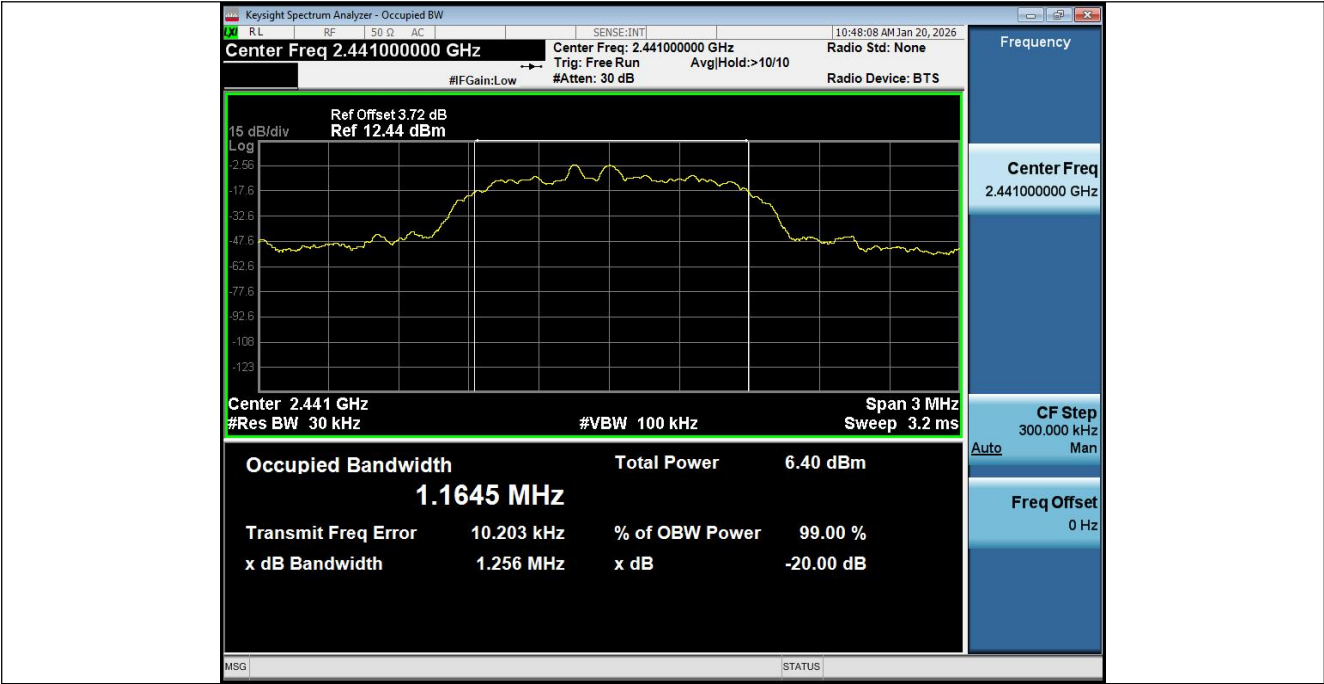

-20dB_Bandwidth_NVNT_ANT1_2-DH1_2480_00



-20dB_Bandwidth_NVNT_ANT1_3-DH1_2402_00



-20dB_Bandwidth_NVNT_ANT1_3-DH1_2441_00




-20dB_Bandwidth_NVNT_ANT1_3-DH1_2480_00



3. 99% Occupied Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	99%%BW(MHz)
NVNT	ANT1	1-DH1	2402.00	0.823
NVNT	ANT1	1-DH1	2441.00	0.824
NVNT	ANT1	1-DH1	2480.00	0.824
NVNT	ANT1	2-DH1	2402.00	1.165
NVNT	ANT1	2-DH1	2441.00	1.164
NVNT	ANT1	2-DH1	2480.00	1.166
NVNT	ANT1	3-DH1	2402.00	1.148
NVNT	ANT1	3-DH1	2441.00	1.148
NVNT	ANT1	3-DH1	2480.00	1.145

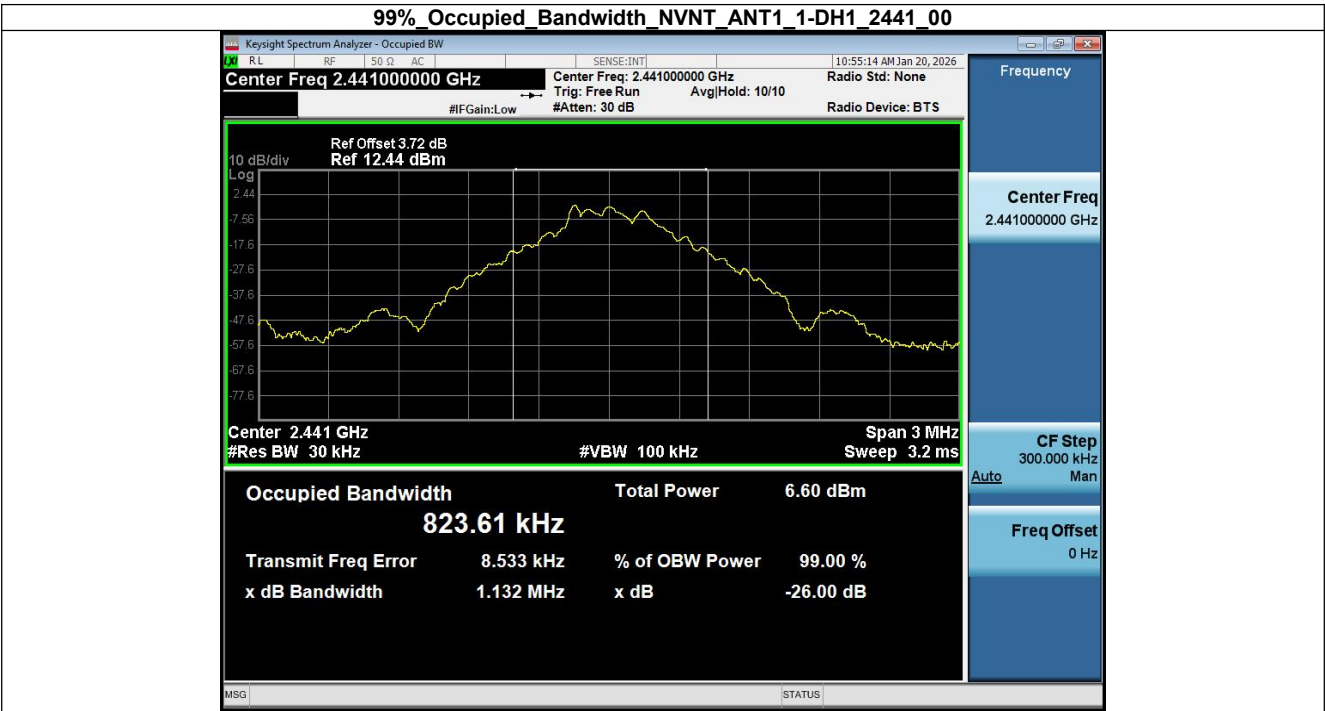


99% Occupied Bandwidth NVNT_ANT1_1-DH1_2480_00




99% Occupied Bandwidth NVNT_ANT1_2-DH1_2402_00



99% Occupied Bandwidth NVNT_ANT1_2-DH1_2441_00

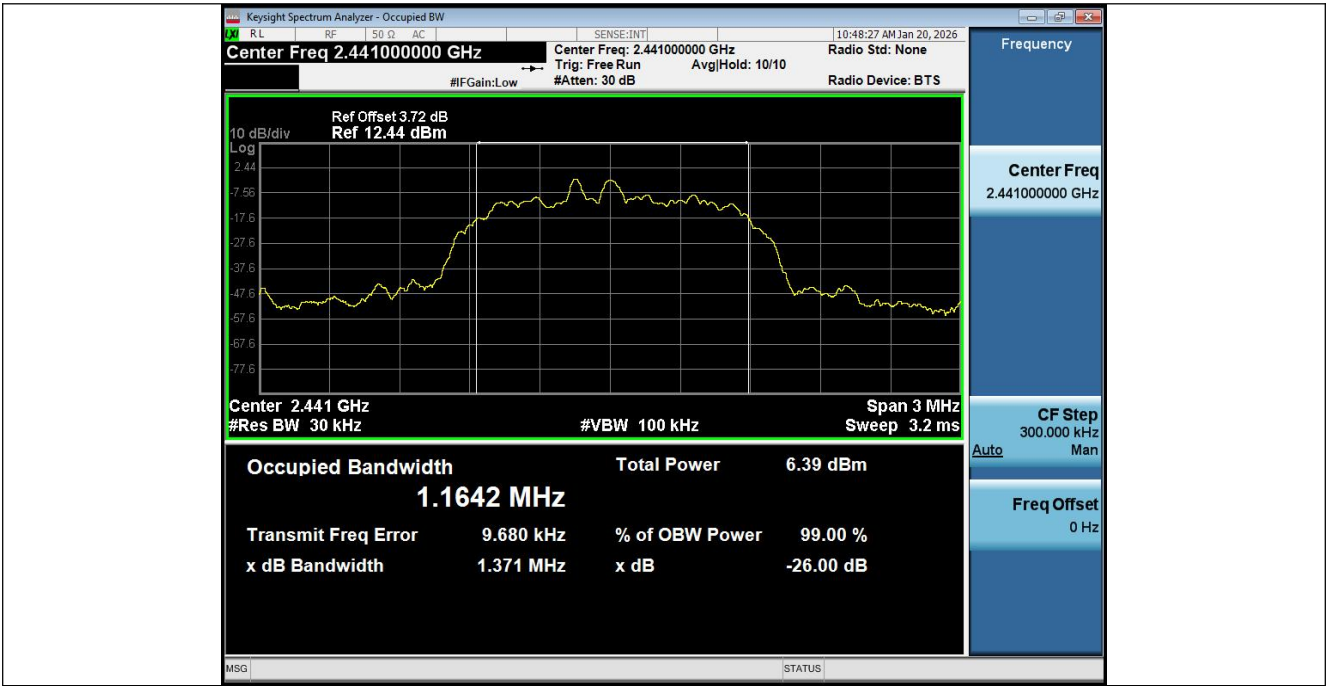

99% Occupied Bandwidth NVNT_ANT1_2-DH1_2480_00

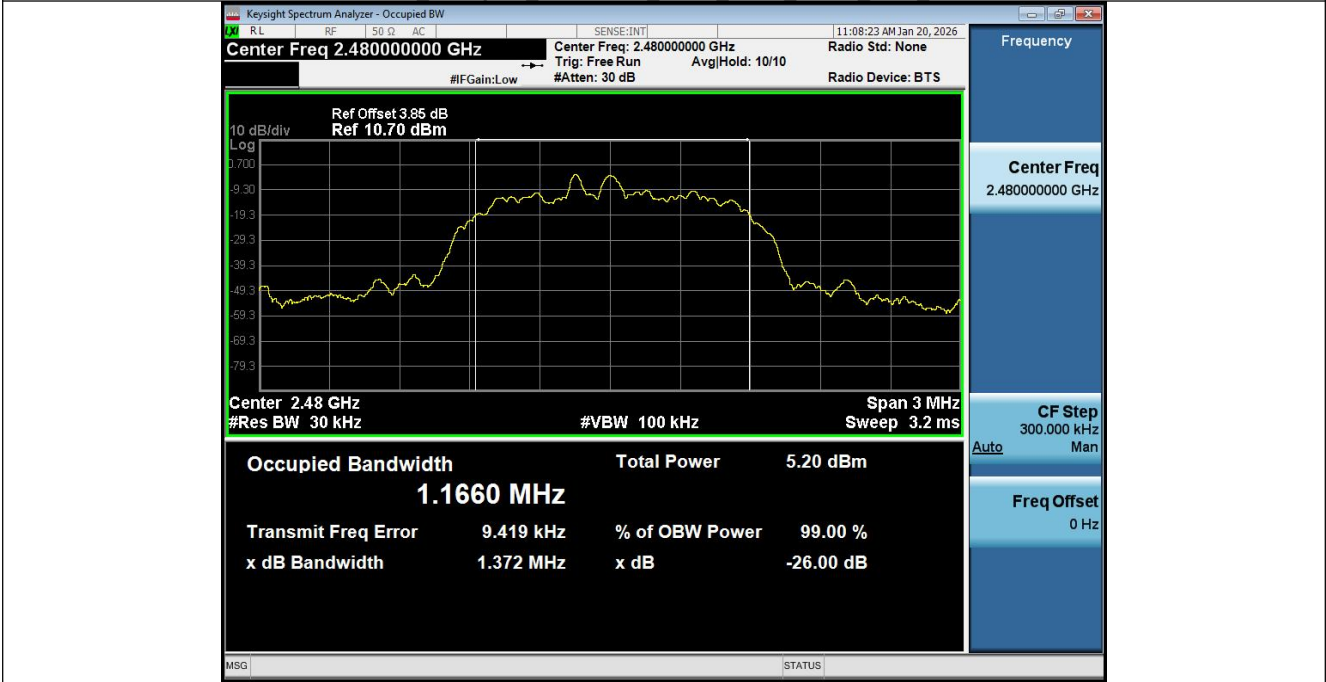

99% Occupied Bandwidth NVNT_ANT1_3-DH1_2402_00



99% Occupied Bandwidth NVNT_ANT1_3-DH1_2441_00



99% Occupied Bandwidth NVNT_ANT1_3-DH1_2480_00



4. Peak Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1-DH1	2402.00	-0.15	0.97	1000	Pass
NVNT	ANT1	1-DH1	2441.00	-0.48	0.90	1000	Pass
NVNT	ANT1	1-DH1	2480.00	-1.67	0.68	1000	Pass
NVNT	ANT1	2-DH1	2402.00	0.77	1.19	125	Pass
NVNT	ANT1	2-DH1	2441.00	0.41	1.10	125	Pass
NVNT	ANT1	2-DH1	2480.00	-0.77	0.84	125	Pass
NVNT	ANT1	3-DH1	2402.00	1.31	1.35	125	Pass
NVNT	ANT1	3-DH1	2441.00	0.99	1.26	125	Pass
NVNT	ANT1	3-DH1	2480.00	-0.16	0.96	125	Pass

