

Instruction Manual

1.Product introduction

(1) Features:

- ♦Time, date, temperature, humidity, can automatically switch display, you can also manually lock the display time & temperature & humidity.
- ♦Support wireless charging
- ♦Bluetooth automatic time calibration function
- ♦Bluetooth dual-channel speaker
- ♦Working voltage: DC 9V2A, 9V3A, 12V/2A/3A
- ♦Perpetual calendar from year 2000 to 2099, 100 years in total.
- ♦12/24 hours: 12/24 hour conversion is possible, default 24-hour system, January 1, 2016, 12:00
- ♦Three groups of alarms, each group lasts 1 minute.
- ♦The voice control switch is freely adjustable (press the Down button)

(2) General product configuration

Tips: When you open the product packaging, please check if all the following accessories are in the box:

- ♦One digital clock
- ♦One instruction manual
- ♦2A TYPE-C USB cable

*No adapter included (you need to buy a 9V,2A adapter by yourself, otherwise it will cause the alarm clock to fail to charge)

Main technical parameters of the product

♦INPUT: AC100-240V,50/60HZ, OUTPUT: 5W-10W

Power supply Adapter: 5-9V/2A

♦Wireless charging: power 10W, output voltage 5V, charging current 700-800MA

♦Bluetooth speaker:

Version: Bluetooth V5.0

Wireless transmission distance: Within 10 meters

Transmission power: CLASS2, 4dbm

Sensitivity: -80dBm<0.1%BER

Frequency range: 2.402GHz-2.480GHz

Audio performance SBC decoding

Audio signal to noise ratio: ≥75dB


Speaker impedance 4 ohms

Speaker power 5W*2

2.Display and button introduction

Short Press: dp-1/dp-2
Long Press: Setting Mode

Short Press: temperature°C/°F
Long Press: Brightness Setting

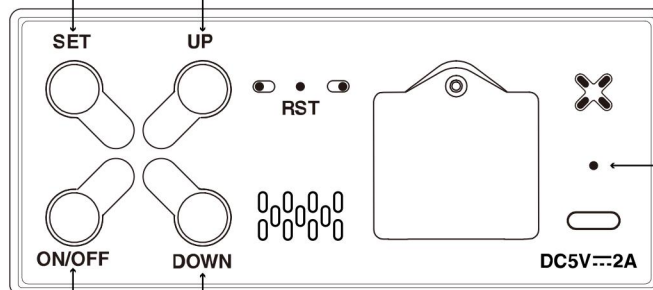

Charging indicator
Light red light is on during charging
Full charge indicator light is off

Short Press:
Bluetooth Answering Phone
Long Press: ON/OFF Bluetooth

Short Press: ON/OFF Voice Control

(1).Display mode:

There are two display modes, press the button "SET" , you could change the mode of display;

Dp-1: time, temperature, humidity and year, month and day display would change orderly (Carousel mode)

Dp-2: only time, temperature, humidity display (Fixed mode)

(2).Voice Control Mode (power-saving mode):

Press the button "DOWN" , "on: Sd" ↔ " --:Sd" ;

"on:Sd" means sound control is on;

"--:Sd" means sound control is off.

It will automatically close the voice control mode in seconds; Display will be woke up when the sound is louder than 60 decibels or flap the clock. If close the voice control mode, constant light function will be turned on.

(3).Temperature Mode Setting:

Press the button of "UP" , you could change the Temperature Mode between °C and °F

(4).Brightness Setting:

Press the button of "UP" for 3 seconds, you could enter into the mode of brightness, then you could change the brightness through pressing the button of "UP" (more bright) and pressing the button of "DOWN" (less bright).

L1: Bright

L2: Less Bright

L3: Weakest brightness

(5).Power supply:

You must connect 5-9V,2A adapter when the clock works.

(The clock with built-in cell battery, it will automatically remember the time when the power is off, you don't need to reset the time);

(6).Alarm Setting:

User can set 3 alarm time every day, alarm lasting 1 minute, the sound is: beep beep beep, can press any key on the back of clock to stop the alarm;

3.Setting Instruction

Press the button "SET" (While the numbers flashing), you would enter into the setting mode. And the setting order are as follows:

(1).Setting of Date

When entering the set mode, the letter flashing setting order "Year" "Month" "Day" , press button "UP" or "DOWN" to change the number.

(2).12H/24H Setting

After finishing the setting of date, you would enter into the 12H/24H Setting mode while you press "SET" , and also you could change the 12H/24H through pressing the "UP" and "DOWN" . At the 12H Setting mode, AM or PM lights on.

(3).Time Setting

After finishing the date setting mode, you could enter into the time mode setting while you need to press "SET" and then you could adjust the time through pressing "UP" and "DOWN" .

(4)Alarm Setting

After finishing the time mode setting, you could enter into the alarm setting while you need to continue press "SET" , and then you could adjust the time through pressing "UP" and "DOWN" .

Press "UP" and "DOWN" can adjust upward or downward to turn on "on:A1" /turn off "--: A1" .When the letter "on :A1" appears ,you could press "SET" and enter into A1 Alarm clock Setting(you could set 3 Alarm clock A1/A2/A3).Then the letter of time "--" flashing, you continue to press "UP" and "DOWN" to set alarm .

You could continue set the Alarm clock A2/A3 follow the step 1 and step 2.

(5).Alarm Setting for Work Day

After finishing the alarm setting, Press the key "SET" . Then you could press "UP" and "DOWN" to change the status of on/off workday alarm.(on: E means on; --:E means off.)

♦ON/OFF button: Press and hold the ON/OFF switch Bluetooth in any mode to search for WOODSHOW SPEAKER connection. In Bluetooth mode, press this button to answer the call and pause playback.

Wireless charging method: top wireless charging, mobile phone with wireless charging function, or mobile phone without this function plug in the receiving piece, the receiving part is placed in the middle of the product to be charged, whether the charging is successful to see the mobile phone prompt. Automatically disconnects the charge when fully charged.

FCC Statement

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.