



FCC Appendix RF Test Data for 5.2GWIFI

Product Name: Vehicle Mount Computer

Test Model: LC:TWO MAX


Environmental Conditions

Temperature:	23.6°C
Relative Humidity:	54.8%
ATM Pressure:	100.0 kPa
Test Engineer:	Zoey Cao
Supervised by:	Eric Wang




1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	21.48	---	Pass
NVNT	a	5200	Ant1	21.58	---	Pass
NVNT	a	5240	Ant1	21.64	---	Pass
NVNT	n20	5180	Ant1	22.82	---	Pass
NVNT	n20	5200	Ant1	22.59	---	Pass
NVNT	n20	5240	Ant1	21.74	---	Pass
NVNT	n40	5190	Ant1	48.67	---	Pass
NVNT	n40	5230	Ant1	49.51	---	Pass
NVNT	ac20	5180	Ant1	21.64	---	Pass
NVNT	ac20	5200	Ant1	21.75	---	Pass
NVNT	ac20	5240	Ant1	22.06	---	Pass
NVNT	ac40	5190	Ant1	44.04	---	Pass
NVNT	ac40	5230	Ant1	43.01	---	Pass
NVNT	ac80	5210	Ant1	84.23	---	Pass

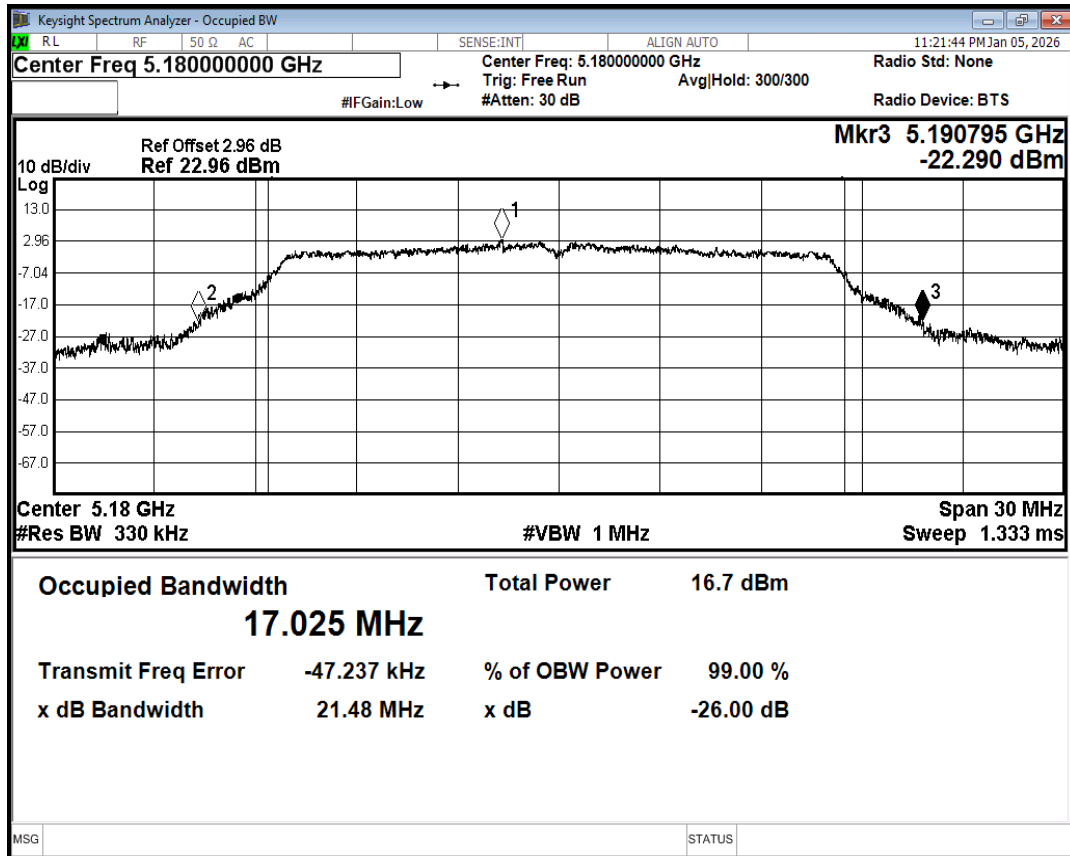


-26dB Bandwidth NVNT a 5180MHz Ant1

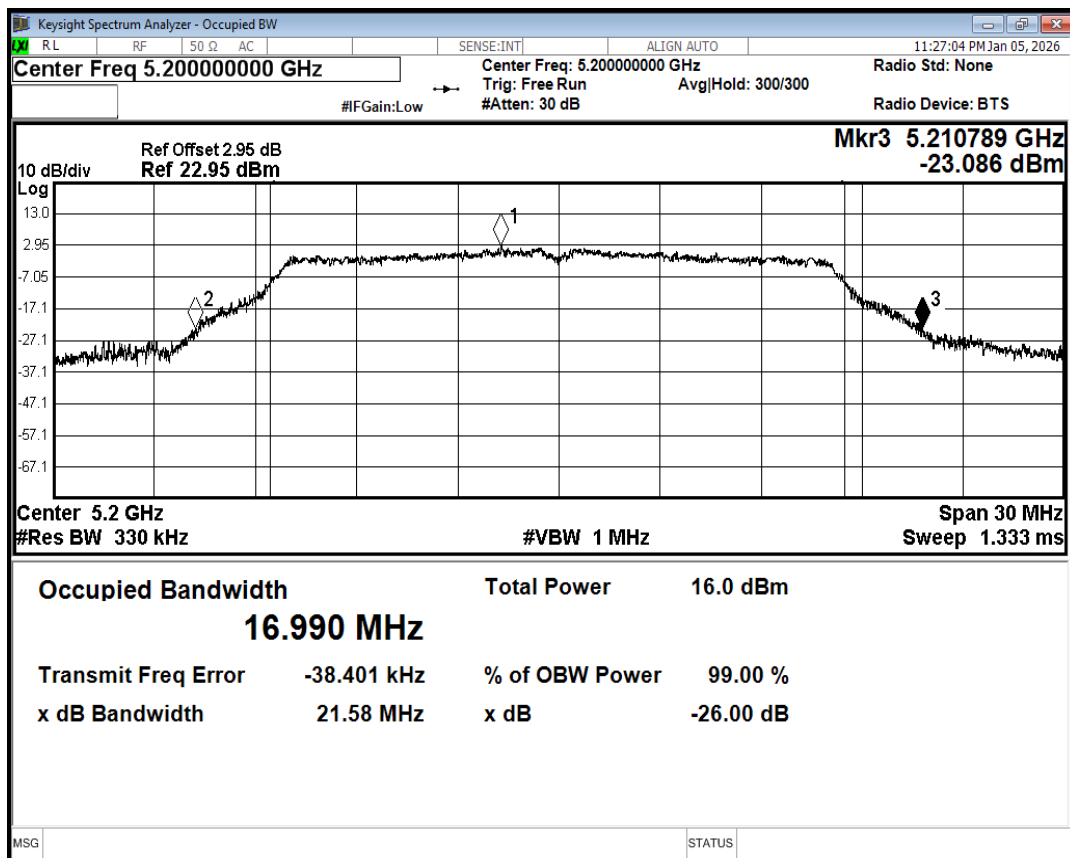


-26dB Bandwidth NVNT a 5200MHz Ant1

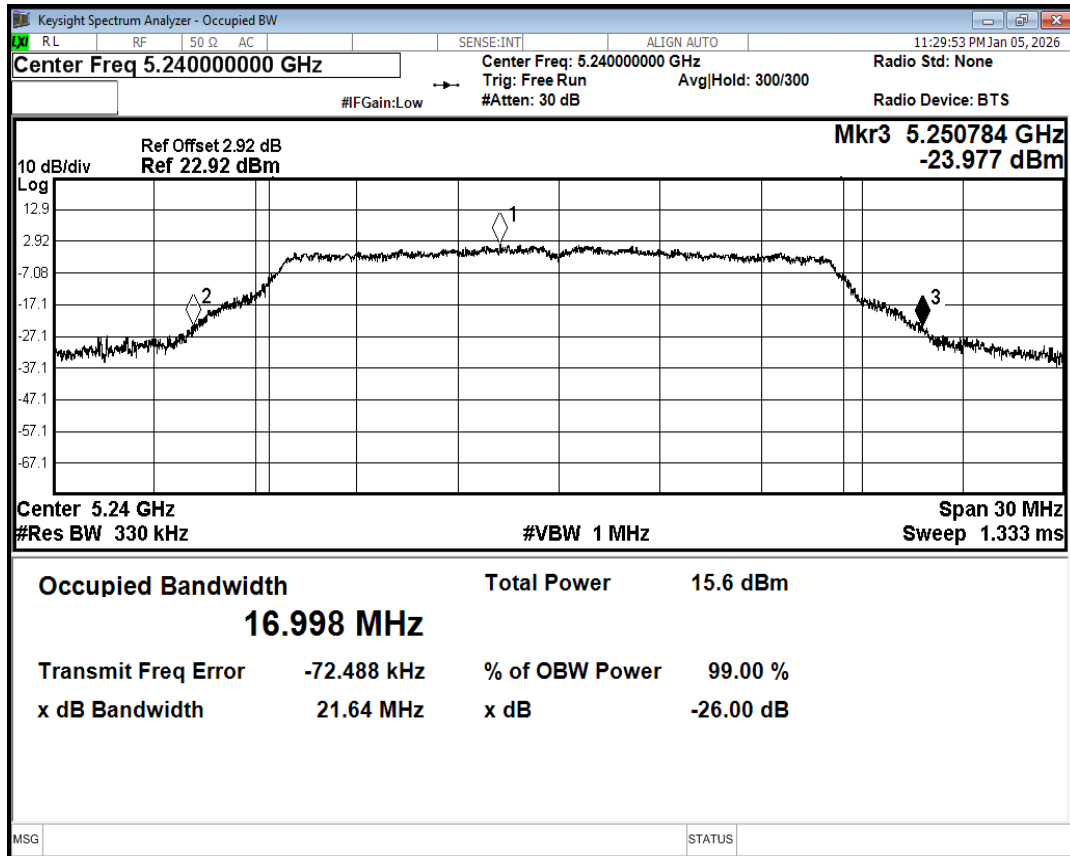


-26dB Bandwidth NVNT a 5240MHz Ant1

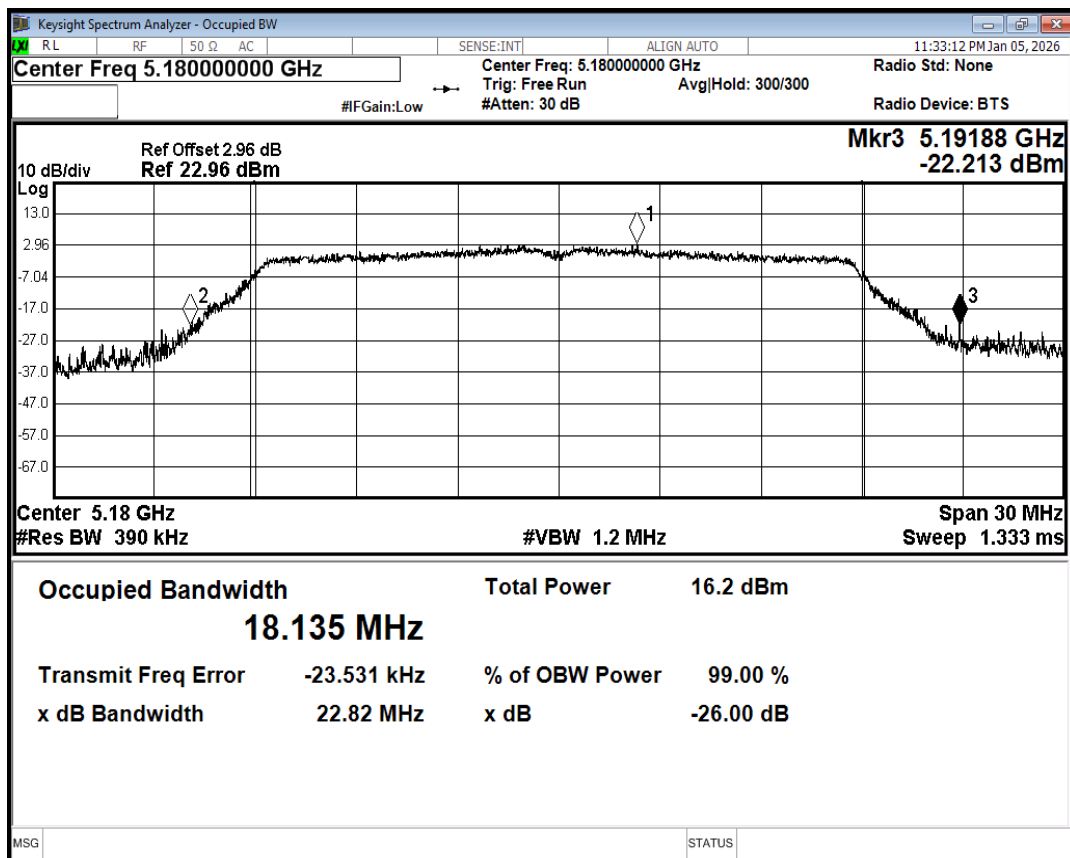


-26dB Bandwidth NVNT n20 5180MHz Ant1

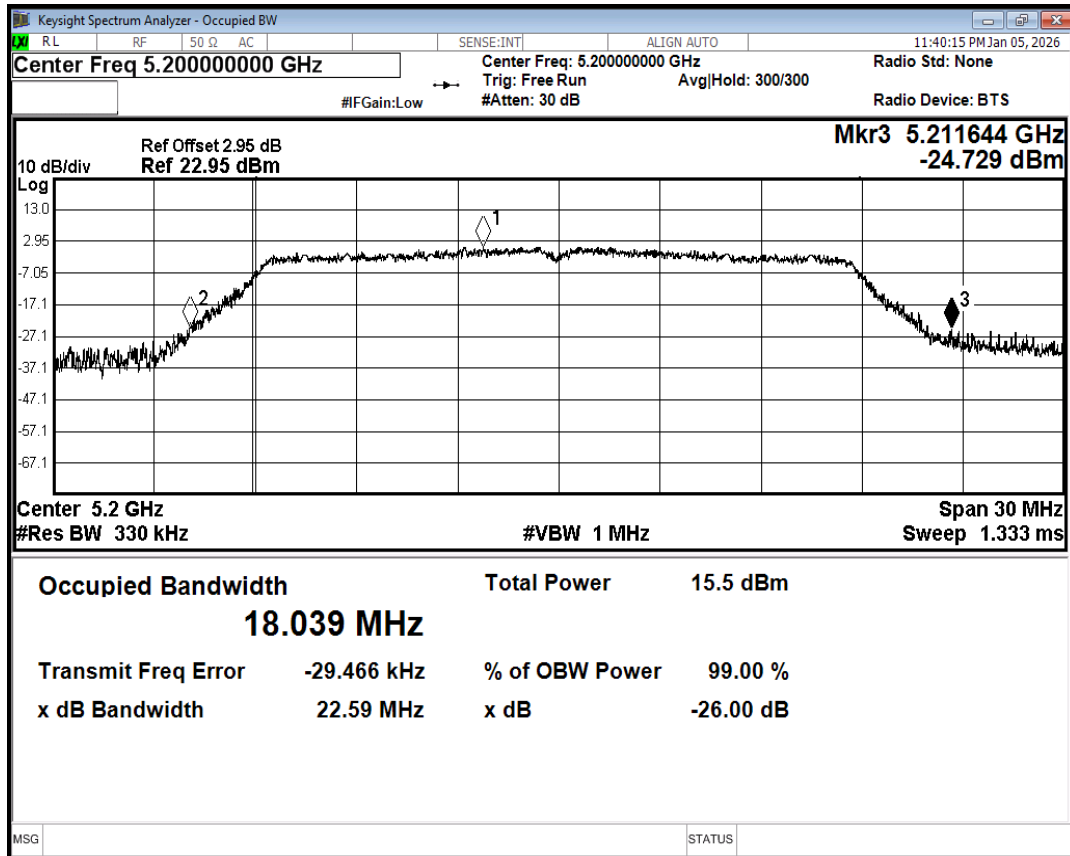


-26dB Bandwidth NVNT n20 5200MHz Ant1

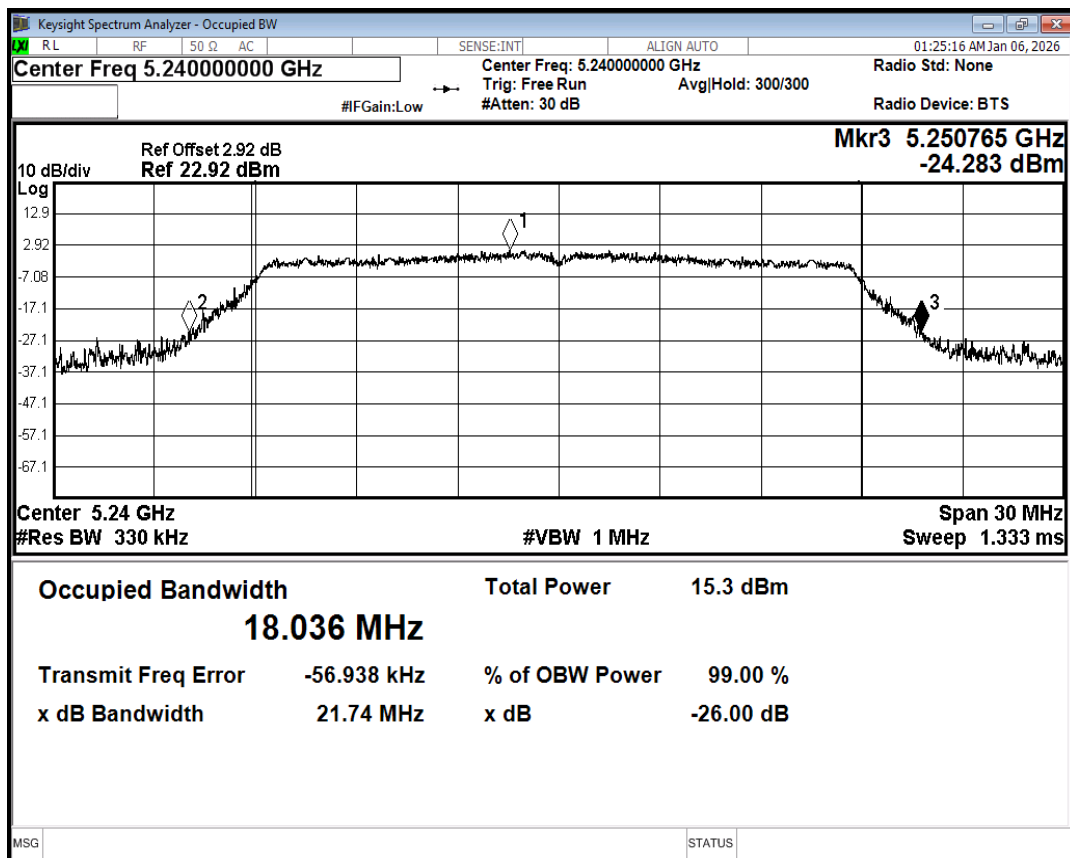


-26dB Bandwidth NVNT n20 5240MHz Ant1

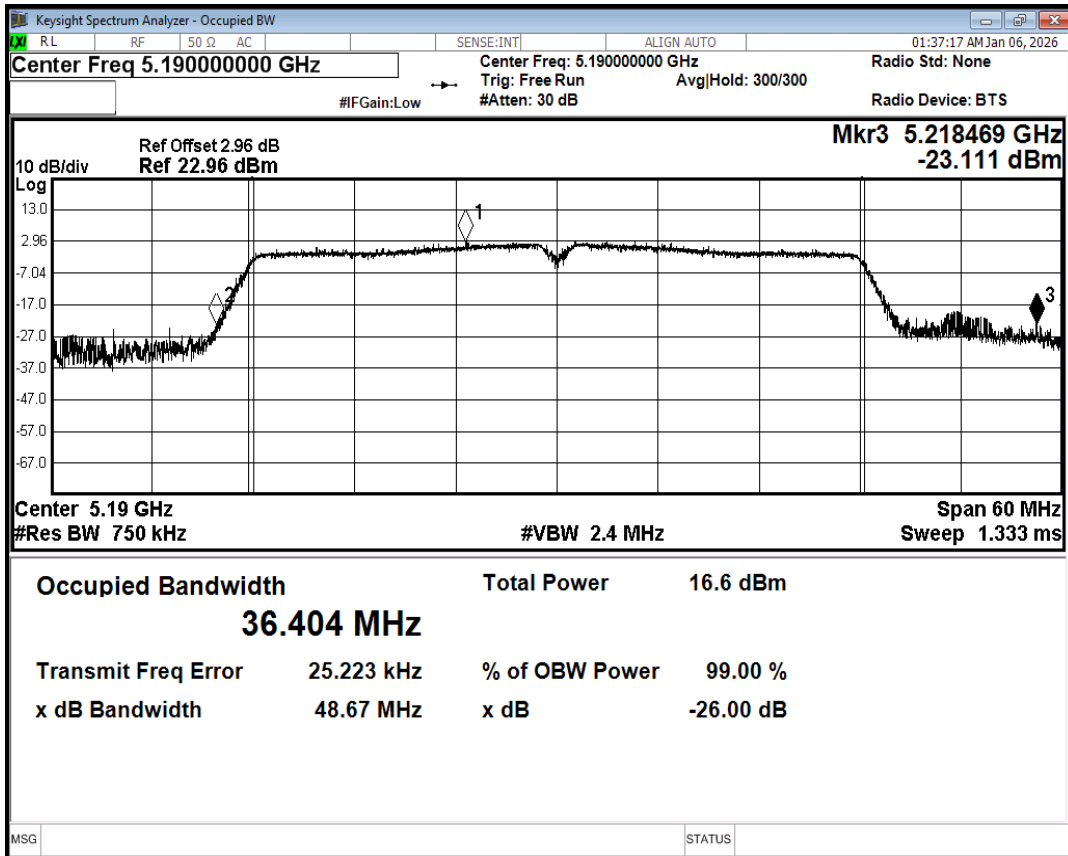


-26dB Bandwidth NVNT n40 5190MHz Ant1

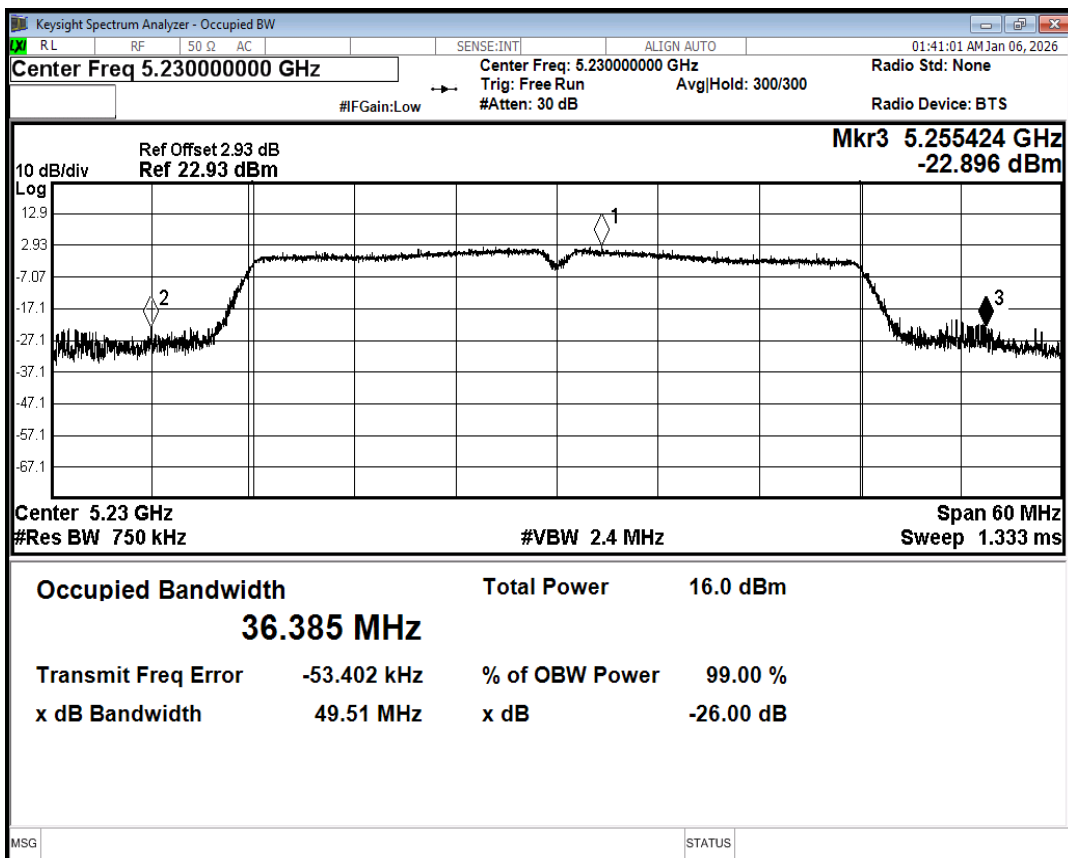


-26dB Bandwidth NVNT n40 5230MHz Ant1

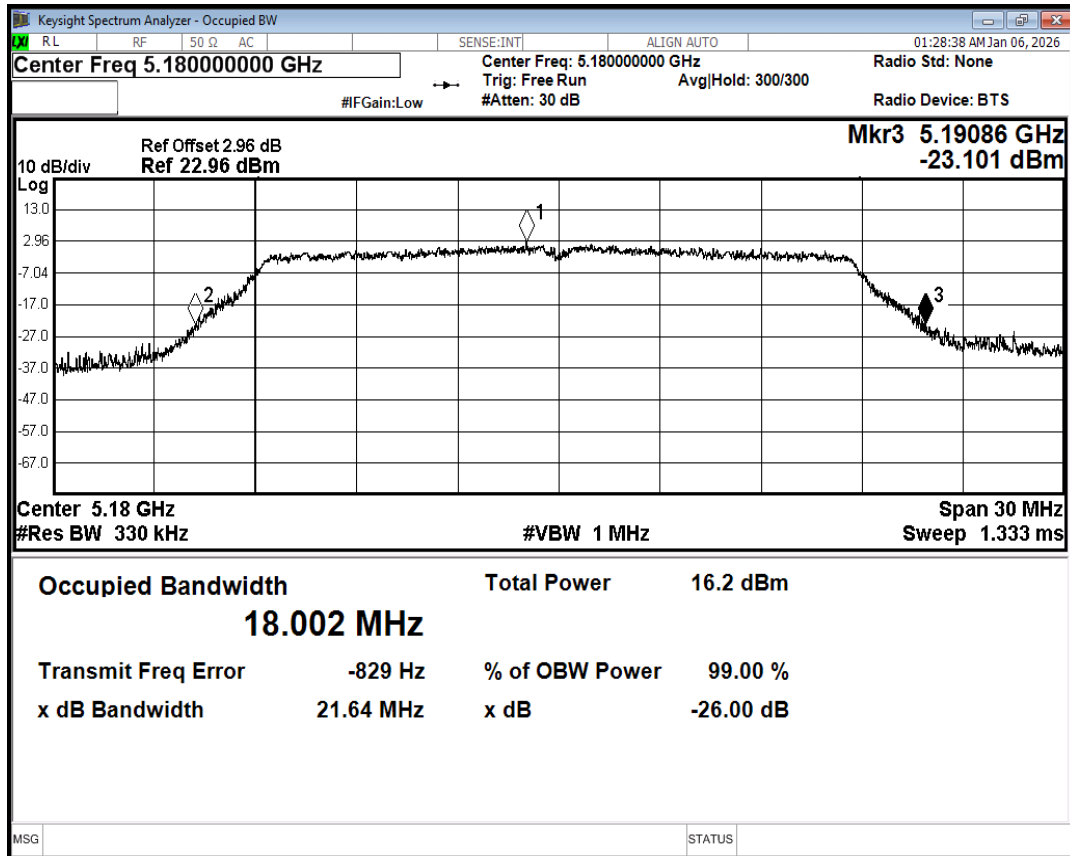


-26dB Bandwidth NVNT ac20 5180MHz Ant1

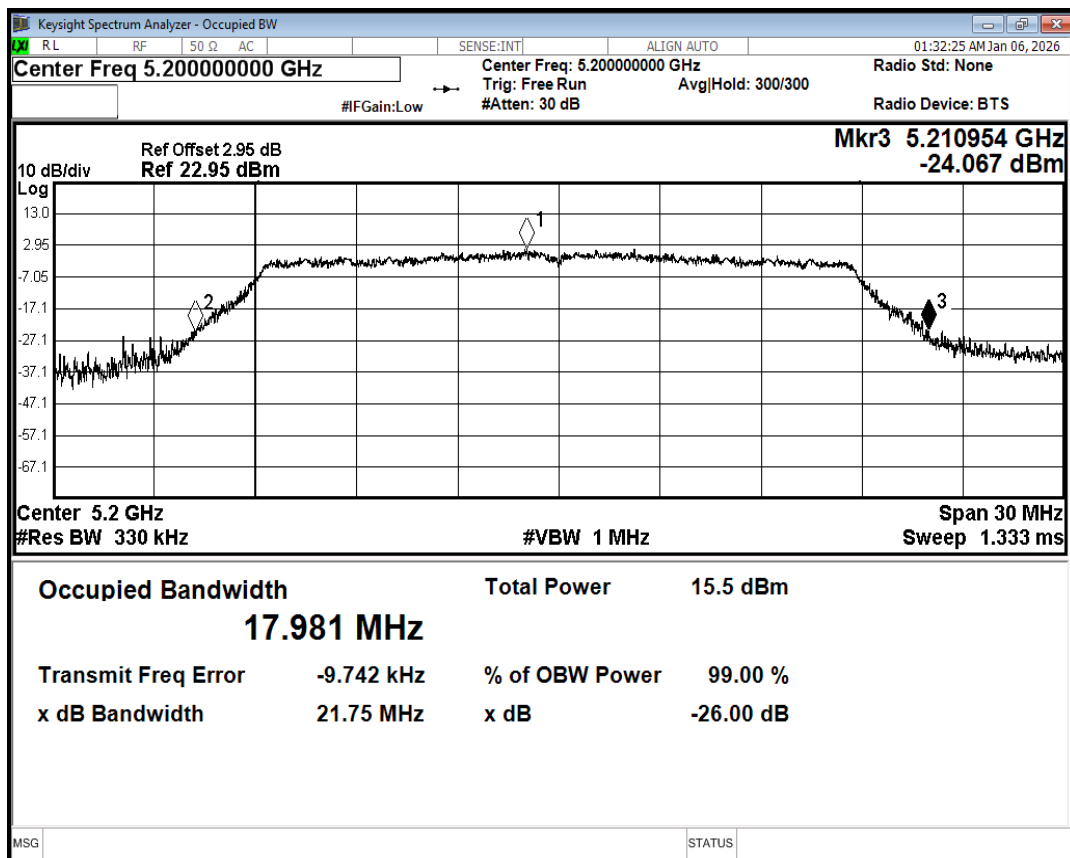


-26dB Bandwidth NVNT ac20 5200MHz Ant1

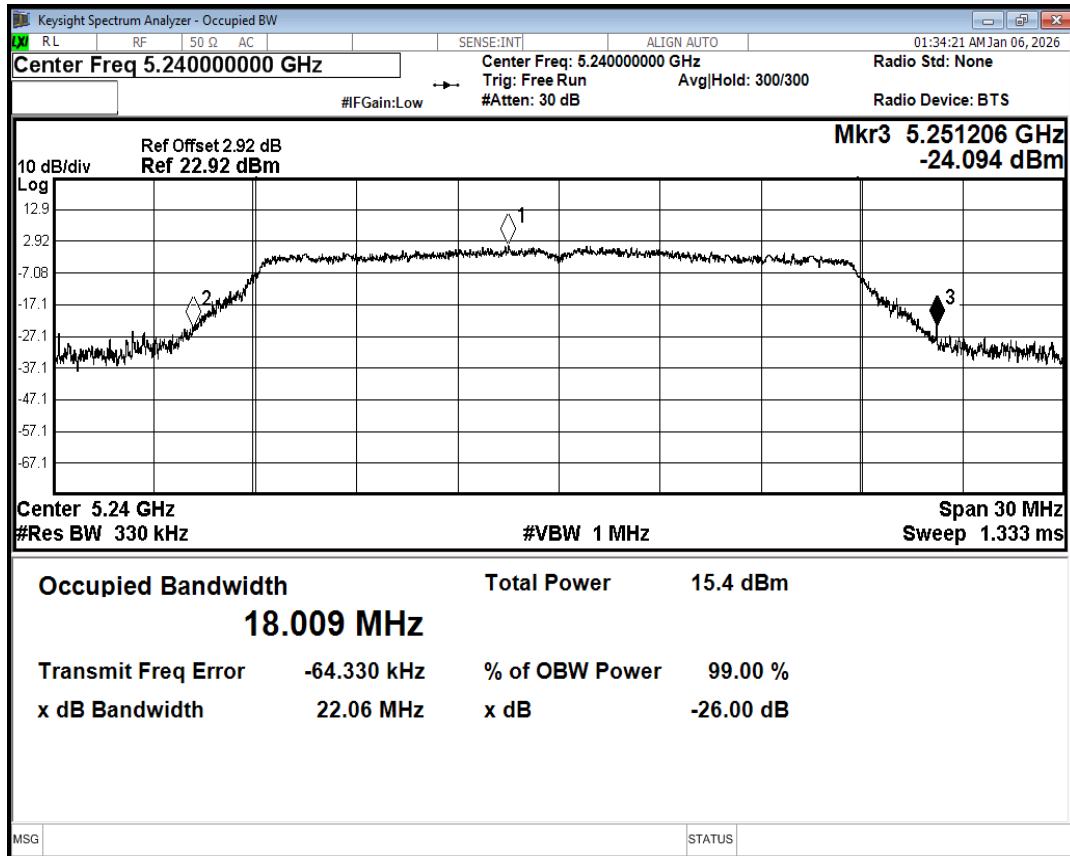


-26dB Bandwidth NVNT ac20 5240MHz Ant1

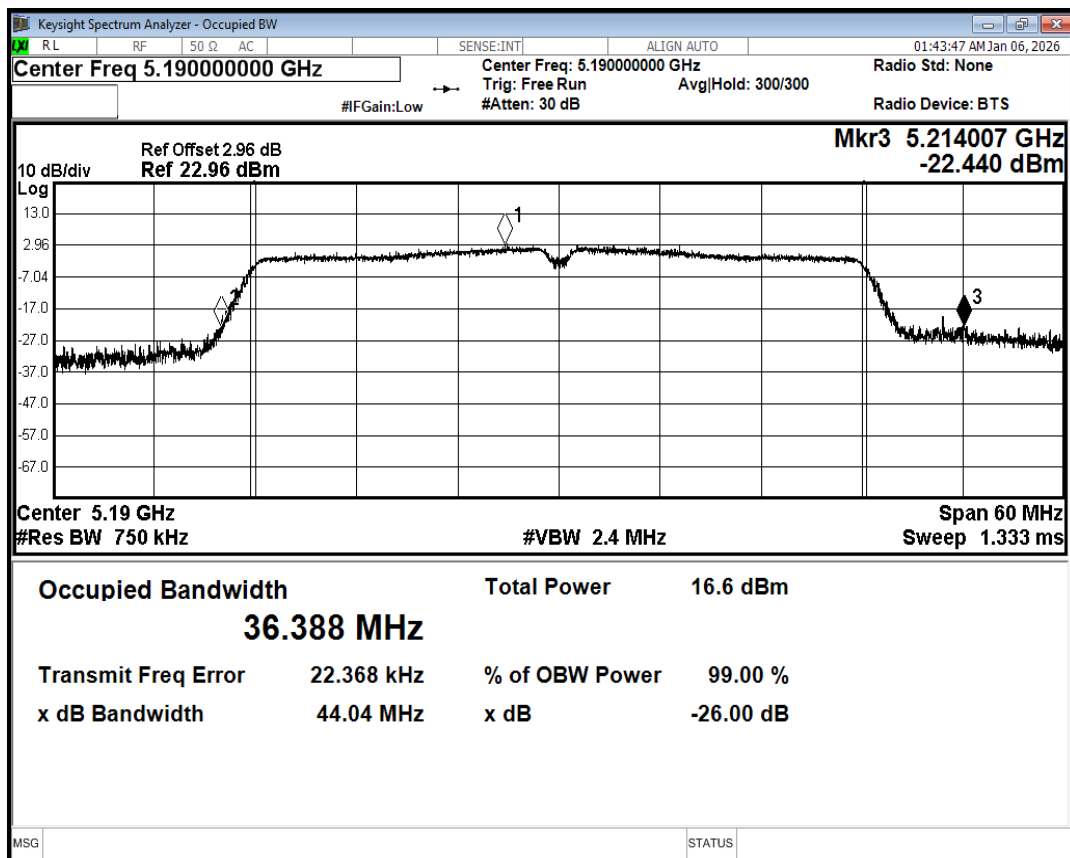

-26dB Bandwidth NVNT ac40 5190MHz Ant1

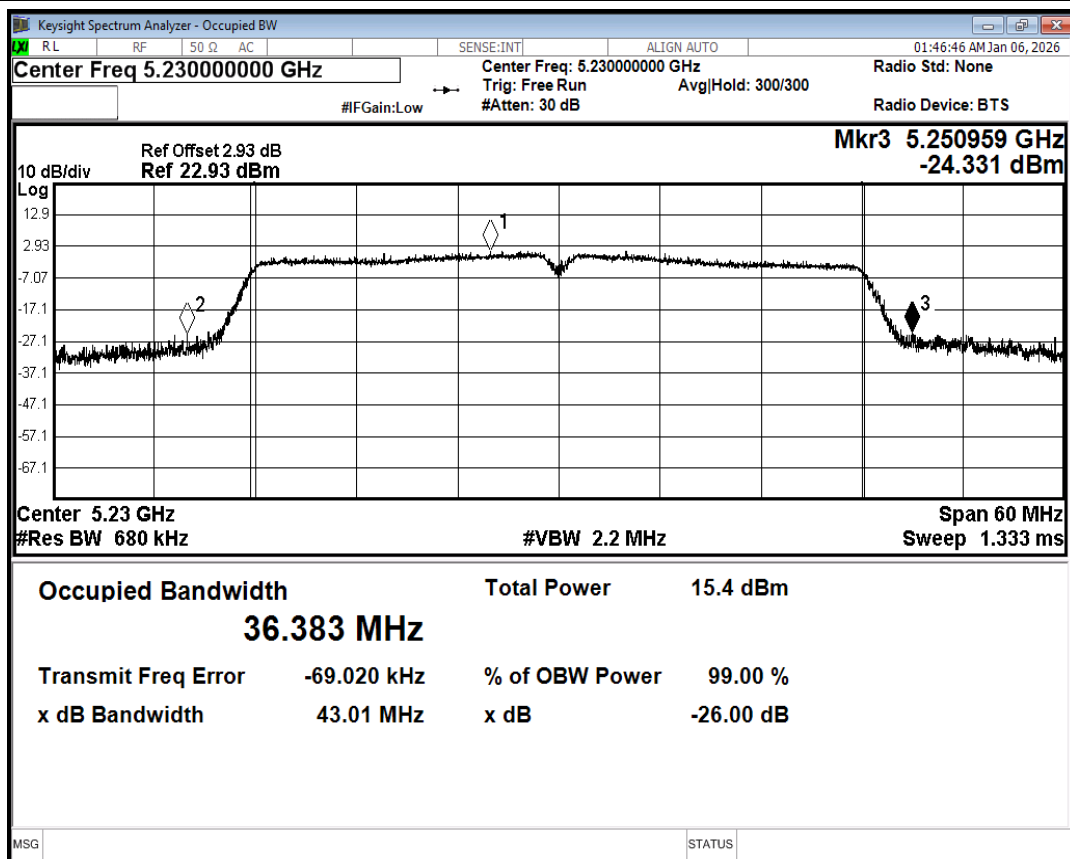

-26dB Bandwidth NVNT ac40 5230MHz Ant1

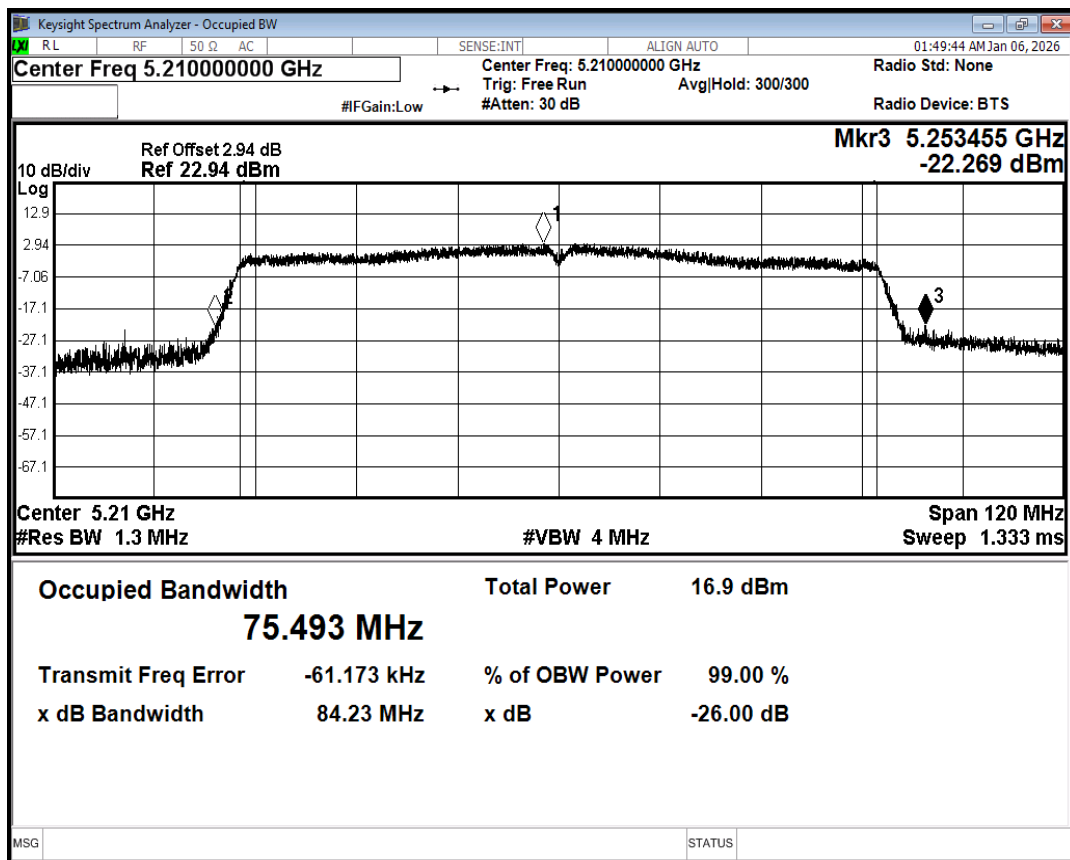


-26dB Bandwidth NVNT ac80 5210MHz Ant1

2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5180	Ant1	10.2	0.29	10.49	23.4	Pass
NVNT	a	5200	Ant1	9.55	0.29	9.84	23.4	Pass
NVNT	a	5240	Ant1	9.07	0.29	9.36	23.4	Pass
NVNT	n20	5180	Ant1	9.56	0.31	9.87	23.4	Pass
NVNT	n20	5200	Ant1	8.96	0.31	9.27	24	Pass
NVNT	n20	5240	Ant1	8.73	0.31	9.04	24	Pass
NVNT	n40	5190	Ant1	9.61	0.61	10.22	24	Pass
NVNT	n40	5230	Ant1	8.93	0.61	9.54	24	Pass
NVNT	ac20	5180	Ant1	9.64	0.31	9.95	24	Pass
NVNT	ac20	5200	Ant1	8.92	0.31	9.23	24	Pass
NVNT	ac20	5240	Ant1	8.78	0.31	9.09	24	Pass
NVNT	ac40	5190	Ant1	9.49	0.6	10.09	24	Pass
NVNT	ac40	5230	Ant1	8.6	0.6	9.2	24	Pass
NVNT	ac80	5210	Ant1	8.76	1.15	9.91	24	Pass

3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	0.06	0.29	0.35	10.4	Pass
NVNT	a	5200	Ant1	-0.5	0.29	-0.21	10.4	Pass
NVNT	a	5240	Ant1	-0.98	0.29	-0.69	10.4	Pass
NVNT	n20	5180	Ant1	-0.6	0.31	-0.29	10.4	Pass
NVNT	n20	5200	Ant1	-1.41	0.31	-1.1	11	Pass
NVNT	n20	5240	Ant1	-1.55	0.31	-1.24	11	Pass
NVNT	n40	5190	Ant1	-3.99	0.61	-3.38	11	Pass
NVNT	n40	5230	Ant1	-4.66	0.61	-4.05	11	Pass
NVNT	ac20	5180	Ant1	-0.63	0.31	-0.32	11	Pass
NVNT	ac20	5200	Ant1	-1.52	0.31	-1.21	11	Pass
NVNT	ac20	5240	Ant1	-1.74	0.31	-1.43	11	Pass
NVNT	ac40	5190	Ant1	-4.07	0.6	-3.47	11	Pass
NVNT	ac40	5230	Ant1	-4.98	0.6	-4.38	11	Pass
NVNT	ac80	5210	Ant1	-7.34	1.15	-6.19	11	Pass

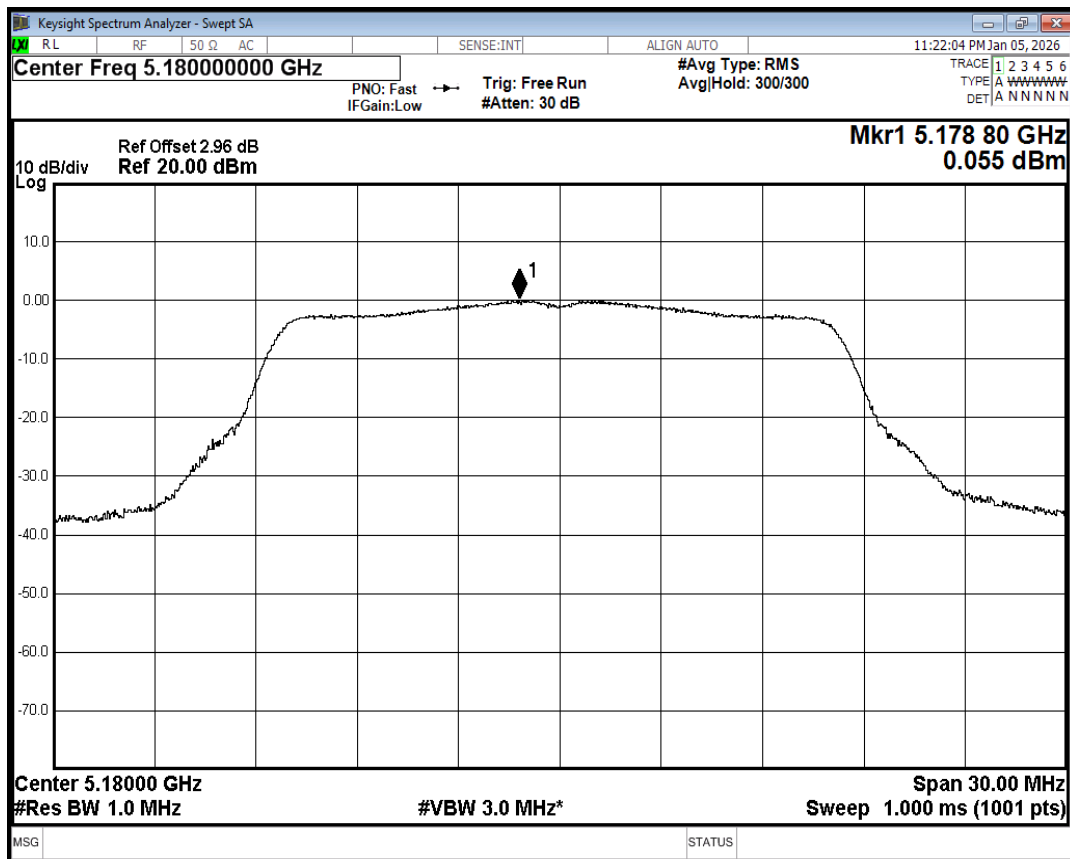


PSD NVNT a 5180MHz Ant1

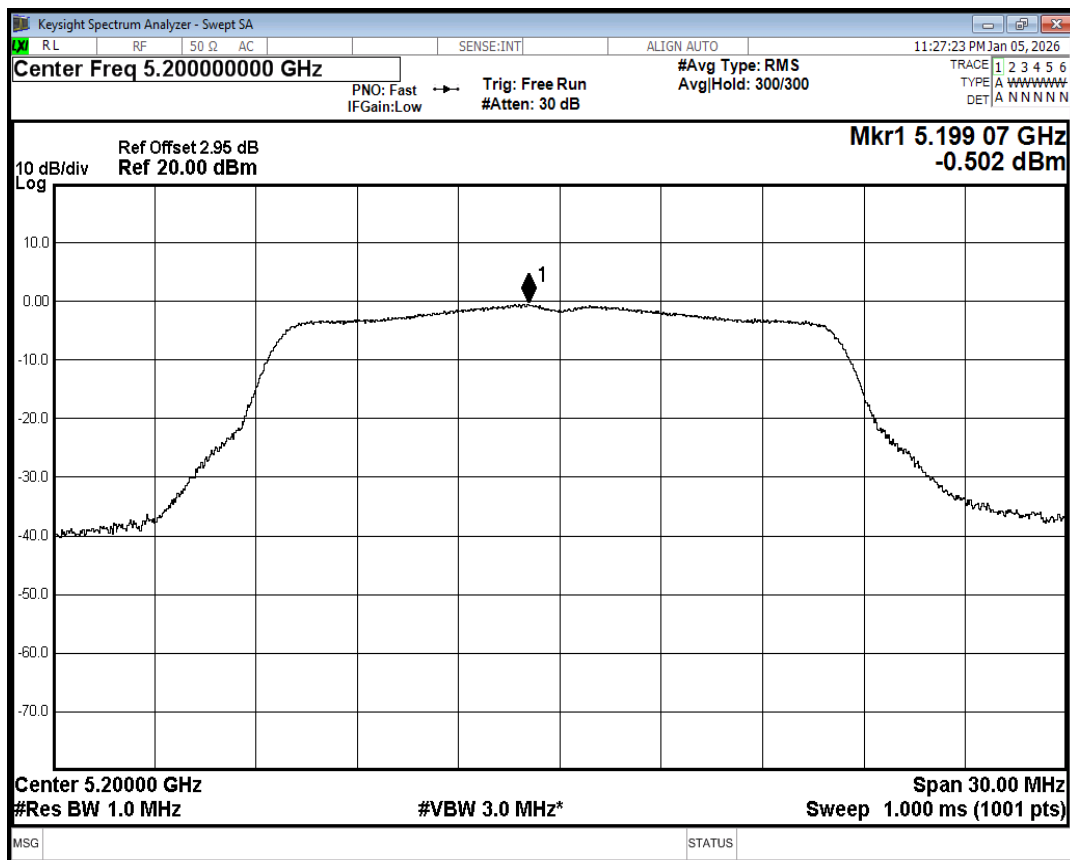


PSD NVNT a 5200MHz Ant1

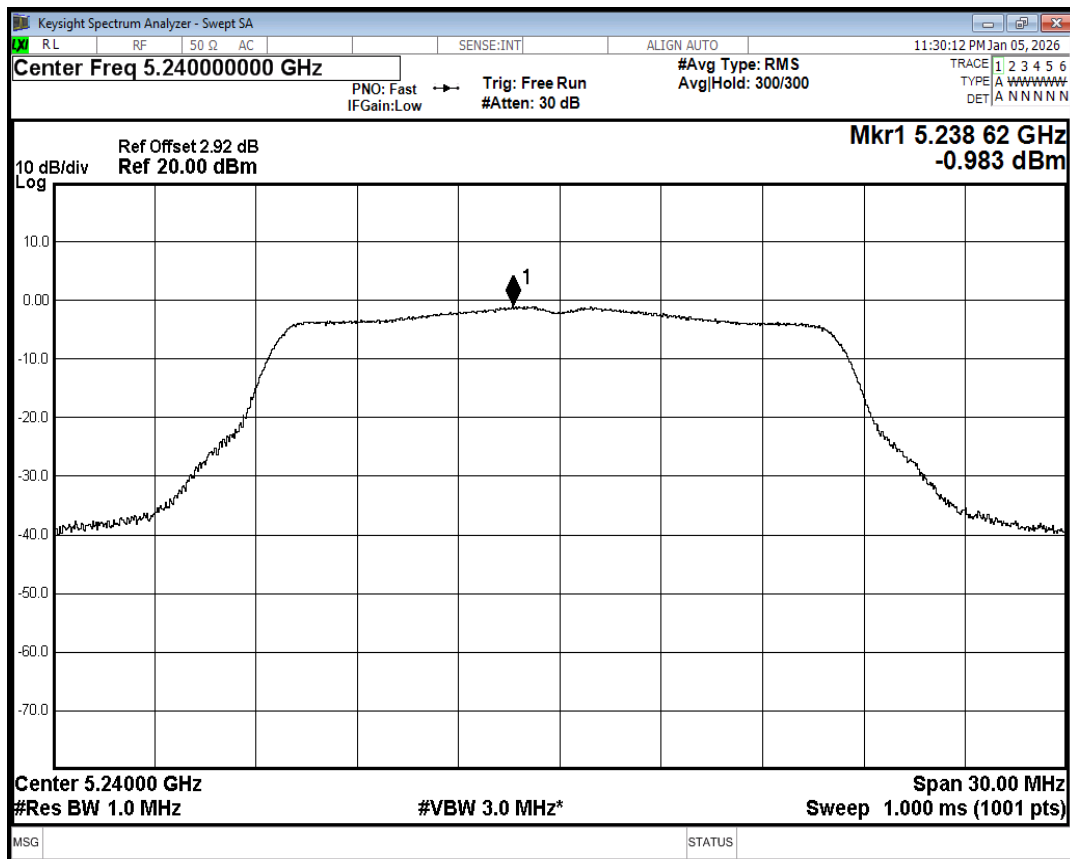


PSD NVNT a 5240MHz Ant1

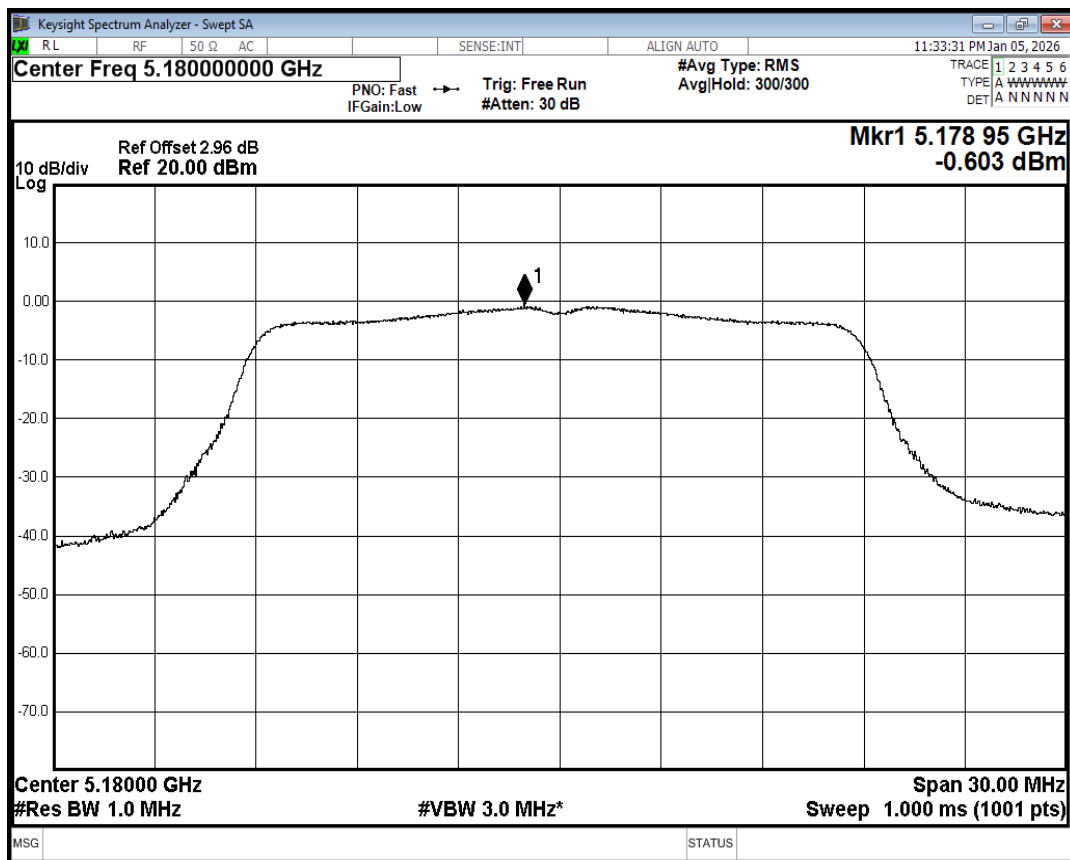


PSD NVNT n20 5180MHz Ant1

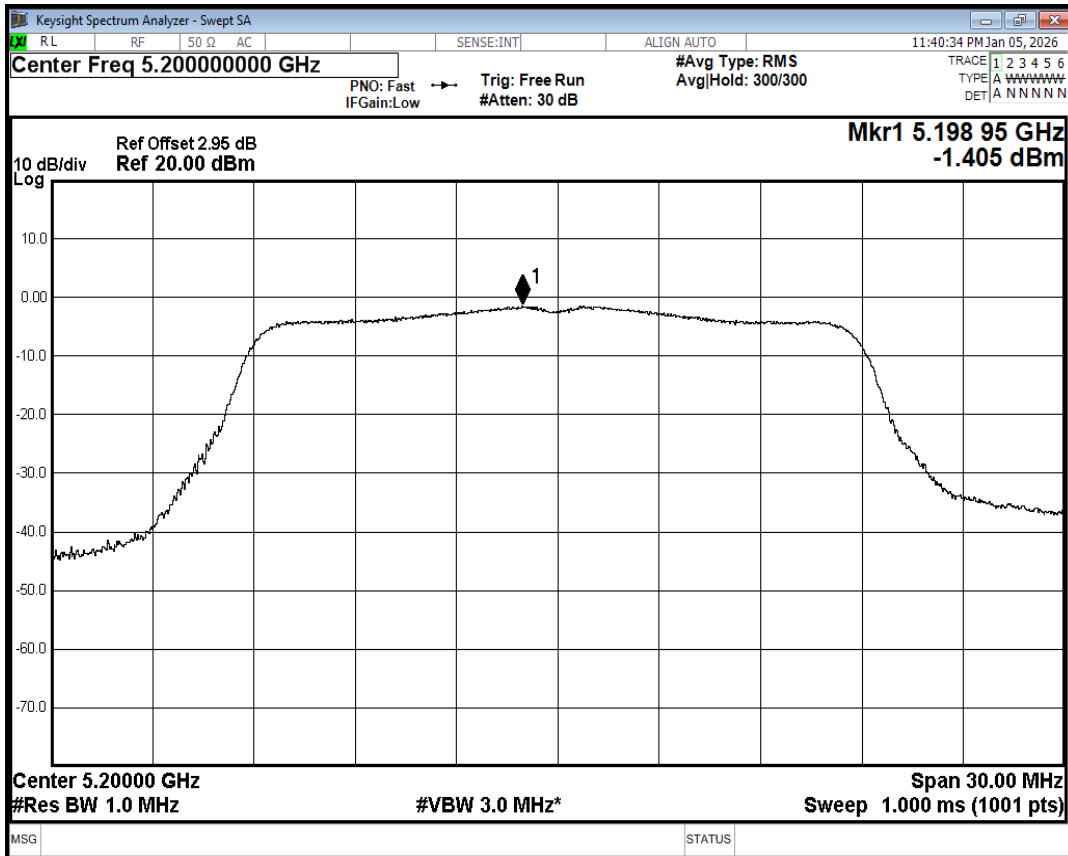


PSD NVNT n20 5200MHz Ant1

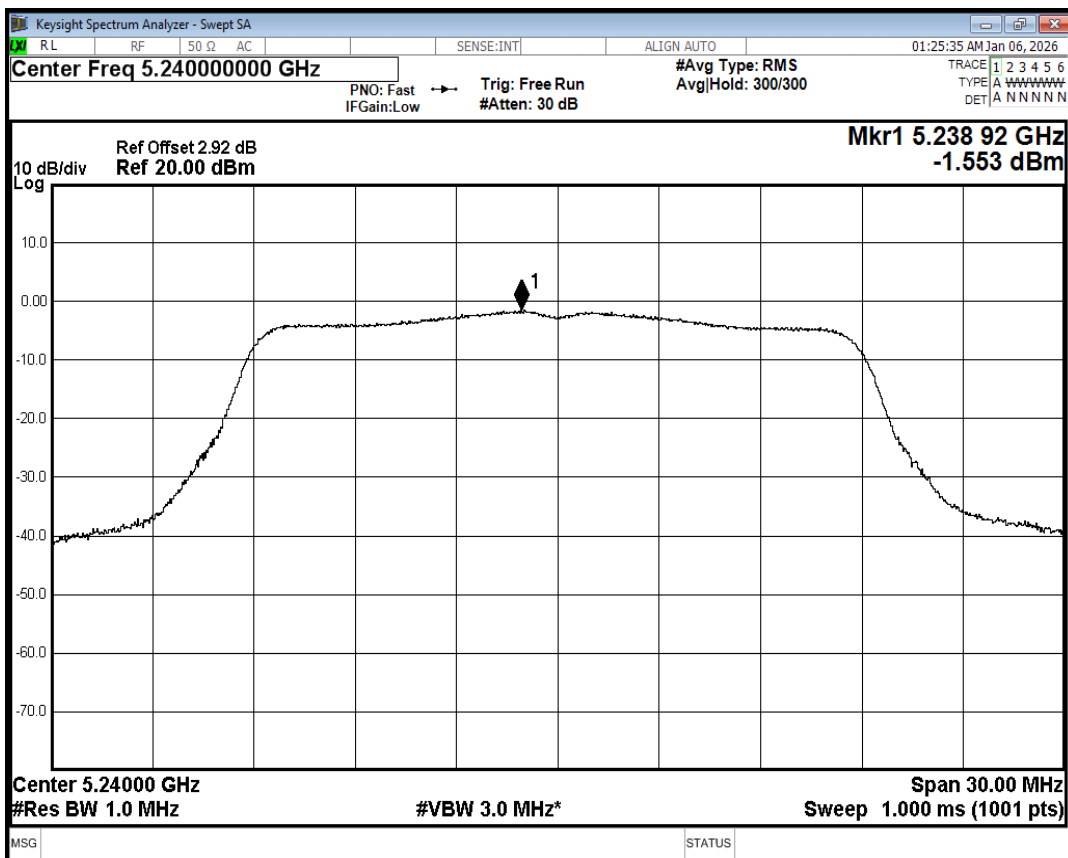


PSD NVNT n20 5240MHz Ant1

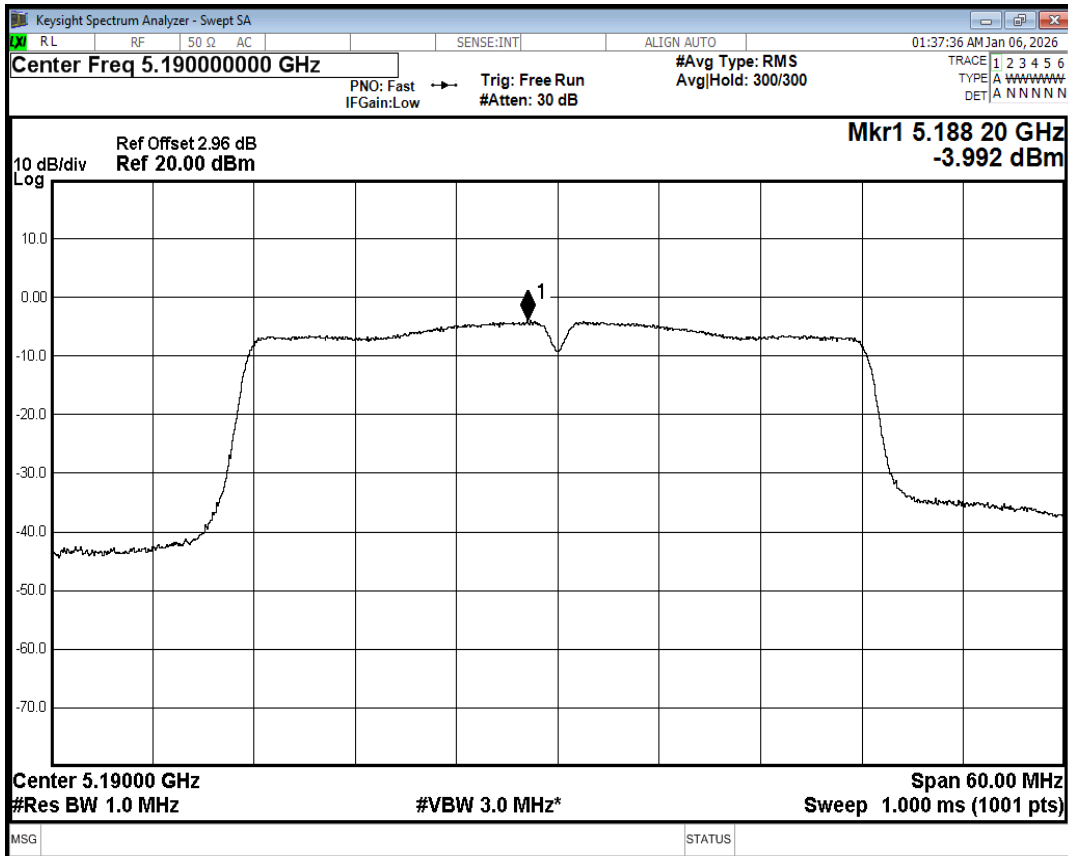


PSD NVNT n40 5190MHz Ant1

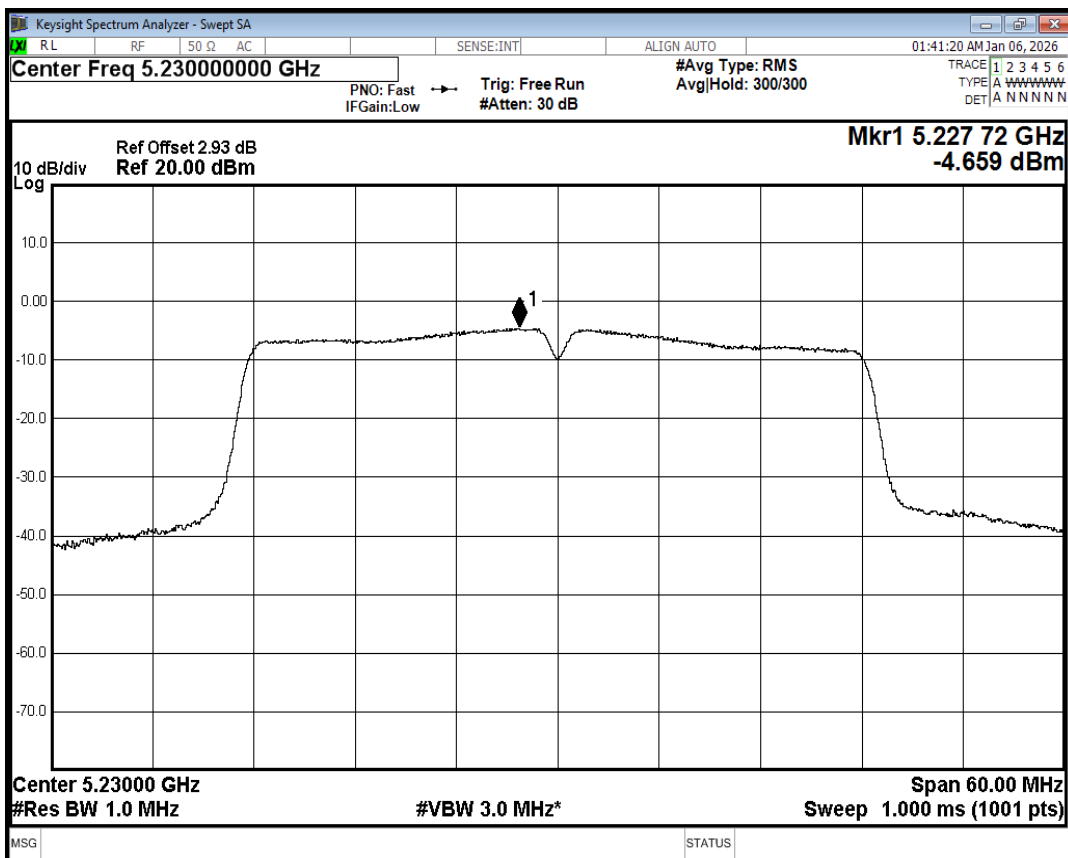


PSD NVNT n40 5230MHz Ant1

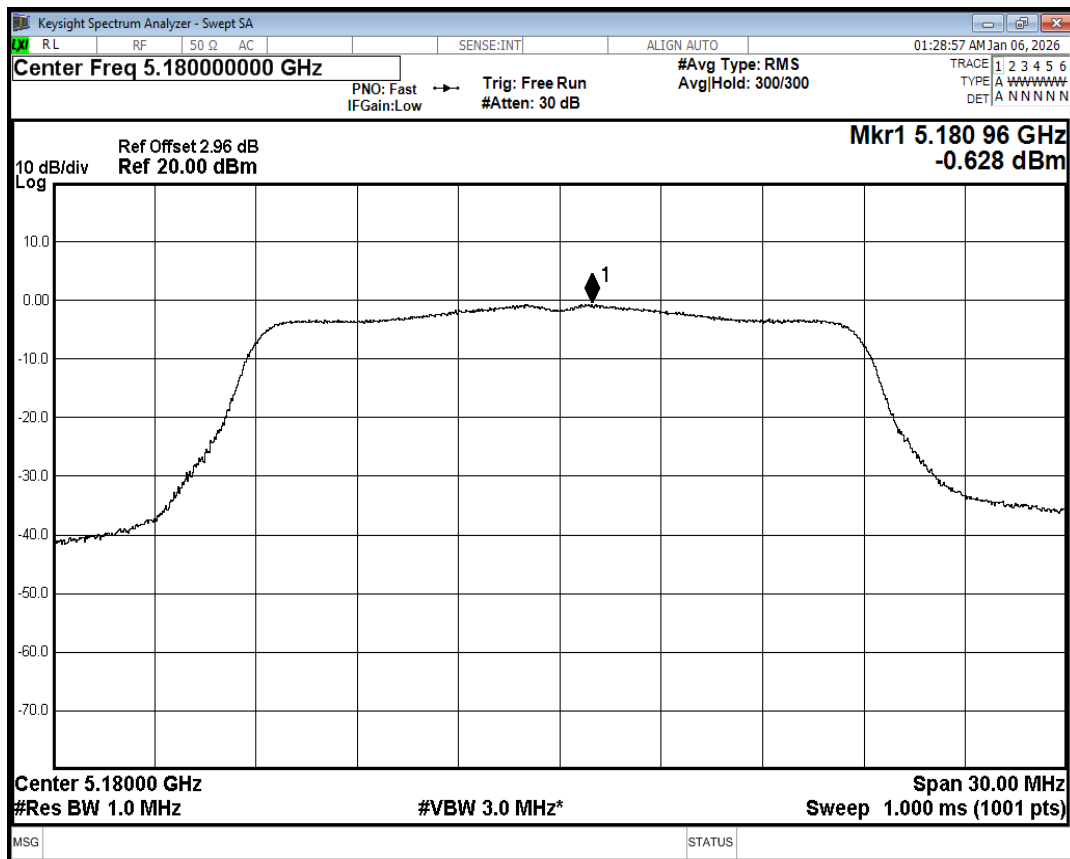


PSD NVNT ac20 5180MHz Ant1

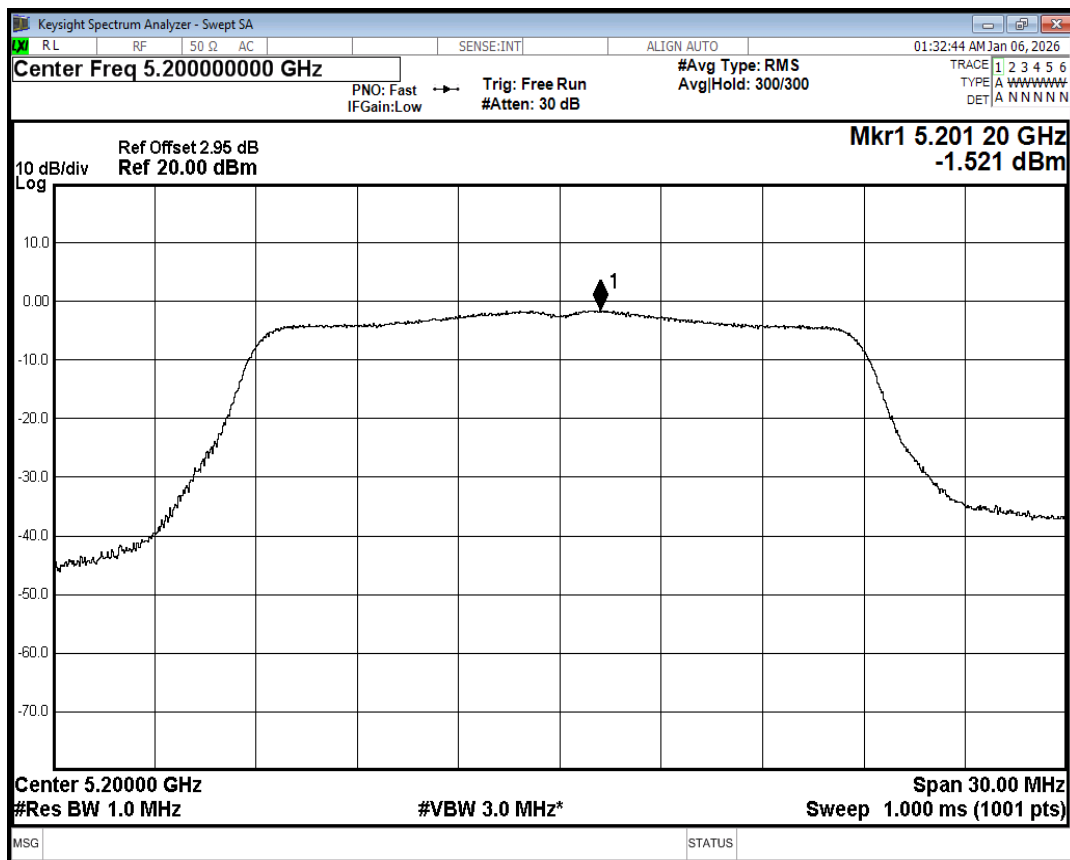


PSD NVNT ac20 5200MHz Ant1

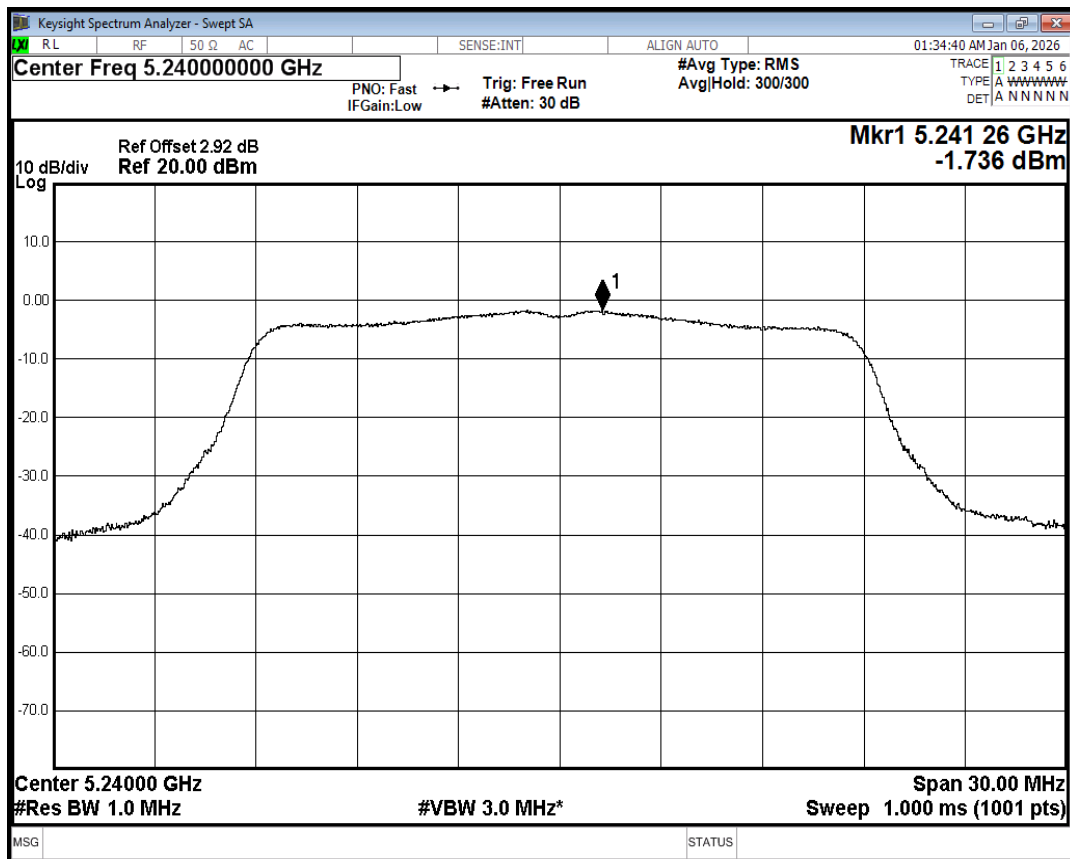


PSD NVNT ac20 5240MHz Ant1

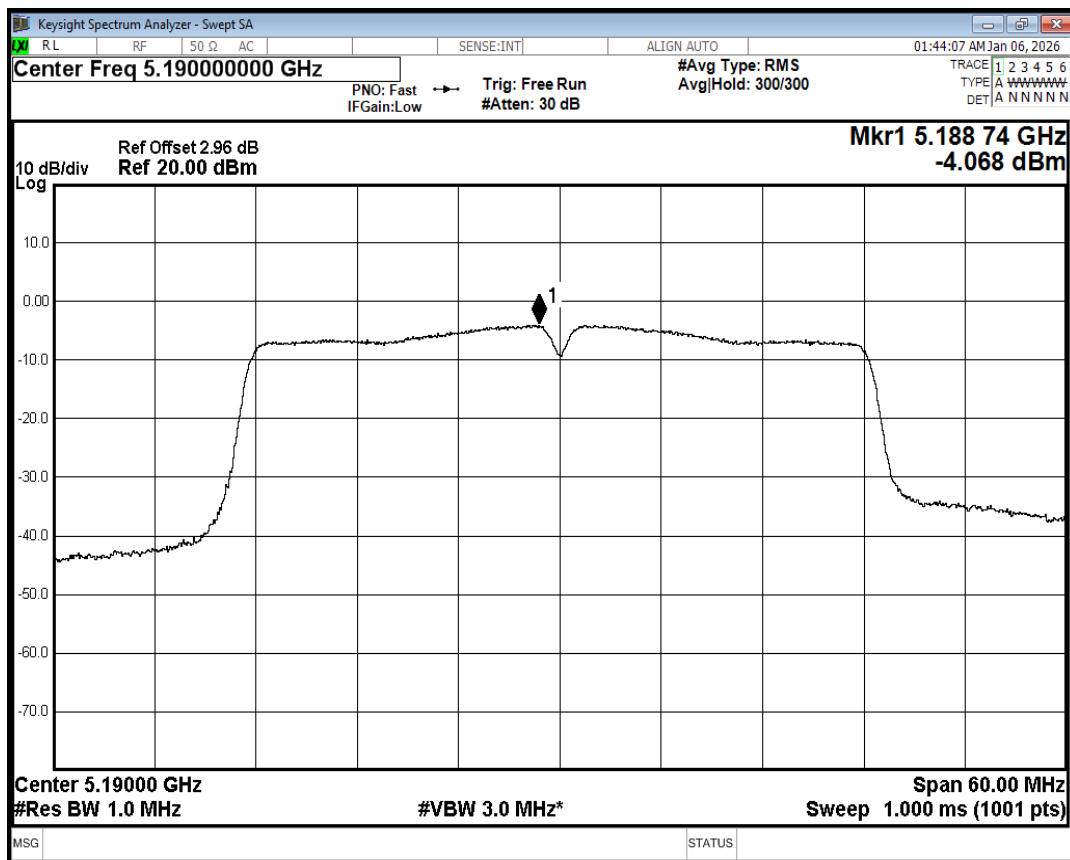

PSD NVNT ac40 5190MHz Ant1

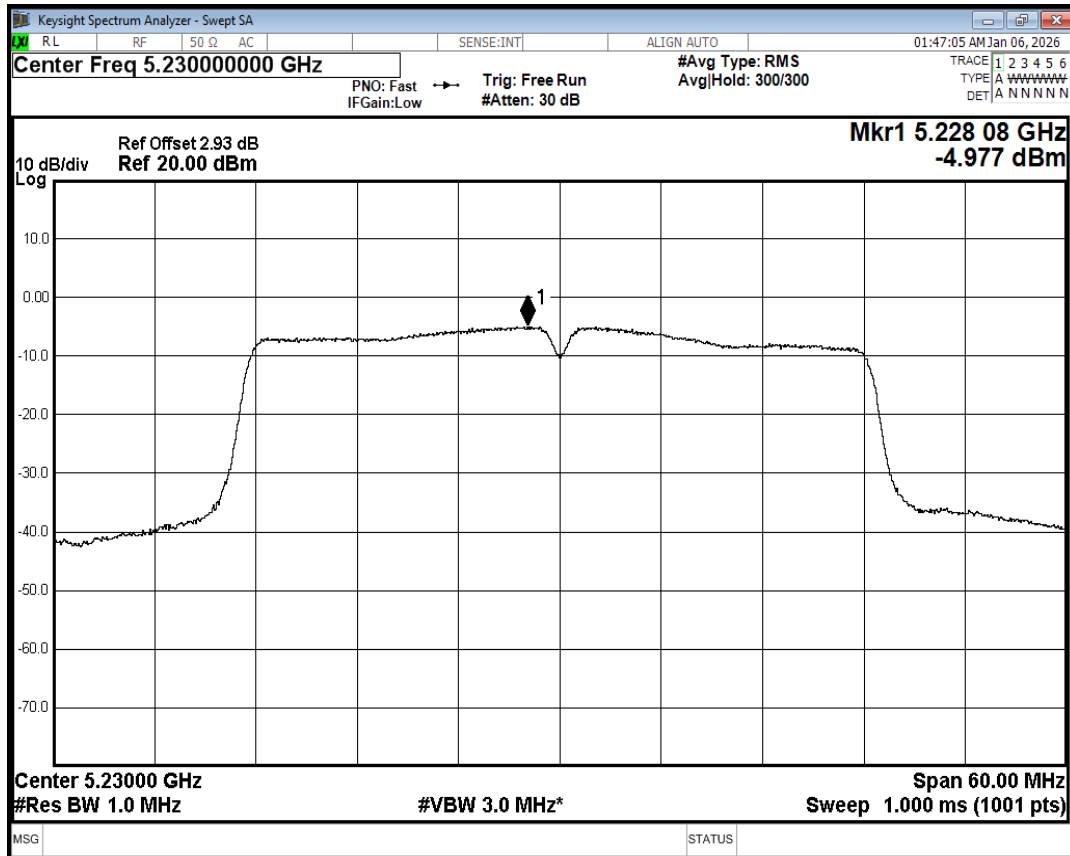

PSD NVNT ac40 5230MHz Ant1

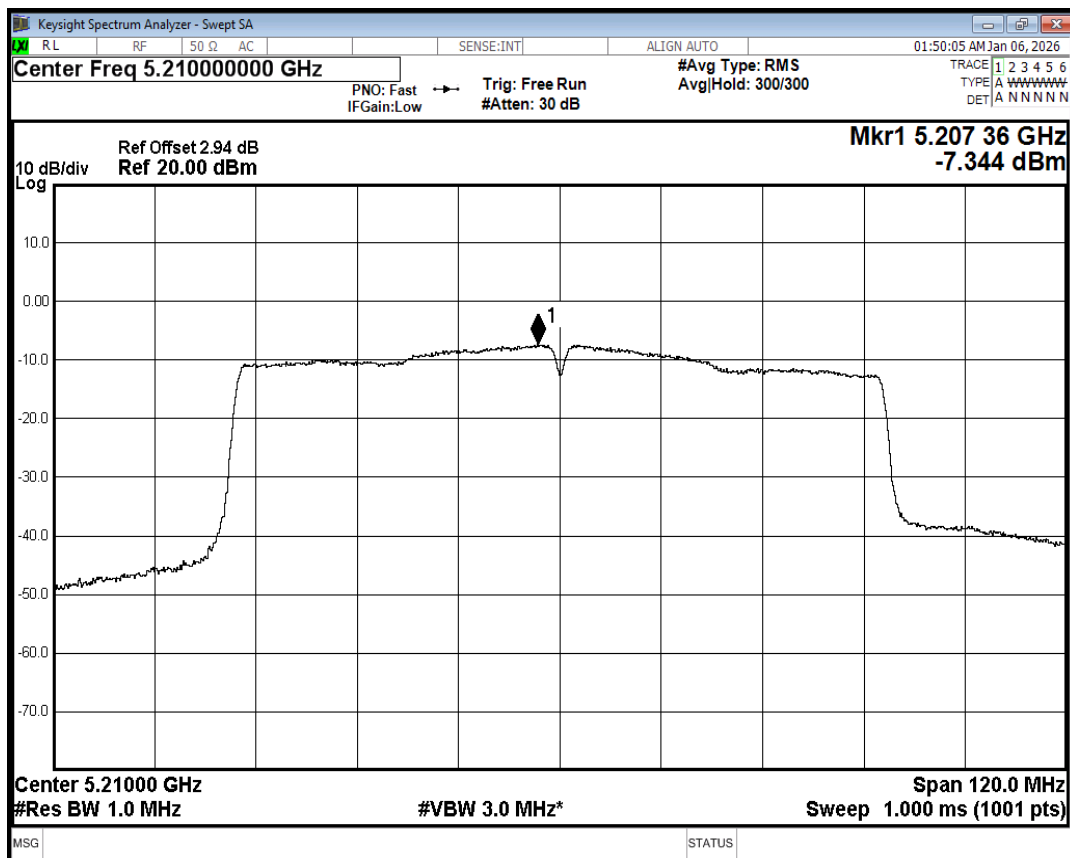


PSD NVNT ac80 5210MHz Ant1


4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-60.98	2	36.25	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-69.03	2	28.2	Average	54	Pass
NVNT	a	5180	Ant1	5144.7	-56.26	2	40.97	Peak	68.2	Pass
NVNT	a	5180	Ant1	5149.6	-61.49	2	35.74	Average	54	Pass
NVNT	a	5180	Ant1	5150	-56.86	2	40.37	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-61.47	2	35.76	Average	54	Pass
NVNT	a	5240	Ant1	5350	-51.76	2	45.47	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-58.09	2	39.14	Average	54	Pass
NVNT	a	5240	Ant1	5418	-46.58	2	50.65	Peak	68.2	Pass
NVNT	a	5240	Ant1	5437.68	-57.02	2	40.21	Average	54	Pass
NVNT	a	5240	Ant1	5460	-50.69	2	46.54	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-57.42	2	39.81	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-50.32	2	46.91	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-59.01	2	38.22	Average	54	Pass
NVNT	n20	5180	Ant1	5146.8	-47.22	2	50.01	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5148.9	-56.32	2	40.91	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-48.52	2	48.71	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-56.42	2	40.81	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-49.27	2	47.96	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-57.75	2	39.48	Average	54	Pass
NVNT	n20	5240	Ant1	5411.76	-47.15	2	50.08	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5440.08	-56.99	2	40.24	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-49.92	2	47.31	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-57.13	2	40.1	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-61.7	2	35.53	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-68.62	2	28.61	Average	54	Pass
NVNT	n40	5190	Ant1	5148.97	-51.66	2	45.57	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5149.7	-57.71	2	39.52	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-52.85	2	44.38	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-57.42	2	39.81	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-52.37	2	44.86	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-57.35	2	39.88	Average	54	Pass
NVNT	n40	5230	Ant1	5412.48	-47.75	2	49.48	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5455.68	-56.49	2	40.74	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-49.55	2	47.68	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-56.95	2	40.28	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-51.84	2	45.39	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-58.97	2	38.26	Average	54	Pass
NVNT	ac20	5180	Ant1	5064.9	-46.01	2	51.22	Peak	68.2	Pass


NVNT	ac20	5180	Ant1	5149.6	-56.31	2	40.92	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-50.02	2	47.21	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-56.39	2	40.84	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-51.51	2	45.72	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-57.78	2	39.45	Average	54	Pass
NVNT	ac20	5240	Ant1	5404.56	-46.98	2	50.25	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5437.2	-57.02	2	40.21	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-50.46	2	46.77	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-57.24	2	39.99	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-51.49	2	45.74	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-58.79	2	38.44	Average	54	Pass
NVNT	ac40	5190	Ant1	5059.18	-47.51	2	49.72	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5149.7	-54.69	2	42.54	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-48.95	2	48.28	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-54.55	2	42.68	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-50.36	2	46.87	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-57.28	2	39.95	Average	54	Pass
NVNT	ac40	5230	Ant1	5448.93	-47.74	2	49.49	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5440.56	-56.48	2	40.75	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-50.23	2	47	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5460	-56.99	2	40.24	Average	54	Pass
NVNT	ac80	5210	Ant1	5350	-52.15	2	45.08	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350	-56.94	2	40.29	Average	54	Pass
NVNT	ac80	5210	Ant1	5441.85	-47.51	2	49.72	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5422.38	-55.93	2	41.3	Average	54	Pass
NVNT	ac80	5210	Ant1	5460	-51.31	2	45.92	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5460	-56.86	2	40.37	Average	54	Pass
NVNT	ac80	5210	Ant1	4500	-51.35	2	45.88	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	4500	-58.54	2	38.69	Average	54	Pass
NVNT	ac80	5210	Ant1	5008.76	-46.82	2	50.41	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5145.43	-54.66	2	42.57	Average	54	Pass
NVNT	ac80	5210	Ant1	5150	-49.92	2	47.31	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5150	-54.48	2	42.75	Average	54	Pass

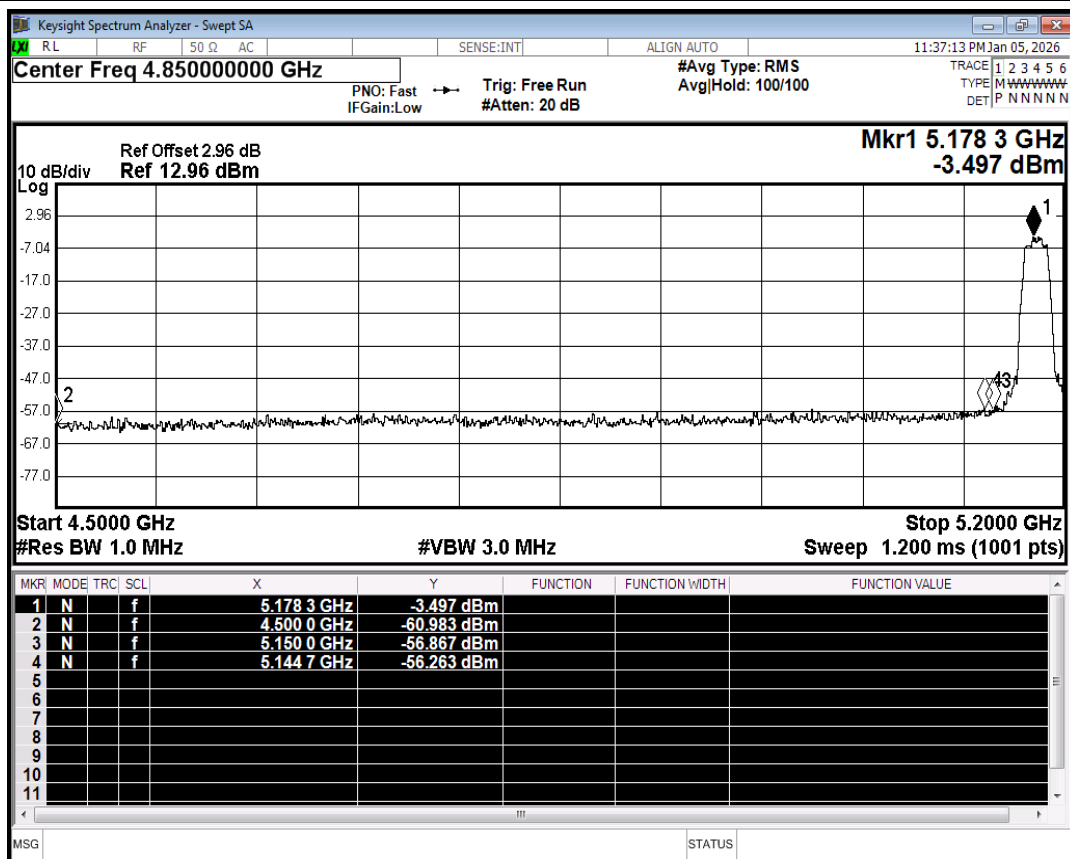


Restrict Band NVNT a 5180MHz Ant1 Peak

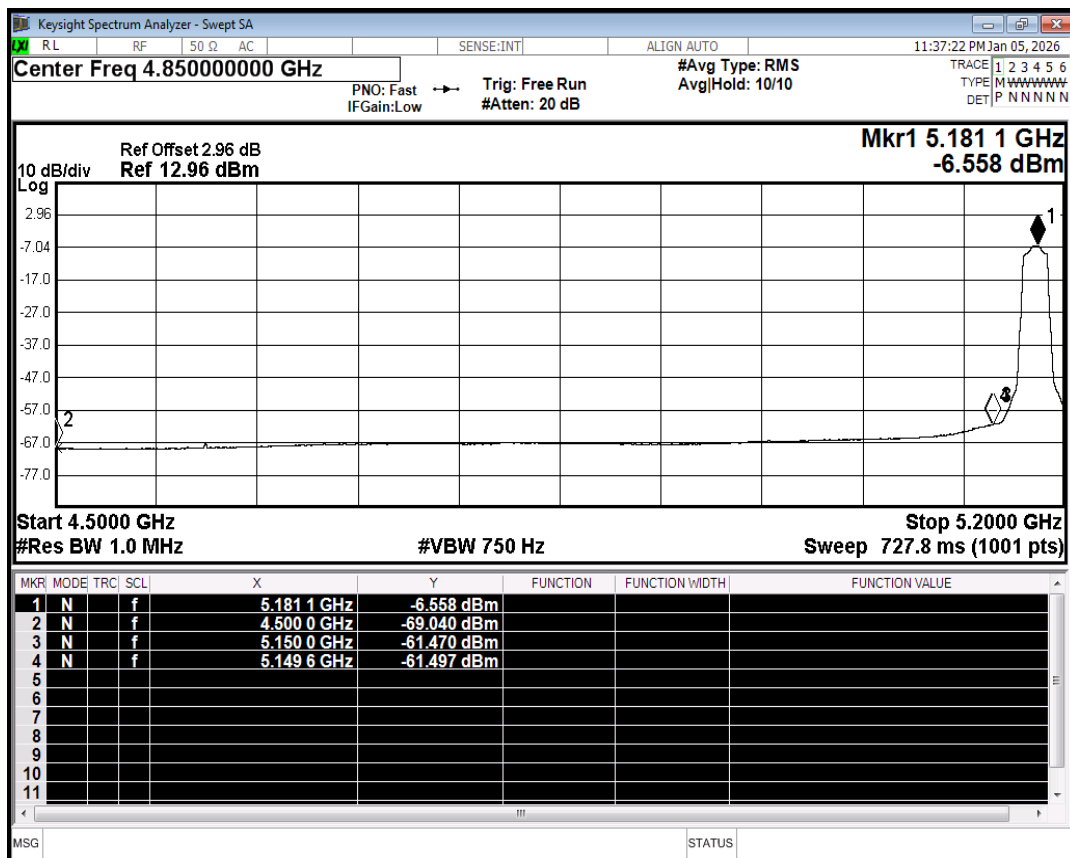


Restrict Band NVNT a 5180MHz Ant1 Average

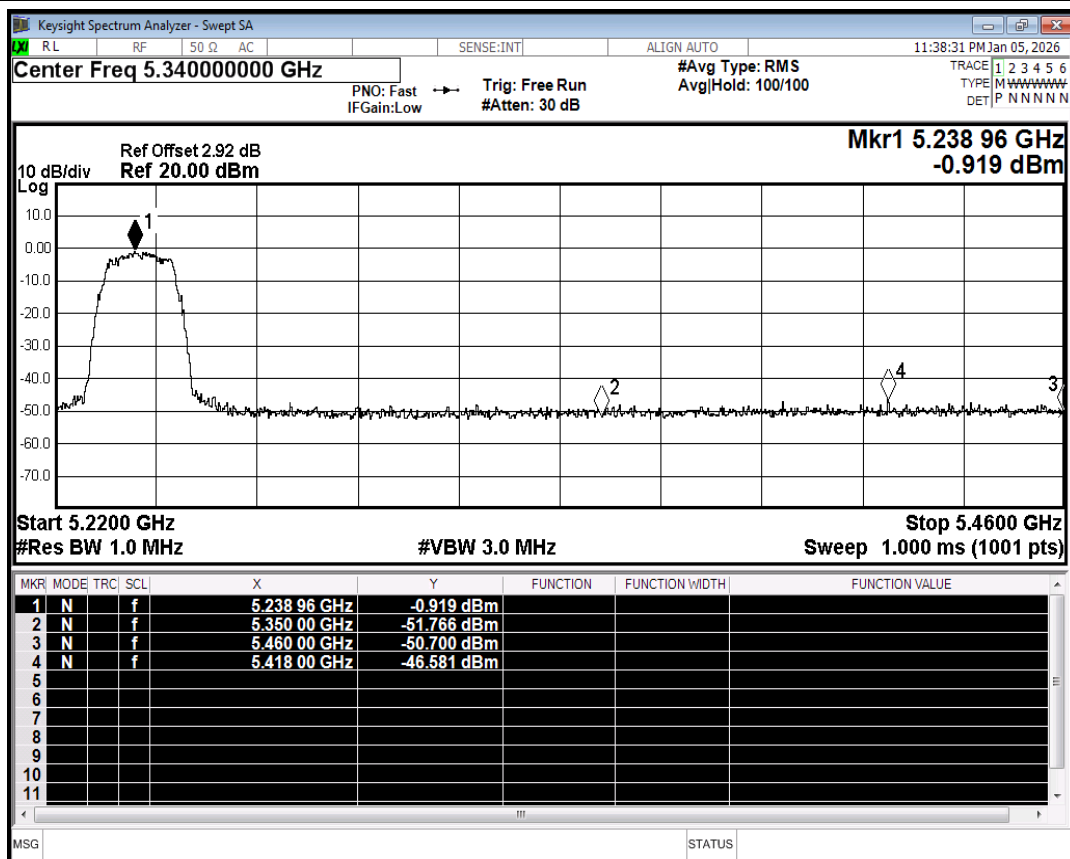


Restrict Band NVNT a 5240MHz Ant1 Peak

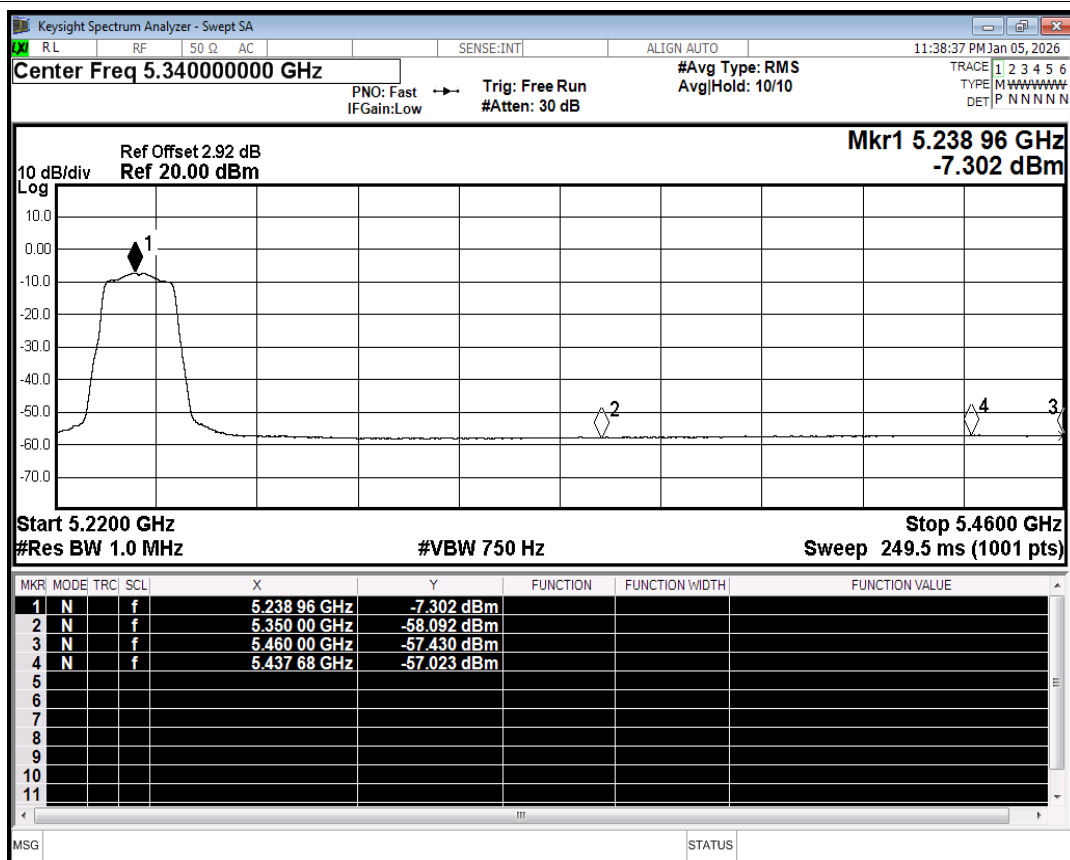


Restrict Band NVNT a 5240MHz Ant1 Average

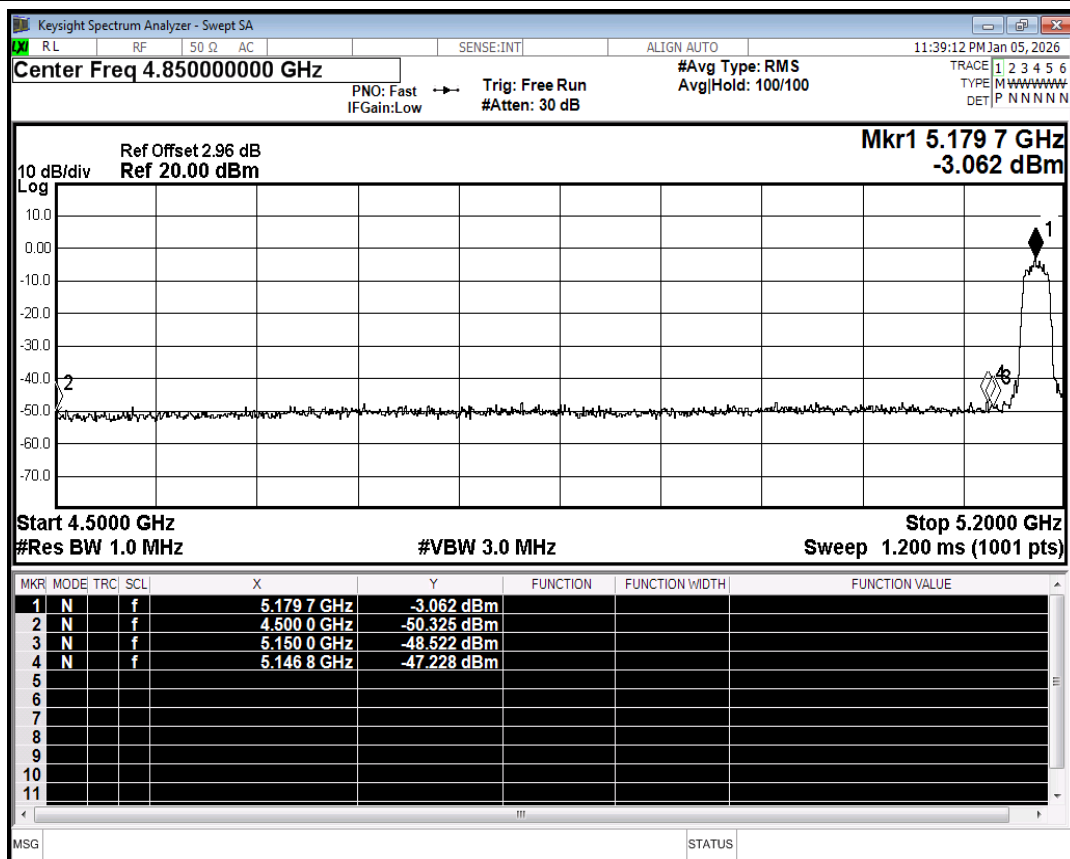


Restrict Band NVNT n20 5180MHz Ant1 Peak

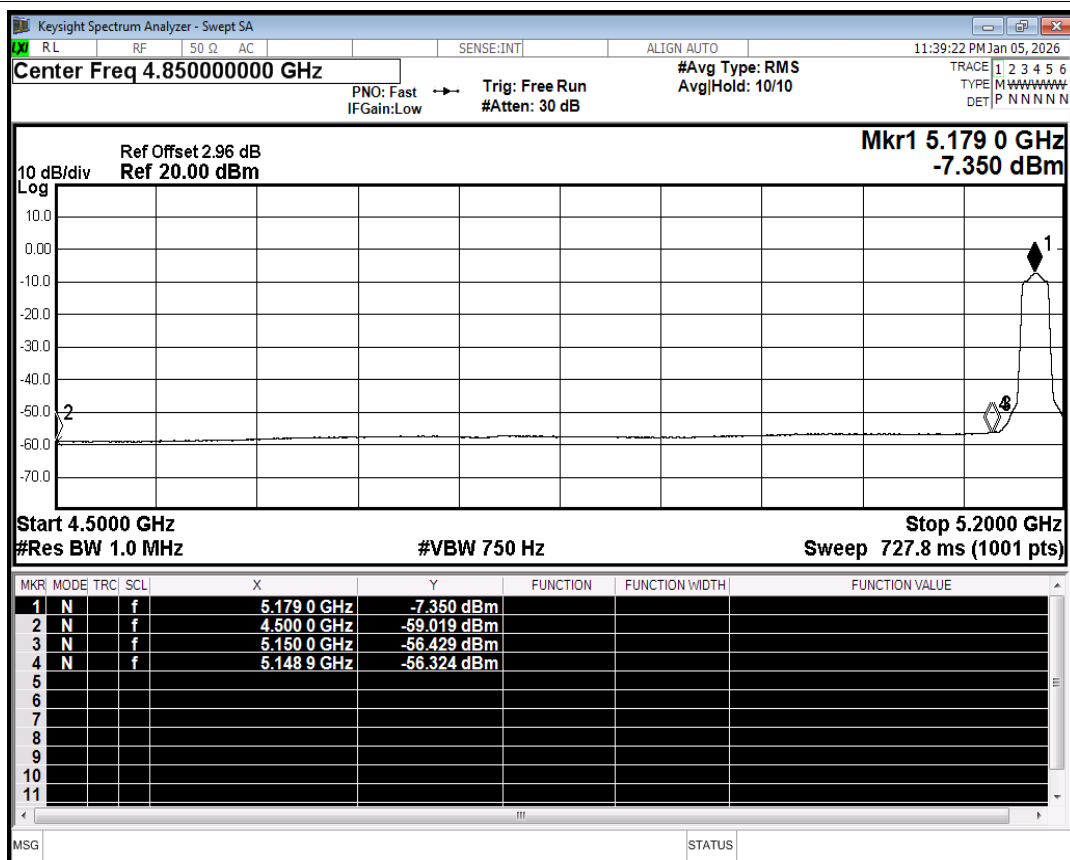


Restrict Band NVNT n20 5180MHz Ant1 Average

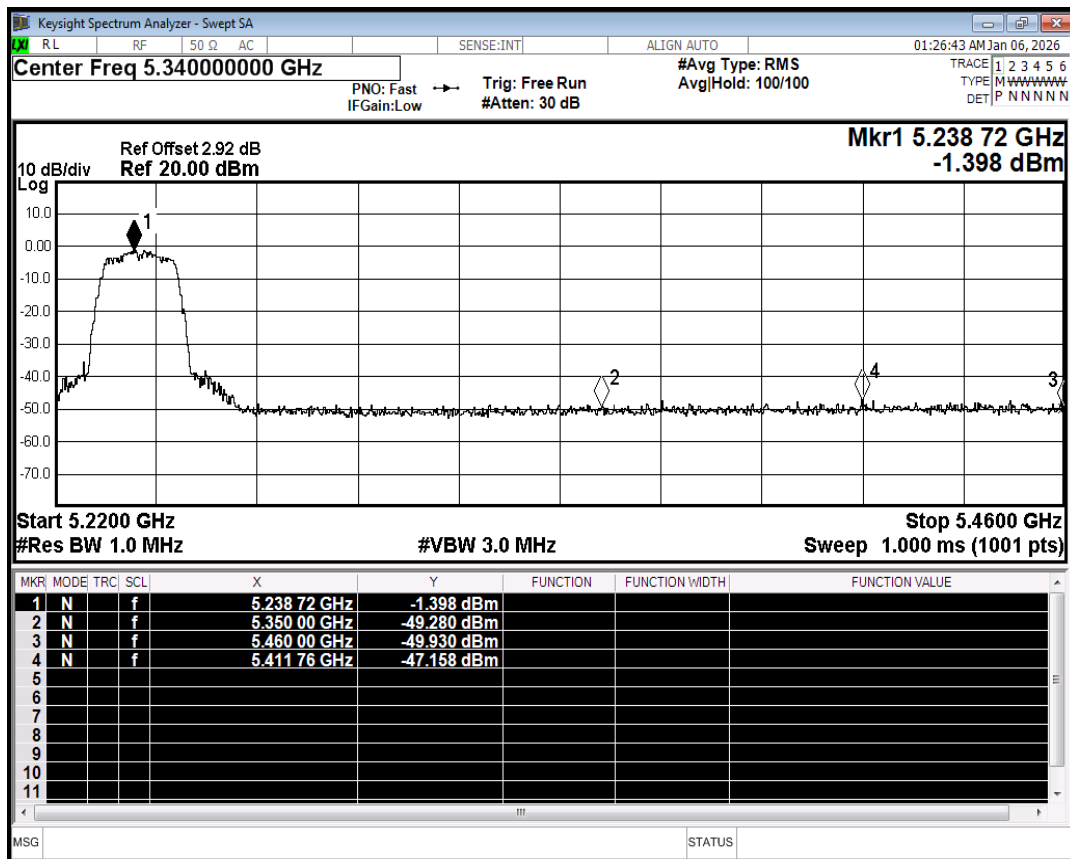


Restrict Band NVNT n20 5240MHz Ant1 Peak

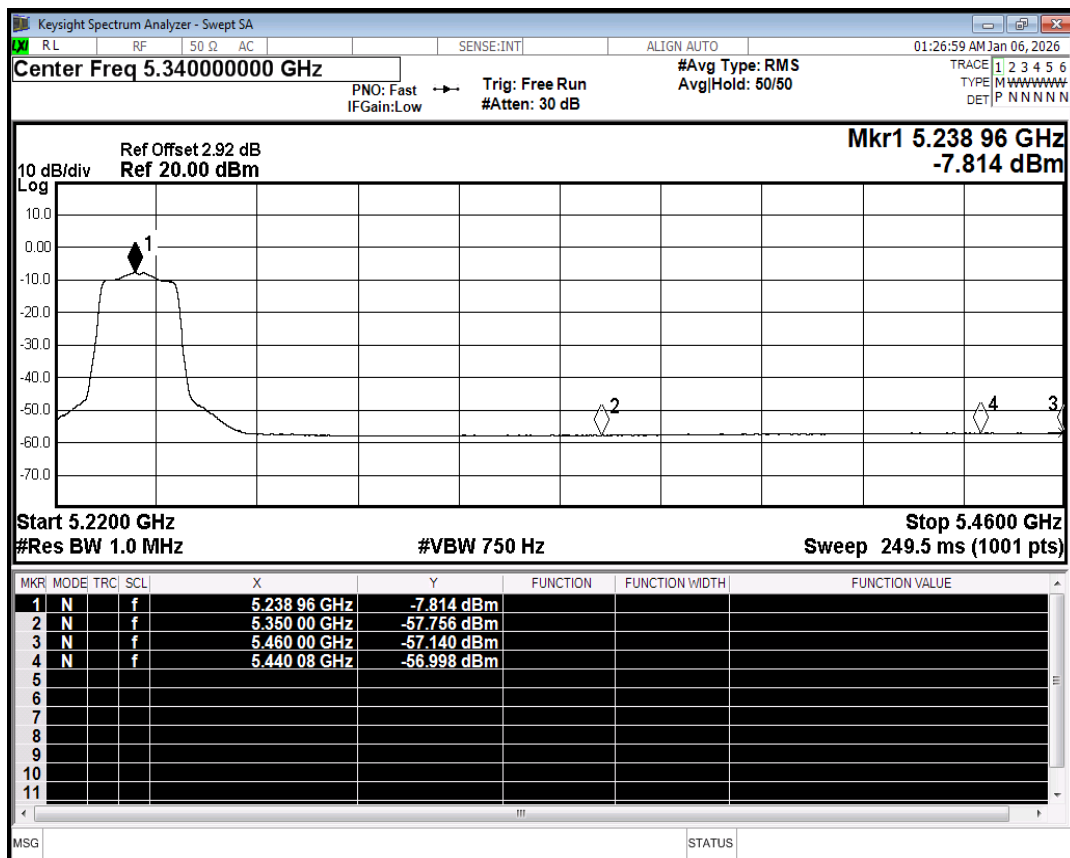


Restrict Band NVNT n20 5240MHz Ant1 Average

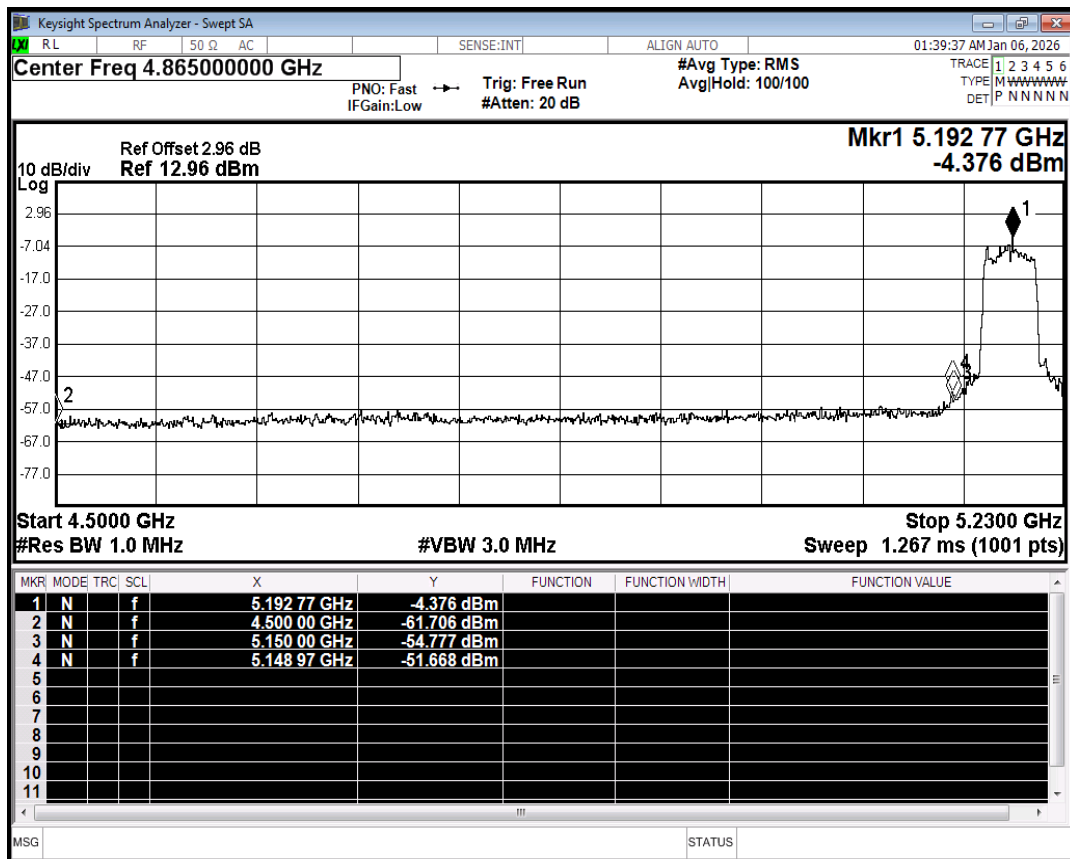


Restrict Band NVNT n40 5190MHz Ant1 Peak

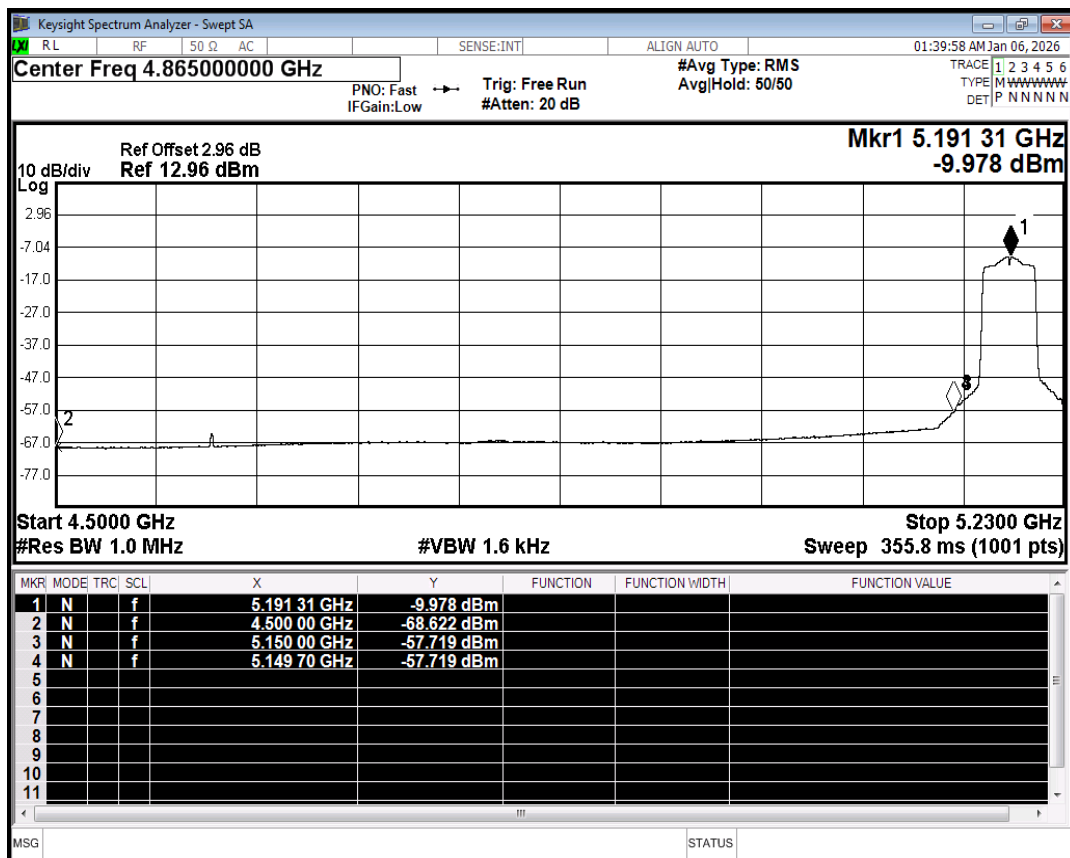


Restrict Band NVNT n40 5190MHz Ant1 Average

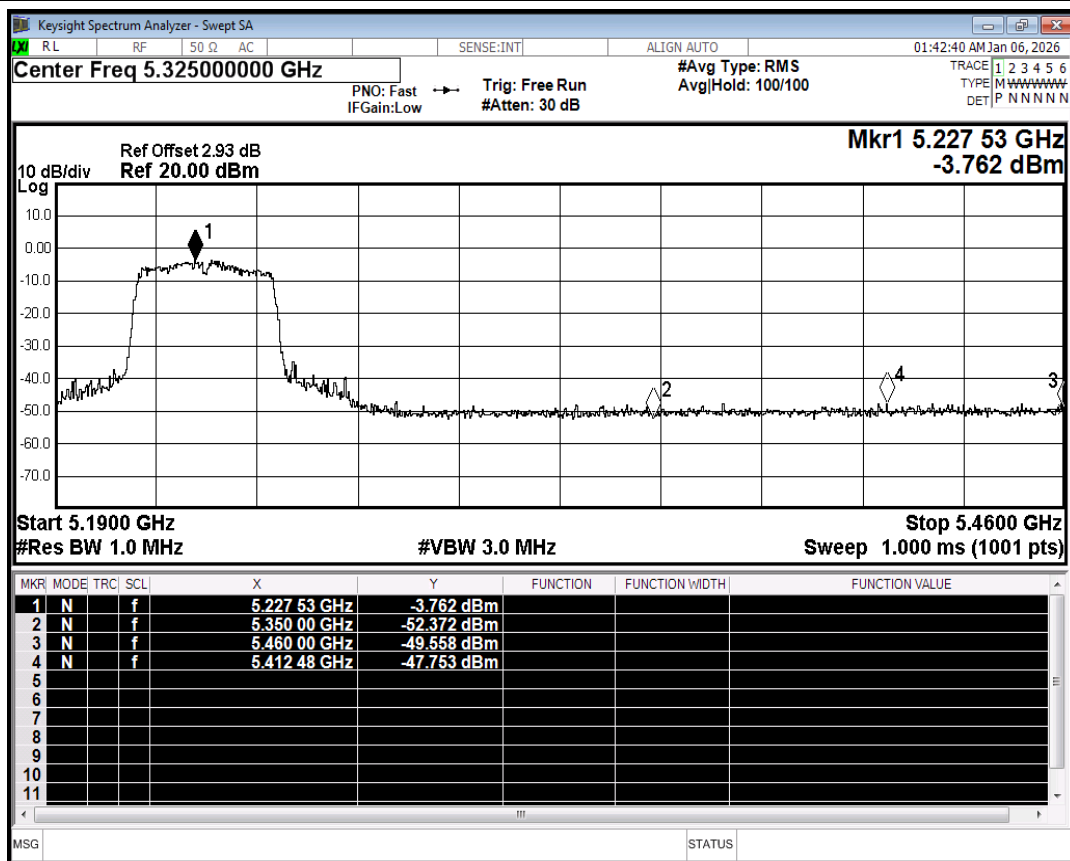


Restrict Band NVNT n40 5230MHz Ant1 Peak

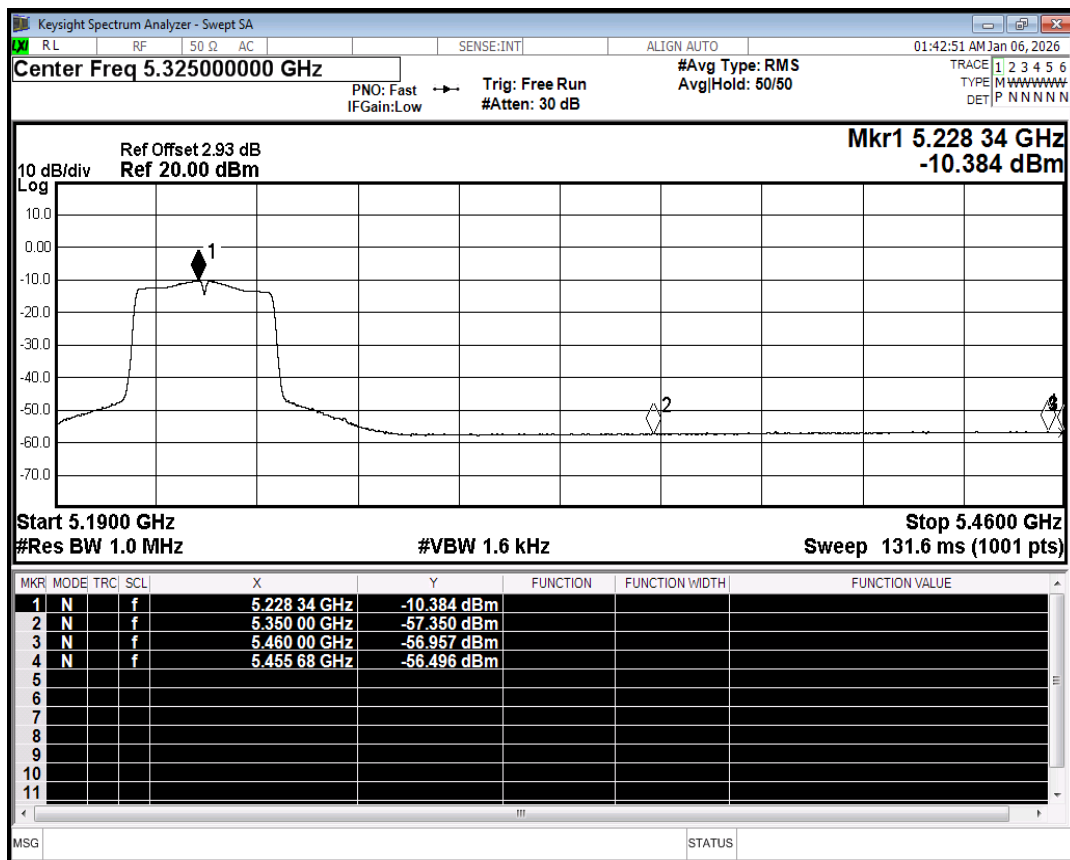


Restrict Band NVNT n40 5230MHz Ant1 Average

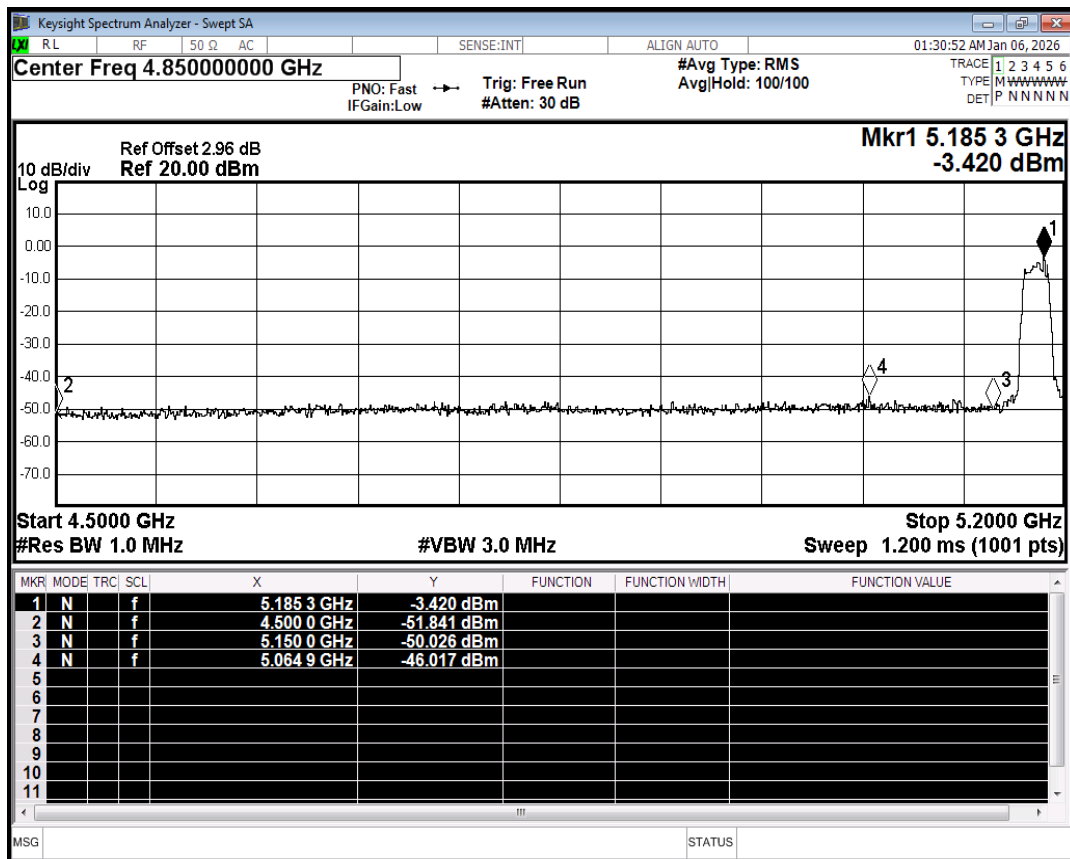


Restrict Band NVNT ac20 5180MHz Ant1 Peak

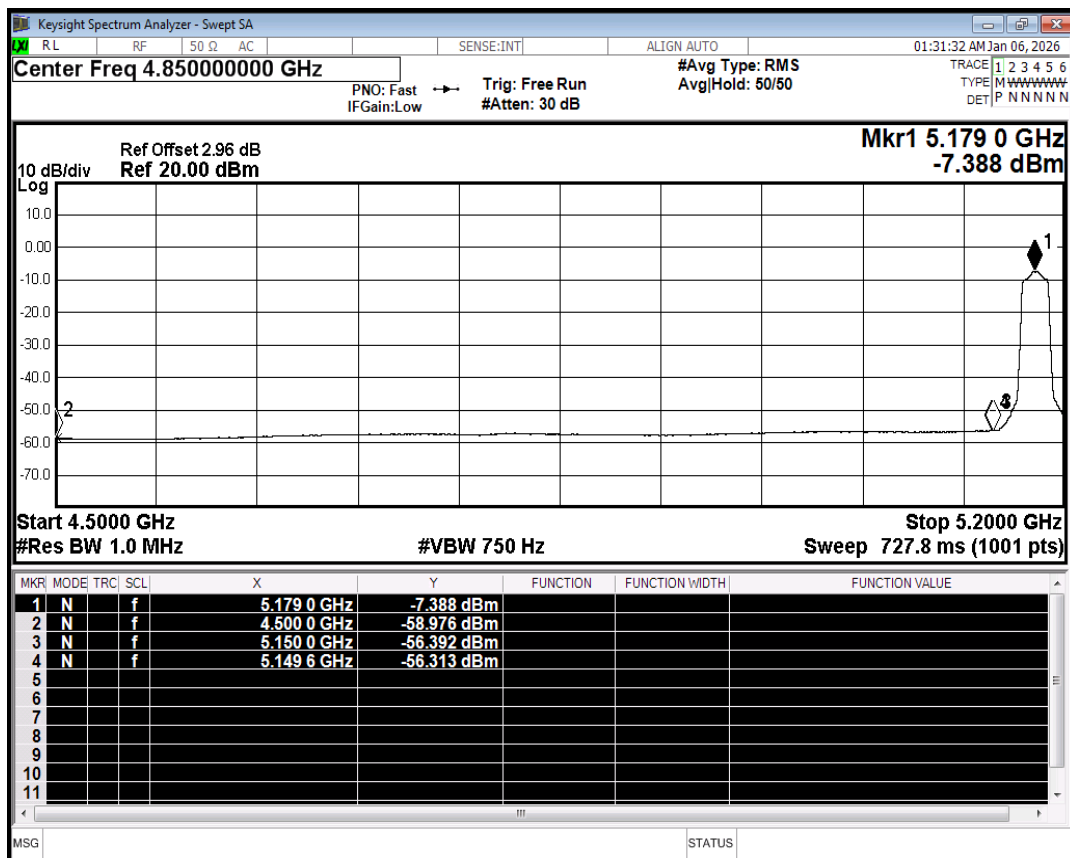


Restrict Band NVNT ac20 5180MHz Ant1 Average

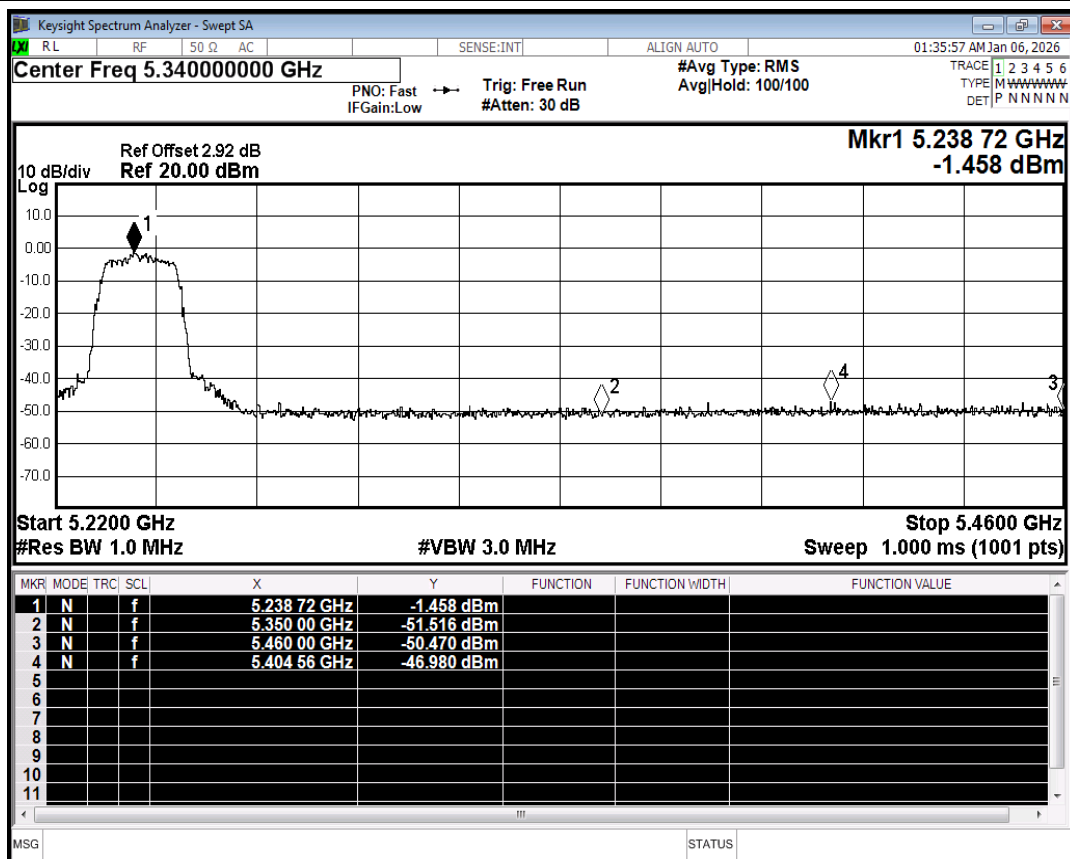


Restrict Band NVNT ac20 5240MHz Ant1 Peak

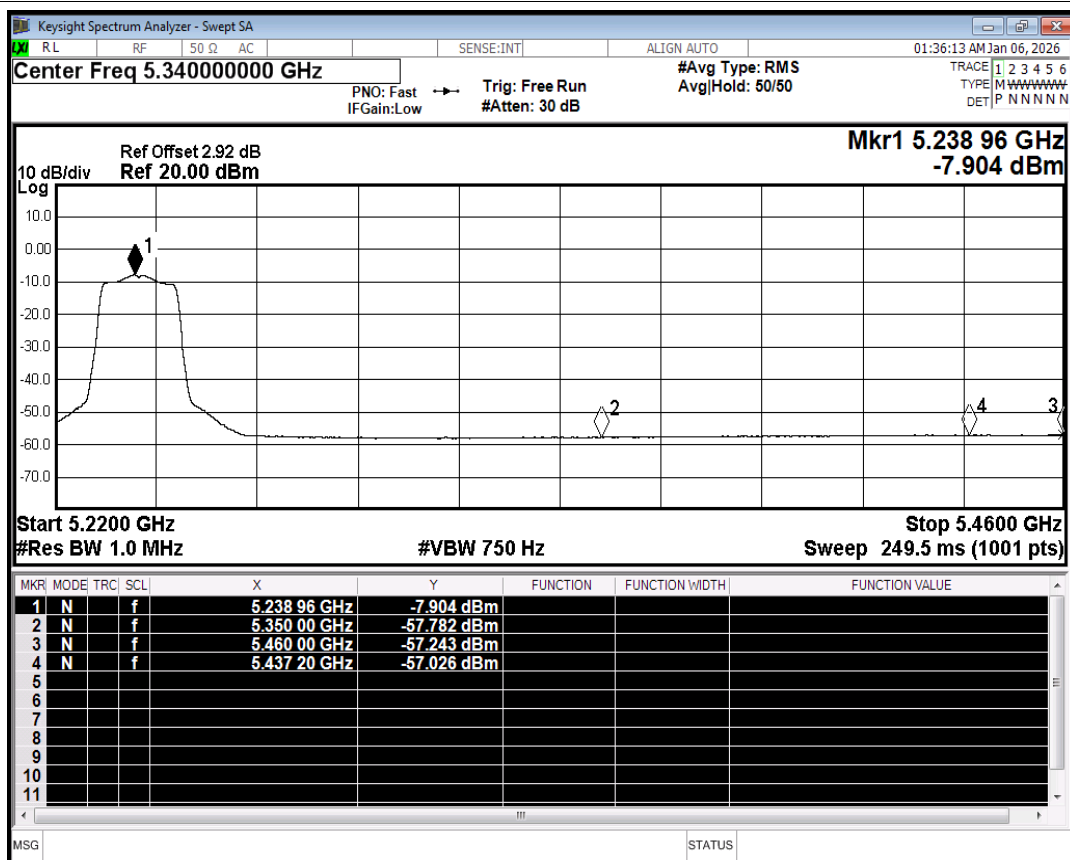


Restrict Band NVNT ac20 5240MHz Ant1 Average

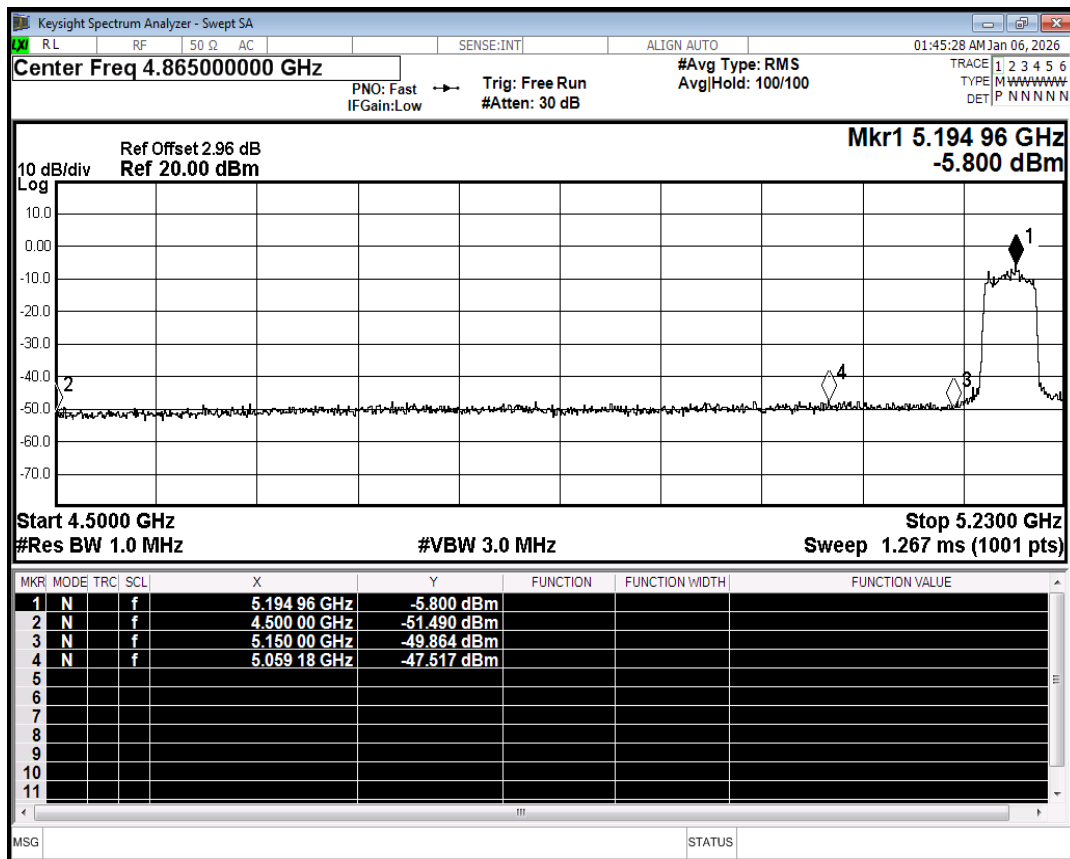


Restrict Band NVNT ac40 5190MHz Ant1 Peak

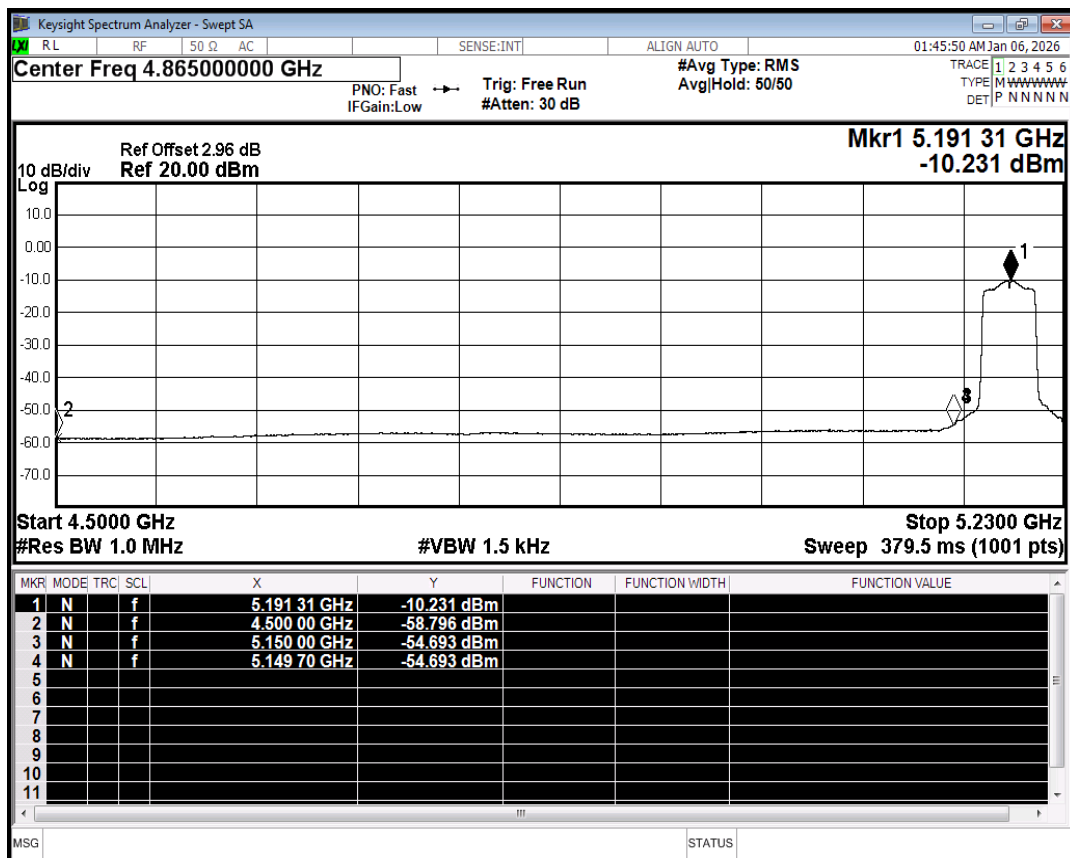


Restrict Band NVNT ac40 5190MHz Ant1 Average

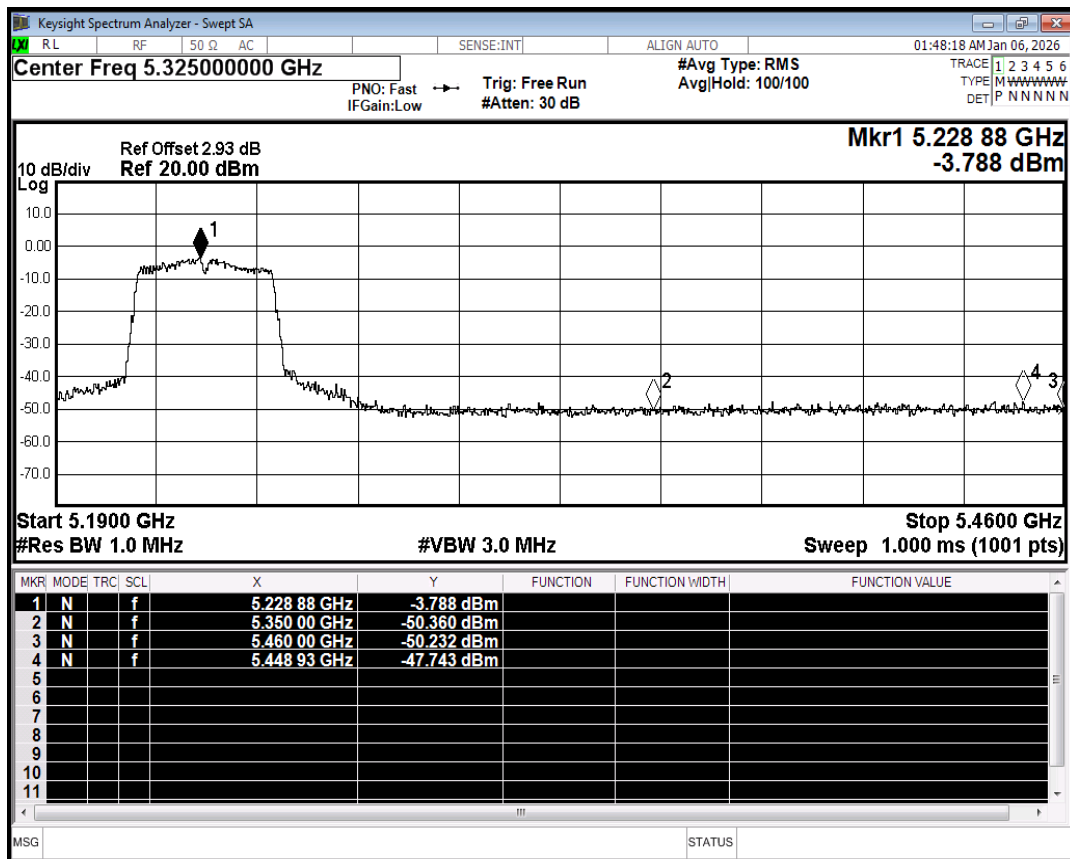


Restrict Band NVNT ac40 5230MHz Ant1 Peak

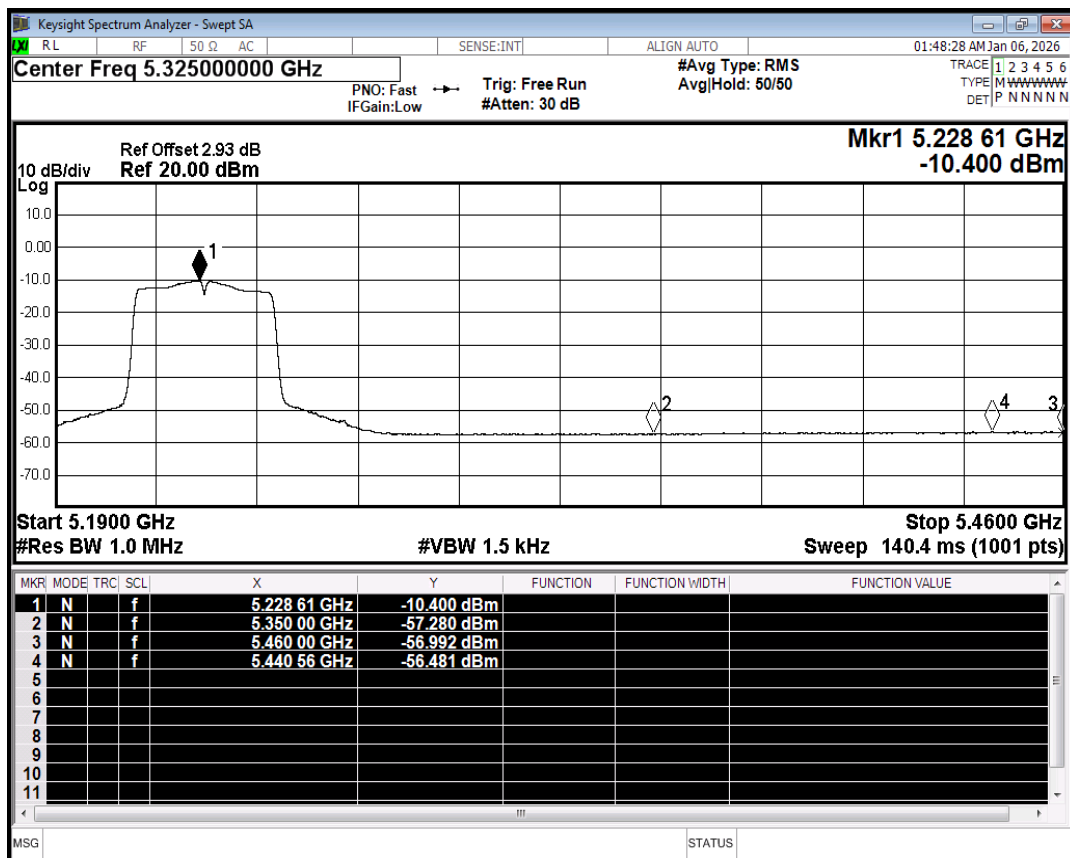


Restrict Band NVNT ac40 5230MHz Ant1 Average

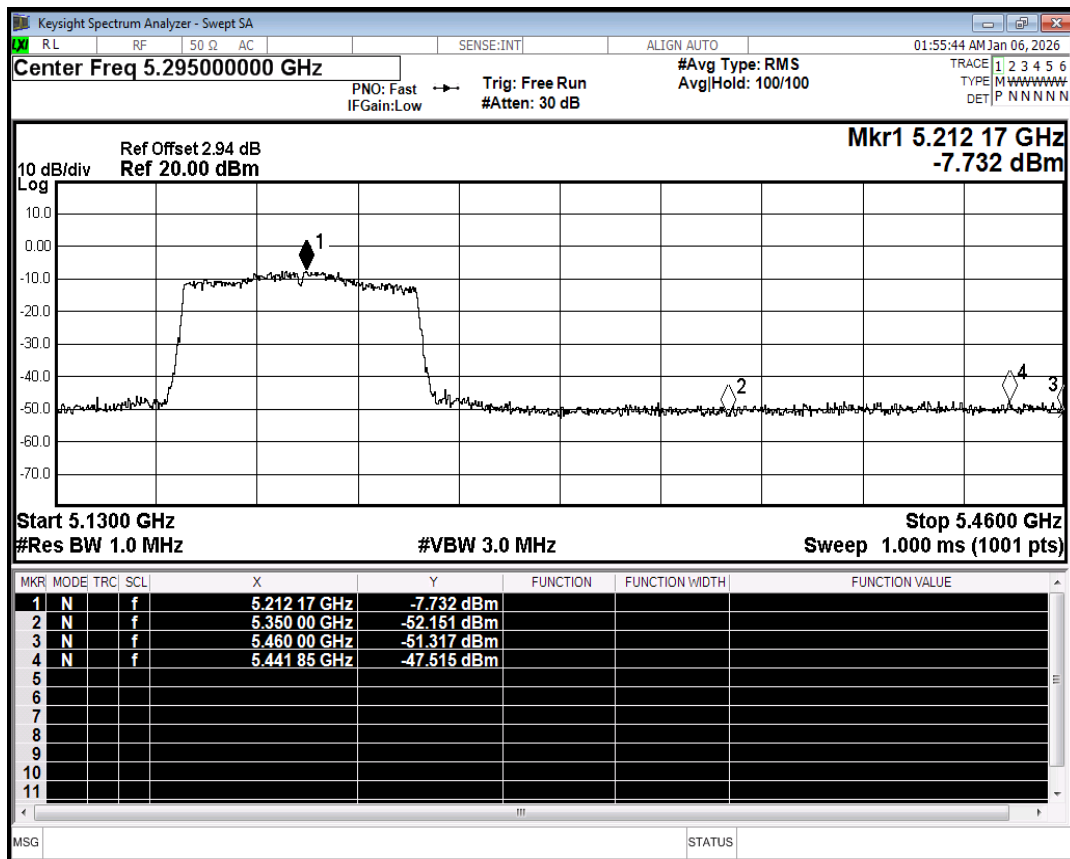


Restrict Band NVNT ac80 5210MHz Ant1 Peak

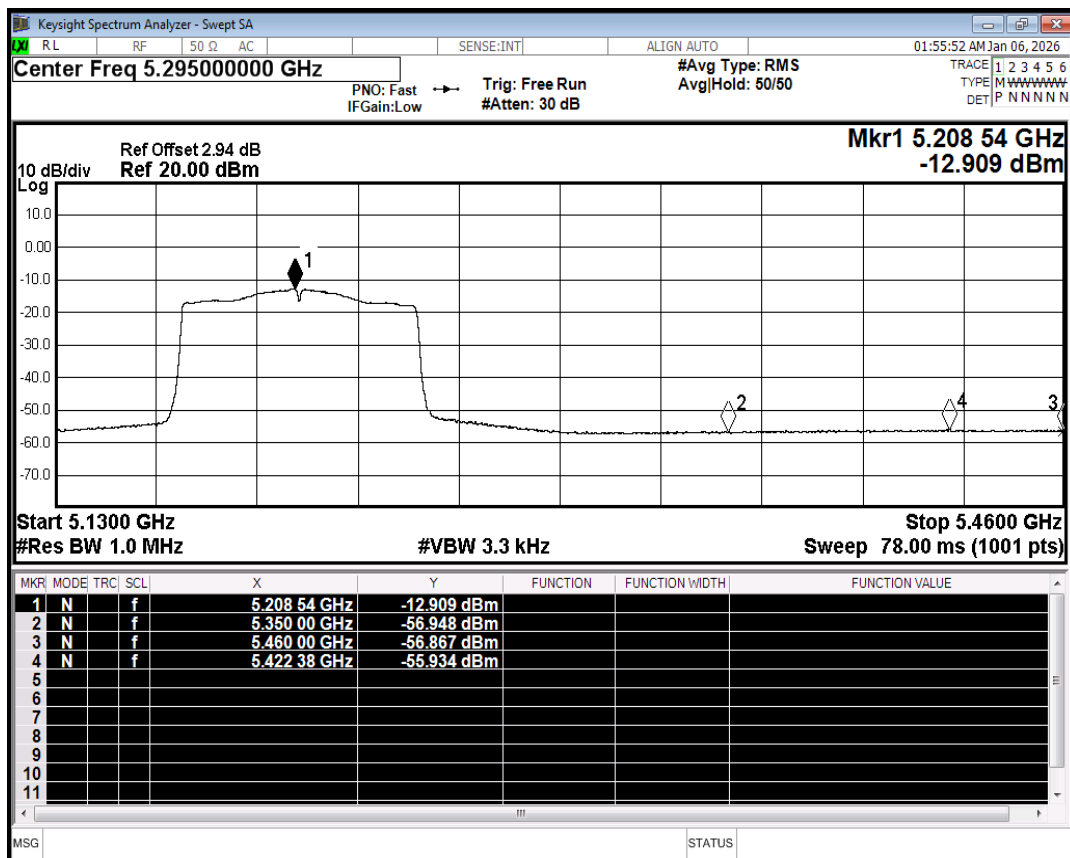

Restrict Band NVNT ac80 5210MHz Ant1 Average

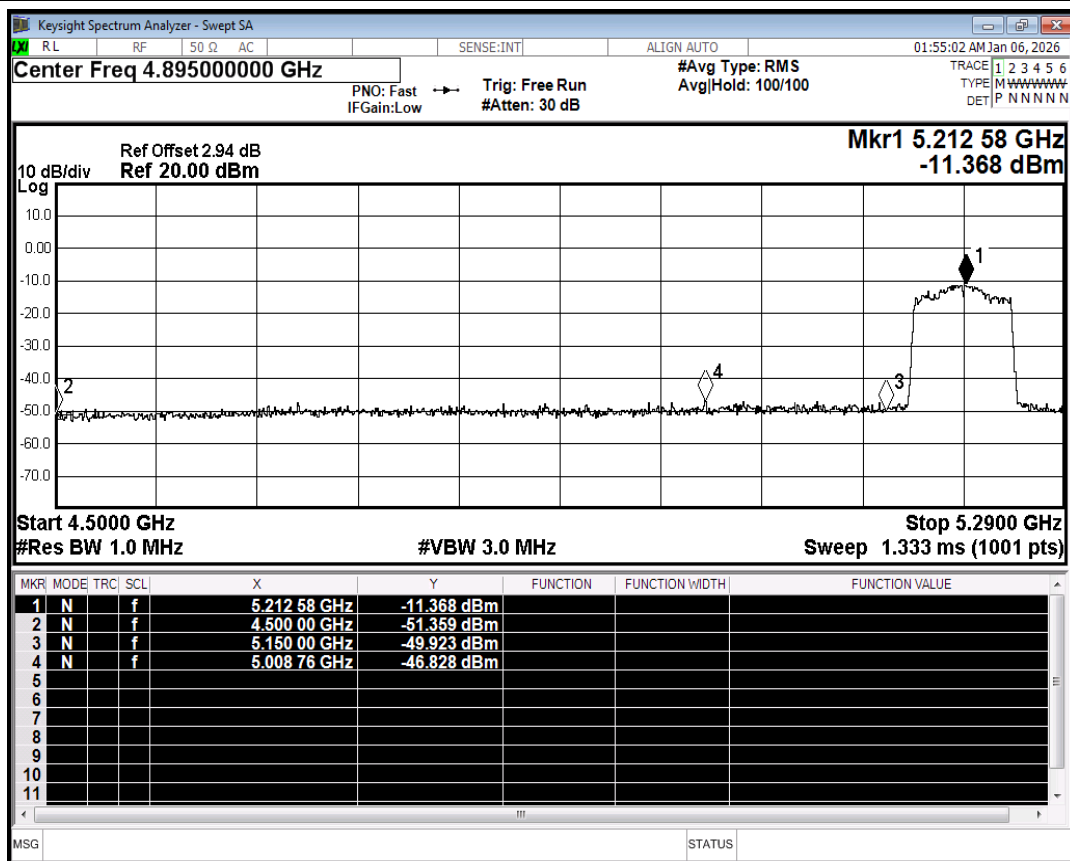


Restrict Band NVNT ac80 5210MHz Ant1 Peak

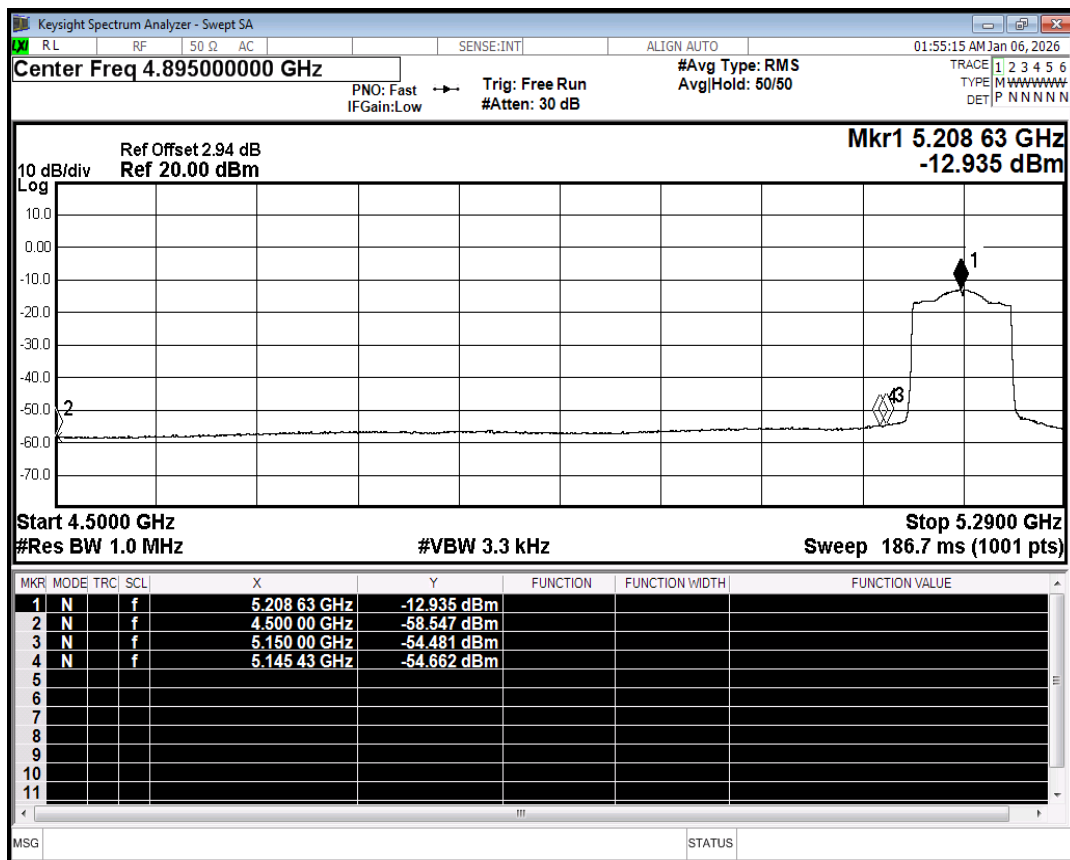


Restrict Band NVNT ac80 5210MHz Ant1 Average

5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5180	Ant1	5179.96	-40000	-7.72	25	Pass
NVNT	a	5200	Ant1	5199.94	-60000	-11.54	25	Pass
NVNT	a	5240	Ant1	5239.94	-60000	-11.45	25	Pass
NVNT	n20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
NVNT	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
NVNT	n20	5240	Ant1	5239.94	-60000	-11.45	25	Pass
NVNT	n40	5190	Ant1	5189.92	-80000	-15.41	25	Pass
NVNT	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
NVNT	ac20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
NVNT	ac20	5200	Ant1	5199.94	-60000	-11.54	25	Pass
NVNT	ac20	5240	Ant1	5239.92	-80000	-15.27	25	Pass
NVNT	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
NVNT	ac40	5230	Ant1	5229.92	-80000	-15.3	25	Pass
NVNT	ac80	5210	Ant1	5210	0	0	25	Pass

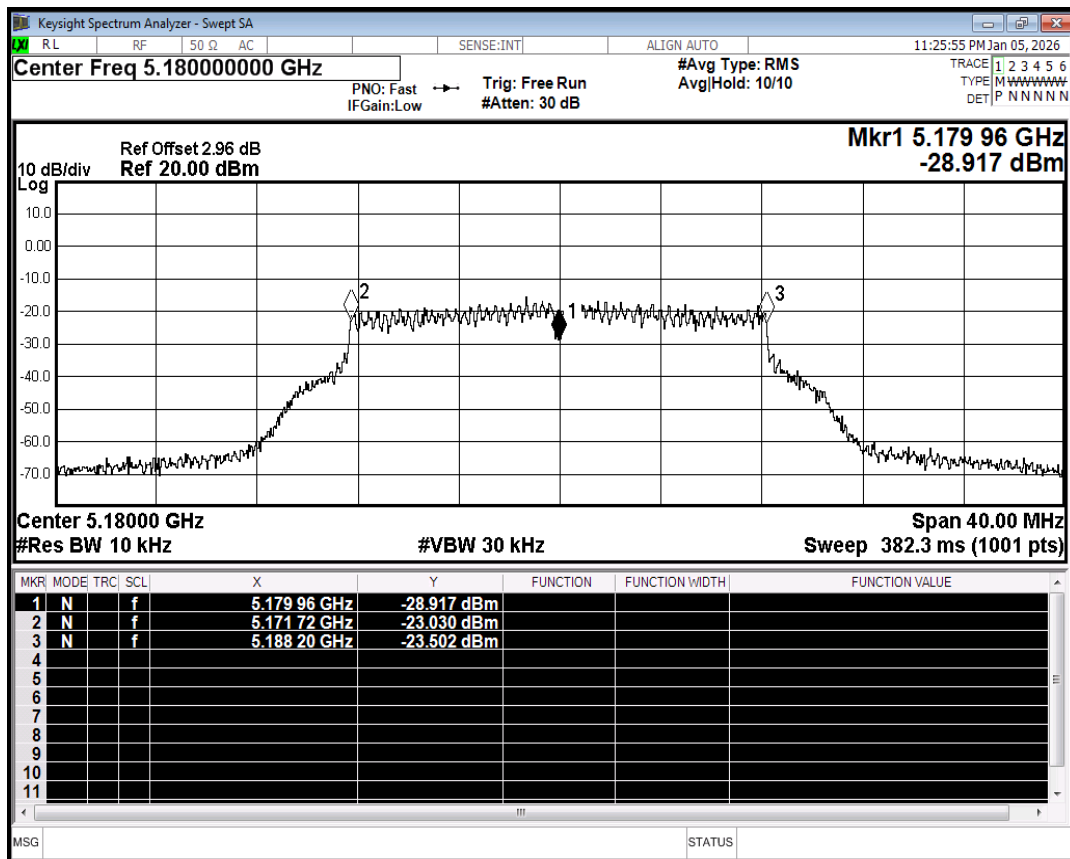


Freq. Stability NVNT a 5180MHz Ant1

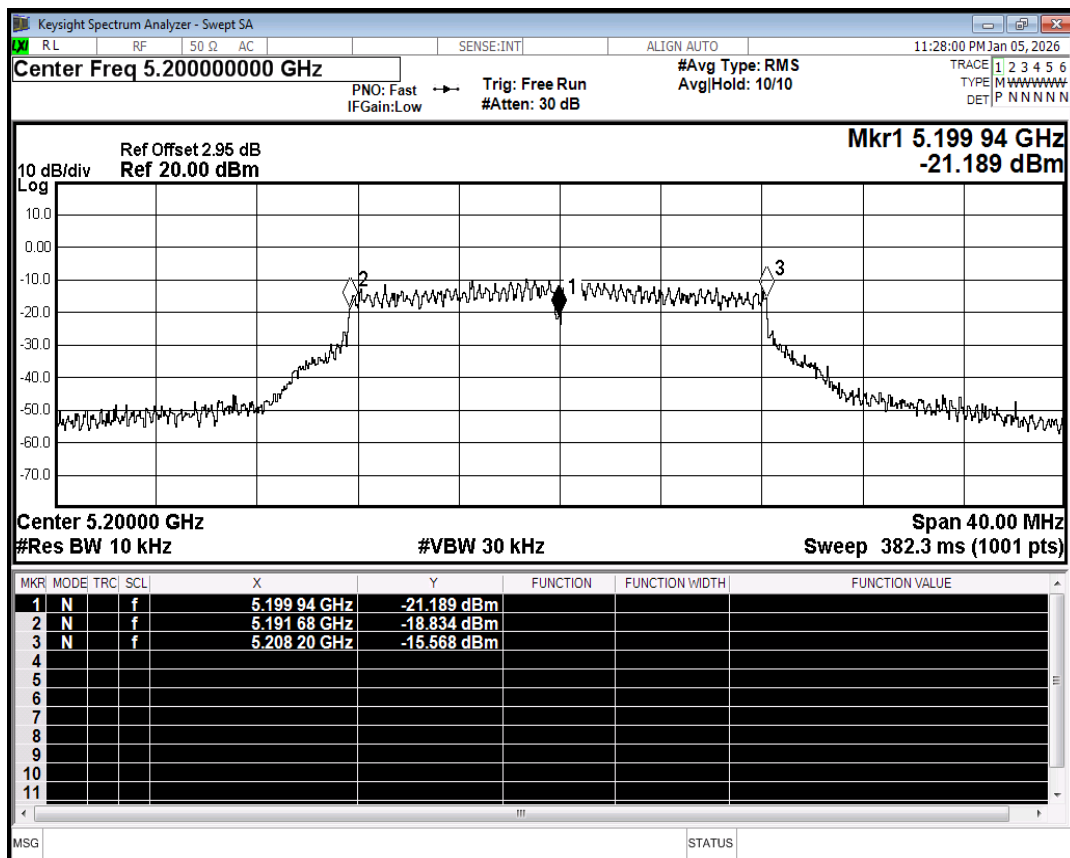


Freq. Stability NVNT a 5200MHz Ant1

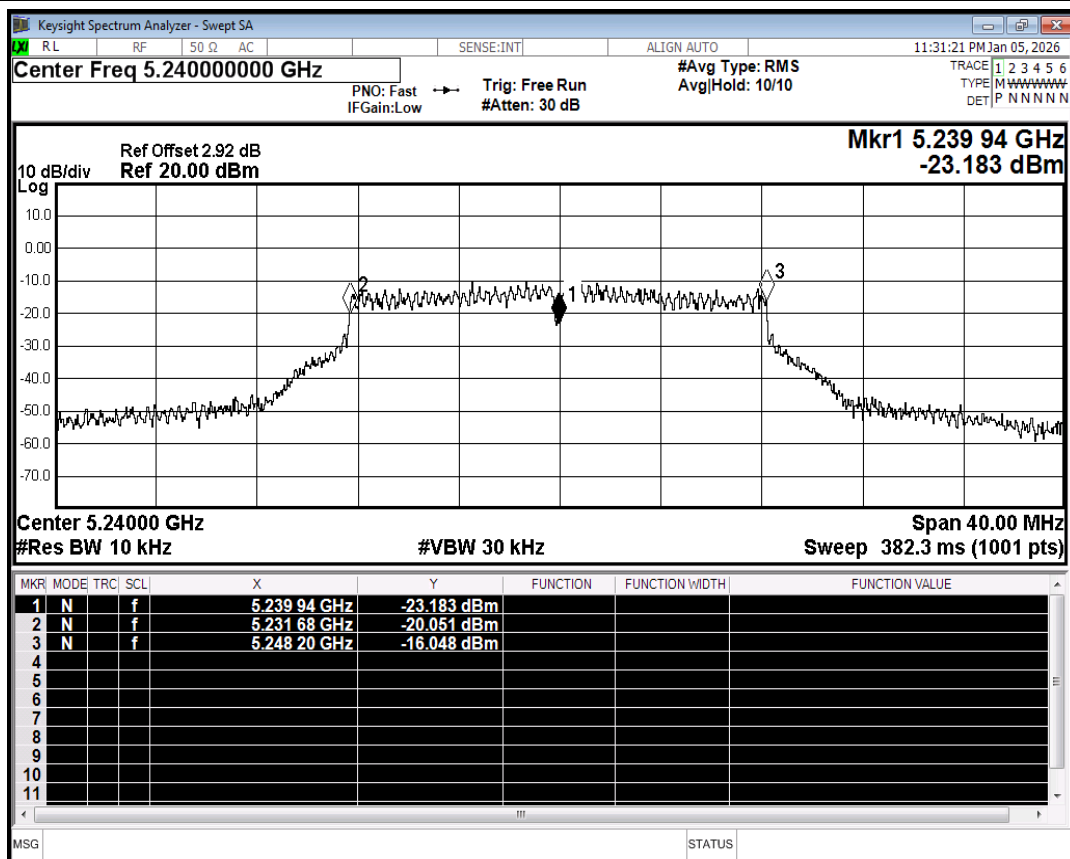


Freq. Stability NVNT a 5240MHz Ant1

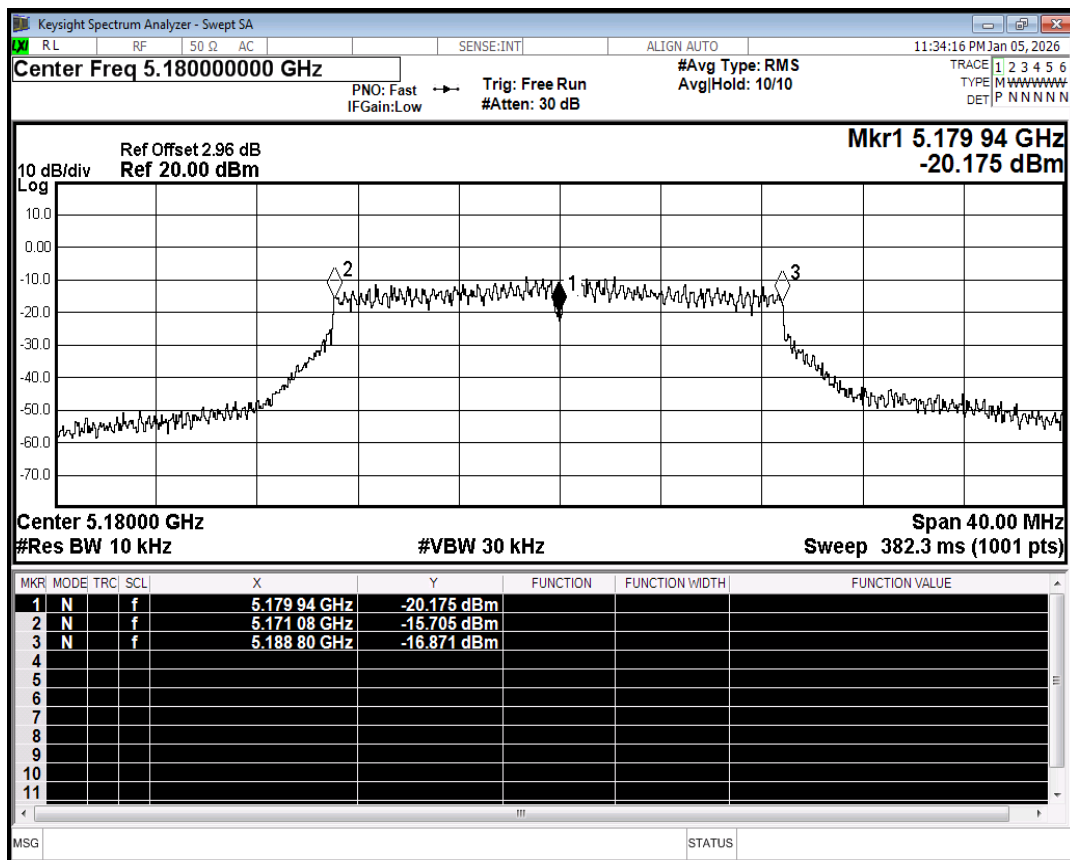


Freq. Stability NVNT n20 5180MHz Ant1

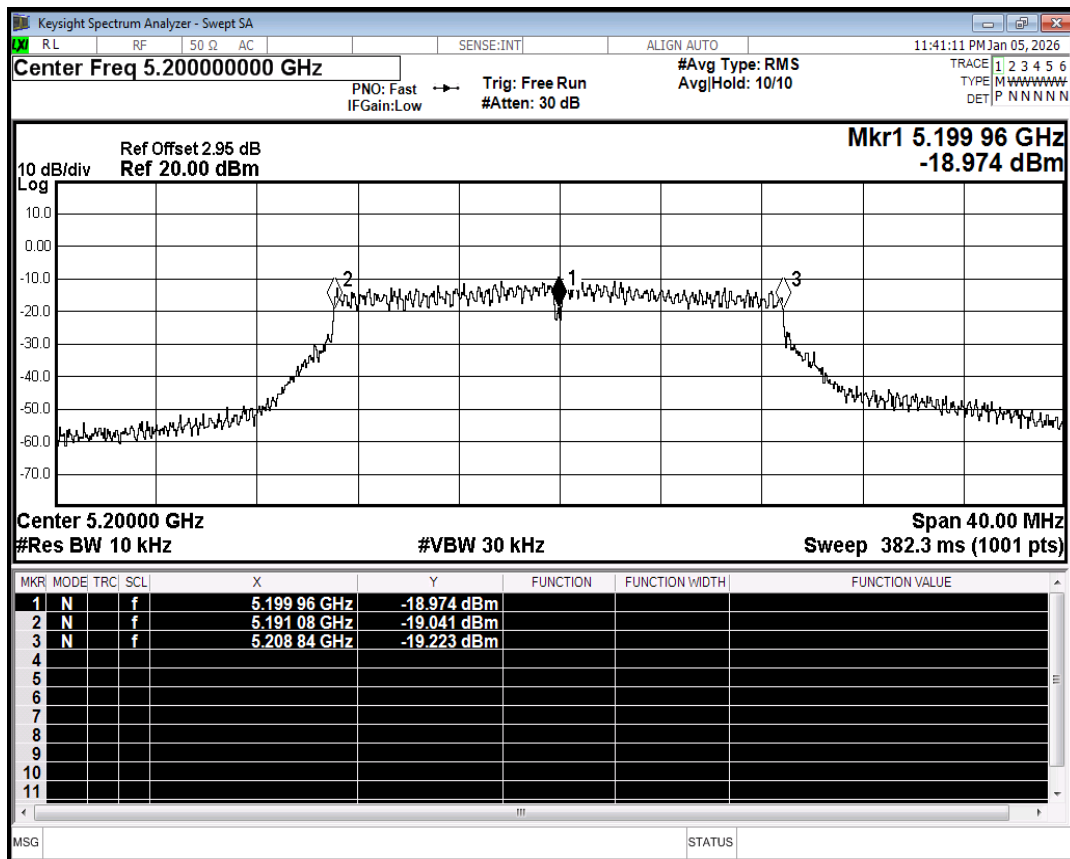


Freq. Stability NVNT n20 5200MHz Ant1

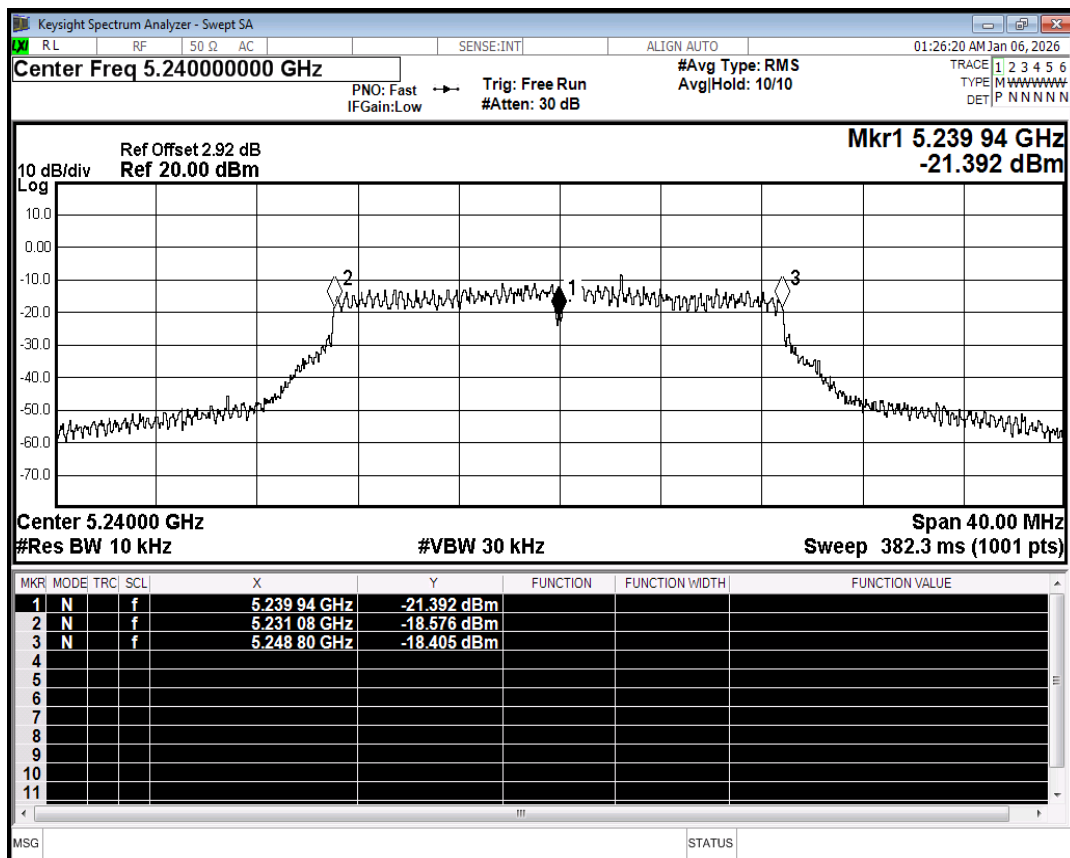


Freq. Stability NVNT n20 5240MHz Ant1

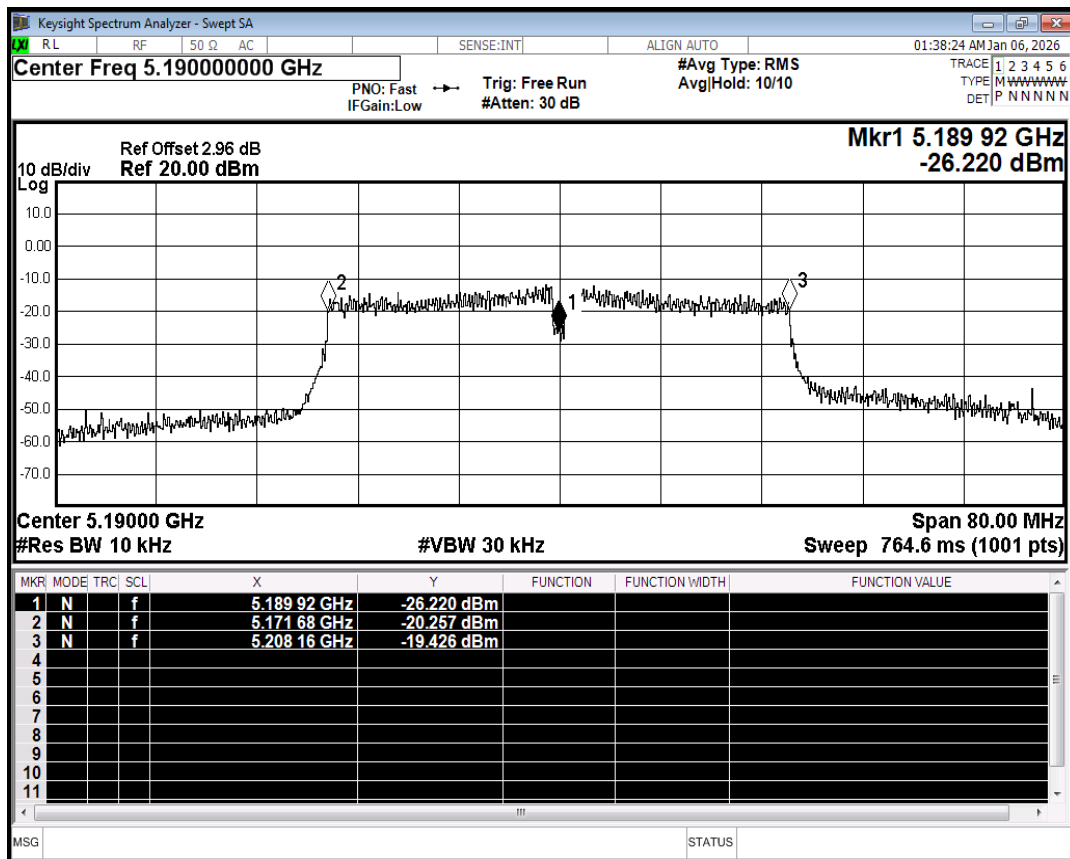


Freq. Stability NVNT n40 5190MHz Ant1

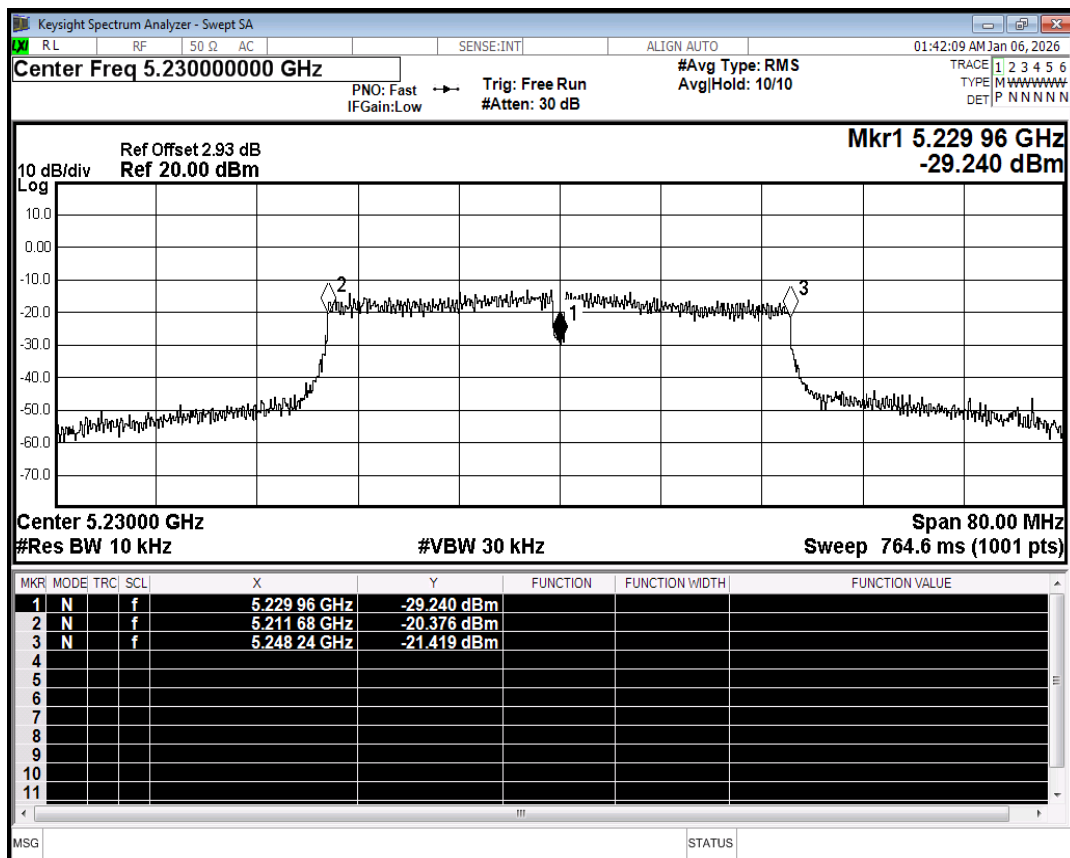


Freq. Stability NVNT n40 5230MHz Ant1

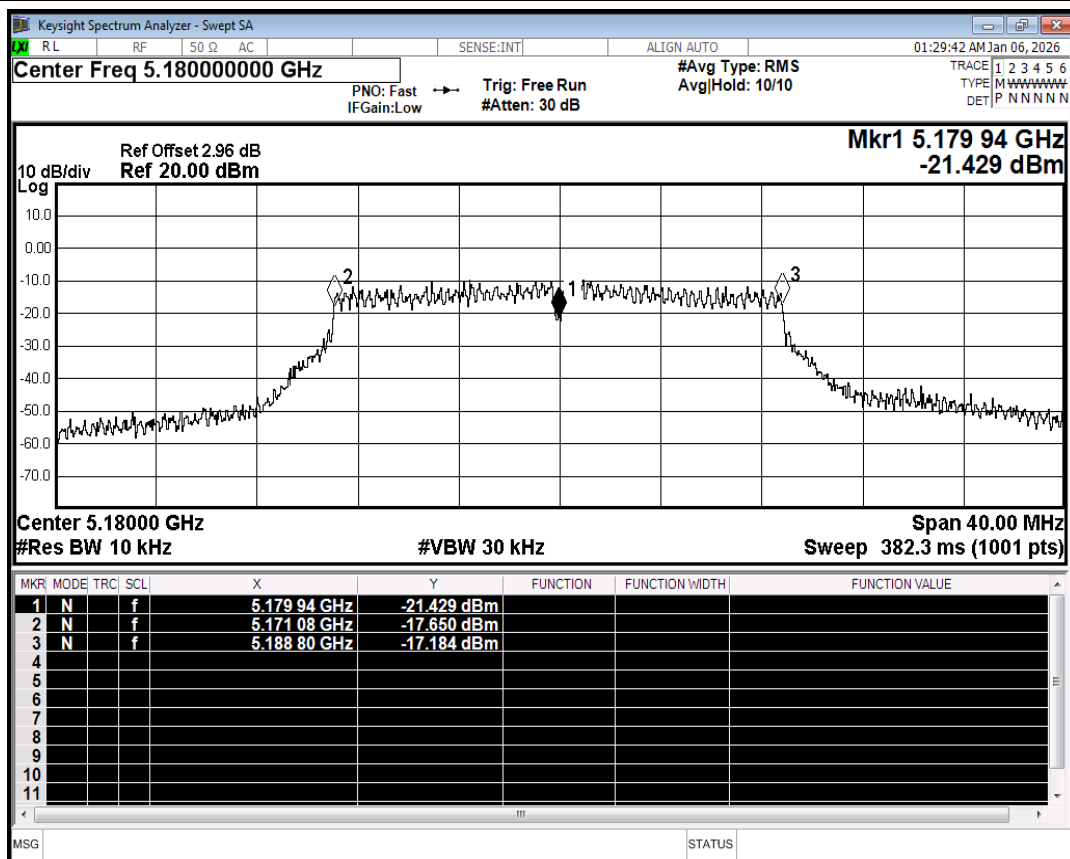


Freq. Stability NVNT ac20 5180MHz Ant1

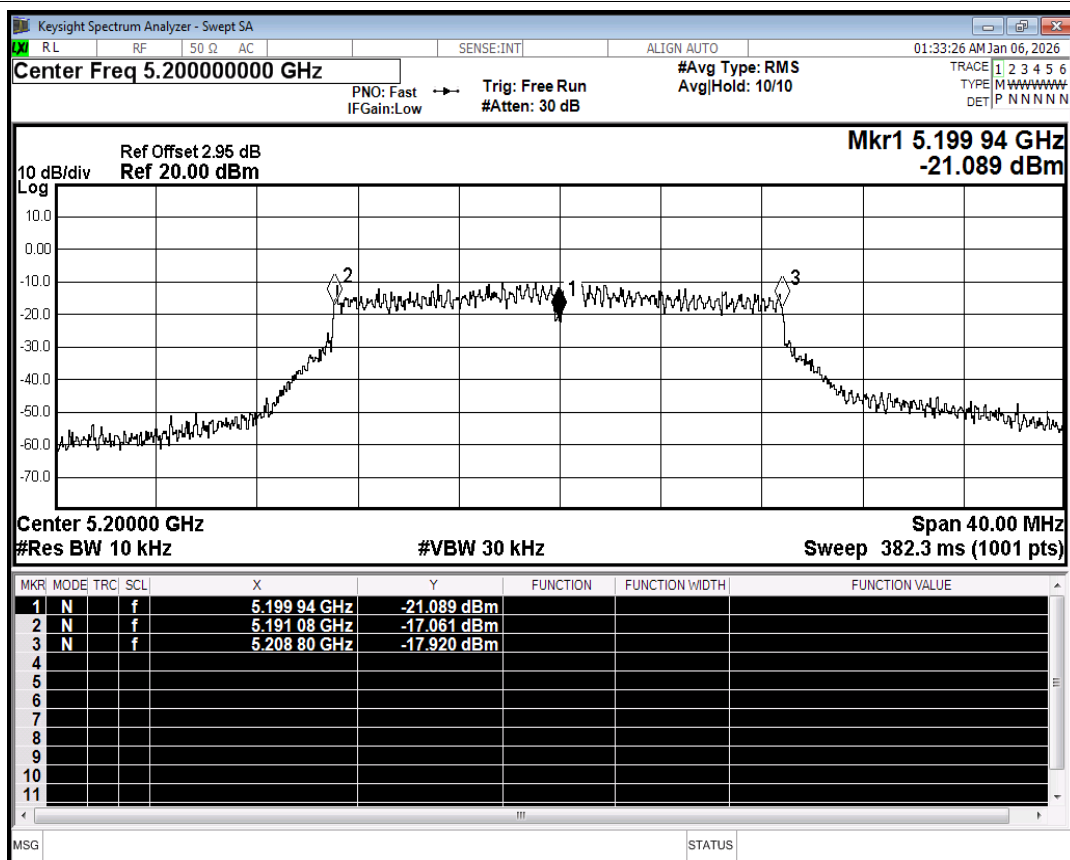


Freq. Stability NVNT ac20 5200MHz Ant1

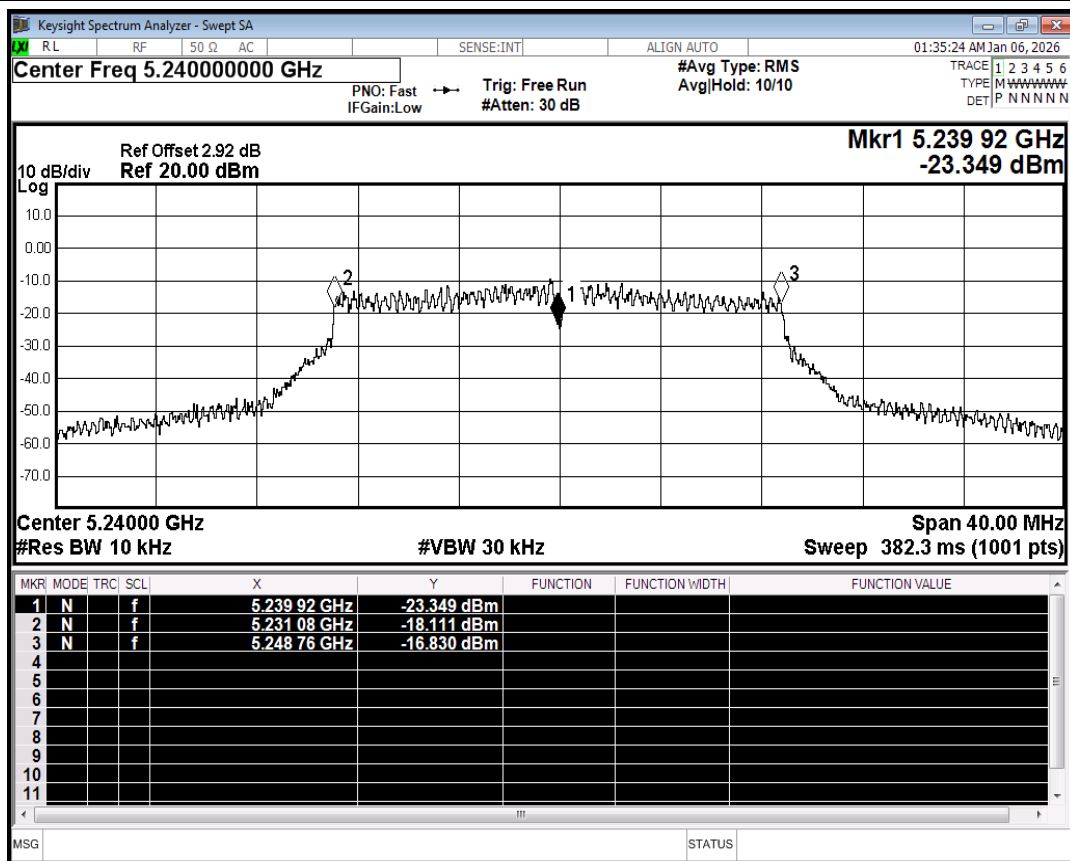


Freq. Stability NVNT ac20 5240MHz Ant1

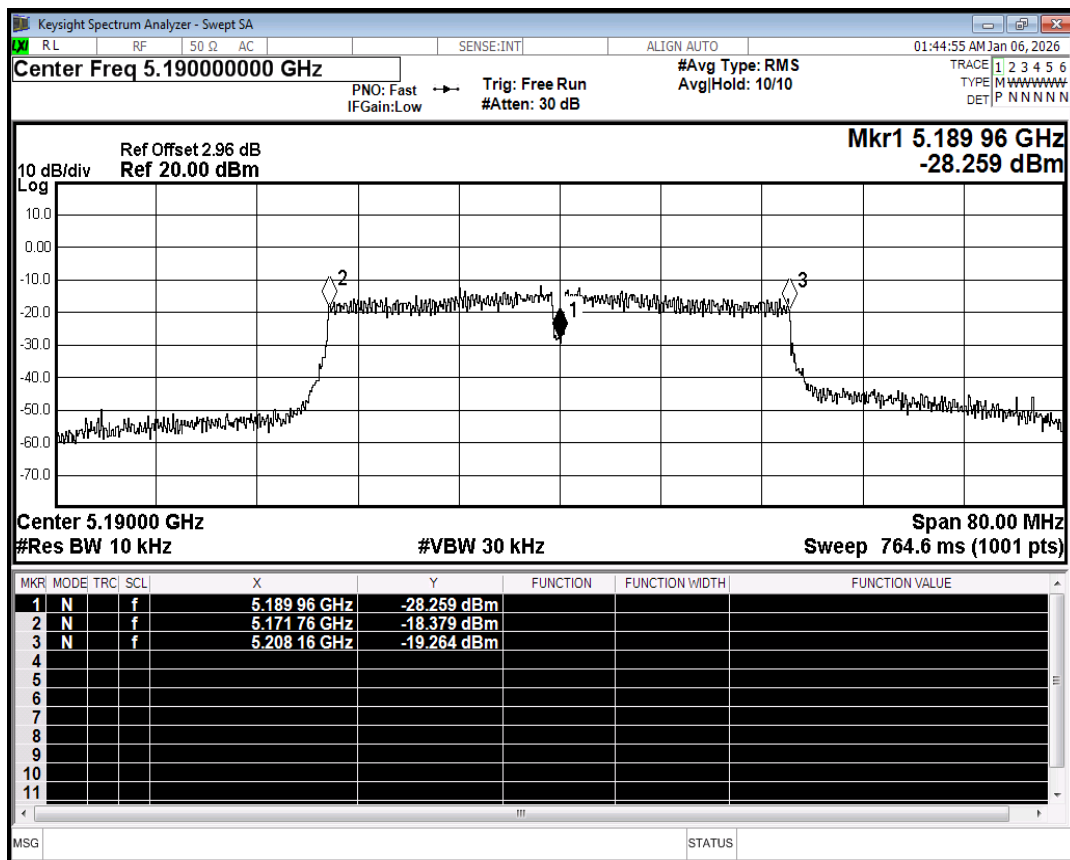

Freq. Stability NVNT ac40 5190MHz Ant1

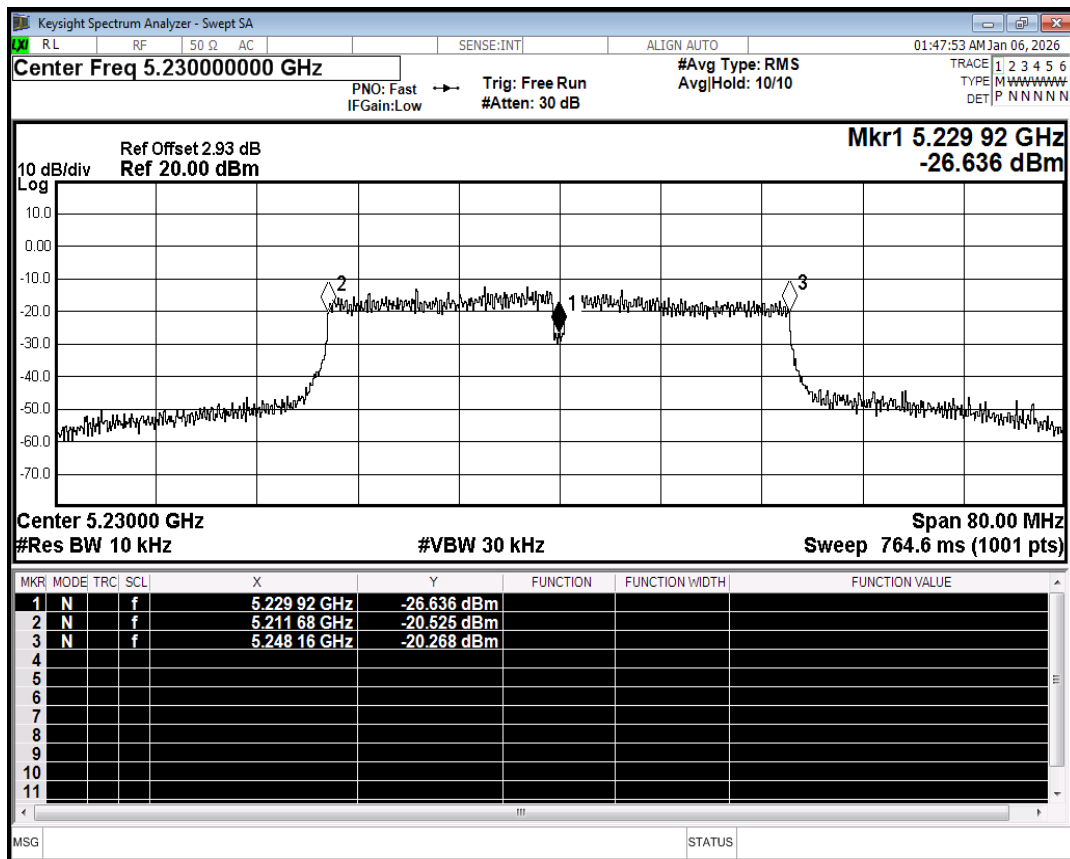


Freq. Stability NVNT ac40 5230MHz Ant1

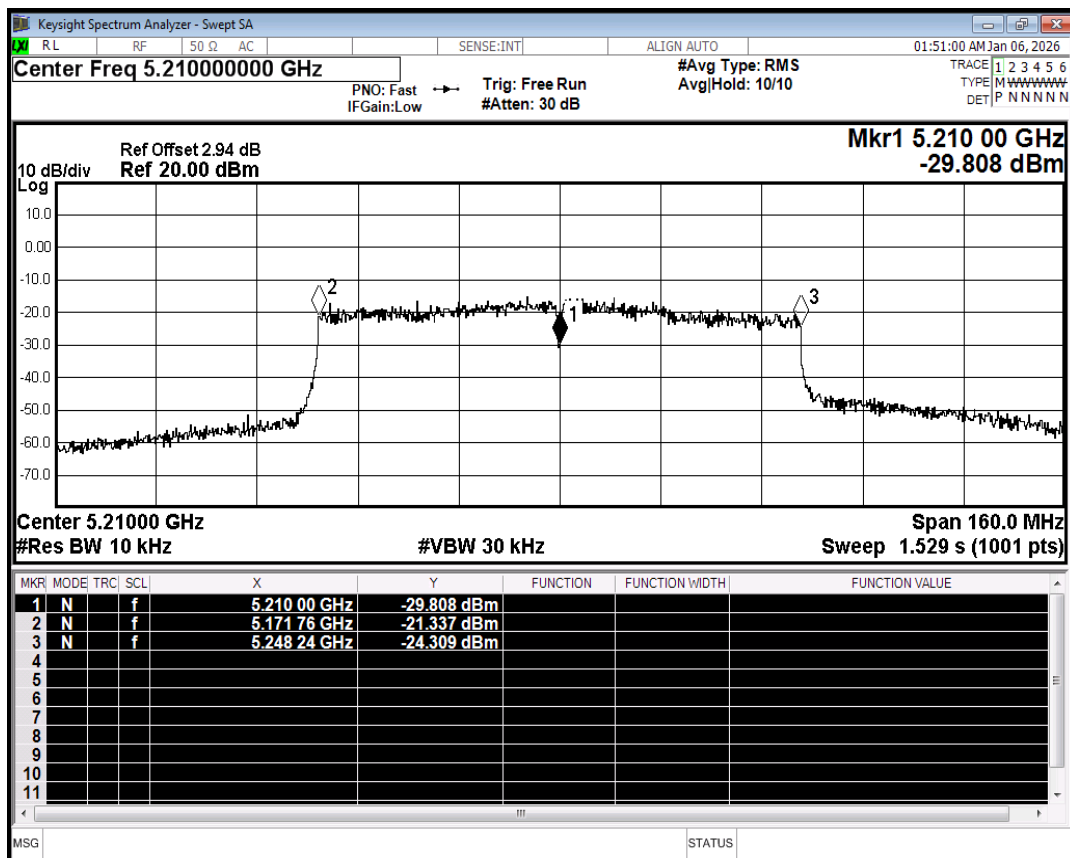


Freq. Stability NVNT ac80 5210MHz Ant1

6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	93.46	0.29	0.7
NVNT	a	5200	Ant1	93.46	0.29	0.7
NVNT	a	5240	Ant1	93.46	0.29	0.7
NVNT	n20	5180	Ant1	93.06	0.31	0.75
NVNT	n20	5200	Ant1	93.01	0.31	0.75
NVNT	n20	5240	Ant1	93.06	0.31	0.75
NVNT	n40	5190	Ant1	86.84	0.61	1.52
NVNT	n40	5230	Ant1	86.84	0.61	1.52
NVNT	ac20	5180	Ant1	93.1	0.31	0.74
NVNT	ac20	5200	Ant1	93.06	0.31	0.75
NVNT	ac20	5240	Ant1	93.06	0.31	0.75
NVNT	ac40	5190	Ant1	87.01	0.6	1.49
NVNT	ac40	5230	Ant1	87.01	0.6	1.49
NVNT	ac80	5210	Ant1	76.74	1.15	3.03

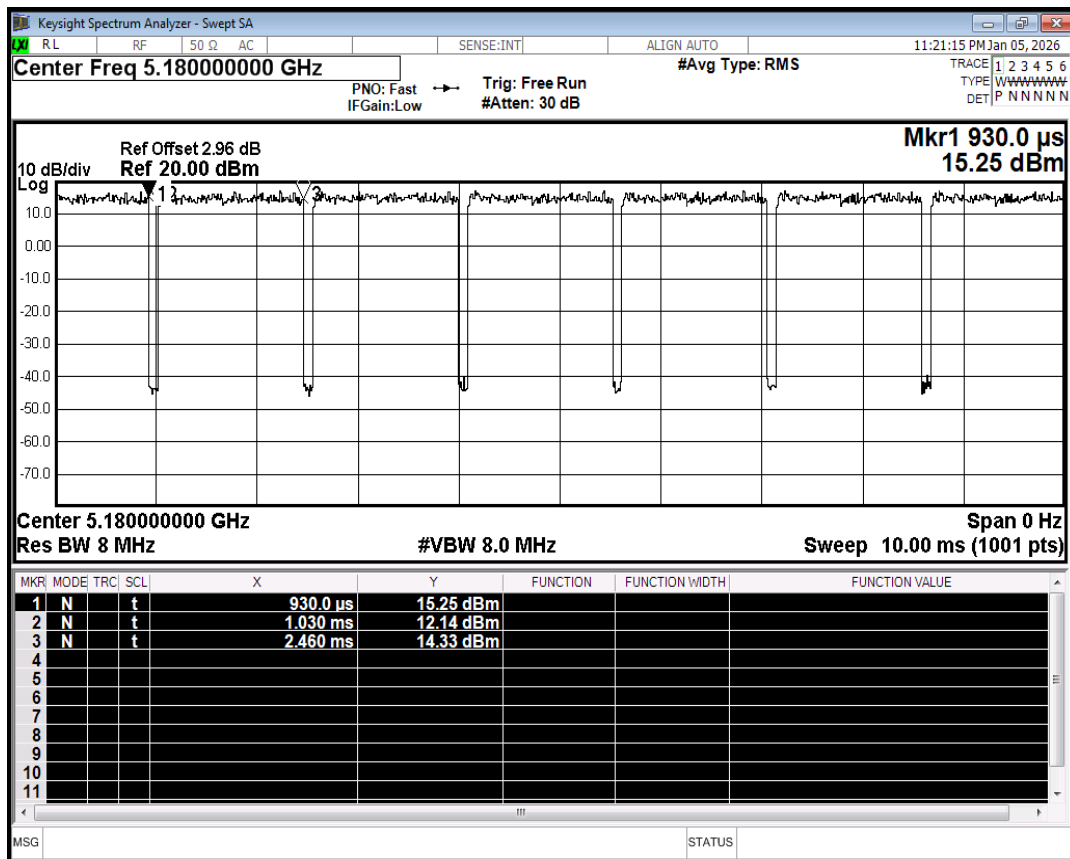


Duty Cycle NVNT a 5180MHz Ant1

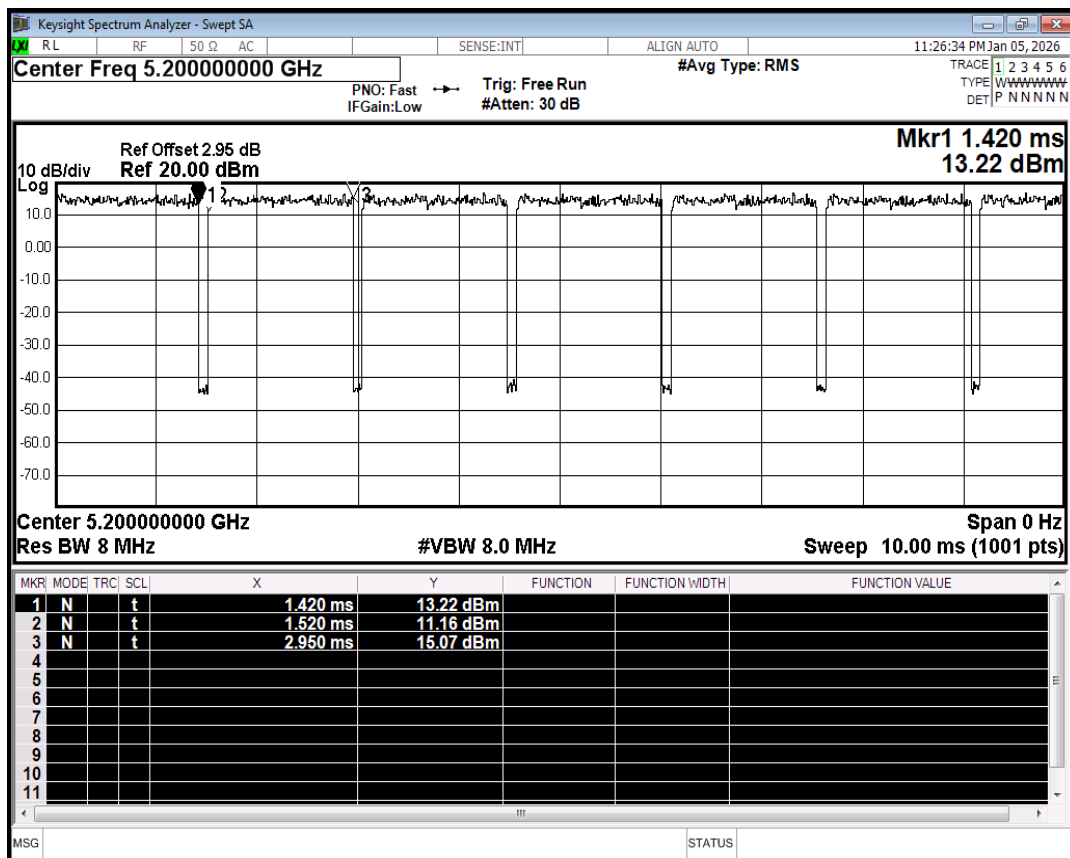


Duty Cycle NVNT a 5200MHz Ant1

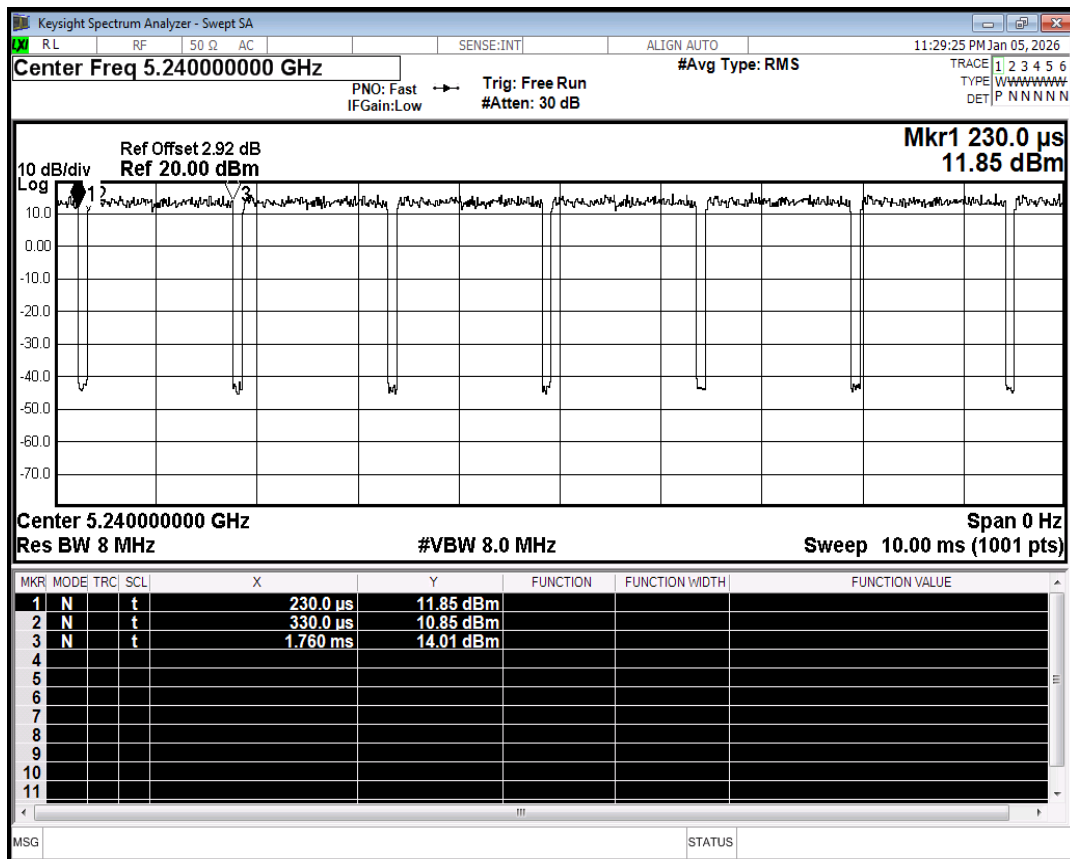


Duty Cycle NVNT a 5240MHz Ant1

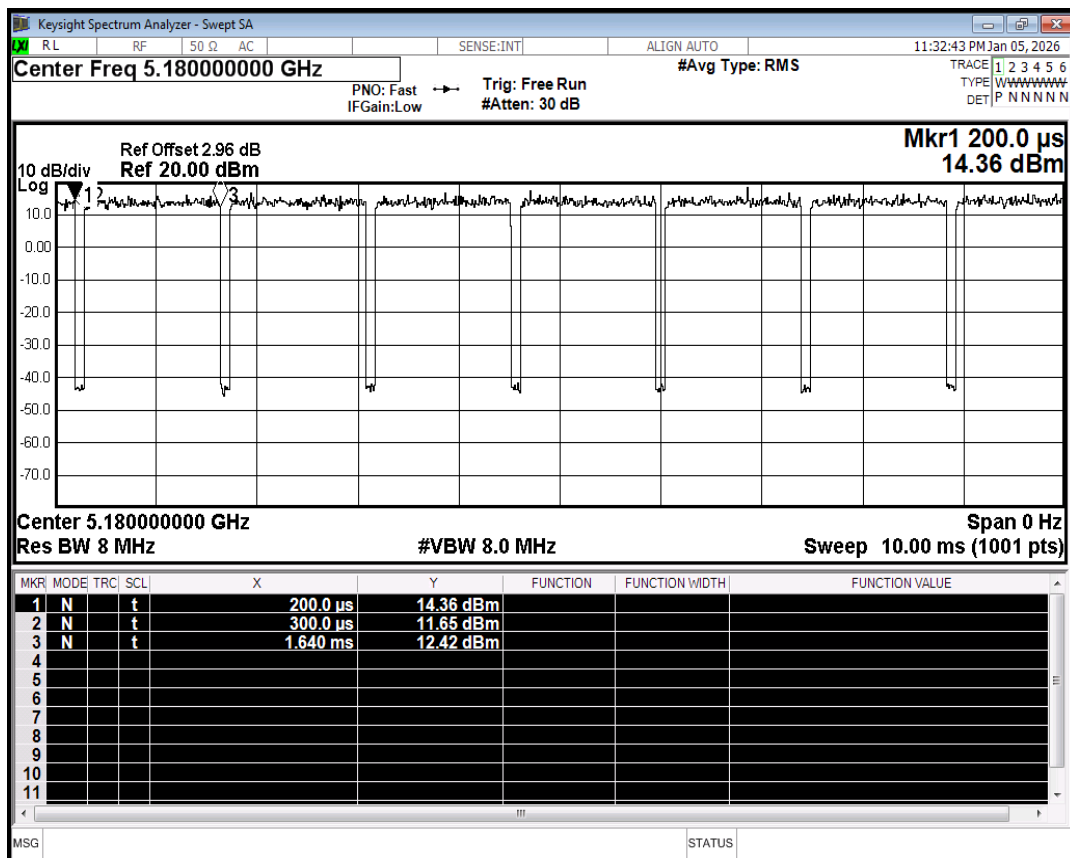


Duty Cycle NVNT n20 5180MHz Ant1

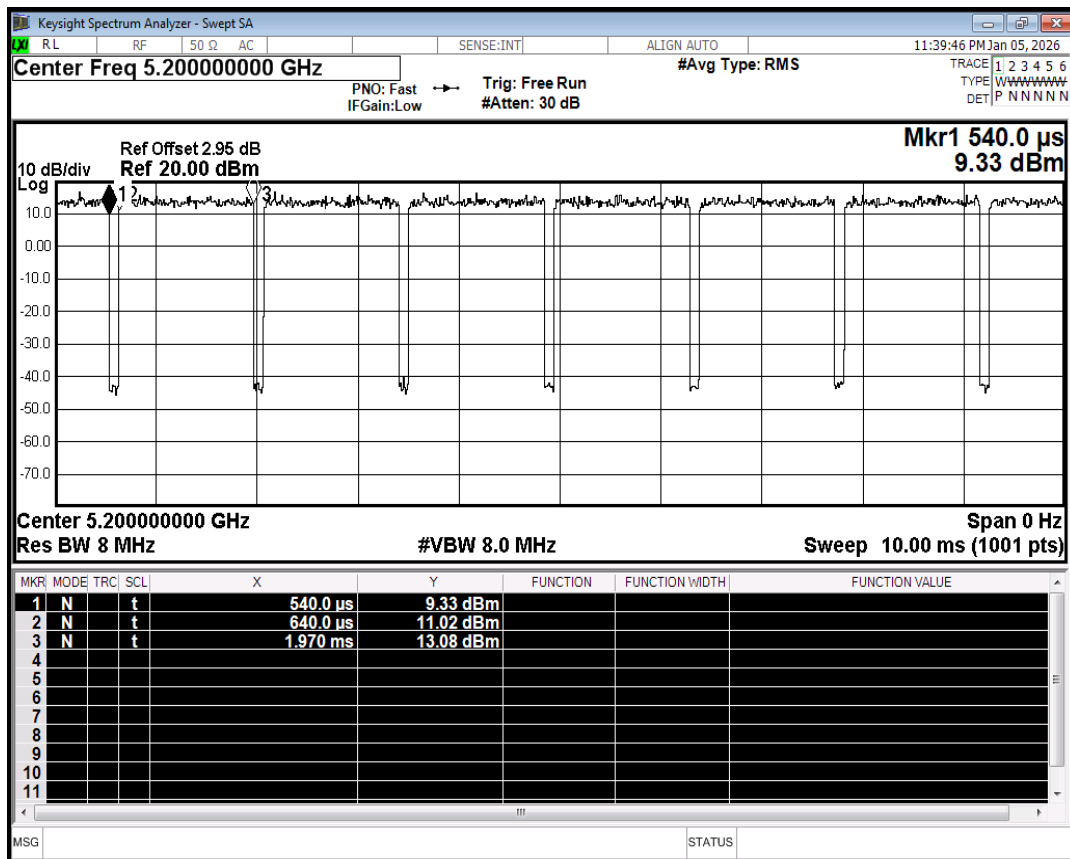


Duty Cycle NVNT n20 5200MHz Ant1

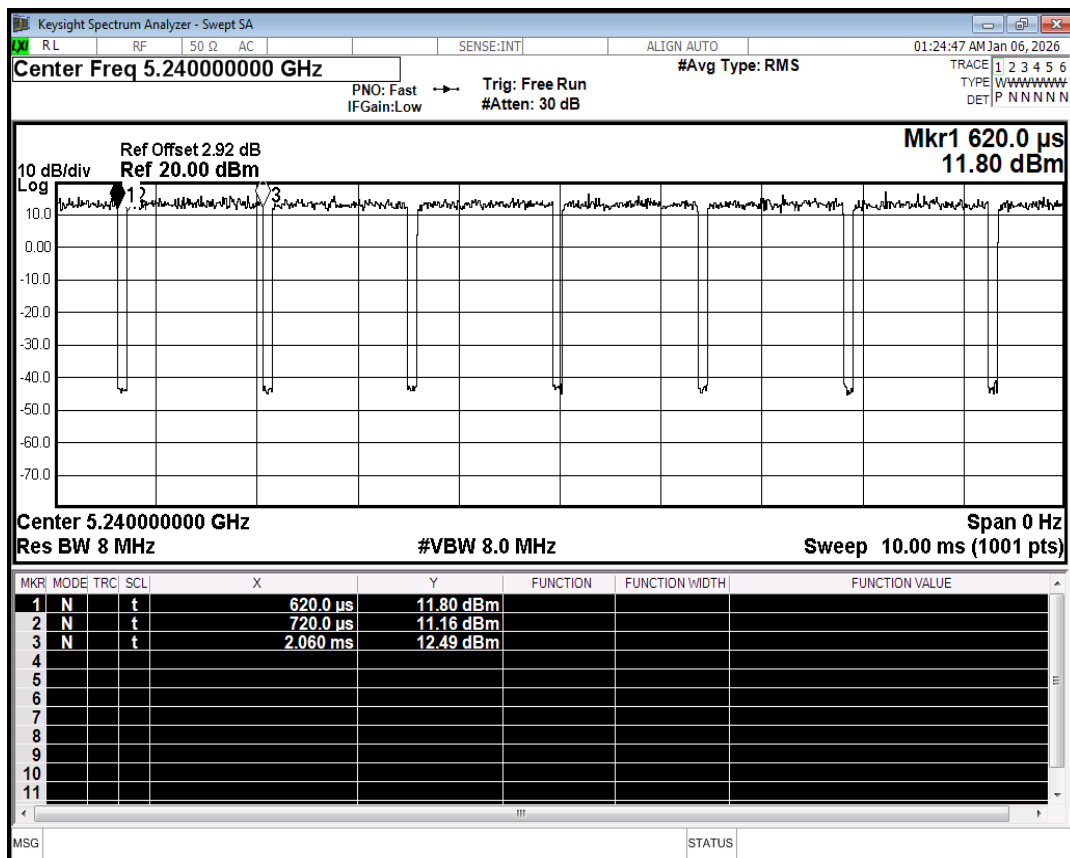


Duty Cycle NVNT n20 5240MHz Ant1

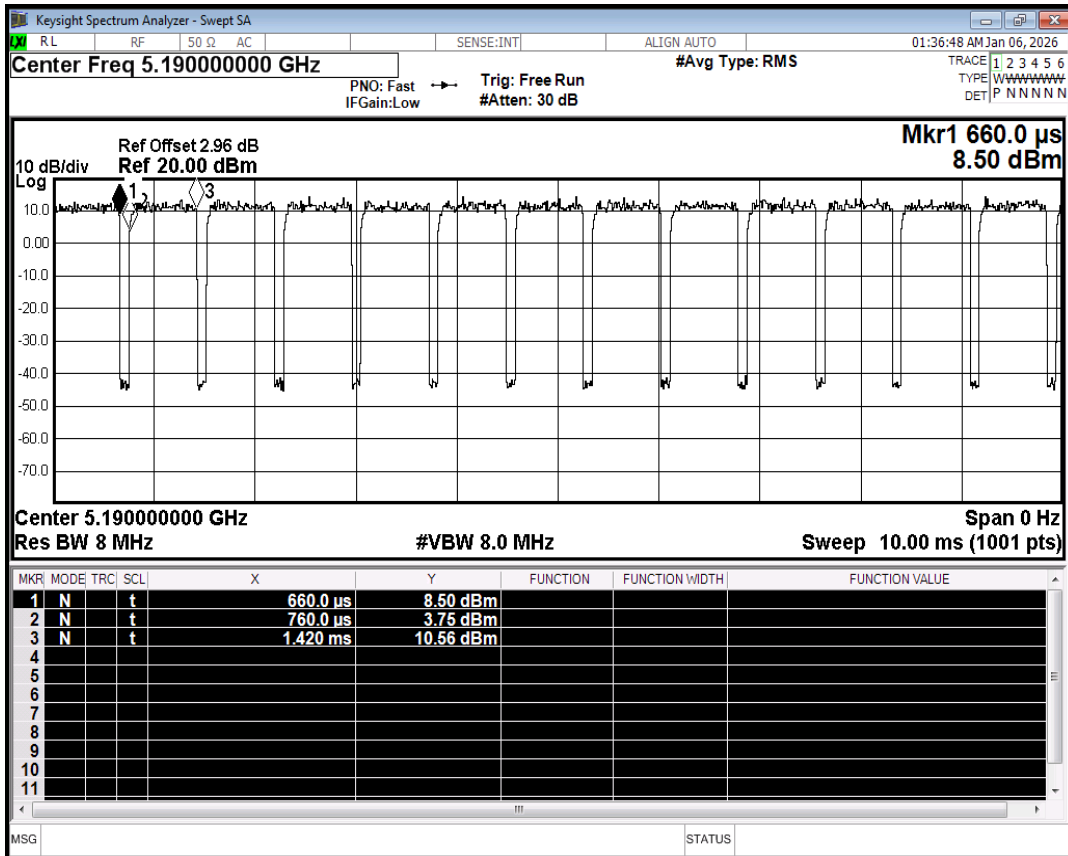


Duty Cycle NVNT n40 5190MHz Ant1

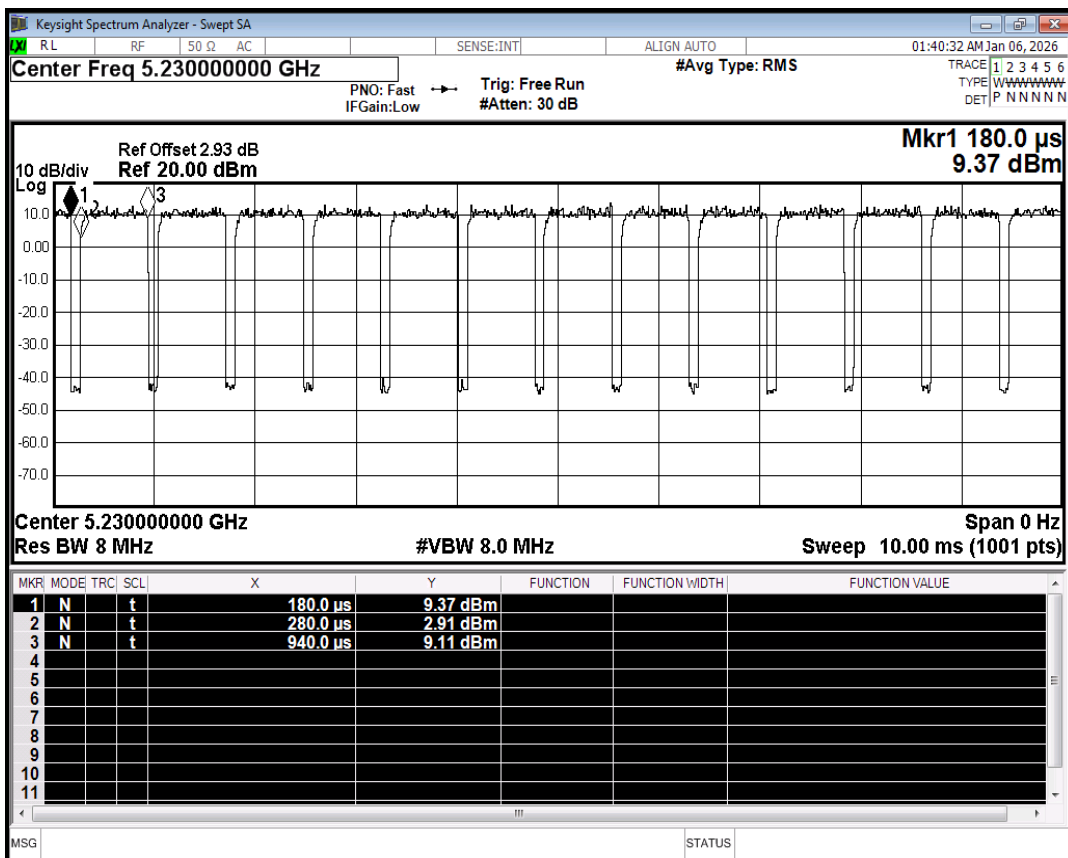


Duty Cycle NVNT n40 5230MHz Ant1

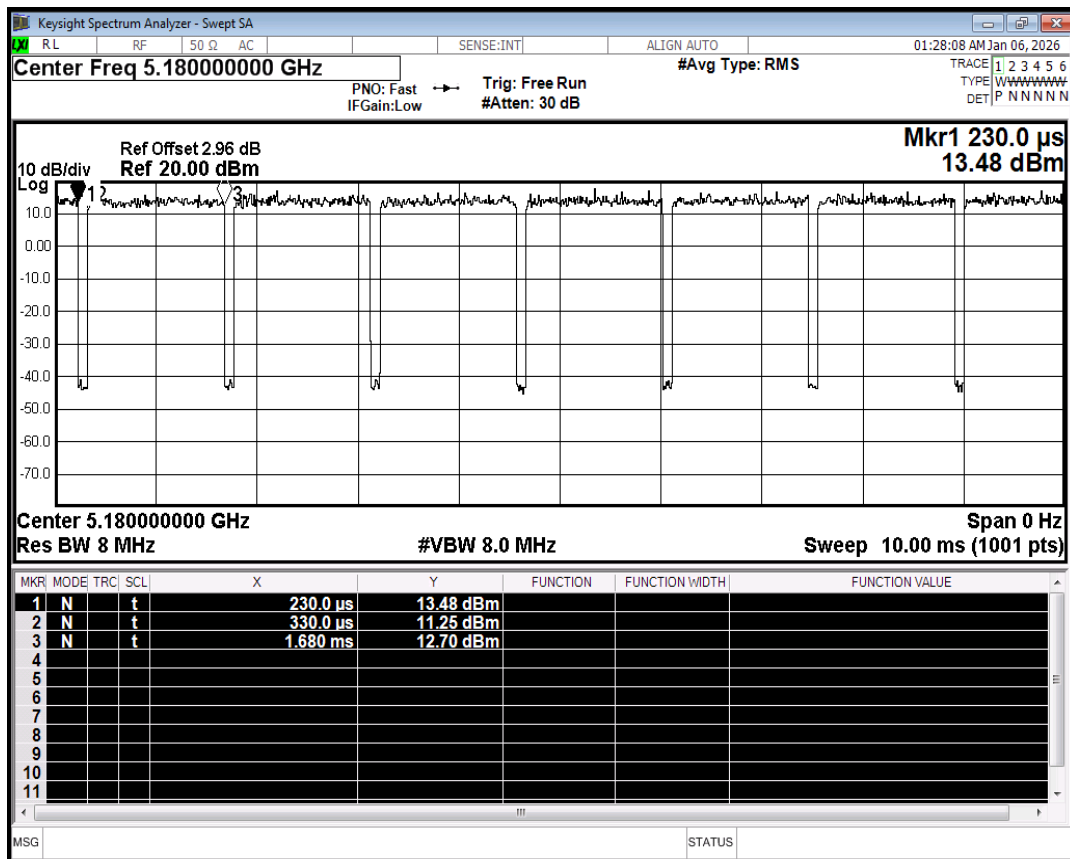


Duty Cycle NVNT ac20 5180MHz Ant1

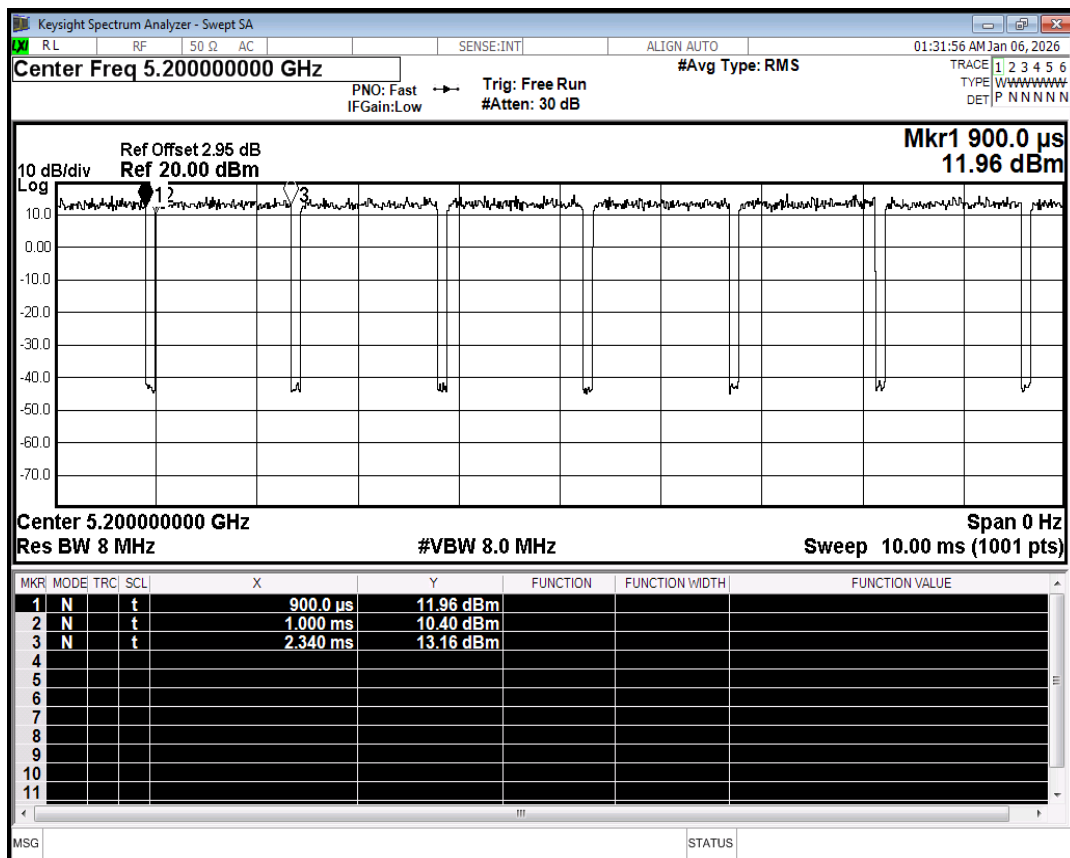


Duty Cycle NVNT ac20 5200MHz Ant1

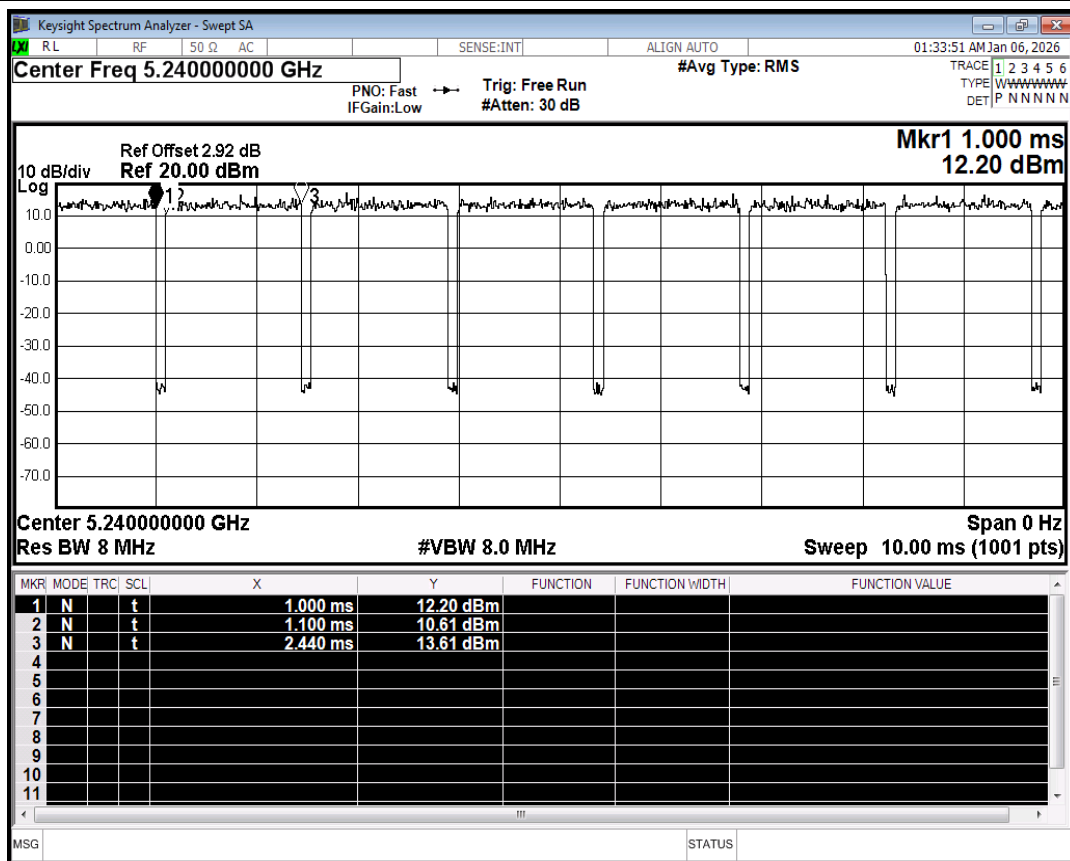


Duty Cycle NVNT ac20 5240MHz Ant1

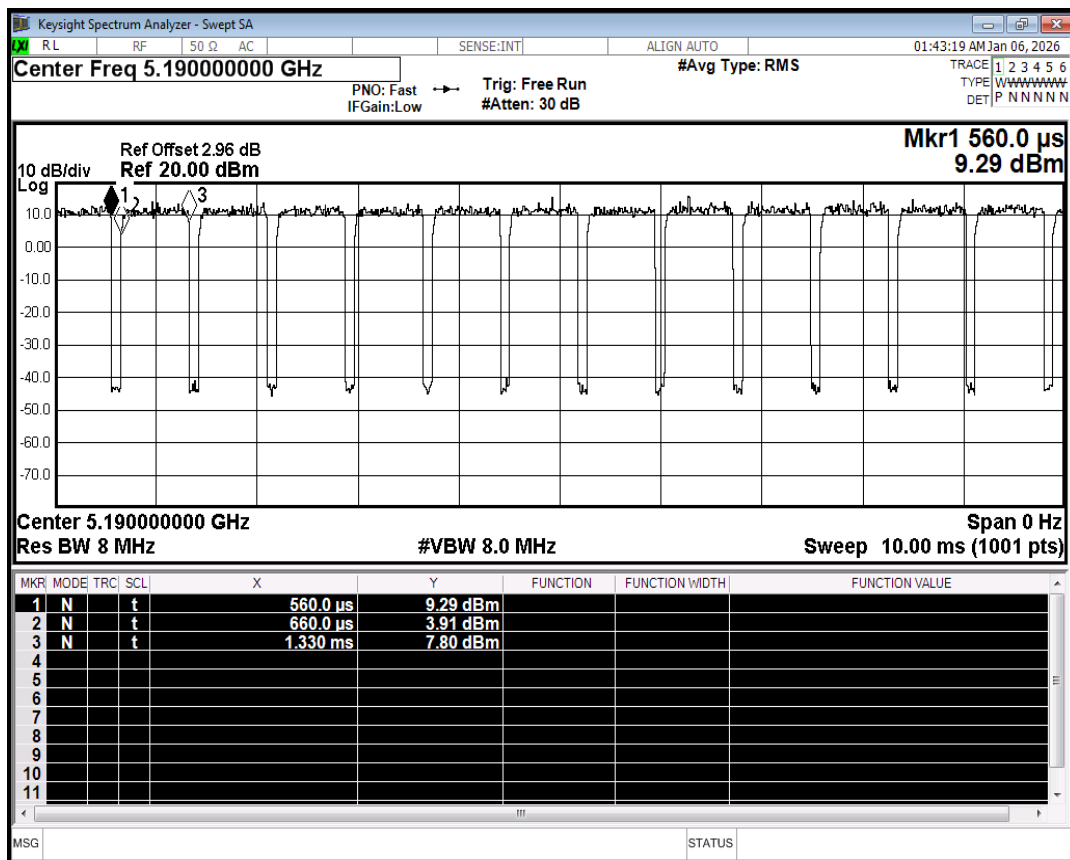

Duty Cycle NVNT ac40 5190MHz Ant1

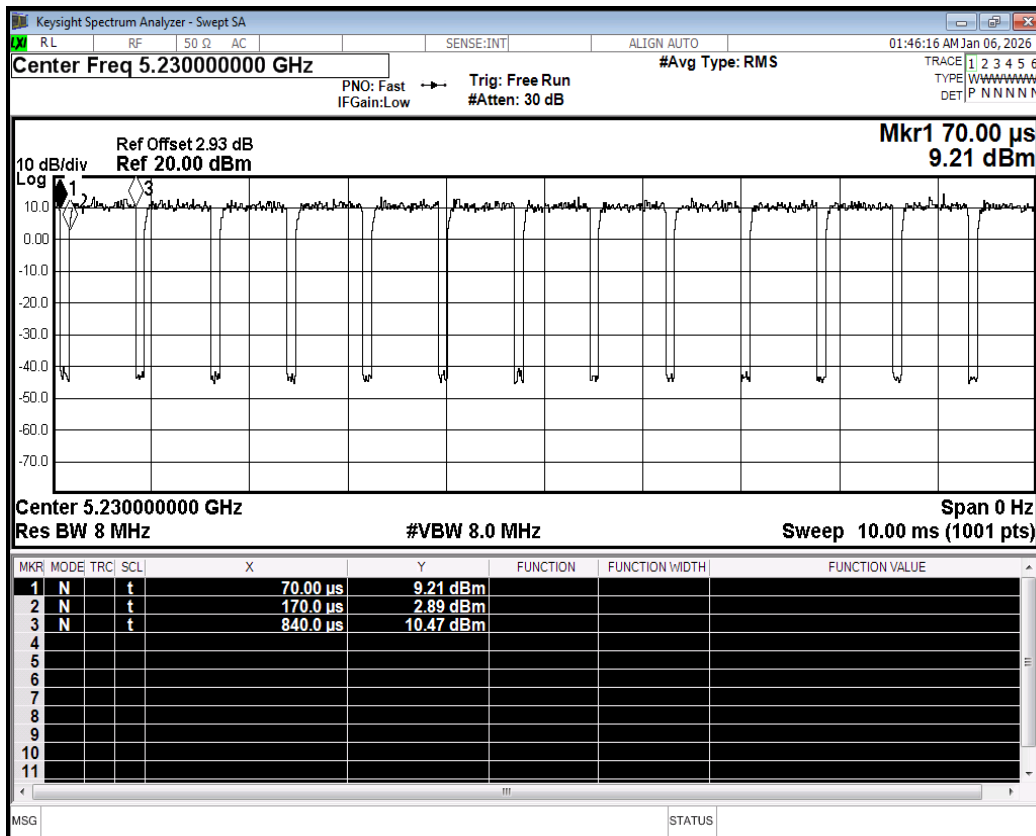

Duty Cycle NVNT ac40 5230MHz Ant1

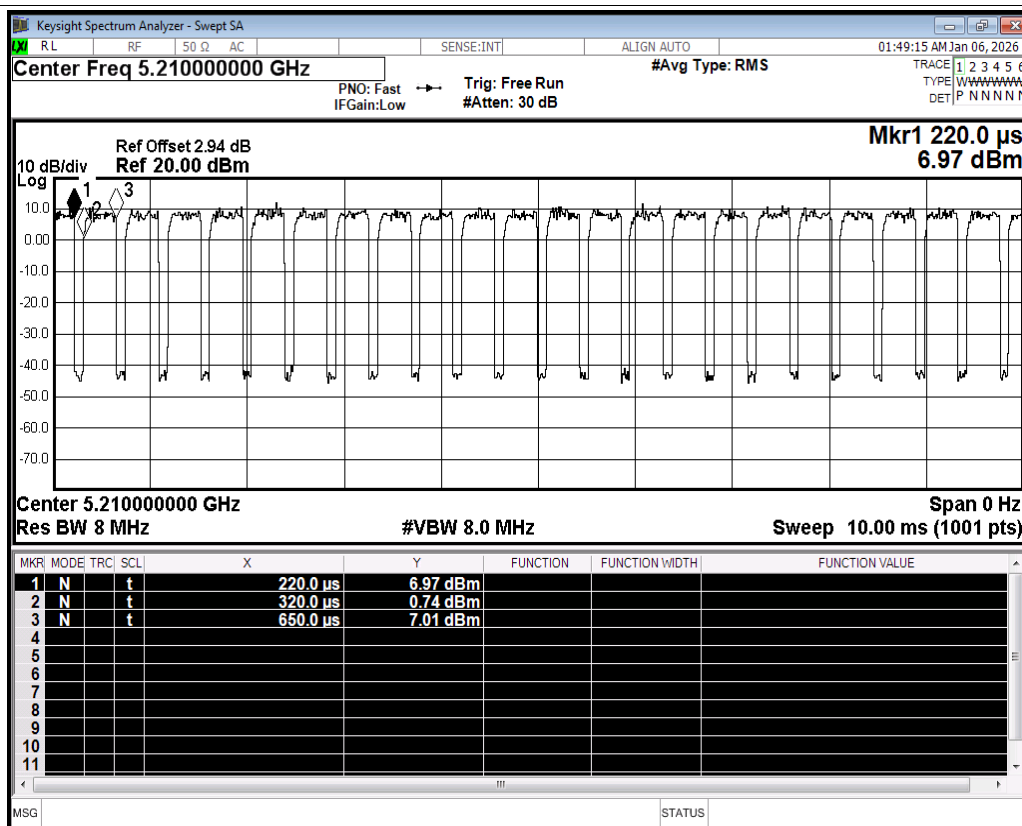

Duty Cycle NVNT ac80 5210MHz Ant1