



TEST REPORT

Test item description: OKIVIVI AI TOY
FCC ID: 2BUTL-P261001
Trademark(s): OKIVIVI
Model/Type reference: P261001
Applicant's name: CarbonLume Intelligent Trading (Shenzhen) Co., Ltd
Address: Room 12, 6FB Area, Shenzhou Computer Building, Curie Avenue, Bantian Street, Longgang District, Shenzhen City, Guangdong Province, China
Manufacturer: CarbonLume Intelligent Trading (Shenzhen) Co., Ltd
Address: Room 12, 6FB Area, Shenzhou Computer Building, Curie Avenue, Bantian Street, Longgang District, Shenzhen City, Guangdong Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jan. 22, 2026
Sample tested Date: Jan. 22, 2026 to Mar. 24, 2026
Issue Date: Mar. 24, 2026
Report No.: CTB26012215802RF02
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Kai Chen

Martin Feng

Martin FengBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	4
2. TEST SUMMARY.....	5
3. MEASUREMENT UNCERTAINTY.....	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration.....	7
4.3 Support Equipment.....	7
4.4 Channel List	7
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED.....	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup.....	12
6.2 Limit.....	12
6.3 Test procedure	12
6.4 Test Result.....	14
7. RADIATED SPURIOUS EMISSION.....	16
7.1 Block Diagram Of Test Setup.....	16
7.2 Limit.....	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF COUNDUCTED SPURIOUS EMISSIONS.....	50
8.1 Block Diagram Of Test Setup.....	50
8.2 Limit.....	50
8.3 Test procedure	50
8.4 Test Result.....	51
9. CONDUCTED OUTPUT POWER	63
9.1 Block Diagram Of Test Setup.....	63
9.2 Limit.....	63
9.3 Test procedure	63
9.4 Test Result.....	63
10. 6DB OCCUPIED BANDWIDTH	66
10.1 Block Diagram Of Test Setup.....	66
10.2 Limit.....	66
10.3 Test procedure	66

10.4	Test Result	67
11.	POWER SPECTRAL DENSITY	74
11.1	Block Diagram Of Test Setup	74
11.2	Limit.....	74
11.3	Test procedure	74
11.4	Test Result	75
12.	ANTENNA REQUIREMENT	82
13.	EUT TEST SETUP PHOTOGRAPHS	83
	(NOTE: N/A MEANS NOT APPLICABLE)	



1. VERSION

Report No.	Issue Date	Description	Approved
CTB26012215802RF02	Mar. 24, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density, Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9kHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
Humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	P261001
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n/ax
Hardware Version:	V1.0
Software Version:	V1.3
Operation Frequency:	WiFi: IEEE 802.11b/g/n/ax20: 2412-2462MHz/ 11 channel IEEE 802.11n/ax40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 8.816dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM, OFDMA
Antenna installation:	WiFi (2.4G): FPC antenna
Antenna Gain:	WiFi (2.4G): 2.29dBi
Ratings:	DC 5V charging from adapter DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n/ax40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	288.9M
802.11n40	600M
802.11/ax20	1147.069M
802.11/ax40	2294.118M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22

18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1


Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/9/19	2026/9/18
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.2 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/8	2027/6/7
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/9/19	2026/9/18
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/30	2026/5/29

6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/9/19	2026/9/18
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/	/
9	Coaxial cable	Rosenberg	8m	/	/	2025/9/19	2026/9/18
10	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18
11	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18
12	Coaxial cable	Times	1m	/	/	2025/9/19	2026/9/18
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

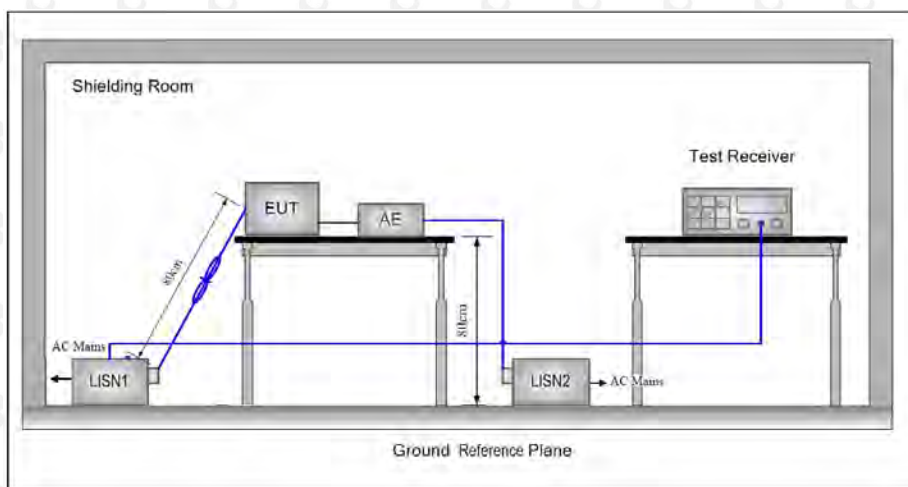

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.

6.4 Test Result

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

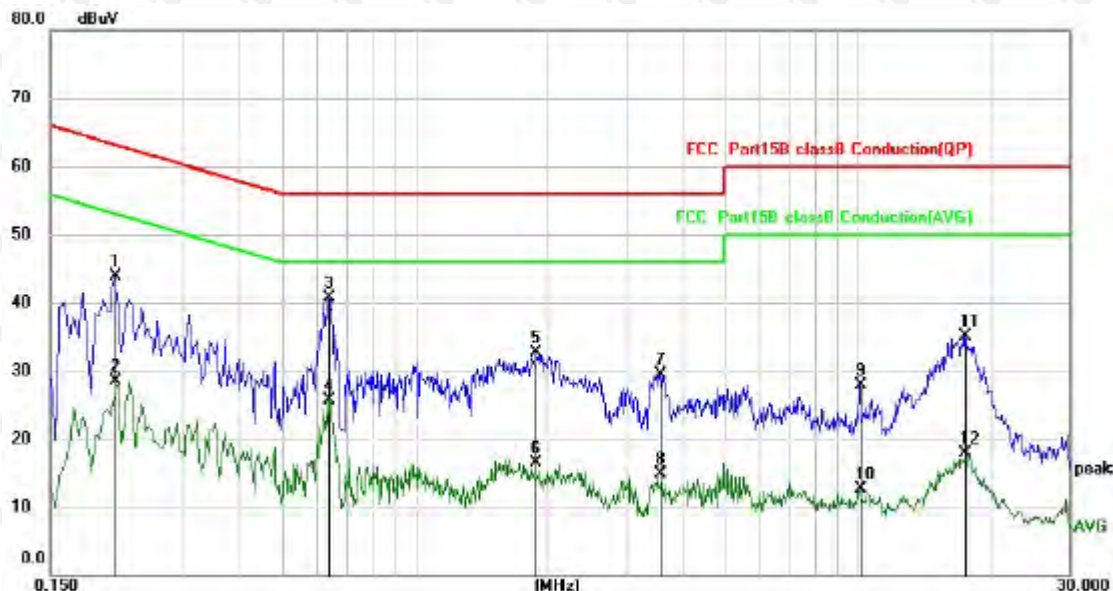


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.2100	33.80	10.08	43.88	63.21	-19.33	QP
2		0.2100	18.44	10.08	28.52	53.21	-24.69	AVG
3	*	0.6380	30.61	10.10	40.71	56.00	-15.29	QP
4		0.6380	15.56	10.10	25.66	46.00	-20.34	AVG
5		1.8778	22.61	10.17	32.78	56.00	-23.22	QP
6		1.8778	6.40	10.17	16.57	46.00	-29.43	AVG
7		3.5819	19.25	10.23	29.48	56.00	-26.52	QP
8		3.5819	4.68	10.23	14.91	46.00	-31.09	AVG
9		10.1059	17.39	10.45	27.84	60.00	-32.16	QP
10		10.1059	2.22	10.45	12.67	50.00	-37.33	AVG
11		17.4057	24.30	10.84	35.14	60.00	-24.86	QP
12		17.4057	7.16	10.84	18.00	50.00	-32.00	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

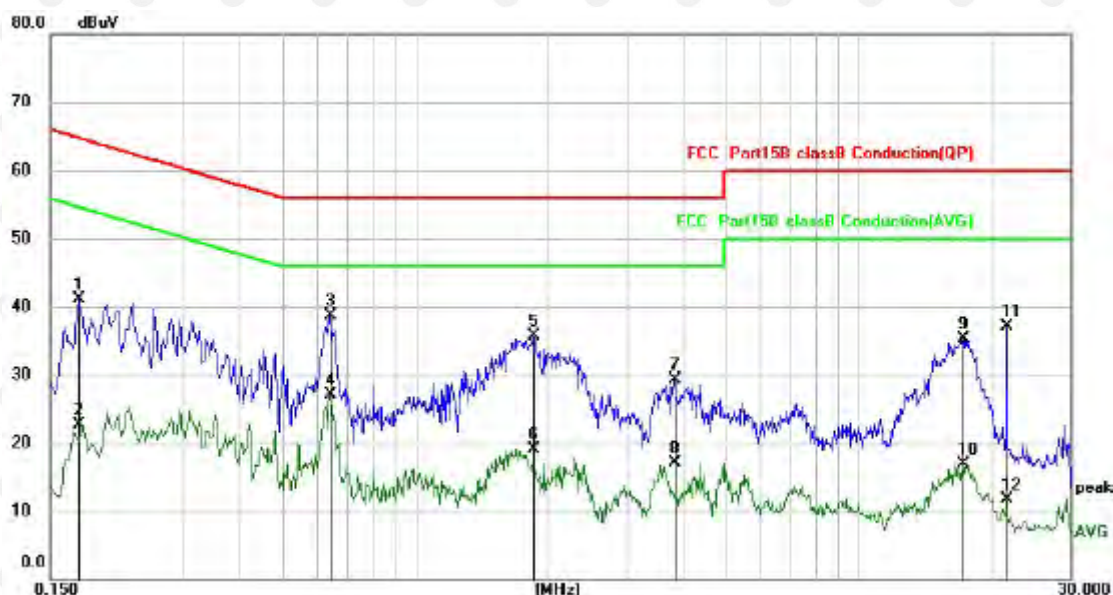

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1737	31.09	10.07	41.16	64.78	-23.62	QP
2		0.1737	12.67	10.07	22.74	54.78	-32.04	AVG
3	*	0.6419	28.55	10.10	38.65	56.00	-17.35	QP
4		0.6419	16.98	10.10	27.08	46.00	-18.92	AVG
5		1.8420	25.56	10.16	35.72	56.00	-20.28	QP
6		1.8420	8.91	10.16	19.07	46.00	-26.93	AVG
7		3.8300	18.98	10.24	29.22	56.00	-26.78	QP
8		3.8300	6.81	10.24	17.05	46.00	-28.95	AVG
9		17.1100	24.53	10.83	35.36	60.00	-24.64	QP
10		17.1100	6.02	10.83	16.85	50.00	-33.15	AVG
11		21.5500	25.99	11.03	37.02	60.00	-22.98	QP
12		21.5500	0.61	11.03	11.64	50.00	-38.36	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

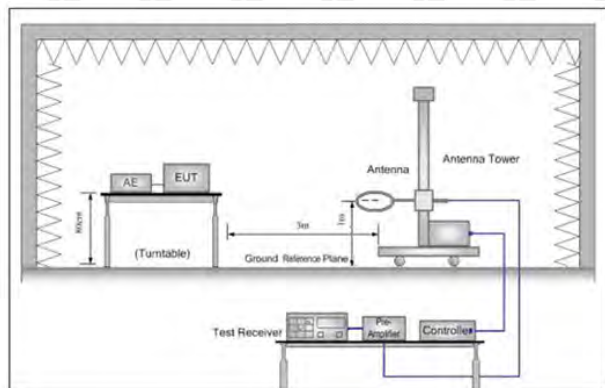


Figure 1. Below 30MHz

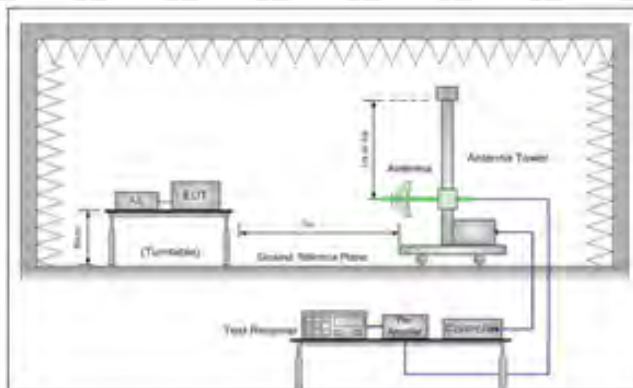


Figure 2. 30MHz to 1GHz

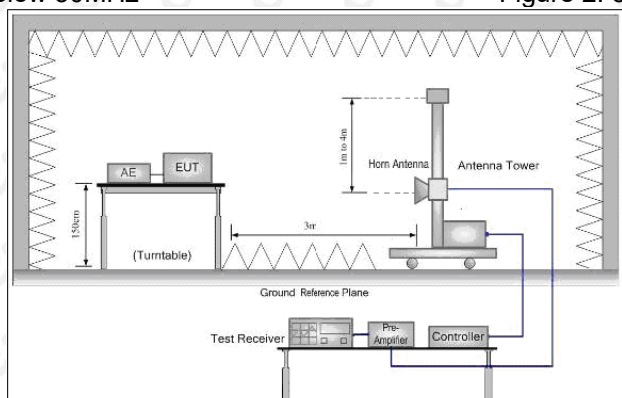


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i. Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	1/T	Average

7.4 Test Result

Below 1GHz Test Results:


Antenna polarity: H

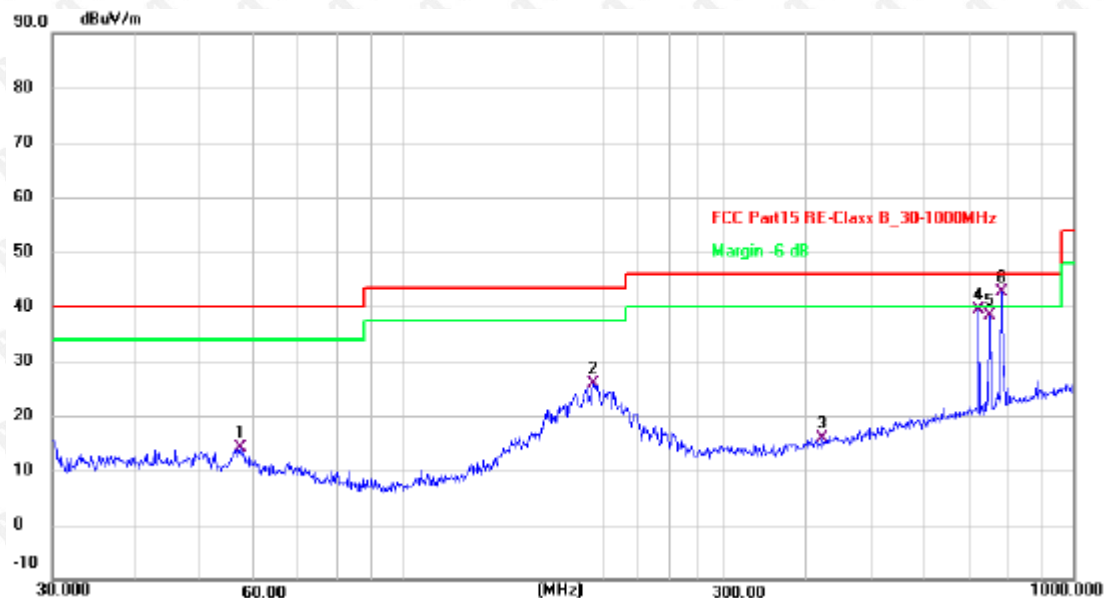

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	57.1914	27.68	-13.57	14.11	40.00	-25.89	QP
2	192.4185	41.34	-15.55	25.79	43.50	-17.71	QP
3	422.0577	25.79	-9.80	15.99	46.00	-30.01	QP
4	721.7258	42.82	-3.35	39.47	46.00	-6.53	QP
5	750.1082	41.34	-2.92	38.42	46.00	-7.58	QP
6 *	782.3453	45.05	-2.43	42.62	46.00	-3.38	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

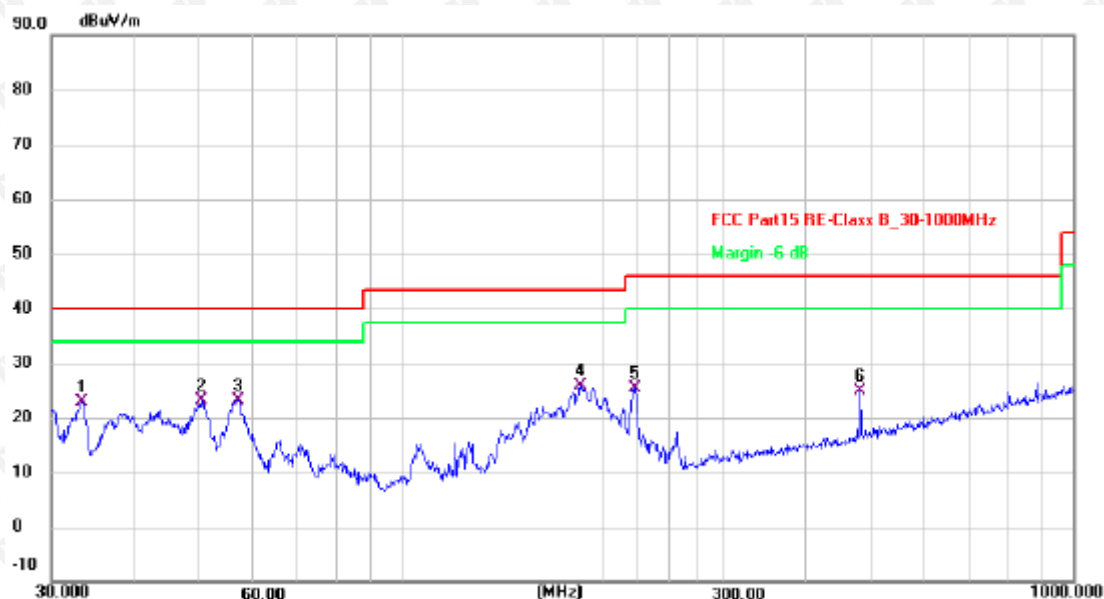

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.3278	36.41	-13.49	22.92	40.00	-17.08	QP
2	50.2324	36.34	-13.19	23.15	40.00	-16.85	QP
3 *	56.9912	36.74	-13.55	23.19	40.00	-16.81	QP
4	184.4898	40.66	-14.90	25.76	43.50	-17.74	QP
5	222.1697	40.26	-14.97	25.29	46.00	-20.71	QP
6	480.5276	33.18	-8.42	24.76	46.00	-21.24	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MHz measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.04	-3.64	62.40	74	-11.60	peak
4824	49.45	-3.64	45.81	54	-8.19	AVG
7236	56.69	-0.95	55.74	74	-18.26	peak
7236	45.90	-0.95	44.95	54	-9.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.55	-3.64	61.91	74	-12.09	peak
4824	47.14	-3.64	43.50	54	-10.50	AVG
7236	58.12	-0.95	57.17	74	-16.83	peak
7236	45.26	-0.95	44.31	54	-9.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.34	-3.51	60.83	74	-13.17	peak
4874	47.96	-3.51	44.45	54	-9.55	AVG
7311	58.65	-0.82	57.83	74	-16.17	peak
7311	43.90	-0.82	43.08	54	-10.92	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	65.50	-3.51	61.99	74	-12.01	peak
4874	49.12	-3.51	45.61	54	-8.39	AVG
7311	60.01	-0.82	59.19	74	-14.81	peak
7311	43.78	-0.82	42.96	54	-11.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	62.64	-3.43	59.21	74	-14.79	peak
4924	48.82	-3.43	45.39	54	-8.61	AVG
7386	57.76	-0.75	57.01	74	-16.99	peak
7386	42.66	-0.75	41.91	54	-12.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	64.85	-3.43	61.42	74	-12.58	peak
4924	46.97	-3.43	43.54	54	-10.46	AVG
7386	57.40	-0.75	56.65	74	-17.35	peak
7386	41.61	-0.75	40.86	54	-13.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.80	-3.64	62.16	74	-11.84	peak
4824	49.47	-3.64	45.83	54	-8.17	AVG
7236	58.82	-0.95	57.87	74	-16.13	peak
7236	46.13	-0.95	45.18	54	-8.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.01	-3.64	58.37	74	-15.63	peak
4824	47.06	-3.64	43.42	54	-10.58	AVG
7236	60.53	-0.95	59.58	74	-14.42	peak
7236	44.23	-0.95	43.28	54	-10.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.46	-3.51	59.95	74	-14.05	peak
4874	47.10	-3.51	43.59	54	-10.41	AVG
7311	58.23	-0.82	57.41	74	-16.59	peak
7311	45.14	-0.82	44.32	54	-9.68	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.47	-3.51	59.96	74	-14.04	peak
4874	48.31	-3.51	44.80	54	-9.20	AVG
7311	57.54	-0.82	56.72	74	-17.28	peak
7311	42.66	-0.82	41.84	54	-12.16	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Level Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	65.25	-3.43	61.82	74	-12.18	peak
4924	49.54	-3.43	46.11	54	-7.89	AVG
7386	56.27	-0.75	55.52	74	-18.48	peak
7386	41.81	-0.75	41.06	54	-12.94	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	62.27	-3.43	58.84	74	-15.16	peak
4924	46.93	-3.43	43.50	54	-10.50	AVG
7386	57.37	-0.75	56.62	74	-17.38	peak
7386	41.46	-0.75	40.71	54	-13.29	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.80	-3.64	59.16	74	-14.84	peak
4824	46.44	-3.64	42.80	54	-11.20	AVG
7236	57.95	-0.95	57.00	74	-17.00	peak
7236	44.86	-0.95	43.91	54	-10.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.23	-3.64	61.59	74	-12.41	peak
4824	49.87	-3.64	46.23	54	-7.77	AVG
7236	58.77	-0.95	57.82	74	-16.18	peak
7236	43.84	-0.95	42.89	54	-11.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874.00	65.89	-3.51	62.38	74.00	-11.62	peak
4874.00	48.45	-3.51	44.94	54.00	-9.06	AVG
7311.00	57.23	-0.82	56.41	74.00	-17.59	peak
7311.00	45.72	-0.82	44.90	54.00	-9.10	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874.00	62.36	-3.51	58.85	74.00	-15.15	peak
4874.00	46.89	-3.51	43.38	54.00	-10.62	AVG
7311.00	56.73	-0.82	55.91	74.00	-18.09	peak
7311.00	41.99	-0.82	41.17	54.00	-12.83	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924	61.97	-3.43	58.54	74	-15.46	peak
4924	47.23	-3.43	43.80	54	-10.20	AVG
7386	58.37	-0.75	57.62	74	-16.38	peak
7386	41.44	-0.75	40.69	54	-13.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924	65.38	-3.43	61.95	74	-12.05	peak
4924	45.29	-3.43	41.86	54	-12.14	AVG
7386	57.15	-0.75	56.40	74	-17.60	peak
7386	42.15	-0.75	41.40	54	-12.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844	65.28	-3.63	61.65	74	-12.35	peak
4844	47.48	-3.63	43.85	54	-10.15	AVG
7266	58.68	-0.94	57.74	74	-16.26	peak
7266	45.72	-0.94	44.78	54	-9.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.78	-3.63	62.15	74	-11.85	peak
4844	49.05	-3.63	45.42	54	-8.58	AVG
7266	58.46	-0.94	57.52	74	-16.48	peak
7266	44.43	-0.94	43.49	54	-10.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874	64.76	-3.51	61.25	74	-12.75	peak
4874	47.21	-3.51	43.70	54	-10.30	AVG
7311	59.58	-0.82	58.76	74	-15.24	peak
7311	45.35	-0.82	44.53	54	-9.47	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874	62.30	-3.51	58.79	74	-15.21	peak
4874	46.43	-3.51	42.92	54	-11.08	AVG
7311	56.71	-0.82	55.89	74	-18.11	peak
7311	43.35	-0.82	42.53	54	-11.47	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4904	65.10	-3.43	61.67	74	-12.33	peak
4904	46.66	-3.43	43.23	54	-10.77	AVG
7356	56.75	-0.75	56.00	74	-18.00	peak
7356	41.27	-0.75	40.52	54	-13.48	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4904	62.53	-3.43	59.10	74	-14.90	peak
4904	47.40	-3.43	43.97	54	-10.03	AVG
7356	58.74	-0.75	57.99	74	-16.01	peak
7356	44.96	-0.75	44.21	54	-9.79	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

LOW CH1 (802.11ax/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	63.22	-3.64	59.58	74	-14.42	peak
4824	47.68	-3.64	44.04	54	-9.96	AVG
7236	59.19	-0.95	58.24	74	-15.76	peak
7236	44.76	-0.95	43.81	54	-10.19	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.56	-3.64	61.92	74	-12.08	peak
4824	49.50	-3.64	45.86	54	-8.14	AVG
7236	59.31	-0.95	58.36	74	-15.64	peak
7236	43.37	-0.95	42.42	54	-11.58	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11ax/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874.00	63.62	-3.51	60.11	74.00	-13.89	peak
4874.00	47.72	-3.51	44.21	54.00	-9.79	AVG
7311.00	57.80	-0.82	56.98	74.00	-17.02	peak
7311.00	45.96	-0.82	45.14	54.00	-8.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874.00	63.06	-3.51	59.55	74.00	-14.45	peak
4874.00	45.94	-3.51	42.43	54.00	-11.57	AVG
7311.00	59.27	-0.82	58.45	74.00	-15.55	peak
7311.00	41.94	-0.82	41.12	54.00	-12.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits						

HIGH CH11 (802.11ax/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924	63.93	-3.43	60.50	74	-13.50	peak
4924	46.94	-3.43	43.51	54	-10.49	AVG
7386	57.83	-0.75	57.08	74	-16.92	peak
7386	43.10	-0.75	42.35	54	-11.65	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924	64.99	-3.43	61.56	74	-12.44	peak
4924	46.35	-3.43	42.92	54	-11.08	AVG
7386	58.25	-0.75	57.50	74	-16.50	peak
7386	44.00	-0.75	43.25	54	-10.75	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits

LOW CH3 (802.11ax/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844	63.03	-3.63	59.40	74	-14.60	peak
4844	47.88	-3.63	44.25	54	-9.75	AVG
7266	59.90	-0.94	58.96	74	-15.04	peak
7266	45.23	-0.94	44.29	54	-9.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.39	-3.63	60.76	74	-13.24	peak
4844	47.67	-3.63	44.04	54	-9.96	AVG
7266	58.04	-0.94	57.10	74	-16.90	peak
7266	44.22	-0.94	43.28	54	-10.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11ax/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874	64.63	-3.51	61.12	74	-12.88	peak
4874	49.05	-3.51	45.54	54	-8.46	AVG
7311	60.73	-0.82	59.91	74	-14.09	peak
7311	45.35	-0.82	44.53	54	-9.47	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.34	-0.82	42.52	54	-11.48	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

HIGH CH9 (802.11ax/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4904	63.68	-3.43	60.25	74	-13.75	peak
4904	47.95	-3.43	44.52	54	-9.48	AVG
7356	56.62	-0.75	55.87	74	-18.13	peak
7356	41.33	-0.75	40.58	54	-13.42	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4904	63.43	-3.43	60.00	74	-14.00	peak
4904	46.15	-3.43	42.72	54	-11.28	AVG
7356	57.47	-0.75	56.72	74	-17.28	peak
7356	44.80	-0.75	44.05	54	-9.95	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission Margin = Emission level - Limits						

Remark :

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed

(5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.15	-5.81	51.34	74	-22.66	peak
2390	/	-5.81	/	54	/	AVG
2399	64.99	-5.84	59.15	74	-14.85	peak
2399	49.46	-5.84	43.62	54	-10.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.33	-5.81	50.52	74	-23.48	peak
2390	/	-5.81	/	54	/	AVG
2399	62.72	-5.84	56.88	74	-17.12	peak
2399	47.11	-5.84	41.27	54	-12.73	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.22	-5.65	51.57	74	-22.43	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.26	-5.65	49.61	74	-24.39	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.77	-5.81	51.96	74	-22.04	peak
2390	/	-5.81	/	54	/	AVG
2399	63.15	-5.84	57.31	74	-16.69	peak
2399	47.52	-5.84	41.68	54	-12.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.25	-5.81	51.44	74	-22.56	peak
2390	/	-5.81	/	54	/	AVG
2399	62.60	-5.84	56.76	74	-17.24	peak
2399	46.77	-5.84	40.93	54	-13.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.58	-5.65	51.93	74	-22.07	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.23	-5.65	51.58	74	-22.42	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.13	-5.81	51.32	74	-22.68	peak
2390	/	-5.81	/	54	/	AVG
2399	62.30	-5.84	56.46	74	-17.54	peak
2399	47.93	-5.84	42.09	54	-11.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.12	-5.81	51.31	74	-22.69	peak
2390	/	-5.81	/	54	/	AVG
2399	60.42	-5.84	54.58	74	-19.42	peak
2399	47.98	-5.84	42.14	54	-11.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.10	-5.65	51.45	74	-22.55	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.49	-5.65	49.84	74	-24.16	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.41	-5.81	51.60	74	-22.40	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.57	-5.81	51.76	74	-22.24	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.83	-5.65	51.18	74	-22.82	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.95	-5.65	51.30	74	-22.70	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.23	-5.81	51.42	74	-22.58	peak
2390	/	-5.81	/	54	/	AVG
2399	63.41	-5.84	57.57	74	-16.43	peak
2399	48.41	-5.84	42.57	54	-11.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.40	-5.81	50.59	74	-23.41	peak
2390	/	-5.81	/	54	/	AVG
2399	60.37	-5.84	54.53	74	-19.47	peak
2399	48.20	-5.84	42.36	54	-11.64	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.19	-5.65	51.54	74	-22.46	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.19	-5.65	51.54	74	-22.46	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11ax/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.03	-5.81	52.22	74	-21.78	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.80	-5.81	51.99	74	-22.01	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.73	-5.65	51.08	74	-22.92	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.64	-5.65	50.99	74	-23.01	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

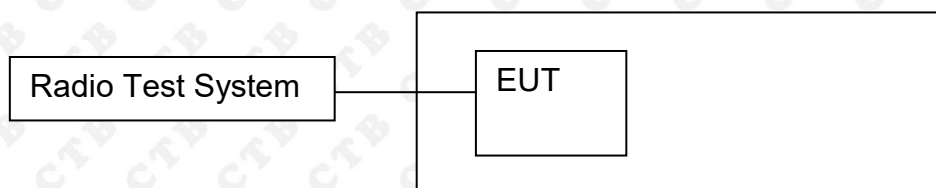

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result




BAND EDGE Graphs

802.11g/LCH

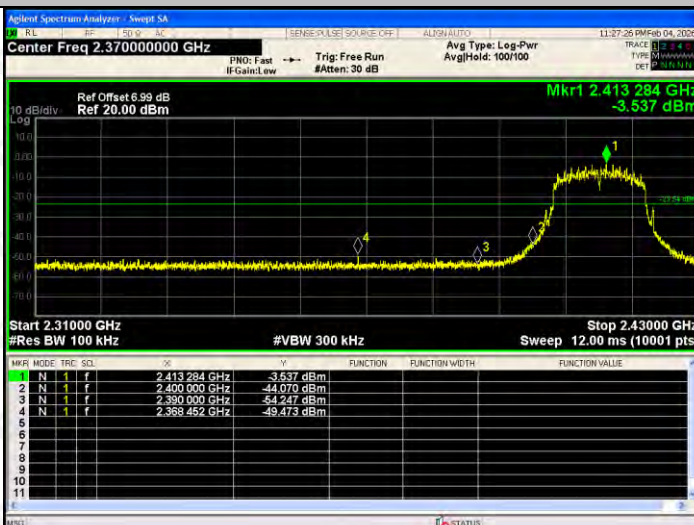


802.11g/HCH

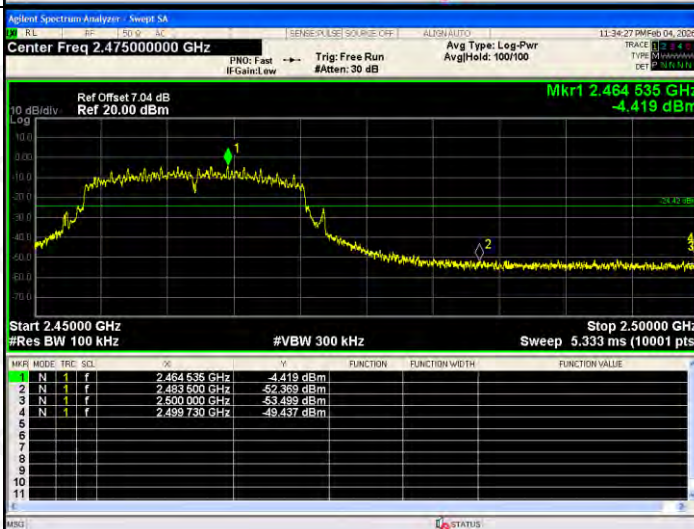


BAND EDGE Graphs

802.11n(HT20)/LCH

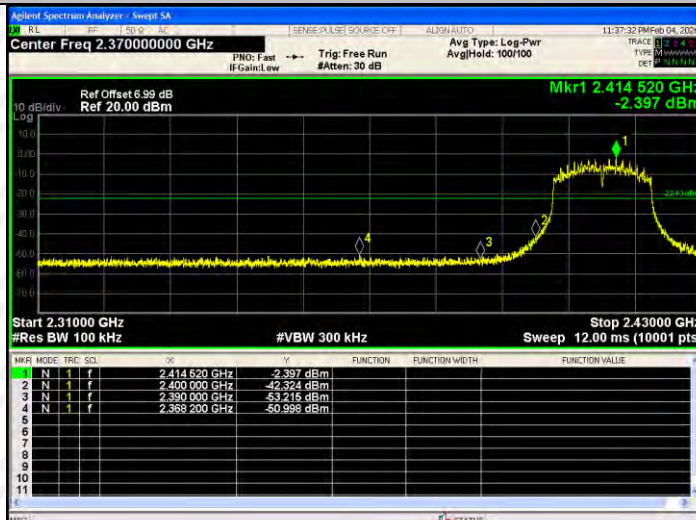


802.11n(HT20)/HCH

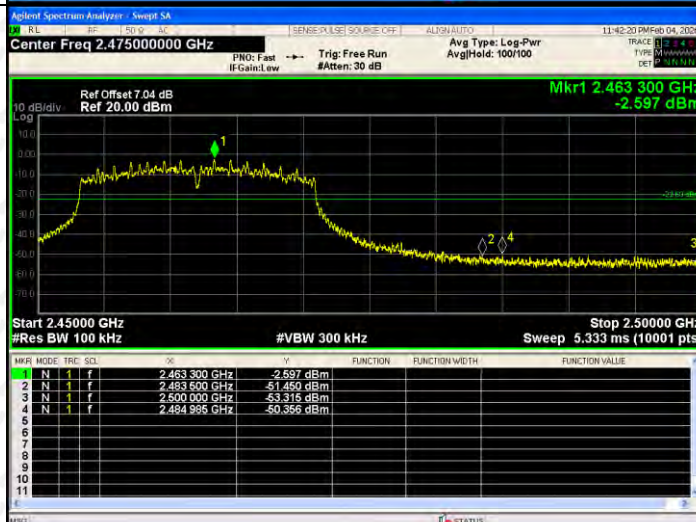


BAND EDGE Graphs

802.11n(HT40)/LCH

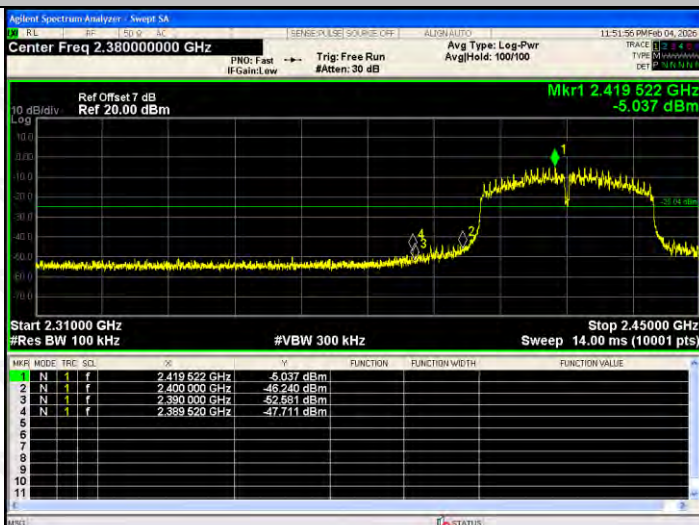


802.11n(HT40)/HCH

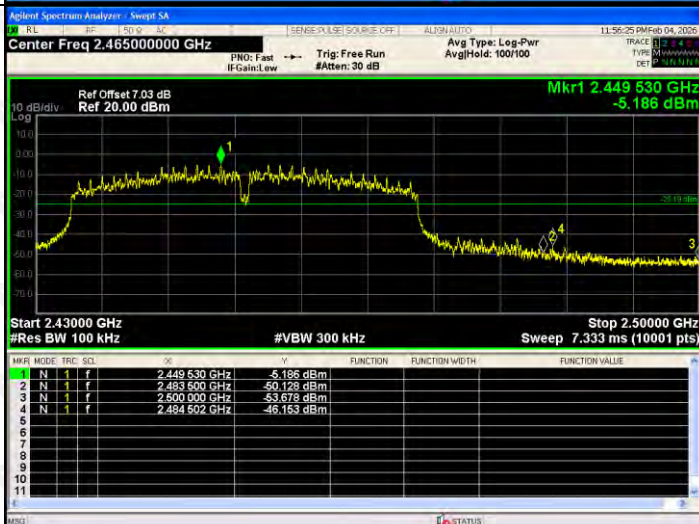


BAND EDGE Graphs

802.11ax(HE20)/LCH

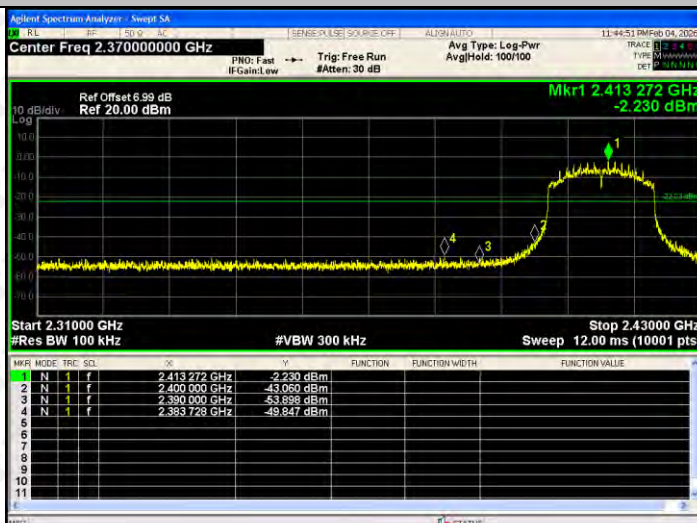


802.11ax(HE20)/HCH

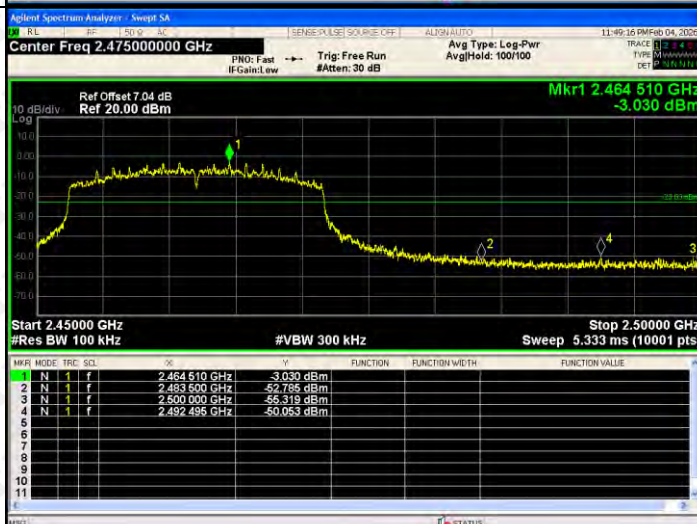


BAND EDGE Graphs

802.11ax(HE40)/LCH

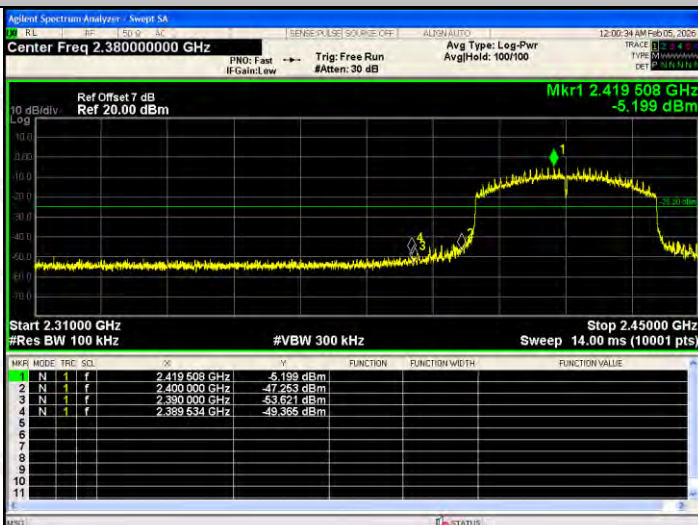


802.11ax(HE40)/HCH

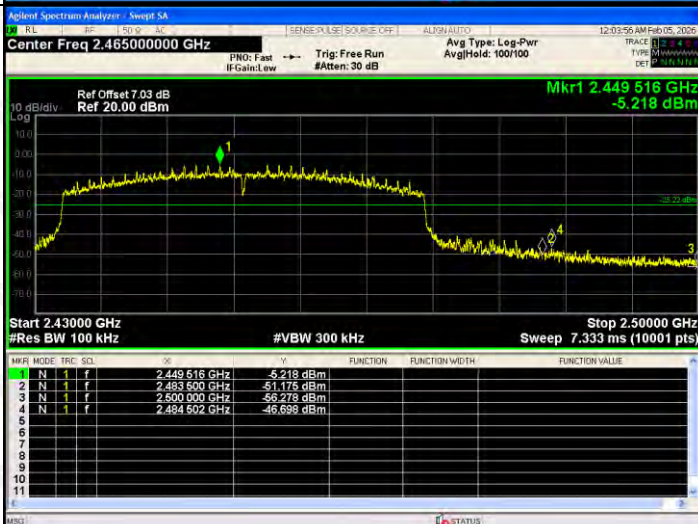


RF Conducted Spurious Emissions Graphs


802.11b/LCH

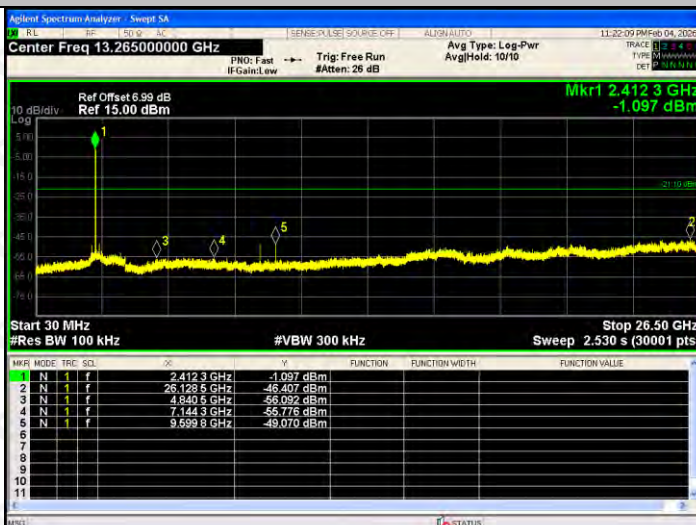

802.11b/MCH

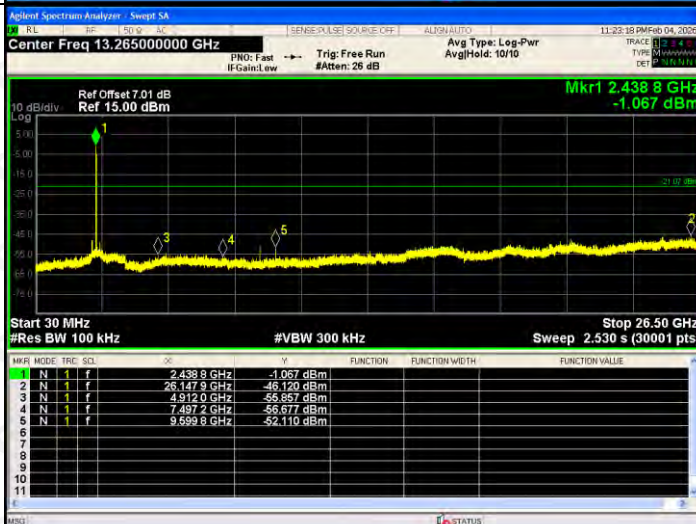


802.11b/HCH

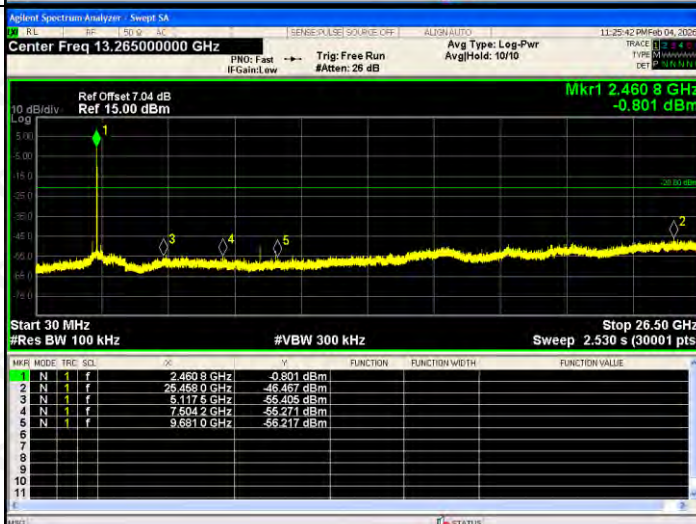


RF Conducted Spurious Emissions Graphs


802.11g/LCH

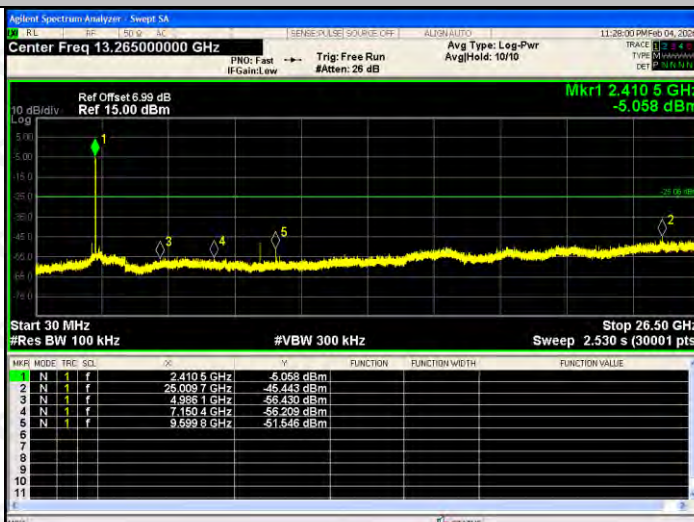

802.11g/MCH

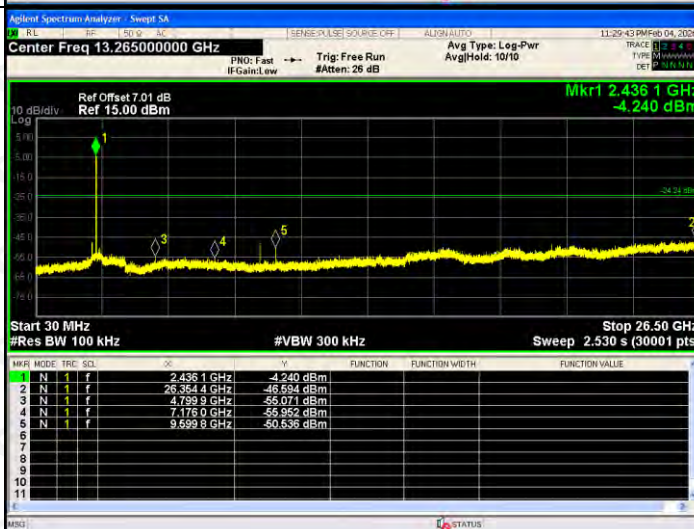


802.11g/HCH

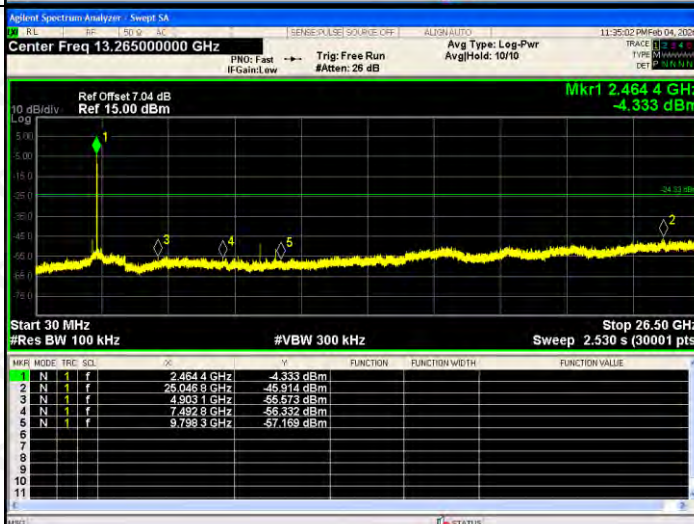


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

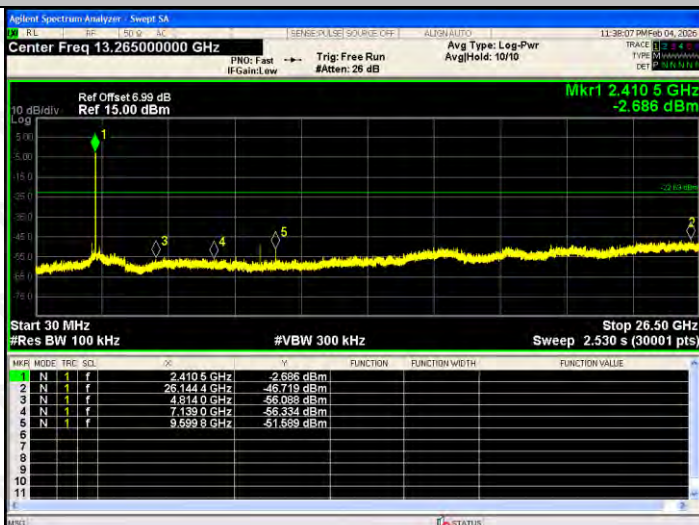

802.11n(HT20)/MCH

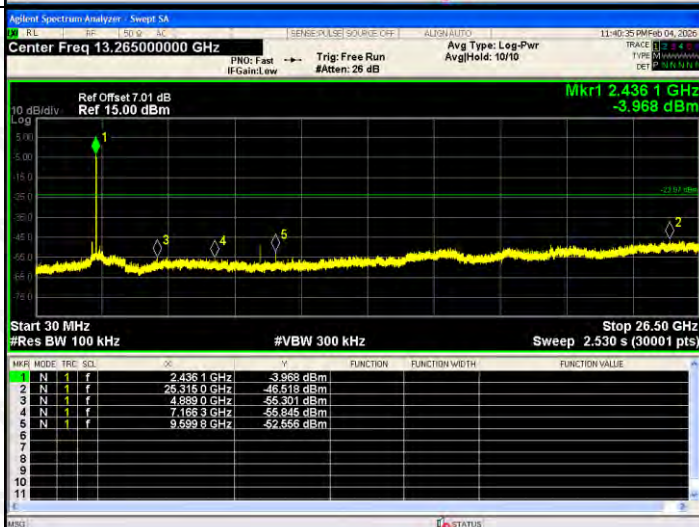


802.11n(HT20)/HCH

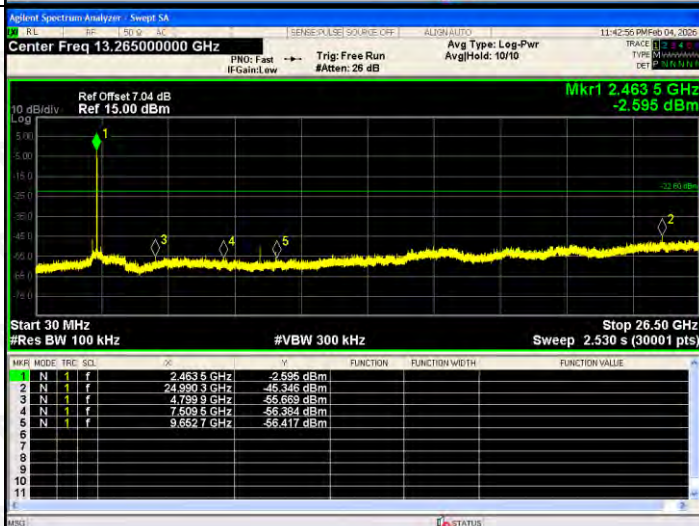


RF Conducted Spurious Emissions Graphs


802.11n(HT40)/LCH

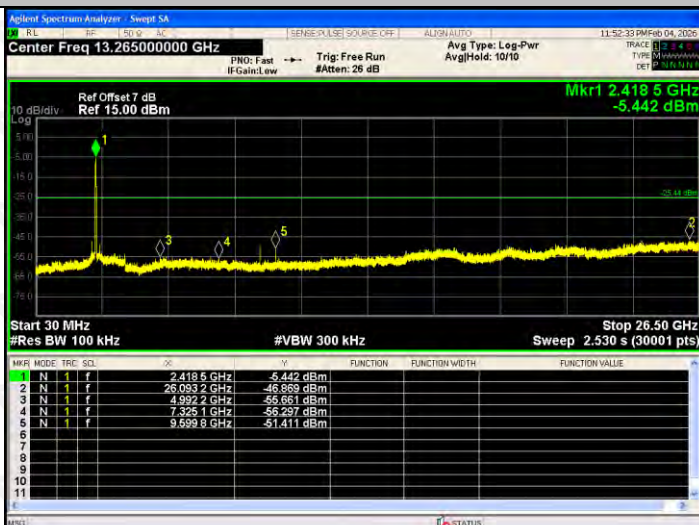

802.11n(HT40)/MCH

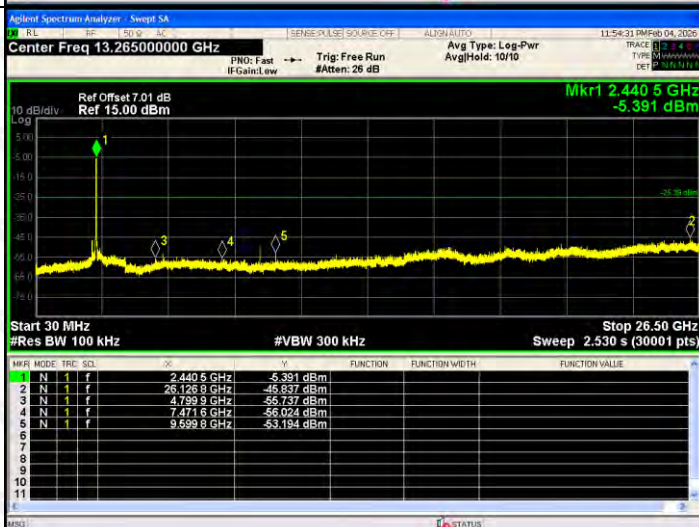


802.11n(HT40)/HCH

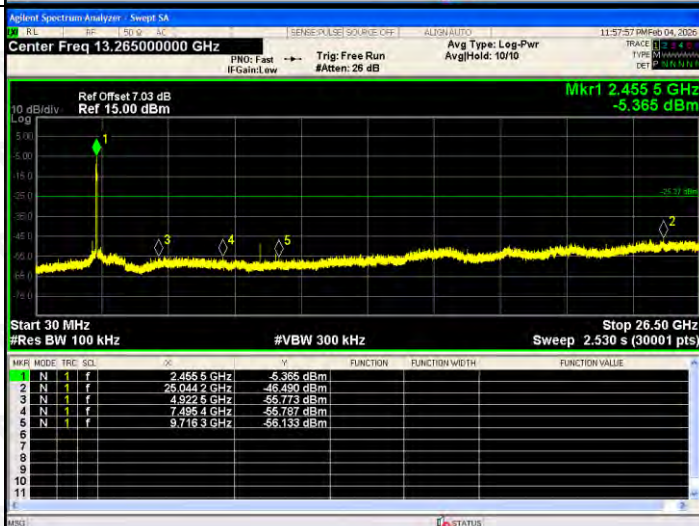


RF Conducted Spurious Emissions Graphs


802.11ax(HE20)/LCH

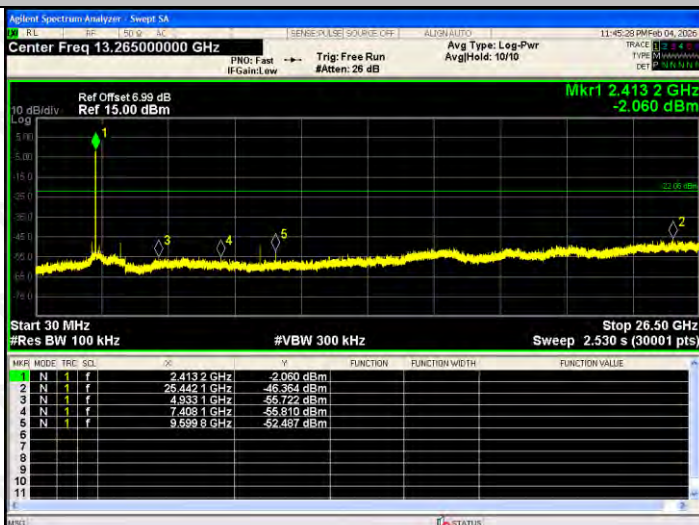

802.11ax(HE20)/MCH

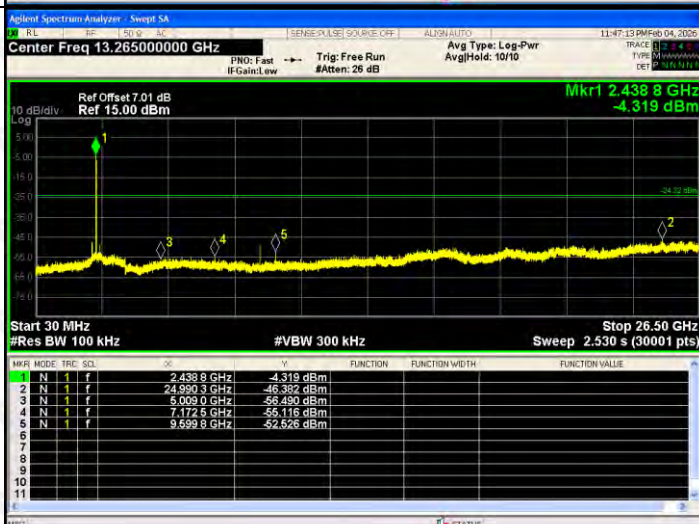


802.11ax(HE20)/HCH

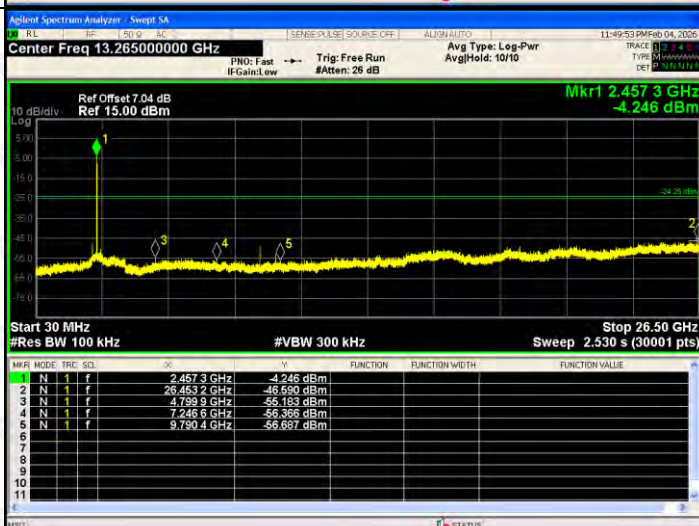


RF Conducted Spurious Emissions Graphs


802.11ax(HE40)/LCH

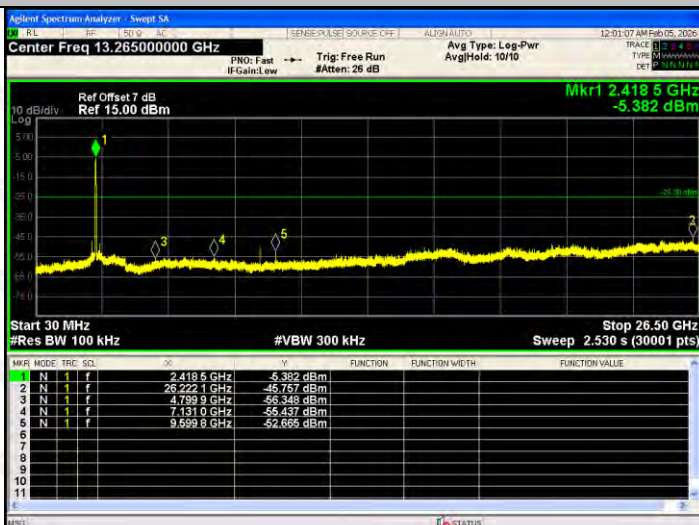

802.11ax(HE40)/MCH

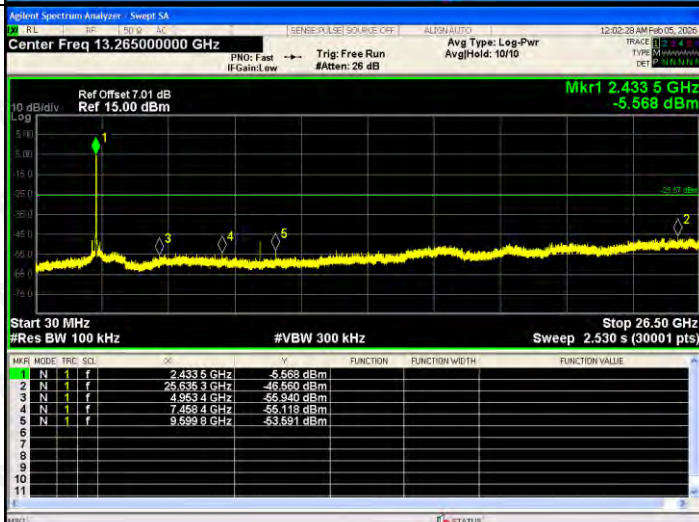

802.11ax(HE40)/HCH

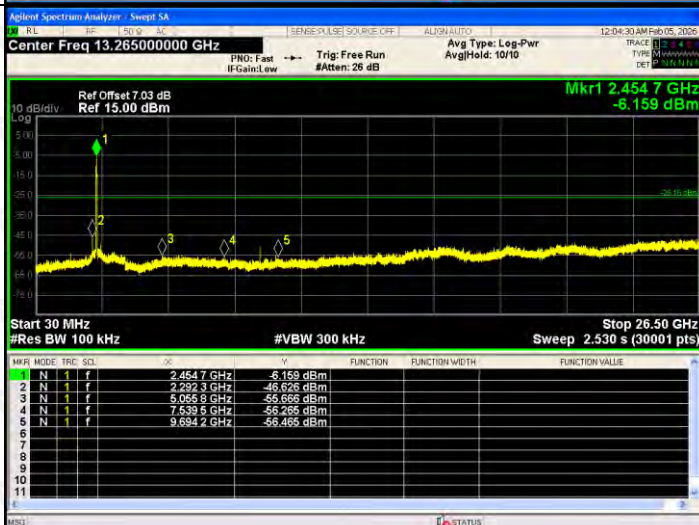

9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	8.592	30	PASS
	MCH	8.816	30	PASS
	HCH	8.707	30	PASS
802.11g	LCH	8.415	30	PASS
	MCH	8.615	30	PASS
	HCH	8.52	30	PASS
802.11n(HT20)	LCH	8.013	30	PASS
	MCH	8.145	30	PASS
	HCH	8.039	30	PASS
802.11n(HT40)	LCH	8.301	30	PASS
	MCH	8.407	30	PASS
	HCH	8.467	30	PASS
802.11ax(HE20)	LCH	8.196	30	PASS
	MCH	8.412	30	PASS
	HCH	8.298	30	PASS
802.11ax(HE40)	LCH	8.371	30	PASS
	MCH	8.464	30	PASS
	HCH	8.456	30	PASS


Duty Cycle


Mode	Channel.	Duty Cycle(%)	Correction Factor (dB)
802.11b	LCH	100	0
802.11g	LCH	100	0
802.11n(HT20)	LCH	100	0
802.11n(HT40)	LCH	100	0
802.11ax(HE20)	LCH	100	0
802.11ax(HE40)	LCH	100	0

Duty Cycle:

Test Graph:

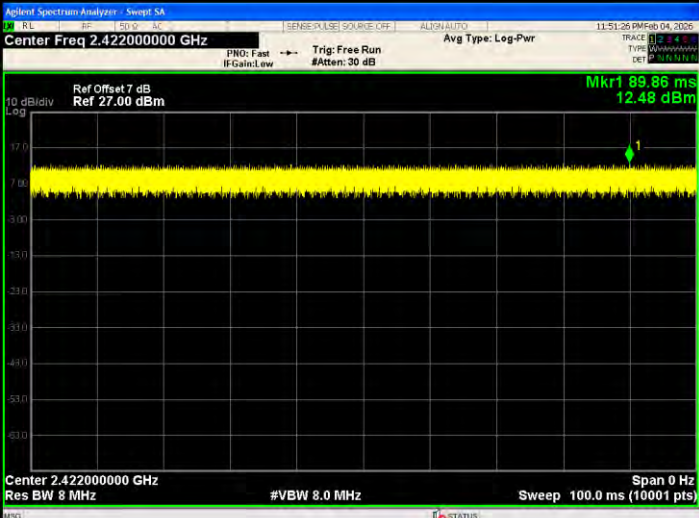


802.11n(HT20) LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Mkr1 70.35 ms 15.26 dBm Center 2.412000000 GHz Res BW 8 MHz #VBW 8.0 MHz Sweep 100.0 ms (10001 pts)
802.11n(HT40) LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr1 89.86 ms 12.48 dBm Center 2.422000000 GHz Res BW 8 MHz #VBW 8.0 MHz Sweep 100.0 ms (10001 pts)
802.11ax(HE20) LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Mkr1 46.81 ms 15.33 dBm Center 2.412000000 GHz Res BW 8 MHz #VBW 8.0 MHz Sweep 100.0 ms (10001 pts)

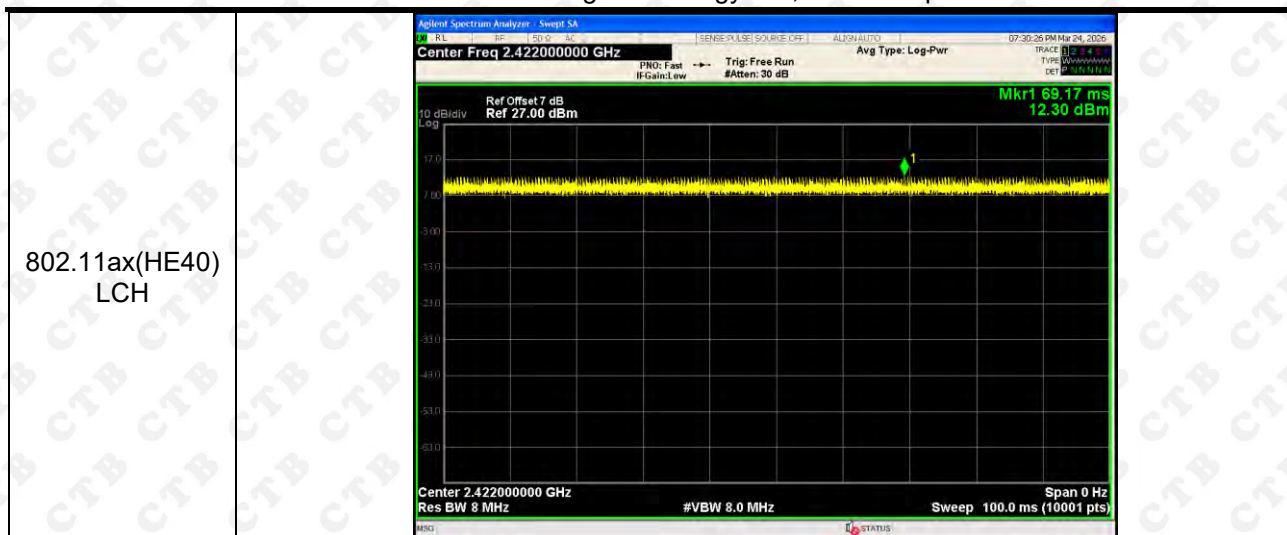

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

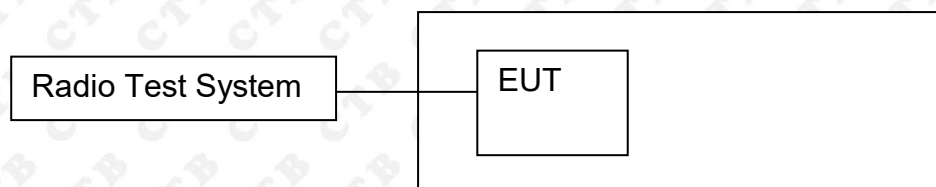

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500kHz (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure




1. Rem1. Set RBW =1-5% OBW..
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



10.4 Test Result



Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.68	500	PASS
	MCH	9.248	500	PASS
	HCH	8.949	500	PASS
802.11g	LCH	16.233	500	PASS
	MCH	16.339	500	PASS
	HCH	16.38	500	PASS
802.11n(HT20)	LCH	17.161	500	PASS
	MCH	17.565	500	PASS
	HCH	17.293	500	PASS
802.11n(HT40)	LCH	35.764	500	PASS
	MCH	36	500	PASS
	HCH	35.774	500	PASS
802.11ax(HE20)	LCH	17.603	500	PASS
	MCH	17.356	500	PASS
	HCH	17.343	500	PASS
802.11ax(HE40)	LCH	35.764	500	PASS
	MCH	35.966	500	PASS
	HCH	36.059	500	PASS



Test Graph:




Graphs	
802.11b /LCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Mkr3 2.416356 GHz -4.3179 dBm Center 2.412 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 14.854 MHz Total Power 16.8 dBm Transmit Freq Error 16.102 kHz OBW Power 99.00 % x dB Bandwidth 8.680 MHz x dB -6.00 dB
802.11b /MCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.441557 GHz -4.4419 dBm Center 2.437 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 14.776 MHz Total Power 16.1 dBm Transmit Freq Error -66.964 kHz OBW Power 99.00 % x dB Bandwidth 9.248 MHz x dB -6.00 dB
802.11b/HCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.466401 GHz -3.5084 dBm Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 14.846 MHz Total Power 15.3 dBm Transmit Freq Error -73.719 kHz OBW Power 99.00 % x dB Bandwidth 8.949 MHz x dB -6.00 dB

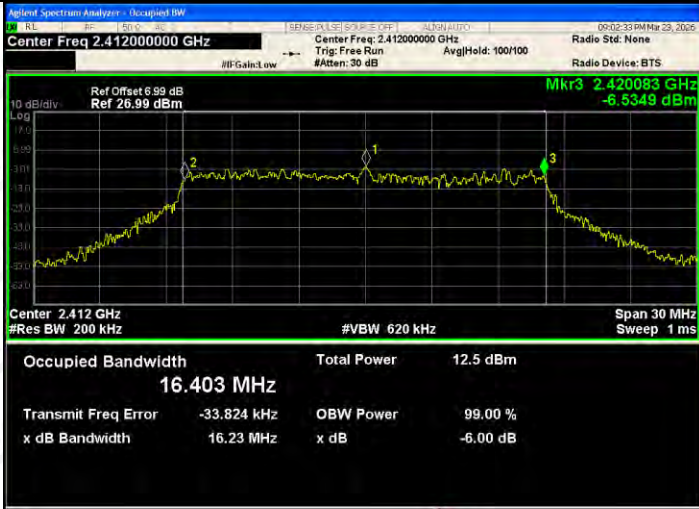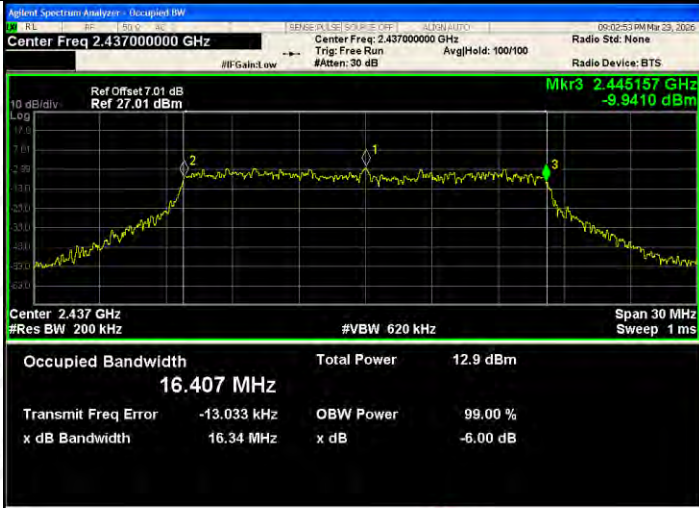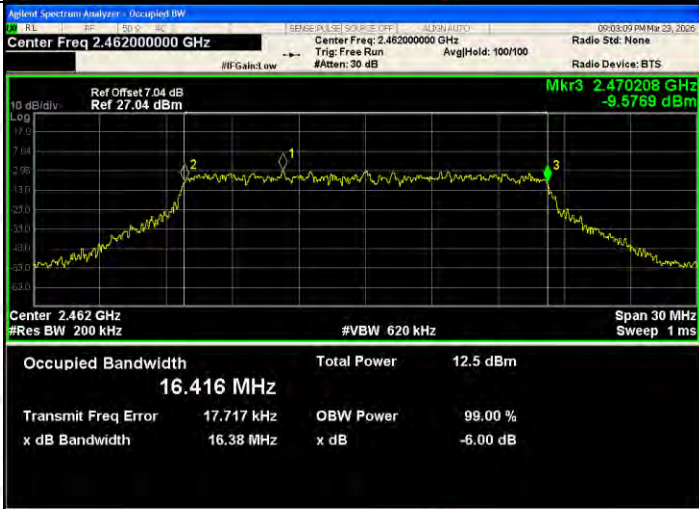802.11g/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Mkr3 2.420083 GHz -6.5349 dBm Center 2.412 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.403 MHz Total Power 12.5 dBm Transmit Freq Error -33.824 kHz OBW Power 99.00 % x dB Bandwidth 16.23 MHz x dB -6.00 dB
802.11g/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.445157 GHz -9.9410 dBm Center 2.437 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.407 MHz Total Power 12.9 dBm Transmit Freq Error -13.033 kHz OBW Power 99.00 % x dB Bandwidth 16.34 MHz x dB -6.00 dB
802.11g/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470208 GHz -9.5769 dBm Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.416 MHz Total Power 12.5 dBm Transmit Freq Error 17.717 kHz OBW Power 99.00 % x dB Bandwidth 16.38 MHz x dB -6.00 dB

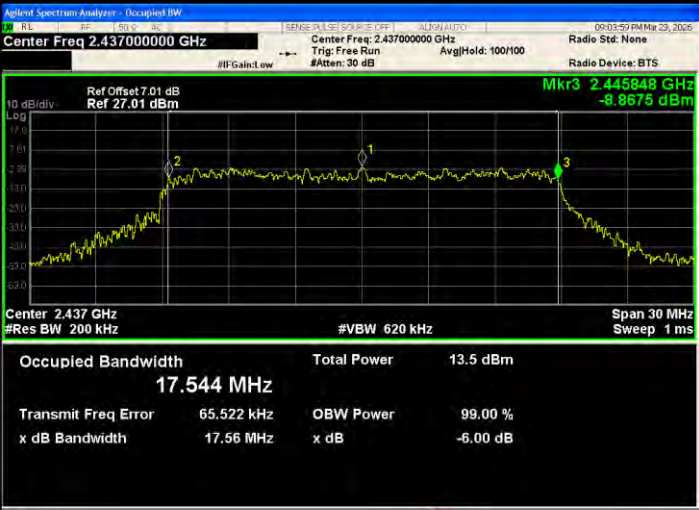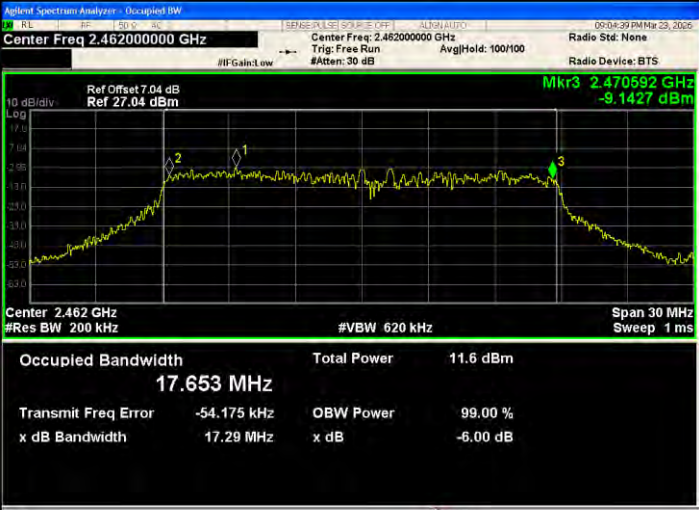802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.99 dB Ref 26.99 dBm Mkr3 2.420601 GHz -9.4984 dBm Center 2.412 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.624 MHz Total Power 13.6 dBm Transmit Freq Error 20.010 kHz OBW Power 99.00 % x dB Bandwidth 17.16 MHz x dB -6.00 dB
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.445848 GHz -8.8675 dBm Center 2.437 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.544 MHz Total Power 13.5 dBm Transmit Freq Error 65.522 kHz OBW Power 99.00 % x dB Bandwidth 17.56 MHz x dB -6.00 dB
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470592 GHz -9.1427 dBm Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.653 MHz Total Power 11.6 dBm Transmit Freq Error -54.175 kHz OBW Power 99.00 % x dB Bandwidth 17.29 MHz x dB -6.00 dB

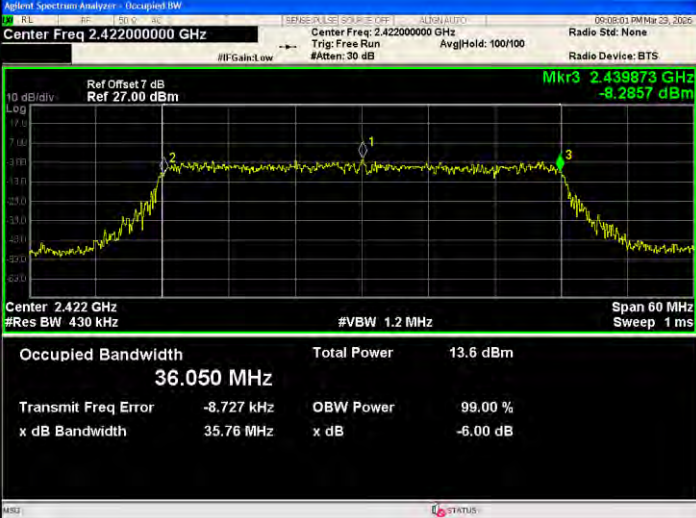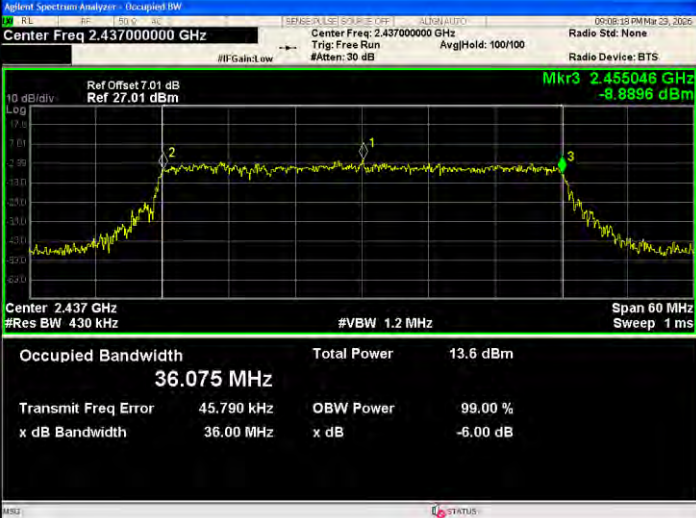
802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.439873 GHz -8.2857 dBm Center 2.422 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.050 MHz Total Power 13.6 dBm Transmit Freq Error -8.727 kHz OBW Power 99.00 % x dB Bandwidth 35.76 MHz x dB -6.00 dB
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.455048 GHz -8.8896 dBm Center 2.437 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.075 MHz Total Power 13.6 dBm Transmit Freq Error 45.790 kHz OBW Power 99.00 % x dB Bandwidth 36.00 MHz x dB -6.00 dB
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.469937 GHz -8.0127 dBm Center 2.452 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.184 MHz Total Power 12.8 dBm Transmit Freq Error 49.924 kHz OBW Power 99.00 % x dB Bandwidth 35.77 MHz x dB -6.00 dB

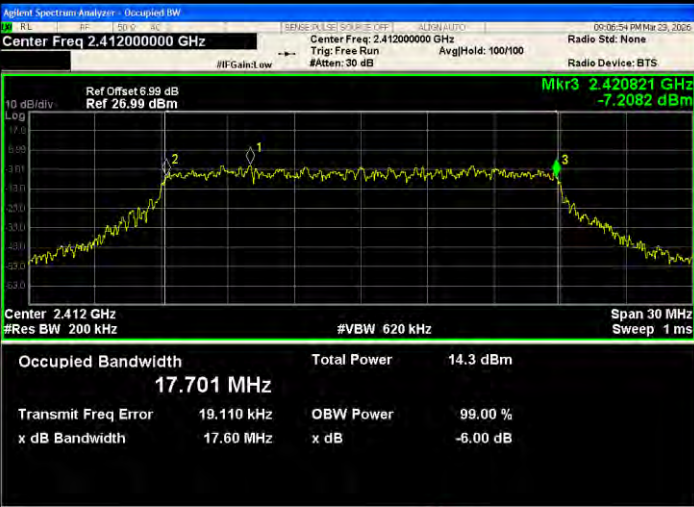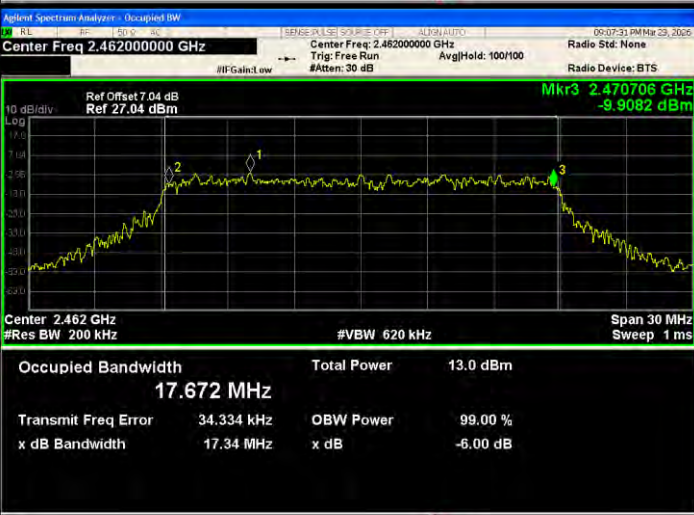802.11ax(HE20)/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Mkr3 2.420821 GHz -7.2082 dBm Center 2.412 GHz #Res BW 200 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.701 MHz Total Power 14.3 dBm Transmit Freq Error 19.110 kHz OBW Power 99.00 % x dB Bandwidth 17.60 MHz x dB -6.00 dB
802.11ax(HE20)/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.44565 GHz -6.8178 dBm Center 2.437 GHz #Res BW 200 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.664 MHz Total Power 13.8 dBm Transmit Freq Error -27.909 kHz OBW Power 99.00 % x dB Bandwidth 17.36 MHz x dB -6.00 dB
802.11ax(HE20)/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470706 GHz -9.9082 dBm Center 2.462 GHz #Res BW 200 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.672 MHz Total Power 13.0 dBm Transmit Freq Error 34.334 kHz OBW Power 99.00 % x dB Bandwidth 17.34 MHz x dB -6.00 dB

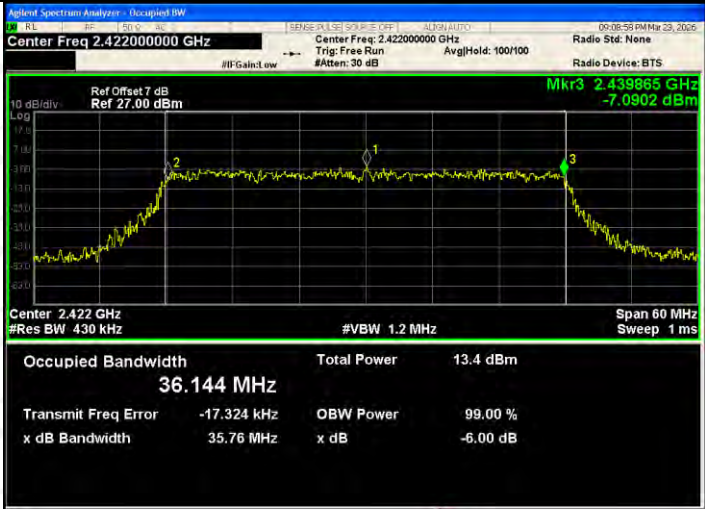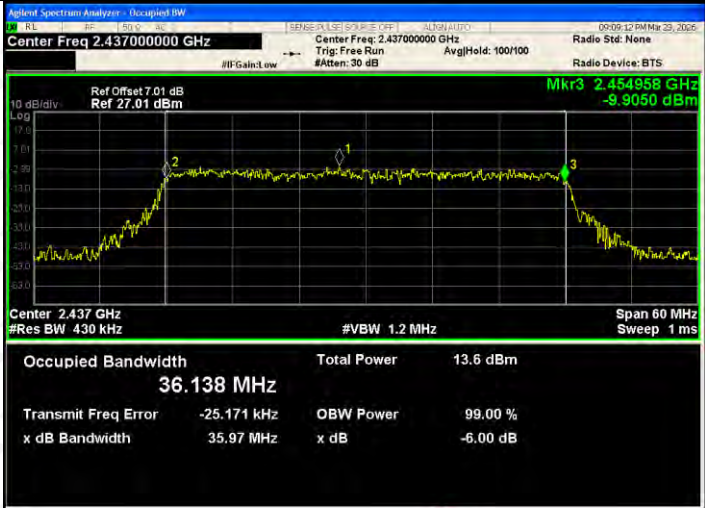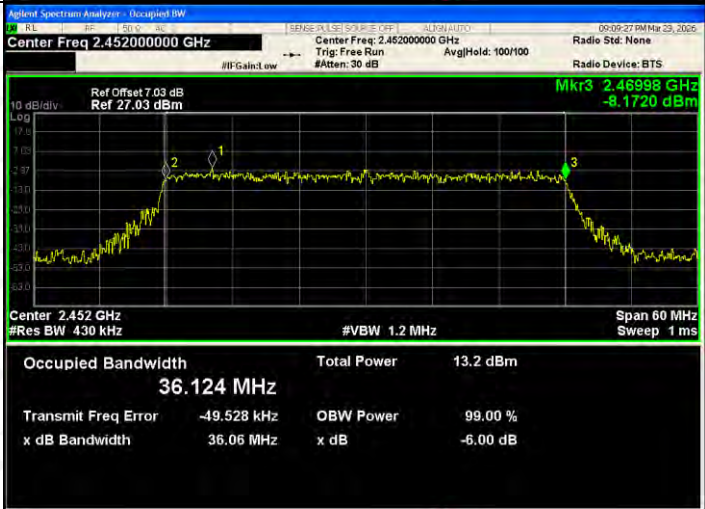802.11ax(HE40)/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Center Freq: 2.42200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.439865 GHz -7.0902 dBm Center 2.422 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.144 MHz Total Power 13.4 dBm Transmit Freq Error -17.324 kHz OBW Power 99.00 % x dB Bandwidth 35.76 MHz x dB -6.00 dB
802.11ax(HE40)/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.454958 GHz -9.9050 dBm Center 2.437 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.138 MHz Total Power 13.6 dBm Transmit Freq Error -25.171 kHz OBW Power 99.00 % x dB Bandwidth 35.97 MHz x dB -6.00 dB
802.11ax(HE40)/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Center Freq: 2.45200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.469998 GHz -8.1720 dBm Center 2.452 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.124 MHz Total Power 13.2 dBm Transmit Freq Error -49.528 kHz OBW Power 99.00 % x dB Bandwidth 36.06 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

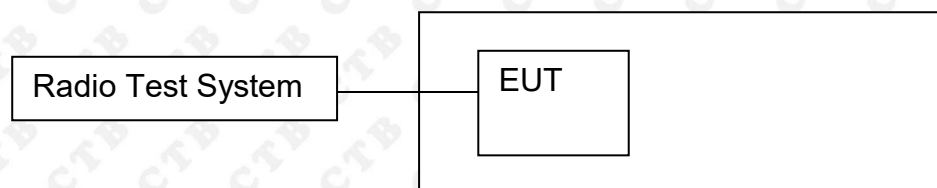

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3kHz]	Limit(8 dBm (in any 3kHz))	Verdict
802.11b	LCH	-14.905	8	PASS
	MCH	-14.239	8	PASS
	HCH	-14.773	8	PASS
802.11g	LCH	-17.649	8	PASS
	MCH	-17.808	8	PASS
	HCH	-18.178	8	PASS
802.11n(HT20)	LCH	-16.745	8	PASS
	MCH	-16.928	8	PASS
	HCH	-17.195	8	PASS
802.11n(HT40)	LCH	-15.868	8	PASS
	MCH	-15.916	8	PASS
	HCH	-16.114	8	PASS
802.11ax(HE20)	LCH	-18.415	8	PASS
	MCH	-18.506	8	PASS
	HCH	-18.861	8	PASS
802.11ax(HE40)	LCH	-22.341	8	PASS
	MCH	-22.137	8	PASS
	HCH	-22.521	8	PASS


Test Graph

Graphs

802.11b/LCH






802.11b/MCH

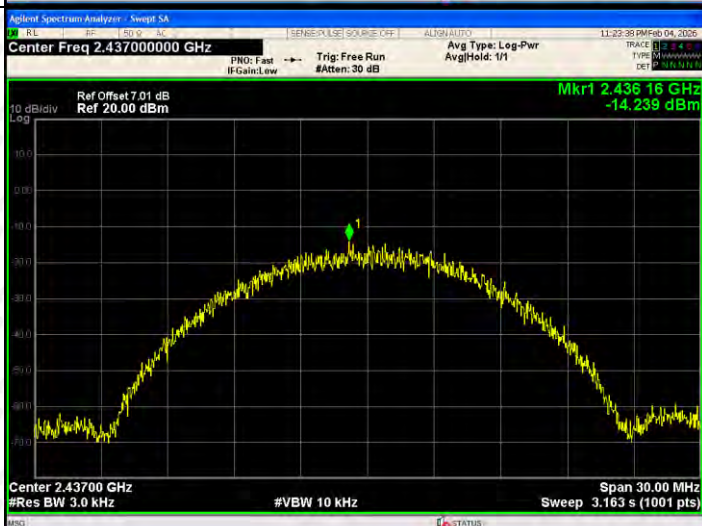


802.11b/HCH



802.11g/LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.409 15 GHz -17.649 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.434 15 GHz -17.808 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.459 15 GHz -18.178 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

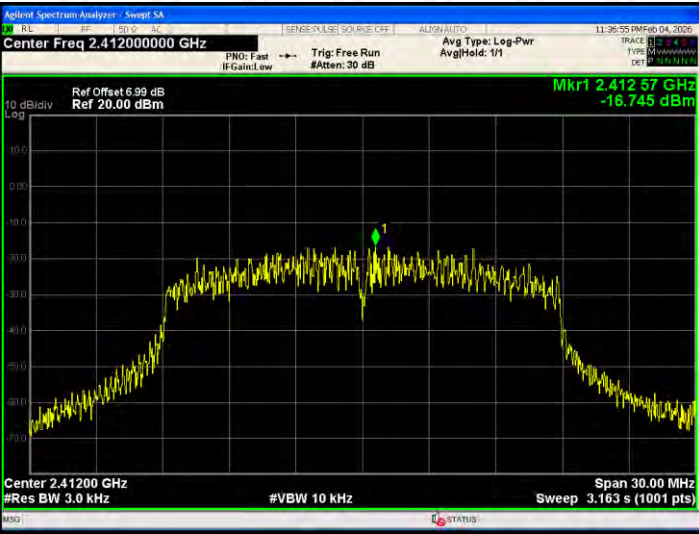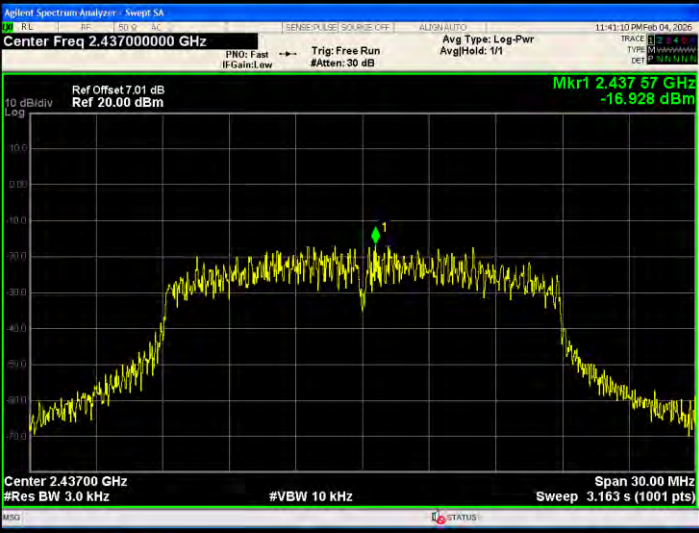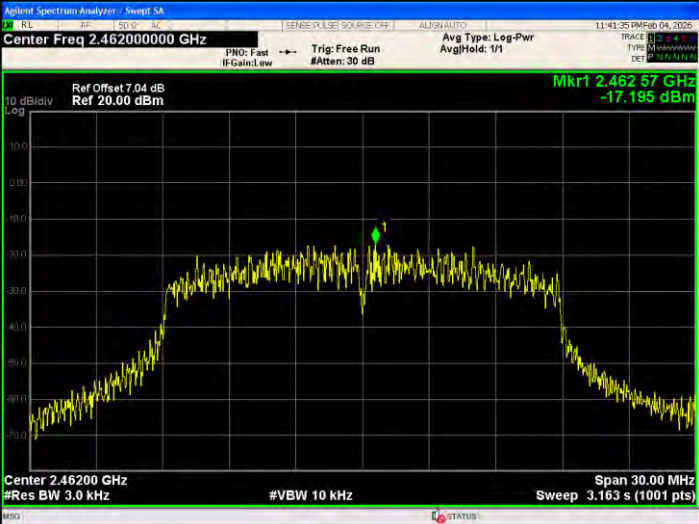802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.412000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.412 57 GHz -16.745 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.437 57 GHz -16.928 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.462 57 GHz -17.195 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)

802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.43076 GHz -15.868 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.44576 GHz -15.916 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.452000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.46076 GHz -16.114 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

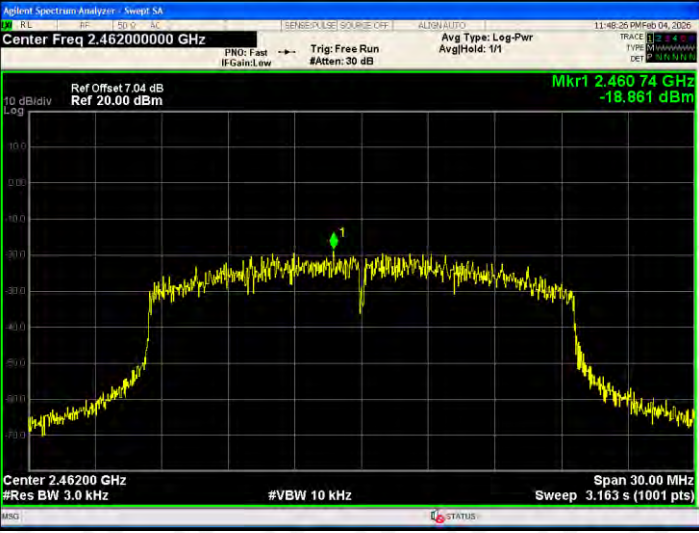802.11ax(HE20)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.410 74 GHz -18.415 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HE20)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.435 74 GHz -18.506 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HE20)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.460 74 GHz -18.861 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

802.11ax(HE40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.424 58 GHz -22.341 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HE40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.439 58 GHz -22.137 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HE40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.445 10 GHz -22.521 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is 2.29dBi.


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

Below 1G

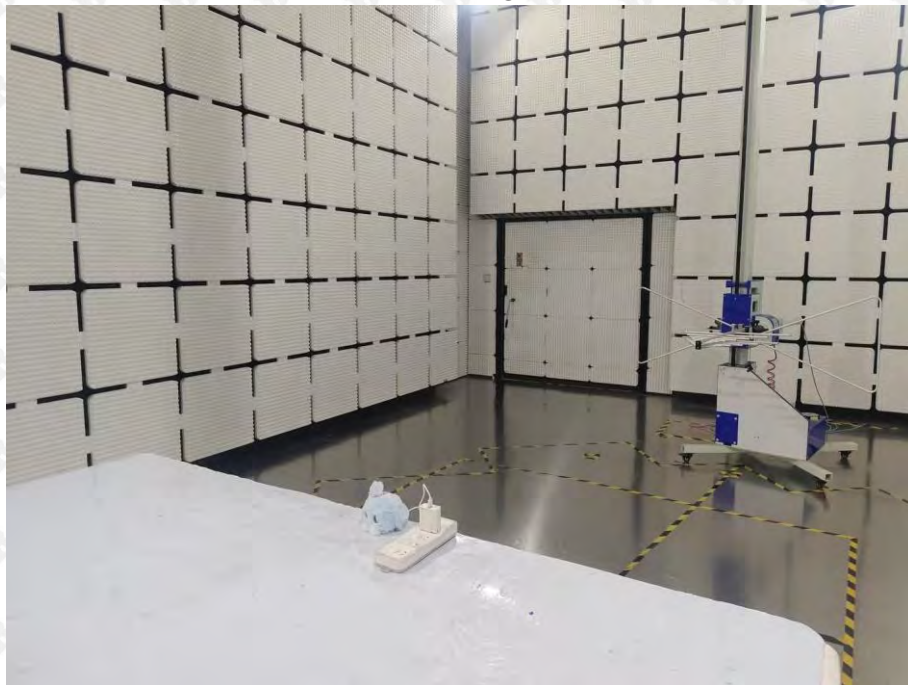

Above 1G

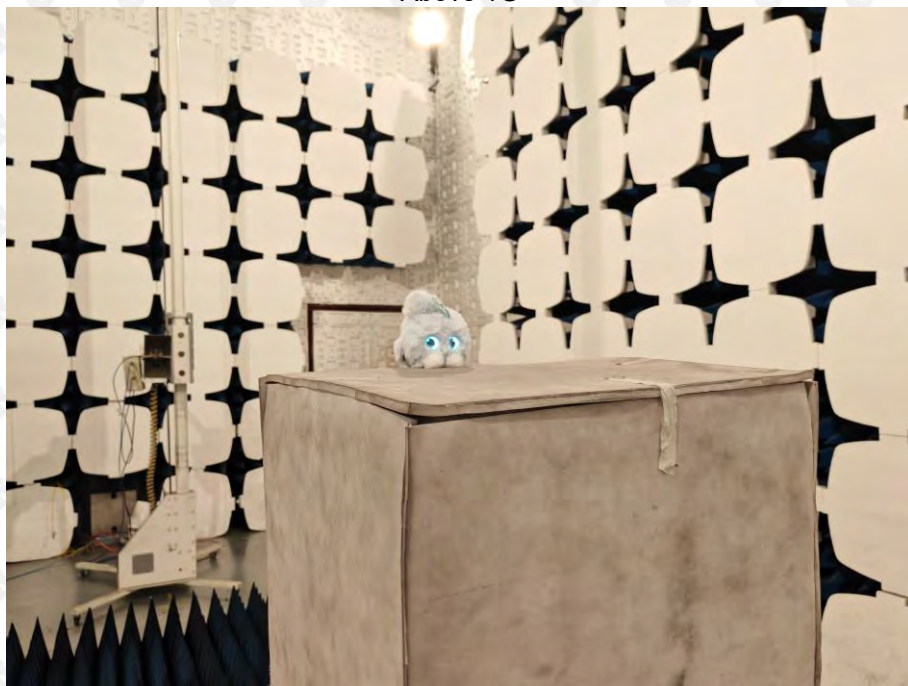

Conducted emission



RF Conducted



***** END OF REPORT *****