


Appendix A. Test Result of AC Power Line Conducted Emission


Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK (1Mbps)	2402	0.72	≥ 0.50	Pass
	2440	0.71	≥ 0.50	Pass
	2480	0.70	≥ 0.50	Pass
GFSK (2Mbps)	2402	1.16	≥ 0.50	Pass
	2440	1.16	≥ 0.50	Pass
	2480	1.16	≥ 0.50	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

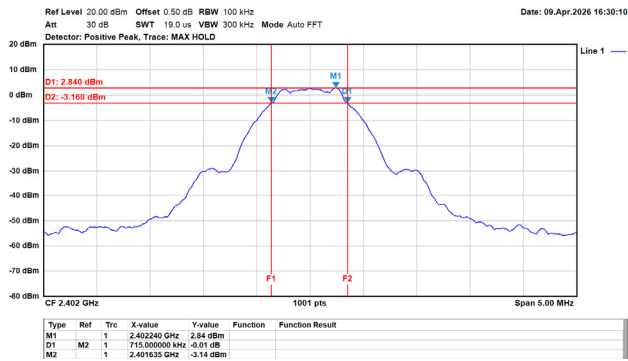


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

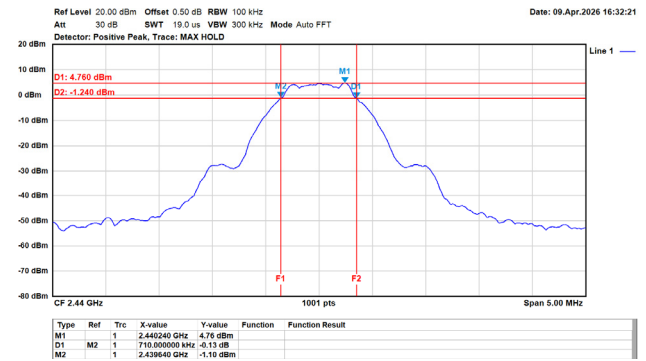


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

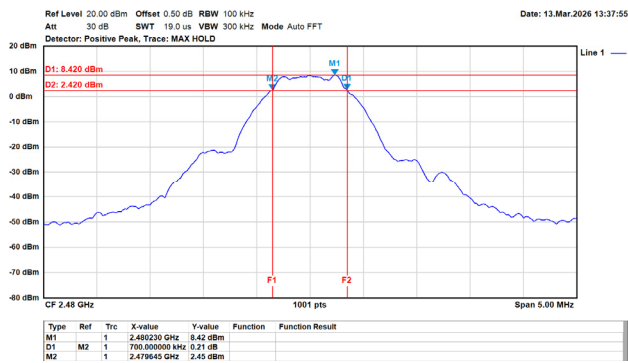


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

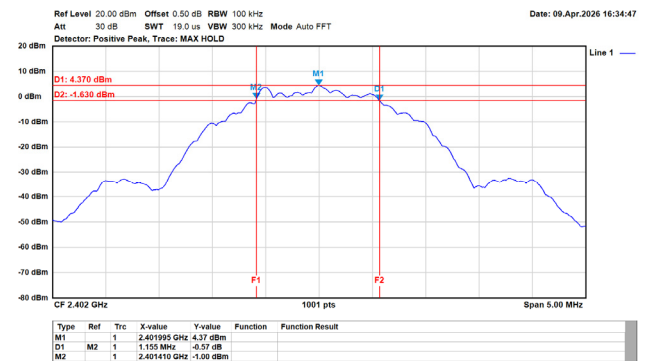

GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

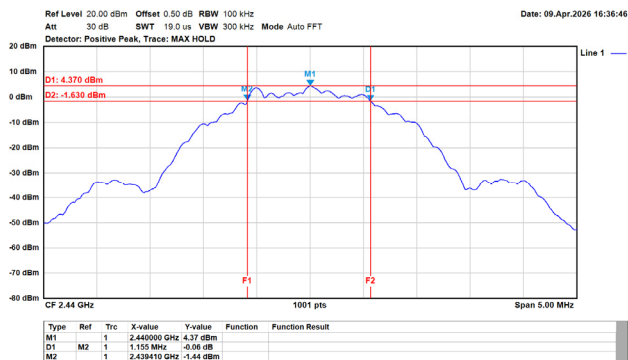

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

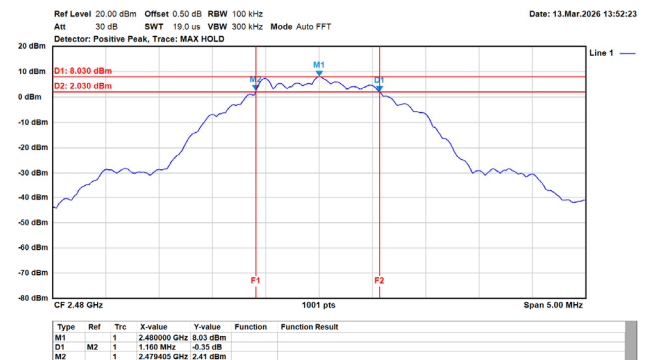


Appendix C. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	5.43	30.00	Pass
	2440	5.42	30.00	Pass
	2480	5.31	30.00	Pass
GFSK (2Mbps)	2402	5.25	30.00	Pass
	2440	5.52	30.00	Pass
	2480	5.45	30.00	Pass


Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1Mbps)	2402	-12.01	8.00	Pass
	2440	-10.09	8.00	Pass
	2480	-6.50	8.00	Pass
GFSK (2Mbps)	2402	-13.63	8.00	Pass
	2440	-13.33	8.00	Pass
	2480	-10.04	8.00	Pass

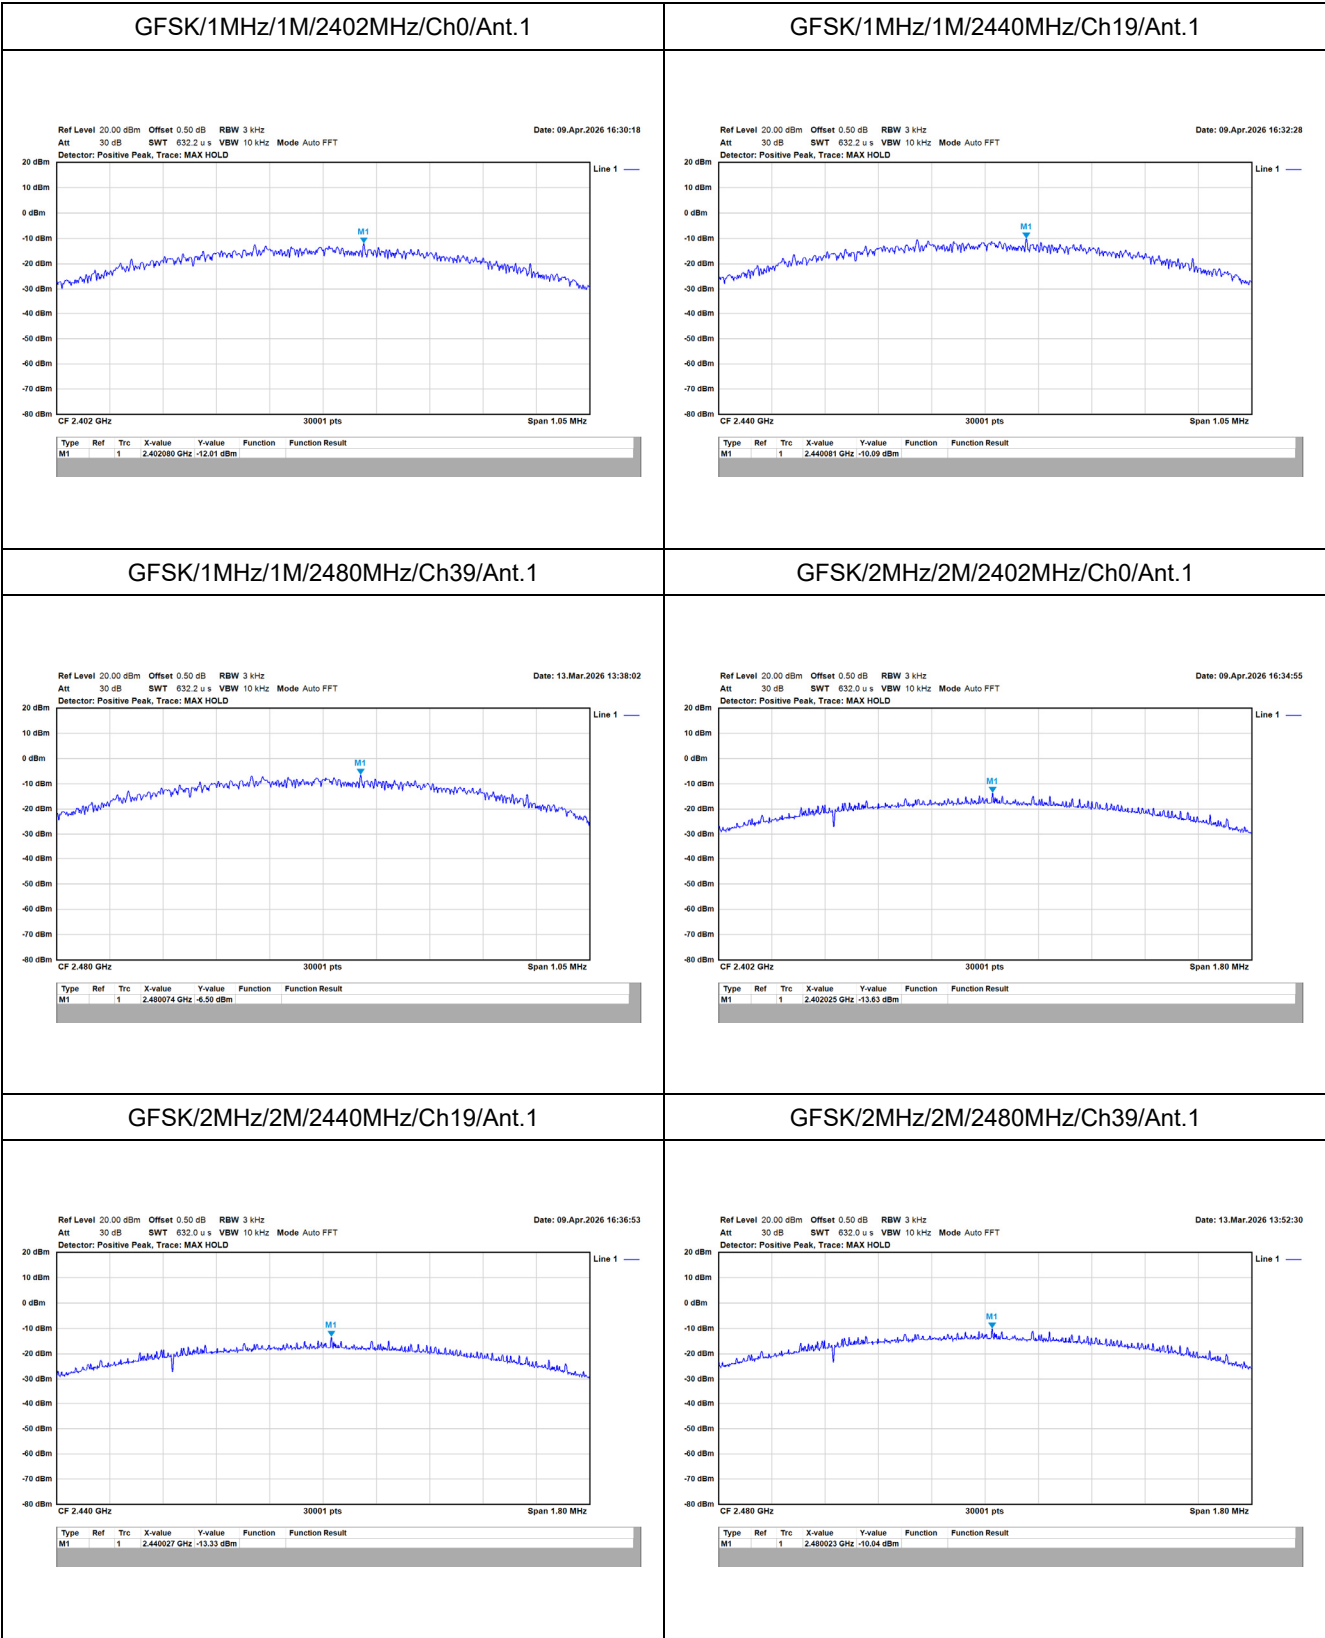

Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS
GFSK (2 Mbps)	> 20	PASS

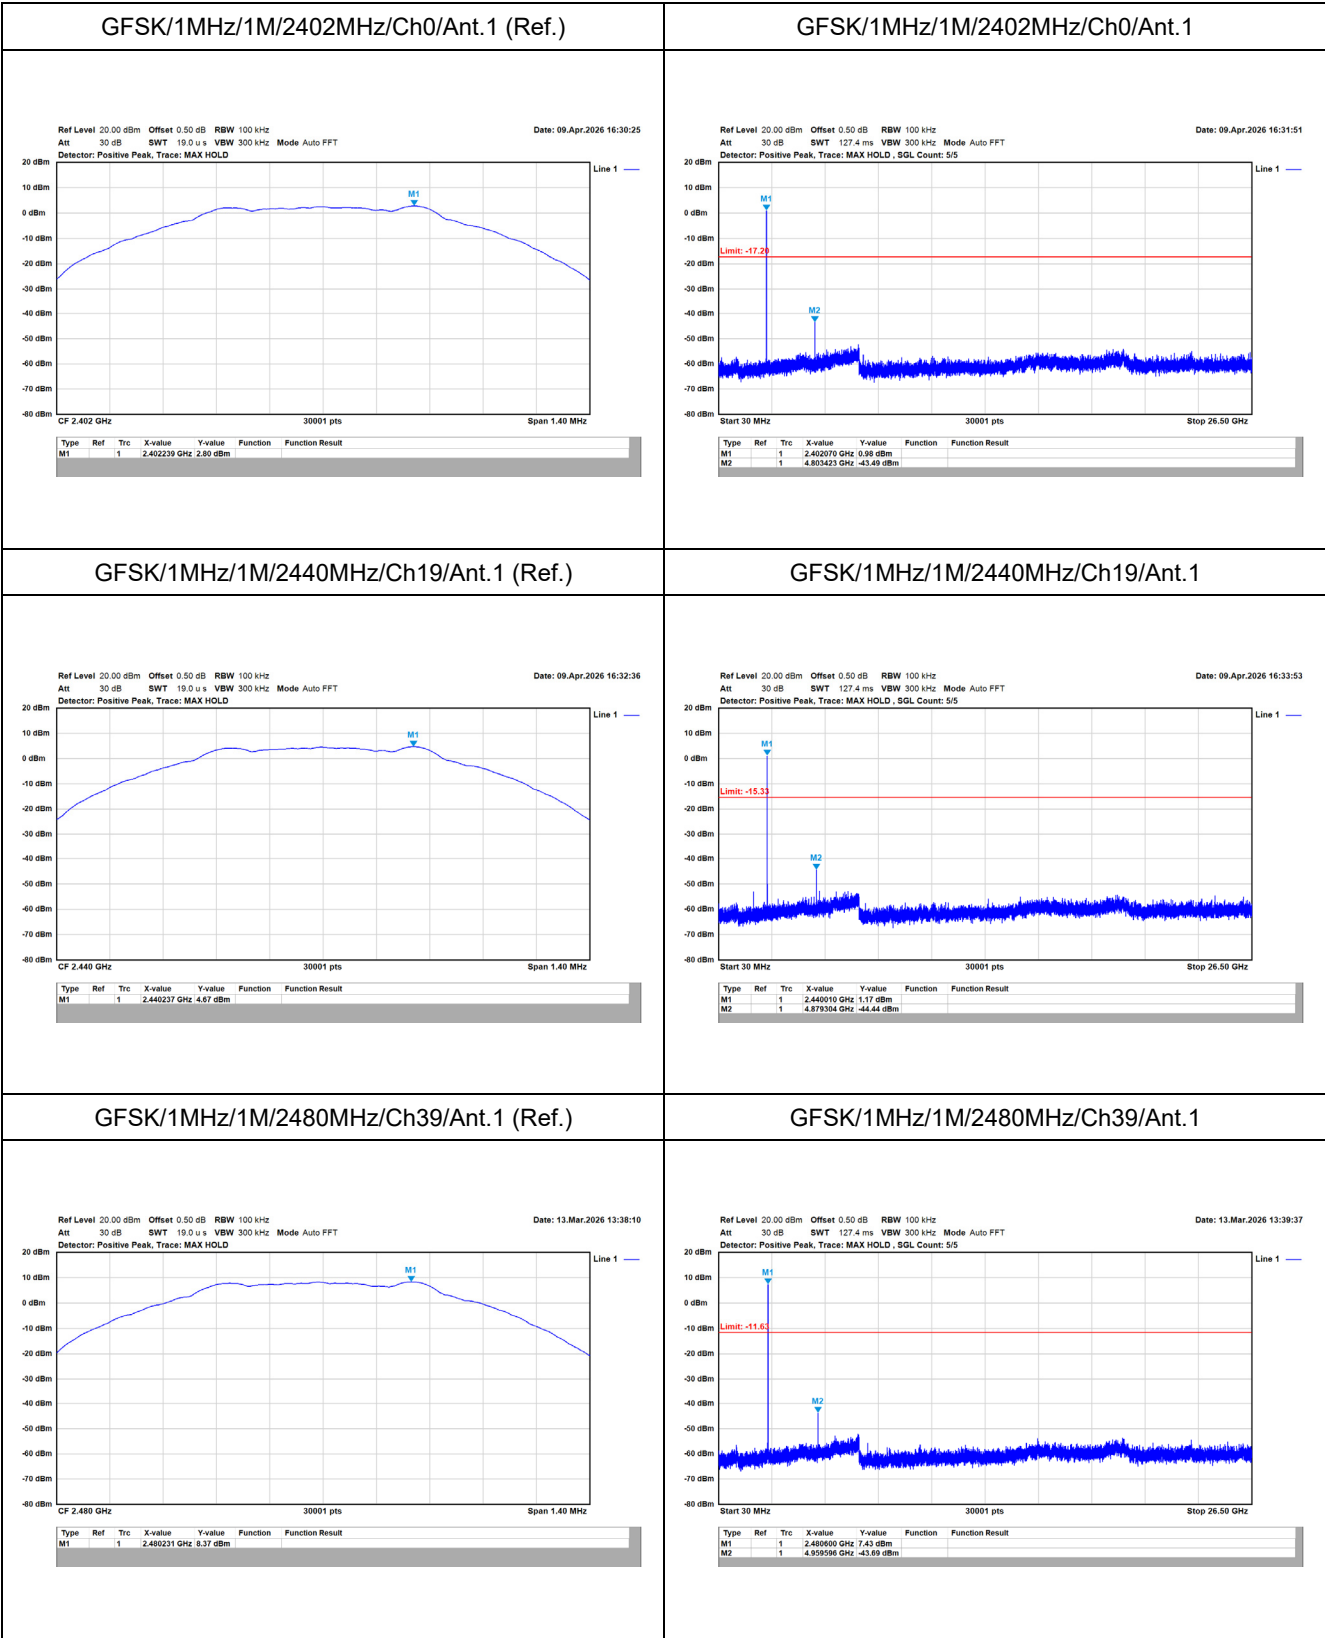

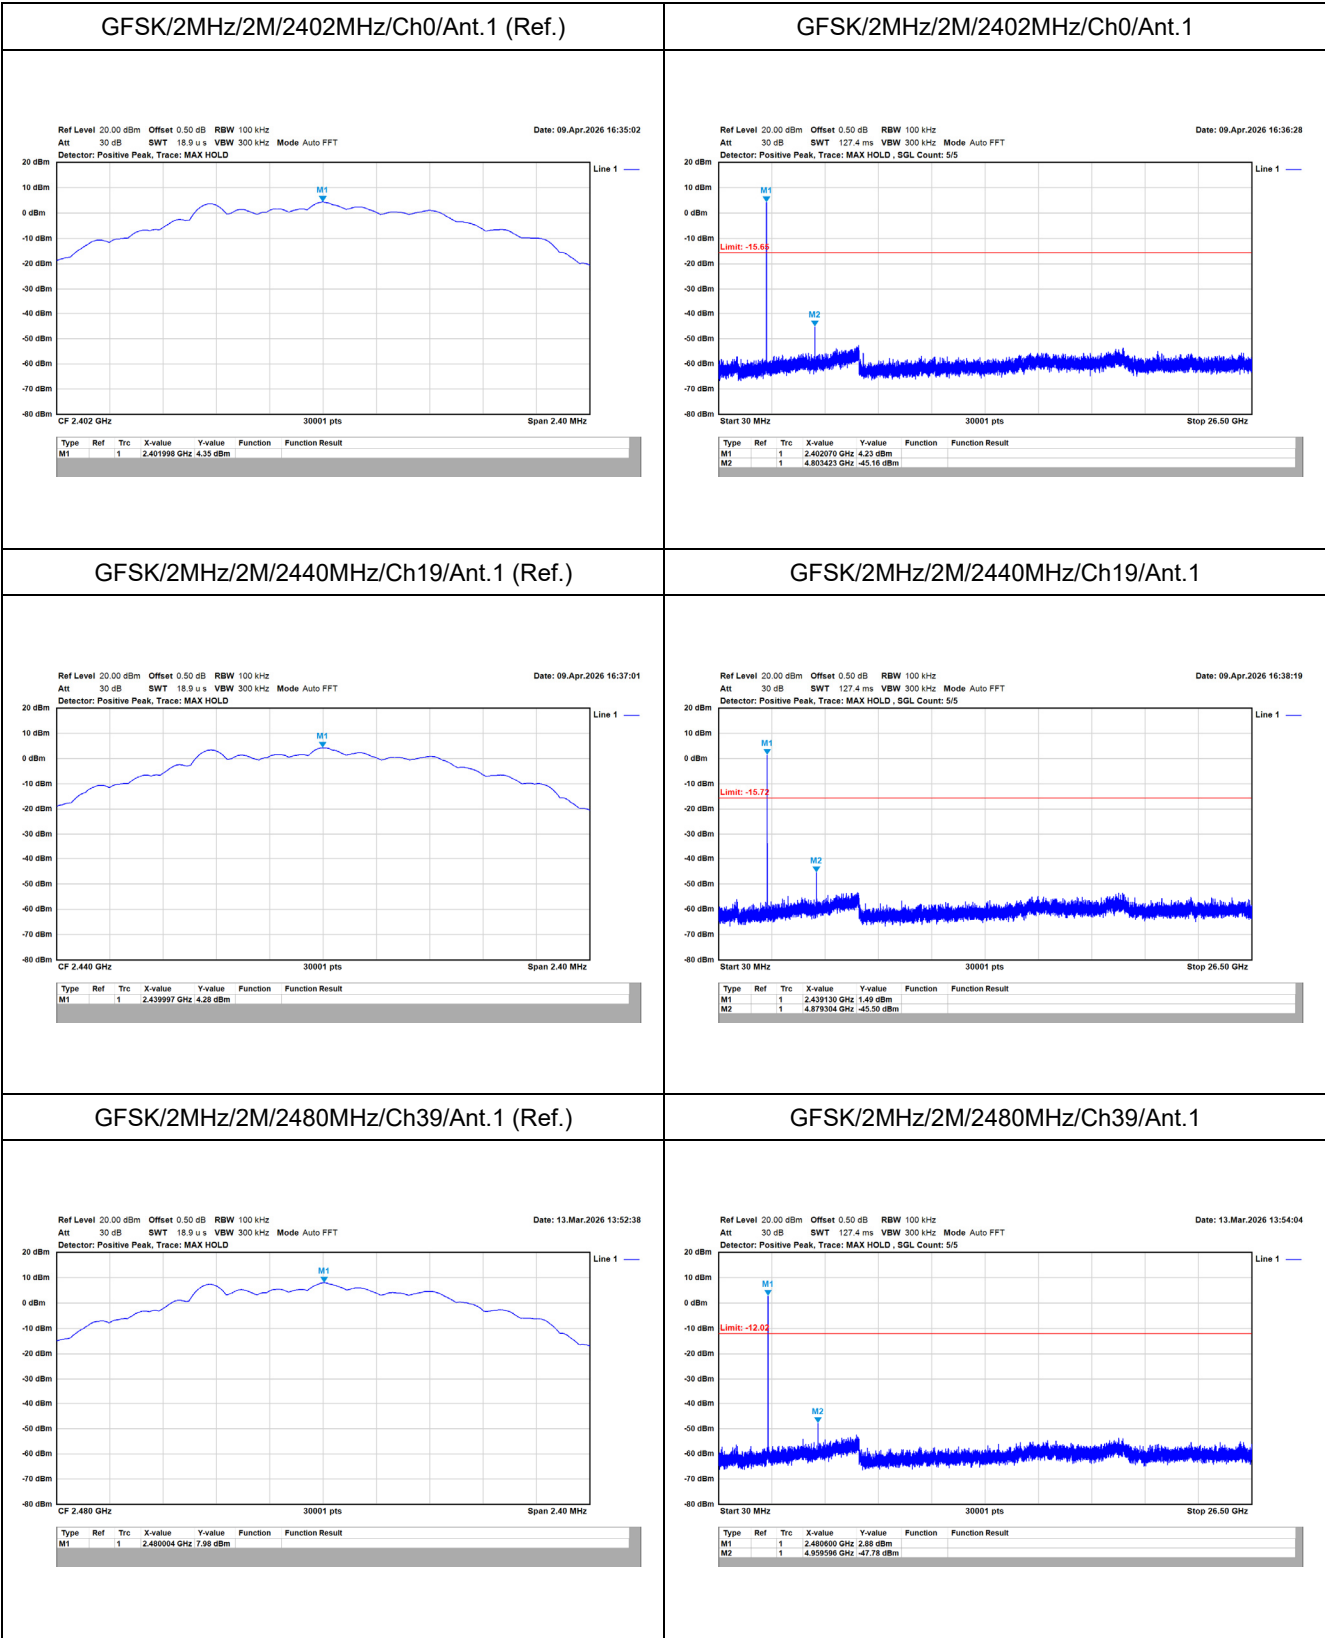




Appendix F. Test Result of Radiated Emission

TX_BLE1M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

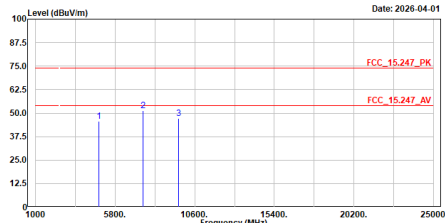


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	45.67	74.00	-28.33	60.60	-14.93	Peak
2	7487.200	51.17	74.00	-22.83	58.24	-7.07	Peak
3	9600.000	47.34	74.00	-26.66	53.86	-6.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

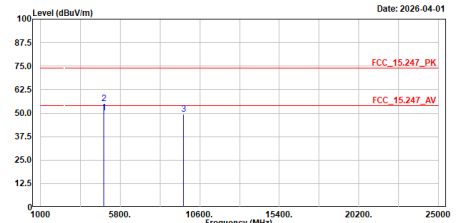


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	50.14	54.00	-3.86	65.07	-14.93	Average
2	4804.000	54.93	74.00	-19.07	69.86	-14.93	Peak
3	9600.000	49.49	74.00	-24.51	56.01	-6.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2440MHz
Test BY :Rock

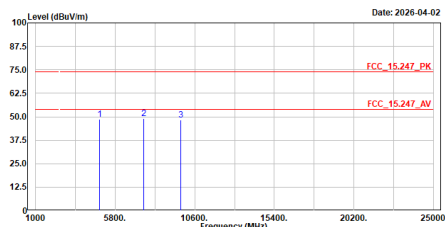


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	48.66	74.00	-25.34	63.20	-14.54	Peak
2	7516.950	49.21	74.00	-24.79	56.42	-7.21	Peak
3	9760.000	48.39	74.00	-25.61	53.77	-5.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2440MHz
Test BY :Rock

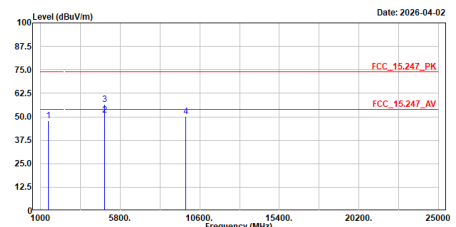


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1463.250	47.97	74.00	-26.03	73.61	-25.64	Peak
2	4880.000	50.94	54.00	-3.06	65.48	-14.54	Average
3	4880.000	56.61	74.00	-17.39	71.15	-14.54	Peak
4	9760.000	50.35	74.00	-23.65	55.73	-5.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

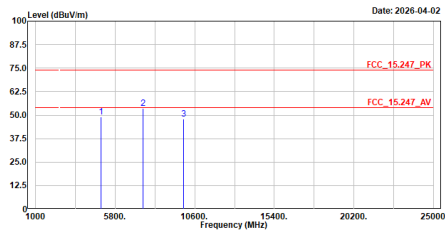


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	49.00	74.00	-25.00	63.14	-14.14	Peak
2	7499.100	53.65	74.00	-20.35	68.79	-7.14	Peak
3	9920.000	48.09	74.00	-25.91	53.89	-5.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

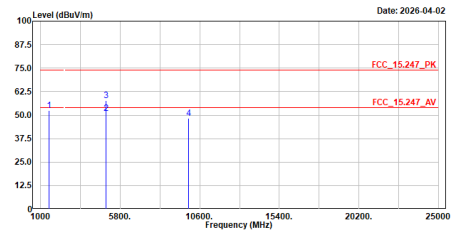


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1497.250	52.63	74.00	-21.37	78.50	-25.87	Peak
2	4960.000	50.98	74.00	-23.02	65.12	-14.14	Average
3	4960.000	57.61	74.00	-16.39	71.75	-14.14	Peak
4	9920.000	48.26	74.00	-25.74	54.06	-5.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Rock

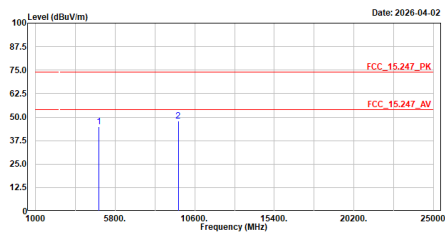


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	44.93	74.00	-29.07	59.86	-14.93	Peak
2	9607.950	48.02	74.00	-25.98	54.54	-6.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Rock

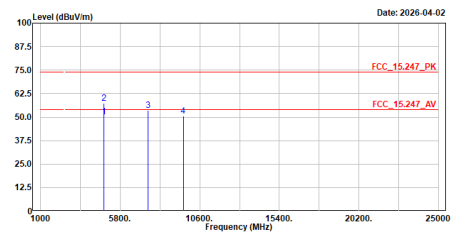


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	50.34	74.00	-23.66	65.27	-14.93	Average
2	4804.000	57.49	74.00	-16.51	72.42	-14.93	Peak
3	7476.150	53.58	74.00	-20.42	60.58	-7.00	Peak
4	9607.950	50.73	74.00	-23.27	57.25	-6.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Rock

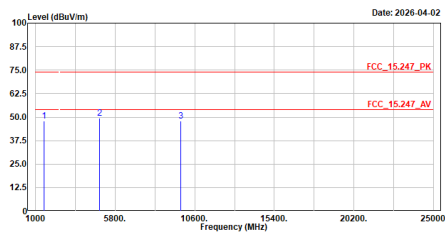


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1528.700	47.81	74.00	-26.19	73.60	-25.79	Peak
2	4880.000	49.61	74.00	-24.39	64.15	-14.54	Peak
3	9760.000	47.92	74.00	-26.08	53.30	-5.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Rock

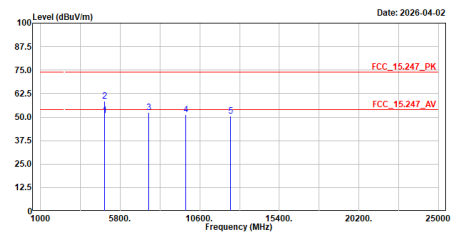


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	50.91	54.00	-3.09	65.45	-14.54	Average
2	4880.000	58.44	74.00	-15.56	72.98	-14.54	Peak
3	7510.150	52.34	74.00	-21.66	59.53	-7.19	Peak
4	9760.000	51.36	74.00	-22.64	56.74	-5.38	Peak
5	12462.250	50.48	74.00	-23.52	51.32	-0.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Rock

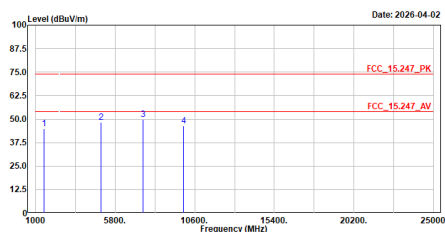


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1496.400	45.04	74.00	-28.96	70.90	-25.06	Peak
2	4960.000	48.21	74.00	-25.79	62.35	-14.14	Peak
3	7472.750	49.64	74.00	-24.36	56.63	-6.99	Peak
4	9920.000	46.25	74.00	-27.75	52.05	-5.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2480MHz
Test BY :Rock

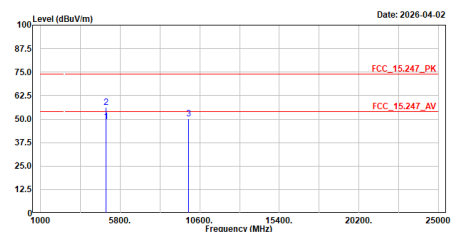


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	48.70	54.00	-5.30	62.84	-14.14	Average
2	4960.000	56.34	74.00	-17.66	70.48	-14.14	Peak
3	9920.000	50.31	74.00	-23.69	56.11	-5.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Ashton

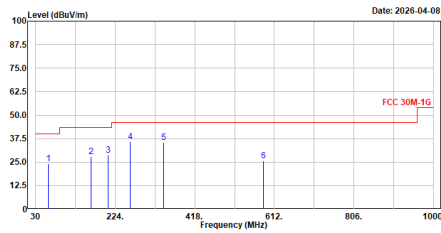


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	61.089	23.99	40.00	-16.01	48.53	-24.54	QP
2	164.927	27.89	43.50	-15.61	51.96	-24.07	QP
3	206.880	28.53	43.50	-14.97	55.89	-26.56	QP
4	259.890	35.75	46.00	-10.25	60.35	-24.60	QP
5	342.728	35.53	46.00	-10.47	57.53	-22.00	QP
6	585.519	25.57	46.00	-20.43	41.78	-16.21	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Ashton

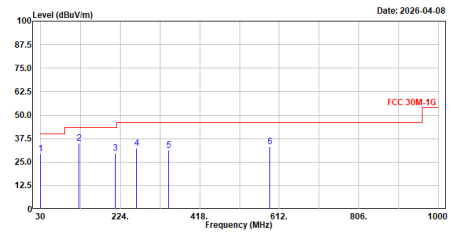


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	30.000	29.32	40.00	-10.68	54.15	-24.83	QP
2	122.732	35.00	43.50	-8.50	61.14	-26.14	QP
3	211.390	29.78	43.50	-13.72	56.31	-26.53	QP
4	263.722	32.46	46.00	-13.54	56.89	-24.43	QP
5	342.534	31.19	46.00	-14.81	53.19	-22.00	QP
6	589.254	33.16	46.00	-12.84	49.28	-16.12	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

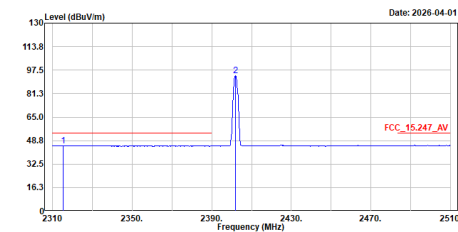


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2315.200	45.30	54.00	-8.70	14.74	30.56	Average
2	2402.000	93.62	-----	-----	63.21	30.41	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Rock

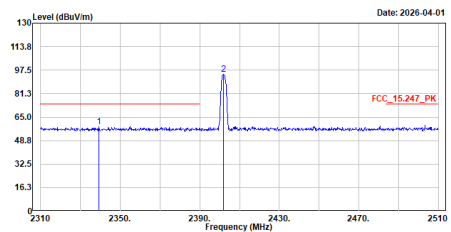


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2339.200	58.22	74.00	-15.78	27.84	30.38	Peak
2	2401.800	94.46	-----	-----	64.05	30.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

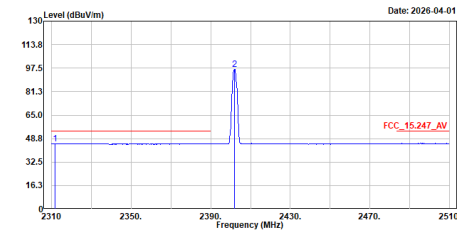


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2311.800	45.28	54.00	-8.72	14.72	30.56	Average
2	2402.000	96.60	-----	-----	66.19	30.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Rock

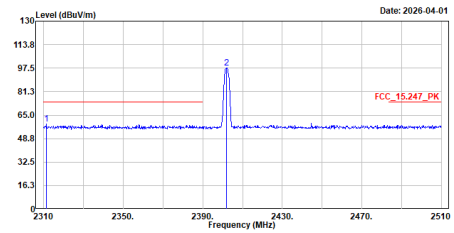


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2311.400	58.86	74.00	-15.14	28.30	30.56	Peak
2	2401.800	97.41	-----	-----	67.00	30.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

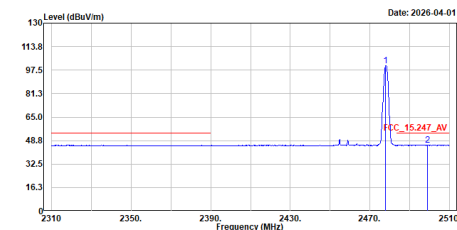


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2478.000	100.48	-----	-----	70.15	30.33	Average
2	2499.000	45.69	54.00	-8.31	15.25	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Rock

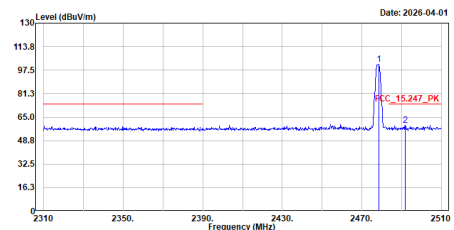


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2478.400	101.35	-----	-----	71.02	30.33	Peak
2	2491.800	59.24	74.00	-14.76	28.00	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

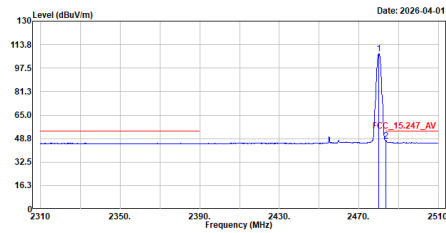


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	107.21	-----	-----	76.88	30.33	Average
2	2483.600	47.15	54.00	-6.85	16.78	30.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Rock

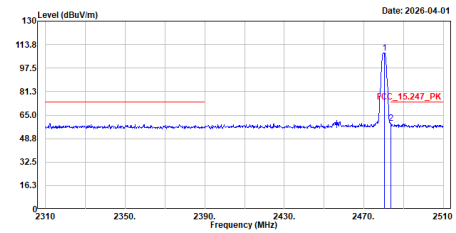


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	108.04	-----	-----	77.71	30.33	Peak
2	2483.600	59.13	74.00	-14.87	28.76	30.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Rock

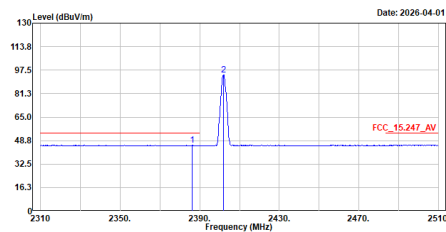


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2386.200	45.67	54.00	-8.33	15.28	30.39	Average
2	2402.000	94.15	-----	-----	63.74	30.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Rock

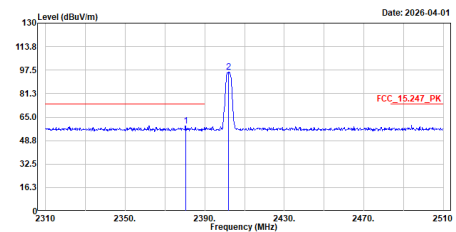


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2380.400	59.00	74.00	-15.00	28.62	30.38	Peak
2	2402.000	95.96	-----	-----	65.55	30.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Rock

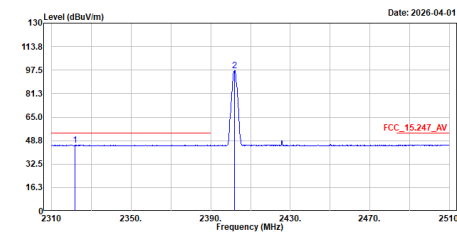


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2321.600	45.61	54.00	-8.39	15.06	30.55	Average
2	2402.000	97.10	-----	-----	66.69	30.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Rock

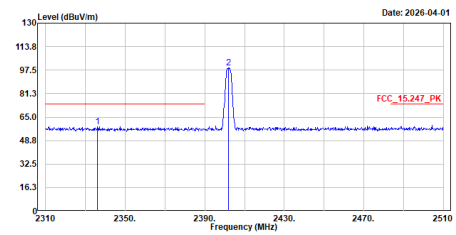


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2336.200	58.61	74.00	-15.39	28.20	30.41	Peak
2	2402.000	98.88	-----	-----	68.47	30.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Rock

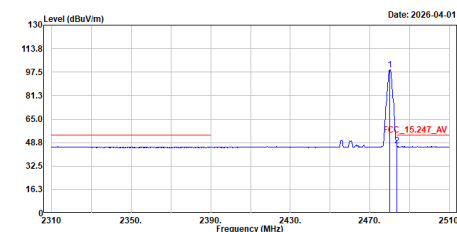


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	99.18	-----	-----	68.85	30.33	Average
2	2483.600	46.63	54.00	-7.37	16.26	30.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Rock

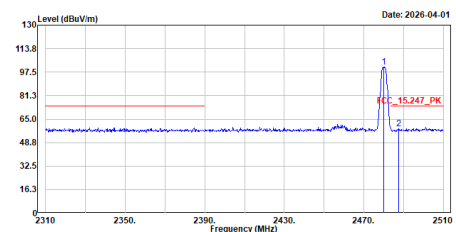


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	100.95	-----	-----	70.62	30.33	Peak
2	2487.400	58.48	74.00	-15.52	28.08	30.40	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2480MHz
Test BY :Rock

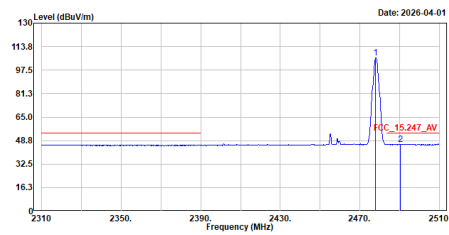


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2478.000	105.81	-----		75.48	30.33	Average
2	2490.400	46.24	-----	-7.76	15.80	30.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2480MHz
Test BY :Rock

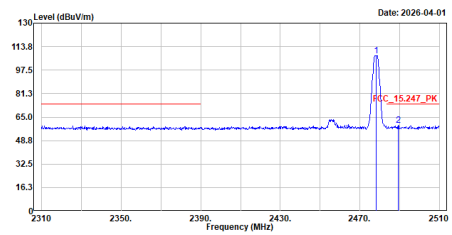

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2478.200	107.57	-----	-----	77.24	30.33	Peak
2	2489.400	59.15	74.00	-14.85	28.72	30.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.