



Appendix A. Test Result of AC Power Line Conducted Emission
SISO A

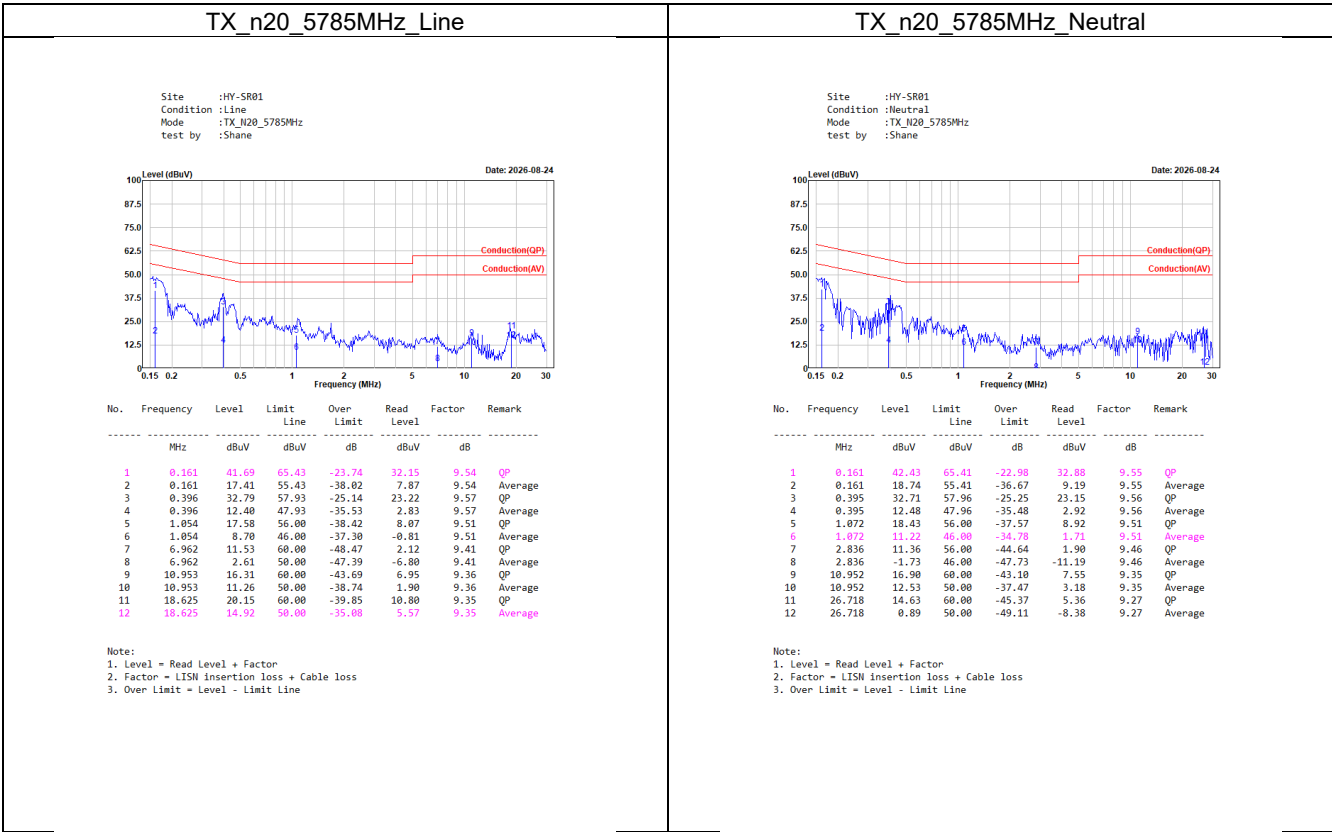


SISO B

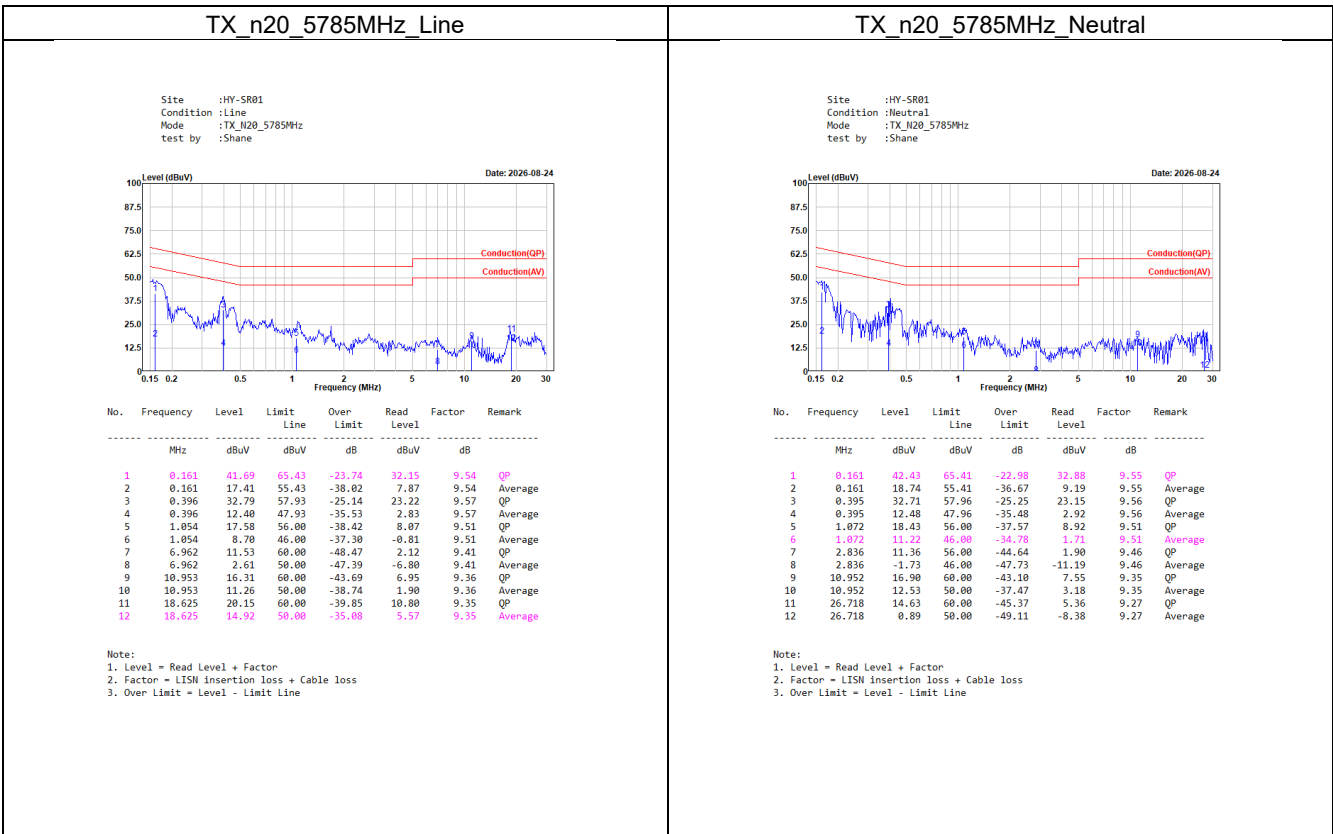


Appendix B. Test Result of Emission Bandwidthh

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	
				99% Occupied Bandwidth & 26dB Bandwidth	
802.11n (20MHz)	5180	18.02	24.48	-	
	5220	17.74	22.72	-	
	5240	17.82	23.60	-	
Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limit (MHz)	
				99% Occupied Bandwidth	DTS Bandwidth
802.11n (20MHz)	5745	18.14	17.56	-	≥ 0.5
	5785	18.14	17.56	-	≥ 0.5
	5825	18.14	17.56	-	≥ 0.5


For 99% Occupied Bandwidth:

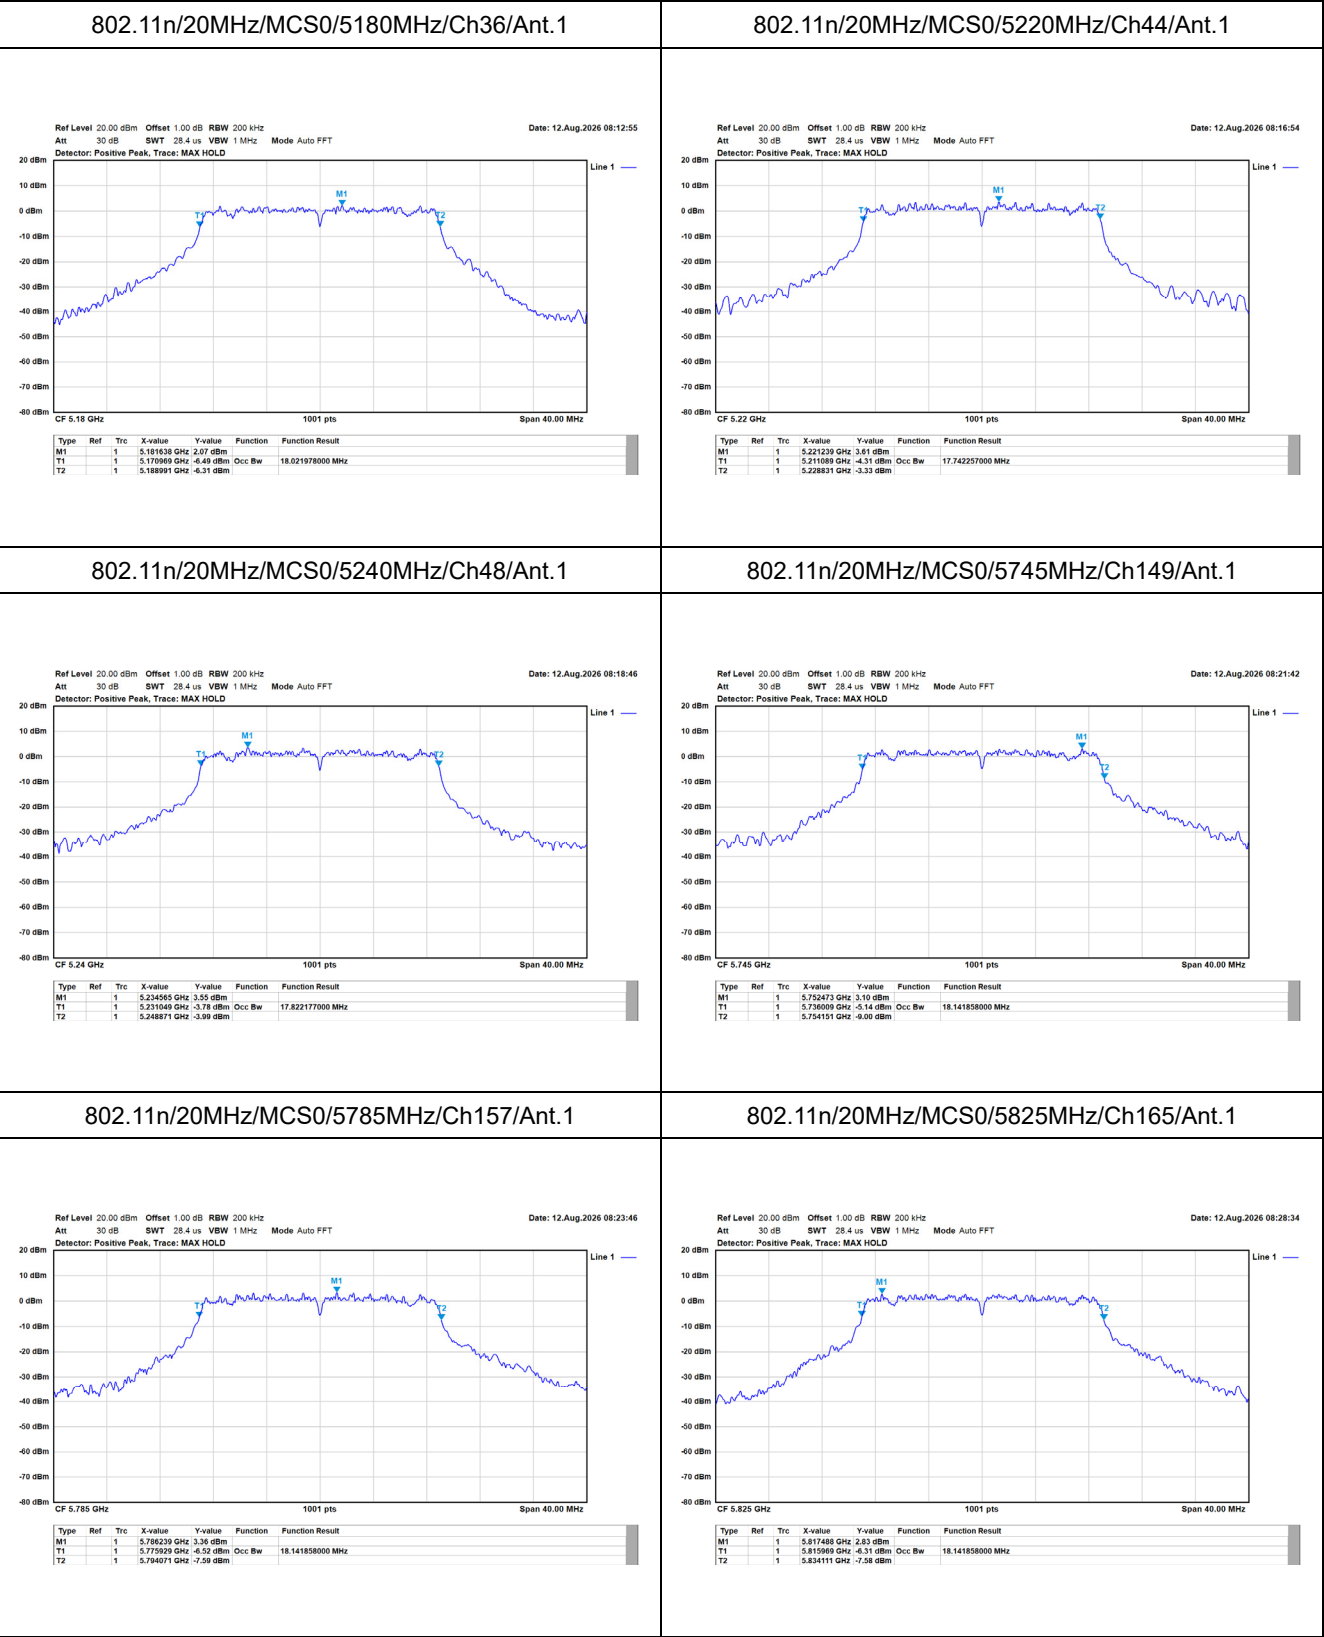

For 26dB Bandwidth:

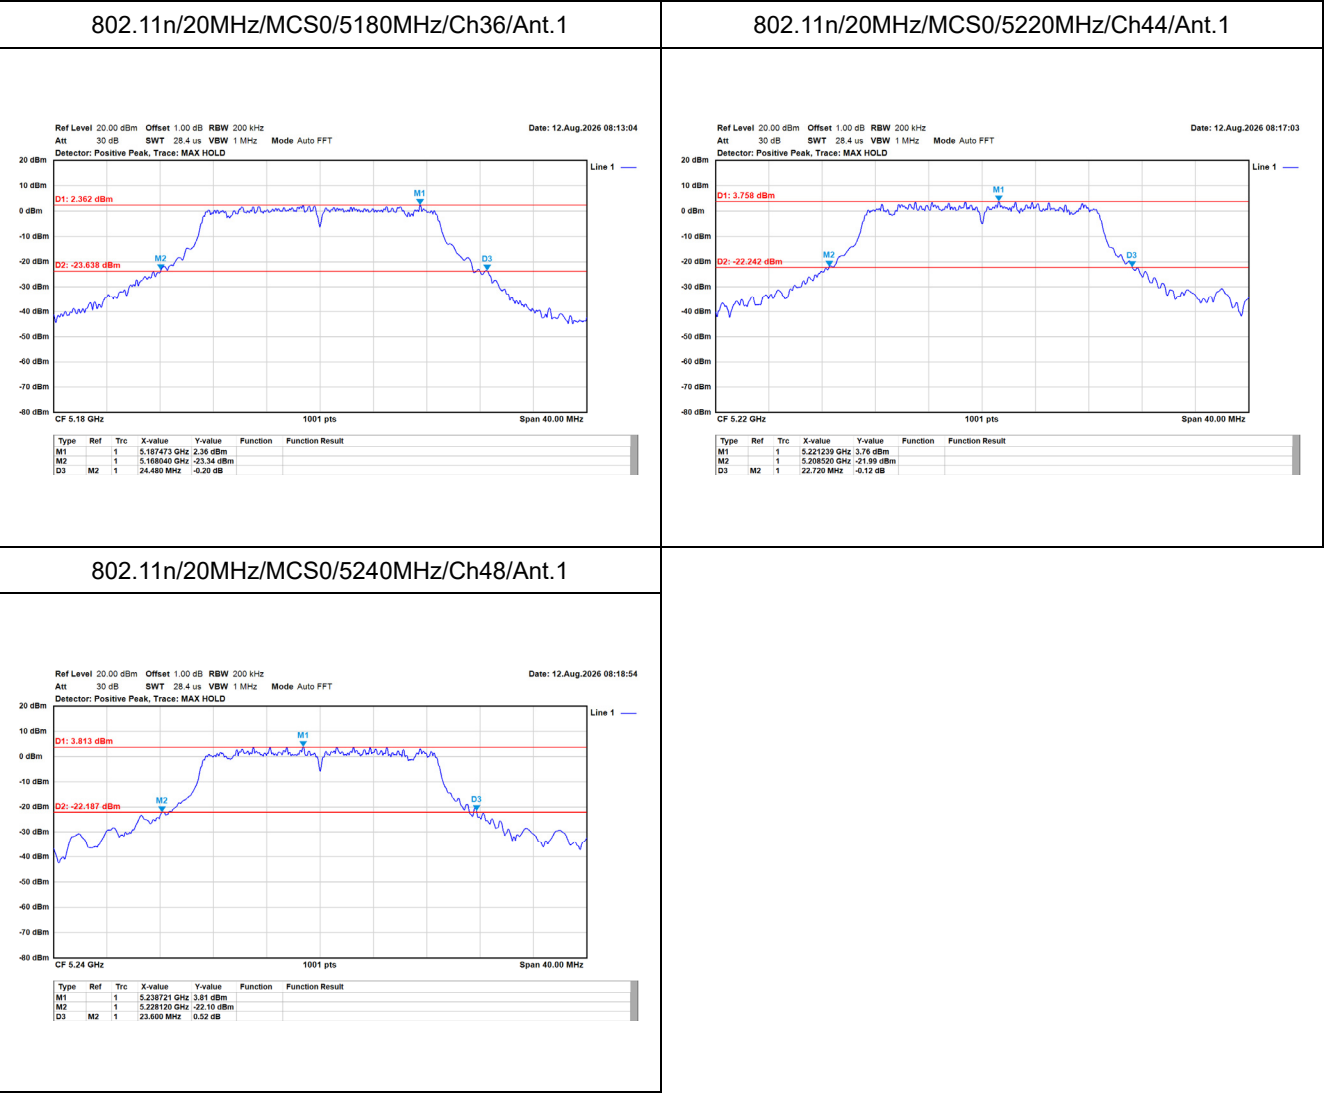

For DTS Bandwidth:

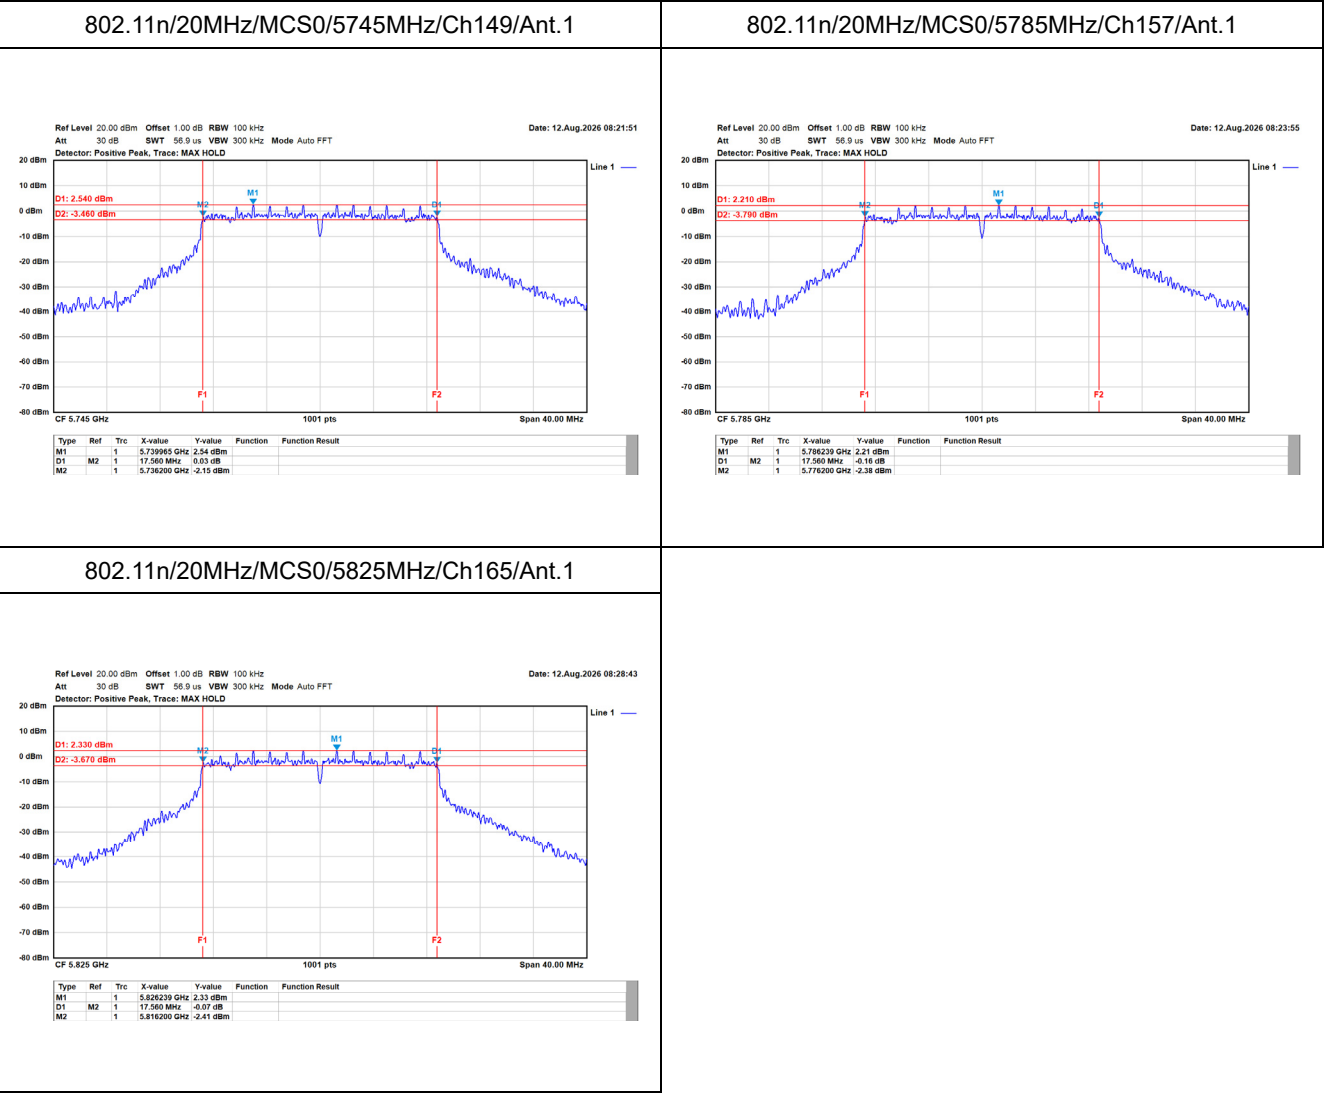

Appendix C. Test Result of Maximum Conducted Output Power**SISO A**

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5180	14.74	24.00	Pass
	5220	14.76	24.00	Pass
	5240	14.75	24.00	Pass
	5745	14.77	30.00	Pass
	5785	14.71	30.00	Pass
	5825	14.76	30.00	Pass


SISO B

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
802.11n (20MHz)	5180	14.63	24.00	Pass
	5220	14.62	24.00	Pass
	5240	14.64	24.00	Pass
	5745	14.60	30.00	Pass
	5785	14.58	30.00	Pass
	5825	14.55	30.00	Pass

Appendix D. Test Result of Maximum Power Spectral Density**SISO A**

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11n (20MHz)	5180	1.90	11.00	Pass
	5220	2.82	11.00	Pass
	5240	2.03	11.00	Pass

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11n (20MHz)	5745	0.11	30.00	Pass
	5785	-0.24	30.00	Pass
	5825	0.20	30.00	Pass

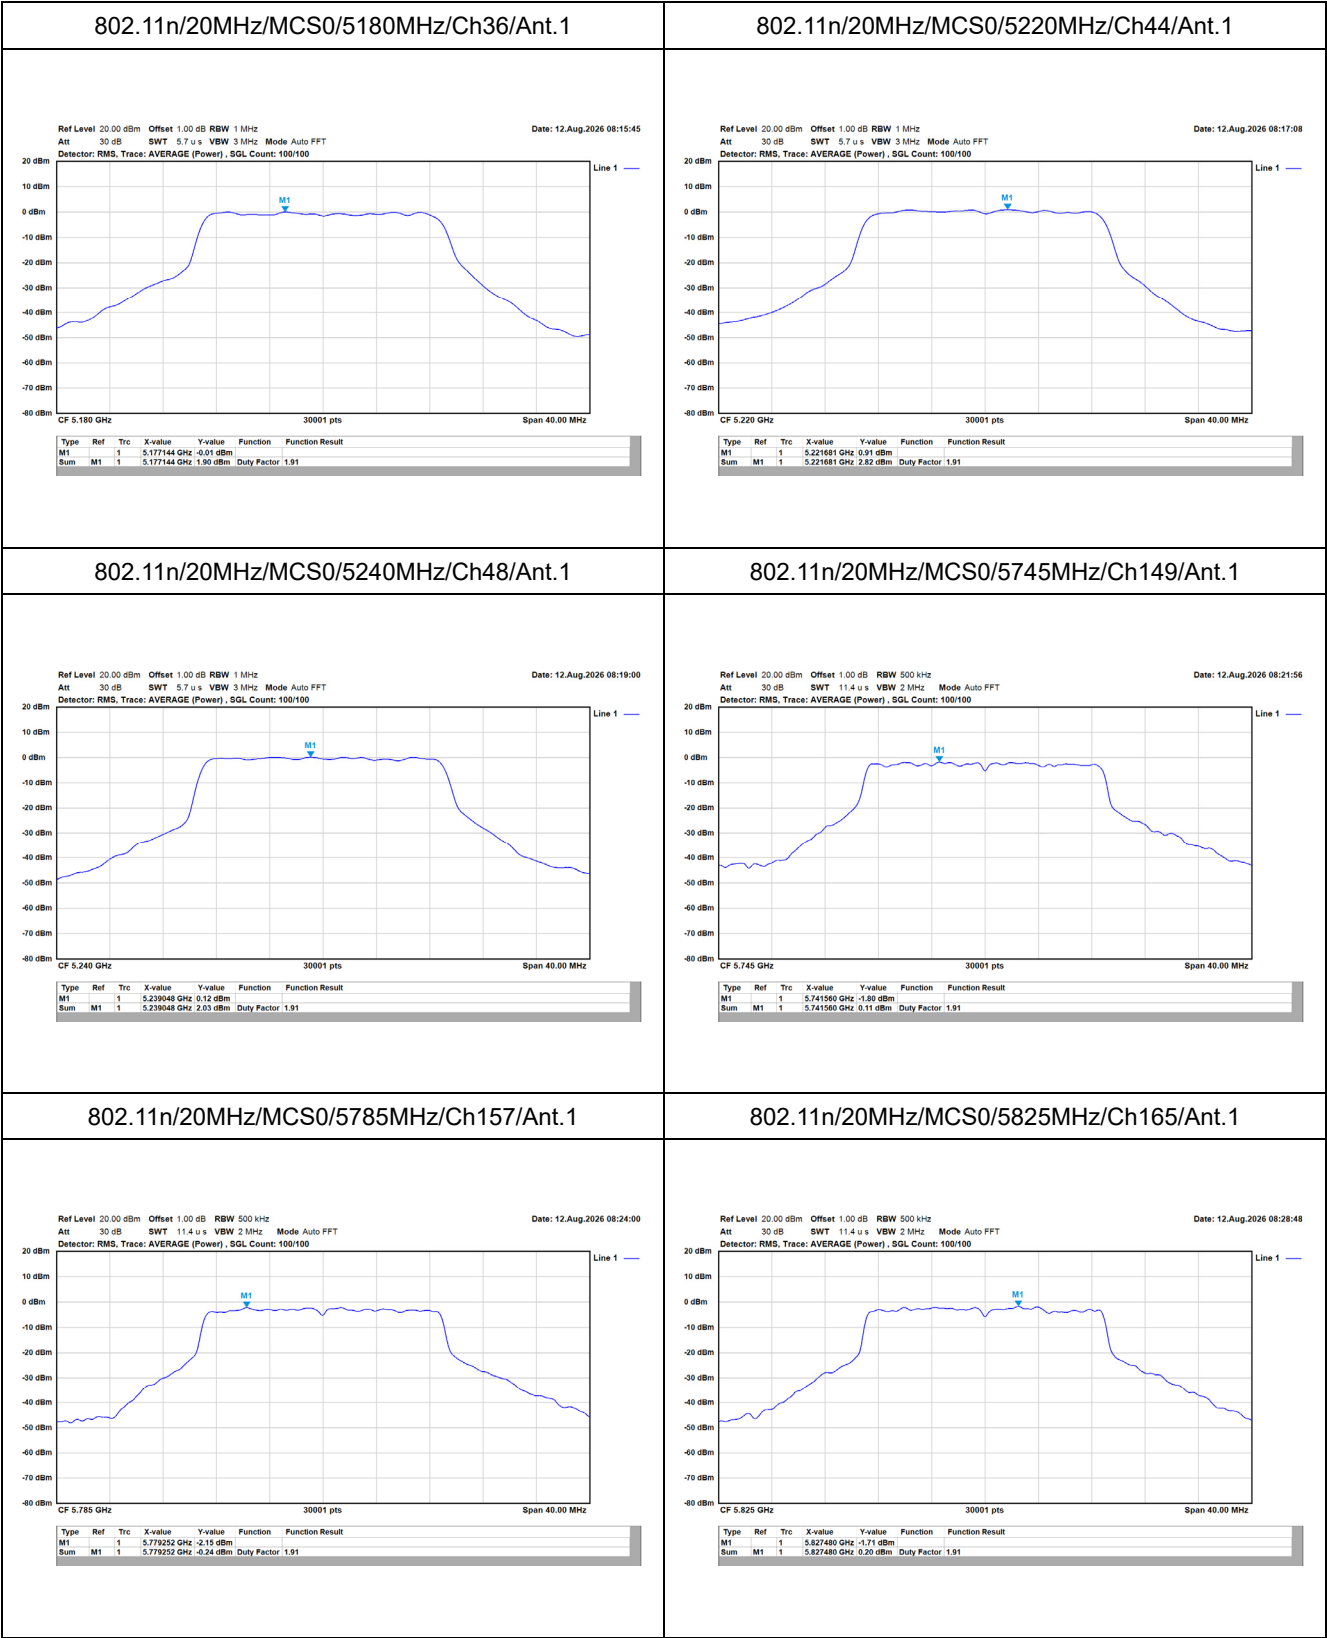


Appendix E. Test Result of Radiated Emission

SISO A

TX_n20_5180MHz_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5180MHz
Test BY :Rock

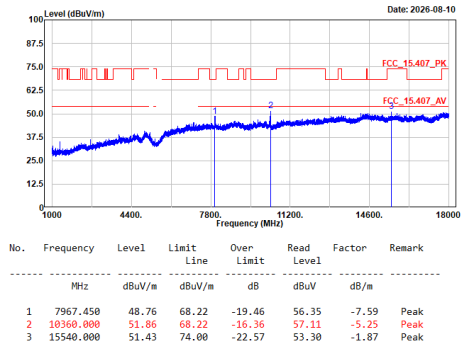

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5180MHz_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5180MHz
Test BY :Rock

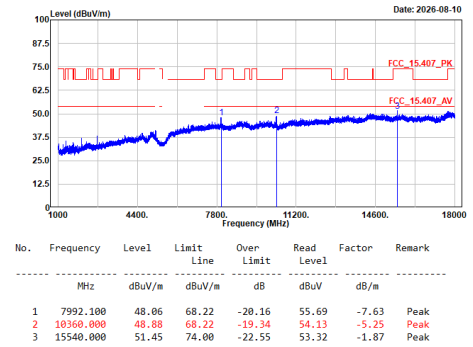

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5220MHz_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5220MHz
Test BY :Rock

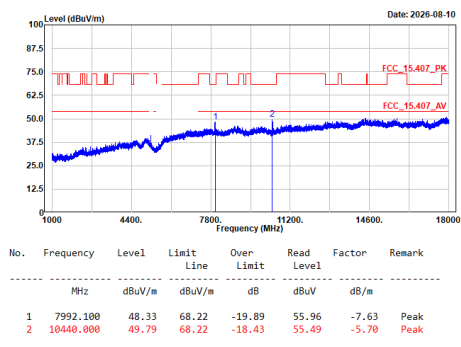

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5220MHz_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5220MHz
Test BY :Rock

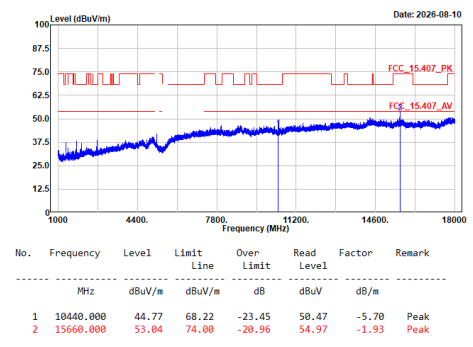

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5240MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5240MHz
Test BY :Rock

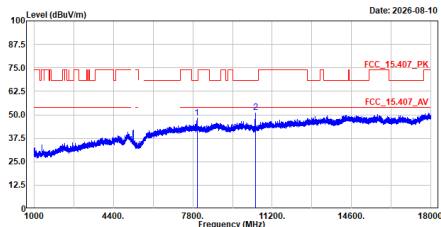


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7978.500	48.16	68.22	-20.06	55.74	-7.58	Peak
2	10480.000	51.41	68.22	-16.81	56.80	-5.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5240MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5240MHz
Test BY :Rock

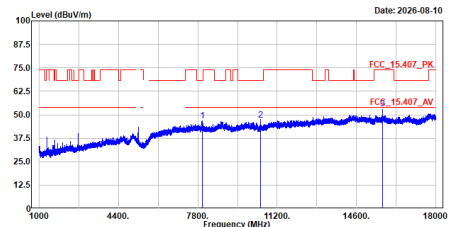


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7992.950	46.83	68.22	-21.39	54.45	-7.62	Peak
2	10480.000	47.01	68.22	-21.21	52.40	-5.39	Peak
3	15720.000	53.07	74.00	-20.93	54.86	-1.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5745MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5745MHz
Test BY :Rock

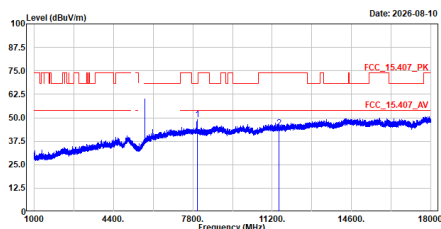


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7981.050	48.98	68.22	-19.24	56.58	-7.60	Peak
2	11490.000	44.67	74.00	-29.33	47.14	-2.47	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5745MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5745MHz
Test BY :Rock

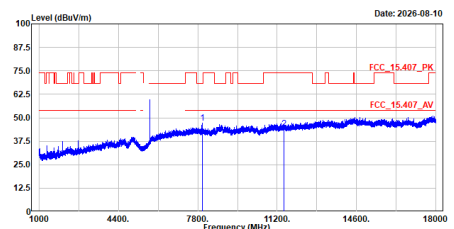


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7981.050	47.27	68.22	-20.95	54.87	-7.60	Peak
2	11490.000	44.28	74.00	-29.72	46.75	-2.47	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5785MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5785MHz
Test BY :Rock

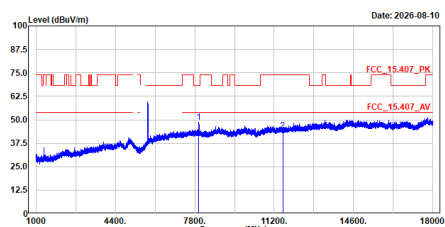


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7977.650	48.54	68.22	-19.68	56.12	-7.58	Peak
2	11570.000	43.99	74.00	-30.01	46.41	-2.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5785MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5785MHz
Test BY :Rock

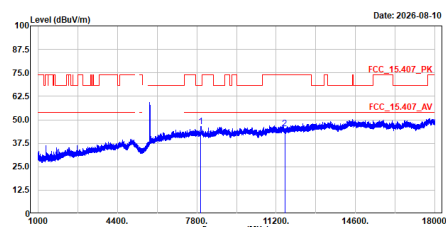


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7977.650	46.51	68.22	-21.71	54.09	-7.58	Peak
2	11570.000	45.19	74.00	-28.81	47.61	-2.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5825MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5825MHz
Test BY :Rock

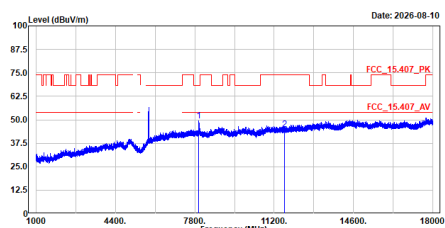


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7976.800	49.33	68.22	-18.89	56.92	-7.59	Peak
2	11650.000	44.90	74.00	-29.10	47.35	-2.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5825MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5825MHz
Test BY :Rock

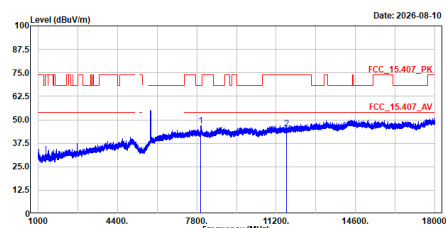


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7970.800	46.70	68.22	-21.52	54.27	-7.57	Peak
2	11650.000	45.39	74.00	-28.61	47.84	-2.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5785MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5785MHz
Test BY :Rock

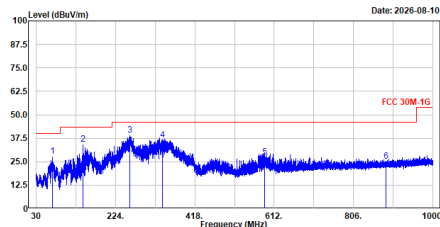


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	70.401	27.80	48.00	-12.20	54.26	-26.46	QP
2	145.139	34.42	43.50	-9.08	58.50	-24.08	QP
3	258.775	39.33	46.00	-6.67	64.04	-24.71	QP
4	339.624	36.67	46.00	-9.33	58.72	-22.05	QP
5	588.866	27.70	46.00	-18.30	43.88	-16.18	QP
6	886.268	25.40	46.00	-20.60	37.34	-11.94	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_n20_5785MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5785MHz
Test BY :Rock

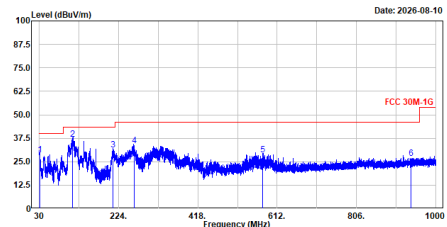


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	31.261	28.70	48.00	-11.30	53.76	-25.06	QP
2	110.656	36.81	43.50	-6.69	63.81	-27.00	QP
3	209.644	31.16	43.50	-12.34	57.74	-26.58	QP
4	262.170	33.48	46.00	-12.52	58.04	-24.56	QP
5	575.916	28.55	46.00	-17.45	45.04	-16.49	QP
6	939.472	26.96	46.00	-19.04	38.05	-11.09	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_n20_5180MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5180MHz
Test BY :Rock

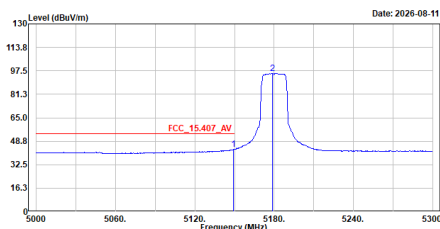


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5149.400	43.15	54.00	-10.85	27.49	15.66	Average
2	5178.500	95.83	-----	-----	80.08	15.75	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5180MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5180MHz
Test BY :Rock

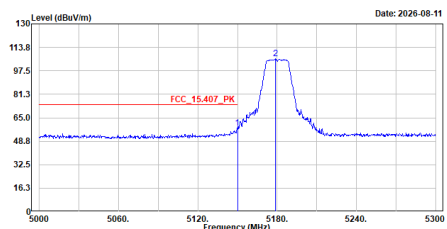


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5150.000	57.80	74.00	-16.20	42.14	15.66	Peak
2	5178.500	105.75	-----	-----	90.00	15.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5180MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5180MHz
Test BY :Rock

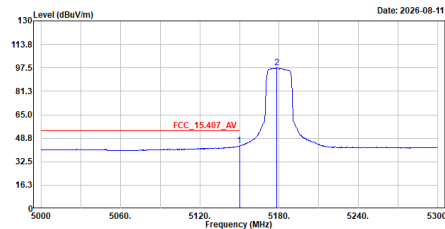


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5158.000	43.56	54.00	-10.44	27.90	15.66	Average
2	5178.200	97.62	-----	-----	81.87	15.75	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5180MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5180MHz
Test BY :Rock

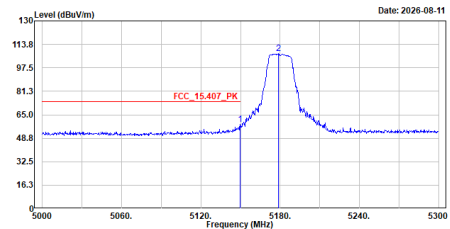


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5149.700	58.28	74.00	-15.72	42.62	15.66	Peak
2	5178.500	107.45	-----	-----	91.70	15.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5745MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5745MHz
Test BY :Rock

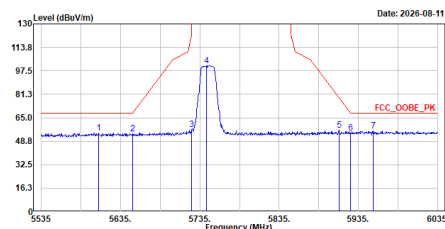


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5607.000	54.37	68.20	-13.83	37.53	16.84	Peak
2	5650.000	54.11	68.21	-14.10	37.11	17.00	Peak
3	5725.000	57.02	122.20	-65.18	39.66	17.36	Peak
4	5743.500	101.17	-----	-----	83.79	17.38	Peak
5	5910.500	56.32	78.94	-22.62	38.52	17.80	Peak
6	5925.000	54.42	68.21	-13.79	36.53	17.89	Peak
7	5954.000	56.09	68.20	-12.11	38.17	17.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5745MHz_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5745MHz
Test BY :Rock

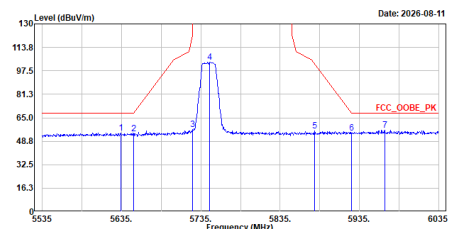

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5634.000	54.55	68.20	-13.65	37.60	16.95	Peak
2	5650.000	53.84	68.21	-14.37	36.84	17.00	Peak
3	5725.000	56.72	122.20	-65.48	39.36	17.36	Peak
4	5746.500	103.36	-----	-----	85.98	17.38	Peak
5	5878.500	55.75	102.61	-46.86	38.11	17.64	Peak
6	5925.000	54.61	68.21	-13.60	36.72	17.89	Peak
7	5967.000	56.43	68.20	-11.77	38.54	17.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Worst-Case Emissions Above 18 GHz

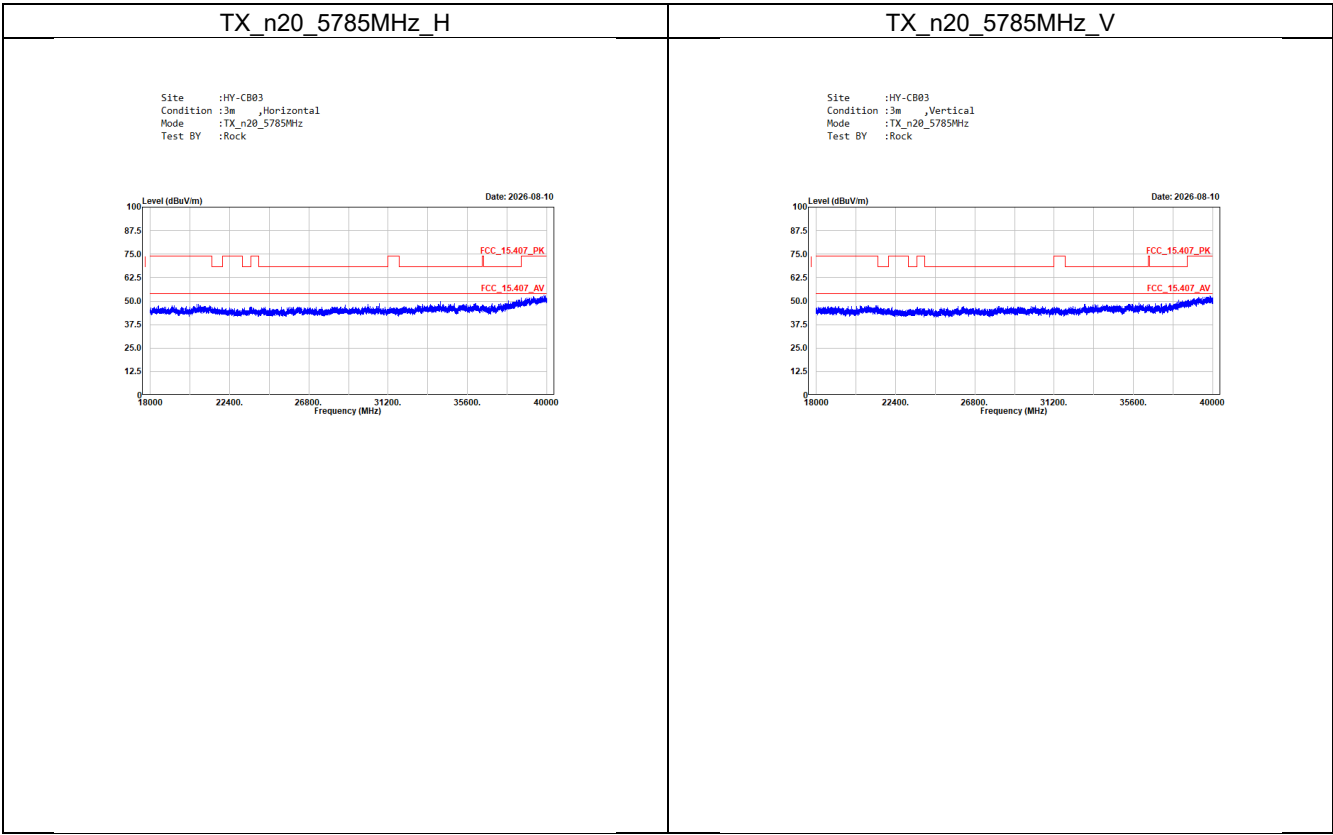

SISO B

TX_n20_5180MHz_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5180MHz
Test BY :Rock



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5180MHz_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5180MHz
Test BY :Rock

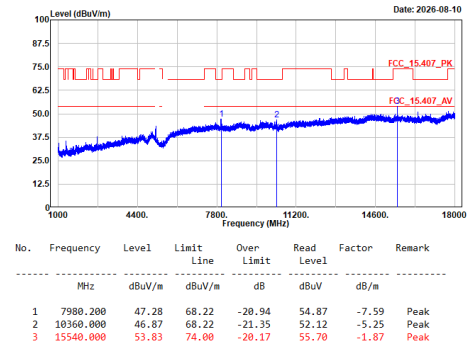

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5220MHz_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5220MHz
Test BY :Rock

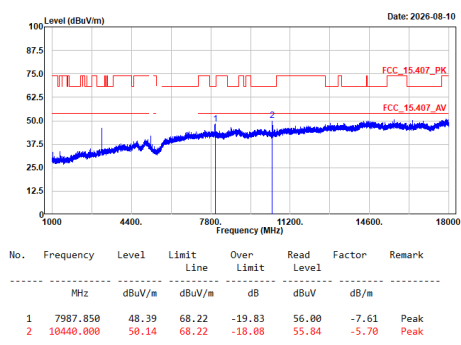

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5220MHz_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5220MHz
Test BY :Rock

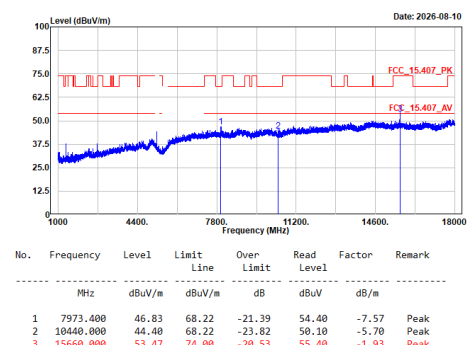

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5240MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5240MHz
Test BY :Rock

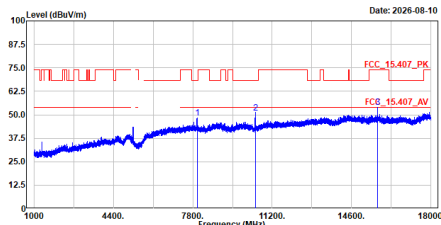


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7985.300	48.49	68.22	-19.73	56.10	-7.61	Peak
2	10480.000	50.54	68.22	-17.28	56.33	-5.39	Peak
3	15720.000	53.92	74.00	-20.08	55.71	-1.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5240MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5240MHz
Test BY :Rock

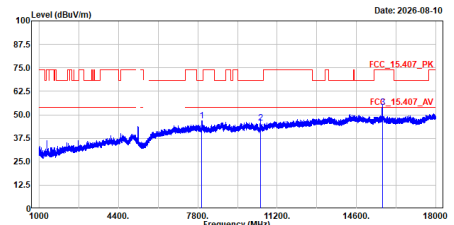


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7983.200	46.83	68.22	-21.39	54.44	-7.61	Peak
2	10480.000	45.79	68.22	-22.43	51.18	-5.39	Peak
3	15720.000	53.79	74.00	-20.21	55.58	-1.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5745MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5745MHz
Test BY :Rock

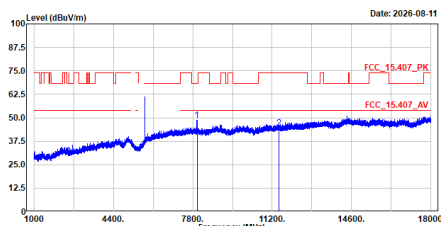


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7979.350	48.70	68.22	-19.52	56.29	-7.59	Peak
2	11490.000	44.64	74.00	-29.36	47.11	-2.47	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5745MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5745MHz
Test BY :Rock

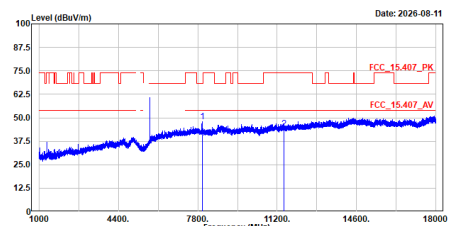


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7989.550	47.79	68.22	-20.43	55.41	-7.62	Peak
2	11490.000	44.11	74.00	-29.89	46.58	-2.47	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5785MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5785MHz
Test BY :Rock

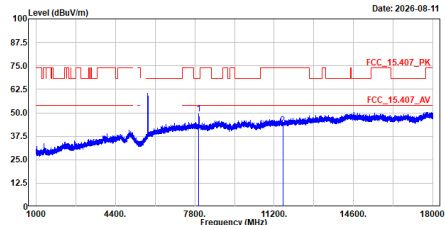


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7974.250	49.41	68.22	-18.81	56.99	-7.58	Peak
2	11570.000	43.45	74.00	-30.55	45.87	-2.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5785MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5785MHz
Test BY :Rock

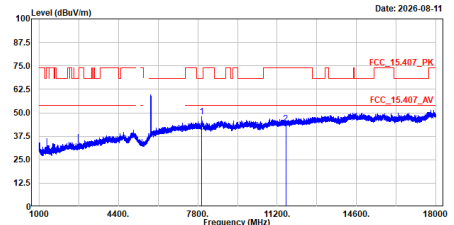


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7977.650	47.78	68.22	-20.44	55.36	-7.58	Peak
2	11570.000	44.26	74.00	-29.74	46.68	-2.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5825MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5825MHz
Test BY :Rock

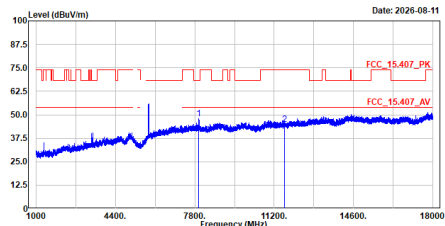


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7970.000	47.76	68.22	-20.46	55.33	-7.57	Peak
2	11650.000	44.76	74.00	-29.24	47.21	-2.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5825MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5825MHz
Test BY :Rock

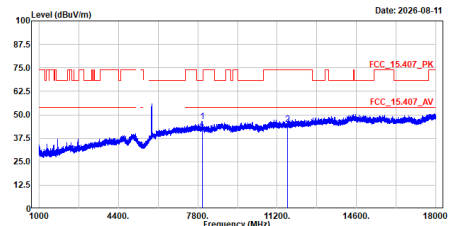


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7988.700	46.40	68.22	-21.82	54.02	-7.62	Peak
2	11650.000	44.88	74.00	-29.12	47.33	-2.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5785MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5785MHz
Test BY :Rock

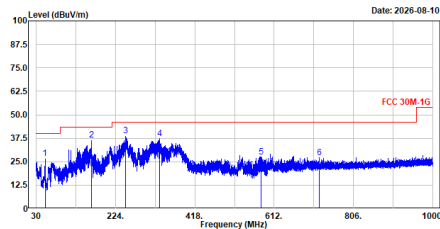


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	51.437	26.76	48.00	-13.24	58.30	-23.54	QP
2	165.897	36.69	43.50	-6.81	60.87	-24.18	QP
3	247.959	38.89	46.00	-7.11	63.84	-24.95	QP
4	331.088	37.38	46.00	-8.62	59.46	-22.08	QP
5	580.039	27.64	46.00	-18.36	44.04	-16.40	QP
6	721.998	27.09	46.00	-18.91	40.84	-13.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_n20_5785MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_5785MHz
Test BY :Rock

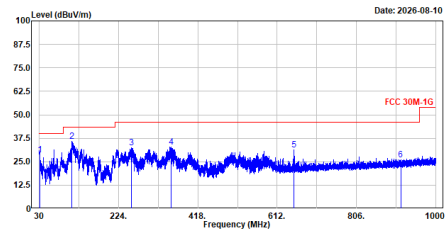


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	31.261	28.65	48.00	-11.35	53.71	-25.06	QP
2	189.783	35.80	43.50	-7.70	62.75	-26.95	QP
3	256.204	32.48	46.00	-13.52	57.31	-24.83	QP
4	352.574	32.72	46.00	-13.28	54.73	-22.01	QP
5	653.856	31.25	46.00	-14.75	46.22	-14.97	QP
6	914.398	26.06	46.00	-19.94	37.50	-11.44	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_n20_5180MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5180MHz
Test BY :Rock

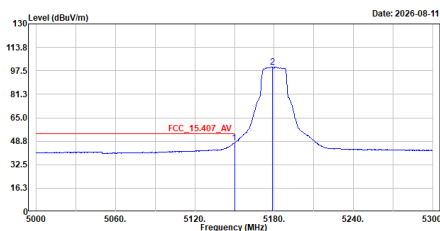


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5150.000	47.72	54.00	-6.28	32.06	15.66	Average
2	5178.500	100.26	-----	-----	84.51	15.75	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5180MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_5180MHz
Test BY :Rock

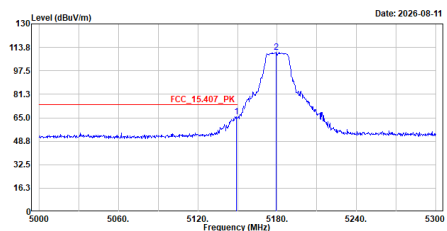


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5149.100	65.79	74.00	-8.21	50.13	15.66	Peak
2	5179.100	110.29	-----	-----	94.54	15.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5180MHz_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_n20_5180MHz
Test BY :Rock

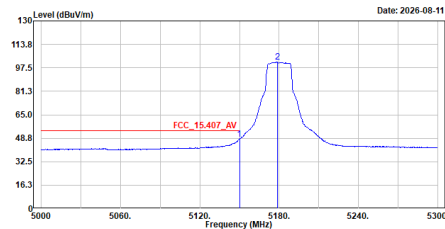


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5198.000	48.28	54.00	-5.72	32.62	15.66	Average
2	5178.500	101.48	-----	-----	85.73	15.75	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5180MHz_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_n20_5180MHz
Test BY :Rock

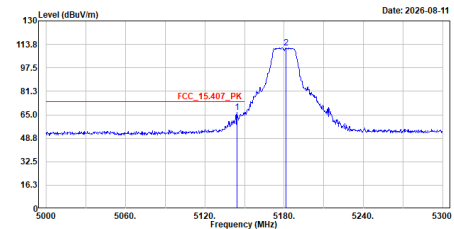


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5144.600	66.58	74.00	-7.42	50.93	15.65	Peak
2	5181.500	111.38	-----	-----	95.62	15.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5745MHz_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_n20_5745MHz
Test BY :Rock

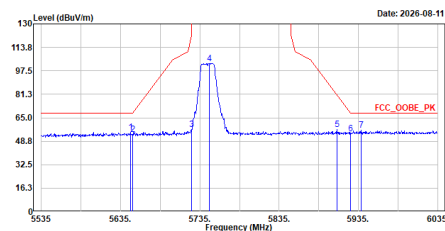


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5647.500	55.15	68.20	-13.05	38.15	17.00	Peak
2	5650.000	53.23	68.21	-14.98	36.23	17.00	Peak
3	5724.500	56.95	121.06	-64.11	39.59	17.36	Peak
4	5747.000	102.69	-----	-----	85.31	17.38	Peak
5	5908.000	56.77	80.78	-24.01	38.98	17.79	Peak
6	5925.000	54.02	68.21	-14.19	36.13	17.89	Peak
7	5938.500	56.20	68.20	-12.00	38.27	17.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_5745MHz_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_n20_5745MHz
Test BY :Rock

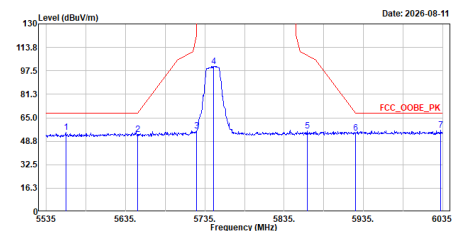

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5559.500	54.74	68.20	-13.46	38.26	16.48	Peak
2	5650.000	53.56	68.21	-14.65	36.56	17.00	Peak
3	5725.000	56.14	122.20	-66.06	38.78	17.36	Peak
4	5746.500	100.66	-----	-----	83.28	17.38	Peak
5	5864.500	55.96	108.14	-52.18	38.39	17.57	Peak
6	5925.000	54.34	68.21	-13.87	36.45	17.89	Peak
7	6032.500	56.66	68.20	-11.54	38.77	17.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Worst-Case Emissions Above 18 GHz

