



Appendix A. Test Result of AC Power Line Conducted Emission

SISO A

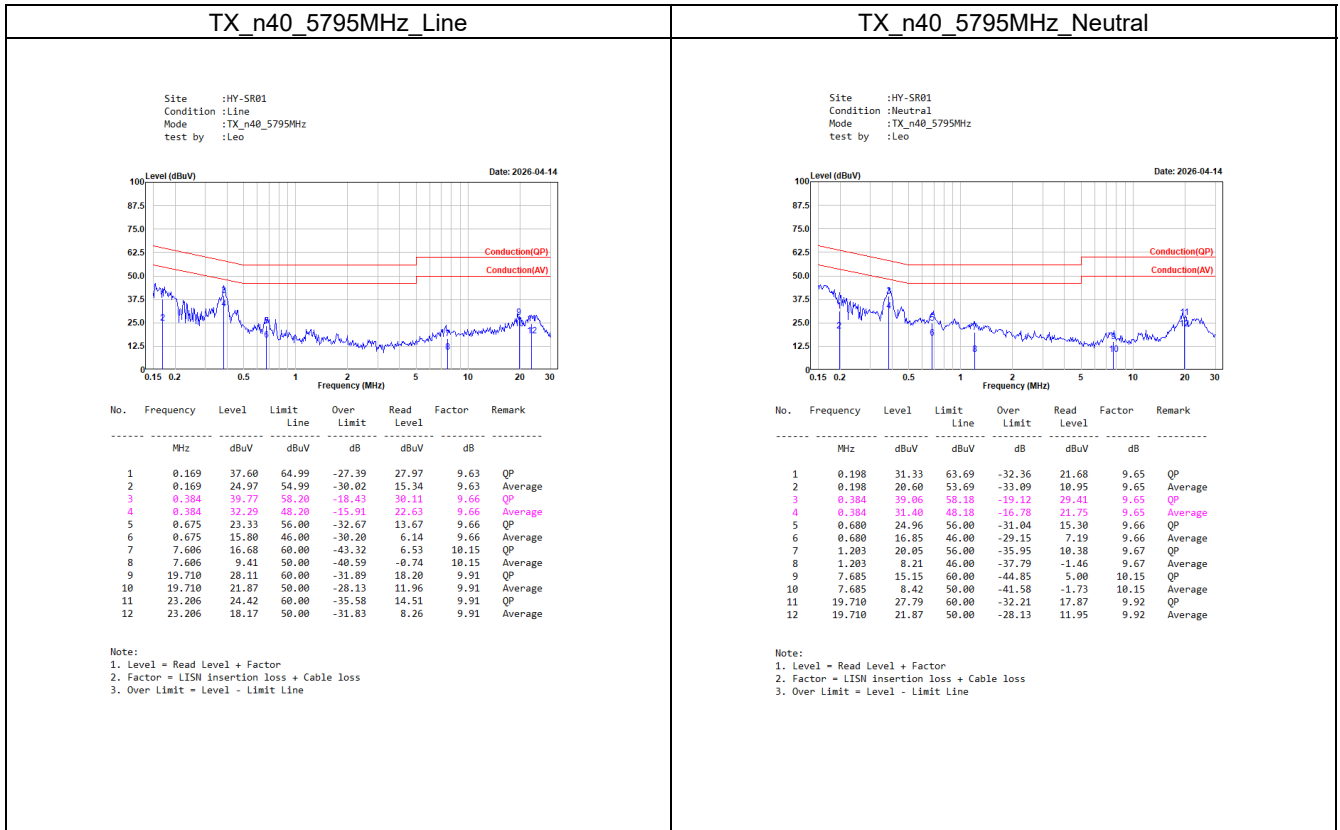


SISO B

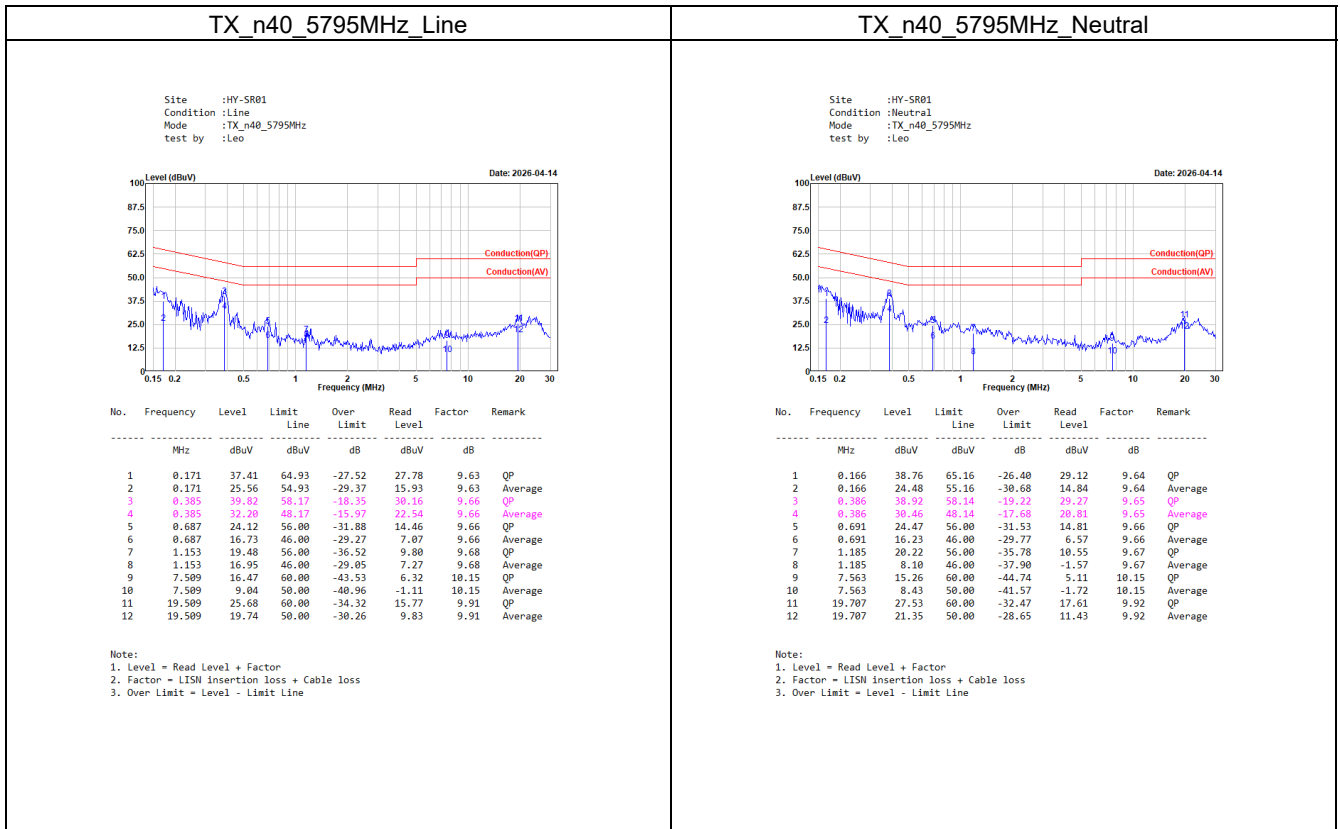


Appendix B. Test Result of Emission Bandwidth

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	
				99% Occupied Bandwidth & 26dB Bandwidth	
802.11n (40MHz)	5190	36.12	39.12	-	
	5230	36.12	38.72	-	
Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	
				99% Occupied Bandwidth	6dB Bandwidth
802.11n (40MHz)	5755	36.20	35.92	-	≥ 0.5
	5795	36.04	36.32	-	≥ 0.5


For 99% Occupied Bandwidth:

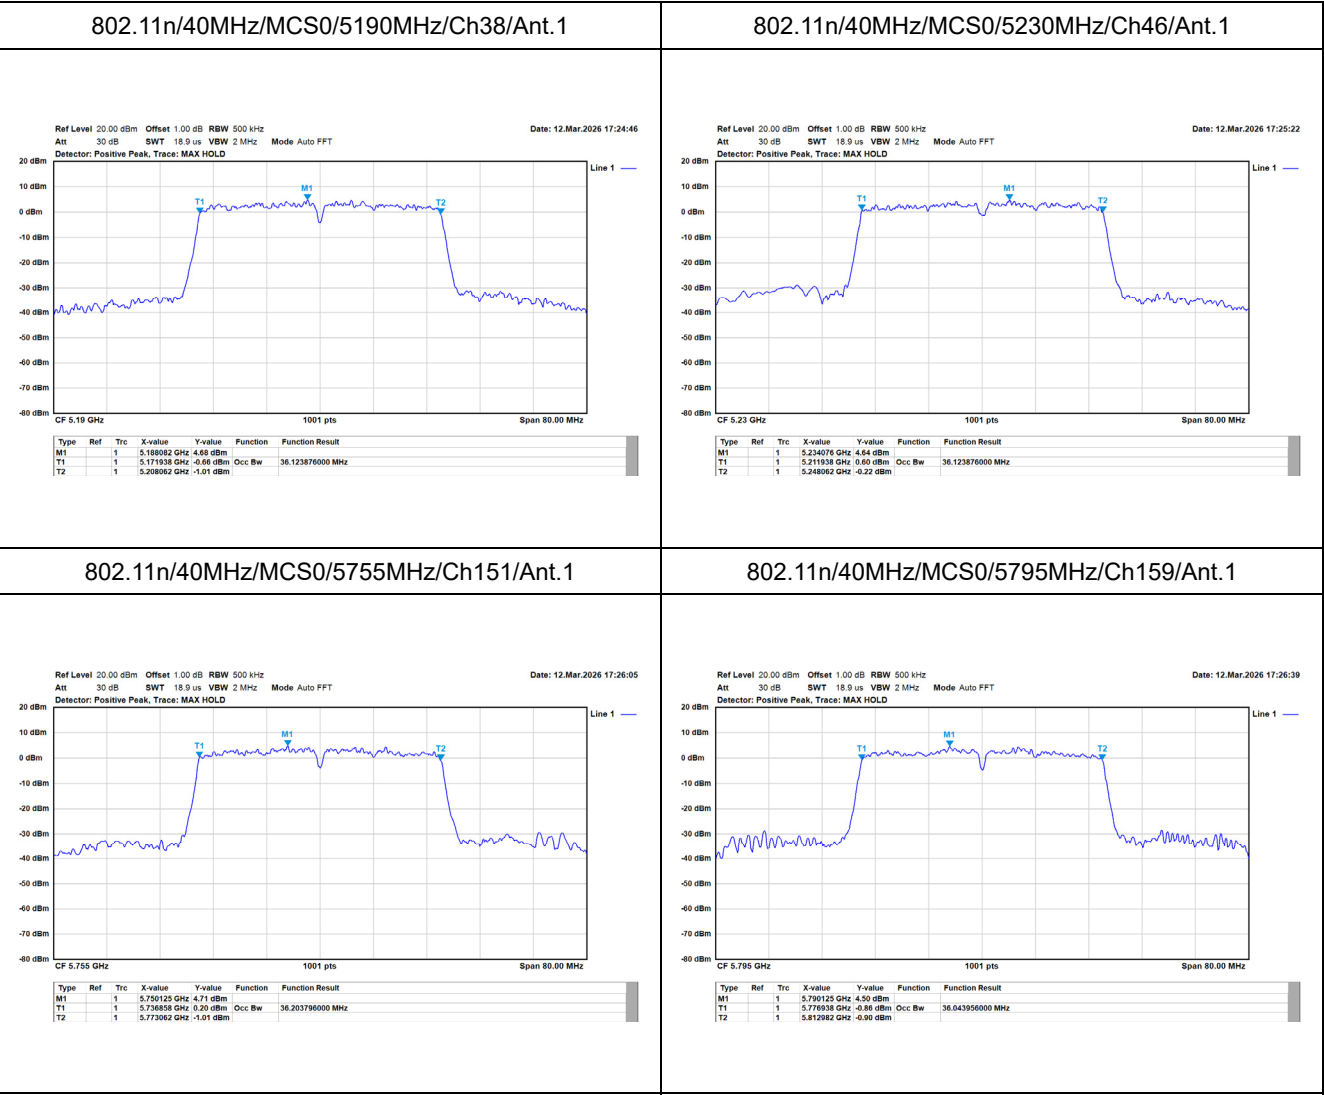

For 26dB Bandwidth:

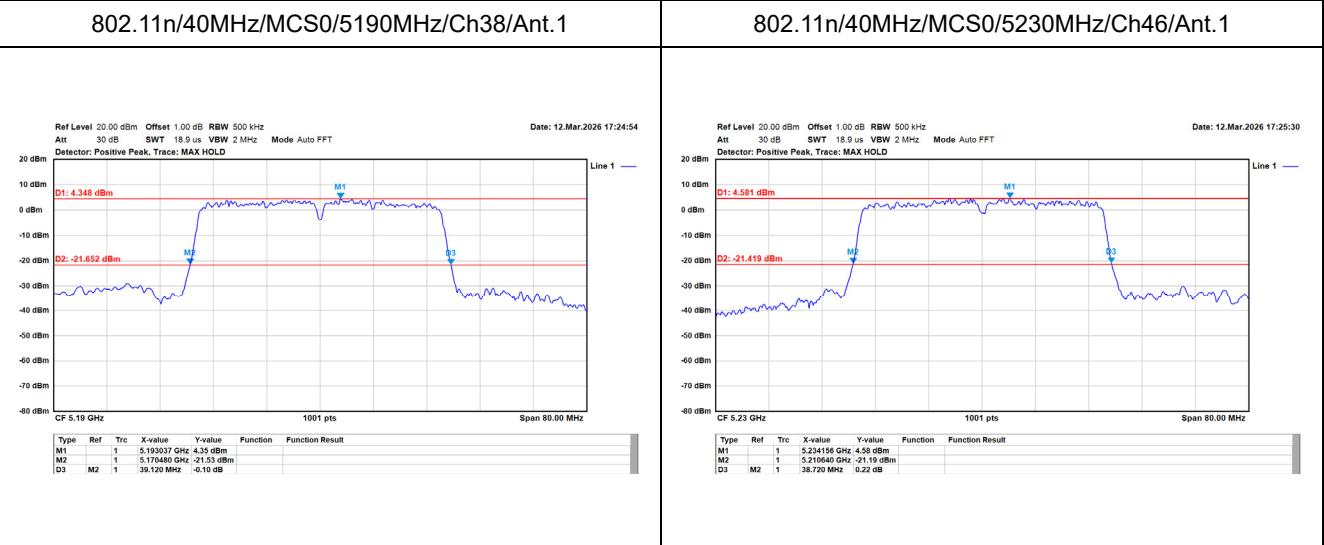

For 6dB Bandwidth:

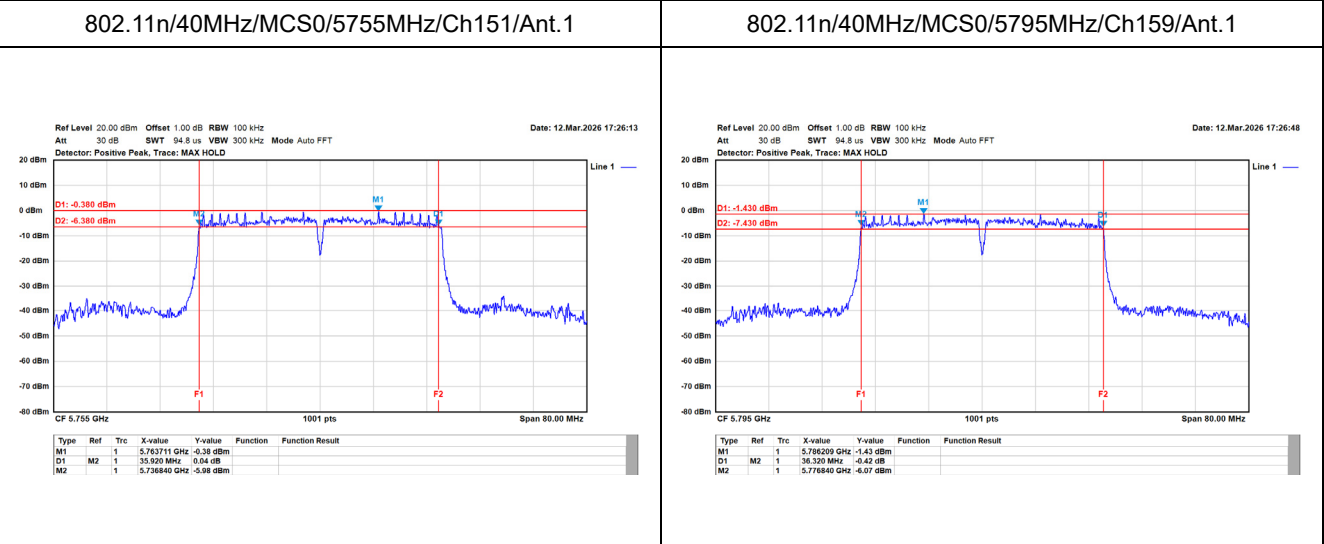

Appendix C. Test Result of Maximum Conducted Output Power**SISO A**

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
802.11n (40MHz)	5190	14.77	24.00	Pass
	5230	14.75	24.00	Pass
	5755	14.78	30.00	Pass
	5795	14.62	30.00	Pass


SISO B

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
802.11n (40MHz)	5190	14.62	24.00	Pass
	5230	14.67	24.00	Pass
	5755	14.66	30.00	Pass
	5795	14.57	30.00	Pass

Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11n (40MHz)	5190	0.90	11.00	Pass
802.11n (40MHz)	5230	1.43	11.00	Pass


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11n (40MHz)	5755	-1.65	30.00	Pass
802.11n (40MHz)	5795	-2.39	30.00	Pass

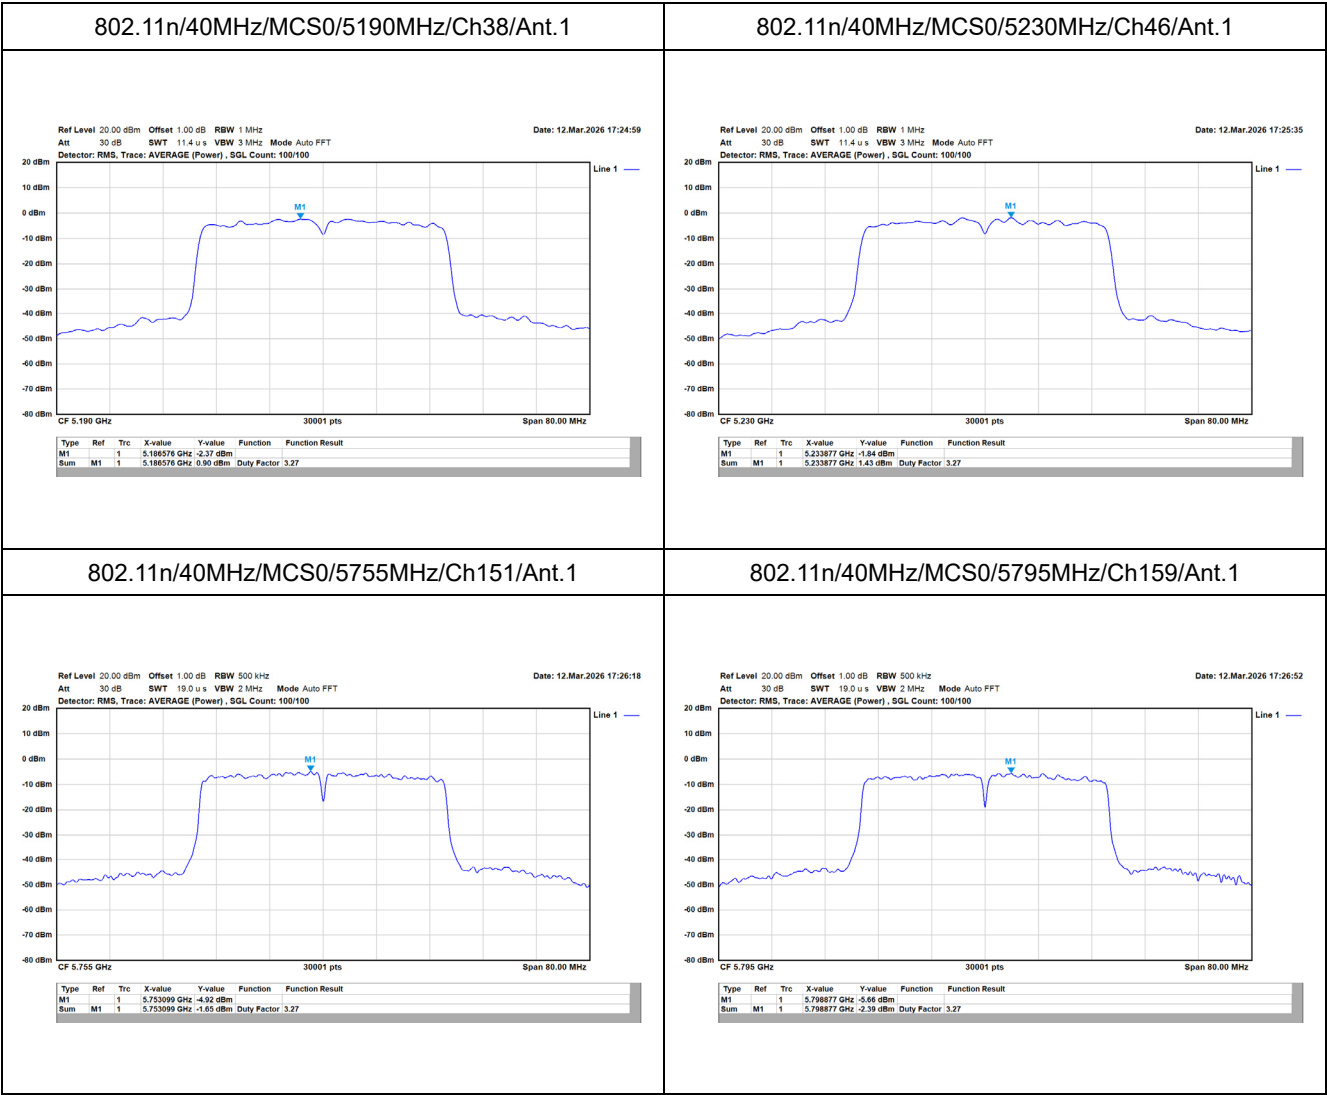


Appendix E. Test Result of Transmitter Radiated Spurious Emission

SISO A


TX_n40_5190MHz_H

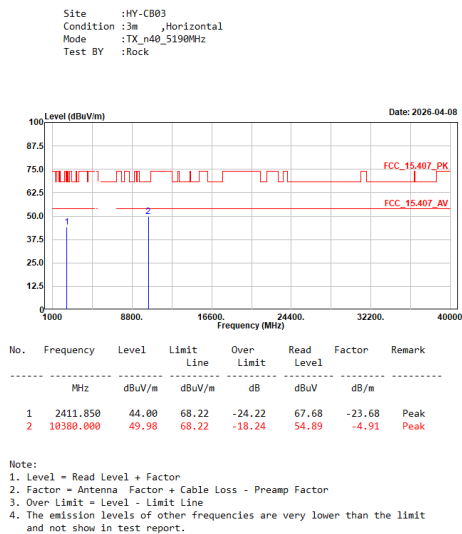


TX_n40_5190MHz_V

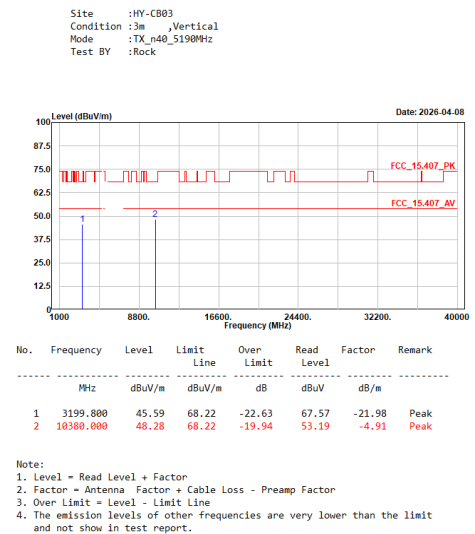

TX_n40_5230MHz_H

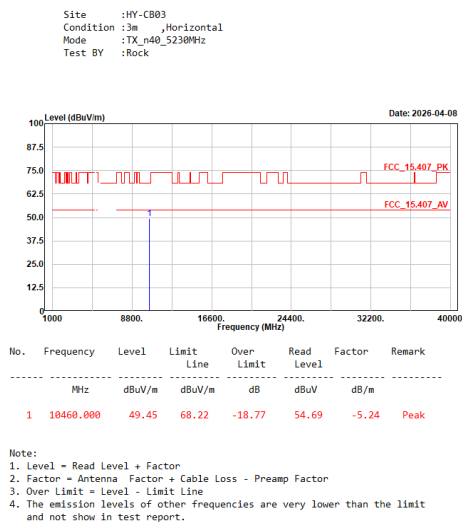


TX_n40_5230MHz_V

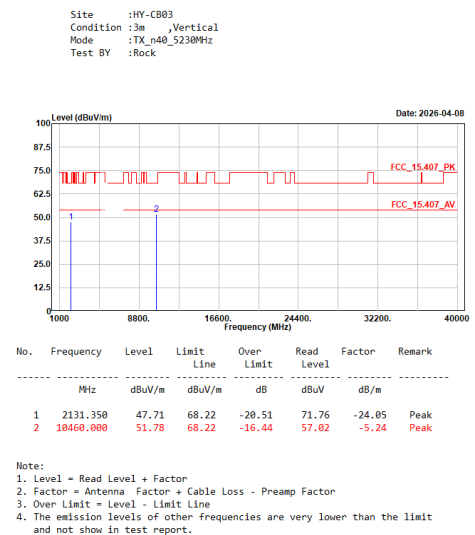

TX_n40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5755MHz
Test BY :Rock

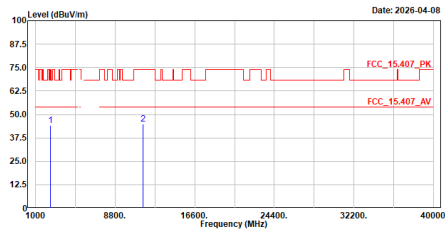


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2467.950	44.09	68.22	-24.13	68.01	-23.92	Peak
2	11510.000	45.09	74.00	-28.91	46.99	-1.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5755MHz
Test BY :Rock

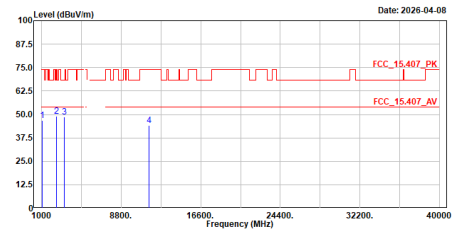


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1062.900	46.95	74.00	-27.05	73.37	-26.42	Peak
2	2450.900	49.19	68.22	-19.03	73.05	-23.86	Peak
3	3198.950	48.68	68.22	-19.54	70.66	-21.98	Peak
4	11510.000	44.07	74.00	-29.93	45.97	-1.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5795MHz
Test BY :Rock

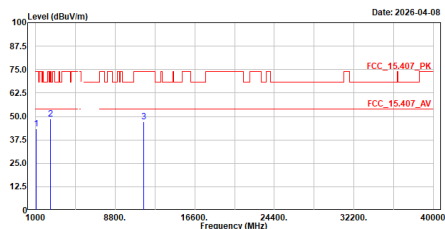


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1063.750	43.21	74.00	-30.79	69.62	-26.41	Peak
2	2467.950	48.60	68.22	-19.62	72.52	-23.92	Peak
3	11590.000	47.20	74.00	-26.80	49.13	-1.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5795MHz
Test BY :Rock

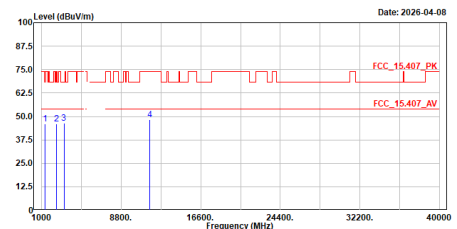


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1331.500	45.86	74.00	-28.14	71.46	-25.60	Peak
2	2454.350	45.92	68.22	-22.30	69.81	-23.89	Peak
3	3187.050	46.45	68.22	-21.77	68.49	-22.04	Peak
4	11590.000	48.47	74.00	-25.53	50.40	-1.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5795MHz
Test BY :Ashton

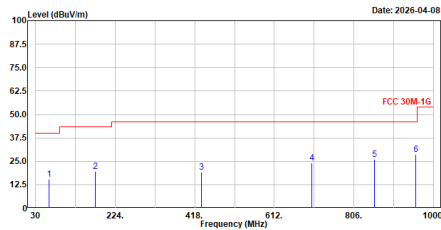


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	62.059	15.38	40.00	-24.62	40.19	-24.81	QP
2	175.597	19.40	43.50	-24.02	44.30	-24.82	QP
3	434.345	19.14	46.00	-26.86	38.68	-19.54	QP
4	702.841	24.27	46.00	-21.73	38.36	-14.09	QP
5	856.925	26.08	46.00	-19.92	38.10	-12.02	QP
6	956.447	28.49	46.00	-17.51	39.18	-10.69	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_n40_5795MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5795MHz
Test BY :Ashton

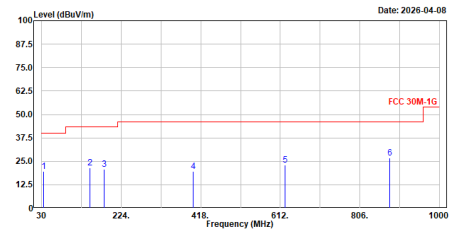


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	34.365	19.59	40.00	-20.41	44.29	-24.70	QP
2	148.486	21.57	43.50	-21.93	45.52	-23.95	QP
3	182.484	20.94	43.50	-22.56	46.71	-25.77	QP
4	399.958	19.69	46.00	-26.31	40.18	-20.49	QP
5	623.786	23.15	46.00	-22.85	38.46	-15.31	QP
6	879.187	26.94	46.00	-19.06	38.76	-11.82	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_n40_5190MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
Test BY :Rock

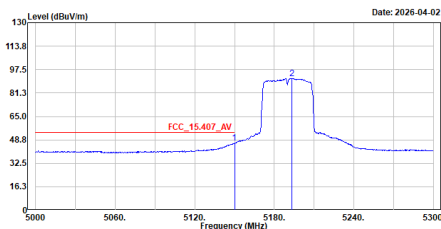


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	46.59	54.00	-7.41	30.83	15.76	Average
2	5193.200	91.35	-----	-----	75.45	15.90	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5190MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
Test BY :Rock

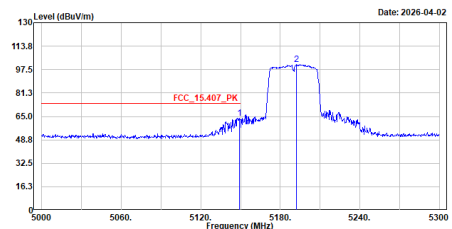


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.100	63.98	74.00	-10.02	48.22	15.76	Peak
2	5192.000	100.99	-----	-----	85.09	15.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5190MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5190MHz
Test BY :Rock

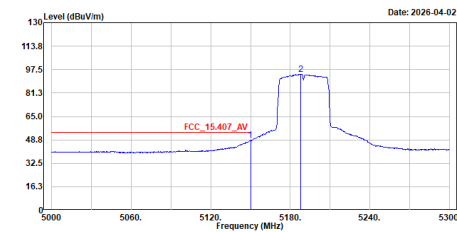


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	48.47	54.00	-5.53	32.71	15.76	Average
2	5187.800	94.34	-----	-----	78.47	15.87	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5190MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5190MHz
Test BY :Rock

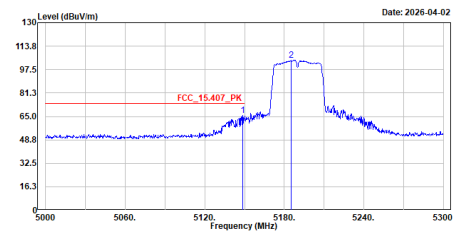


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.800	65.61	74.00	-8.39	49.85	15.76	Peak
2	5185.100	104.24	-----	-----	88.38	15.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5230MHz
Test BY :Rock

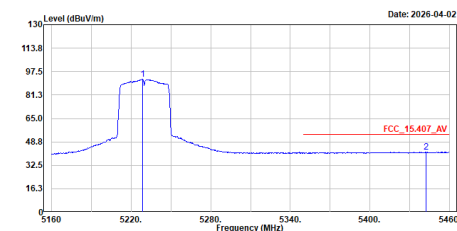


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5228.400	92.08	-----	-----	76.05	16.03	Average
2	5442.300	41.72	54.00	-12.28	25.50	16.22	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5230MHz
Test BY :Rock

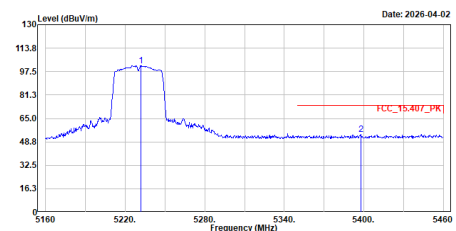


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5232.000	101.60	-----	-----	85.56	16.04	Peak
2	5397.900	54.09	74.00	-19.91	38.10	15.99	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5230MHz
Test BY :Rock

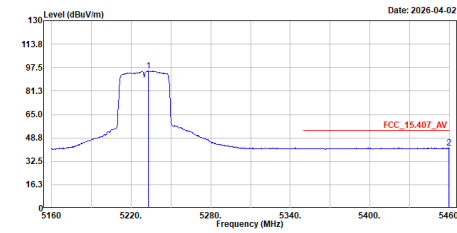


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5232.900	95.12	-----	-----	79.08	16.04	Average
2	5459.400	41.75	54.00	-12.25	25.46	16.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5230MHz
Test BY :Rock

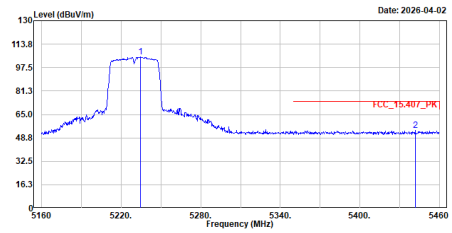


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5234.700	104.75	-----	-----	88.71	16.04	Peak
2	5441.700	53.94	74.00	-20.06	37.72	16.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5755MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5755MHz
Test BY :Rock

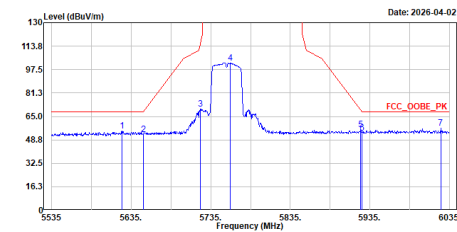


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5623.500	54.87	68.20	-13.33	37.70	17.17	Peak
2	5650.000	52.46	68.21	-15.75	35.15	17.31	Peak
3	5721.500	70.18	114.22	-44.04	52.54	17.64	Peak
4	5759.500	102.05	-----	-----	84.34	17.71	Peak
5	5923.500	56.10	69.32	-13.22	37.97	18.13	Peak
6	5925.000	53.61	68.21	-14.60	35.47	18.14	Peak
7	6024.000	56.80	68.20	-11.40	38.64	18.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5755MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5755MHz
Test BY :Rock

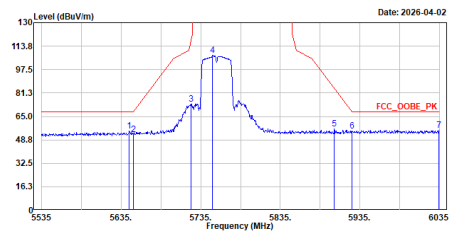


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5645.000	54.76	68.20	-13.44	37.48	17.28	Peak
2	5650.000	52.58	68.21	-15.63	35.27	17.31	Peak
3	5723.000	73.63	117.64	-44.01	55.98	17.65	Peak
4	5750.000	107.31	-----	-----	89.58	17.73	Peak
5	5903.000	56.26	64.48	-28.22	38.20	18.06	Peak
6	5925.000	55.11	68.21	-13.10	36.97	18.14	Peak
7	6034.000	55.49	68.20	-12.71	37.31	18.18	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5795MHz
Test BY :Rock

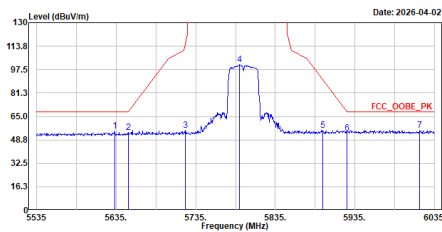


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5633.000	54.76	68.20	-13.44	37.54	17.22	Peak
2	5650.000	53.77	68.21	-14.44	36.46	17.31	Peak
3	5722.000	55.40	115.36	-59.96	37.76	17.64	Peak
4	5790.000	101.10	-----	-----	83.29	17.81	Peak
5	5895.000	55.54	90.40	-34.86	37.49	18.05	Peak
6	5925.000	53.38	68.21	-14.83	35.24	18.14	Peak
7	6016.500	55.64	68.20	-12.56	37.49	18.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5795MHz
Test BY :Rock

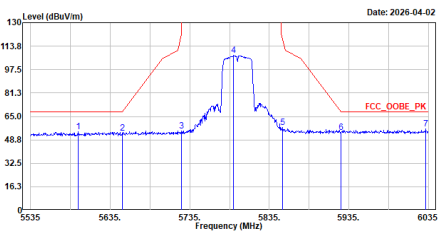


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5594.500	54.30	68.20	-13.90	37.28	17.02	Peak
2	5650.000	53.25	68.21	-14.96	35.94	17.31	Peak
3	5724.500	55.04	121.06	-66.02	37.59	17.65	Peak
4	5790.000	107.59	-----	-----	89.78	17.81	Peak
5	5852.000	57.33	117.64	-60.31	39.33	18.00	Peak
6	5925.000	53.74	68.21	-14.47	35.60	18.14	Peak
7	6031.500	56.22	68.20	-11.98	38.05	18.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

SISO B

TX_n40_5190MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
Test BY :Rock

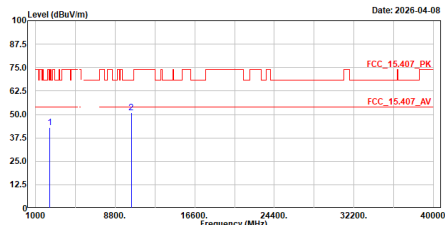


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2412.700	43.10	68.22	-25.12	66.79	-23.69	Peak
2	10380.000	50.90	68.22	-17.32	55.81	-4.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5190MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5190MHz
Test BY :Rock

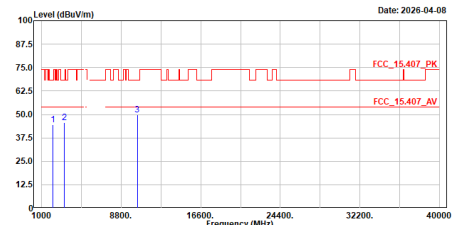


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2129.650	44.54	68.22	-23.68	68.59	-24.05	Peak
2	3191.300	45.77	68.22	-22.45	67.79	-22.02	Peak
3	10380.000	49.63	68.22	-18.59	54.54	-4.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5230MHz
Test BY :Rock

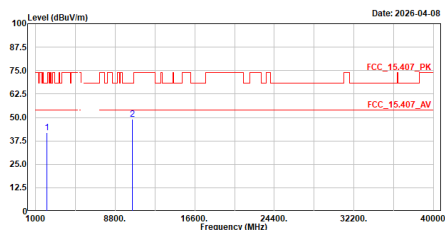


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2123.700	41.78	68.22	-26.44	65.82	-24.04	Peak
2	10460.000	48.92	68.22	-19.30	54.16	-5.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5230MHz
Test BY :Rock

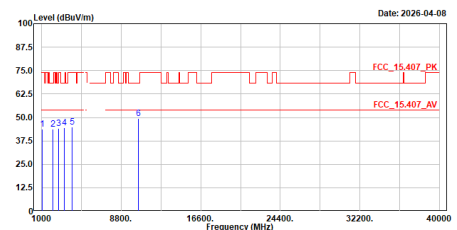


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1062.050	43.77	74.00	-30.23	70.21	-26.44	Peak
2	2130.500	43.91	68.22	-24.31	67.96	-24.05	Peak
3	2654.100	44.33	68.22	-23.89	67.64	-23.31	Peak
4	3197.250	44.63	68.22	-23.59	66.62	-21.99	Peak
5	3991.150	44.90	74.00	-29.10	63.69	-18.79	Peak
6	10460.000	49.38	68.22	-18.84	54.62	-5.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5755MHz
Test BY :Rock

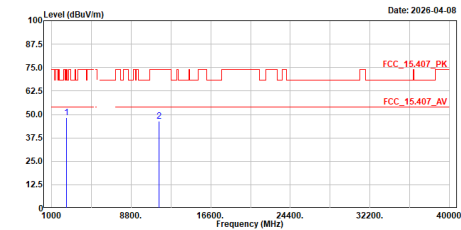


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2467.950	48.29	68.22	-19.93	72.21	-23.92	Peak
2	11518.000	46.28	74.00	-27.72	48.18	-1.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5755MHz
Test BY :Rock

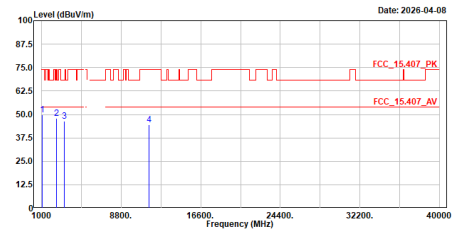


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1063.750	49.88	74.00	-24.12	76.29	-26.41	Peak
2	2464.550	47.79	68.22	-20.43	71.68	-23.89	Peak
3	3196.400	46.23	68.22	-21.99	68.22	-21.99	Peak
4	11518.000	44.52	74.00	-29.48	46.42	-1.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5795MHz
Test BY :Rock

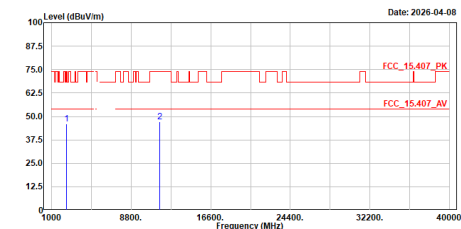


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2467.100	46.19	68.22	-22.03	70.10	-23.91	Peak
2	11590.000	47.22	74.00	-26.78	49.15	-1.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5795MHz
Test BY :Rock

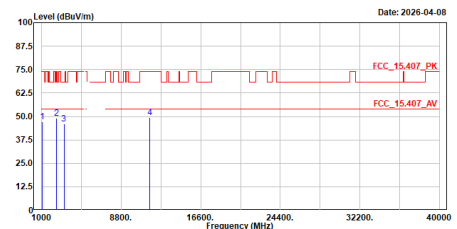


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1062.900	47.16	74.00	-26.84	73.58	-26.42	Peak
2	2463.700	49.01	68.22	-19.21	72.88	-23.87	Peak
3	3189.600	45.99	68.22	-22.23	68.01	-22.02	Peak
4	11590.000	49.27	74.00	-24.73	51.20	-1.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5795MHz
Test BY :Ashton

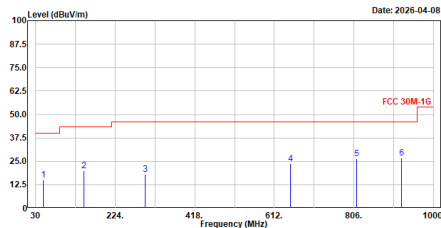


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.721	15.22	40.00	-24.78	38.71	-23.49	QP
2	140.534	19.82	43.50	-23.68	43.77	-23.95	QP
3	297.041	18.13	46.00	-27.87	41.39	-23.26	QP
4	652.013	23.75	46.00	-22.25	38.71	-14.96	QP
5	812.548	26.24	46.00	-19.76	38.73	-12.49	QP
6	921.867	26.83	46.00	-19.17	38.03	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_n40_5795MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5795MHz
Test BY :Ashton

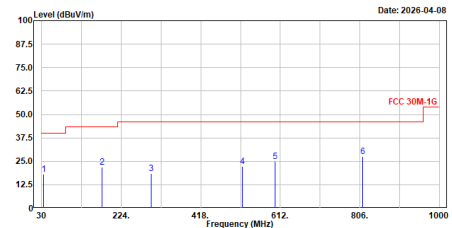


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	34.899	18.09	40.00	-21.91	42.84	-24.75	QP
2	177.101	22.03	43.50	-21.47	47.13	-25.10	QP
3	297.041	18.59	46.00	-27.41	41.85	-23.26	QP
4	519.802	22.13	46.00	-23.87	39.87	-17.74	QP
5	599.924	24.80	46.00	-21.20	40.55	-15.75	QP
6	812.548	27.53	46.00	-18.47	40.02	-12.49	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_n40_5190MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
Test BY :Rock

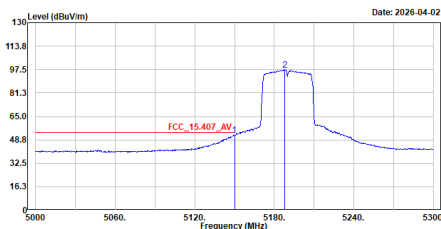


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	52.12	54.00	-1.88	36.36	15.76	Average
2	5187.800	97.04	-----	-----	81.17	15.87	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5190MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5190MHz
Test BY :Rock

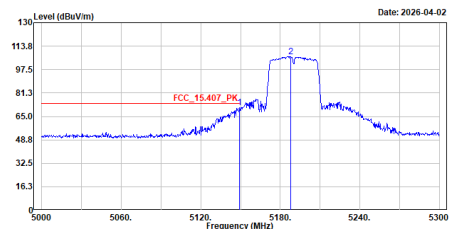


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.400	71.19	74.00	-2.81	55.43	15.76	Peak
2	5188.100	106.65	-----	-----	90.78	15.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5190MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5190MHz
Test BY :Rock

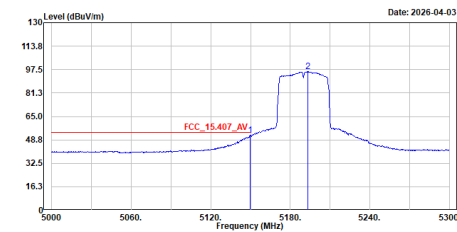


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.700	51.88	54.00	-2.12	36.12	15.76	Average
2	5193.200	96.02	-----	-----	80.12	15.90	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5190MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5190MHz
Test BY :Rock

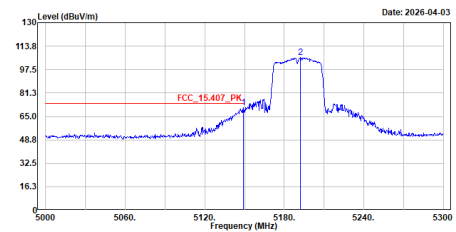


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.400	71.26	74.00	-2.74	55.50	15.76	Peak
2	5192.300	105.80	-----	-----	89.90	15.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5230MHz
Test BY :Rock

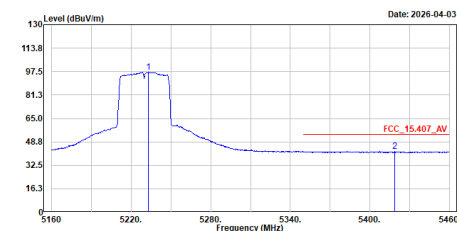


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5233.200	96.96	-----	-----	80.92	16.04	Average
2	5418.900	41.96	54.00	-12.04	25.86	16.10	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5230MHz
Test BY :Rock

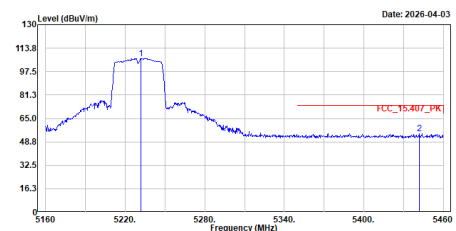


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5232.000	106.67	-----	-----	90.63	16.04	Peak
2	5441.700	54.44	74.00	-19.56	38.22	16.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5230MHz
Test BY :Rock

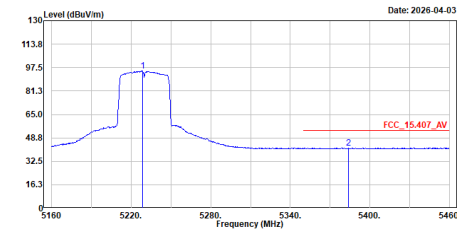


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5228.400	95.02	-----	-----	78.99	16.03	Average
2	5383.800	41.89	54.00	-12.11	25.88	16.01	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5230MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5230MHz
Test BY :Rock

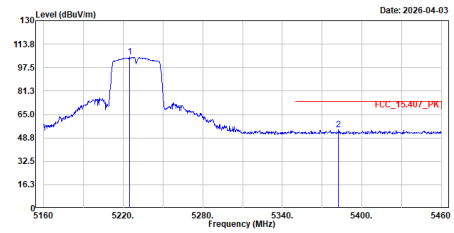


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5225.100	104.93	-----	-----	88.92	16.01	Peak
2	5382.300	54.29	74.00	-19.71	38.27	16.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5755MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5755MHz
Test BY :Rock

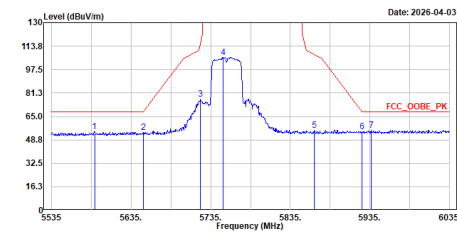


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5589.000	54.67	68.20	-13.53	37.67	17.00	Peak
2	5650.000	53.98	68.21	-14.23	36.67	17.31	Peak
3	5722.000	76.84	115.36	-38.52	59.20	17.64	Peak
4	5750.500	106.11	-----	-----	88.37	17.74	Peak
5	5865.000	55.44	108.00	-52.56	37.43	18.01	Peak
6	5925.000	54.26	68.21	-13.95	36.12	18.14	Peak
7	5936.500	55.54	68.20	-12.66	37.40	18.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5755MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5755MHz
Test BY :Rock

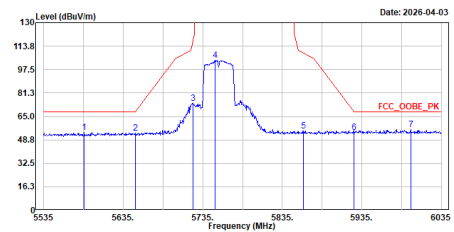


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5586.000	53.95	68.20	-14.25	36.98	16.97	Peak
2	5650.000	53.59	68.21	-14.62	36.28	17.31	Peak
3	5722.500	74.16	116.50	-42.34	56.51	17.65	Peak
4	5750.500	103.81	-----	-----	86.07	17.74	Peak
5	5861.500	55.15	108.98	-53.83	37.14	18.01	Peak
6	5925.000	53.80	68.21	-14.41	35.66	18.14	Peak
7	5996.500	55.84	68.20	-12.36	37.70	18.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n40_5795MHz
Test BY :Rock

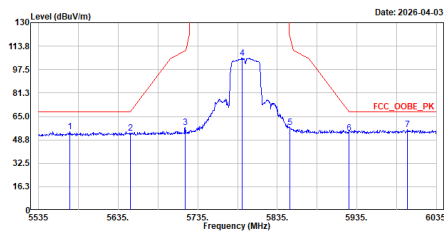


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5574.000	54.51	68.20	-13.69	37.61	16.90	Peak
2	5650.000	53.48	68.21	-14.73	36.17	17.31	Peak
3	5719.000	57.25	110.52	-53.27	39.62	17.63	Peak
4	5790.500	105.52	-----	-----	87.71	17.81	Peak
5	5850.500	57.51	121.06	-63.55	39.52	17.99	Peak
6	5925.000	53.60	68.21	-14.61	35.46	18.14	Peak
7	5998.500	55.74	68.20	-12.46	37.61	18.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_5795MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n40_5795MHz
Test BY :Rock

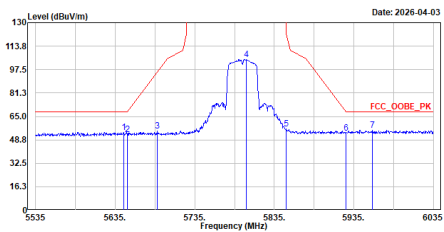

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5645.500	54.09	68.20	-14.11	36.81	17.28	Peak
2	5650.000	52.52	68.21	-15.69	35.21	17.31	Peak
3	5687.500	54.82	95.95	-41.13	37.30	17.52	Peak
4	5800.000	104.44	-----	-----	86.61	17.83	Peak
5	5850.000	56.60	122.20	-65.60	38.61	17.99	Peak
6	5925.000	53.60	68.21	-14.61	35.46	18.14	Peak
7	5958.500	55.57	68.20	-12.63	37.42	18.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band Edge Data_802.11n (40 MHz)

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5230	5248.062	<5250	PASS

