

Address: No. 66 Pingji Avenue, Shanglilang Community, Nanwan Street, Longgang District, Shenzhen City, Kangli City, No. 7, 103

Antenna Test Report

For

Project M2S

Version: V1

Customer	倍思	Project	M2S
Band	BT	Color	
Issued by	周鹏	Checked by	
Confirmed by		Date	2023.01.03

This test report belongs to ShenZhen NQI network communication ltd. and related clients to file, please keep it properly, without our company and related clients allowed, anybody has no rights to reveal it to public.




调试履历表 (Resume)

[illegible]


This test report belongs to ShenZhen NQI network communication ltd. and related clients to file, please keeping it properly, without our company and related clients allowed, anybody has no rights to reveal it to public.

	测试项目	设备
1. S 参数	1. 回波损耗(RL) 2. 驻波比 (VSWR)	网络分析仪: Agilent E5071B RS ZVB8
2. 耦合测试	1. 发射功率 (MAX Power) 2. 接收灵敏度 (MIN Sens)	1.2G/3G 测试设备: Agilent 8960 2. 微波暗室: 广屏 ETS 3D Chamber (5x3x3)
3. 3D 无源测试 (Passive Test)	1. 效率 (η) 2. 增益 (Gain) 3.辐射方向图	1. 微波暗室: TEM24 3D Chamber (5x5x5) 广屏 ETS 3D Chamber (5x3x3) 2. 网络分析仪: Agilent E5071B
4.3D 有源测试 (Active Test)	1. 3D 功率 (TRP) 2. 3D 灵敏度 (TIS) 3.吞吐测试 4.人头手测试 5.人头耳测试	1. 微波暗室: TEM24 3D Chamber (5x5x5) 广屏 ETS 3D Chamber (5x3x3) 2.2G/3G 测试设备: Agilent 8960 3.4G 测试设备: 安立 MT8820C/CMW500 4.WIFI/BT/NB-iot 测试设备: CMW500 5. 5G 测试设备: 星河亮点 SP9500-CTS

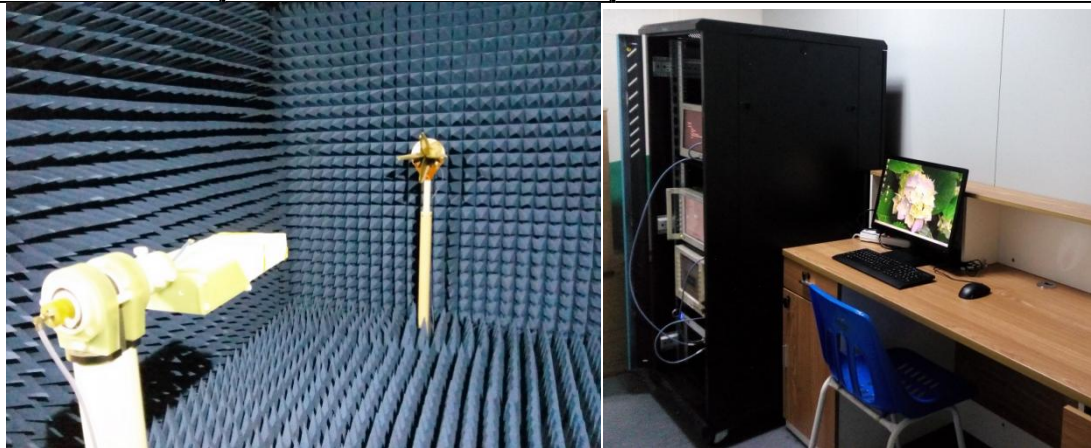



深圳市国质信网络通讯有限公司
ShenZhen NQI network communication ltd

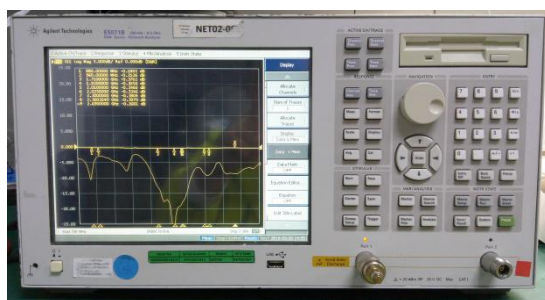

二 Definitions

VSWR: Voltage Standing Wave Rate

TRP: total radiated power

TIS: total isotropic sensitivity


三. ANT Photo



This test report belongs to ShenZhen NQI network communication ltd. and related clients to file, please keeping it properly, without our company and related clients allowed, anybody has no rights to reveal it to public.




四. 匹配电路



Element	L (Value)	R (Value)
E1(0201)	NF	NF
E2(0201)	0 Ω	0 Ω
E3(0201)	NF	NF


五. 无源测试

5.1 回波损耗/驻波比/史密斯图圆

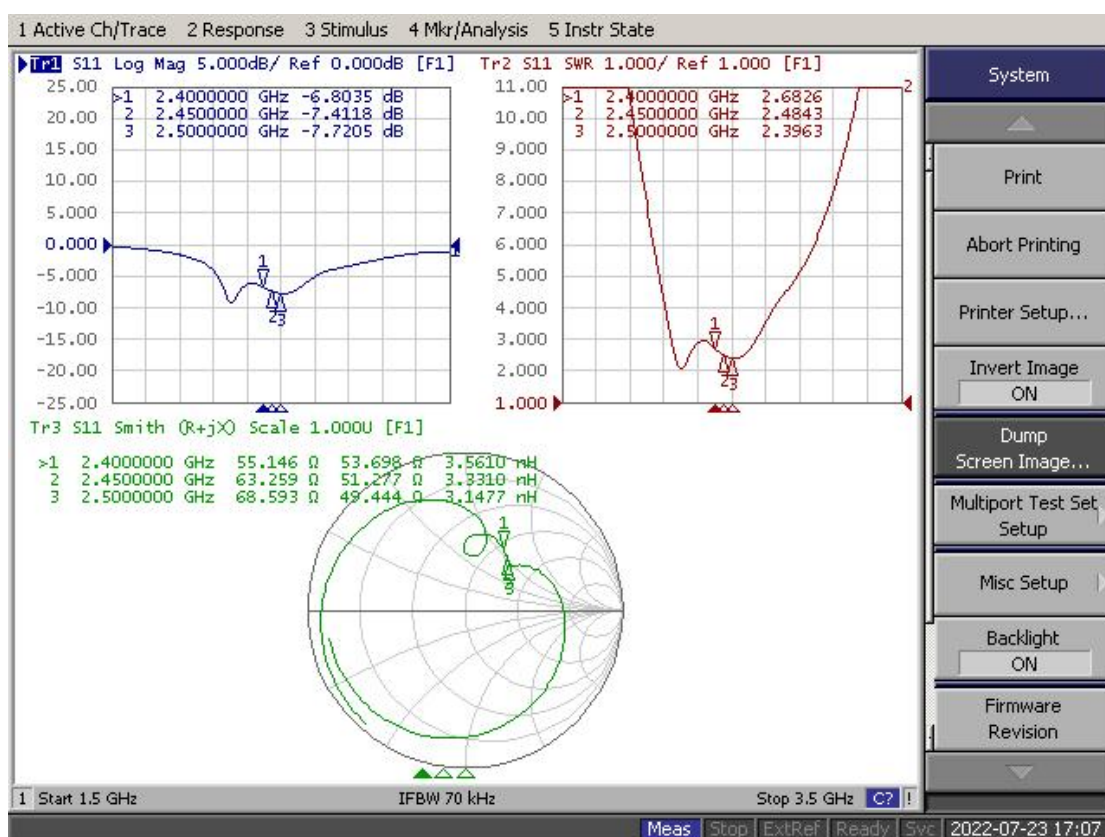




5.2 效率&增益

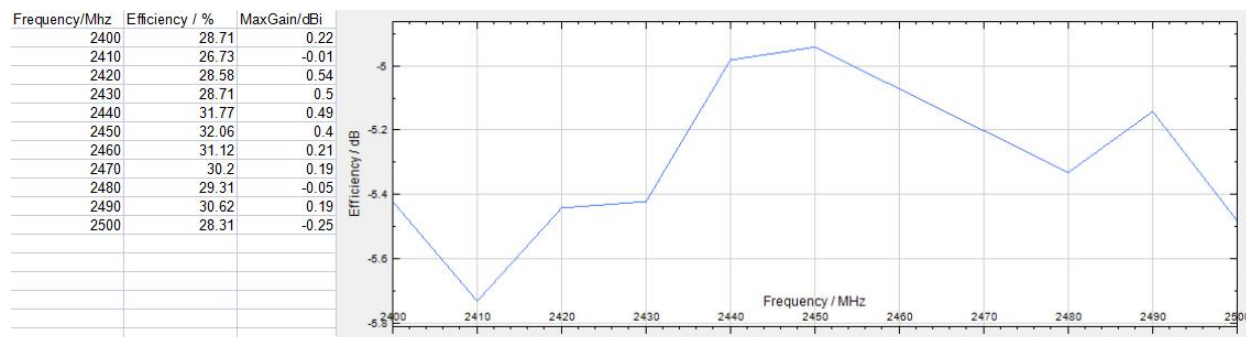

5.3 3D 方向图

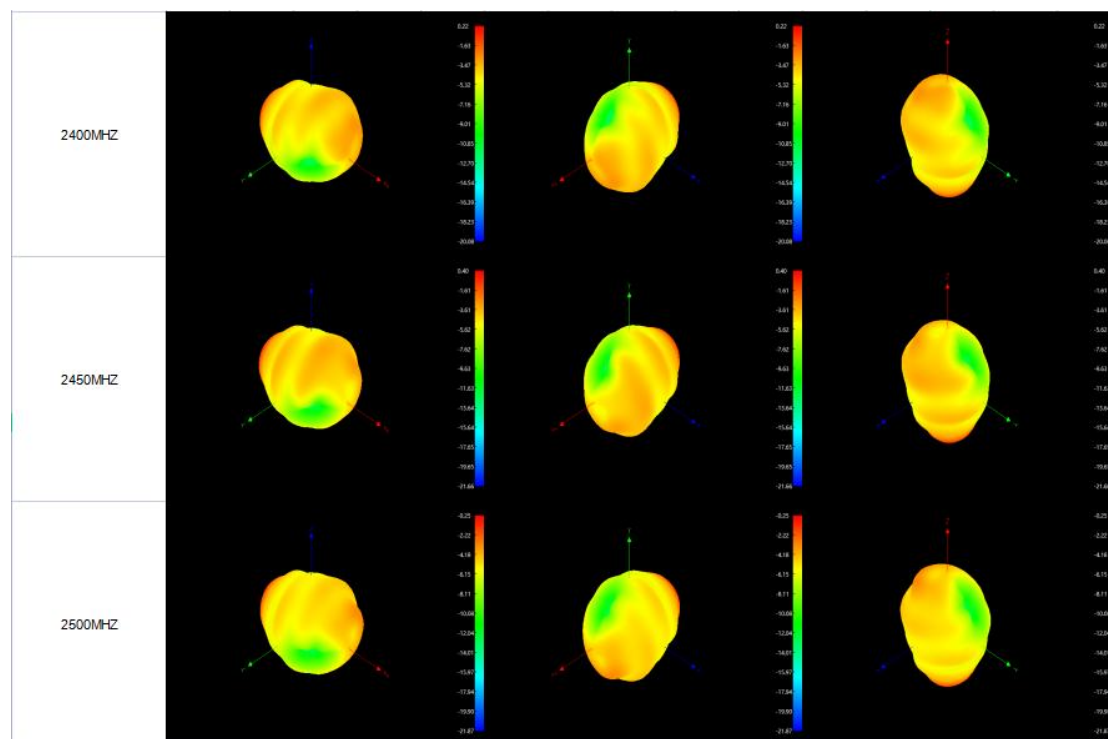

This test report belongs to ShenZhen NQI network communication ltd. and related clients to file, please keeping it propely, without our company and related clients allowed, anybody has no rights to revel it to public.




六. TRP&TIS

NQI ANT TRP&TIS parameter Summary of M2S				
自由空间	Test	Bluetooth TRP		
	Result	0	39	78
R	TRP (dBm)	2.27	2.64	2.43
	TIS (dBm)	-84.83	-84.53	-84.41
L	TRP (dBm)	2.88	2.44	2.19
	TIS (dBm)	-84.98	-85.07	-85.31
NQI ANT TRP&TIS parameter Summary of M2S				
二代头耳模	Test	Bluetooth TRP		
	Result	0	39	78
R	TRP (dBm)	-5.82	-5.4	-4.76
	TIS (dBm)	-77.24	-78.16	-78.76
L	TRP (dBm)	-5.23	-4.49	-4.08
	TIS (dBm)	-78.39	-78.93	-77.91


七. 装配方式



电池边缘出线 15mm

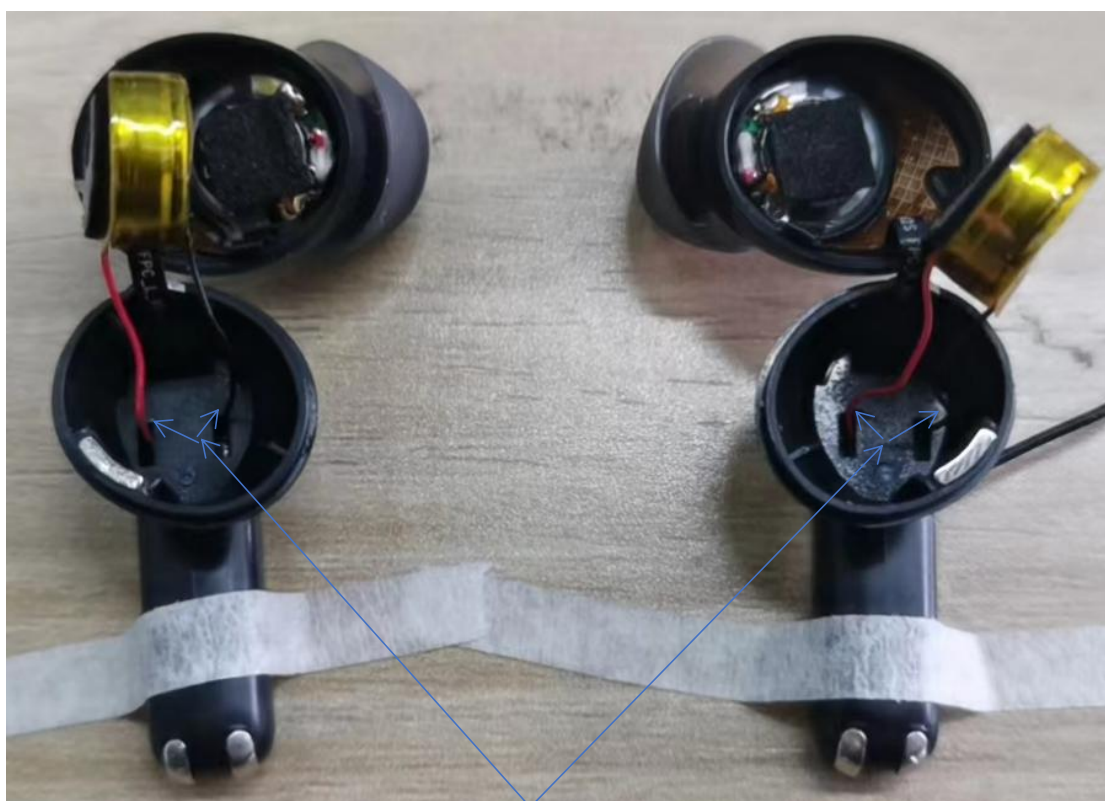

电池红黑线如图穿孔，拉出
主板下多余的电池线到前腔

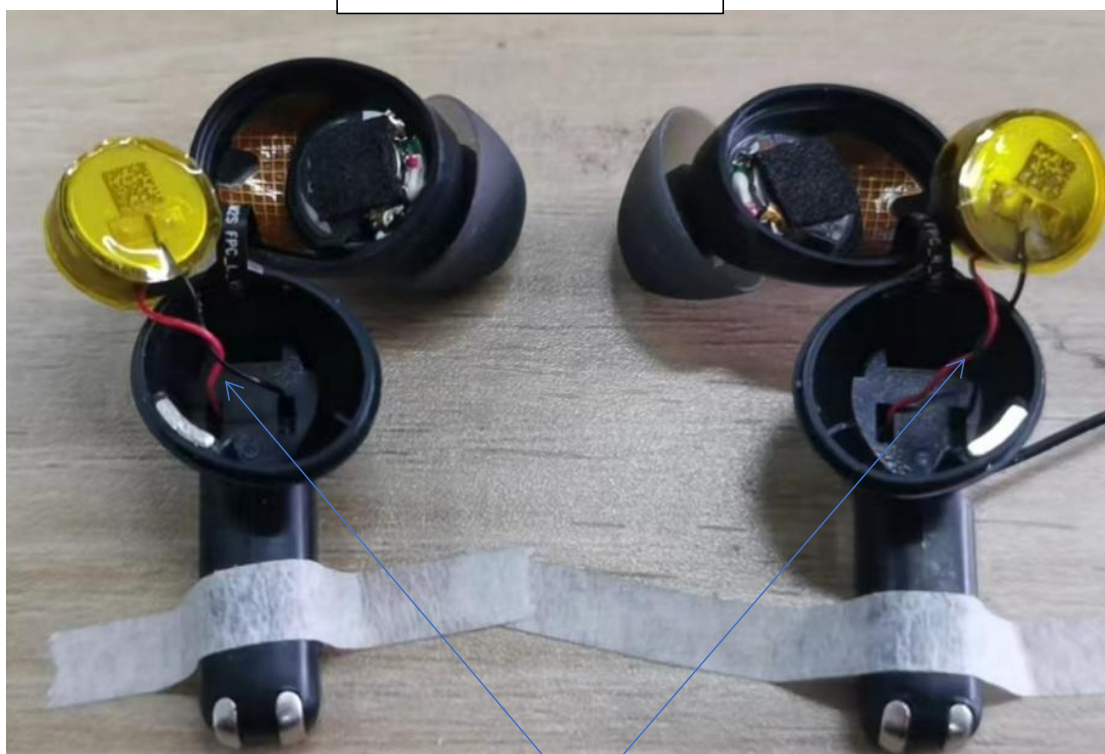

电池红黑线绞线 1 圈



绞线一圈后, 电池负极面扣向主板面, 且出线方向如图。