



ShenZhen City FeiMin Technology CO.,LTD.

SPECIFICATION FOR APPROVED

CUSTOMER: _____ Shenzhen PuDa Wei High-Tech Co., Ltd.

PRODUCTS: _____ Spring antenna.

PART NO: _____

Spec. : _____ FM-S2930-PS6-TX

Data: _____ 2026. 7. 30

SUPPLIER		
PREPARED BY	CHECKED BY	APPROVED BY

CUSTOMER		
ACCEPTED BY	CHECKED BY	APPROVED BY

REMARK:Please send us one(or copy)of this approval with stamp after accepting,other copies filed by the customer.

ADD: Room 801, 8th Floor, Keyunda E-commerce Base, No. 4 Shenghui Road, Guxing Community, Xixiang Subdistrict, Baoan District, Shenzhen.

Tel: 0755-23035723

Fax: 0755-23036702

E-mail: ant001@fmant.cn

HTTP:www.fmant.cn

ANTENNA SPECIFICATION

catalog

1. Project Information	4
1.1. Appearance and Dimensions	4
2. Electrical Characteristics.....	5
2.1. Test Environment Conditions	5
2.2.Measurement method	5
2.2.1. Antenna VSWR.....	5
2.2.2. Antenna Return loss.....	6
2.3. Antenna passive test data.....	6
2.3.1. Test system.....	6
2.3.2. Antenna efficiency and gain.....	7
2.3.3. Antenna Radiation Pattern.....	8
3.Notes.....	8
4.Product packaging specification	9

ANTENNA SPECIFICATION

Revision history

version	date	condition
A1	2026-7-30	First edition

Changes:


First change:

Before the change: (If necessary, please add corresponding pictures, and the details of the change should be clearly described here)

After the change: (If necessary, please add corresponding pictures, and the details of the change should be clearly described here)

1. Project Information

1.1. Appearance and Dimensions

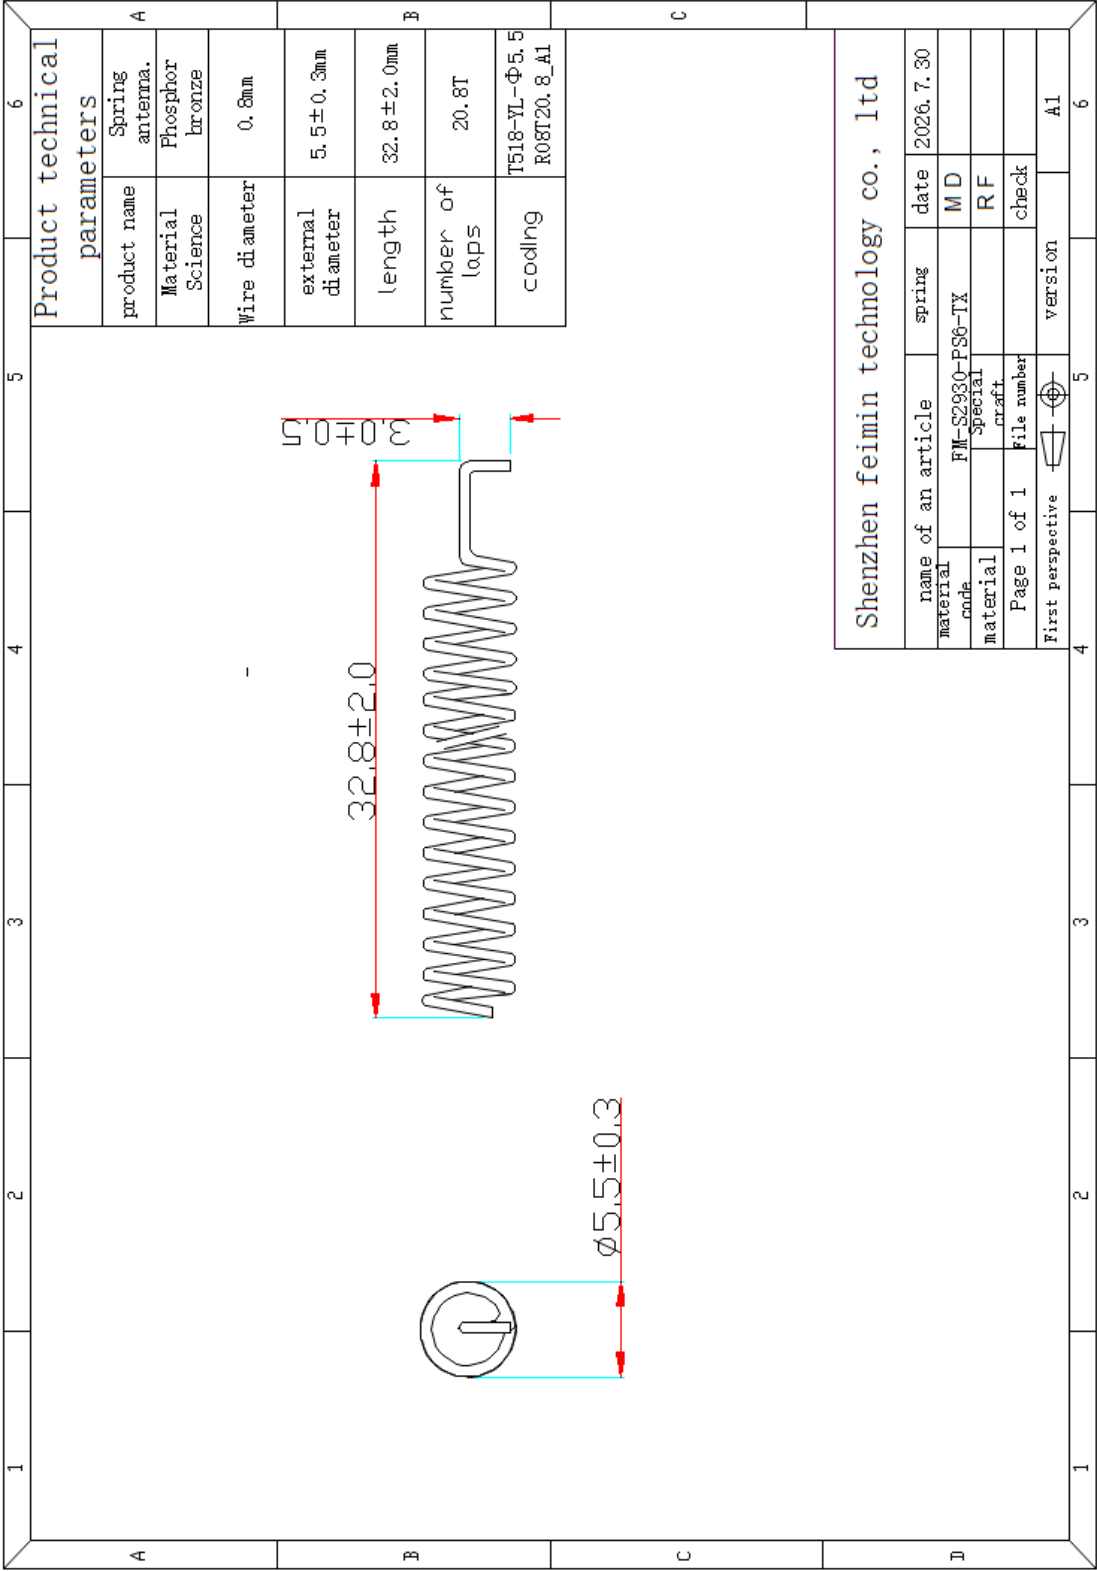


2. Electrical Characteristics


2.1. Test Environment Conditions

Temperature	Ordinary Temperature (5 to 35℃)
Humidity	Ordinary Humidity (25 to 85% RH)

2.2.Measurement method

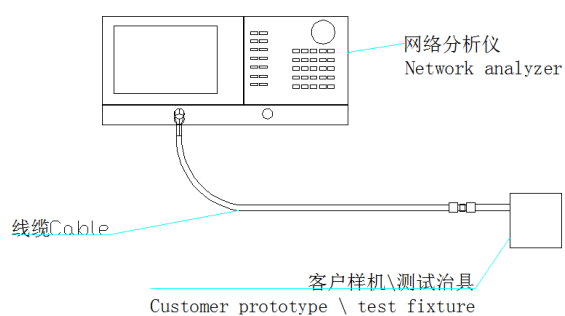


2.2.1. Antenna VSWR

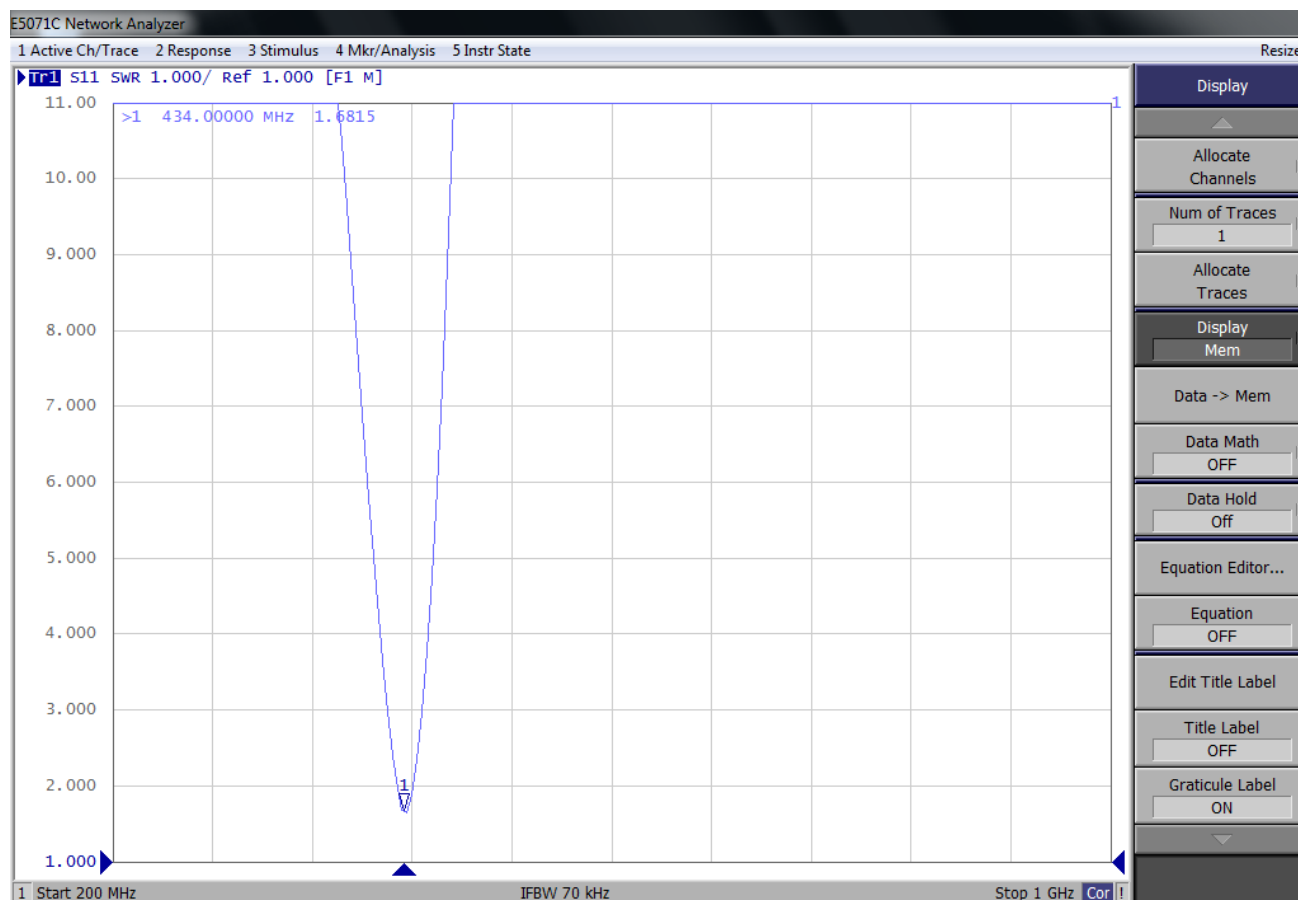


ANTENNA SPECIFICATION

2.2.2. Antenna Return loss

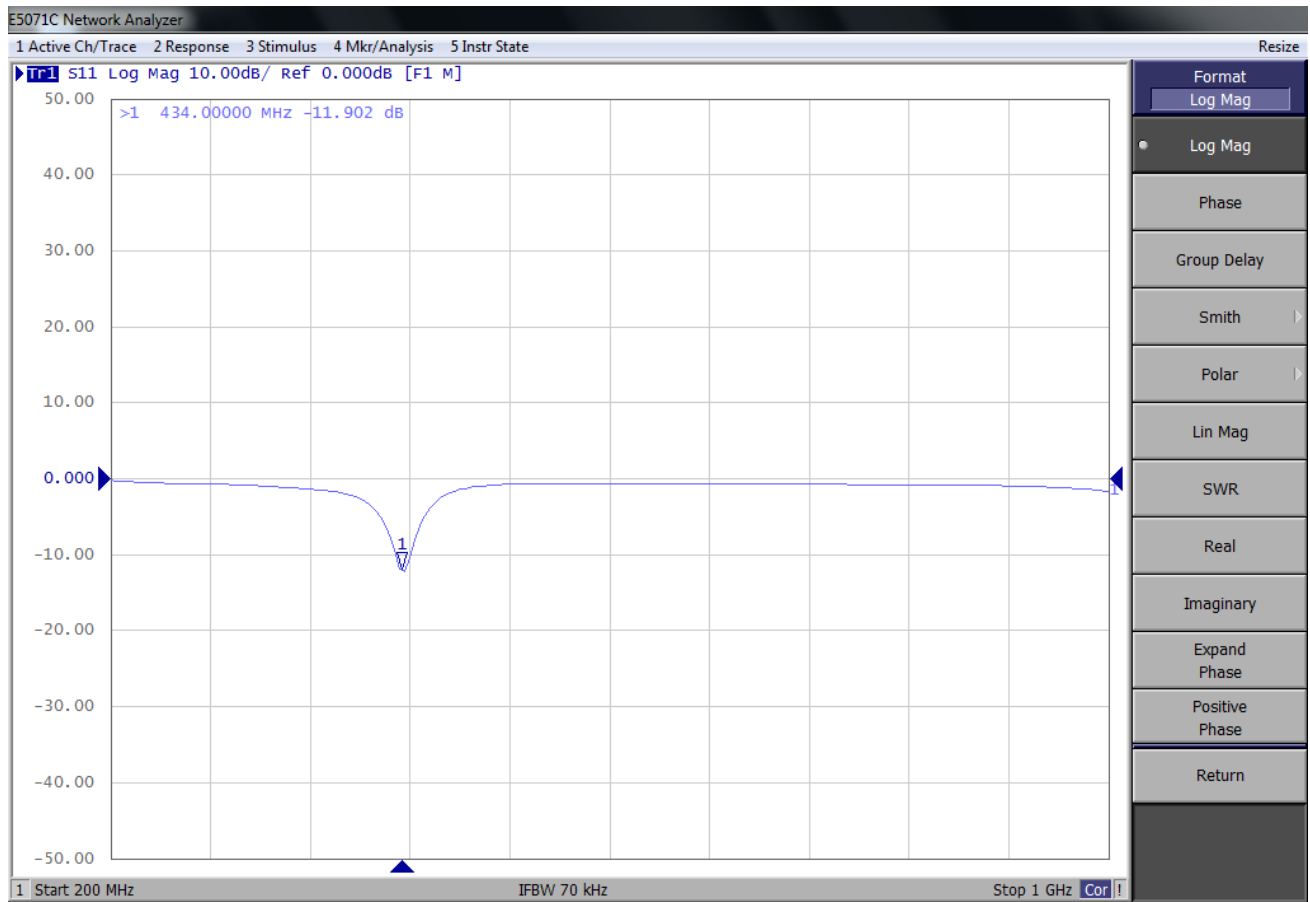

2.3. Antenna passive test data

2.3.1. Test system

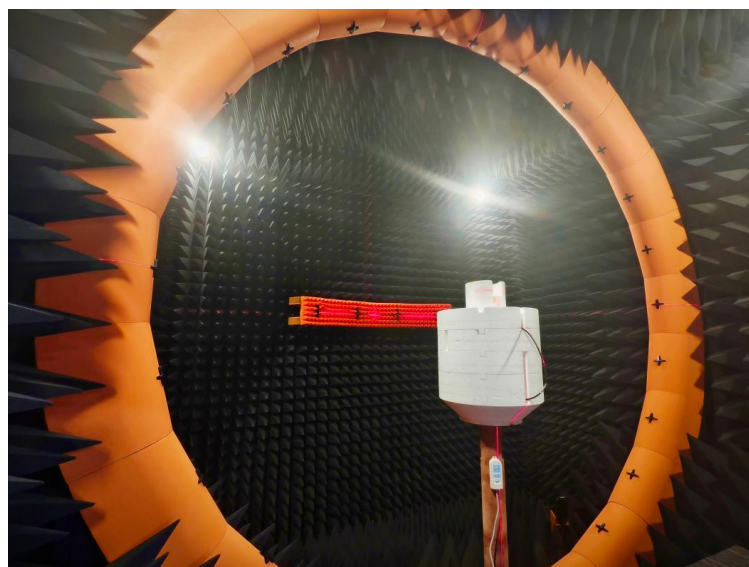

Shenzhen Feimin Technology Co., Ltd. (24-probe OTA microwave darkroom)


ANTENNA SPECIFICATION

2.3.2. Antenna efficiency and gain

Frequency (MHz)	Efficiency(%)	Gain(dB)
424	13.33	-3.46
425	14.56	-2.77
426	15.71	-2.13
427	16.34	-1.56
428	16.4	-1.81
429	16.24	-1.01
430	15.88	-1.1
431	16.06	-1.03
432	16.9	-0.83
433	16.26	-1.41
434	18.38	-0.63
435	16.91	-0.91
436	15.79	-0.94
437	15.62	-1.07
438	14.09	-2.07
439	13.68	-2.94
440	12.57	-2.63
441	12.79	-2.16

ANTENNA SPECIFICATION

2.3.3. Antenna Radiation Pattern

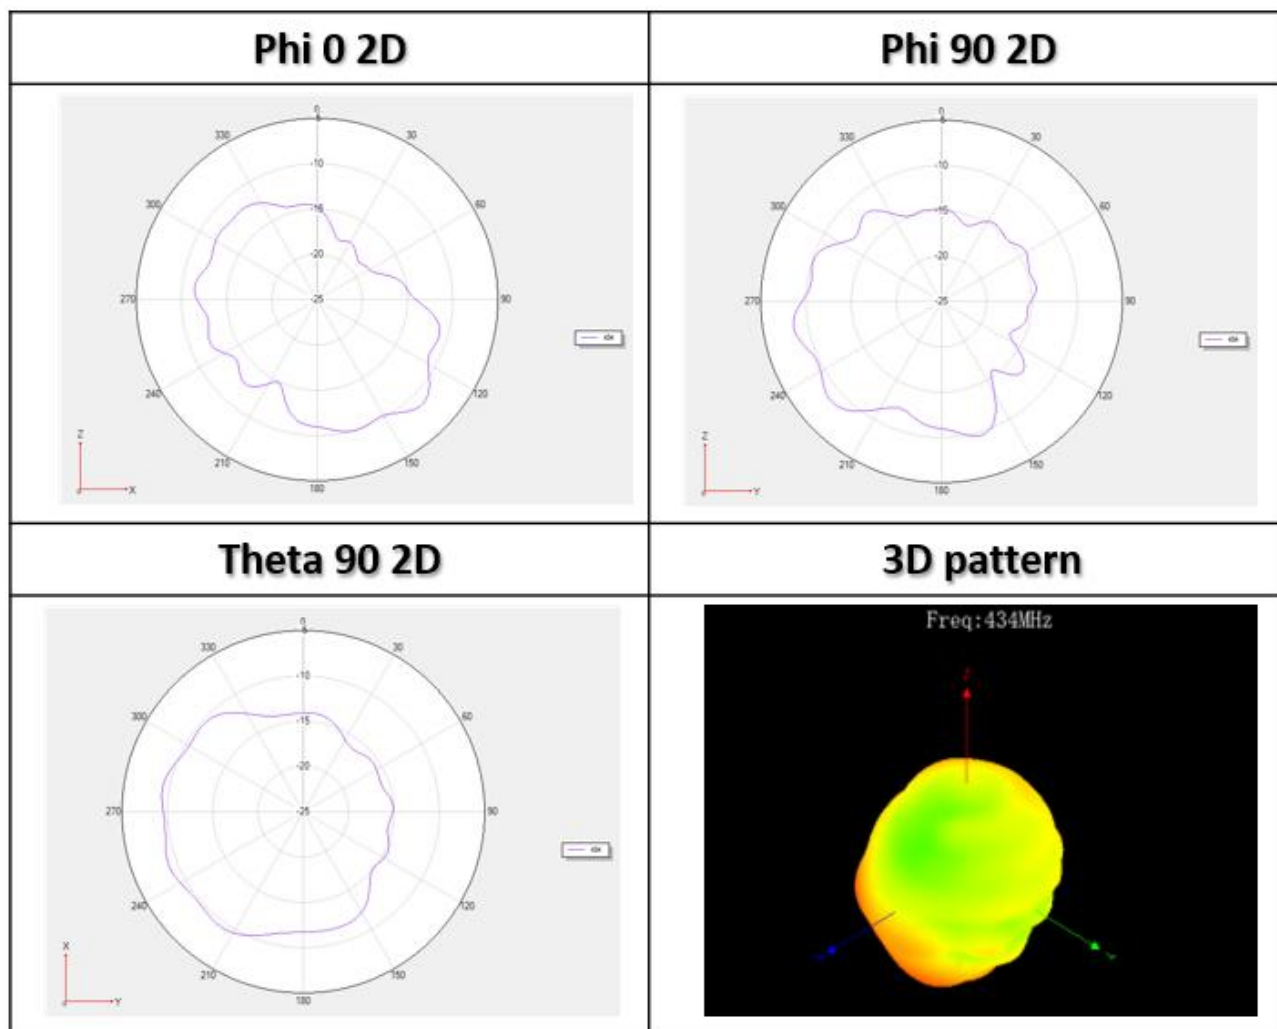

3. Notes

①. When installing, be careful not to be too close to the metal parts to avoid affecting the antenna performance. ②. This antenna is only suitable for this type of machine. The position of the antenna cannot be changed at will, and it is not our business' responsibility if it is used on other machines that results in poor results. ③. The data used in this acknowledgment (e.g., antenna efficiency, gain, etc.) are data obtained from laboratory tests of the acknowledgement project / antenna in Shenzhen Fei Min Technology Co., Ltd.

ANTENNA SPECIFICATION

4.Product packaging specification

Product name: spring antenna

1、Labeling requirements

The inner label is 7CM long and 4CM wide

The outer label is 7CM long, about 5CM

supplier	Shenzhen Feimin Technology Co., Ltd.
product name	*****
Material coding	*****
Specifications	*****
quantity	***PCS

client's name			
supplier	Shenzhen Feimin Technology Co., Ltd.		
Order number	*****		
Material coding	*****		
Specification model	*****	product name	*****
quantity	****PCS	QC:	
spare parts	***PCS	Notes	

2、Packing process

Job description:

1. The product __PCS is packed in PE open pockets, and the inner label is affixed to each pouch; Put the __ small bag into the big PE sealing tape bag, except the tail number and spare parts.
2. Each box contains __ large bags of products, and the boxes are sealed with adhesive tape in the shape of "I".
3. Paste the outer label on the upper right corner of the box, and there must be no missing or wrong filling.

3、Precautions

When packing the box, please pay attention to lay the antenna flat and avoid serious shaking after sealing. If the whole box is not filled, it needs to be filled with foam to avoid transportation Circumstances that caused product defects in the process.