



TEST REPORT

Test item description: Four-wheel drive drifting remote control car
FCC ID: 2BV4Z-502-02
Trademark(s): N/A
Model/Type reference: 502-02, For other series models, please refer to Section P4.1.
Applicant's name: CHAOYUE TOYS FACTORY
Address: SECTION IN THE MIDDLE OF SHEXI SOUTH ROAD, HAIDONG TOWNSHIP, LIANGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, CHINA
Manufacturer: CHAOYUE TOYS FACTORY
Address: SECTION IN THE MIDDLE OF SHEXI SOUTH ROAD, HAIDONG TOWNSHIP, LIANGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, CHINA
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Apr. 28, 2026
Sample tested Date: Apr. 28, 2026 to May. 06, 2026
Issue Date: May. 06, 2026
Report No.: CTB26042803501RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is 2.4GHz radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Kai ChenMartin FengBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. The tested sample(s) and the sample information are provided by the applicant. The authenticity, accuracy, and completeness of the provided information are the sole responsibility of the applicant. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The result decision rules of our laboratory are based solely on the direct comparison between the actual measured values of test results and the standard limits, without considering the measurement uncertainty. "★" indicates the testing items were fulfilled by subcontracted lab. "✖" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	8
4.3 Support Equipment.....	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup.....	12
6.2 Limit.....	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup.....	15
7.2 Limit.....	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF COUNDUCTED SPURIOUS EMISSIONS	24
8.1 Block Diagram Of Test Setup.....	24
8.2 Limit.....	24
8.3 Test procedure	24
8.4 Test Result	25
9. COUDUCTED OUTPUT POWER.....	27
9.1 Block Diagram Of Test Setup.....	27
9.2 Limit.....	27
9.3 Test procedure	27
9.4 Test Result	27
10. 6DB OCCUPIED BANDWIDTH.....	30
10.1 Block Diagram Of Test Setup.....	30
10.2 Limit.....	30
10.3 Test procedure	30
10.4 Test Result	30
11. POWER SPECTRAL DENSITY.....	32
11.1 Block Diagram Of Test Setup.....	32
11.2 Limit.....	32
11.3 Test procedure	32
11.4 Test Result	32
12. ANTENNA REQUIREMENT	34
13. EUT TEST SETUP PHOTOGRAPHS.....	35

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB26042803501RF01	May. 06, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	N/A
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D01v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS

Remark:

Test according to ANSI C63.10-2020

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density, Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9k-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
Frequency	1×10 ⁻⁷
Conducted Emission(150kHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:

502-02, 502-03, 502-04, 502-05, 502-06, 502-07, 502-08, 502-09, 502-10, 502-11, 502-12, 502-13, 502-14, 502-15, 502-16, 502-17, 502-18, 502-19, 502-20, 502-21, 502-22, 502-23, 502-24, 502-25, 502-26, 502-27, 502-28, 502-29, 502-30, 502-31, 502-32, 502-33, 502-34, 502-35, 502-36, 502-37, 502-38, 502-39, 502-40, 502-41, 502-42, 502-43, 502-44, 502-45, 502-46, 502-47, 502-48, 502-49, 502-50, 502-51, 502-52, 502-53, 502-54, 502-55, 502-56, 502-57, 502-58, 502-59, 502-60, 502-61, 502-62, 502-63, 502-64, 502-65, 502-66, 502-67, 502-68, 502-69, 502-70, 502-71, 502-72, 502-73, 502-74, 502-75, 502-76, 502-77, 502-78, 502-79, 502-80, 502-81, 502-82, 502-83, 502-84, 502-85, 502-86, 502-87, 502-88, 502-89, 502-90, 502-91, 502-92, 502-93, 502-94, 502-95, 502-96, 502-97, 502-98, 502-99, 502-02A, 502-03A, 502-04A, 502-05A, 502-06A, 502-07A, 502-08A, 502-09A, 502-10A, 502-11A, 502-12A, 502-13A, 502-14A, 502-15A, 502-16A, 502-17A, 502-18A, 502-19A, 502-20A, 502-21A, 502-22A, 502-23A, 502-24A, 502-25A, 502-26A, 502-27A, 502-28A, 502-29A, 502-30A, 502-31A, 502-32A, 502-33A, 502-34A, 502-35A, 502-36A, 502-37A, 502-38A, 502-39A, 502-40A, 502-41A, 502-42A, 502-43A, 502-44A, 502-45A, 502-46A, 502-47A, 502-48A, 502-49A, 502-50A, 502-51A, 502-52A, 502-53A, 502-54A, 502-55A, 502-56A, 502-57A, 502-58A, 502-59A, 502-60A, 502-61A, 502-62A, 502-63A, 502-64A, 502-65A, 502-66A, 502-67A, 502-68A, 502-69A, 502-70A, 502-71A, 502-72A, 502-73A, 502-74A, 502-75A, 502-76A, 502-77A, 502-78A, 502-79A, 502-80A, 502-81A, 502-82A, 502-83A, 502-84A, 502-85A, 502-86A, 502-87A, 502-88A, 502-89A, 502-90A, 502-91A, 502-92A, 502-93A, 502-94A, 502-95A, 502-96A, 502-97A, 502-98A, 502-99A, 502-02B, 502-03B, 502-04B, 502-05B, 502-06B, 502-07B, 502-08B, 502-09B, 502-10B, 502-11B, 502-12B, 502-13B, 502-14B, 502-15B, 502-16B, 502-17B, 502-18B, 502-19B, 502-20B, 502-21B, 502-22B, 502-23B, 502-24B, 502-25B, 502-26B, 502-27B, 502-28B, 502-29B, 502-30B, 502-31B, 502-32B, 502-33B, 502-34B, 502-35B, 502-36B, 502-37B, 502-38B, 502-39B, 502-40B, 502-41B, 502-42B, 502-43B, 502-44B, 502-45B, 502-46B, 502-47B, 502-48B, 502-49B, 502-50B, 502-51B, 502-52B, 502-53B, 502-54B, 502-55B, 502-56B, 502-57B, 502-58B, 502-59B, 502-60B, 502-61B, 502-62B, 502-63B, 502-64B, 502-65B, 502-66B, 502-67B, 502-68B, 502-69B, 502-70B, 502-71B, 502-72B, 502-73B, 502-74B, 502-75B, 502-76B, 502-77B, 502-78B, 502-79B, 502-80B, 502-81B, 502-82B, 502-83B, 502-84B, 502-85B, 502-86B, 502-87B, 502-88B, 502-89B, 502-90B, 502-91B, 502-92B, 502-93B, 502-94B, 502-95B, 502-96B, 502-97B, 502-98B, 502-99B, 502-02C, 502-03C, 502-04C, 502-05C, 502-06C, 502-07C, 502-08C, 502-09C, 502-10C, 502-11C, 502-12C, 502-13C, 502-14C, 502-15C, 502-16C, 502-17C, 502-18C, 502-19C, 502-20C, 502-21C, 502-22C, 502-23C, 502-24C, 502-25C, 502-26C, 502-27C, 502-28C, 502-29C, 502-30C, 502-31C, 502-32C, 502-33C, 502-34C, 502-35C, 502-36C, 502-37C, 502-38C, 502-39C, 502-40C, 502-41C, 502-42C, 502-43C, 502-44C, 502-45C, 502-46C, 502-47C, 502-48C, 502-49C, 502-50C, 502-51C, 502-52C, 502-53C, 502-54C, 502-55C, 502-56C, 502-57C, 502-58C, 502-59C, 502-60C, 502-61C, 502-62C, 502-63C, 502-64C, 502-65C, 502-66C, 502-67C, 502-68C, 502-69C, 502-70C, 502-71C, 502-72C, 502-73C, 502-74C, 502-75C, 502-76C, 502-77C, 502-78C, 502-79C, 502-80C, 502-81C, 502-82C, 502-83C, 502-84C, 502-85C, 502-86C, 502-87C, 502-88C, 502-89C, 502-90C, 502-91C, 502-92C, 502-93C, 502-94C, 502-95C, 502-96C, 502-97C, 502-98C, 502-99C, 502-02D, 502-03D, 502-04D, 502-05D, 502-06D, 502-07D, 502-08D, 502-09D, 502-10D, 502-11D, 502-12D, 502-13D, 502-14D, 502-15D, 502-16D, 502-17D, 502-18D, 502-19D, 502-20D, 502-21D, 502-22D, 502-23D, 502-24D, 502-25D, 502-26D, 502-27D, 502-28D, 502-29D, 502-30D, 502-31D, 502-32D, 502-33D, 502-34D, 502-35D, 502-36D, 502-37D, 502-38D, 502-39D, 502-40D, 502-41D, 502-42D, 502-43D, 502-44D,

502-45D, 502-46D, 502-47D, 502-48D, 502-49D, 502-50D, 502-51D, 502-52D, 502-53D, 502-54D, 502-55D, 502-56D, 502-57D, 502-58D, 502-59D, 502-60D, 502-61D, 502-62D, 502-63D, 502-64D, 502-65D, 502-66D, 502-67D, 502-68D, 502-69D, 502-70D, 502-71D, 502-72D, 502-73D, 502-74D, 502-75D, 502-76D, 502-77D, 502-78D, 502-79D, 502-80D, 502-81D, 502-82D, 502-83D, 502-84D, 502-85D, 502-86D, 502-87D, 502-88D, 502-89D, 502-90D, 502-91D, 502-92D, 502-93D, 502-94D, 502-95D, 502-96D, 502-97D, 502-98D, 502-99D, 8001, 8002, 8003, 8004, 8005, 8006, 8007, 8008, 8009, 8010, 8011, 8012, 8013, 8014, 8015, 8016, 8017, 8018, 8019, 8020, 8021, 8022, 8023, 8024, 8025, 8026, 8027, 8028, 8029, 8030, 8031, 8032, 8033, 8034, 8035, 8036, 8037, 8038, 8039, 8040, 8041, 8042, 8043, 8044, 8045, 8046, 8047, 8048, 8049, 8050, 8001A, 8002A, 8003A, 8004A, 8005A, 8006A, 8007A, 8008A, 8009A, 8010A, 8011A, 8012A, 8013A, 8014A, 8015A, 8016A, 8017A, 8018A, 8019A, 8020A, 8021A, 8022A, 8023A, 8024A, 8025A, 8026A, 8027A, 8028A, 8029A, 8030A, 8031A, 8032A, 8033A, 8034A, 8035A, 8036A, 8037A, 8038A, 8039A, 8040A, 8041A, 8042A, 8043A, 8044A, 8045A, 8046A, 8047A, 8048A, 8049A, 8050A, 8001B, 8002B, 8003B, 8004B, 8005B, 8006B, 8007B, 8008B, 8009B, 8010B, 8011B, 8012B, 8013B, 8014B, 8015B, 8016B, 8017B, 8018B, 8019B, 8020B, 8021B, 8022B, 8023B, 8024B, 8025B, 8026B, 8027B, 8028B, 8029B, 8030B, 8031B, 8032B, 8033B, 8034B, 8035B, 8036B, 8037B, 8038B, 8039B, 8040B, 8041B, 8042B, 8043B, 8044B, 8045B, 8046B, 8047B, 8048B, 8049B, 8050B, 8001C, 8002C, 8003C, 8004C, 8005C, 8006C, 8007C, 8008C, 8009C, 8010C, 8011C, 8012C, 8013C, 8014C, 8015C, 8016C, 8017C, 8018C, 8019C, 8020C, 8021C, 8022C, 8023C, 8024C, 8025C, 8026C, 8027C, 8028C, 8029C, 8030C, 8031C, 8032C, 8033C, 8034C, 8035C, 8036C, 8037C, 8038C, 8039C, 8040C, 8041C, 8042C, 8043C, 8044C, 8045C, 8046C, 8047C, 8048C, 8049C, 8050C, 8001D, 8002D, 8003D, 8004D, 8005D, 8006D, 8007D, 8008D, 8009D, 8010D, 8011D, 8012D, 8013D, 8014D, 8015D, 8016D, 8017D, 8018D, 8019D, 8020D, 8021D, 8022D, 8023D, 8024D, 8025D, 8026D, 8027D, 8028D, 8029D, 8030D, 8031D, 8032D, 8033D, 8034D, 8035D, 8036D, 8037D, 8038D, 8039D, 8040D, 8041D, 8042D, 8043D, 8044D, 8045D, 8046D, 8047D, 8048D, 8049D, 8050D, 9001, 9002, 9003, 9004, 9005, 9006, 9007, 9008, 9009, 9010, 9011, 9012, 9013, 9014, 9015, 9016, 9017, 9018, 9019, 9020, 9021, 9022, 9023, 9024, 9025, 9026, 9027, 9028, 9029, 9030, 9031, 9032, 9033, 9034, 9035, 9036, 9037, 9038, 9039, 9040, 9041, 9042, 9043, 9044, 9045, 9046, 9047, 9048, 9049, 9050, 9001A, 9002A, 9003A, 9004A, 9005A, 9006A, 9007A, 9008A, 9009A, 9010A, 9011A, 9012A, 9013A, 9014A, 9015A, 9016A, 9017A, 9018A, 9019A, 9020A, 9021A, 9022A, 9023A, 9024A, 9025A, 9026A, 9027A, 9028A, 9029A, 9030A, 9031A, 9032A, 9033A, 9034A, 9035A, 9036A, 9037A, 9038A, 9039A, 9040A, 9041A, 9042A, 9043A, 9044A, 9045A, 9046A, 9047A, 9048A, 9049A, 9050A, 9001B, 9002B, 9003B, 9004B, 9005B, 9006B, 9007B, 9008B, 9009B, 9010B, 9011B, 9012B, 9013B, 9014B, 9015B, 9016B, 9017B, 9018B, 9019B, 9020B, 9021B, 9022B, 9023B, 9024B, 9025B, 9026B, 9027B, 9028B, 9029B, 9030B, 9031B, 9032B, 9033B, 9034B, 9035B, 9036B, 9037B, 9038B, 9039B, 9040B, 9041B, 9042B, 9043B, 9044B, 9045B, 9046B, 9047B, 9048B, 9049B, 9050B, 9001C, 9002C, 9003C, 9004C, 9005C, 9006C, 9007C, 9008C, 9009C, 9010C, 9011C, 9012C, 9013C, 9014C, 9015C, 9016C, 9017C, 9018C, 9019C, 9020C, 9021C, 9022C, 9023C, 9024C, 9025C, 9026C, 9027C, 9028C, 9029C, 9030C, 9031C, 9032C, 9033C, 9034C, 9035C, 9036C, 9037C, 9038C, 9039C, 9040C, 9041C, 9042C, 9043C, 9044C, 9045C, 9046C, 9047C, 9048C, 9049C, 9050C, 9001D, 9002D, 9003D, 9004D, 9005D, 9006D, 9007D, 9008D, 9009D, 9010D, 9011D, 9012D, 9013D, 9014D, 9015D, 9016D, 9017D, 9018D, 9019D, 9020D, 9021D, 9022D, 9023D, 9024D, 9025D, 9026D, 9027D, 9028D, 9029D, 9030D, 9031D, 9032D, 9033D, 9034D, 9035D, 9036D, 9037D, 9038D, 9039D, 9040D, 9041D, 9042D, 9043D, 9044D, 9045D, 9046D, 9047D, 9048D, 9049D, 9050D, 502-02A, 502-02B, 502-02C, 502-02D, 502-02-1A, 502-02-1B, 502-02-1C, 8001-1A, 8001-1B, 8001-1C

Model Description:

All the model are the same circuit and RF module, only the model names are different. Test sample model: 502-02

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: 2404-2476MHz

Max. RF output power: 1.814dBm

Type of Modulation: GFSK

Antenna installation: PCB antenna

Antenna Gain: 0.8dBi

Ratings: DC 3V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
1	2404	2	2443	3	2476

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK)	2404MHz	2443MHz	2476MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used


No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7	2025/5/23	2026/5/22

					(104489/003)		
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/5/24	2026/5/23
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/5/24	2026/5/23
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/5/24	2026/5/23
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/5/24	2026/5/23
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

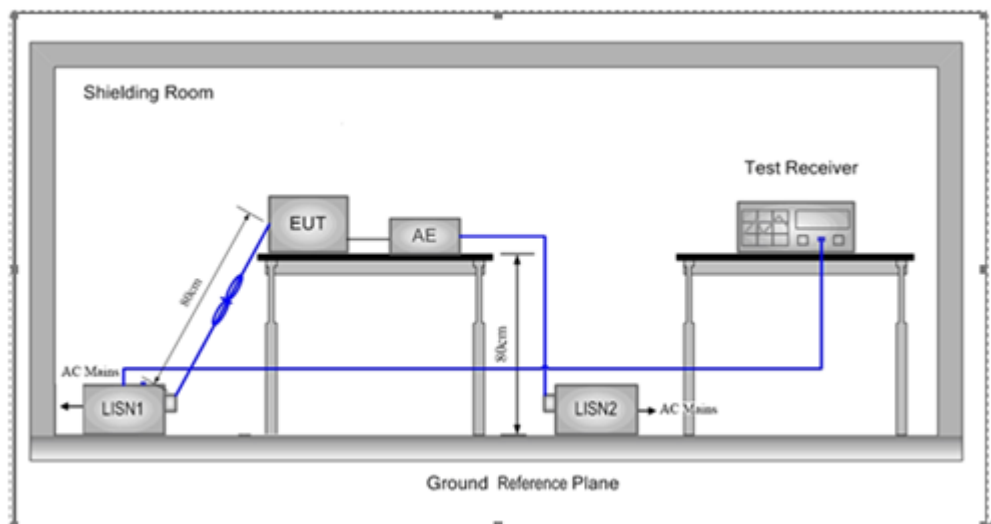

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under

test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

N/A

NOTE: This EUT is powered by DC power only, this test item is not applicable.

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

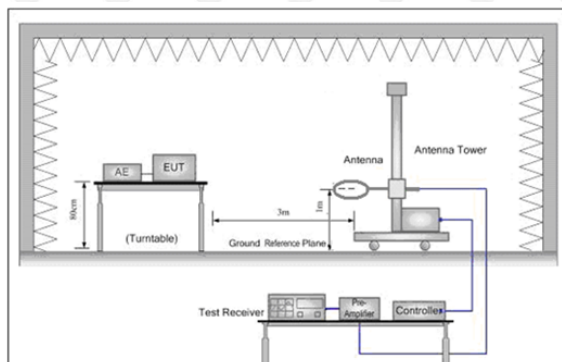


Figure 1. Below 30MHz

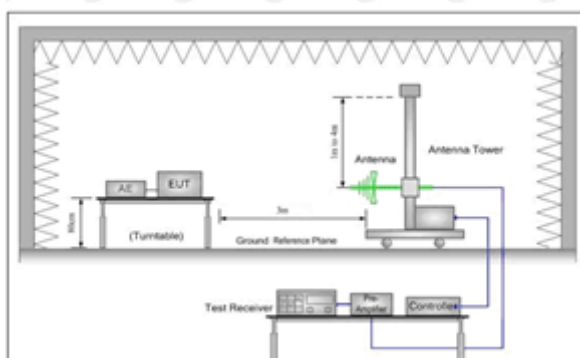


Figure 2. 30MHz to 1GHz

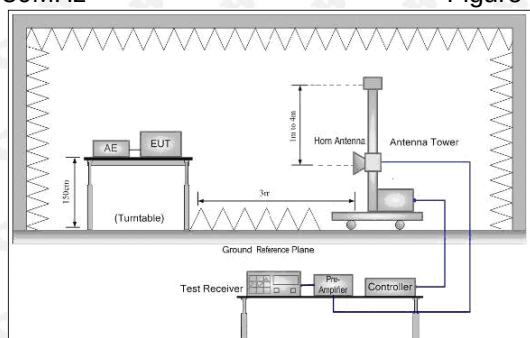


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel , the middle channel , the Highest channel
- i. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	1/T	Average


Remark: If the EUT D is < 98%, then set VBW 1/ T, where T is defined in item a) of 12.2.

7.4 Test Result

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

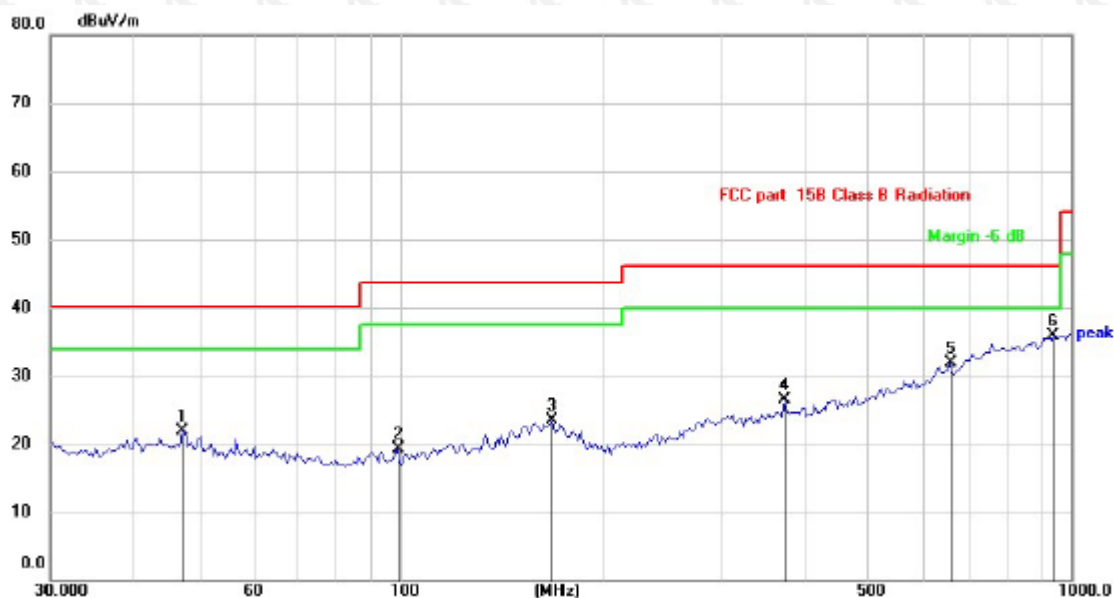

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dB/m	dB	Detector
1		47.3255	28.20	-6.29	21.91	40.00	-18.09	QP
2		98.8326	27.14	-7.93	19.21	43.50	-24.29	QP
3		168.7093	26.87	-3.37	23.50	43.50	-20.00	QP
4		374.6225	27.83	-1.31	26.52	46.00	-19.48	QP
5		656.5300	26.54	5.34	31.88	46.00	-14.12	QP
6	*	940.4801	26.51	9.33	35.84	46.00	-10.16	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V
Worst case-GFSK(low channel)

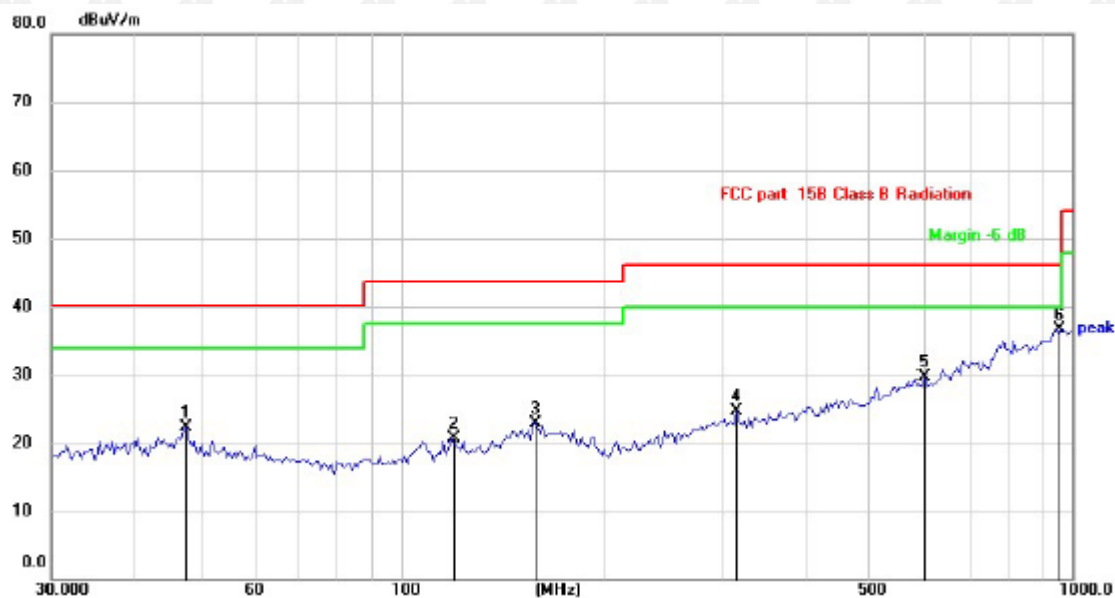

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		47.7422	28.62	-6.32	22.30	40.00	-17.70	QP
2		118.8095	26.74	-5.96	20.78	43.50	-22.72	QP
3		158.6677	26.49	-3.56	22.93	43.50	-20.57	QP
4		317.1445	26.95	-2.24	24.71	46.00	-21.29	QP
5		601.4265	25.59	4.02	29.61	46.00	-16.39	QP
6	*	948.7610	27.40	9.30	36.70	46.00	-9.30	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Above 1 GHz Test Results:

CH Low (2404MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4808	56.51	-3.64	52.87	74	-21.13	peak
4808	48.40	-3.64	44.76	54	-9.24	AVG
7212	59.01	-0.95	58.06	74	-15.94	peak
7212	50.67	-0.95	49.72	54	-4.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4808	57.11	-3.64	53.47	74	-20.53	peak
4808	48.86	-3.64	45.22	54	-8.78	AVG
7212	58.29	-0.95	57.34	74	-16.66	peak
7212	50.40	-0.95	49.45	54	-4.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2443MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4886	54.99	-3.51	51.48	74	-22.52	peak
4886	46.03	-3.51	42.52	54	-11.48	AVG
7329	57.53	-0.82	56.71	74	-17.29	peak
7329	47.32	-0.82	46.50	54	-7.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4886	55.05	-3.51	51.54	74	-22.46	peak
4886	45.30	-3.51	41.79	54	-12.21	AVG
7329	56.42	-0.82	55.60	74	-18.40	peak
7329	46.59	-0.82	45.77	54	-8.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2476MHz)
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4952	55.53	-3.43	52.10	74	-21.90	peak
4952	46.67	-3.43	43.24	54	-10.76	AVG
7428	56.85	-0.75	56.10	74	-17.90	peak
7428	47.33	-0.75	46.58	54	-7.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4952	55.54	-3.43	52.11	74	-21.89	peak
4952	46.16	-3.43	42.73	54	-11.27	AVG
7428	56.63	-0.75	55.88	74	-18.12	peak
7428	47.27	-0.75	46.52	54	-7.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9kHz to the 25 GHz, The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report.
- (2). All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3). For GFSK above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)

Operation Mode: TX CH Low (2404MHz)
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	54.85	-5.81	49.04	54	-4.96	peak
2310	/	-5.81	/	54	/	AVG
2390	55.01	-5.84	49.17	54	-4.83	peak
2390	/	-5.84	/	54	/	AVG
2400	53.48	-5.84	47.64	54	-6.36	peak
2400	/	-5.84	/	54	/	AVG

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	55.88	-5.81	50.07	54	-3.93	peak
2310	/	-5.81	/	54	/	AVG
2390	55.90	-5.84	50.06	54	-3.94	peak
2390	/	-5.84	/	54	/	AVG
2400	56.55	-5.84	50.71	54	-3.29	peak
2400	/	-5.84	/	54	/	AVG

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2476MHz)
Horizontal (Worst case)

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.80	-5.65	49.15	54	-4.85	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	54.62	-5.65	48.97	54	-5.03	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	53.69	-5.65	48.04	54	-5.96	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	56.31	-5.65	50.66	54	-3.34	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

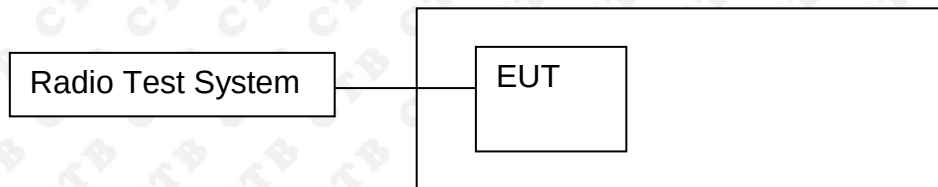

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result

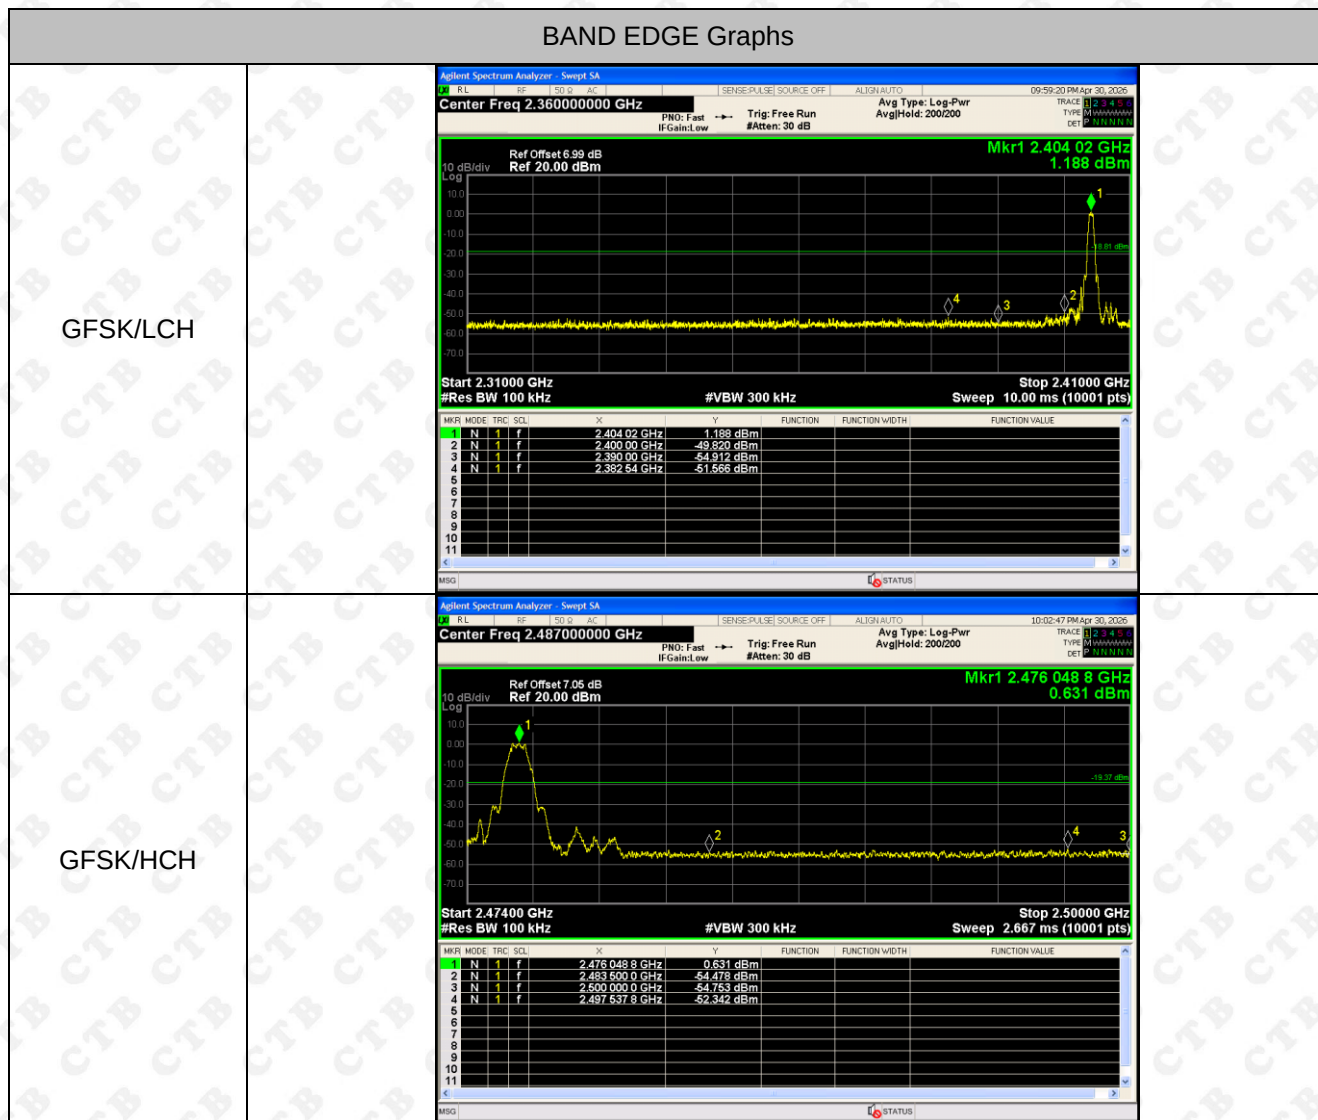


RF Conducted Spurious Emissions Graphs


GFSK/LCH

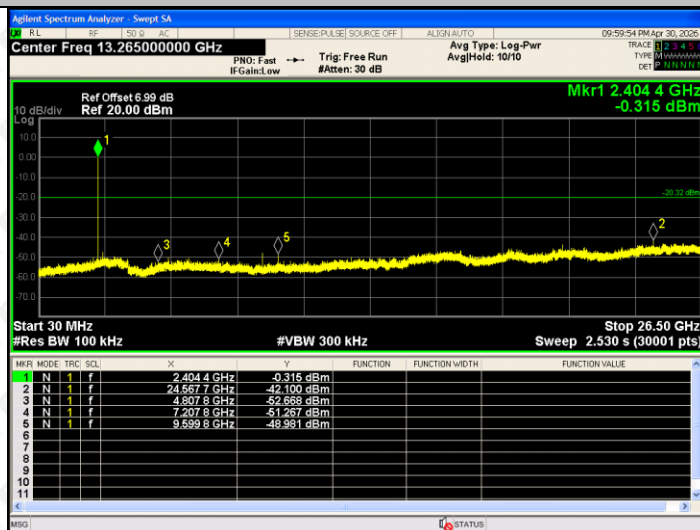

GFSK/MCH

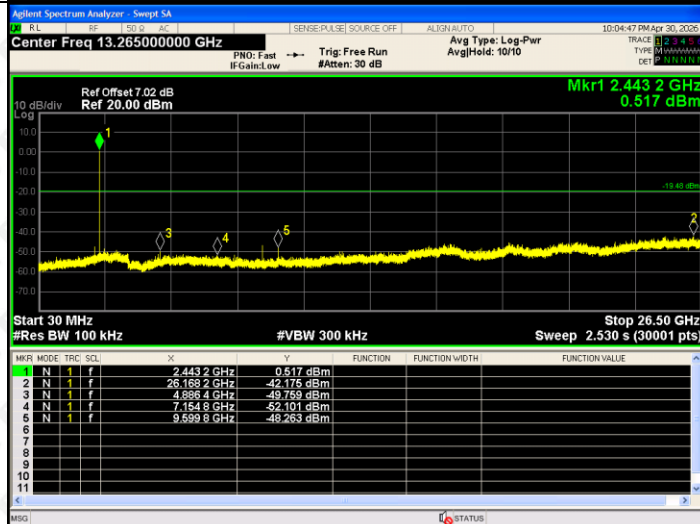


GFSK/HCH

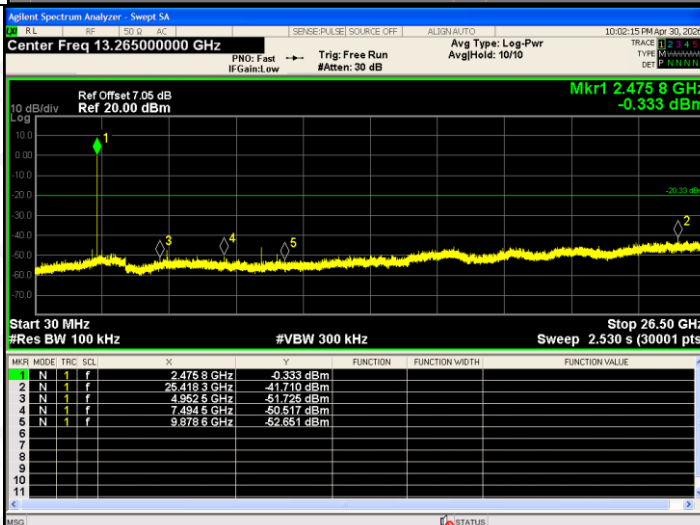

9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

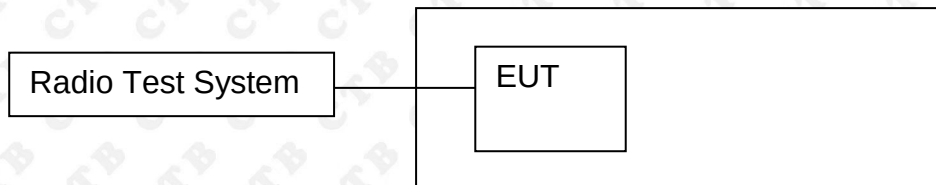

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Channel power measurement. Sweep = auto; Detector Function = peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm]	Limit[dBm]	Verdict
GFSK	LCH	1.493	30	PASS
	MCH	1.814	30	PASS
	HCH	1.209	30	PASS


Duty Cycle

Mode	Channel.	Duty Cycle(%)	Correction Factor (dB)
GFSK	LCH	54.40	2.64
	MCH	53.13	2.75
	HCH	55.56	2.55

Test Graph:

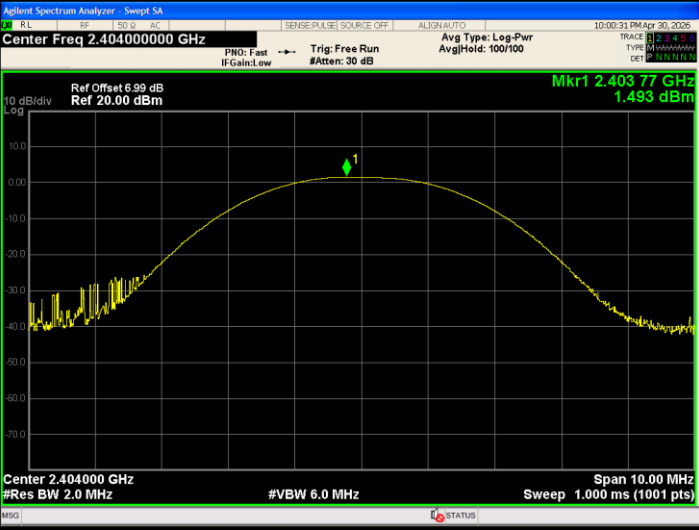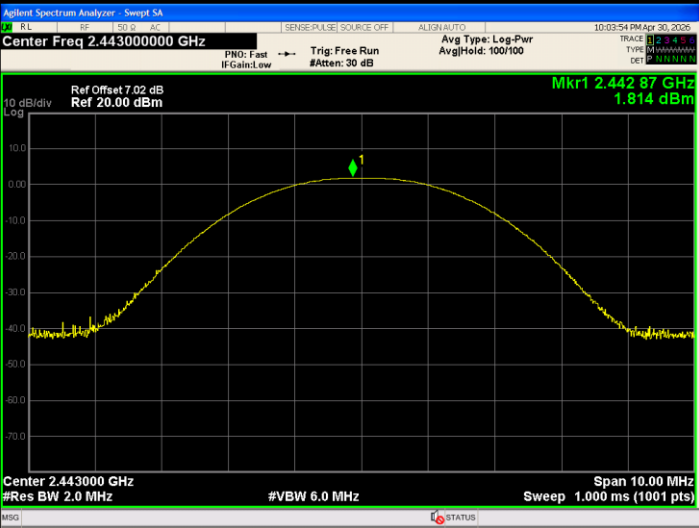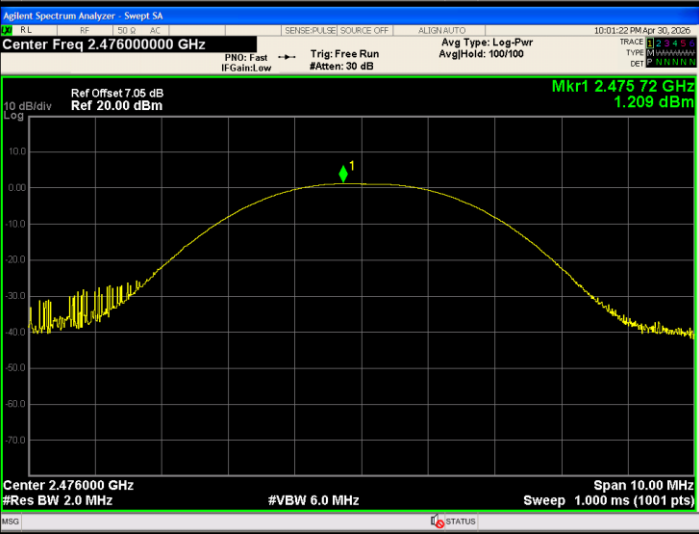
GFSK Low channel	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.404000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.40377 GHz 1.493 dBm Center 2.404000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
GFSK Mid channel	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.443000000 GHz Ref Offset 7.02 dB Ref 20.00 dBm Mkr1 2.44287 GHz 1.814 dBm Center 2.443000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
GFSK High channel	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.476000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.47572 GHz 1.209 dBm Center 2.476000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

Duty Cycle Test Graph:

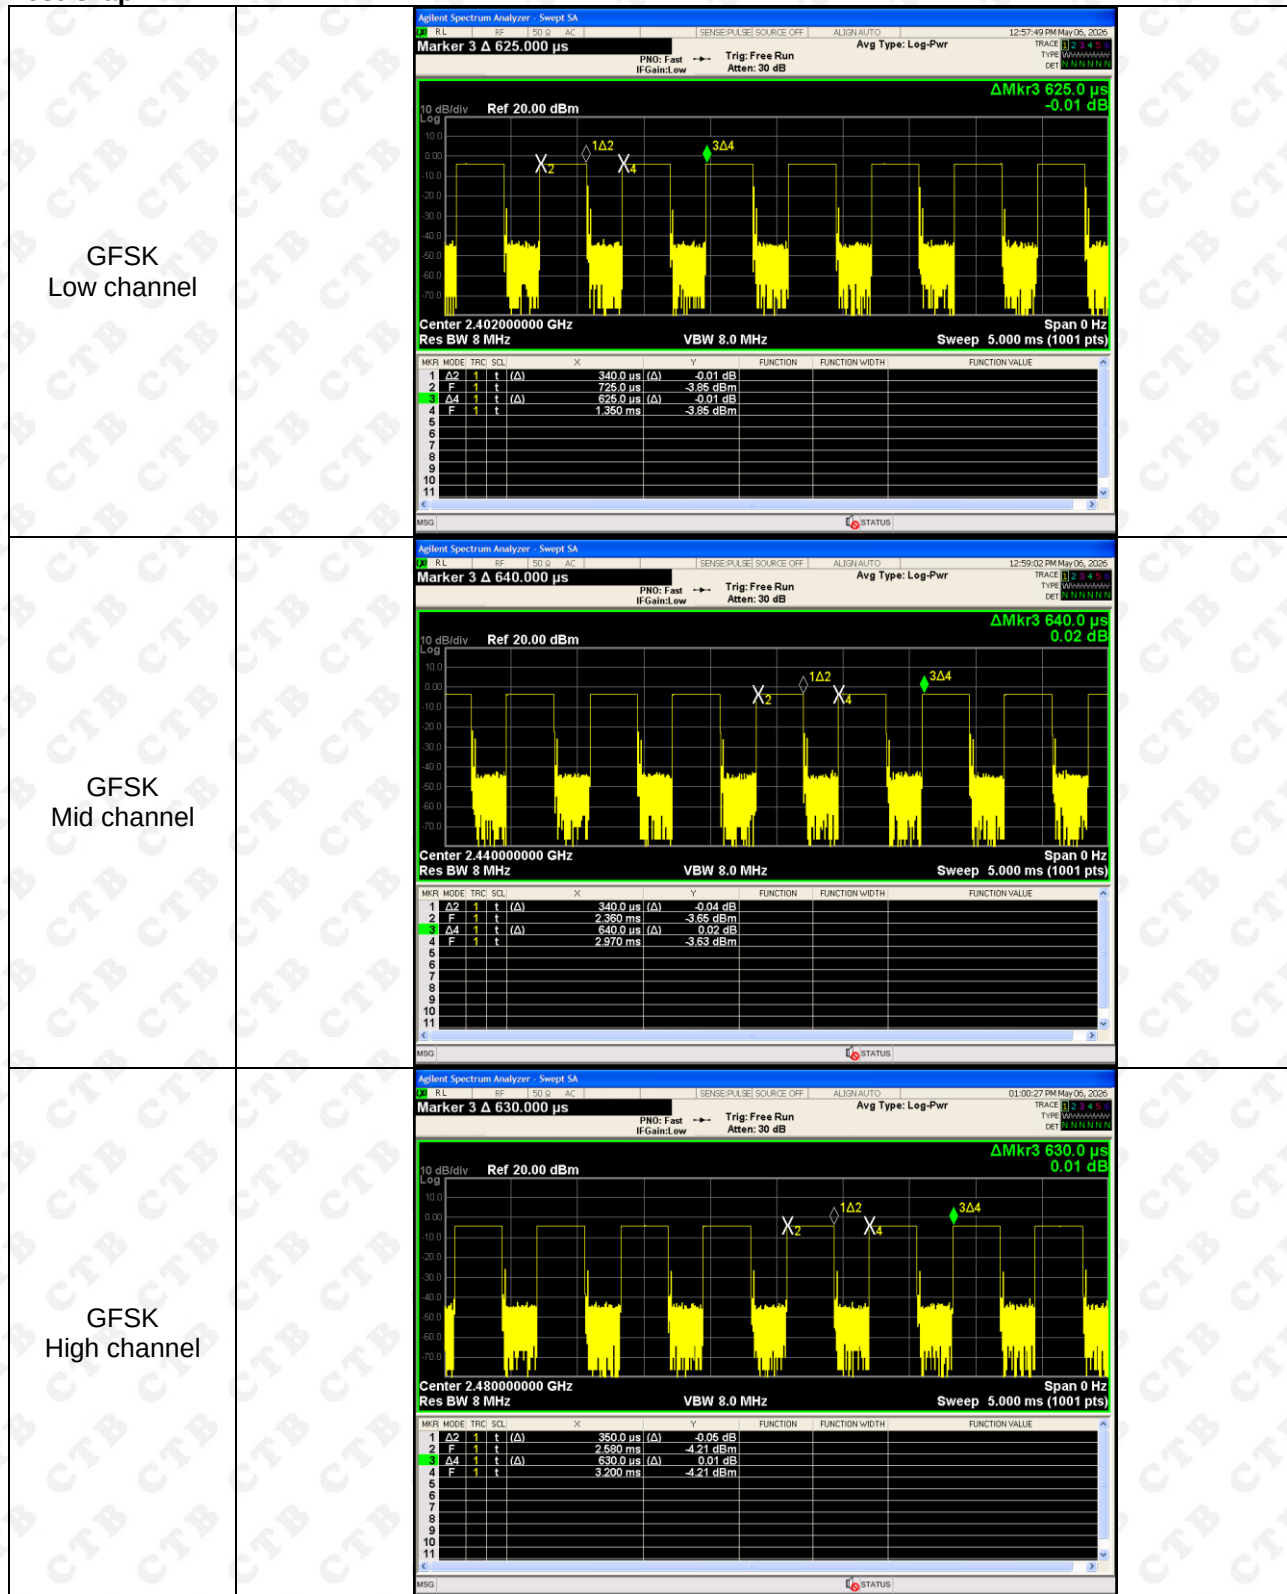

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

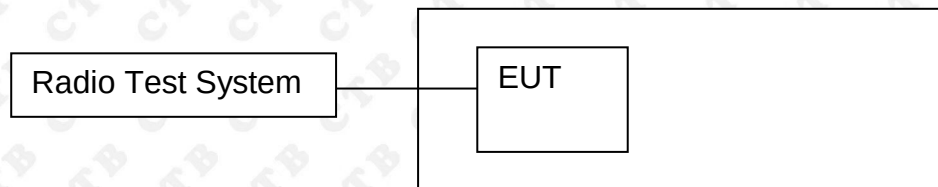

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit (kHz)	Result
GFSK	Low channel	0.649	≥ 500	PASS
	Mid channel	0.537	≥ 500	PASS
	High channel	0.647	≥ 500	PASS


Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:



11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

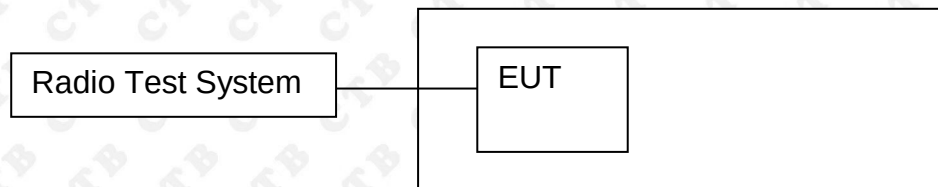

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density (dBm/3KHz)	Limit(dBm/3KHz)	Verdict
GFSK	LCH	-14.417	8	PASS
	MCH	-12.825	8	PASS
	HCH	-14.437	8	PASS

Test Graph

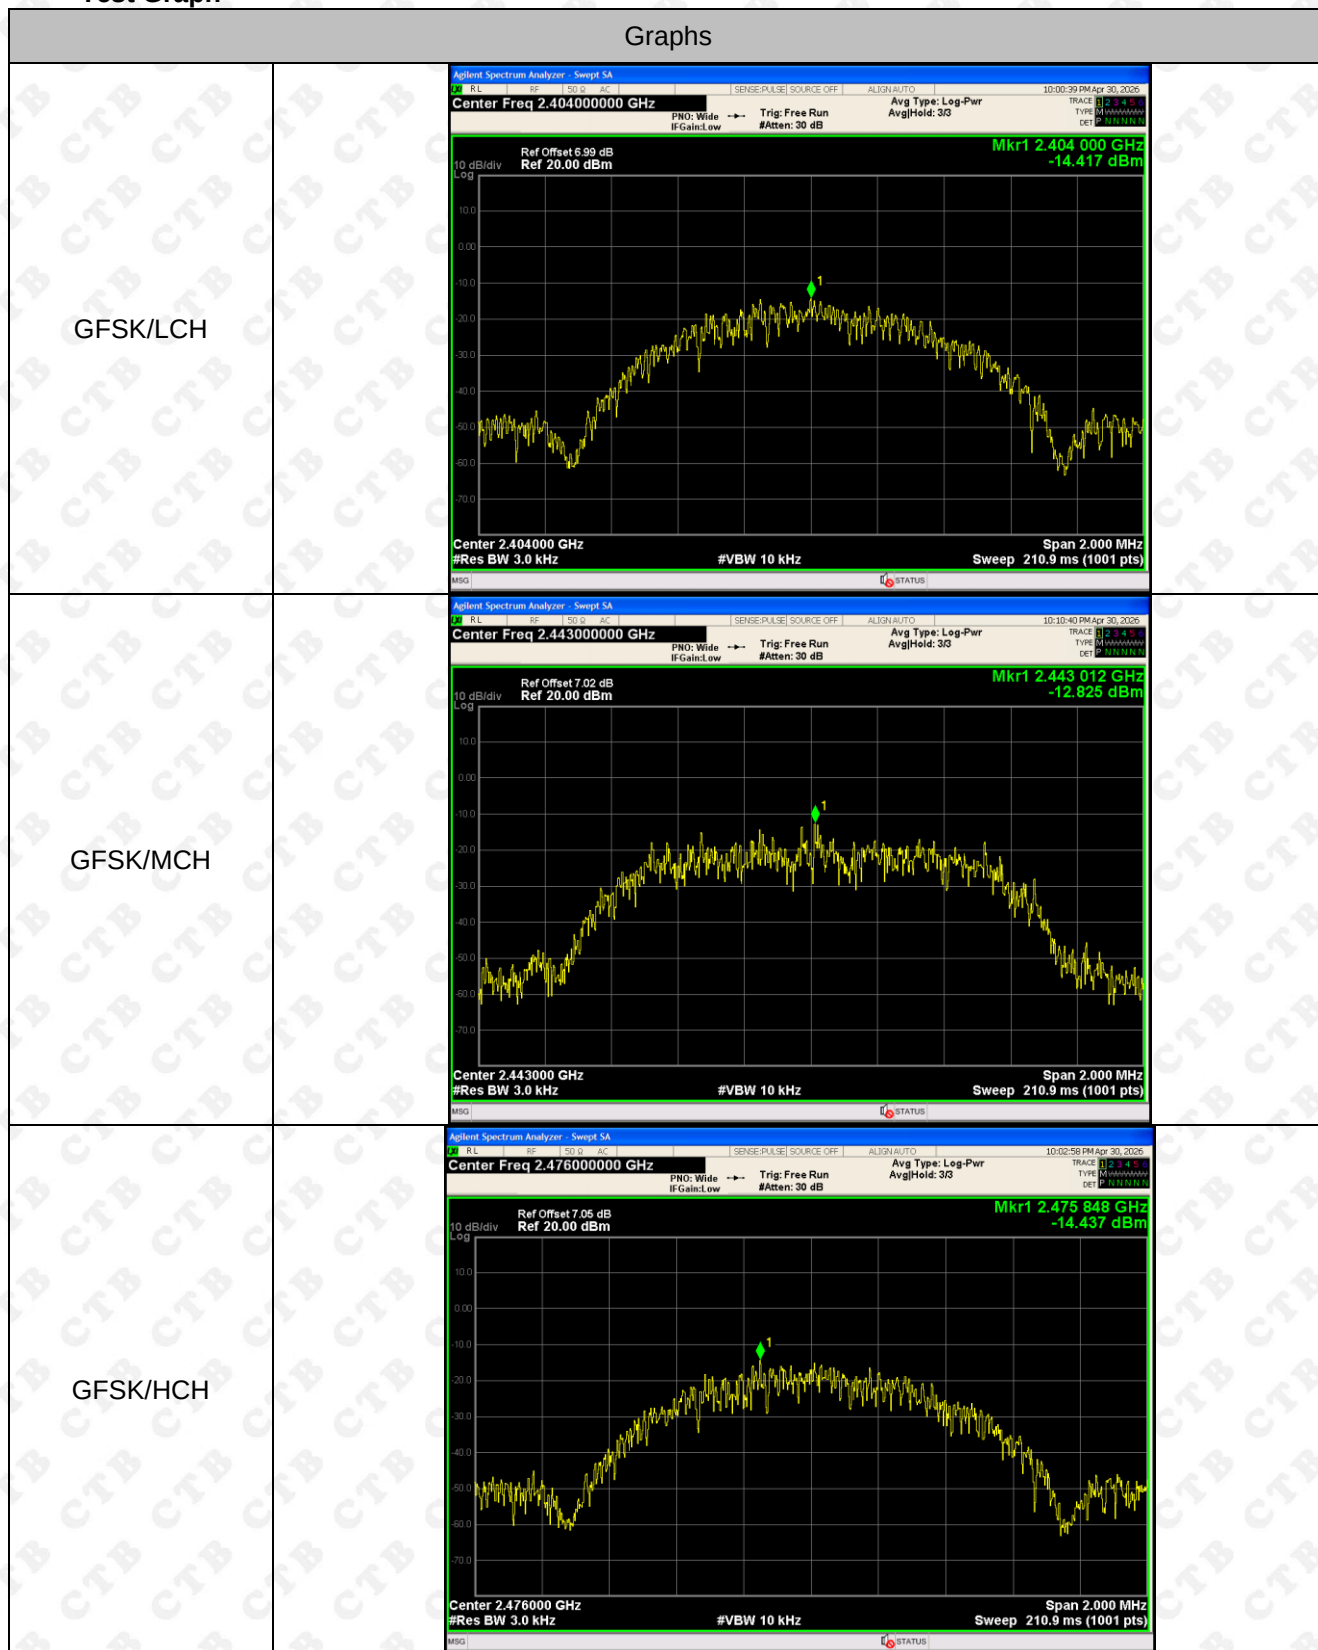

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The EUT antenna is PCB antenna. The best case gain of the antenna is 0.8dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

Below 1G



Above 1G



***** END OF REPORT *****