



Fill the Nectar

Method 1

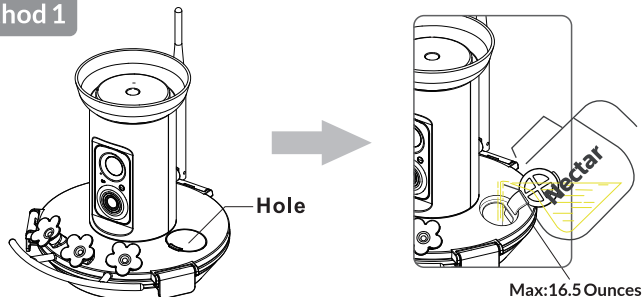


Method 2

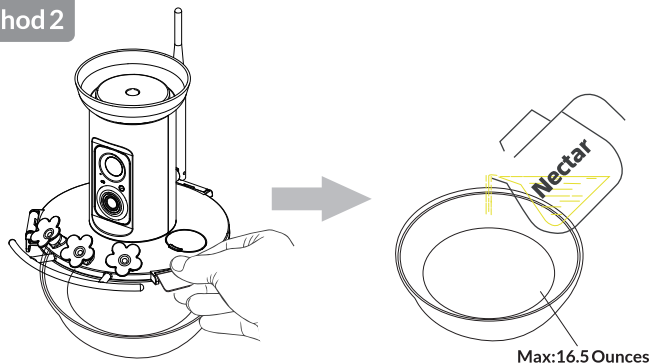


Step 1: After opening the stopper, align it with the exposed hole and slowly pour the nectar into it. Alternatively, you can directly unfasten the buckle to open the entire upper cover and pour the nectar in directly.

1

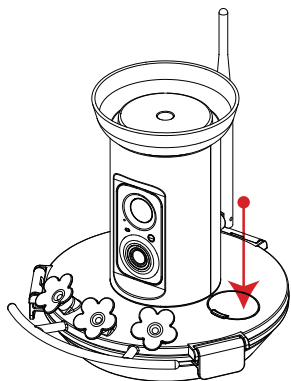

2

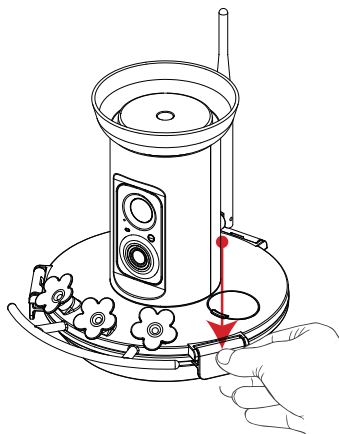

Step 2: To prevent the nectar from spilling, insert the stopper into the hole and press it firmly by hand.

Step 3: If you have opened the upper cover, align the cover with the container and fasten the buckles securely.


Read Before Installation

1. Keep Bird Feeder and all accessories out of reach of children and pets.
2. Make sure the camera has been fully charged (DC5V / 1.5A).
3. Working temperature: -10°C to 50°C (14°F to 122°F) Working relative humidity: 0-95%
4. Please do not expose the camera lens to direct sunlight.
5. The camera is rated IP65 and can operate in rain. It must not be submerged in water.



Note:

1. Bird Feeder Cam works with 2.4GHz and 5GHz Wi-Fi.
2. Strong lights may interfere with the device's ability to scan QR code.
3. Avoid placing the device behind furniture or near microwaves products. Ensure the device is within strong Wi-Fi signal range.

Assemble the Hummingbird Feeder

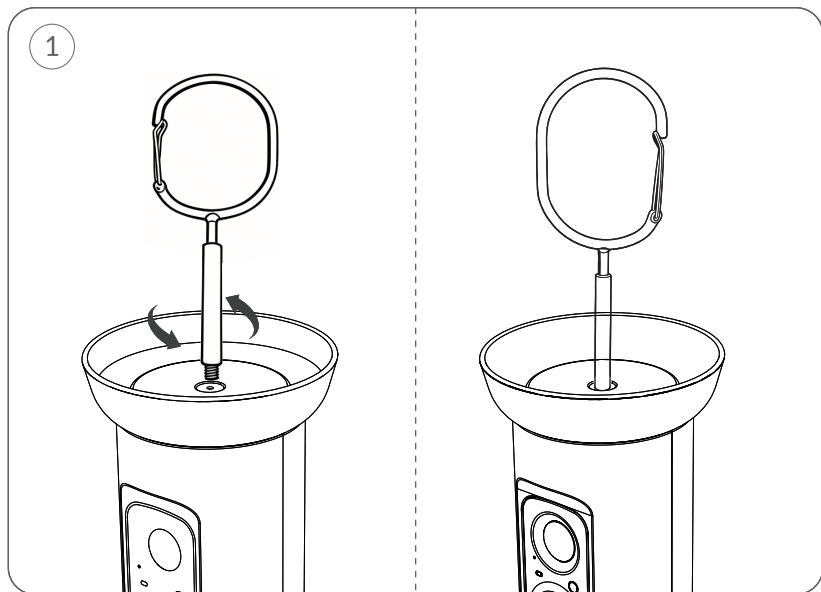


Step 1: Align the hook with the hook hole on the top of the lid and then tighten it.

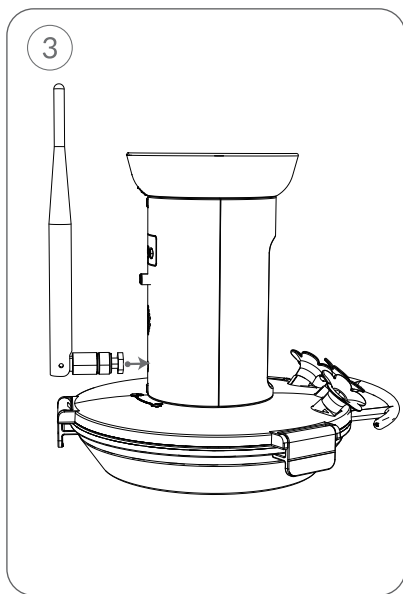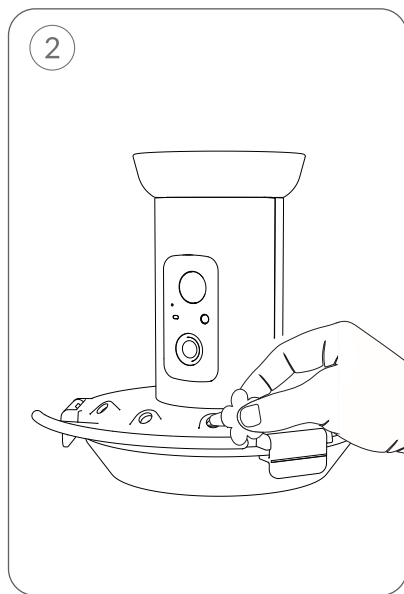

Step 2: Flower Accessory: Align it with the hole on the base cover, insert it and press firmly to secure.


Step 3: Please install the antenna in the fixed position.

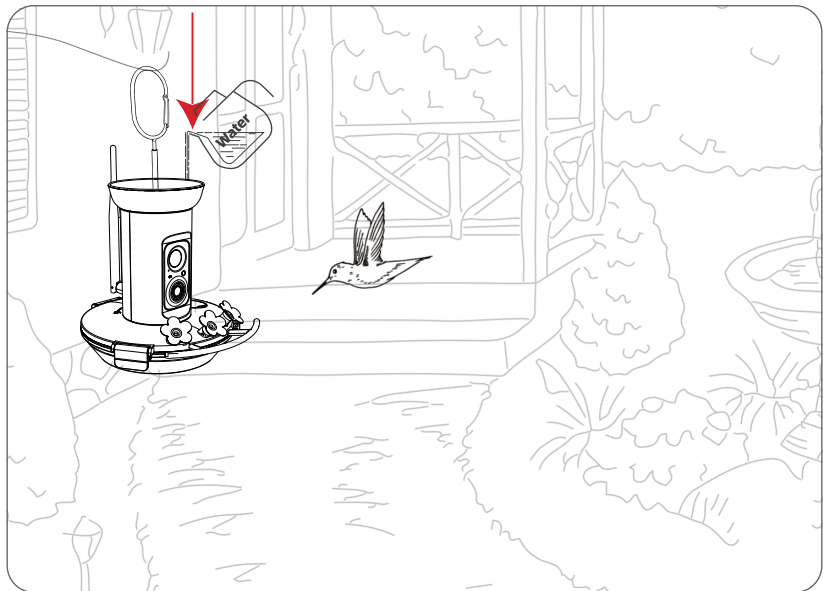


Step4: Put some pure water in the cover as a moat to keep ants out, then you can hang it in your garden.

Special Reminder:


Please make sure that the feeder is placed in a semi-shaded area and not under direct sunlight. Intense heat will lead to nectar fermentation within hours before the hummingbird has a chance to taste it.

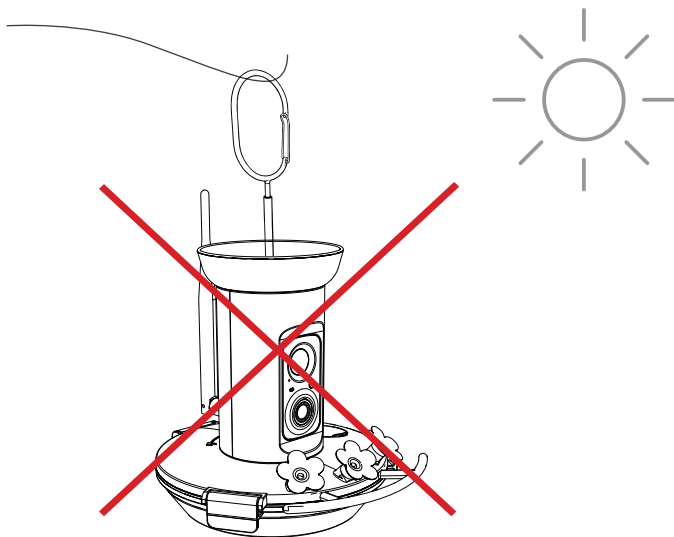

Solar Panel Installation

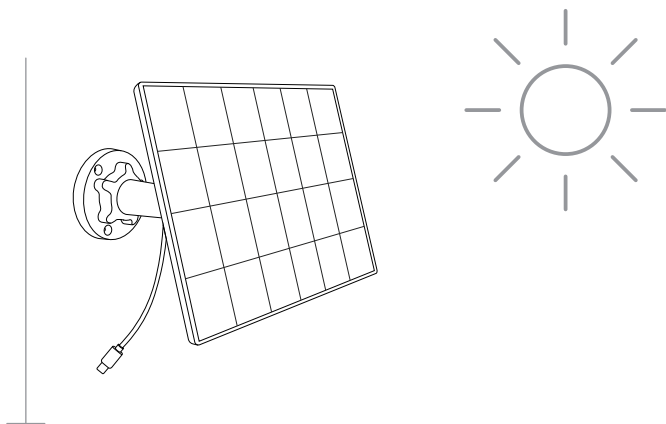


Step 1: Find a good installation point and install the Solar Panel in a sunny location.

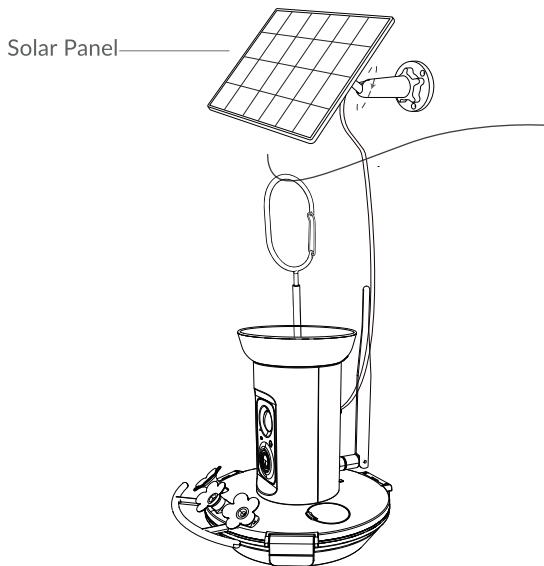

Step 2: After the Bird Feeder is installed and ready for bird watching. Connect Solar Panel cable to Bird feeder charge port.


Clean the Hummingbird Feeder

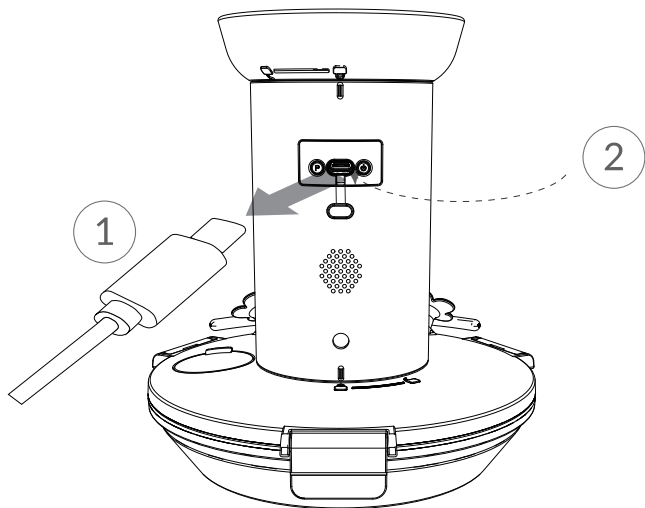

Step 1: Unplug the charging cable and put in on the silicone cover.


Step 2: Unscrew the upper cover counterclockwise until it reaches the unlock mark, and then the upper cover can be removed.

Step 3: Unscrew the base counterclockwise until it reaches the unlock mark, and then the base can be removed.

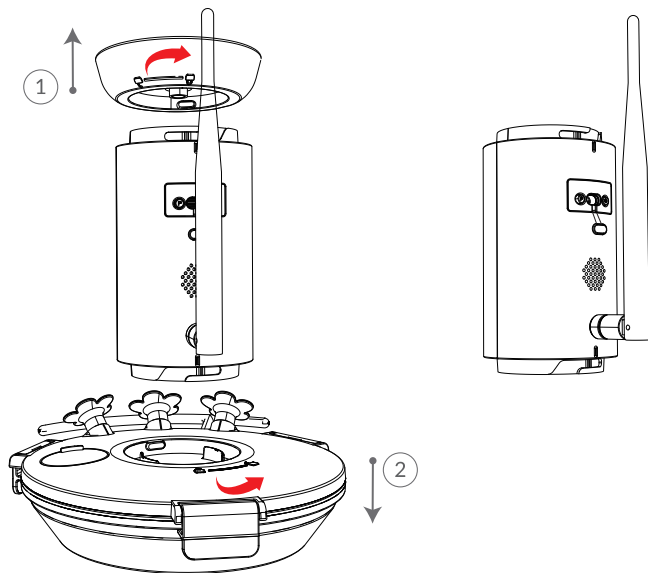


Note:

Make sure you remove the camera before cleaning to avoid damaging it.
Please avoid touching the lens to prevent blurry camera images.

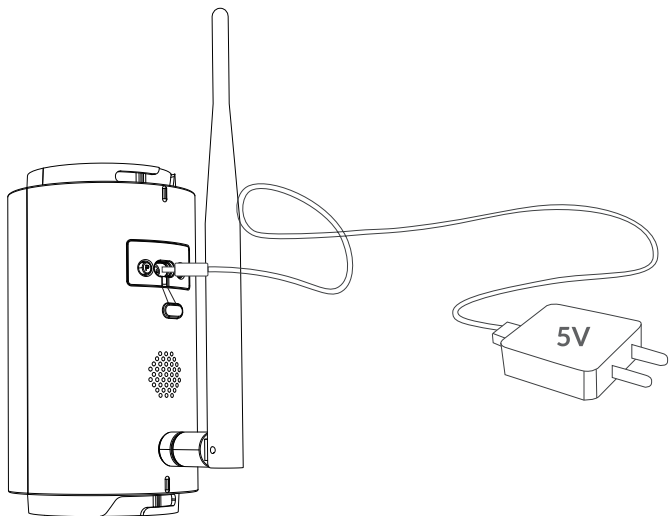


Step 4: Charge the camera with adaptor (5V) if not enough power.

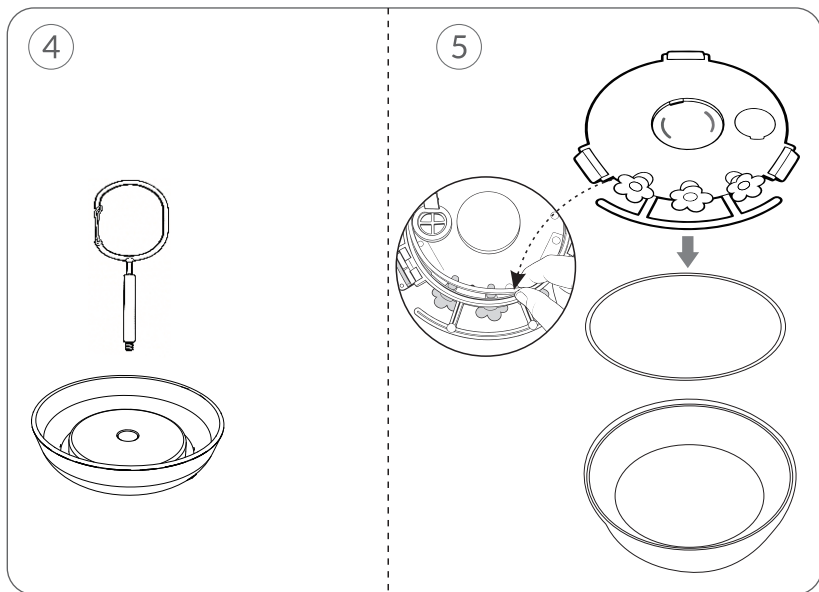

Step 5: Unscrew the hook from the upper cover by turning it counterclockwise

Step 6: Open the buckle to remove the cover, and take off the silicone pad attached to the cover (please perform this operation over a sink).

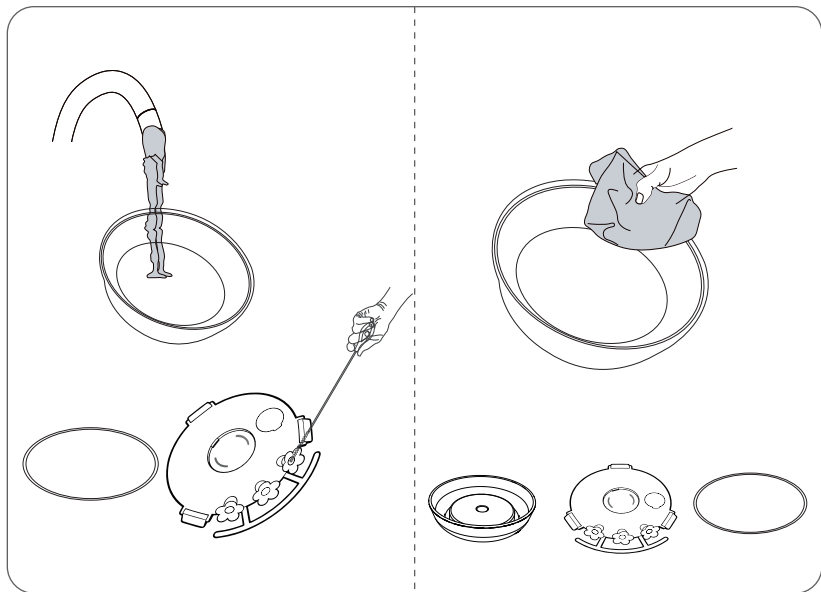

Step 7: Rinse the container and silicone pad thoroughly with clean water, and you may use the provided brush to clean the components. Dry all parts of the feeder completely.

Frequently Asked Questions

Q1: Why doesn't the Wi-Fi name appear when I connect to Wi-Fi?

A1: You need to turn on the "location permission" for the app in the system settings and change it to "allow when using".

Q2: Will the camera show red lights when night vision is activated?

A2: The built-in infrared lamp beads make the camera only show some dim red lights when night vision is activated, but the image quality is still clear under no light environment.

Q3: What are the requirements for Wi-Fi?

A3: Please use a 2.4GHz or 5GHz wireless network. Meanwhile, please set the Wi-Fi authentication method to wpa2-psk or other lower level of the security method. A password is required.

Q4: How far should the camera be placed from the router?

A4: After testing, the Wi-Fi connection distance can normally reach up to 50 meters in the open area. However, the actual situation depends on the strength of Wi-Fi and its surrounding environment.

Q5: What is the maximum length of recording time?

A5: You can choose the recording time in the app. The camera record for a fixed time or "auto" mode, when depending on whether there is a person, the maximum length of a video is 30 seconds.

Q6: What should I do when the device is malfunctioning?

A6: If the camera malfunctions, please first check whether it has been accidentally exposed to water due to improper operation. If there is no water damage: Power on the camera, then use a reset pin to press the "P" hole at the bottom of the camera for 1–3 seconds to restart it. If there are signs of water ingress: First eliminate the water hazard, then let the camera dry completely (6–8 hours in direct sunlight) before attempting to power it on and perform a reset restart. If the camera shuts down due to foreign objects entering (e.g., the charging port or SD card slot): Try to remove the object with tweezers, or seek guidance from online customer service before powering on and resetting the device to avoid secondary damage.

Q7: The device cannot connect to the app. What should I check?

A7: Please review the steps below. Most connection issues are related to Wi-Fi environment or setup conditions and can usually be resolved quickly.

1) Complete Setup Indoors First

Start the setup process indoors near your main router.

This ensures a strong signal and successful initial connection.

After the device is connected in the app, you can install it outdoors within a strong Wi-Fi signal area. You can check the Wi-Fi signal strength in the app under Settings.

2) Antenna Installation

Make sure the antenna is securely attached before starting setup.

3) Wi-Fi Network Status

Make sure your Wi-Fi network is working properly and has internet access.

Do not use a Guest network during setup, as it may block communication between the device and your router.

Temporarily disable mobile data on your phone to ensure it remains connected to the selected Wi-Fi network during setup.

4) Reconnecting the Same Device

If reconnecting the same device, delete it from the app before attempting setup again: Settings → Device Settings → Delete Device