



TEST REPORT

Test item description: Stackable Unit
FCC ID: 2BVIG-CSAP04008
Trademark(s): N/A
Model/Type reference: CSAP04008
Applicant's name: Inforich (Guangzhou) Technology Company Limited
Address: Room 01, Room 2601, 439 Zhongshan Avenue Central, Tianhe District, 510000
Guangzhou, Guangdong Province, China
Manufacturer: Inforich (Guangzhou) Technology Company Limited
Address: Room 01, Room 2601, 439 Zhongshan Avenue Central, Tianhe District, 510000
Guangzhou, Guangdong Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District,
Shenzhen, Guangdong, China
Sample Received Date: Nov. 20, 2025
Sample tested Date: Nov. 20, 2025 to Mar. 17, 2026
Issue Date: Mar. 17, 2026
Report No.: CTB25112005011RF02
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Bin Mei

Kai ChenMartin FengBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	22
7.1 Block Diagram Of Test Setup	22
7.2 Limit	22
7.3 Test procedure	23
7.4 Test Result	24
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	60
8.1 Block Diagram Of Test Setup	60
8.2 Limit	60
8.3 Test procedure	60
8.4 Test Result	61
9. CONDUCTED PEAK OUTPUT POWER	68
9.1 Block Diagram Of Test Setup	68
9.2 Limit	68
9.3 Test procedure	68
9.4 Test Result	68
10. 20DB OCCUPIED BANDWIDTH	72
10.1 Block Diagram Of Test Setup	72
10.2 Limit	72
10.3 Test procedure	72
10.4 Test Result	72
11. CARRIER FREQUENCIES SEPARATION	76
11.1 Block Diagram Of Test Setup	76
11.2 Limit	76
11.3 Test procedure	76
11.4 Test Result	76
12. HOPPING CHANNEL NUMBER	80
12.1 Block Diagram Of Test Setup	80
12.2 Limit	80
12.3 Test procedure	80
12.4 Test Result	80
13. DWELL TIME	82

13.1	Block Diagram Of Test Setup	82
13.2	Limit	82
13.3	Test procedure	82
13.4	Test Result	82
14.	PSEUDORANDOM FREQUENCY	86
14.1	Limit	86
14.2	Test procedure	86
14.3	Test Result	86
15.	ANTENNA REQUIREMENT	87
16.	EUT TEST SETUP PHOTOGRAPHS	88

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25112005011RF02	Mar. 17, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2020	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2020	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2020	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9kHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
Frequency	1×10^{-7}
Conducted Emission(150kHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	CSAP04008
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: -0.099dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: FPC antenna
Antenna Gain:	Bluetooth: 2.8dBi
Ratings:	Input: 12V=6A Each charging slot output: 5V=2A Charging slots total output: 5V=8A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22

18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1

Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/9/19	2026/9/18
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2

5	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/5/24	2026/5/23
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/5/24	2026/5/23
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/5/24	2026/5/23
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/5/24	2026/5/23
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22


This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

4 POS terminals:

L: Worst case-GFSK(low channel)

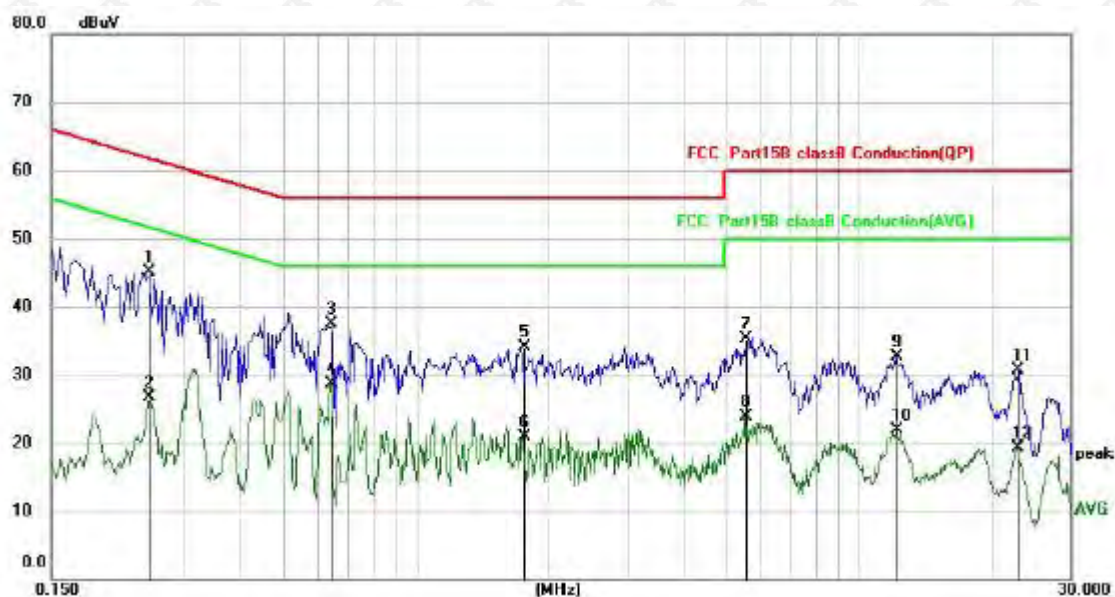


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.2500	34.96	10.08	45.04	61.76	-16.72	QP
2		0.2500	16.62	10.08	26.70	51.76	-25.06	AVG
3		0.6419	27.45	10.10	37.55	56.00	-18.45	QP
4		0.6419	18.54	10.10	28.64	46.00	-17.36	AVG
5		1.7459	23.99	10.16	34.15	56.00	-21.85	QP
6		1.7459	10.79	10.16	20.95	46.00	-25.05	AVG
7		5.5579	25.09	10.31	35.40	60.00	-24.60	QP
8		5.5579	13.52	10.31	23.83	50.00	-26.17	AVG
9		12.1577	22.19	10.56	32.75	60.00	-27.25	QP
10		12.1577	11.35	10.56	21.91	50.00	-28.09	AVG
11		22.7578	19.57	11.09	30.66	60.00	-29.34	QP
12		22.7578	8.21	11.09	19.30	50.00	-30.70	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

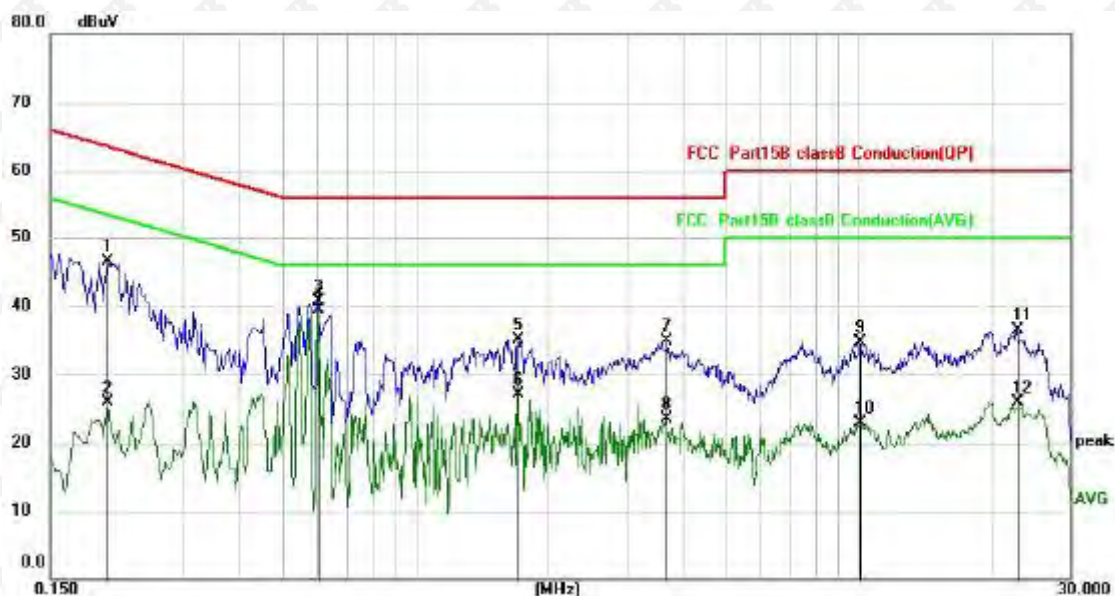


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.2020	36.50	10.08	46.58	63.53	-16.95	QP
2		0.2020	15.81	10.08	25.89	53.53	-27.64	AVG
3		0.6018	30.61	10.10	40.71	56.00	-15.29	QP
4	*	0.6018	29.45	10.10	39.55	46.00	-6.45	AVG
5		1.7018	24.86	10.16	35.02	56.00	-20.98	QP
6		1.7018	16.88	10.16	27.04	46.00	-18.96	AVG
7		3.6779	24.75	10.23	34.98	56.00	-21.02	QP
8		3.6779	13.29	10.23	23.52	46.00	-22.48	AVG
9		10.0700	24.28	10.44	34.72	60.00	-25.28	QP
10		10.0700	12.50	10.44	22.94	50.00	-27.06	AVG
11		22.7740	25.44	11.09	36.53	60.00	-23.47	QP
12		22.7740	14.72	11.09	25.81	50.00	-24.19	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

8 POS terminals:

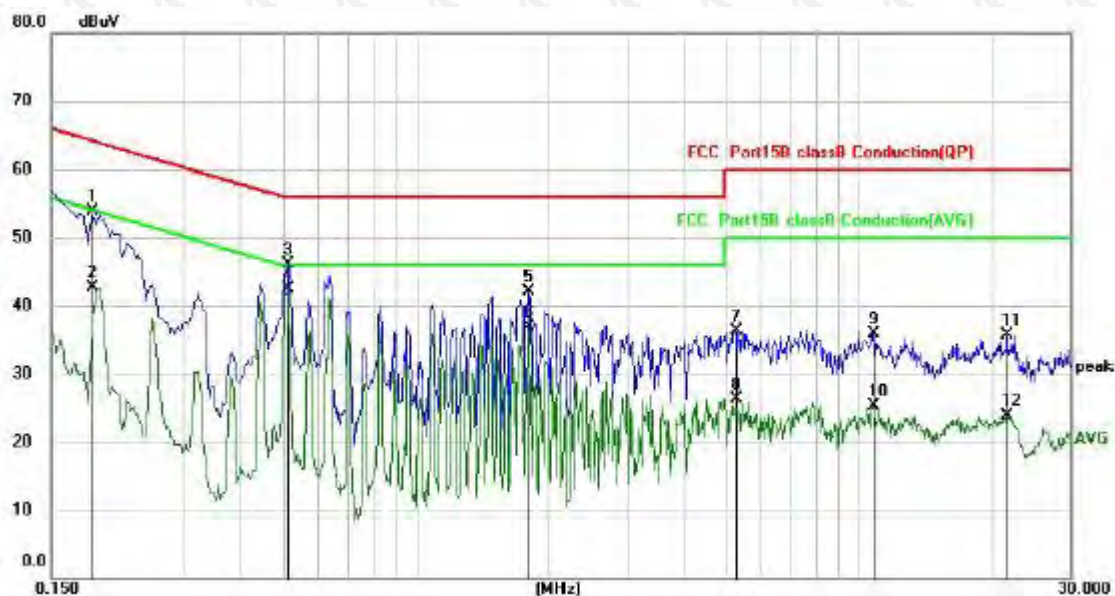
L: Worst case-GFSK(low channel)


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1859	43.74	10.08	53.82	64.22	-10.40	QP
2		0.1859	32.59	10.08	42.67	54.22	-11.55	AVG
3		0.5140	36.10	10.09	46.19	56.00	-9.81	QP
4	*	0.5140	32.39	10.09	42.48	46.00	-3.52	AVG
5		1.7940	31.99	10.16	42.15	56.00	-13.85	QP
6		1.7940	26.66	10.16	36.82	46.00	-9.18	AVG
7		5.2618	26.09	10.29	36.38	60.00	-23.62	QP
8		5.2618	16.04	10.29	26.33	50.00	-23.67	AVG
9		10.7737	25.45	10.48	35.93	60.00	-24.07	QP
10		10.7737	14.86	10.48	25.34	50.00	-24.66	AVG
11		21.4980	24.76	11.03	35.79	60.00	-24.21	QP
12		21.4980	12.84	11.03	23.87	50.00	-26.13	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

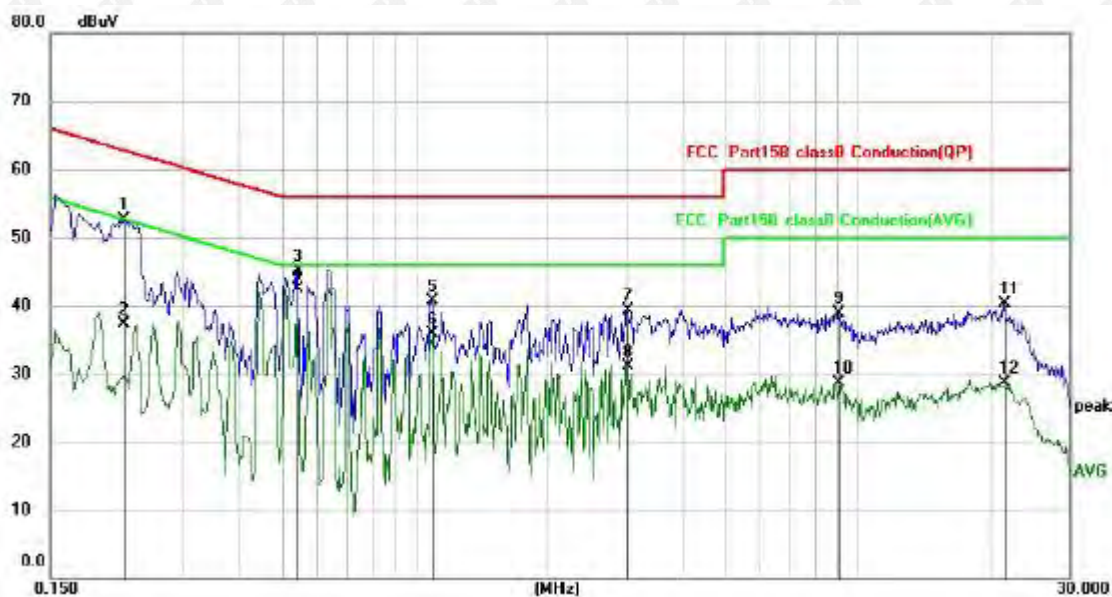


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2197	42.62	10.08	52.70	62.83	-10.13	QP
2		0.2197	27.15	10.08	37.23	52.83	-15.60	AVG
3		0.5420	35.08	10.09	45.17	56.00	-10.83	QP
4	*	0.5420	32.48	10.09	42.57	46.00	-3.43	AVG
5		1.0900	30.56	10.13	40.69	56.00	-15.31	QP
6		1.0900	25.74	10.13	35.87	46.00	-10.13	AVG
7		3.0100	29.05	10.21	39.26	56.00	-16.74	QP
8		3.0100	20.88	10.21	31.09	46.00	-14.91	AVG
9		9.0259	28.39	10.42	38.81	60.00	-21.19	QP
10		9.0259	18.35	10.42	28.77	50.00	-21.23	AVG
11		21.3180	29.27	11.02	40.29	60.00	-19.71	QP
12		21.3180	17.61	11.02	28.63	50.00	-21.37	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

12 POS terminals:

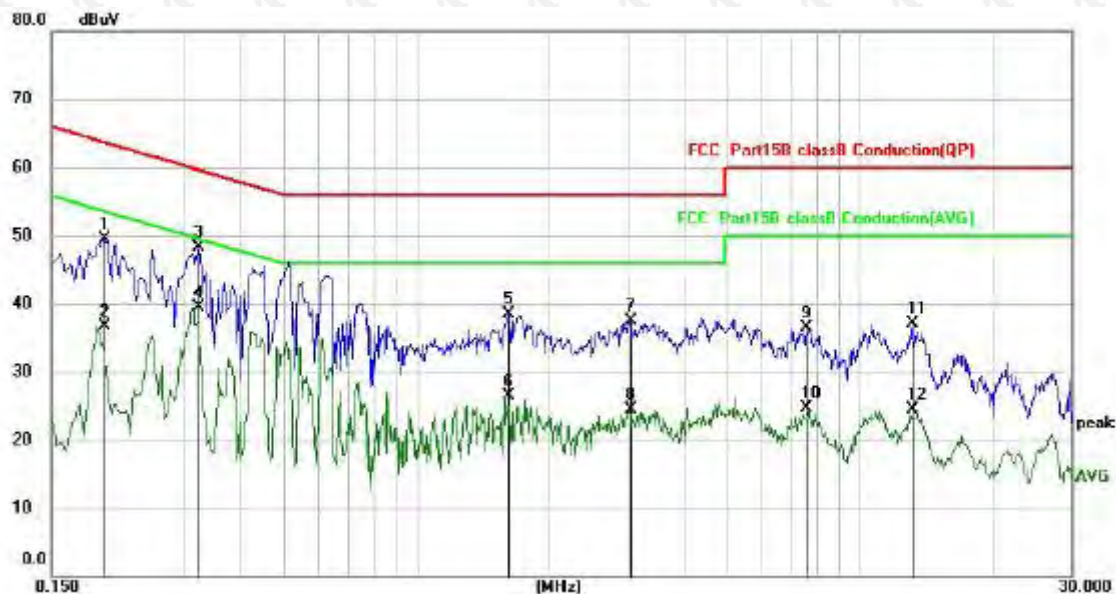
L: Worst case-GFSK(low channel)


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1980	39.37	10.08	49.45	63.69	-14.24	QP
2		0.1980	26.60	10.08	36.68	53.69	-17.01	AVG
3		0.3220	38.20	10.08	48.28	59.66	-11.38	QP
4	*	0.3220	29.33	10.08	39.41	49.66	-10.25	AVG
5		1.6180	28.35	10.15	38.50	56.00	-17.50	QP
6		1.6180	16.33	10.15	26.48	46.00	-19.52	AVG
7		3.0459	27.26	10.21	37.47	56.00	-18.53	QP
8		3.0459	14.31	10.21	24.52	46.00	-21.48	AVG
9		7.5659	26.09	10.39	36.48	60.00	-23.52	QP
10		7.5659	14.41	10.39	24.80	50.00	-25.20	AVG
11		13.1500	26.39	10.62	37.01	60.00	-22.99	QP
12		13.1500	13.90	10.62	24.52	50.00	-25.48	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

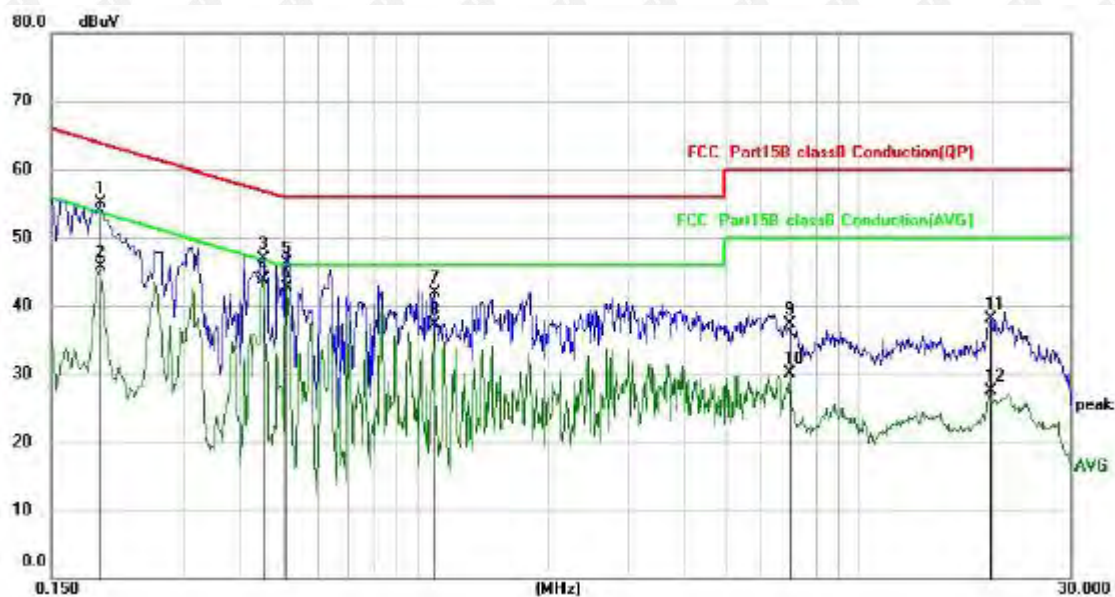


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1940	45.00	10.08	55.08	63.86	-8.78	QP
2		0.1940	35.61	10.08	45.69	53.86	-8.17	AVG
3		0.4500	36.91	10.09	47.00	56.88	-9.88	QP
4	*	0.4500	33.74	10.09	43.83	46.88	-3.05	AVG
5		0.5100	36.29	10.09	46.38	56.00	-9.62	QP
6		0.5100	32.56	10.09	42.65	46.00	-3.35	AVG
7		1.0940	31.79	10.13	41.92	56.00	-14.08	QP
8		1.0940	27.20	10.13	37.33	46.00	-8.67	AVG
9		6.9618	26.97	10.38	37.35	60.00	-22.65	QP
10		6.9618	19.64	10.38	30.02	50.00	-19.98	AVG
11		19.7977	27.21	10.95	38.16	60.00	-21.84	QP
12		19.7977	16.46	10.95	27.41	50.00	-22.59	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

16 POS terminals:

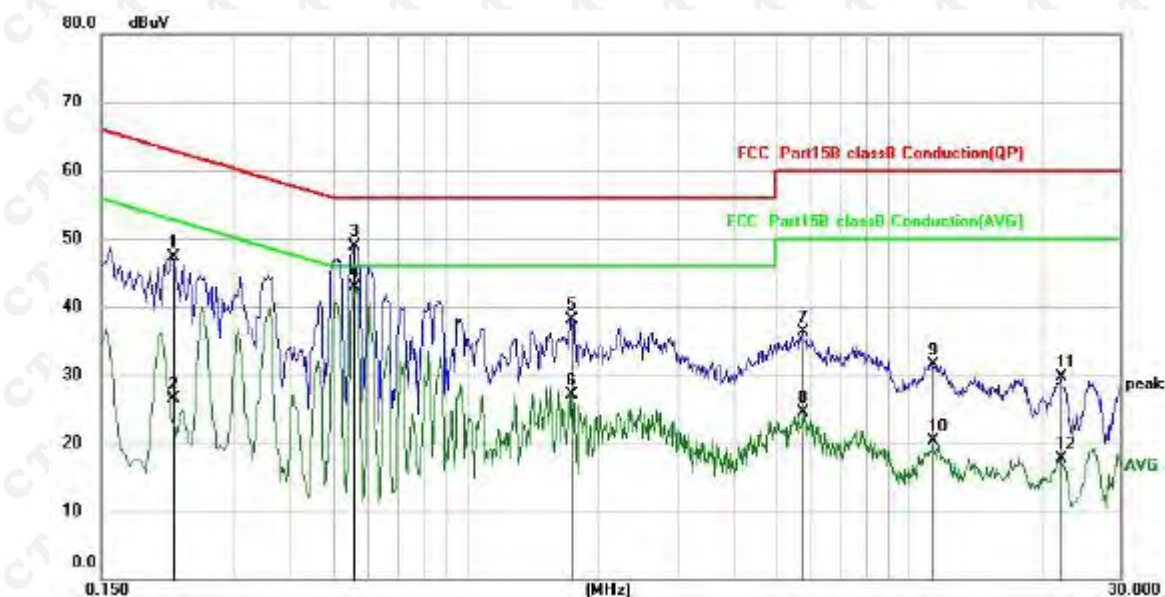
L: Worst case-GFSK(low channel)


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.2179	37.20	10.08	47.28	62.90	-15.62	QP
2		0.2179	16.48	10.08	26.56	52.90	-26.34	AVG
3		0.5580	38.89	10.10	48.99	56.00	-7.01	QP
4	*	0.5580	32.89	10.10	42.99	46.00	-3.01	AVG
5		1.7300	28.04	10.16	38.20	56.00	-17.80	QP
6		1.7300	17.04	10.16	27.20	46.00	-18.80	AVG
7		5.7378	26.06	10.32	36.38	60.00	-23.62	QP
8		5.7378	14.11	10.32	24.43	50.00	-25.57	AVG
9		11.3258	21.00	10.52	31.52	60.00	-28.48	QP
10		11.3258	9.72	10.52	20.24	50.00	-29.76	AVG
11		22.0180	18.66	11.06	29.72	60.00	-30.28	QP
12		22.0180	6.56	11.06	17.62	50.00	-32.38	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

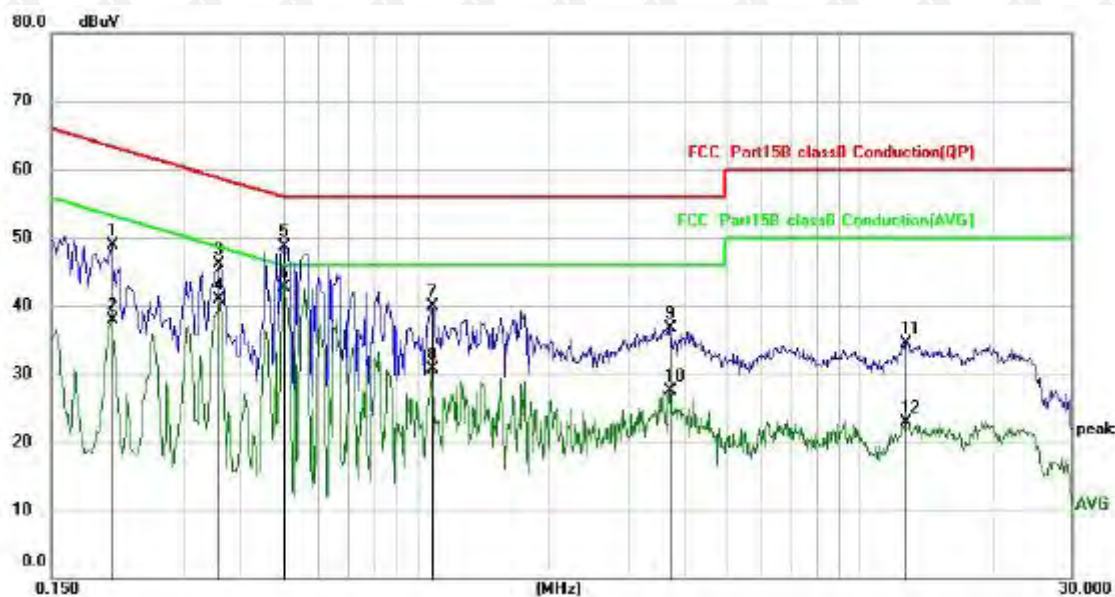

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2058	38.82	10.08	48.90	63.37	-14.47	QP
2		0.2058	27.74	10.08	37.82	53.37	-15.55	AVG
3		0.3578	35.94	10.09	46.03	58.78	-12.75	QP
4		0.3578	30.79	10.09	40.88	48.78	-7.90	AVG
5		0.5020	38.54	10.09	48.63	56.00	-7.37	QP
6	*	0.5020	32.65	10.09	42.74	46.00	-3.26	AVG
7		1.0859	29.84	10.13	39.97	56.00	-16.03	peak
8		1.0859	20.55	10.13	30.68	46.00	-15.32	AVG
9		3.7339	26.46	10.23	36.69	56.00	-19.31	peak
10		3.7339	17.34	10.23	27.57	46.00	-18.43	AVG
11		12.6979	23.92	10.60	34.52	60.00	-25.48	peak
12		12.6979	12.29	10.60	22.89	50.00	-27.11	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

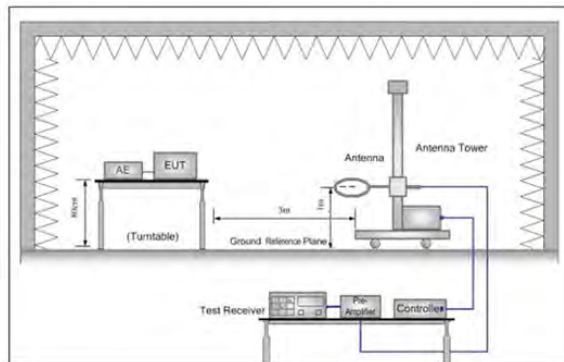


Figure 1. Below 30MHz

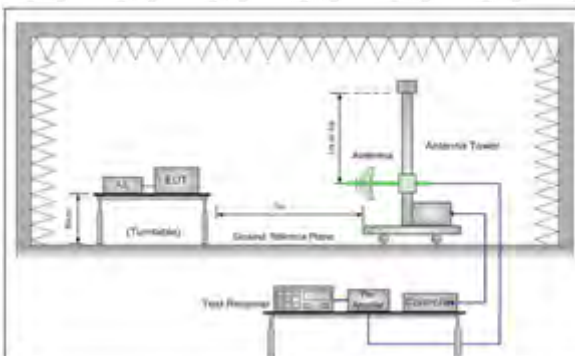


Figure 2. 30MHz to 1GHz

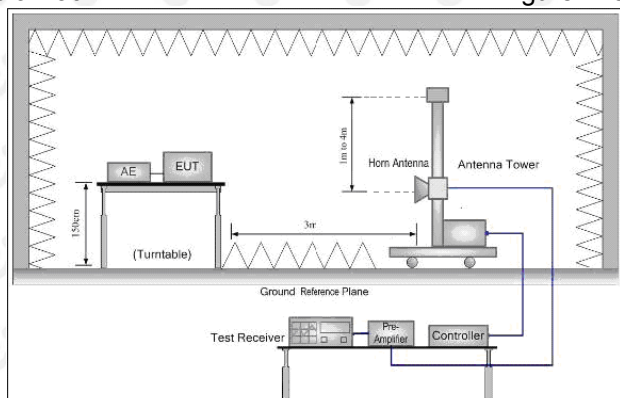


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

4 POS terminals:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		153.2004	41.40	-4.09	37.31	43.50	-6.19	QP
2	!	206.3976	44.02	-6.24	37.78	43.50	-5.72	QP
3	*	250.3012	47.52	-4.74	42.78	46.00	-3.22	QP
4		374.6225	36.17	-1.31	34.86	46.00	-11.14	QP
5		628.3745	29.75	4.67	34.42	46.00	-11.58	QP
6		948.7610	26.92	9.30	36.22	46.00	-9.78	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

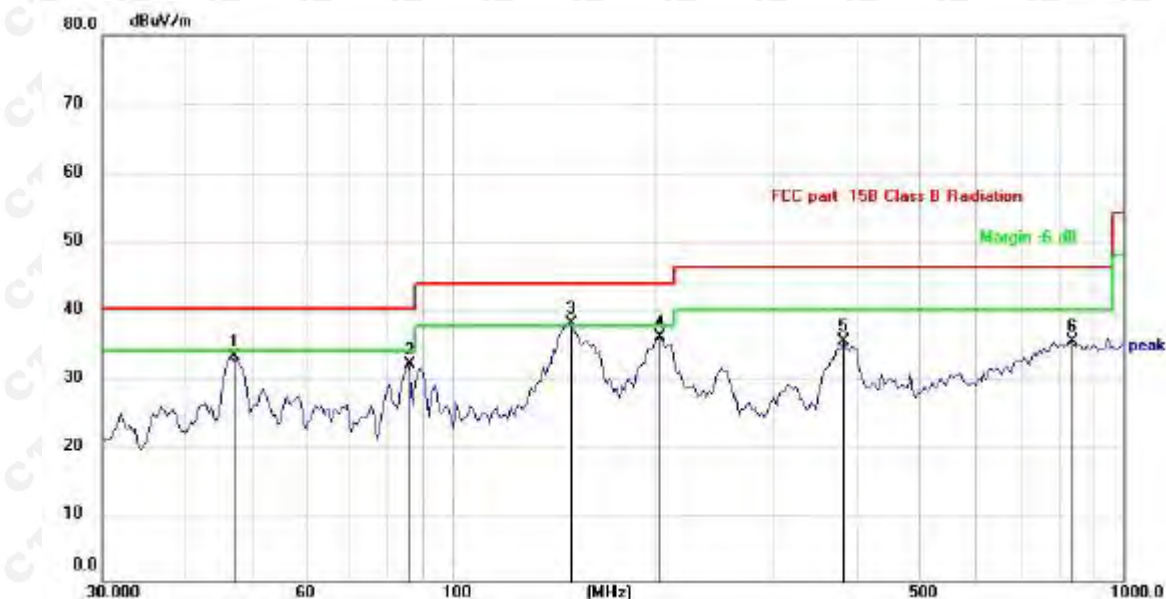

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.9125	39.44	-6.27	33.17	40.00	-6.83	QP
2		85.8984	40.29	-8.33	31.96	40.00	-8.04	QP
3	*	149.2239	42.37	-4.48	37.89	43.50	-5.61	QP
4		204.5961	42.22	-6.30	35.92	43.50	-7.58	QP
5		384.6055	36.45	-1.15	35.30	46.00	-10.70	QP
6		839.1818	26.28	8.93	35.21	46.00	-10.79	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

8 POS terminals:

Below 1GHz Test Results:

Antenna polarity: H

Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		47.3255	35.52	-6.29	29.23	40.00	-10.77	QP
2		89.7472	30.96	-7.91	23.05	43.50	-20.45	QP
3	!	155.9101	41.71	-3.83	37.88	43.50	-5.62	QP
4	!	252.5051	46.84	-4.64	42.20	46.00	-3.80	QP
5		371.3528	40.83	-1.36	39.47	46.00	-6.53	QP
6	*	735.7802	35.50	7.16	42.66	46.00	-3.34	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.5030	39.71	-6.24	33.47	40.00	-6.53	QP
2	*	149.2239	44.63	-4.48	40.15	43.50	-3.35	QP
3		204.5961	41.39	-6.30	35.09	43.50	-8.41	QP
4	!	371.3528	43.06	-1.36	41.70	46.00	-4.30	QP
5		565.6297	31.83	2.94	34.77	46.00	-11.23	QP
6	!	789.2338	32.57	8.33	40.90	46.00	-5.10	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

12 POS terminals:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.9125	35.95	-6.27	29.68	40.00	-10.32	QP
2		98.8326	29.36	-7.93	21.43	43.50	-22.07	QP
3	*	179.3863	44.05	-4.23	39.82	43.50	-3.68	QP
4	!	254.7284	46.12	-4.54	41.58	46.00	-4.42	QP
5	!	300.8943	44.77	-2.51	42.26	46.00	-3.74	QP
6		565.6297	36.68	2.94	39.62	46.00	-6.38	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

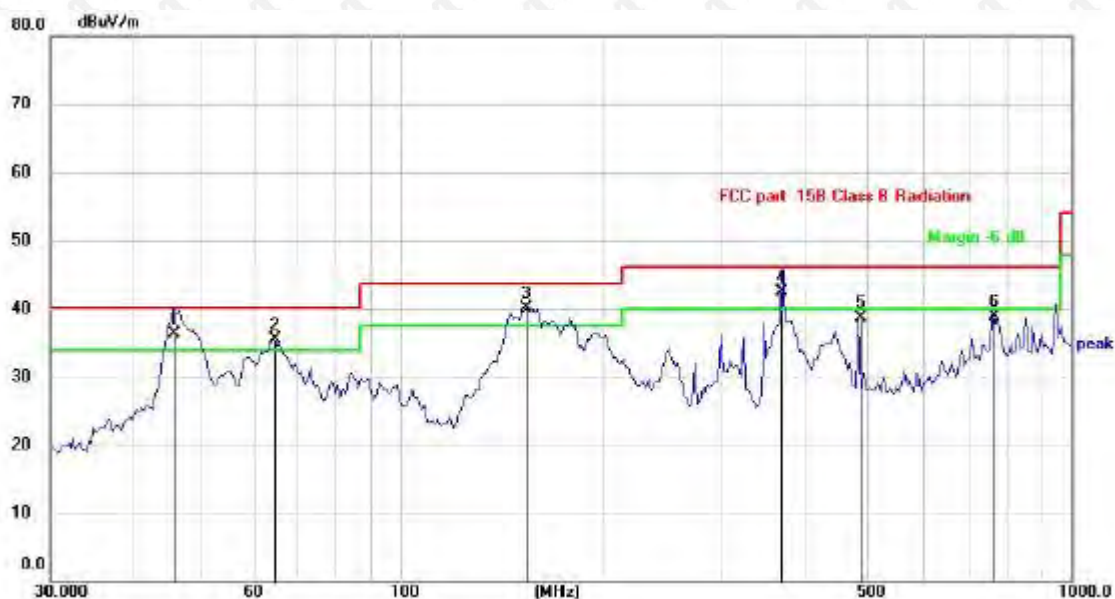

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	!	46.0971	42.48	-6.22	36.26	40.00	-3.74	QP
2	!	64.3202	43.06	-7.48	35.58	40.00	-4.42	QP
3	*	154.5493	44.13	-3.96	40.17	43.50	-3.33	QP
4	!	371.3528	43.96	-1.36	42.60	46.00	-3.40	QP
5		483.0618	38.06	0.63	38.69	46.00	-7.31	QP
6		762.0385	31.17	7.73	38.90	46.00	-7.10	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

16 POS terminals:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.9125	34.36	-6.27	28.09	40.00	-11.91	QP
2		90.5374	28.14	-7.88	20.26	43.50	-23.24	QP
3		150.5378	40.68	-4.35	36.33	43.50	-7.17	QP
4	!	206.3976	45.09	-6.24	38.85	43.50	-4.65	QP
5	*	371.3528	44.05	-1.36	42.69	46.00	-3.31	QP
6		590.9737	35.83	3.71	39.54	46.00	-6.46	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

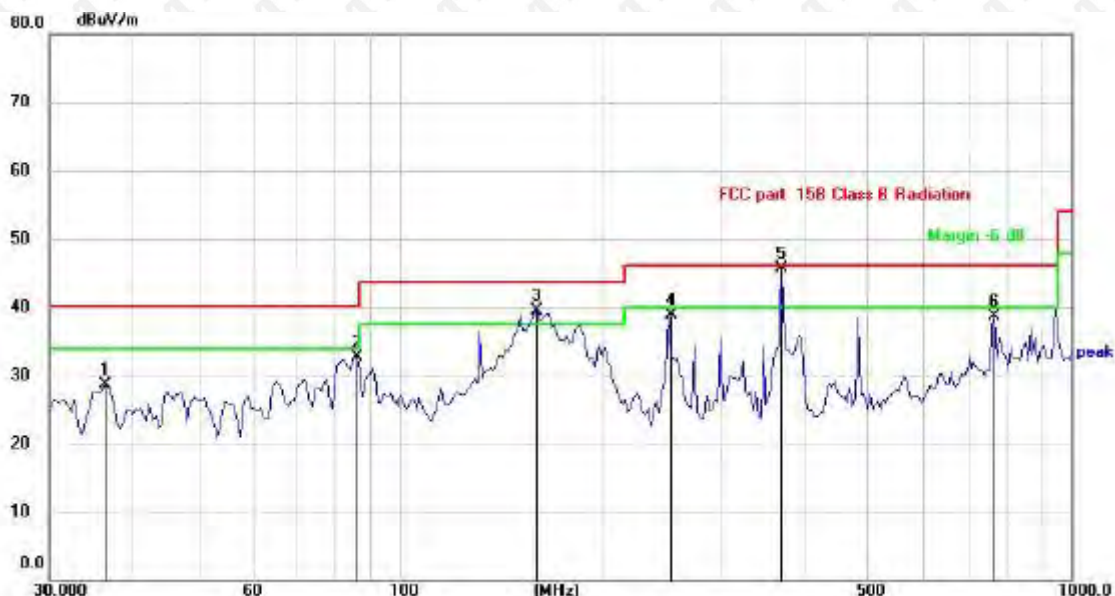

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		36.3814	35.01	-6.34	28.67	40.00	-11.33	QP
2		85.8984	41.04	-8.33	32.71	40.00	-7.29	QP
3	!	160.0648	43.03	-3.43	39.60	43.50	-3.90	QP
4		252.5051	43.58	-4.64	38.94	46.00	-7.06	QP
5	*	371.3528	47.00	-1.36	45.64	46.00	-0.36	QP
6		768.7481	30.86	7.88	38.74	46.00	-7.26	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

4 POS terminals:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	59.12	-3.65	55.47	74.00	-18.53	peak
4804	50.89	-3.65	47.24	54.00	-6.76	AVG
7206	59.31	-0.95	58.36	74.00	-15.64	peak
7206	40.60	-0.95	39.65	54.00	-14.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.52	-3.65	53.87	74.00	-20.13	peak
4804	49.00	-3.65	45.35	54.00	-8.65	AVG
7206	59.67	-0.95	58.72	74.00	-15.28	peak
7206	40.38	-0.95	39.43	54.00	-14.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.91	-3.54	55.37	74.00	-18.63	peak
4882.00	48.79	-3.54	45.25	54.00	-8.75	AVG
7323.00	57.81	-0.81	57.00	74.00	-17.00	peak
7323.00	42.07	-0.81	41.26	54.00	-12.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.95	-3.54	55.41	74.00	-18.59	peak
4882.00	50.94	-3.54	47.40	54.00	-6.60	AVG
7323.00	56.24	-0.81	55.43	74.00	-18.57	peak
7323.00	41.43	-0.81	40.62	54.00	-13.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.90	-3.43	54.47	74.00	-19.53	peak
4960	47.80	-3.44	44.36	54.00	-9.64	AVG
7440	59.30	-0.77	58.53	74.00	-15.47	peak
7440	41.00	-0.77	40.23	54.00	-13.77	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.27	-3.43	53.84	74.00	-20.16	peak
4960	50.02	-3.44	46.58	54.00	-7.42	AVG
7440	58.69	-0.77	57.92	74.00	-16.08	peak
7440	40.74	-0.77	39.97	54.00	-14.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	58.14	-5.81	52.33	54.00	-1.67	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.00	-5.84	50.16	54.00	-3.84	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.05	-5.81	51.24	54.00	-2.76	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.06	-5.84	49.22	54.00	-4.78	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.62	-5.81	48.81	54.00	-5.19	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.35	-6.06	47.29	54.00	-6.71	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.87	-5.81	51.06	54.00	-2.94	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.24	-6.06	49.18	54.00	-4.82	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.05	-5.81	50.24	54.00	-3.76	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.00	-5.84	48.16	54.00	-5.84	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.97	-5.81	50.16	54.00	-3.84	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.00	-5.84	49.16	54.00	-4.84	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.21	-5.81	51.40	54.00	-2.60	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.18	-6.06	50.12	54.00	-3.88	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.74	-5.81	50.93	54.00	-3.07	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.37	-6.06	48.31	54.00	-5.69	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8 POS terminals:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.55	-3.65	53.90	74.00	-20.10	peak
4804	50.13	-3.65	46.48	54.00	-7.52	AVG
7206	58.87	-0.95	57.92	74.00	-16.08	peak
7206	40.33	-0.95	39.38	54.00	-14.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.72	-3.65	55.07	74.00	-18.93	peak
4804	49.15	-3.65	45.50	54.00	-8.50	AVG
7206	60.33	-0.95	59.38	74.00	-14.62	peak
7206	40.56	-0.95	39.61	54.00	-14.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.75	-3.54	56.21	74.00	-17.79	peak
4882.00	48.96	-3.54	45.42	54.00	-8.58	AVG
7323.00	55.48	-0.81	54.67	74.00	-19.33	peak
7323.00	44.31	-0.81	43.50	54.00	-10.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.18	-3.54	55.64	74.00	-18.36	peak
4882.00	48.86	-3.54	45.32	54.00	-8.68	AVG
7323.00	56.89	-0.81	56.08	74.00	-17.92	peak
7323.00	43.70	-0.81	42.89	54.00	-11.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.73	-3.43	54.30	74.00	-19.70	peak
4960	47.27	-3.44	43.83	54.00	-10.17	AVG
7440	58.81	-0.77	58.04	74.00	-15.96	peak
7440	40.22	-0.77	39.45	54.00	-14.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.56	-3.43	53.13	74.00	-20.87	peak
4960	47.48	-3.44	44.04	54.00	-9.96	AVG
7440	60.91	-0.77	60.14	74.00	-13.86	peak
7440	41.77	-0.77	41.00	54.00	-13.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.27	-5.81	51.46	54.00	-2.54	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.32	-5.84	49.48	54.00	-4.52	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.22	-5.81	51.41	54.00	-2.59	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.79	-5.84	49.95	54.00	-4.05	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	54.07	-5.81	48.26	54.00	-5.74	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.64	-6.06	48.58	54.00	-5.42	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	57.39	-5.81	51.58	54.00	-2.42	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.99	-6.06	47.93	54.00	-6.07	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.19	-5.81	49.38	54.00	-4.62	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.98	-5.84	50.14	54.00	-3.86	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.73	-5.81	49.92	54.00	-4.08	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.47	-5.84	49.63	54.00	-4.37	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.63	-5.81	49.82	54.00	-4.18	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.52	-6.06	48.46	54.00	-5.54	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.95	-5.81	51.14	54.00	-2.86	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.21	-6.06	49.15	54.00	-4.85	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

12 POS terminals:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	59.19	-3.65	55.54	74.00	-18.46	peak
4804	48.85	-3.65	45.20	54.00	-8.80	AVG
7206	58.73	-0.95	57.78	74.00	-16.22	peak
7206	40.70	-0.95	39.75	54.00	-14.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	59.16	-3.65	55.51	74.00	-18.49	peak
4804	48.43	-3.65	44.78	54.00	-9.22	AVG
7206	60.30	-0.95	59.35	74.00	-14.65	peak
7206	40.72	-0.95	39.77	54.00	-14.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.40	-3.54	55.86	74.00	-18.14	peak
4882.00	48.37	-3.54	44.83	54.00	-9.17	AVG
7323.00	58.01	-0.81	57.20	74.00	-16.80	peak
7323.00	41.77	-0.81	40.96	54.00	-13.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	56.66	-3.54	53.12	74.00	-20.88	peak
4882.00	48.98	-3.54	45.44	54.00	-8.56	AVG
7323.00	57.27	-0.81	56.46	74.00	-17.54	peak
7323.00	41.24	-0.81	40.43	54.00	-13.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.54	-3.43	55.11	74.00	-18.89	peak
4960	48.46	-3.44	45.02	54.00	-8.98	AVG
7440	59.03	-0.77	58.26	74.00	-15.74	peak
7440	40.55	-0.77	39.78	54.00	-14.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.64	-3.43	53.21	74.00	-20.79	peak
4960	47.76	-3.44	44.32	54.00	-9.68	AVG
7440	59.39	-0.77	58.62	74.00	-15.38	peak
7440	41.20	-0.77	40.43	54.00	-13.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.00	-5.81	51.19	54.00	-2.81	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.87	-5.84	50.03	54.00	-3.97	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.52	-5.81	49.71	54.00	-4.29	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.51	-5.84	49.67	54.00	-4.33	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.28	-5.81	49.47	54.00	-4.53	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.51	-6.06	48.45	54.00	-5.55	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.03	-5.81	50.22	54.00	-3.78	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.02	-6.06	48.96	54.00	-5.04	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.41	-5.81	49.60	54.00	-4.40	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.41	-5.84	49.57	54.00	-4.43	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.84	-5.81	50.03	54.00	-3.97	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.70	-5.84	47.86	54.00	-6.14	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.64	-5.81	50.83	54.00	-3.17	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.37	-6.06	50.31	54.00	-3.69	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.55	-5.81	50.74	54.00	-3.26	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.68	-6.06	47.62	54.00	-6.38	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

16 POS terminals:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.72	-3.65	53.07	74.00	-20.93	peak
4804	49.21	-3.65	45.56	54.00	-8.44	AVG
7206	61.20	-0.95	60.25	74.00	-13.75	peak
7206	40.26	-0.95	39.31	54.00	-14.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.74	-3.65	53.09	74.00	-20.91	peak
4804	48.41	-3.65	44.76	54.00	-9.24	AVG
7206	59.32	-0.95	58.37	74.00	-15.63	peak
7206	40.56	-0.95	39.61	54.00	-14.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.82	-3.54	56.28	74.00	-17.72	peak
4882.00	48.02	-3.54	44.48	54.00	-9.52	AVG
7323.00	56.04	-0.81	55.23	74.00	-18.77	peak
7323.00	41.82	-0.81	41.01	54.00	-12.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.67	-3.54	54.13	74.00	-19.87	peak
4882.00	48.94	-3.54	45.40	54.00	-8.60	AVG
7323.00	56.82	-0.81	56.01	74.00	-17.99	peak
7323.00	43.80	-0.81	42.99	54.00	-11.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	59.26	-3.43	55.83	74.00	-18.17	peak
4960	48.82	-3.44	45.38	54.00	-8.62	AVG
7440	58.77	-0.77	58.00	74.00	-16.00	peak
7440	41.84	-0.77	41.07	54.00	-12.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.49	-3.43	54.06	74.00	-19.94	peak
4960	49.45	-3.44	46.01	54.00	-7.99	AVG
7440	60.06	-0.77	59.29	74.00	-14.71	peak
7440	42.53	-0.77	41.76	54.00	-12.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.61	-5.81	50.80	54.00	-3.20	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.22	-5.84	49.38	54.00	-4.62	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.14	-5.81	50.33	54.00	-3.67	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.52	-5.84	49.68	54.00	-4.32	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.47	-5.81	49.66	54.00	-4.34	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.36	-6.06	47.30	54.00	-6.70	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.56	-5.81	51.75	54.00	-2.25	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.77	-6.06	48.71	54.00	-5.29	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.75	-5.81	50.94	54.00	-3.06	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.24	-5.84	49.40	54.00	-4.60	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.54	-5.81	49.73	54.00	-4.27	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.25	-5.84	49.41	54.00	-4.59	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	57.27	-5.81	51.46	54.00	-2.54	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.80	-6.06	50.74	54.00	-3.26	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.66	-5.81	49.85	54.00	-4.15	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.83	-6.06	48.77	54.00	-5.23	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

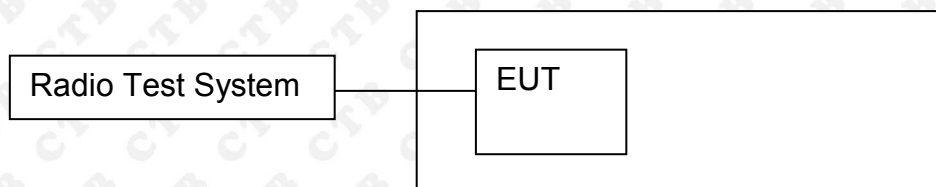


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold


GFSK/HCH/
Hop

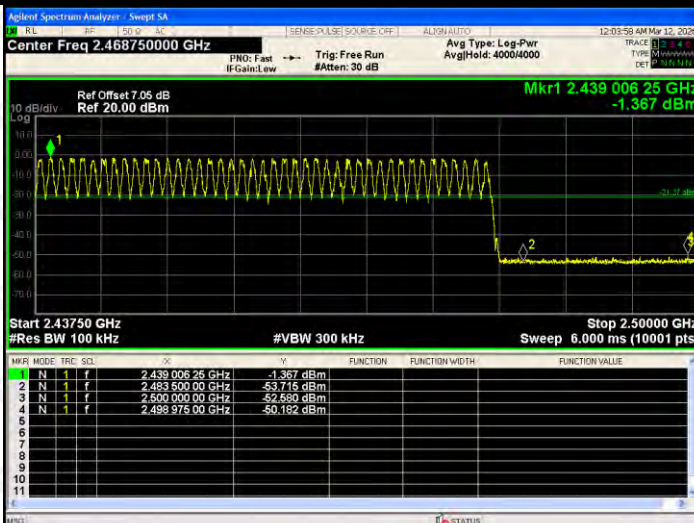

$\pi/4$ DQPSK/LCH/
No Hop

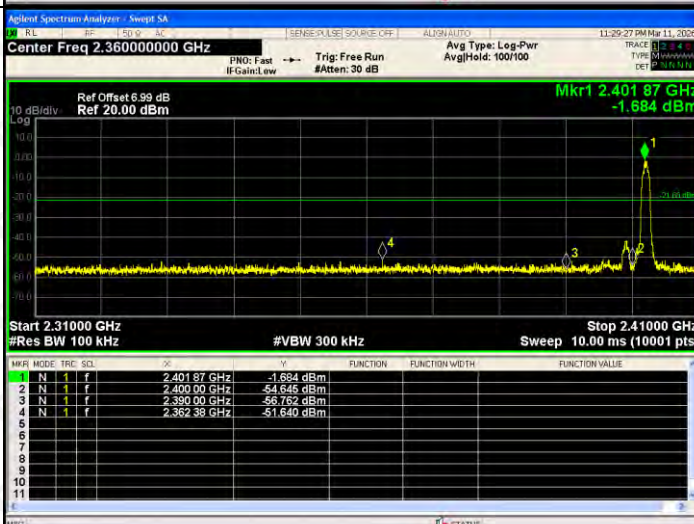

$\pi/4$ DQPSK/LCH/
Hop

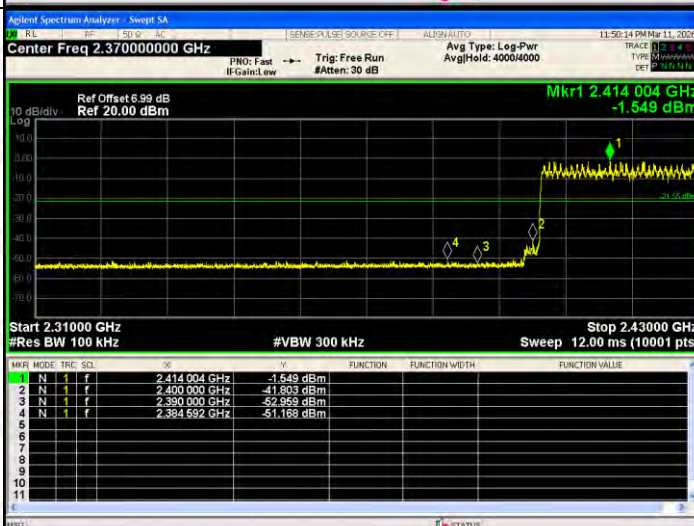


$\pi/4$ DQPSK/HCH/ No Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.489000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.479 874 4 GHz -2.467 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (10001 pts) <table><thead><tr><th>MFR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 874 4 GHz</td><td>-2.467 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 0 GHz</td><td>-52.712 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 0 GHz</td><td>-55.262 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.483 519 8 GHz</td><td>-51.979 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MFR	MODE	TRF	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 874 4 GHz	-2.467 dBm				2	N	1	f	2.483 500 0 GHz	-52.712 dBm				3	N	1	f	2.500 000 0 GHz	-55.262 dBm				4	N	1	f	2.483 519 8 GHz	-51.979 dBm			
MFR	MODE	TRF	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 874 4 GHz	-2.467 dBm																																									
2	N	1	f	2.483 500 0 GHz	-52.712 dBm																																									
3	N	1	f	2.500 000 0 GHz	-55.262 dBm																																									
4	N	1	f	2.483 519 8 GHz	-51.979 dBm																																									
$\pi/4$ DQPSK/HCH/ Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.468750000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.445 181 25 GHz -1.598 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.000 ms (10001 pts) <table><thead><tr><th>MFR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.445 181 25 GHz</td><td>-1.598 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 00 GHz</td><td>-53.675 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 00 GHz</td><td>-53.811 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.488 543 78 GHz</td><td>-50.677 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MFR	MODE	TRF	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.445 181 25 GHz	-1.598 dBm				2	N	1	f	2.483 500 00 GHz	-53.675 dBm				3	N	1	f	2.500 000 00 GHz	-53.811 dBm				4	N	1	f	2.488 543 78 GHz	-50.677 dBm			
MFR	MODE	TRF	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.445 181 25 GHz	-1.598 dBm																																									
2	N	1	f	2.483 500 00 GHz	-53.675 dBm																																									
3	N	1	f	2.500 000 00 GHz	-53.811 dBm																																									
4	N	1	f	2.488 543 78 GHz	-50.677 dBm																																									
8DPSK/LCH/No Hop	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.360000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.401 84 GHz -2.437 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.00 ms (10001 pts) <table><thead><tr><th>MFR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 84 GHz</td><td>-2.437 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-54.689 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-55.495 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.378 38 GHz</td><td>-52.248 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MFR	MODE	TRF	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 84 GHz	-2.437 dBm				2	N	1	f	2.400 00 GHz	-54.689 dBm				3	N	1	f	2.390 00 GHz	-55.495 dBm				4	N	1	f	2.378 38 GHz	-52.248 dBm			
MFR	MODE	TRF	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 84 GHz	-2.437 dBm																																									
2	N	1	f	2.400 00 GHz	-54.689 dBm																																									
3	N	1	f	2.390 00 GHz	-55.495 dBm																																									
4	N	1	f	2.378 38 GHz	-52.248 dBm																																									


8DPSK /LCH/Hop	<table><thead><tr><th>MFR MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.420 004 GHz</td><td></td><td></td><td>-1.610 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td></td><td></td><td>-42.697 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td></td><td></td><td>-53.560 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.352 828 GHz</td><td></td><td></td><td>-50.580 dBm</td></tr></tbody></table>	MFR MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.420 004 GHz			-1.610 dBm	2	N	1	f	2.400 000 GHz			-42.697 dBm	3	N	1	f	2.390 000 GHz			-53.560 dBm	4	N	1	f	2.352 828 GHz			-50.580 dBm
MFR MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.420 004 GHz			-1.610 dBm																																		
2	N	1	f	2.400 000 GHz			-42.697 dBm																																		
3	N	1	f	2.390 000 GHz			-53.560 dBm																																		
4	N	1	f	2.352 828 GHz			-50.580 dBm																																		
8DPSK /HCH/No Hop	<table><thead><tr><th>MFR MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 182 4 GHz</td><td></td><td></td><td>-2.016 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 0 GHz</td><td></td><td></td><td>-56.504 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 0 GHz</td><td></td><td></td><td>-56.272 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.496 427 2 GHz</td><td></td><td></td><td>-52.438 dBm</td></tr></tbody></table>	MFR MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 182 4 GHz			-2.016 dBm	2	N	1	f	2.483 500 0 GHz			-56.504 dBm	3	N	1	f	2.500 000 0 GHz			-56.272 dBm	4	N	1	f	2.496 427 2 GHz			-52.438 dBm
MFR MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.480 182 4 GHz			-2.016 dBm																																		
2	N	1	f	2.483 500 0 GHz			-56.504 dBm																																		
3	N	1	f	2.500 000 0 GHz			-56.272 dBm																																		
4	N	1	f	2.496 427 2 GHz			-52.438 dBm																																		
8DPSK /HCH/Hop	<table><thead><tr><th>MFR MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.441 000 00 GHz</td><td></td><td></td><td>-1.509 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.463 500 00 GHz</td><td></td><td></td><td>-53.379 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 00 GHz</td><td></td><td></td><td>-53.223 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.491 862 50 GHz</td><td></td><td></td><td>-50.989 dBm</td></tr></tbody></table>	MFR MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 000 00 GHz			-1.509 dBm	2	N	1	f	2.463 500 00 GHz			-53.379 dBm	3	N	1	f	2.500 000 00 GHz			-53.223 dBm	4	N	1	f	2.491 862 50 GHz			-50.989 dBm
MFR MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.441 000 00 GHz			-1.509 dBm																																		
2	N	1	f	2.463 500 00 GHz			-53.379 dBm																																		
3	N	1	f	2.500 000 00 GHz			-53.223 dBm																																		
4	N	1	f	2.491 862 50 GHz			-50.989 dBm																																		

RF Conducted Spurious Emissions Graphs


GFSK/LCH



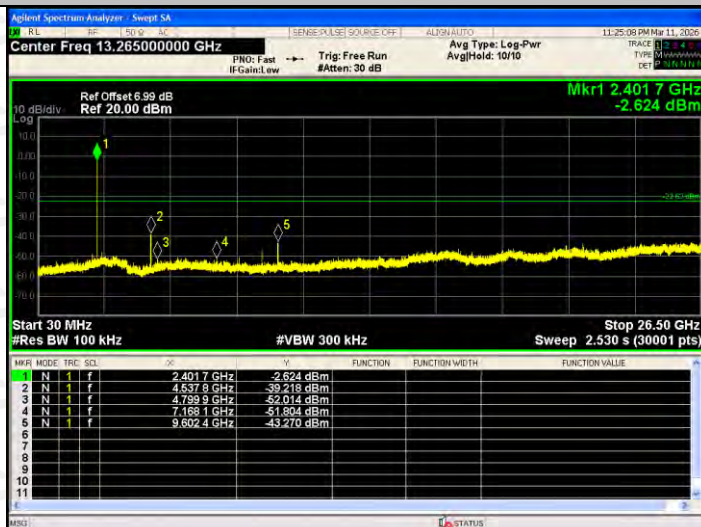


GFSK/MCH

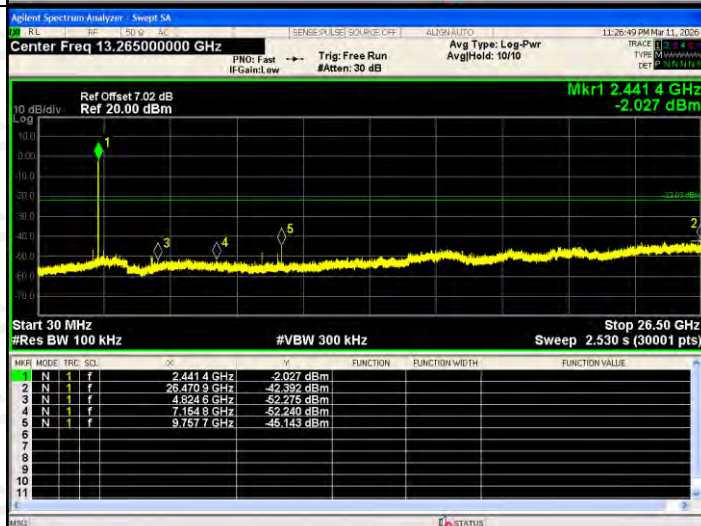


GFSK/HCH

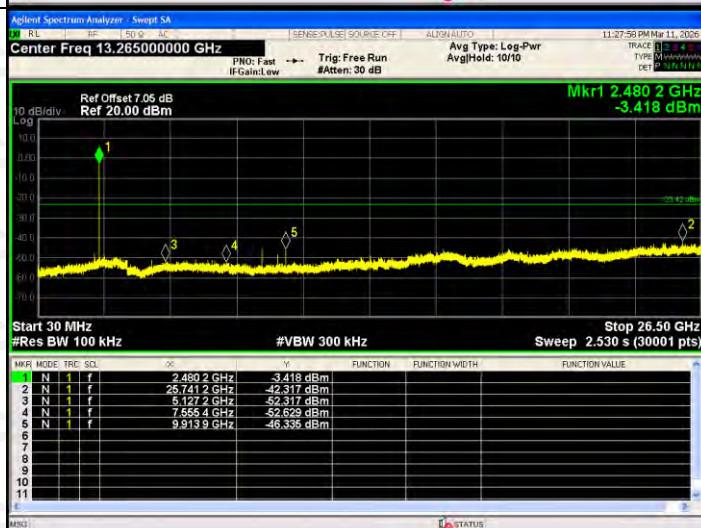


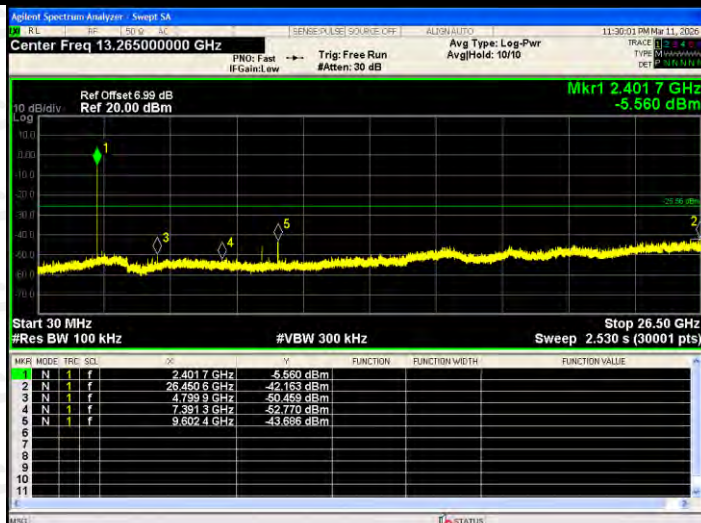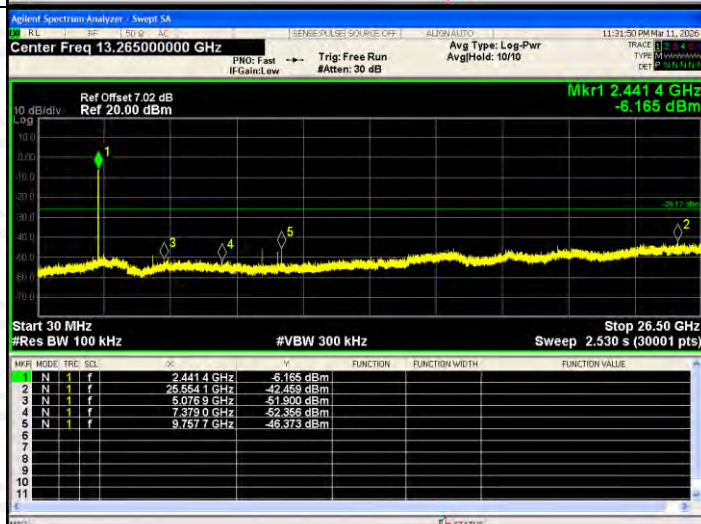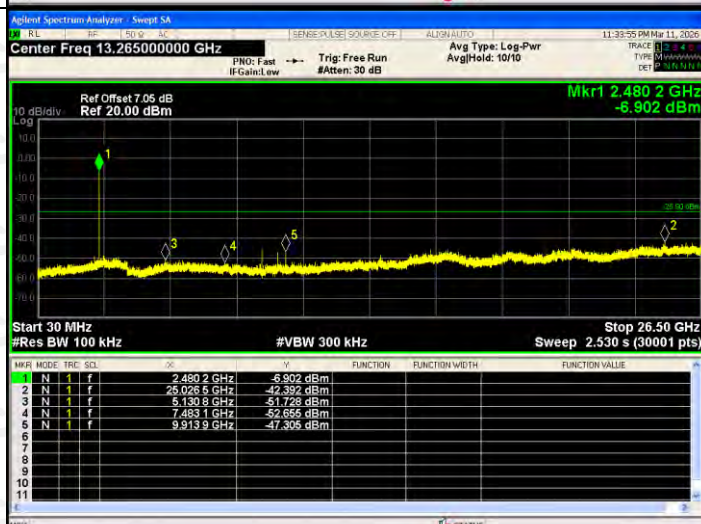$\pi/4$ DQPSK /LCH

 $\pi/4$ DQPSK/MCH

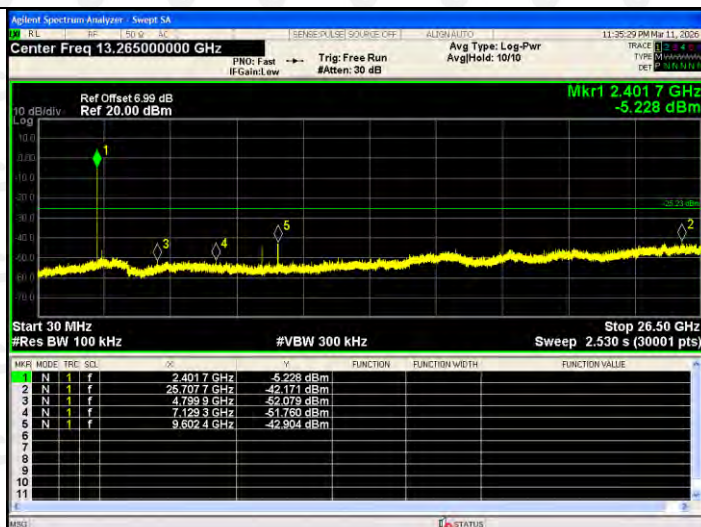 $\pi/4$ DQPSK/HCH


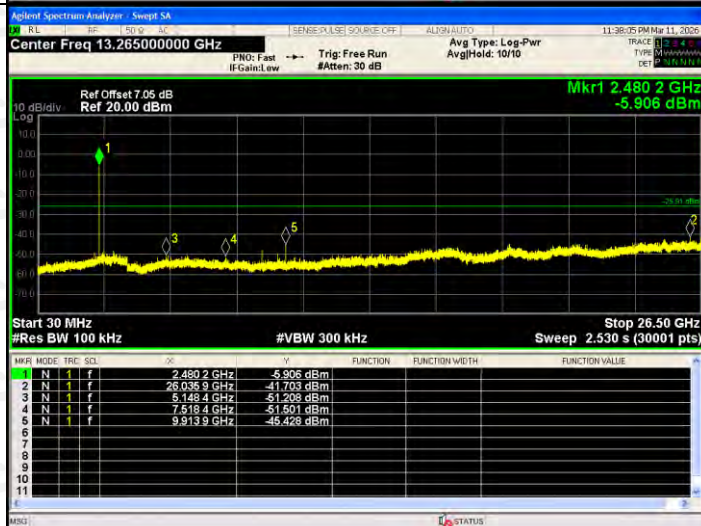
8DPSK /LCH

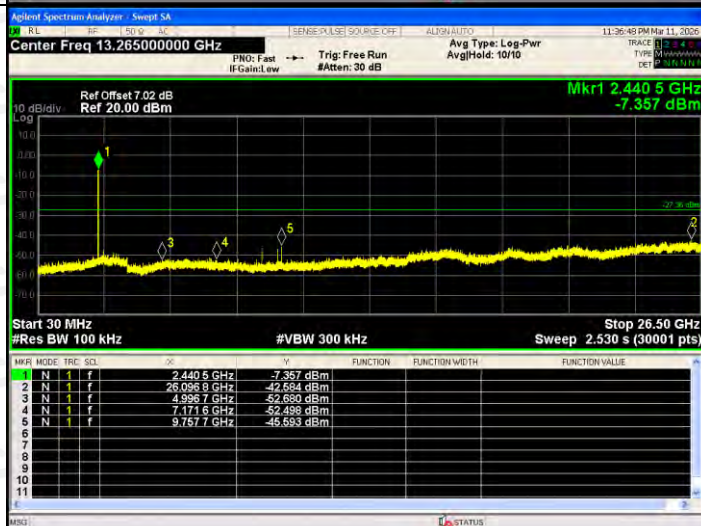

8DPSK /MCH




8DPSK /HCH



9. CONDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

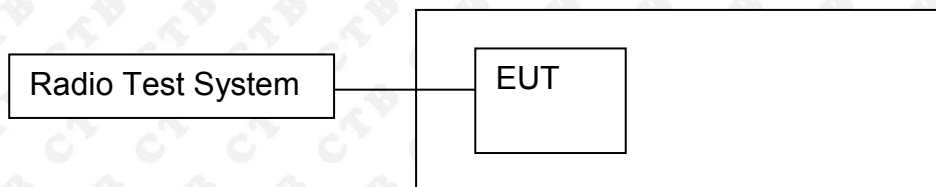

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	-1.587	20.97	PASS
	MCH	-1.416	20.97	PASS
	HCH	-1.804	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	-0.63	20.97	PASS
	MCH	-0.554	20.97	PASS
	HCH	-0.9	20.97	PASS
EDR mode (8DPSK)	LCH	-0.243	20.97	PASS
	MCH	-0.099	20.97	PASS
	HCH	-0.5	20.97	PASS

Test Graph:

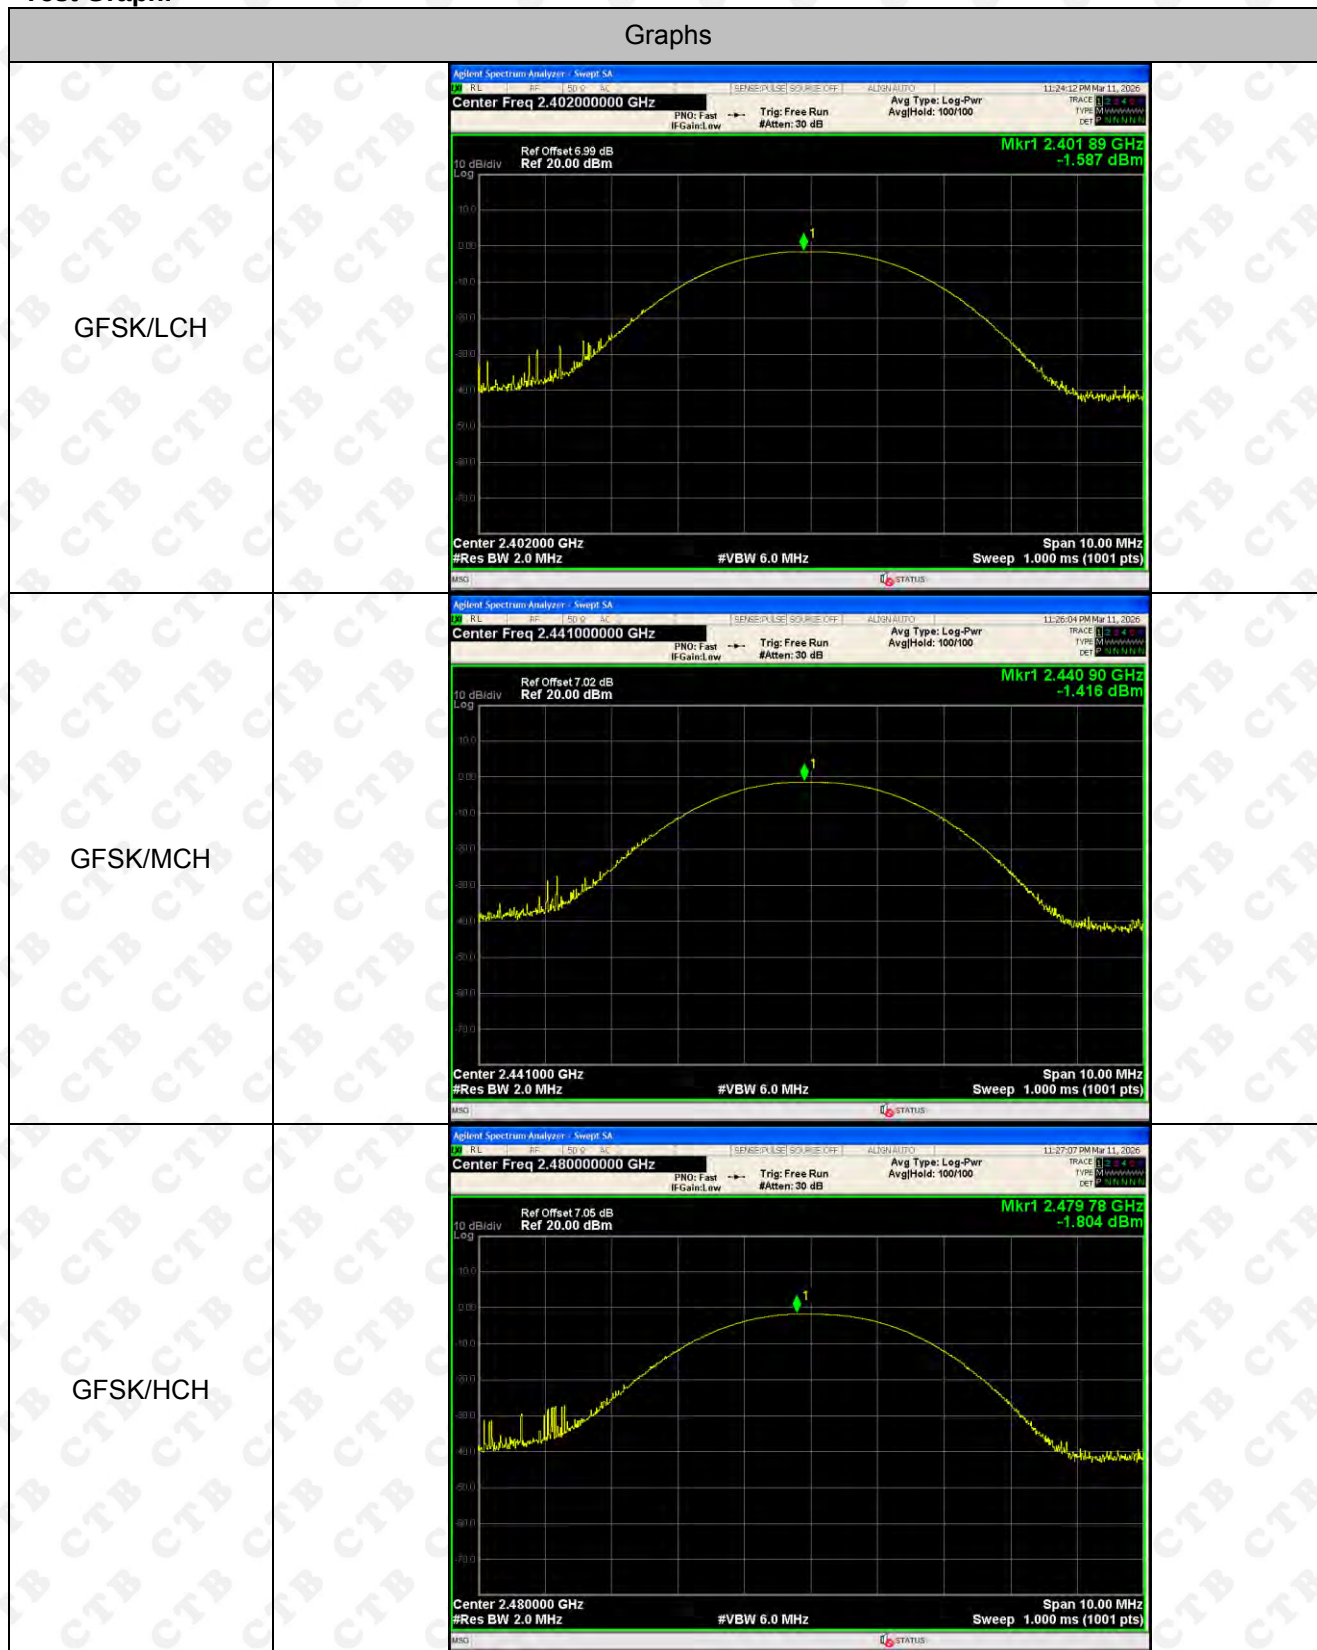


$\pi/4$ DQPSK/LCH	
$\pi/4$ DQPSK/MCH	
$\pi/4$ DQPSK/HCH	

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.401 99 GHz -0.243 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.02 dB Ref 20.00 dBm Mkr1 2.440 98 GHz -0.099 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.479 97 GHz -0.500 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

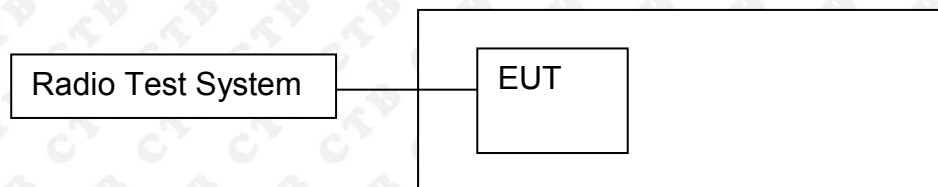

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result


Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.863	PASS
	Mid channel	0.857	PASS
	High channel	0.878	PASS
$\pi/4$ DQPSK	Low channel	1.256	PASS
	Mid channel	1.279	PASS
	High channel	1.256	PASS
8DPSK	Low channel	1.29	PASS
	Mid channel	1.337	PASS
	High channel	1.297	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.


Test Graph:

GFSK Low channel	
GFSK Mid channel	
GFSK High channel	

$\pi/4$ -DQPSK
Low channel

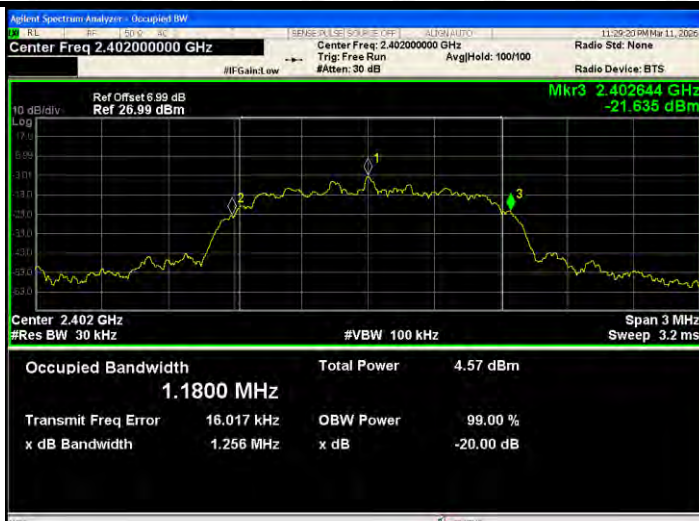


$\pi/4$ -DQPSK
Mid channel

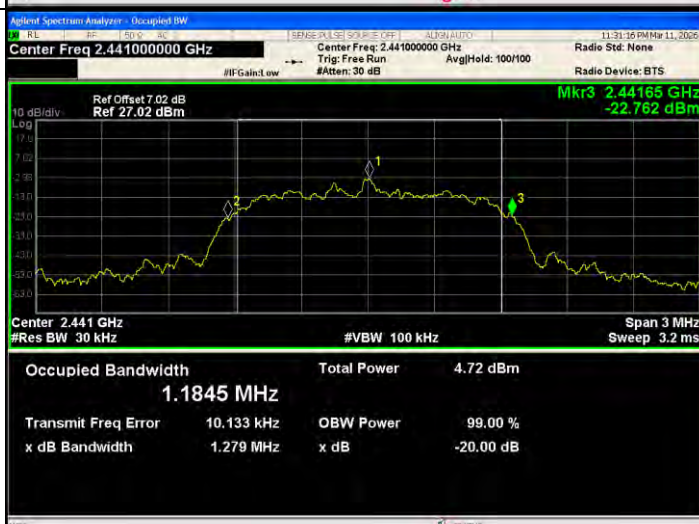


$\pi/4$ -DQPSK
High channel

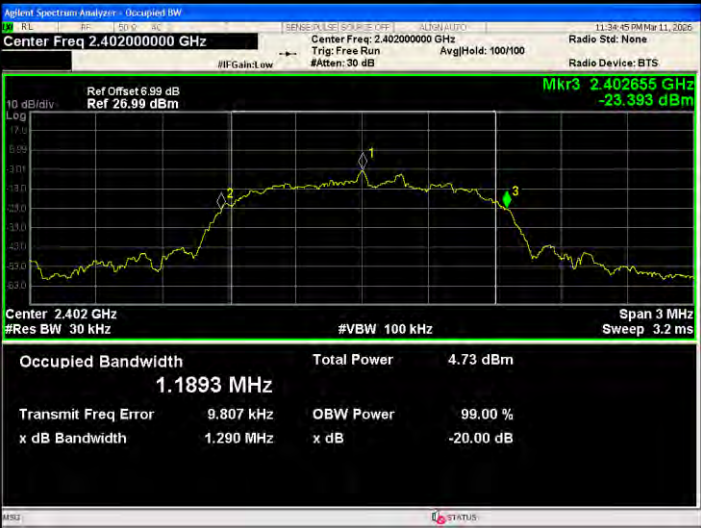

8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

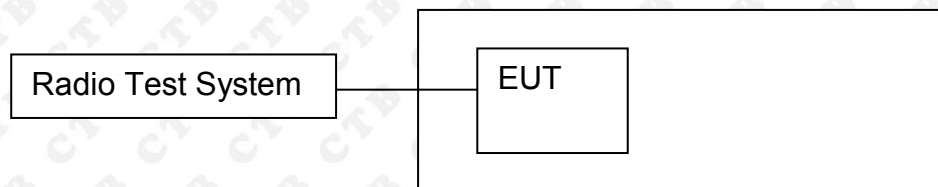

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 20kHz. VBW = 60kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.002	0.575	PASS
GFSK	MCH	1.000	0.571	PASS
GFSK	HCH	1.000	0.585	PASS
$\pi/4$ DQPSK	LCH	1.000	0.837	PASS
$\pi/4$ DQPSK	MCH	1.002	0.853	PASS
$\pi/4$ DQPSK	HCH	1.002	0.837	PASS
8DPSK	LCH	1.000	0.860	PASS
8DPSK	MCH	1.002	0.891	PASS
8DPSK	HCH	1.004	0.865	PASS

Test Graph



$\pi/4$ DQPSK/LCH

 $\pi/4$ DQPSK/MCH

 $\pi/4$ DQPSK/HCH


8DPSK/LCH



8DPSK /MCH




8DPSK /HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

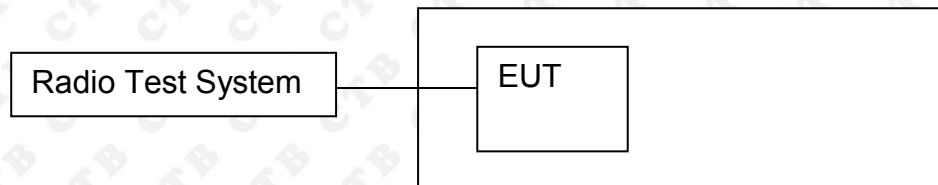

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Test Graph

Graphs

GFSK/Hop

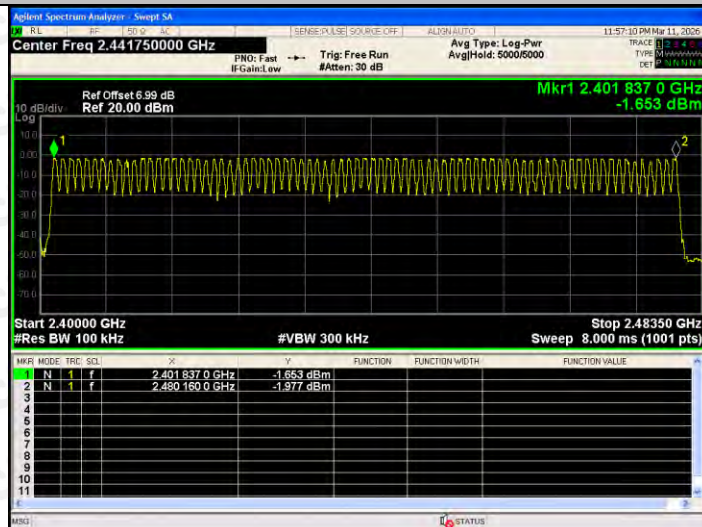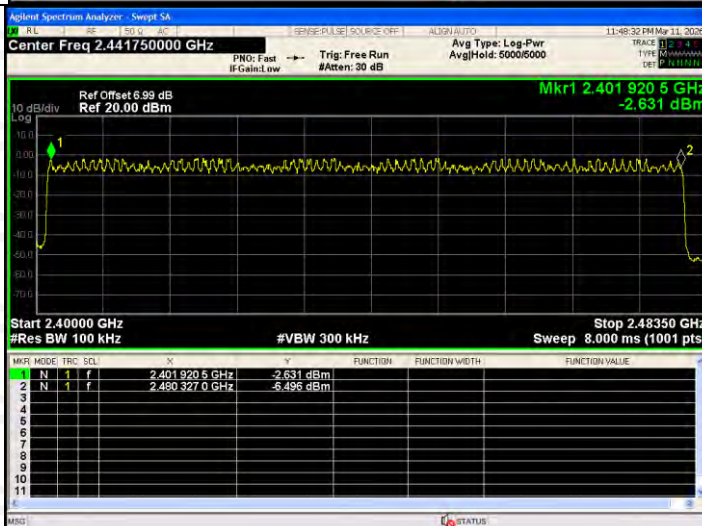

 $\pi/4$ DQPSK/Hop


8DPSK/Hop

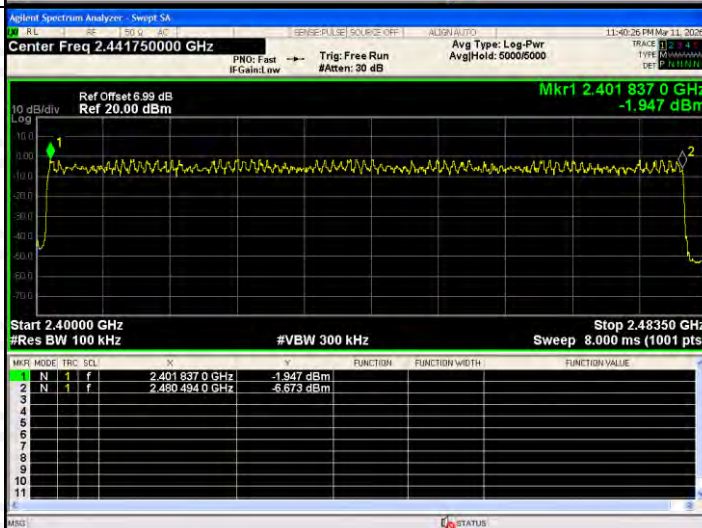

13. DWELL TIME

13.1 Block Diagram Of Test Setup

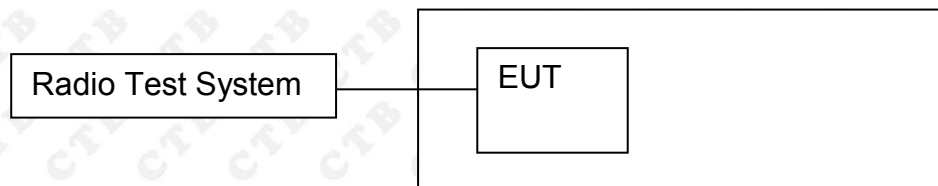

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.382	122.24	400	PASS
	DH1	MCH	0.382	122.24	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.643	262.88	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.893	308.587	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.

Test Graph

Graphs


GFSK_DH1/LCH




GFSK_DH1/MCH



GFSK_DH1/HCH

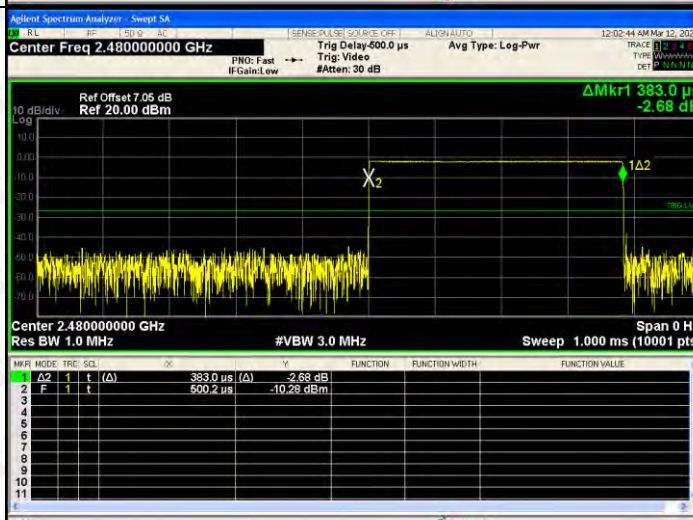


GFSK_DH3/LCH

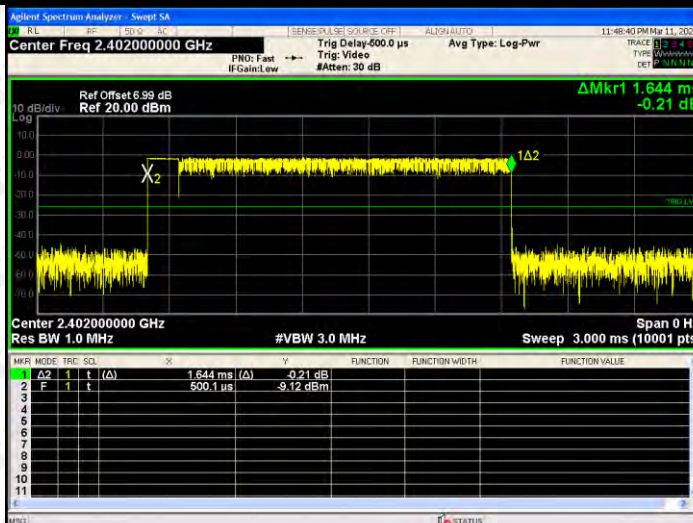


GFSK_DH3/MCH




GFSK_DH3/HCH

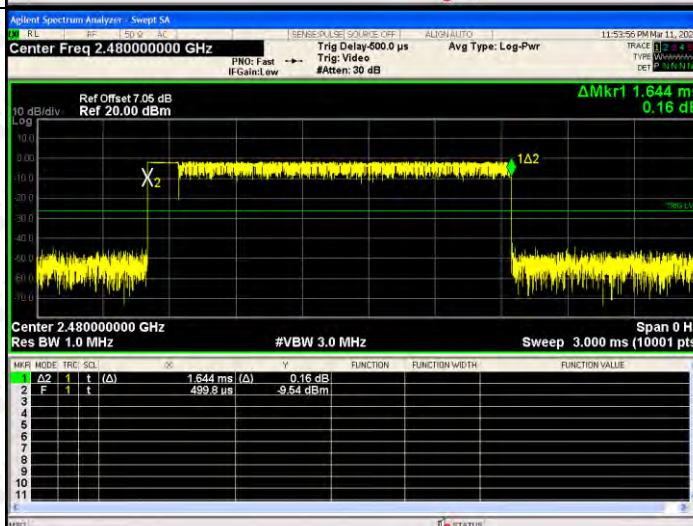


GFSK_DH5/LCH

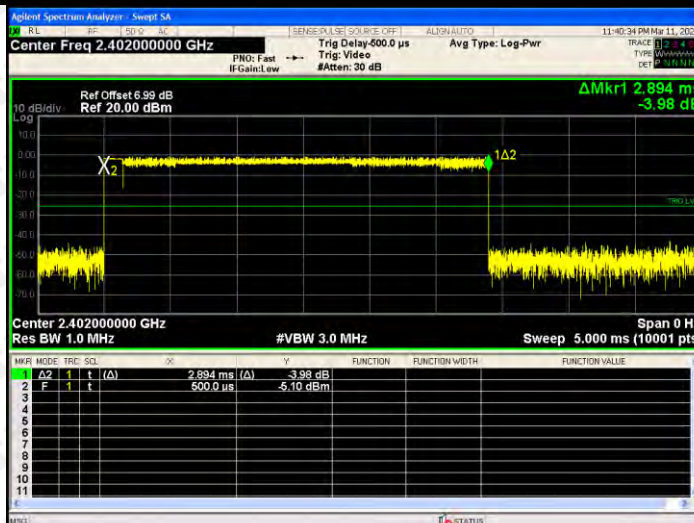

GFSK_DH5/MCH

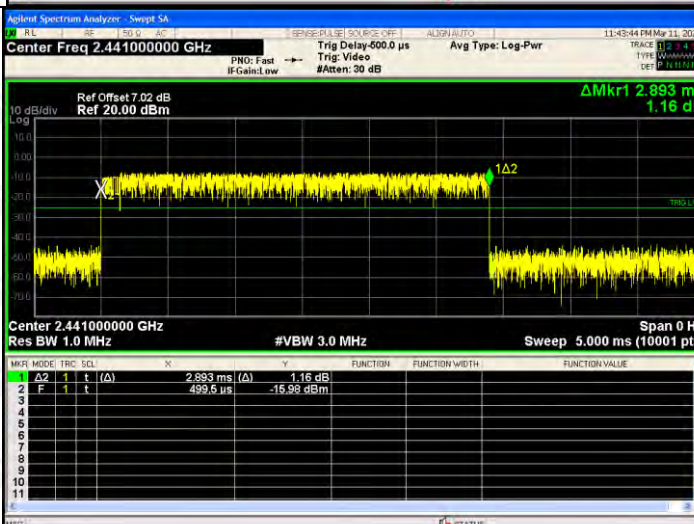

GFSK_DH5/HCH

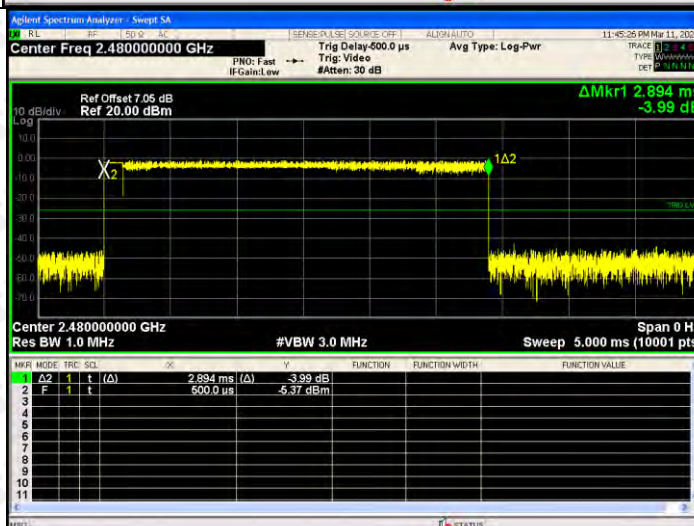

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

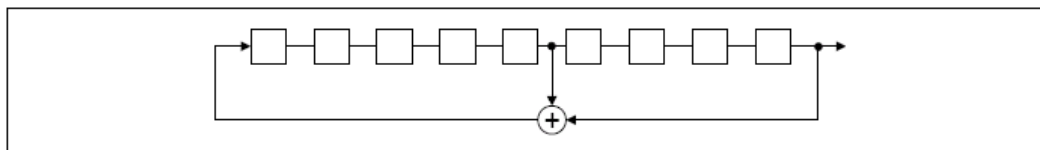

An example of Pseudorandom Frequency Hopping Sequence as follow:

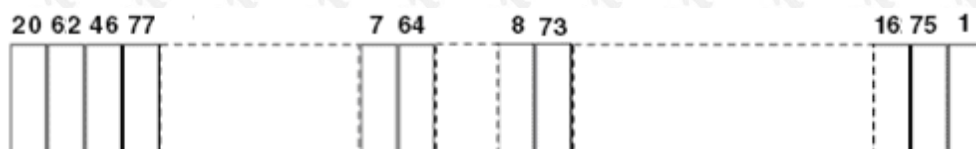

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is FPC antenna. The best case gain of the antenna is 2.8dBi.

16. EUT TEST SETUP PHOTOGRAPHS

4 POS terminals:
Radiated Emissions


Below 1G



Above 1G



Conducted emission

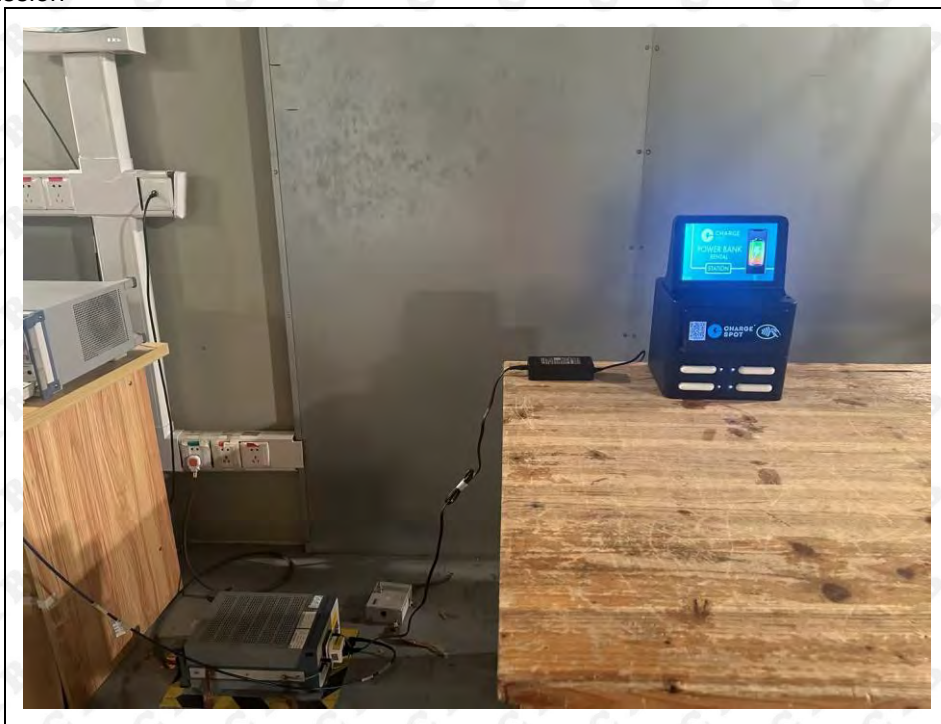

8 POS terminals:
Radiated Emissions


Below 1G



Above 1G



Conducted emission

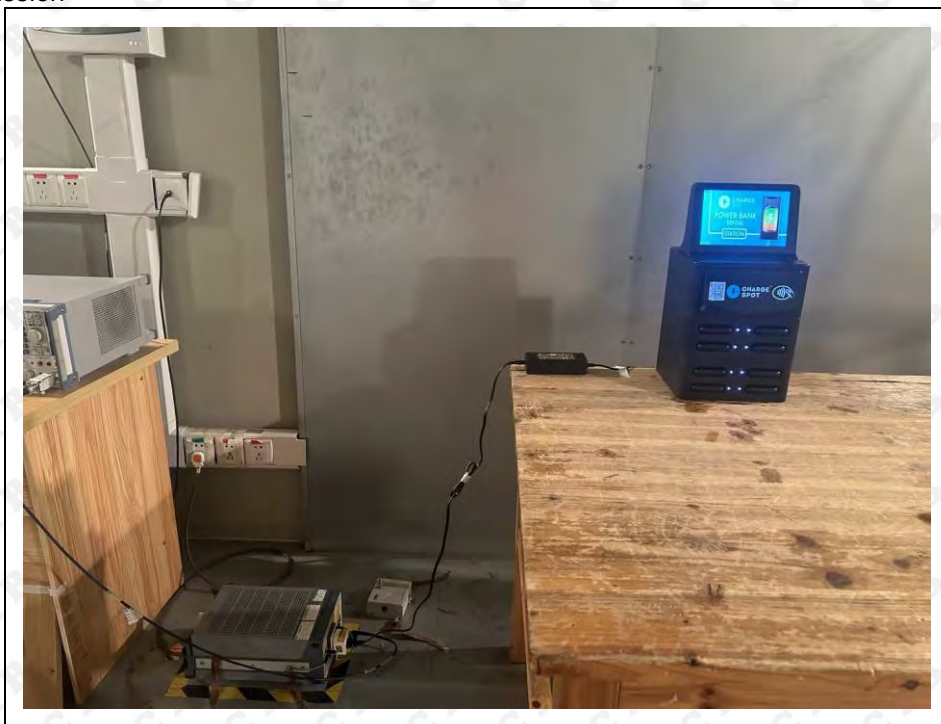

12 POS terminals:
Radiated Emissions


Below 1G



Above 1G



Conducted emission

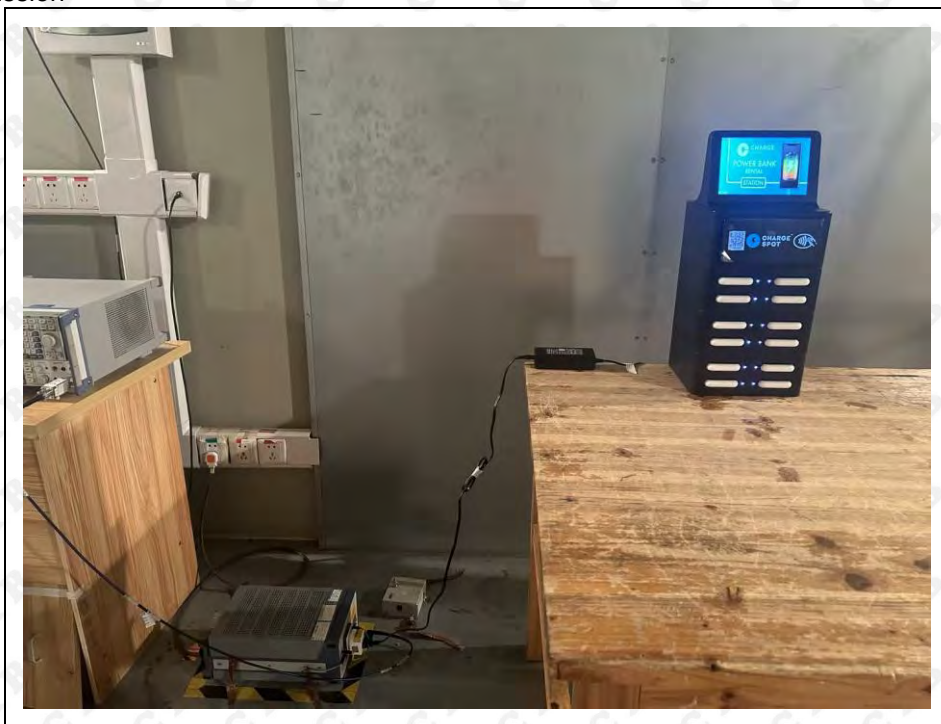

16 POS terminals:
Radiated Emissions

Below 1G



Above 1G



Conducted emission



***** END OF REPORT *****