



TEST REPORT

Test item description: Advertising Player-TAP20
FCC ID: 2BVIG-CSAP07005
Trademark(s): N/A
Model/Type reference: CSAP07005
Applicant's name: Inforich (Guangzhou) Technology Company Limited
Address: Room 01, Room 2601, 439 Zhongshan Avenue Central, Tianhe District, 510000
Guangzhou, Guangdong Province, China
Manufacturer: Inforich (Guangzhou) Technology Company Limited
Address: Room 01, Room 2601, 439 Zhongshan Avenue Central, Tianhe District, 510000
Guangzhou, Guangdong Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District,
Shenzhen, Guangdong, China
Sample Received Date: Nov. 20, 2025
Sample tested Date: Nov. 20, 2025 to Mar. 13, 2026
Issue Date: Mar. 13, 2026
Report No.: CTB25112005007RF02
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Bin Mei

Kai Chen

Martin Feng

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	6
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	49
8.1 Block Diagram Of Test Setup	49
8.2 Limit	49
8.3 Test procedure	49
8.4 Test Result	50
9. CONDUCTED OUTPUT POWER	62
9.1 Block Diagram Of Test Setup	62
9.2 Limit	62
9.3 Test procedure	62
9.4 Test Result	62
10. 6DB OCCUPIED BANDWIDTH	63
10.1 Block Diagram Of Test Setup	63
10.2 Limit	63
10.3 Test procedure	63
10.4 Test Result	64
11. POWER SPECTRAL DENSITY	71
11.1 Block Diagram Of Test Setup	71
11.2 Limit	71
11.3 Test procedure	71
11.4 Test Result	72
12. ANTENNA REQUIREMENT	79
13. EUT TEST SETUP PHOTOGRAPHS	80
(NOTE: N/A MEANS NOT APPLICABLE)	

1. VERSION

Report No.	Issue Date	Description	Approved
CTB25112005007RF02	Mar. 13, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density, Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9kHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
Humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	CSAP07005
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n/ax
Hardware Version:	V1.1
Software Version:	V1.00
Operation Frequency:	WiFi: IEEE 802.11b/g/n/ax20: 2412-2462MHz/ 11 channel IEEE 802.11n/ax40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 16.379dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM, OFDMA
Antenna installation:	WiFi (2.4G): FPC antenna
Antenna Gain:	WiFi (2.4G): -0.81dBi
Ratings:	Input Voltage: 100-120V, 50/60Hz Rated Power: 255W Each charging slot output: 5V=2A Charging slots total output: 5V=32A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n/ax40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	288.9M
802.11n40	600M
802.11/ax20	1147.069M
802.11/ax40	2294.118M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinxhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22

19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1


Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/9/19	2026/9/18
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1

7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/5/24	2026/5/23
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/5/24	2026/5/23
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/5/24	2026/5/23
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/5/24	2026/5/23
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

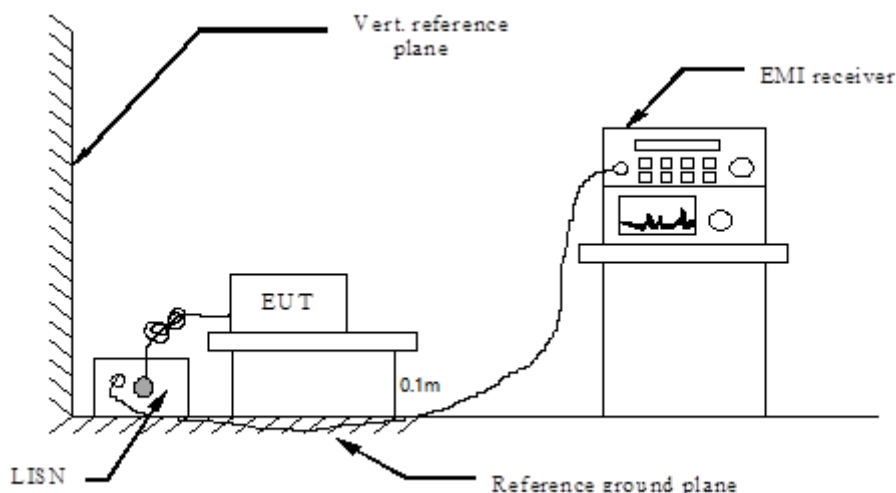

6.2 Limit

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.1m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.

6.4 Test Result

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

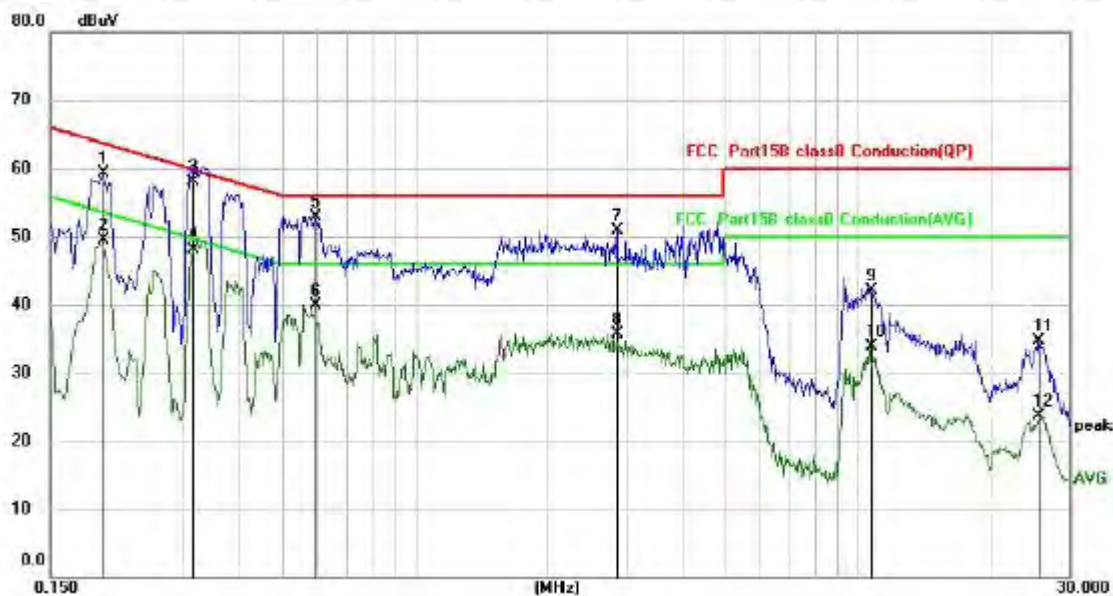


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1980	49.20	10.08	59.28	63.69	-4.41	QP
2		0.1980	39.39	10.08	49.47	53.69	-4.22	AVG
3		0.3140	47.98	10.08	58.06	59.86	-1.80	QP
4	*	0.3140	38.03	10.08	48.11	49.86	-1.75	AVG
5		0.5939	42.87	10.10	52.97	56.00	-3.03	QP
6		0.5939	29.81	10.10	39.91	46.00	-6.09	AVG
7		2.8660	40.62	10.20	50.82	56.00	-5.18	QP
8		2.8660	25.53	10.20	35.73	46.00	-10.27	AVG
9		10.7179	31.58	10.48	42.06	60.00	-17.94	QP
10		10.7179	23.47	10.48	33.95	50.00	-16.05	AVG
11		25.5138	23.57	11.20	34.77	60.00	-25.23	QP
12		25.5138	12.55	11.20	23.75	50.00	-26.25	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

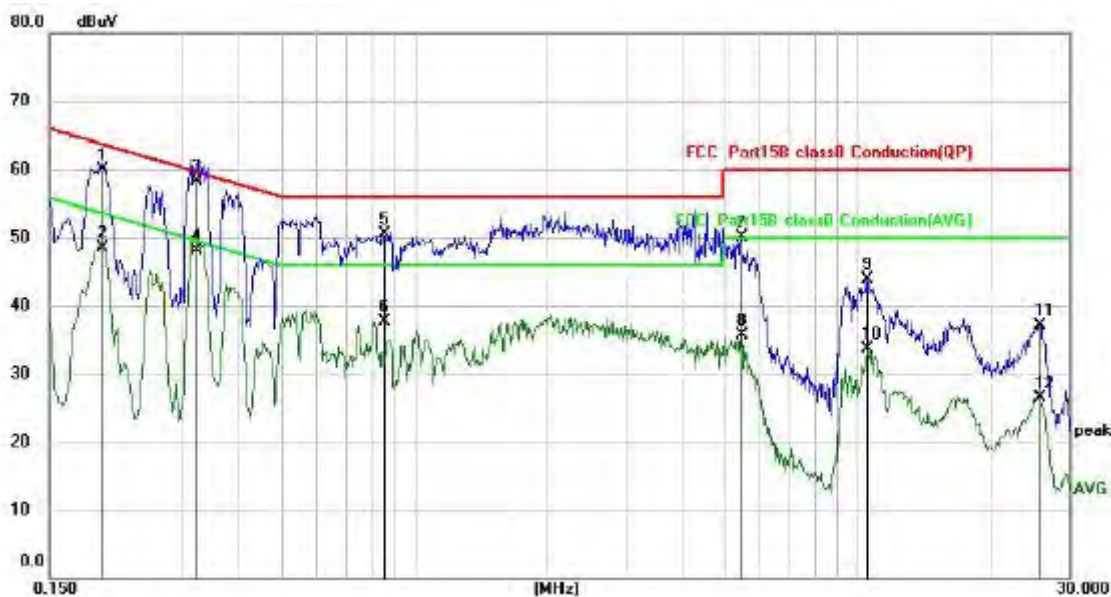

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.1980	49.73	10.08	59.81	63.69	-3.88	QP
2	0.1980	38.41	10.08	48.49	53.69	-5.20	AVG
3 *	0.3220	48.22	10.08	58.30	59.66	-1.36	QP
4	0.3220	38.12	10.08	48.20	49.66	-1.46	AVG
5	0.8500	40.34	10.12	50.46	56.00	-5.54	QP
6	0.8500	27.64	10.12	37.76	46.00	-8.24	AVG
7	5.4579	39.76	10.30	50.06	60.00	-9.94	QP
8	5.4579	25.39	10.30	35.69	50.00	-14.31	AVG
9	10.4539	33.39	10.47	43.86	60.00	-16.14	QP
10	10.4539	23.21	10.47	33.68	50.00	-16.32	AVG
11	25.6100	25.97	11.20	37.17	60.00	-22.83	QP
12	25.6100	15.25	11.20	26.45	50.00	-23.55	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

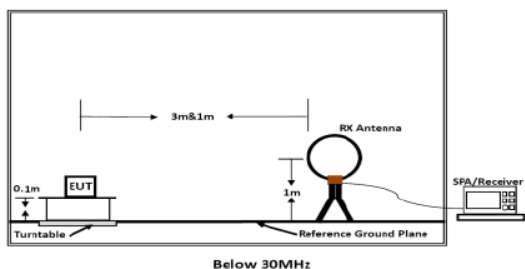


Figure 1. Below 30MHz

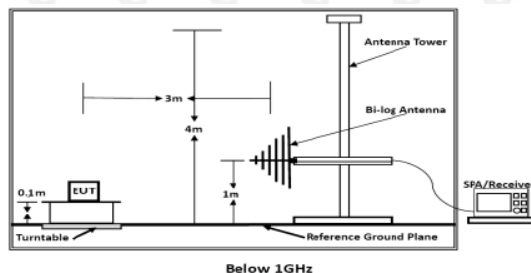


Figure 2. 30MHz to 1GHz

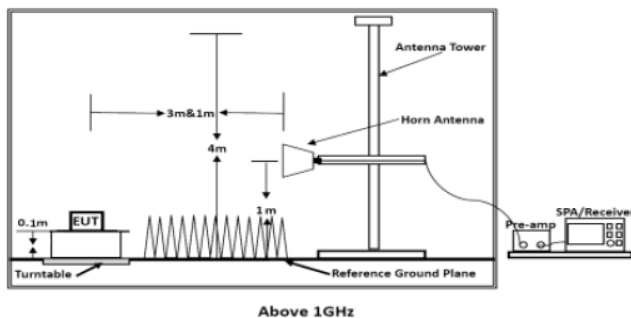


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		108.8376	39.83	-6.95	32.88	43.50	-10.62	QP
2		127.4408	39.97	-6.00	33.97	43.50	-9.53	QP
3	*	223.3414	43.31	-5.66	37.65	46.00	-8.35	QP
4		298.2681	35.30	-2.60	32.70	46.00	-13.30	QP
5		446.4140	34.58	-0.05	34.53	46.00	-11.47	QP
6		892.2908	27.02	9.44	36.46	46.00	-9.54	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	47.3253	34.84	-6.29	28.55	40.00	-11.45	QP
2		92.1386	36.63	-7.89	28.74	43.50	-14.76	QP
3		125.2258	33.97	-5.95	28.02	43.50	-15.48	QP
4		223.3413	36.30	-5.66	30.64	46.00	-15.36	QP
5		298.2681	35.50	-2.60	32.90	46.00	-13.10	QP
6		446.4139	32.47	-0.05	32.42	46.00	-13.58	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

- The margin of 9K-30MHz measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
- All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
- After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.19	-3.64	61.55	74	-12.45	peak
4824	49.24	-3.64	45.60	54	-8.40	AVG
7236	57.56	-0.95	56.61	74	-17.39	peak
7236	46.58	-0.95	45.63	54	-8.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.15	-3.64	61.51	74	-12.49	peak
4824	46.85	-3.64	43.21	54	-10.79	AVG
7236	57.31	-0.95	56.36	74	-17.64	peak
7236	43.77	-0.95	42.82	54	-11.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.07	-3.51	61.56	74	-12.44	peak
4874	50.61	-3.51	47.10	54	-6.90	AVG
7311	57.71	-0.82	56.89	74	-17.11	peak
7311	44.15	-0.82	43.33	54	-10.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.11	-3.51	61.60	74	-12.40	peak
4874	48.66	-3.51	45.15	54	-8.85	AVG
7311	58.69	-0.82	57.87	74	-16.13	peak
7311	43.03	-0.82	42.21	54	-11.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462
Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.25	-3.43	58.82	74	-15.18	peak
4924	47.29	-3.43	43.86	54	-10.14	AVG
7386	58.25	-0.75	57.50	74	-16.50	peak
7386	43.55	-0.75	42.80	54	-11.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.09	-3.43	59.66	74	-14.34	peak
4924	46.43	-3.43	43.00	54	-11.00	AVG
7386	56.66	-0.75	55.91	74	-18.09	peak
7386	43.23	-0.75	42.48	54	-11.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.68	-3.64	60.04	74	-13.96	peak
4824	48.67	-3.64	45.03	54	-8.97	AVG
7236	57.99	-0.95	57.04	74	-16.96	peak
7236	46.64	-0.95	45.69	54	-8.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.16	-3.64	58.52	74	-15.48	peak
4824	46.39	-3.64	42.75	54	-11.25	AVG
7236	58.99	-0.95	58.04	74	-15.96	peak
7236	44.71	-0.95	43.76	54	-10.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.84	-3.51	61.33	74	-12.67	peak
4874	47.75	-3.51	44.24	54	-9.76	AVG
7311	59.08	-0.82	58.26	74	-15.74	peak
7311	43.86	-0.82	43.04	54	-10.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.78	-3.51	60.27	74	-13.73	peak
4874	46.89	-3.51	43.38	54	-10.62	AVG
7311	57.08	-0.82	56.26	74	-17.74	peak
7311	41.73	-0.82	40.91	54	-13.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.97	-3.43	59.54	74	-14.46	peak
4924	48.74	-3.43	45.31	54	-8.69	AVG
7386	58.18	-0.75	57.43	74	-16.57	peak
7386	44.19	-0.75	43.44	54	-10.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.88	-3.43	59.45	74	-14.55	peak
4924	47.71	-3.43	44.28	54	-9.72	AVG
7386	57.20	-0.75	56.45	74	-17.55	peak
7386	41.88	-0.75	41.13	54	-12.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz。

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.52	-3.64	58.88	74	-15.12	peak
4824	47.82	-3.64	44.18	54	-9.82	AVG
7236	59.26	-0.95	58.31	74	-15.69	peak
7236	42.79	-0.95	41.84	54	-12.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.50	-3.64	61.86	74	-12.14	peak
4824	48.73	-3.64	45.09	54	-8.91	AVG
7236	58.60	-0.95	57.65	74	-16.35	peak
7236	43.28	-0.95	42.33	54	-11.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.14	-3.51	59.63	74.00	-14.37	peak
4874.00	48.81	-3.51	45.30	54.00	-8.70	AVG
7311.00	57.44	-0.82	56.62	74.00	-17.38	peak
7311.00	44.67	-0.82	43.85	54.00	-10.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.45	-3.51	58.94	74.00	-15.06	peak
4874.00	48.33	-3.51	44.82	54.00	-9.18	AVG
7311.00	57.03	-0.82	56.21	74.00	-17.79	peak
7311.00	43.18	-0.82	42.36	54.00	-11.64	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.72	-3.43	60.29	74	-13.71	peak
4924	45.56	-3.43	42.13	54	-11.87	AVG
7386	58.15	-0.75	57.40	74	-16.60	peak
7386	42.67	-0.75	41.92	54	-12.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.30	-3.43	61.87	74	-12.13	peak
4924	47.26	-3.43	43.83	54	-10.17	AVG
7386	57.93	-0.75	57.18	74	-16.82	peak
7386	43.62	-0.75	42.87	54	-11.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.74	-3.63	62.11	74	-11.89	peak
4844	49.41	-3.63	45.78	54	-8.22	AVG
7266	59.45	-0.94	58.51	74	-15.49	peak
7266	44.71	-0.94	43.77	54	-10.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.08	-3.63	61.45	74	-12.55	peak
4844	47.84	-3.63	44.21	54	-9.79	AVG
7266	59.62	-0.94	58.68	74	-15.32	peak
7266	44.11	-0.94	43.17	54	-10.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.67	-3.51	61.16	74	-12.84	peak
4874	49.36	-3.51	45.85	54	-8.15	AVG
7311	60.25	-0.82	59.43	74	-14.57	peak
7311	45.01	-0.82	44.19	54	-9.81	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.30	-3.51	58.79	74	-15.21	peak
4874	46.43	-3.51	42.92	54	-11.08	AVG
7311	56.67	-0.82	55.85	74	-18.15	peak
7311	43.35	-0.82	42.53	54	-11.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.29	-3.43	60.86	74	-13.14	peak
4904	49.55	-3.43	46.12	54	-7.88	AVG
7356	55.93	-0.75	55.18	74	-18.82	peak
7356	43.23	-0.75	42.48	54	-11.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	61.90	-3.43	58.47	74	-15.53	peak
4904	45.89	-3.43	42.46	54	-11.54	AVG
7356	57.69	-0.75	56.94	74	-17.06	peak
7356	43.96	-0.75	43.21	54	-10.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11ax/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.74	-3.64	61.10	74	-12.90	peak
4824	46.70	-3.64	43.06	54	-10.94	AVG
7236	57.37	-0.95	56.42	74	-17.58	peak
7236	45.26	-0.95	44.31	54	-9.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.54	-3.64	61.90	74	-12.10	peak
4824	46.76	-3.64	43.12	54	-10.88	AVG
7236	59.46	-0.95	58.51	74	-15.49	peak
7236	42.05	-0.95	41.10	54	-12.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11ax/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.41	-3.51	60.90	74.00	-13.10	peak
4874.00	48.48	-3.51	44.97	54.00	-9.03	AVG
7311.00	58.60	-0.82	57.78	74.00	-16.22	peak
7311.00	44.87	-0.82	44.05	54.00	-9.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.42	-3.51	58.91	74.00	-15.09	peak
4874.00	46.85	-3.51	43.34	54.00	-10.66	AVG
7311.00	57.35	-0.82	56.53	74.00	-17.47	peak
7311.00	41.46	-0.82	40.64	54.00	-13.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11ax/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.39	-3.43	57.96	74	-16.04	peak
4924	45.74	-3.43	42.31	54	-11.69	AVG
7386	56.96	-0.75	56.21	74	-17.79	peak
7386	43.55	-0.75	42.80	54	-11.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.41	-3.43	60.98	74	-13.02	peak
4924	45.63	-3.43	42.20	54	-11.80	AVG
7386	58.43	-0.75	57.68	74	-16.32	peak
7386	42.26	-0.75	41.51	54	-12.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11ax/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.32	-3.63	60.69	74	-13.31	peak
4844	49.62	-3.63	45.99	54	-8.01	AVG
7266	58.83	-0.94	57.89	74	-16.11	peak
7266	44.45	-0.94	43.51	54	-10.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.70	-3.63	62.07	74	-11.93	peak
4844	48.10	-3.63	44.47	54	-9.53	AVG
7266	57.95	-0.94	57.01	74	-16.99	peak
7266	45.81	-0.94	44.87	54	-9.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11ax/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.25	-3.51	61.74	74	-12.26	peak
4874	47.82	-3.51	44.31	54	-9.69	AVG
7311	59.02	-0.82	58.20	74	-15.80	peak
7311	45.34	-0.82	44.52	54	-9.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.30	-3.51	58.79	74	-15.21	peak
4874	46.44	-3.51	42.93	54	-11.07	AVG
7311	56.67	-0.82	55.85	74	-18.15	peak
7311	43.30	-0.82	42.48	54	-11.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11ax/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.19	-3.43	59.76	74	-14.24	peak
4904	48.82	-3.43	45.39	54	-8.61	AVG
7356	56.27	-0.75	55.52	74	-18.48	peak
7356	41.88	-0.75	41.13	54	-12.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.13	-3.43	58.70	74	-15.30	peak
4904	47.92	-3.43	44.49	54	-9.51	AVG
7356	56.84	-0.75	56.09	74	-17.91	peak
7356	42.03	-0.75	41.28	54	-12.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.10	-5.81	52.29	74	-21.71	
2390	/	-5.81	/	54	/	AVG
2399	64.19	-5.84	58.35	74	-15.65	peak
2399	48.10	-5.84	42.26	54	-11.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.66	-5.81	51.85	74	-22.15	
2390	/	-5.81	/	54	/	AVG
2399	62.83	-5.84	56.99	74	-17.01	peak
2399	47.43	-5.84	41.59	54	-12.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.09	-5.65	51.44	74	-22.56	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.57	-5.65	50.92	74	-23.08	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.91	-5.81	53.10	74	-20.90	peak
2390	/	-5.81	/	54	/	AVG
2399	62.96	-5.84	57.12	74	-16.88	peak
2399	46.22	-5.84	40.38	54	-13.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.33	-5.81	50.52	74	-23.48	peak
2390	/	-5.81	/	54	/	AVG
2399	61.49	-5.84	55.65	74	-18.35	peak
2399	46.77	-5.84	40.93	54	-13.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.55	-5.65	50.90	74	-23.10	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.18	-5.65	52.53	74	-21.47	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.28	-5.81	51.47	74	-22.53	peak
2390	/	-5.81	/	54	/	AVG
2399	63.16	-5.84	57.32	74	-16.68	peak
2399	48.72	-5.84	42.88	54	-11.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.28	-5.81	51.47	74	-22.53	peak
2390	/	-5.81	/	54	/	AVG
2399	61.17	-5.84	55.33	74	-18.67	peak
2399	46.77	-5.84	40.93	54	-13.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.57	-5.65	51.92	74	-22.08	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.08	-5.65	50.43	74	-23.57	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.44	-5.81	51.63	74	-22.37	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.26	-5.81	52.45	74	-21.55	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.14	-5.65	51.49	74	-22.51	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.57	-5.65	51.92	74	-22.08	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.18	-5.81	50.37	74	-23.63	peak
2390	/	-5.81	/	54	/	AVG
2399	63.04	-5.84	57.20	74	-16.80	peak
2399	48.51	-5.84	42.67	54	-11.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.81	-5.81	50.00	74	-24.00	peak
2390	/	-5.81	/	54	/	AVG
2399	60.29	-5.84	54.45	74	-19.55	peak
2399	48.17	-5.84	42.33	54	-11.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.57	-5.65	51.92	74	-22.08	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.75	-5.65	51.10	74	-22.90	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11ax/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.73	-5.81	51.92	74	-22.08	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.20	-5.81	51.39	74	-22.61	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.71	-5.65	52.06	74	-21.94	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

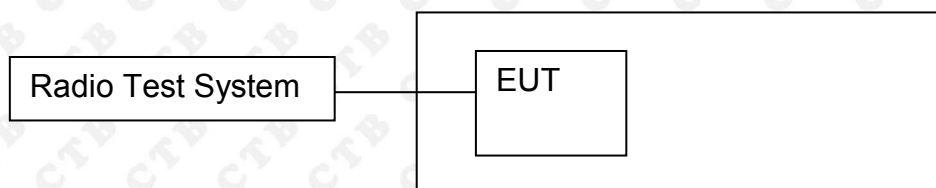

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result




BAND EDGE Graphs

802.11g/LCH




802.11g/HCH

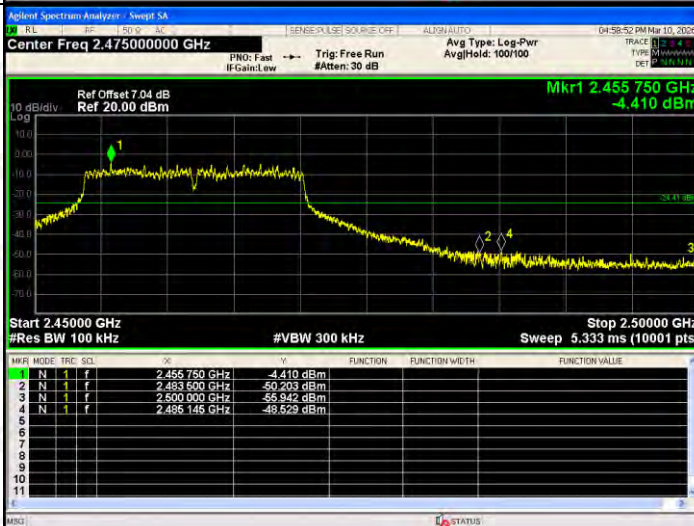

BAND EDGE Graphs

802.11n(HT20)/LCH

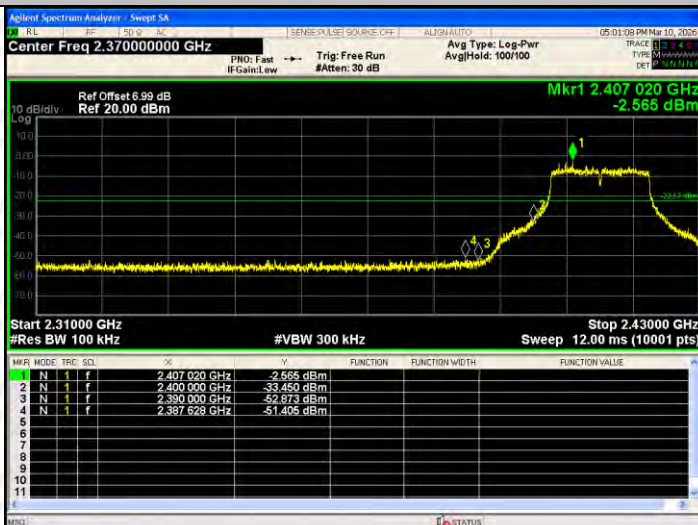


802.11n(HT20)/HCH




BAND EDGE Graphs

802.11n(HT40)/LCH

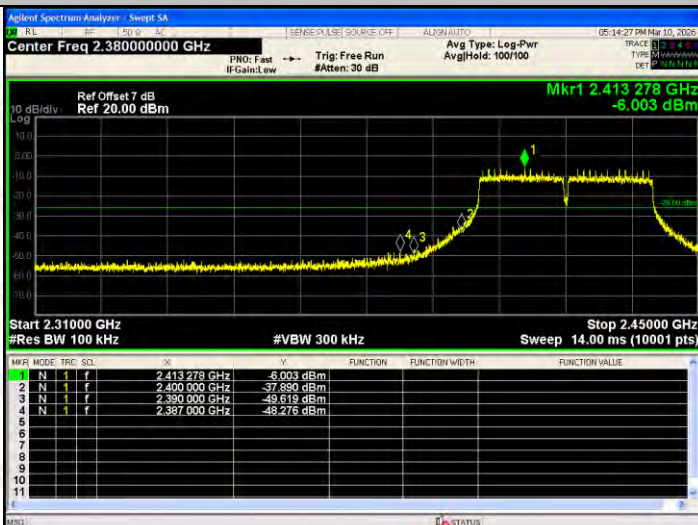


802.11n(HT40)/HCH

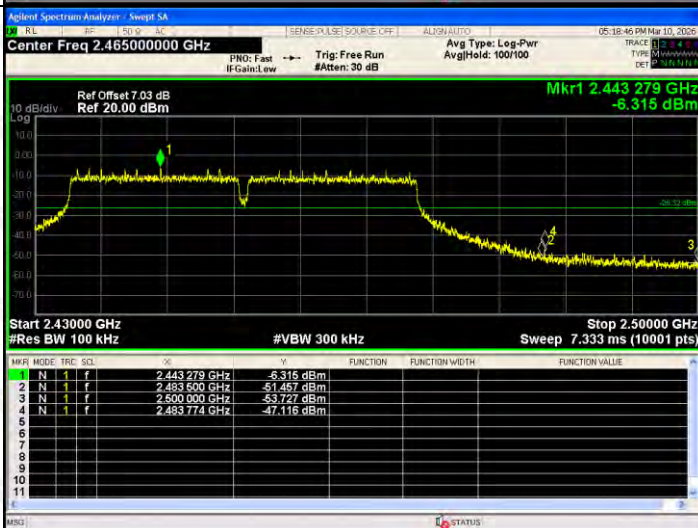

BAND EDGE Graphs

802.11ax(HE20)/LCH

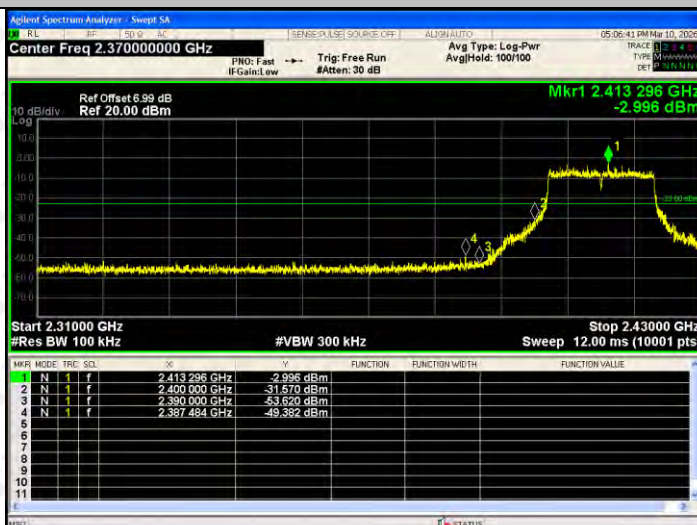


802.11ax(HE20)/HCH




BAND EDGE Graphs

802.11ax(HE40)/LCH

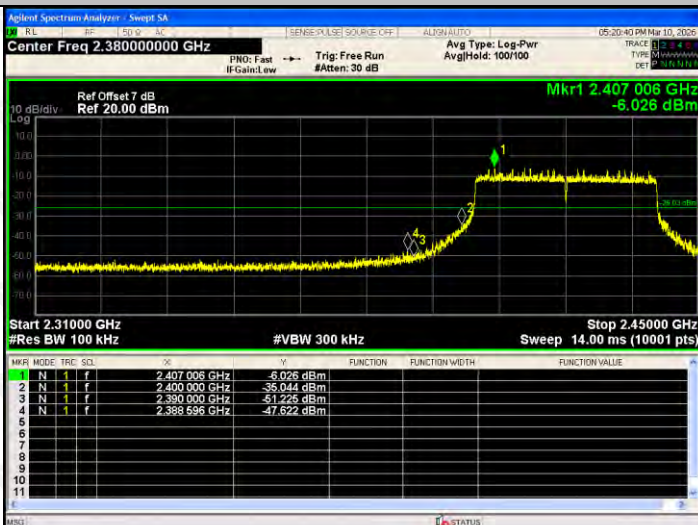


802.11ax(HE40)/HCH

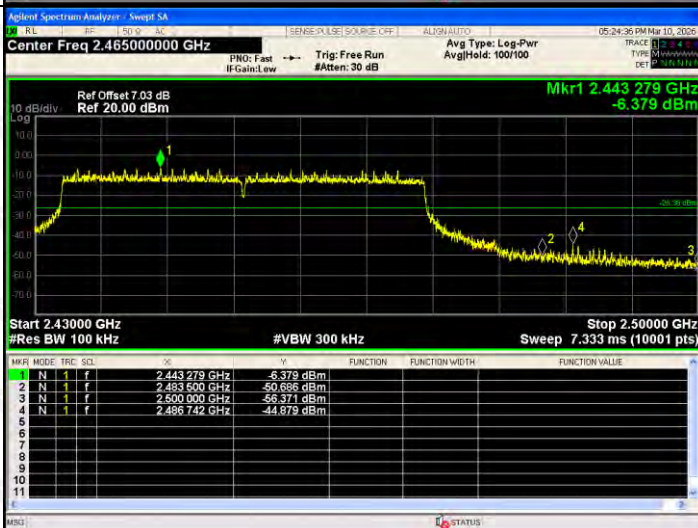


RF Conducted Spurious Emissions Graphs


802.11b/LCH

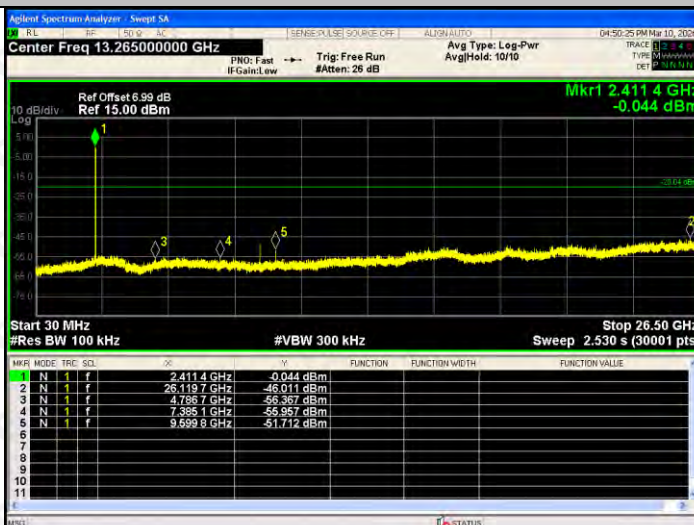

802.11b/MCH

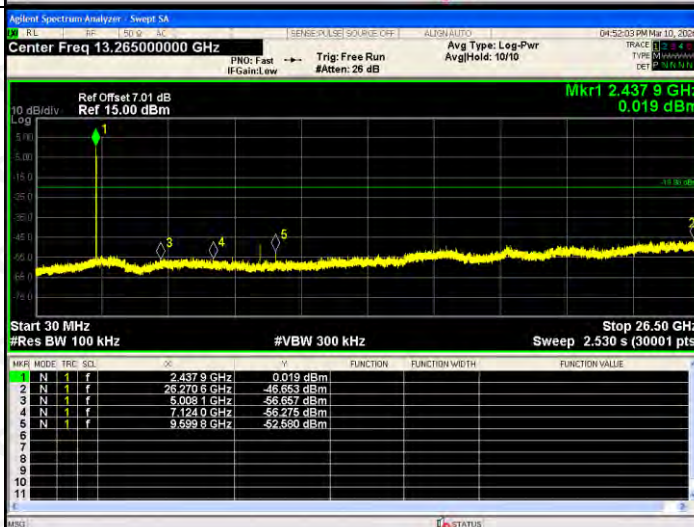


802.11b/HCH

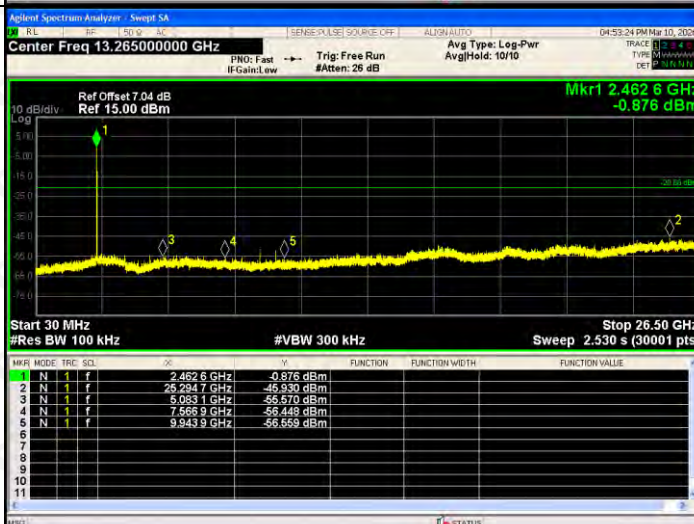


RF Conducted Spurious Emissions Graphs


802.11g/LCH

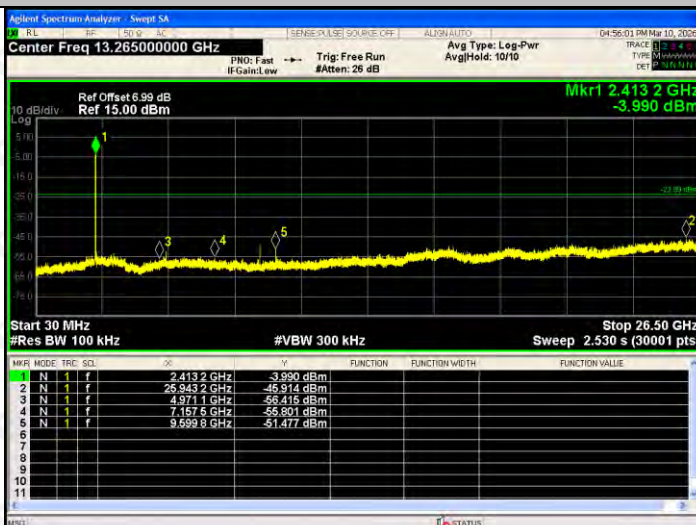

802.11g/MCH

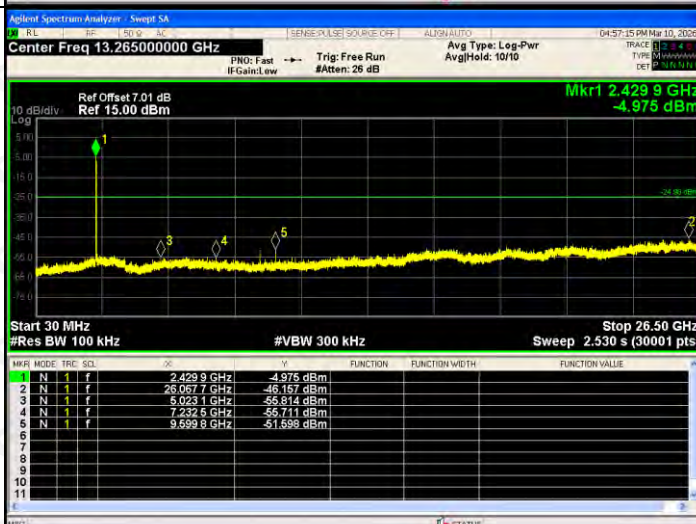


802.11g/HCH

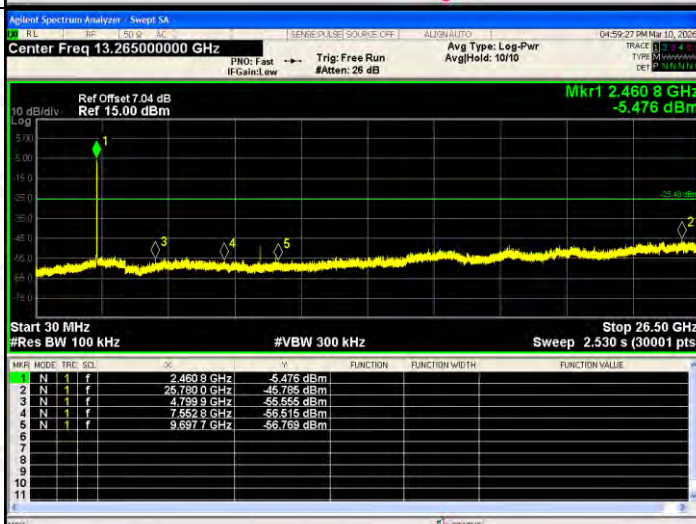


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

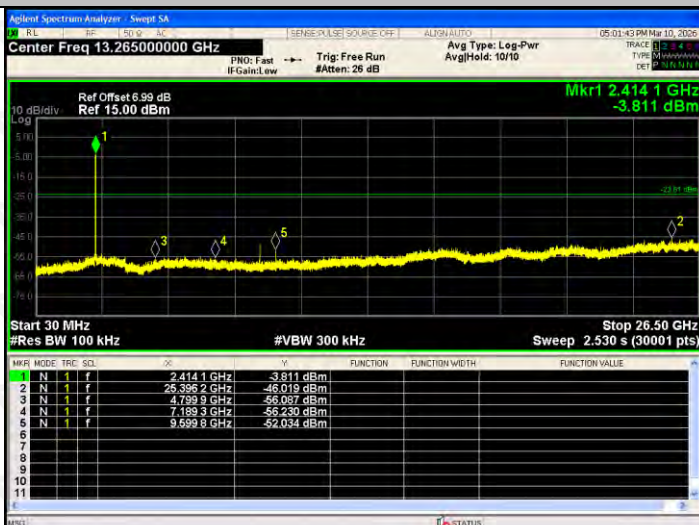

802.11n(HT20)/MCH

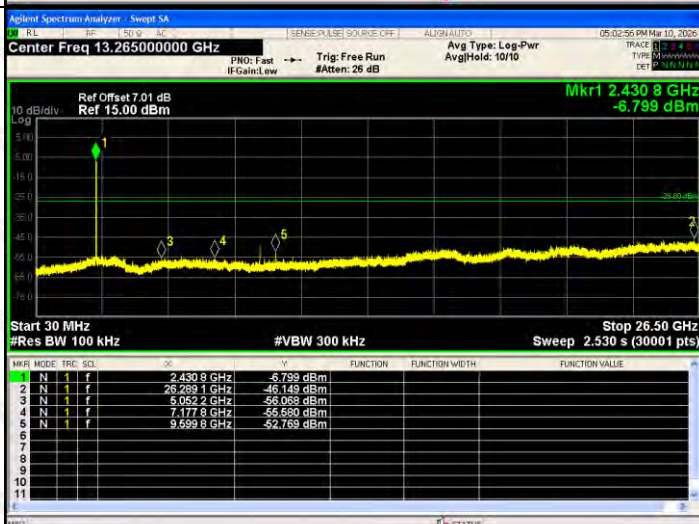


802.11n(HT20)/HCH

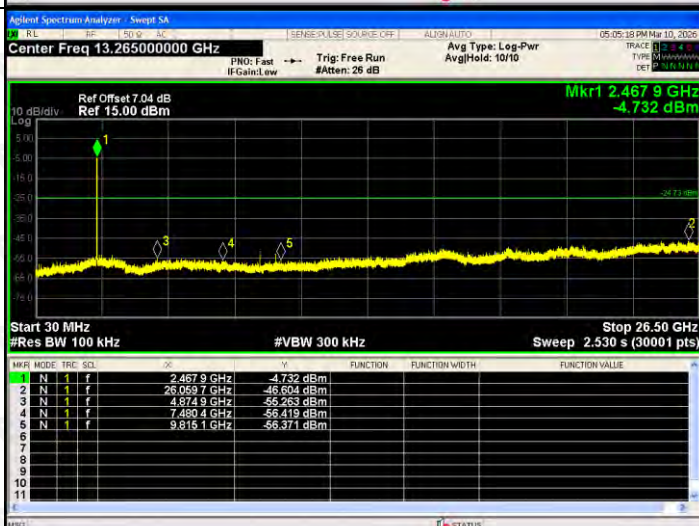


RF Conducted Spurious Emissions Graphs


802.11n(HT40)/LCH

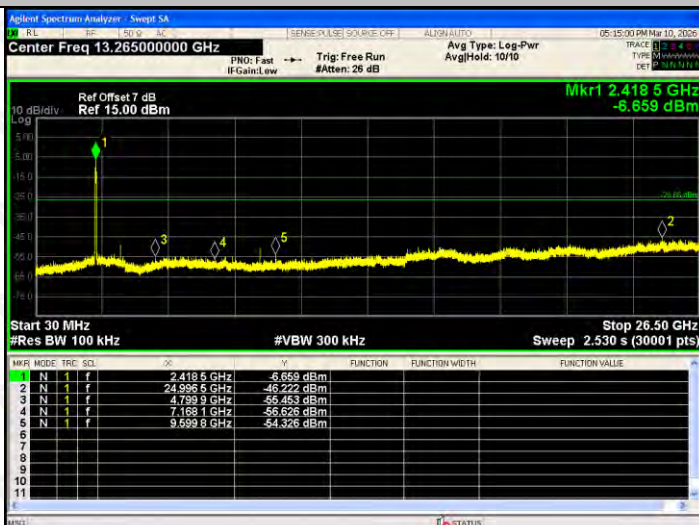

802.11n(HT40)/MCH

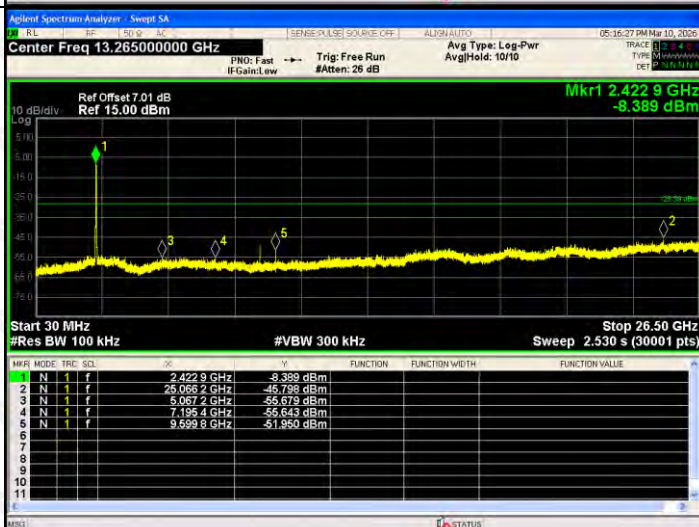


802.11n(HT40)/HCH

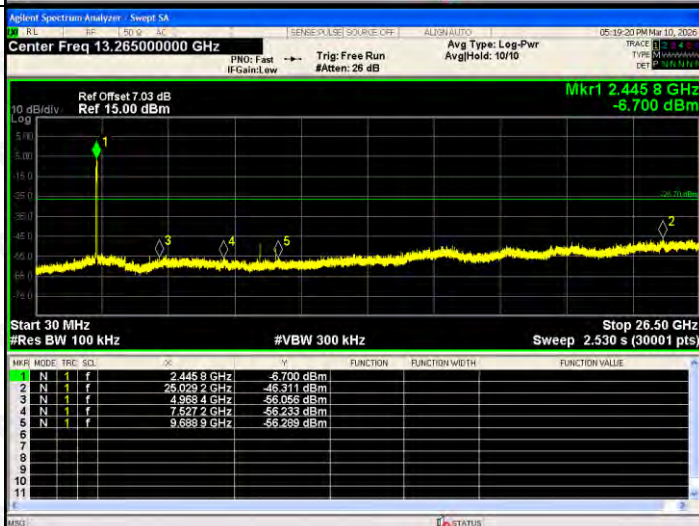


RF Conducted Spurious Emissions Graphs


802.11ax(HE20)/LCH

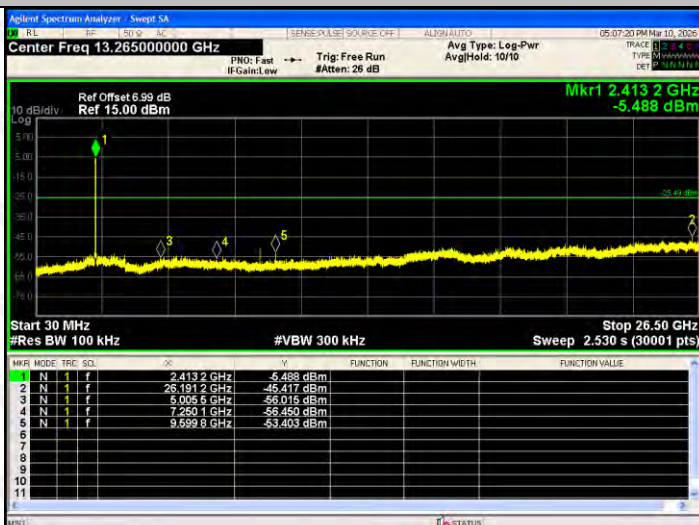

802.11ax(HE20)/MCH

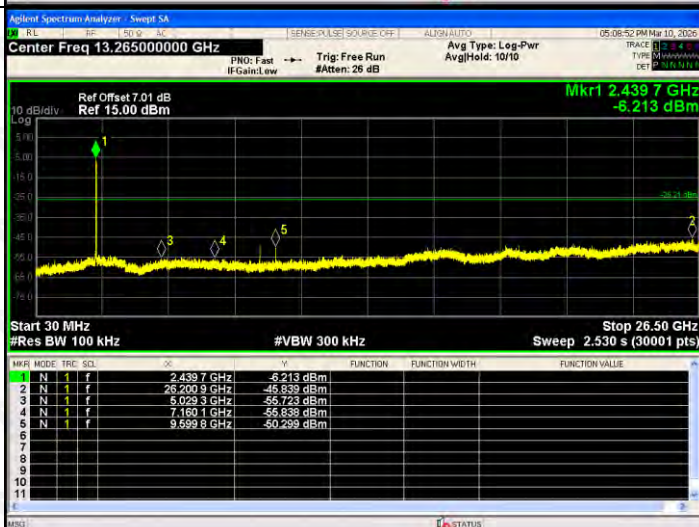


802.11ax(HE20)/HCH

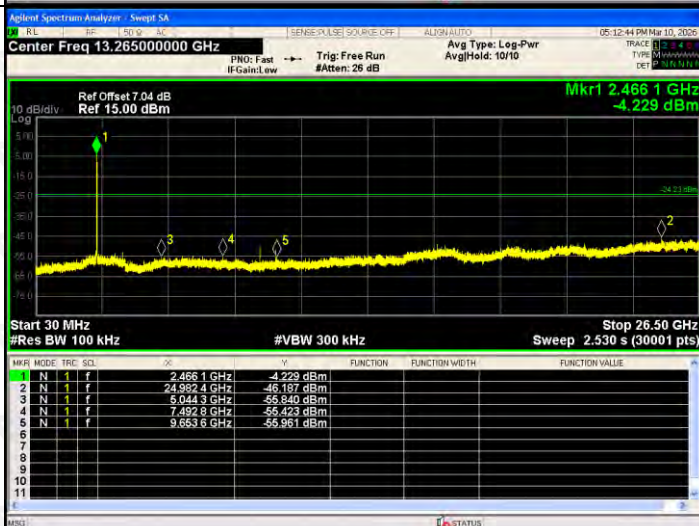


RF Conducted Spurious Emissions Graphs


802.11ax(HE40)/LCH

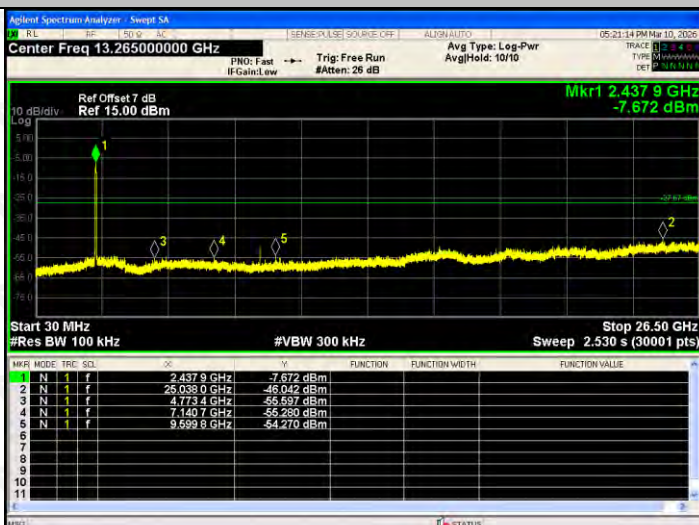

802.11ax(HE40)/MCH

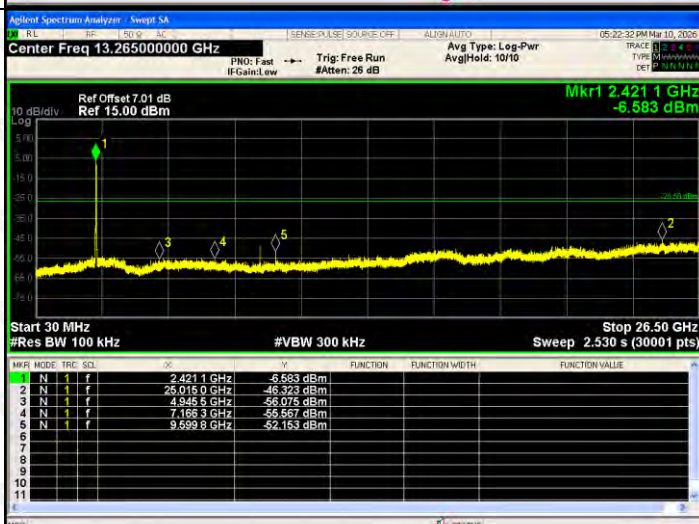

802.11ax(HE40)/HCH

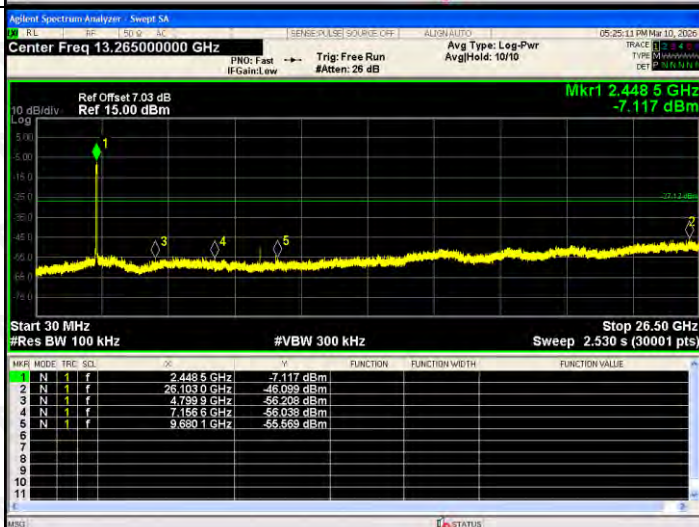

9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	15.093	30	PASS
	MCH	14.441	30	PASS
	HCH	14.159	30	PASS
802.11g	LCH	14.788	30	PASS
	MCH	14.056	30	PASS
	HCH	13.993	30	PASS
802.11n(HT20)	LCH	15.892	30	PASS
	MCH	15.185	30	PASS
	HCH	14.915	30	PASS
802.11n(HT40)	LCH	15.319	30	PASS
	MCH	14.902	30	PASS
	HCH	14.965	30	PASS
802.11ax(HE20)	LCH	16.376	30	PASS
	MCH	15.7	30	PASS
	HCH	16.379	30	PASS
802.11ax(HE40)	LCH	15.905	30	PASS
	MCH	15.627	30	PASS
	HCH	15.6	30	PASS

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

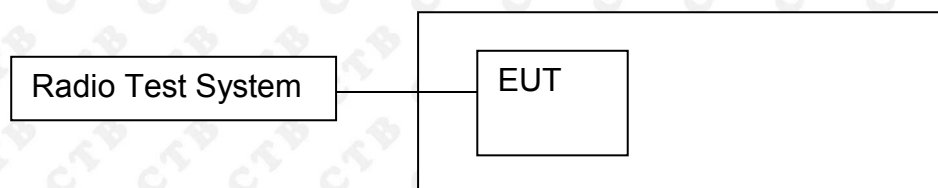

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5	PASS


10.3 Test procedure











1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



10.4 Test Result




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	7.664	500	PASS
	MCH	7.562	500	PASS
	HCH	6.913	500	PASS
802.11g	LCH	16.516	500	PASS
	MCH	16.482	500	PASS
	HCH	16.396	500	PASS
802.11n(HT20)	LCH	17.674	500	PASS
	MCH	17.681	500	PASS
	HCH	17.625	500	PASS
802.11n(HT40)	LCH	36.579	500	PASS
	MCH	36.511	500	PASS
	HCH	36.441	500	PASS
802.11ax(HE20)	LCH	19.162	500	PASS
	MCH	19.104	500	PASS
	HCH	19.124	500	PASS
802.11ax(HE40)	LCH	37.813	500	PASS
	MCH	37.899	500	PASS
	HCH	37.598	500	PASS




Test Graph:

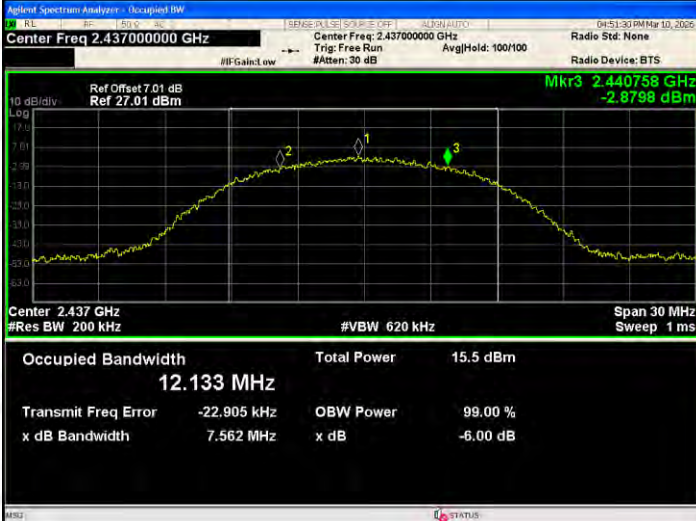Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Mkr3 2.415825 GHz -2.7110 dBm Center 2.412 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 12.155 MHz Total Power 16.3 dBm Transmit Freq Error -7.186 kHz OBW Power 99.00 % x dB Bandwidth 7.664 MHz x dB -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.440758 GHz -2.8798 dBm Center 2.437 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 12.133 MHz Total Power 15.5 dBm Transmit Freq Error -22.905 kHz OBW Power 99.00 % x dB Bandwidth 7.562 MHz x dB -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.465428 GHz -4.6982 dBm Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 12.135 MHz Total Power 15.4 dBm Transmit Freq Error -28.929 kHz OBW Power 99.00 % x dB Bandwidth 6.913 MHz x dB -6.00 dB

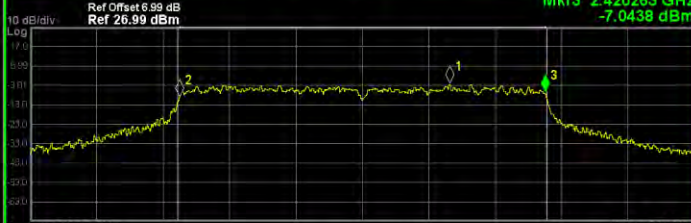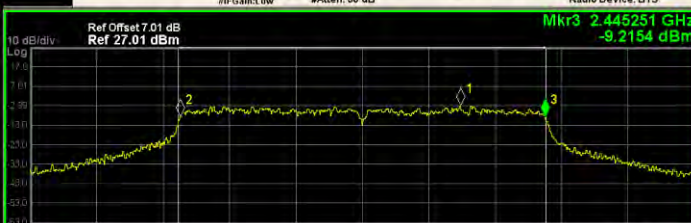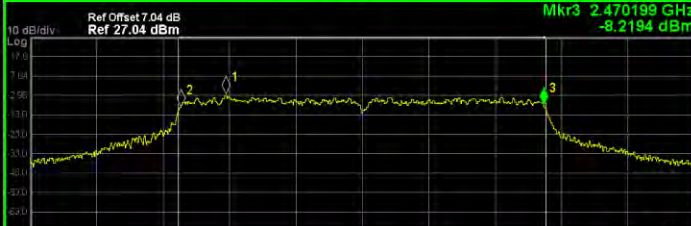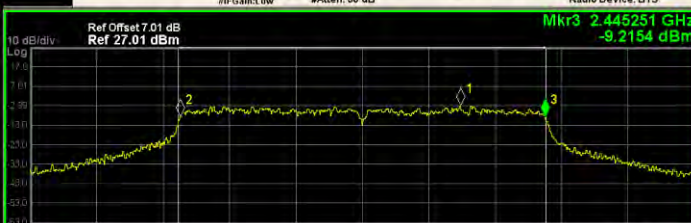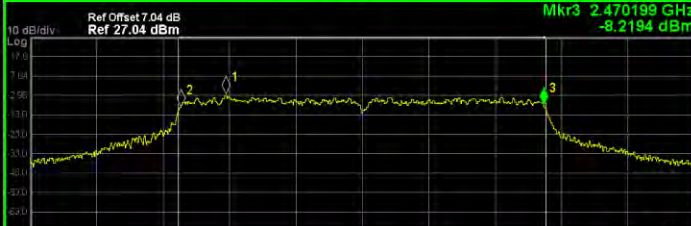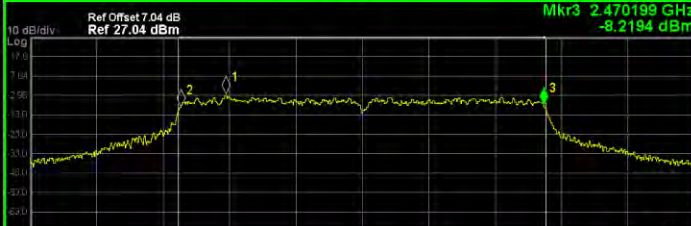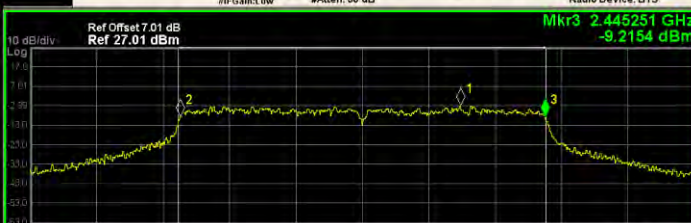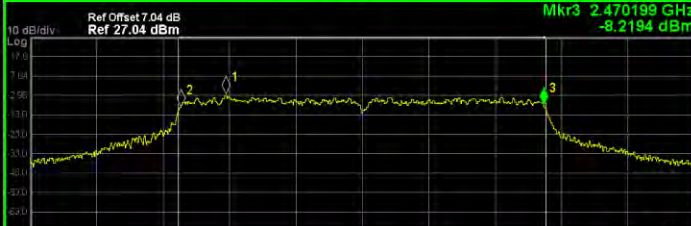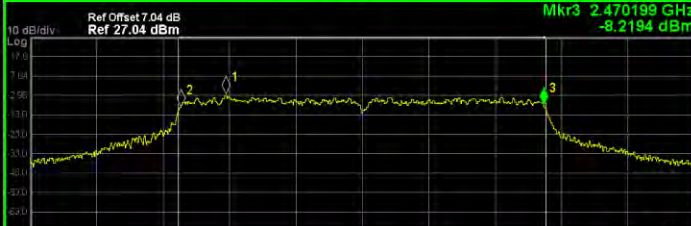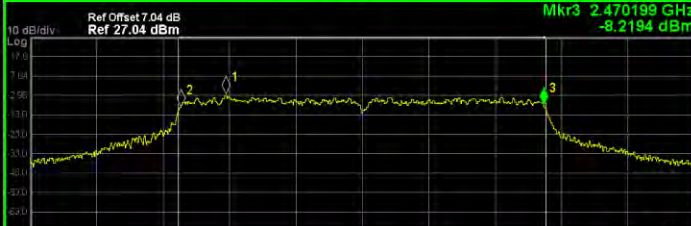
802.11g/LCH	Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 6.99 dB Ref 26.99 dBm Mkr3 2.420263 GHz -7.0438 dBm  Center 2.412 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.596 MHz Total Power 13.7 dBm Transmit Freq Error 5.352 kHz OBW Power 99.00 % x dB Bandwidth 16.52 MHz x dB -6.00 dB <tr><td>802.11g/MCH</td><td> Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.445251 GHz -9.2154 dBm  Center 2.437 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.558 MHz Total Power 13.2 dBm Transmit Freq Error 9.544 kHz OBW Power 99.00 % x dB Bandwidth 16.48 MHz x dB -6.00 dB <tr><td>802.11g/HCH</td><td> Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470199 GHz -8.2194 dBm  Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.573 MHz Total Power 13.0 dBm Transmit Freq Error 1.095 kHz OBW Power 99.00 % x dB Bandwidth 16.40 MHz x dB -6.00 dB </td></tr></td></tr>	802.11g/MCH	Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.445251 GHz -9.2154 dBm  Center 2.437 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.558 MHz Total Power 13.2 dBm Transmit Freq Error 9.544 kHz OBW Power 99.00 % x dB Bandwidth 16.48 MHz x dB -6.00 dB <tr><td>802.11g/HCH</td><td> Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470199 GHz -8.2194 dBm  Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.573 MHz Total Power 13.0 dBm Transmit Freq Error 1.095 kHz OBW Power 99.00 % x dB Bandwidth 16.40 MHz x dB -6.00 dB </td></tr>	802.11g/HCH	Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470199 GHz -8.2194 dBm  Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.573 MHz Total Power 13.0 dBm Transmit Freq Error 1.095 kHz OBW Power 99.00 % x dB Bandwidth 16.40 MHz x dB -6.00 dB
802.11g/MCH	Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.445251 GHz -9.2154 dBm  Center 2.437 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.558 MHz Total Power 13.2 dBm Transmit Freq Error 9.544 kHz OBW Power 99.00 % x dB Bandwidth 16.48 MHz x dB -6.00 dB <tr><td>802.11g/HCH</td><td> Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470199 GHz -8.2194 dBm  Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.573 MHz Total Power 13.0 dBm Transmit Freq Error 1.095 kHz OBW Power 99.00 % x dB Bandwidth 16.40 MHz x dB -6.00 dB </td></tr>	802.11g/HCH	Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470199 GHz -8.2194 dBm  Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.573 MHz Total Power 13.0 dBm Transmit Freq Error 1.095 kHz OBW Power 99.00 % x dB Bandwidth 16.40 MHz x dB -6.00 dB		
802.11g/HCH	Agilent Spectrum Analyzer - Occupied BW RL SENSE (VLS) SOURCE (OFF) ALPHA (AUTO) Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IF Gain: Low #Atten: 30 dB 10 dB/div Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470199 GHz -8.2194 dBm  Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 16.573 MHz Total Power 13.0 dBm Transmit Freq Error 1.095 kHz OBW Power 99.00 % x dB Bandwidth 16.40 MHz x dB -6.00 dB				

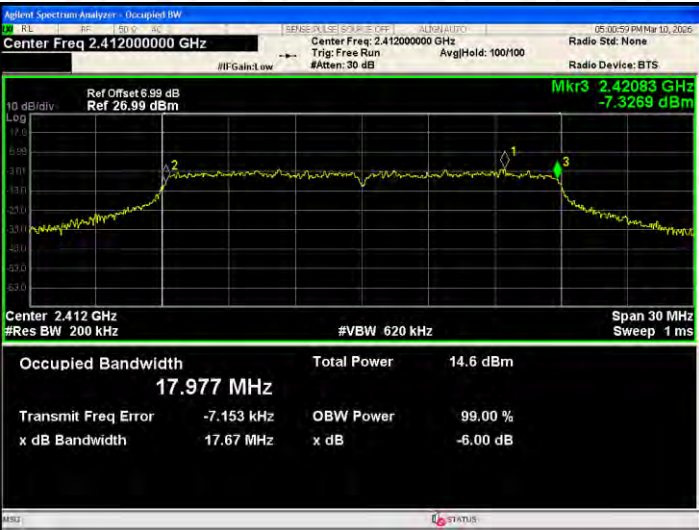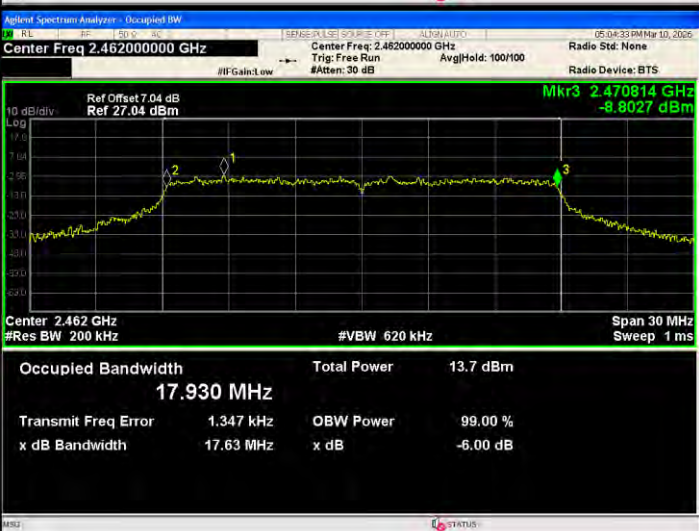802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Mkr3 2.42083 GHz -7.3269 dBm Center 2.412 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.977 MHz Total Power 14.6 dBm Transmit Freq Error -7.153 kHz OBW Power 99.00 % x dB Bandwidth 17.67 MHz x dB -6.00 dB
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.44584 GHz -8.6009 dBm Center 2.437 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.998 MHz Total Power 13.7 dBm Transmit Freq Error -626 Hz OBW Power 99.00 % x dB Bandwidth 17.68 MHz x dB -6.00 dB
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470814 GHz -8.8027 dBm Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.930 MHz Total Power 13.7 dBm Transmit Freq Error 1.347 kHz OBW Power 99.00 % x dB Bandwidth 17.63 MHz x dB -6.00 dB

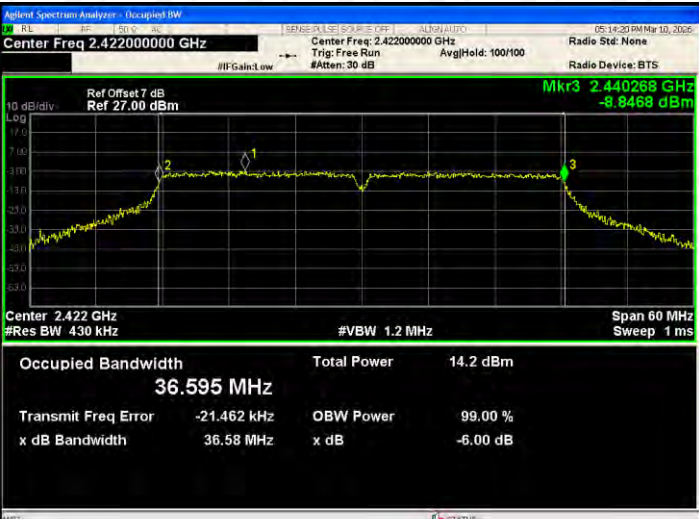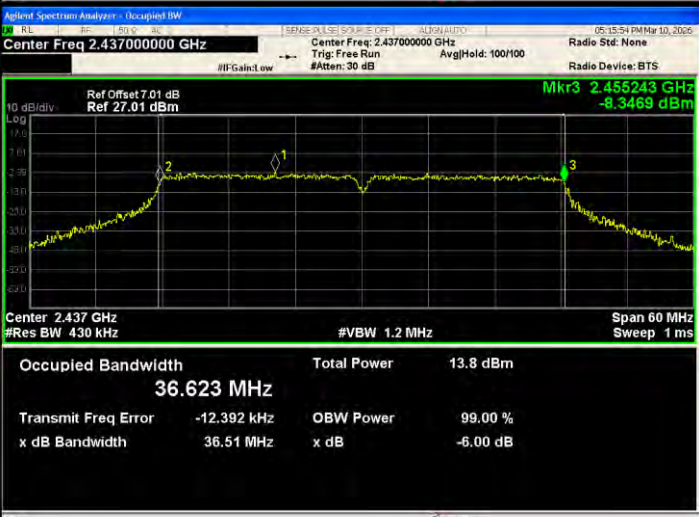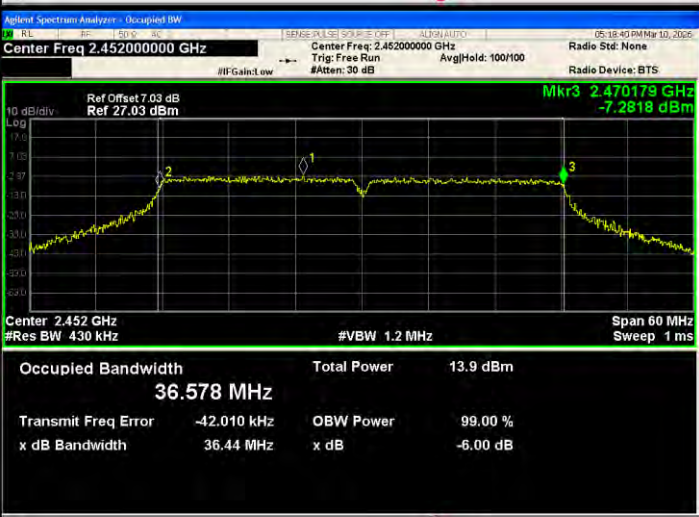802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.0 dB Ref 27.00 dBm Mkr3 2.440268 GHz -8.8468 dBm Center 2.422 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.595 MHz Total Power 14.2 dBm Transmit Freq Error -21.462 kHz OBW Power 99.00 % x dB Bandwidth 36.58 MHz x dB -6.00 dB
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.455243 GHz -8.3469 dBm Center 2.437 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.623 MHz Total Power 13.8 dBm Transmit Freq Error -12.392 kHz OBW Power 99.00 % x dB Bandwidth 36.51 MHz x dB -6.00 dB
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.470179 GHz -7.2818 dBm Center 2.452 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.578 MHz Total Power 13.9 dBm Transmit Freq Error -42.010 kHz OBW Power 99.00 % x dB Bandwidth 36.44 MHz x dB -6.00 dB

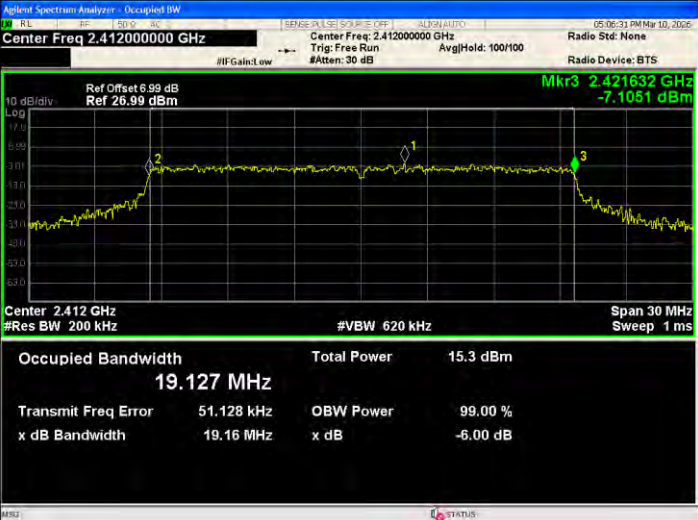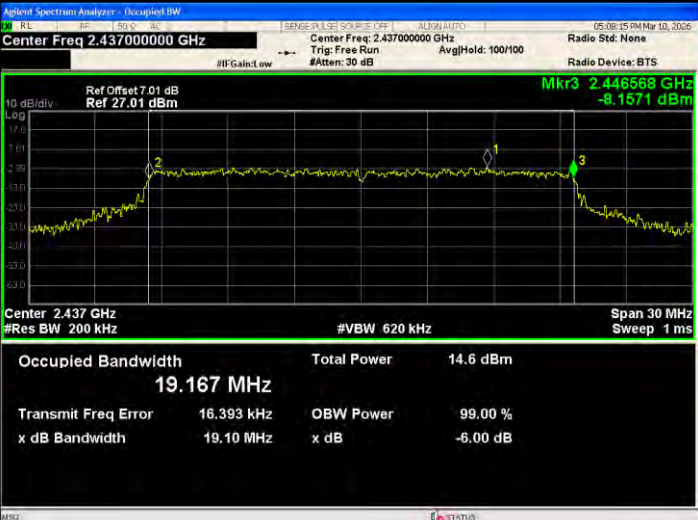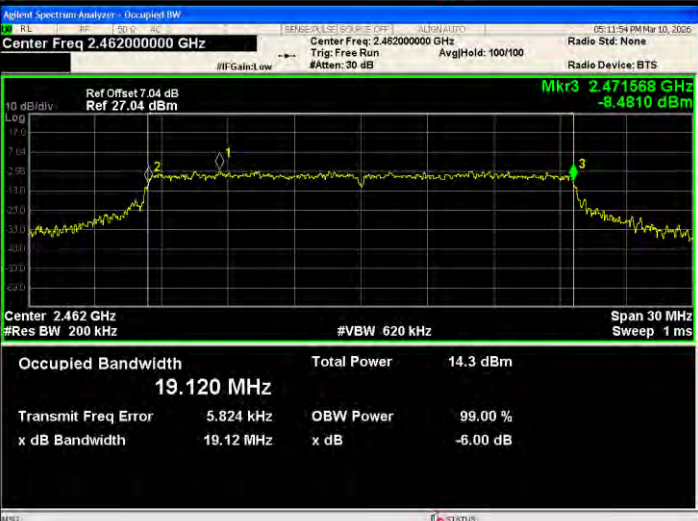802.11ax(HE20)/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 6.99 dB Ref: 26.99 dBm Mkr3: 2.421632 GHz -7.1051 dBm Center: 2.412 GHz #Res BW: 200 kHz #VBW: 620 kHz Span: 30 MHz Sweep: 1 ms Occupied Bandwidth: 19.127 MHz Total Power: 15.3 dBm Transmit Freq Error: 51.128 kHz OBW Power: 99.00 % x dB Bandwidth: 19.16 MHz x dB: -6.00 dB
802.11ax(HE20)/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 7.01 dB Ref: 27.01 dBm Mkr3: 2.446568 GHz -8.1571 dBm Center: 2.437 GHz #Res BW: 200 kHz #VBW: 620 kHz Span: 30 MHz Sweep: 1 ms Occupied Bandwidth: 19.167 MHz Total Power: 14.6 dBm Transmit Freq Error: 16.393 kHz OBW Power: 99.00 % x dB Bandwidth: 19.10 MHz x dB: -6.00 dB
802.11ax(HE20)/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr3: 2.471568 GHz -8.4810 dBm Center: 2.462 GHz #Res BW: 200 kHz #VBW: 620 kHz Span: 30 MHz Sweep: 1 ms Occupied Bandwidth: 19.120 MHz Total Power: 14.3 dBm Transmit Freq Error: 5.824 kHz OBW Power: 99.00 % x dB Bandwidth: 19.12 MHz x dB: -6.00 dB


802.11ax(HE40)/LCH

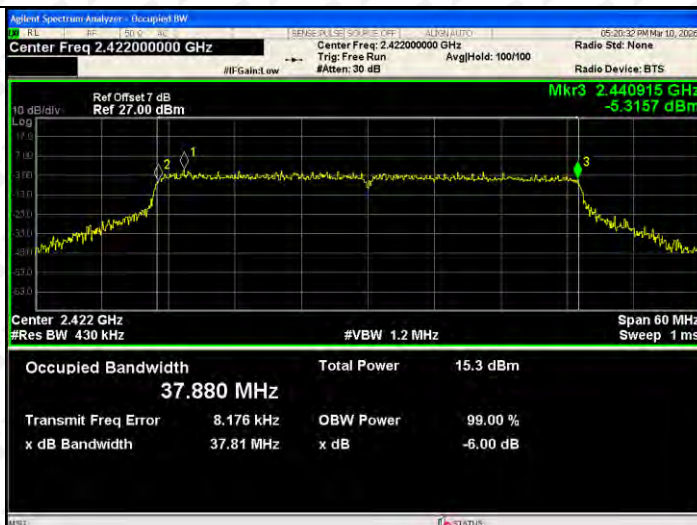

802.11ax(HE40)/MCH




802.11ax(HE40)/HCH

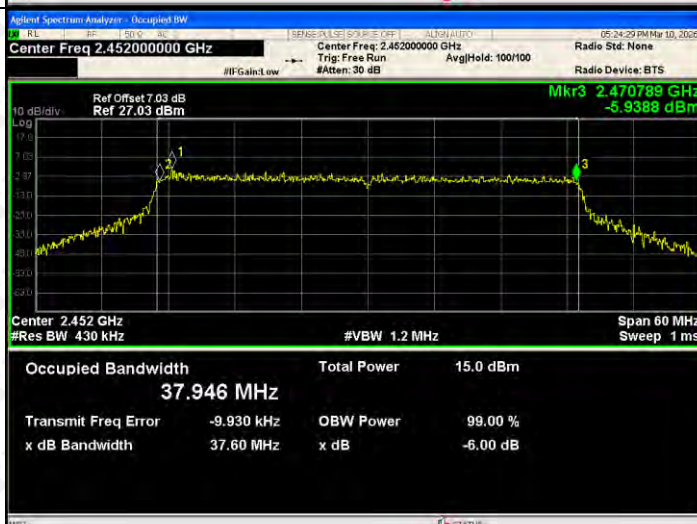

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

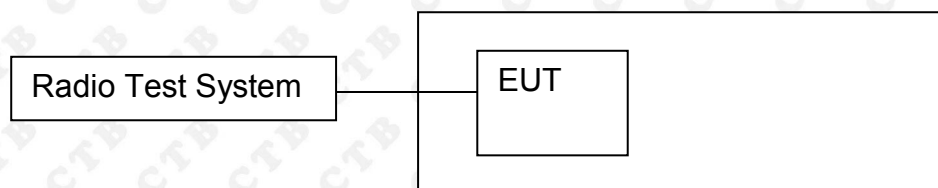

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3kHz]	Limit(8 dBm (in any 3kHz))	Verdict
802.11b	LCH	-12.491	8	PASS
	MCH	-13.181	8	PASS
	HCH	-14.741	8	PASS
802.11g	LCH	-18.553	8	PASS
	MCH	-19.74	8	PASS
	HCH	-20.051	8	PASS
802.11n(HT20)	LCH	-16.657	8	PASS
	MCH	-16.981	8	PASS
	HCH	-17.025	8	PASS
802.11n(HT40)	LCH	-20.357	8	PASS
	MCH	-20.506	8	PASS
	HCH	-20.557	8	PASS
802.11ax(HE20)	LCH	-18.096	8	PASS
	MCH	-17.992	8	PASS
	HCH	-18.162	8	PASS
802.11ax(HE40)	LCH	-21.923	8	PASS
	MCH	-21.876	8	PASS
	HCH	-21.531	8	PASS

Test Graph

Graphs

802.11b/LCH

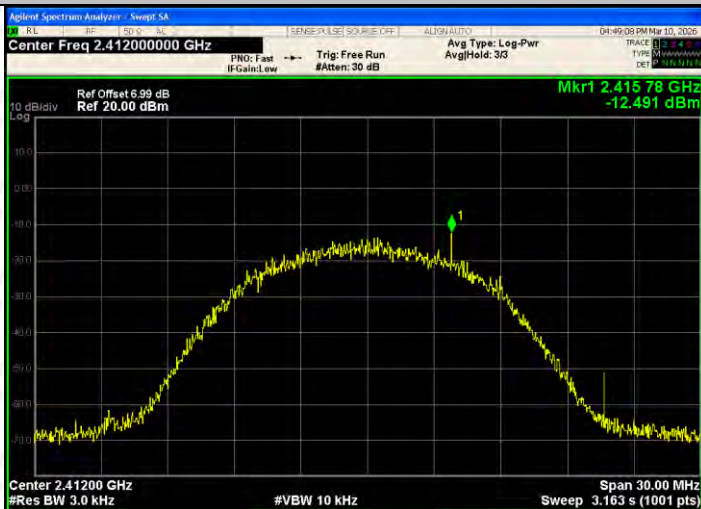

802.11b/MCH



802.11b/HCH



802.11g/LCH




802.11g/MCH






802.11g/HCH



802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.40576 GHz -16.657 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.43601 GHz -16.981 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.45666 GHz -17.025 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

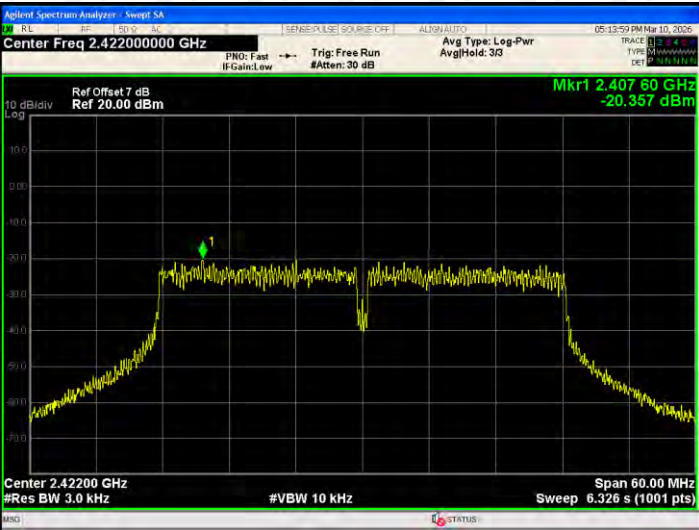802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.40780 GHz -20.357 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.43982 GHz -20.506 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.44888 GHz -20.557 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

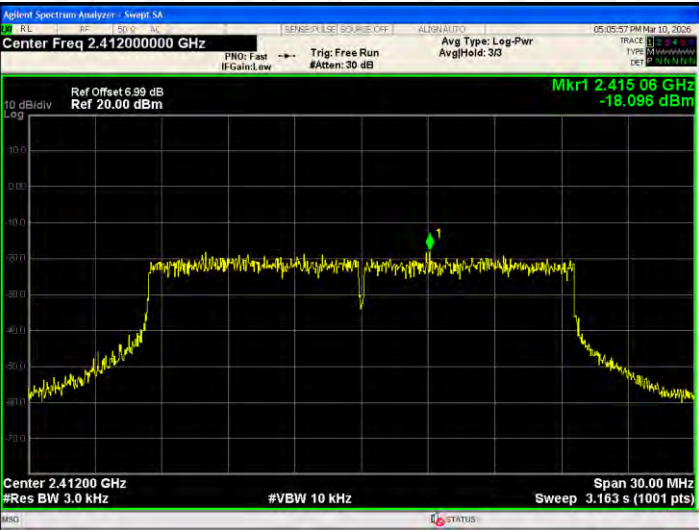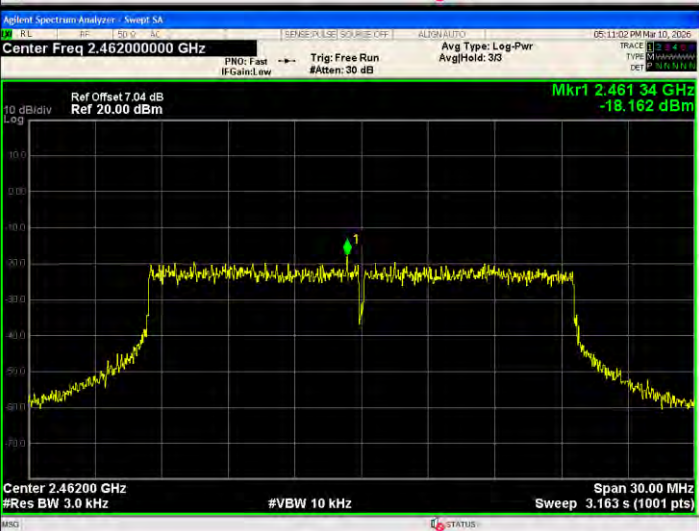802.11ax(HE20)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.415 06 GHz -18.096 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HE20)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.431 93 GHz -17.992 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HE20)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.461 34 GHz -18.162 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

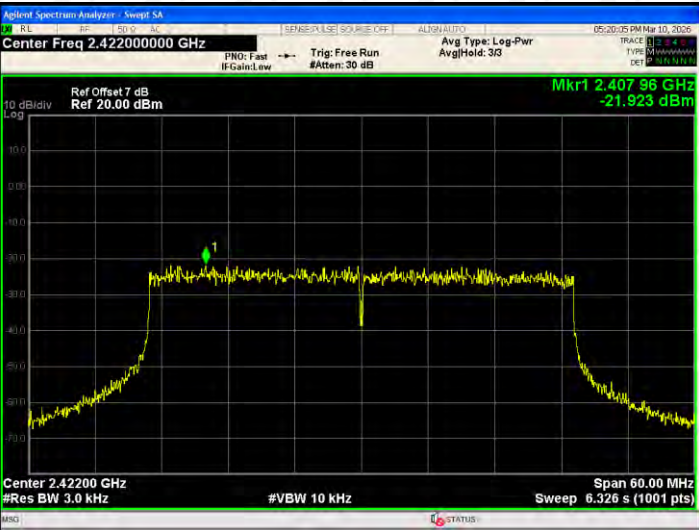802.11ax(HE40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.40796 GHz -21.923 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HE40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.43106 GHz -21.876 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HE40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.43562 GHz -21.531 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC and no consideration of replacement. The best case gain of the antenna is -0.81dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions


Below 1G

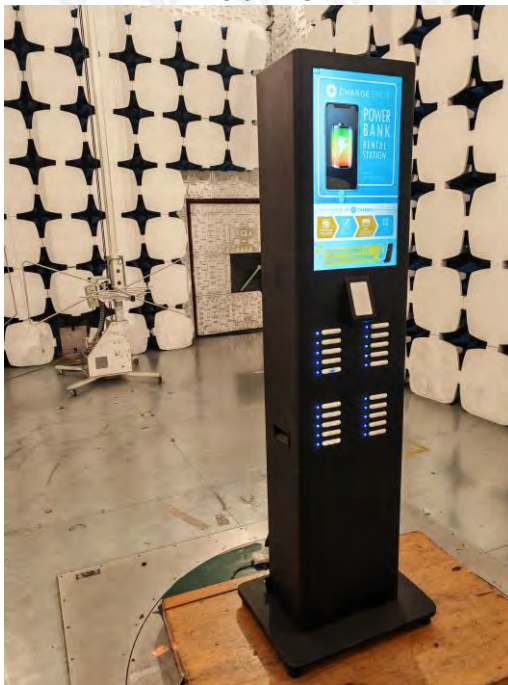

Above 1G



Conducted emission

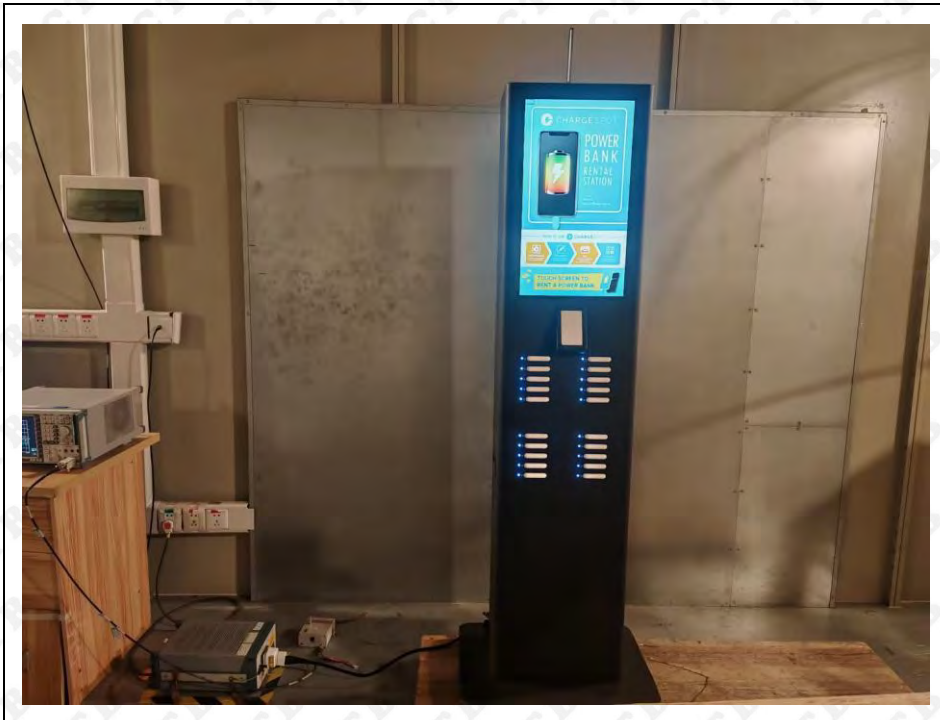

RF Conducted



***** END OF REPORT *****