



TEST REPORT

Test item description: Popular edition 4-port stacking series Shared Charging Cabinet
FCC ID: 2BVUD-BST0267
Trademark(s): Besiter
Model/Type reference: BST-0267, BST-0267+G, BST-0267+K, BST-0264, BST-0264+G, BST-0264+K, BST-0265, BST-0265+G, BST-0265+K, BST-0266, BST-0266+G, BST-0266+K
Applicant's name: Shenzhen Besiter Power Bank Co.,Ltd.
Address: Building 65/66 Longwangmiao Industrial Park, Baishixia Community, Fuyong Subdistrict, BaoAn District, Shenzhen, Guangdong, China
Manufacturer: Shenzhen Besiter Power Bank Co.,Ltd.
Address: Building 65/66 Longwangmiao Industrial Park, Baishixia Community, Fuyong Subdistrict, BaoAn District, Shenzhen, Guangdong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Dec. 02, 2025
Sample tested Date: Dec. 02, 2025 to Mar. 17, 2026
Issue Date: Mar. 17, 2026
Report No.: CTB25120212301RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Bin Mei

Kai ChenMartin FengBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	21
7.1 Block Diagram Of Test Setup	21
7.2 Limit	21
7.3 Test procedure	22
7.4 Test Result	23
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	51
8.1 Block Diagram Of Test Setup	51
8.2 Limit	51
8.3 Test procedure	51
8.4 Test Result	52
9. CONDUCTED OUTPUT POWER	60
9.1 Block Diagram Of Test Setup	60
9.2 Limit	60
9.3 Test procedure	60
9.4 Test Result	60
10. 6DB OCCUPIED BANDWIDTH	61
10.1 Block Diagram Of Test Setup	61
10.2 Limit	61
10.3 Test procedure	61
10.4 Test Result	62
11. POWER SPECTRAL DENSITY	67
11.1 Block Diagram Of Test Setup	67
11.2 Limit	67
11.3 Test procedure	67
11.4 Test Result	68
12. ANTENNA REQUIREMENT	73
13. EUT TEST SETUP PHOTOGRAPHS	74
(NOTE: N/A MEANS NOT APPLICABLE)	

1. VERSION

Report No.	Issue Date	Description	Approved
CTB25120212301RF01	Mar. 17, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density, Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9kHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
Humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	BST-0267, BST-0267+G, BST-0267+K, BST-0264, BST-0264+G, BST-0264+K, BST-0265, BST-0265+G, BST-0265+K, BST-0266, BST-0266+G, BST-0266+K
Model Description:	All the model are the same circuit and RF module, only the The stacking quantity of 4-port units varies, and the power of the power adapter is different. Test sample model: BST-0267
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1
Software Version:	V1
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 18.99dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM
Antenna installation:	WiFi (2.4G): FPC antenna
Antenna Gain:	WiFi (2.4G): 3.17dBi
Ratings:	INPUT: AC100-240V 50/60Hz, 0.6A (BST-0264) OUTPUT: DC 12V, 2.0A INPUT: AC100-240V 50/60Hz, 1.2A (BST-0265) OUTPUT: DC 12V, 3.5A INPUT: AC100-240V 50/60Hz, 1.5A (BST-0266, BST-0267) OUTPUT: DC 12V, 5.4A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	5V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22

19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1

Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/9/19	2026/9/18
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22

6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/5/24	2026/5/23
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/5/24	2026/5/23
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/5/24	2026/5/23
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/5/24	2026/5/23
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.


6.4 Test Result

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

BST-0266

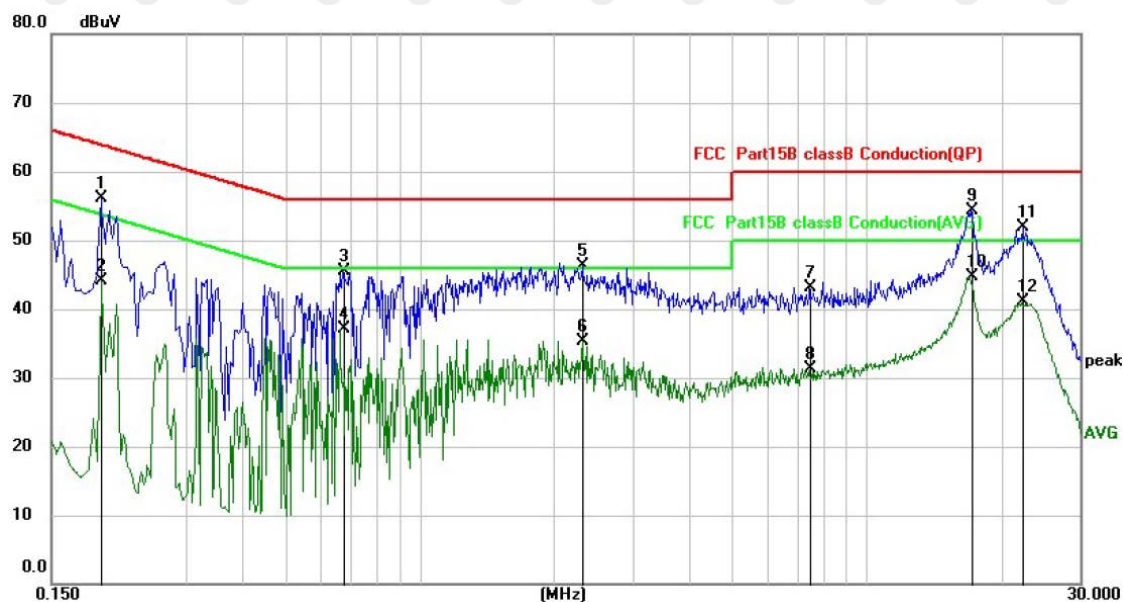


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1940	45.98	10.08	56.06	63.86	-7.80	QP
2		0.1940	33.99	10.08	44.07	53.86	-9.79	AVG
3		0.6740	35.36	10.11	45.47	56.00	-10.53	QP
4		0.6740	27.07	10.11	37.18	46.00	-8.82	AVG
5		2.3179	36.04	10.18	46.22	56.00	-9.78	QP
6		2.3179	25.21	10.18	35.39	46.00	-10.61	AVG
7		7.4620	32.81	10.39	43.20	60.00	-16.80	QP
8		7.4620	20.93	10.39	31.32	50.00	-18.68	AVG
9		17.1100	43.57	10.83	54.40	60.00	-5.60	QP
10	*	17.1100	33.79	10.83	44.62	50.00	-5.38	AVG
11		22.3819	40.87	11.07	51.94	60.00	-8.06	QP
12		22.3819	29.95	11.07	41.02	50.00	-8.98	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

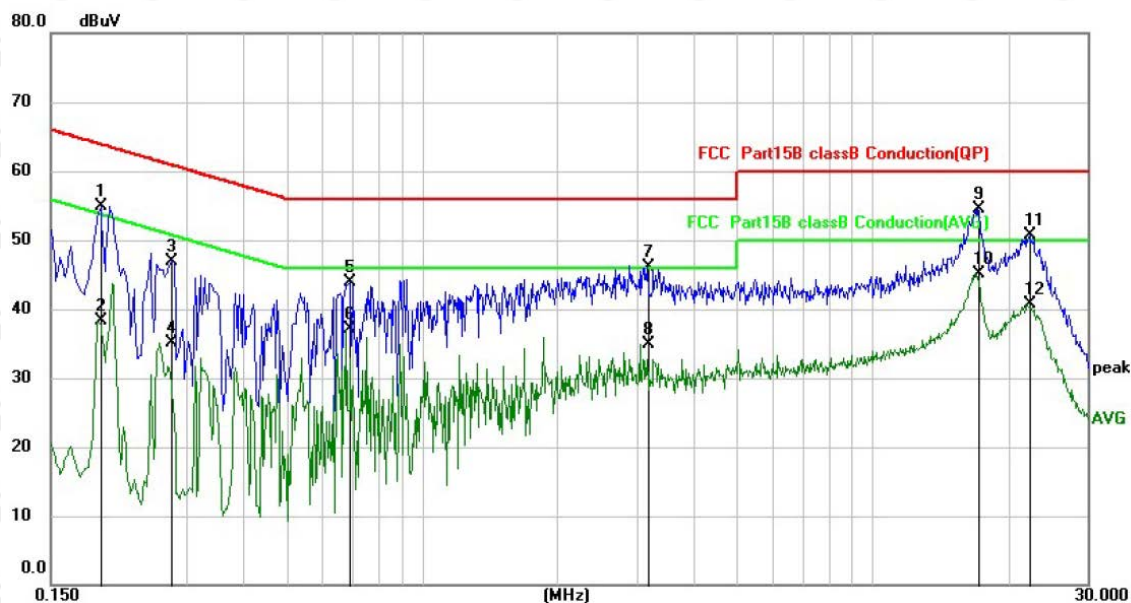


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1940	44.82	10.08	54.90	63.86	-8.96	QP
2		0.1940	28.30	10.08	38.38	53.86	-15.48	AVG
3		0.2779	36.81	10.08	46.89	60.88	-13.99	QP
4		0.2779	25.00	10.08	35.08	50.88	-15.80	AVG
5		0.6900	33.71	10.11	43.82	56.00	-12.18	QP
6		0.6900	27.03	10.11	37.14	46.00	-8.86	AVG
7		3.1700	35.91	10.21	46.12	56.00	-9.88	QP
8		3.1700	24.66	10.21	34.87	46.00	-11.13	AVG
9		17.1100	43.71	10.83	54.54	60.00	-5.46	QP
10	*	17.1100	34.23	10.83	45.06	50.00	-4.94	AVG
11		22.3860	39.69	11.07	50.76	60.00	-9.24	QP
12		22.3860	29.60	11.07	40.67	50.00	-9.33	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Line
AC 120V 60Hz
the worst: 802.11b (low channel)

BST-0264

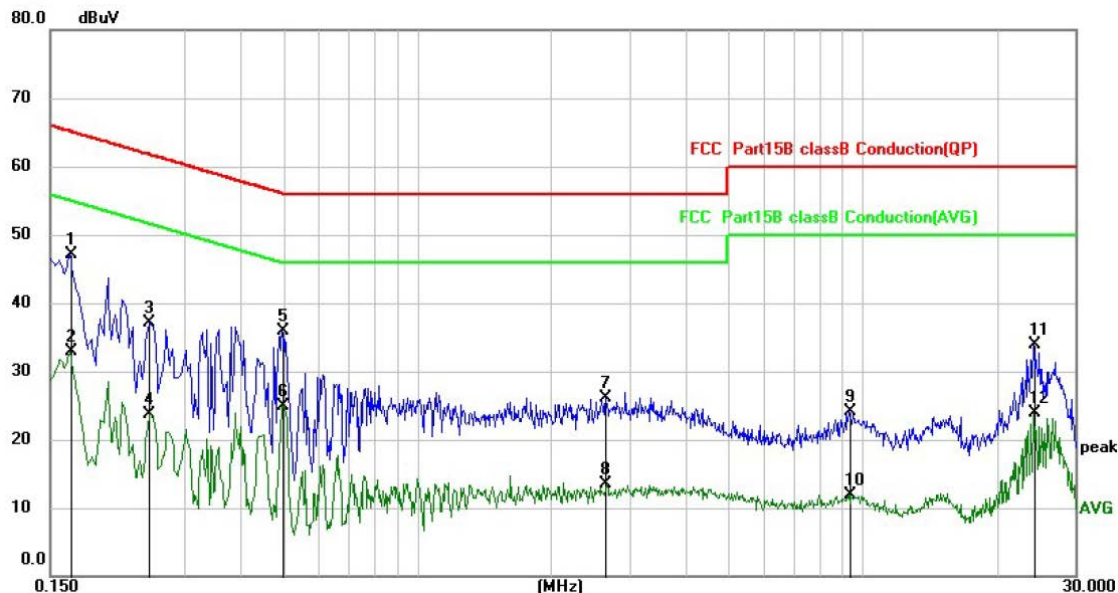


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1660	37.12	10.07	47.19	65.16	-17.97	QP
2		0.1660	22.87	10.07	32.94	55.16	-22.22	AVG
3		0.2500	27.03	10.08	37.11	61.76	-24.65	QP
4		0.2500	13.63	10.08	23.71	51.76	-28.05	AVG
5		0.4980	25.74	10.09	35.83	56.03	-20.20	QP
6		0.4980	14.86	10.09	24.95	46.03	-21.08	AVG
7		2.6500	15.87	10.19	26.06	56.00	-29.94	QP
8		2.6500	3.29	10.19	13.48	46.00	-32.52	AVG
9		9.3380	13.59	10.43	24.02	60.00	-35.98	QP
10		9.3380	1.54	10.43	11.97	50.00	-38.03	AVG
11		24.2099	22.71	11.16	33.87	60.00	-26.13	QP
12		24.2099	12.66	11.16	23.82	50.00	-26.18	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

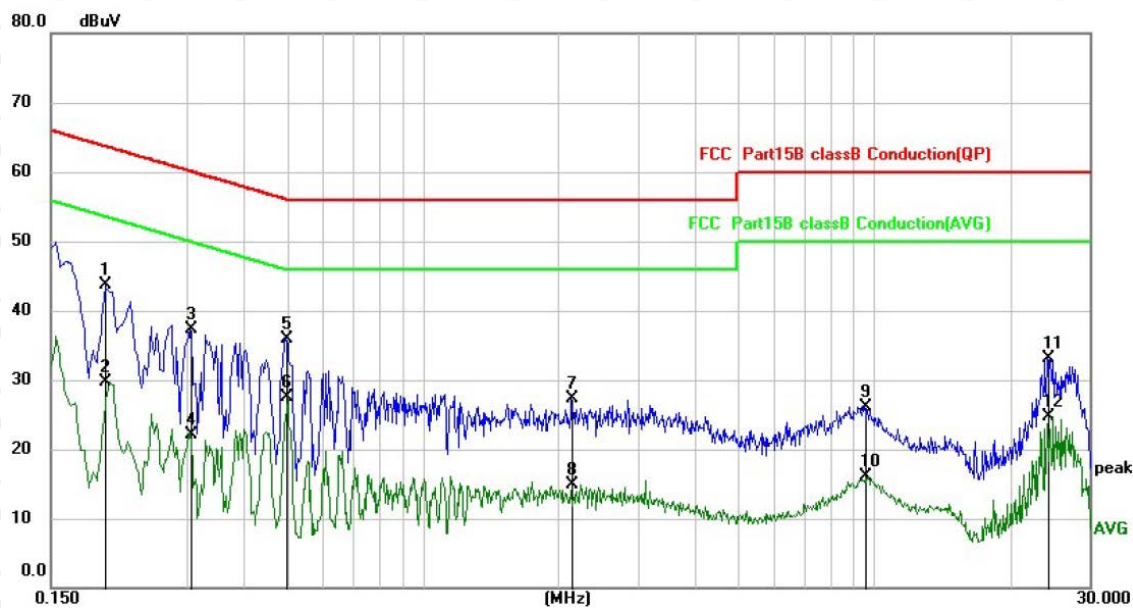

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1980	33.55	10.08	43.63	63.69	-20.06	QP
2		0.1980	19.55	10.08	29.63	53.69	-24.06	AVG
3		0.3060	27.26	10.08	37.34	60.08	-22.74	QP
4		0.3060	12.12	10.08	22.20	50.08	-27.88	AVG
5		0.4980	25.88	10.09	35.97	56.03	-20.06	QP
6	*	0.4980	17.47	10.09	27.56	46.03	-18.47	AVG
7		2.1420	17.12	10.18	27.30	56.00	-28.70	QP
8		2.1420	4.79	10.18	14.97	46.00	-31.03	AVG
9		9.5180	15.77	10.43	26.20	60.00	-33.80	QP
10		9.5180	5.67	10.43	16.10	50.00	-33.90	AVG
11		24.2060	21.98	11.16	33.14	60.00	-26.86	QP
12		24.2060	13.63	11.16	24.79	50.00	-25.21	AVG

Remark:


Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

BST-0267

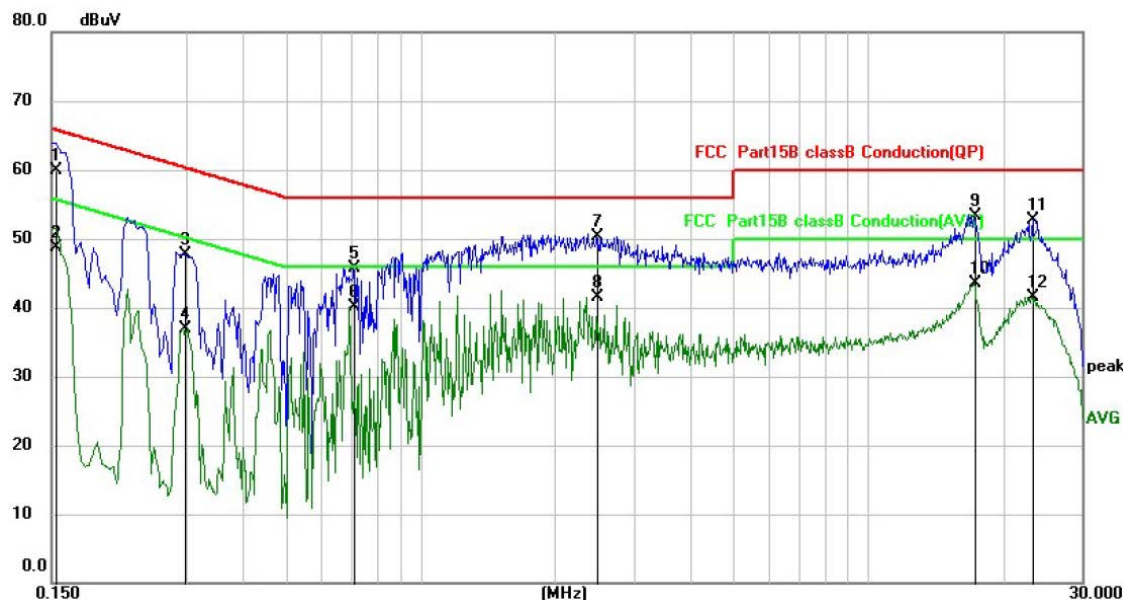


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	49.80	10.07	59.87	65.79	-5.92	QP
2		0.1539	38.68	10.07	48.75	55.79	-7.04	AVG
3		0.2980	37.68	10.08	47.76	60.30	-12.54	QP
4		0.2980	26.89	10.08	36.97	50.30	-13.33	AVG
5		0.7100	35.54	10.11	45.65	56.00	-10.35	QP
6		0.7100	30.02	10.11	40.13	46.00	-5.87	AVG
7		2.4860	40.07	10.19	50.26	56.00	-5.74	QP
8	*	2.4860	31.29	10.19	41.48	46.00	-4.52	AVG
9		17.2260	42.43	10.83	53.26	60.00	-6.74	QP
10		17.2260	32.69	10.83	43.52	50.00	-6.48	AVG
11		23.2780	41.49	11.12	52.61	60.00	-7.39	QP
12		23.2780	30.43	11.12	41.55	50.00	-8.45	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

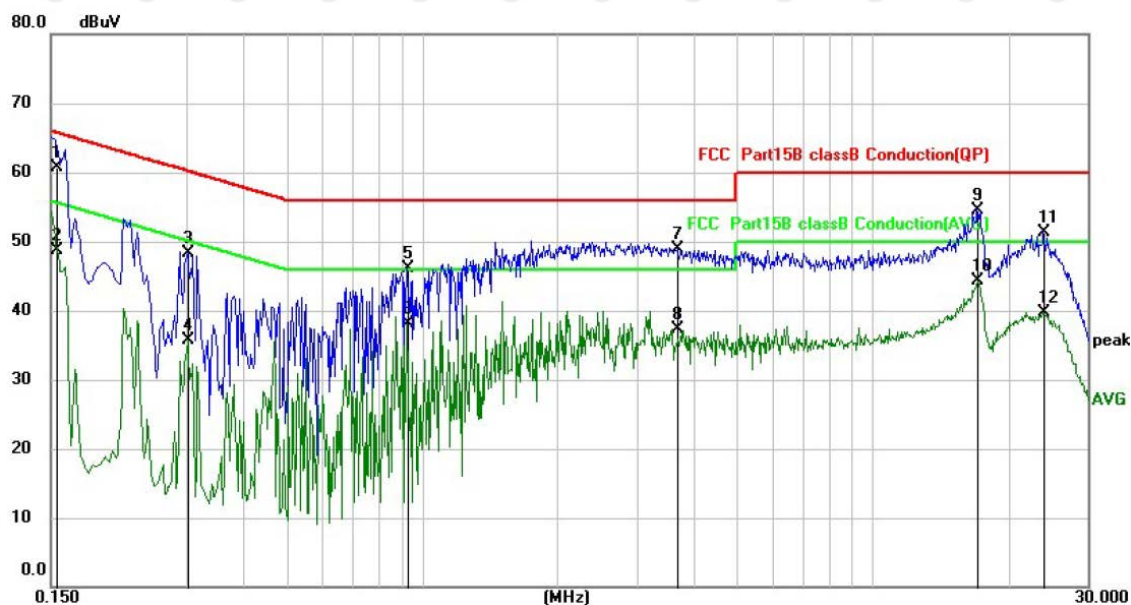


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1547	50.65	10.07	60.72	65.74	-5.02	QP
2		0.1547	38.73	10.07	48.80	55.74	-6.94	AVG
3		0.3020	38.30	10.08	48.38	60.19	-11.81	QP
4		0.3020	25.60	10.08	35.68	50.19	-14.51	AVG
5		0.9260	36.07	10.13	46.20	56.00	-9.80	QP
6		0.9260	28.05	10.13	38.18	46.00	-7.82	AVG
7		3.6980	38.59	10.23	48.82	56.00	-7.18	QP
8		3.6980	27.04	10.23	37.27	46.00	-8.73	AVG
9		17.0739	43.77	10.83	54.60	60.00	-5.40	QP
10		17.0739	33.43	10.83	44.26	50.00	-5.74	AVG
11		23.9220	40.25	11.15	51.40	60.00	-8.60	QP
12		23.9220	28.64	11.15	39.79	50.00	-10.21	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Line
AC 120V 60Hz
the worst: 802.11b (low channel)

BST-0265

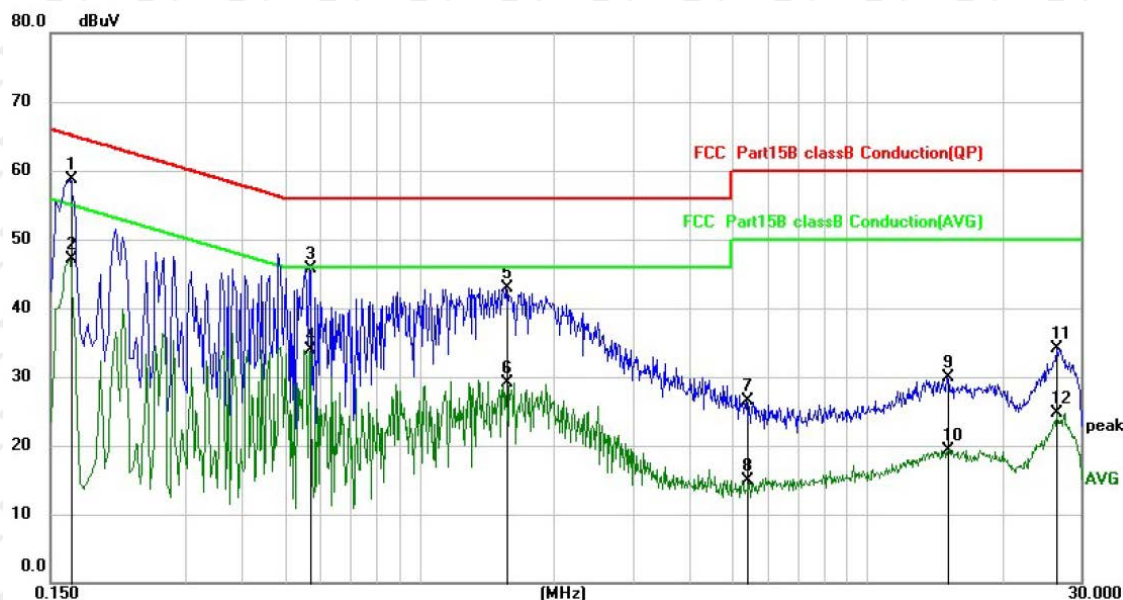


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1660	48.59	10.07	58.66	65.16	-6.50	QP
2		0.1660	37.10	10.07	47.17	55.16	-7.99	AVG
3		0.5700	35.67	10.10	45.77	56.00	-10.23	QP
4		0.5700	23.90	10.10	34.00	46.00	-12.00	AVG
5		1.5660	32.77	10.15	42.92	56.00	-13.08	QP
6		1.5660	18.90	10.15	29.05	46.00	-16.95	AVG
7		5.3620	16.22	10.30	26.52	60.00	-33.48	QP
8		5.3620	4.64	10.30	14.94	50.00	-35.06	AVG
9		15.1340	19.18	10.74	29.92	60.00	-30.08	QP
10		15.1340	8.60	10.74	19.34	50.00	-30.66	AVG
11		26.4300	22.82	11.21	34.03	60.00	-25.97	QP
12		26.4300	13.52	11.21	24.73	50.00	-25.27	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

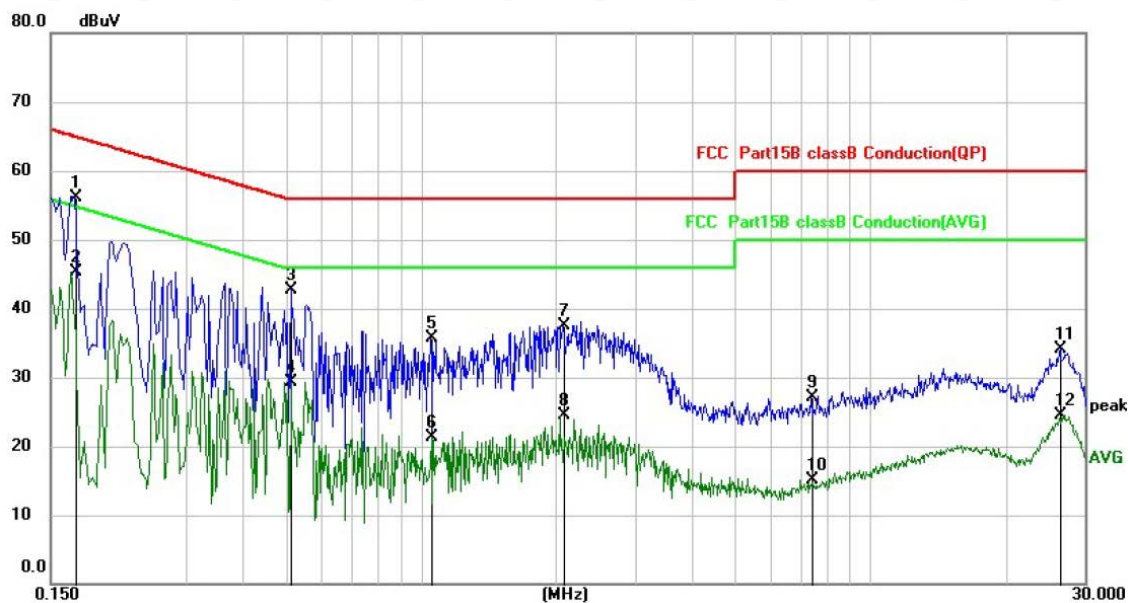

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1700	46.12	10.07	56.19	64.96	-8.77	QP
2		0.1700	35.29	10.07	45.36	54.96	-9.60	AVG
3		0.5140	32.70	10.09	42.79	56.00	-13.21	QP
4		0.5140	19.30	10.09	29.39	46.00	-16.61	AVG
5		1.0580	25.55	10.13	35.68	56.00	-20.32	QP
6		1.0580	11.26	10.13	21.39	46.00	-24.61	AVG
7		2.0660	27.41	10.17	37.58	56.00	-18.42	QP
8		2.0660	14.31	10.17	24.48	46.00	-21.52	AVG
9		7.3940	16.78	10.39	27.17	60.00	-32.83	QP
10		7.3940	4.63	10.39	15.02	50.00	-34.98	AVG
11		26.5060	22.99	11.21	34.20	60.00	-25.80	QP
12		26.5060	13.34	11.21	24.55	50.00	-25.45	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

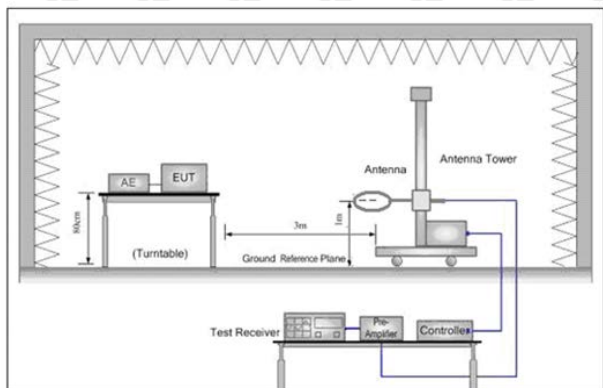


Figure 1. Below 30MHz

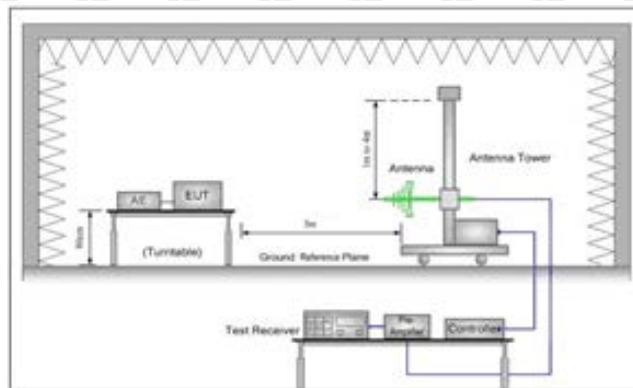


Figure 2. 30MHz to 1GHz

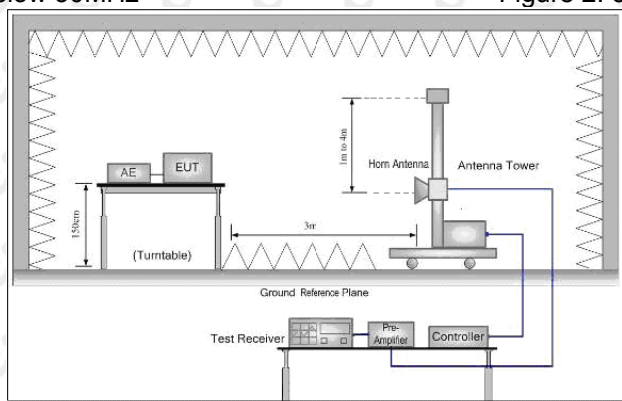


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:
Antenna polarity: H

BST-0266



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		45.2960	30.64	-6.17	24.47	40.00	-15.53	QP
2		146.6304	34.82	-4.73	30.09	43.50	-13.41	QP
3		204.5961	38.76	-6.30	32.46	43.50	-11.04	QP
4		239.5670	43.46	-5.11	38.35	46.00	-7.65	QP
5		300.8943	41.12	-2.51	38.61	46.00	-7.39	QP
6	*	319.9370	41.95	-2.20	39.75	46.00	-6.25	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		66.0342	36.38	-7.56	28.82	40.00	-11.18	QP
2		101.4663	36.44	-7.78	28.66	43.50	-14.84	QP
3	*	147.9214	43.74	-4.60	39.14	43.50	-4.36	QP
4		160.0648	40.70	-3.43	37.27	43.50	-6.23	QP
5		319.9370	34.23	-2.20	32.03	46.00	-13.97	QP
6		442.5177	32.08	-0.12	31.96	46.00	-14.04	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MHz measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Below 1GHz Test Results:

Antenna polarity: H

BST-0264



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	43.3534	39.10	-6.06	33.04	40.00	-6.96	QP
2		47.3255	39.09	-6.29	32.80	40.00	-7.20	QP
3		160.0648	31.71	-3.43	28.28	43.50	-15.22	QP
4		300.8943	39.84	-2.51	37.33	46.00	-8.67	QP
5		319.9370	38.75	-2.20	36.55	46.00	-9.45	QP
6		762.0385	27.72	7.73	35.45	46.00	-10.55	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	46.5030	39.29	-6.24	33.05	40.00	-6.95	QP
2		68.3908	34.10	-7.68	26.42	40.00	-13.58	QP
3		160.0648	38.17	-3.43	34.74	43.50	-8.76	QP
4		285.4768	30.97	-3.17	27.80	46.00	-18.20	QP
5		606.7221	25.65	4.15	29.80	46.00	-16.20	QP
6		900.1474	27.43	9.51	36.94	46.00	-9.06	QP


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MHz measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Below 1GHz Test Results:

Antenna polarity: H

BST-0267

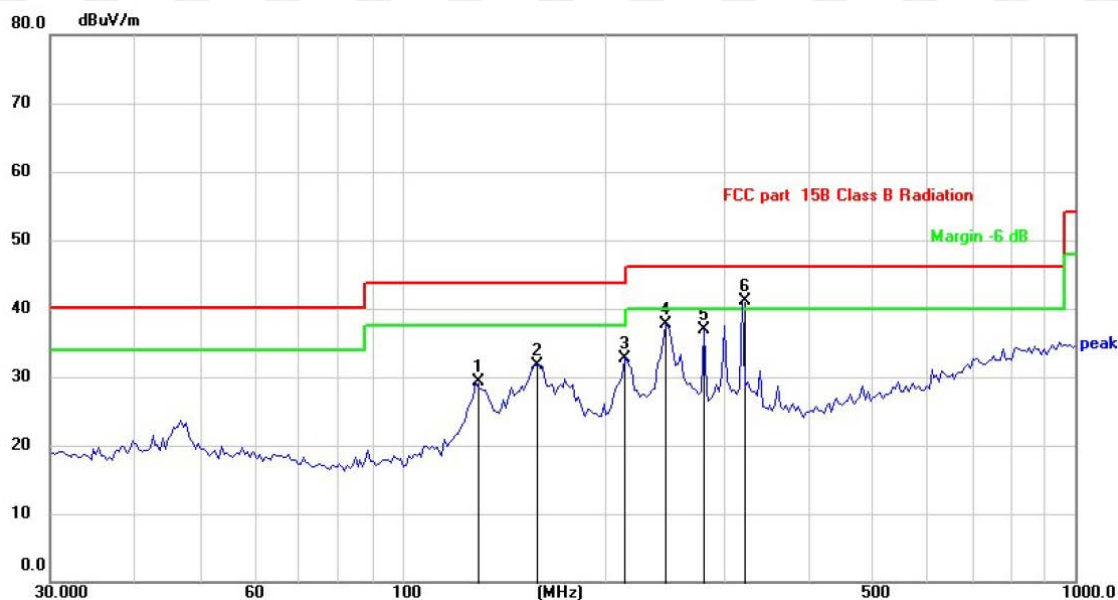

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		128.5630	35.30	-6.02	29.28	43.50	-14.22	QP
2		157.2829	35.48	-3.69	31.79	43.50	-11.71	QP
3		213.7634	38.66	-5.99	32.67	43.50	-10.83	QP
4		245.9509	42.56	-4.89	37.67	46.00	-8.33	QP
5		280.5152	40.35	-3.39	36.96	46.00	-9.04	QP
6	*	319.9370	43.28	-2.20	41.08	46.00	-4.92	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		47.7422	35.19	-6.32	28.87	40.00	-11.13	QP
2		65.4579	36.57	-7.53	29.04	40.00	-10.96	QP
3		133.1511	42.96	-5.84	37.12	43.50	-6.38	QP
4	*	160.0648	43.91	-3.43	40.48	43.50	-3.02	QP
5		319.9370	34.88	-2.20	32.68	46.00	-13.32	QP
6		442.5177	30.46	-0.12	30.34	46.00	-15.66	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MHz measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Below 1GHz Test Results:

Antenna polarity: H

BST-0265



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		46.0971	30.99	-6.22	24.77	40.00	-15.23	QP
2		131.9889	36.82	-5.92	30.90	43.50	-12.60	QP
3		176.2686	31.89	-3.94	27.95	43.50	-15.55	QP
4		233.3487	39.90	-5.32	34.58	46.00	-11.42	QP
5	*	319.9370	42.05	-2.20	39.85	46.00	-6.15	QP
6		884.5029	26.52	9.36	35.88	46.00	-10.12	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	45.6948	39.75	-6.20	33.55	40.00	-6.45	QP
2		133.1511	40.13	-5.84	34.29	43.50	-9.21	QP
3		179.3863	35.55	-4.23	31.32	43.50	-12.18	QP
4		219.4598	35.89	-5.79	30.10	46.00	-15.90	QP
5		319.9370	35.15	-2.20	32.95	46.00	-13.05	QP
6		948.7610	27.09	9.30	36.39	46.00	-9.61	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MHz measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.52	-3.64	61.88	74	-12.12	peak
4824	50.46	-3.64	46.82	54	-7.18	AVG
7236	59.49	-0.95	58.54	74	-15.46	peak
7236	43.77	-0.95	42.82	54	-11.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.89	-3.64	61.25	74	-12.75	peak
4824	49.55	-3.64	45.91	54	-8.09	AVG
7236	58.08	-0.95	57.13	74	-16.87	peak
7236	43.92	-0.95	42.97	54	-11.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.45	-3.51	59.94	74	-14.06	peak
4874	50.62	-3.51	47.11	54	-6.89	AVG
7311	58.96	-0.82	58.14	74	-15.86	peak
7311	44.77	-0.82	43.95	54	-10.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.50	-3.51	61.99	74	-12.01	peak
4874	46.62	-3.51	43.11	54	-10.89	AVG
7311	58.89	-0.82	58.07	74	-15.93	peak
7311	44.45	-0.82	43.63	54	-10.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.52	-3.43	60.09	74	-13.91	peak
4924	46.09	-3.43	42.66	54	-11.34	AVG
7386	57.18	-0.75	56.43	74	-17.57	peak
7386	43.14	-0.75	42.39	54	-11.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.26	-3.43	60.83	74	-13.17	peak
4924	47.99	-3.43	44.56	54	-9.44	AVG
7386	56.37	-0.75	55.62	74	-18.38	peak
7386	42.27	-0.75	41.52	54	-12.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.36	-3.64	60.72	74	-13.28	peak
4824	49.93	-3.64	46.29	54	-7.71	AVG
7236	57.45	-0.95	56.50	74	-17.50	peak
7236	44.57	-0.95	43.62	54	-10.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.03	-3.64	58.39	74	-15.61	peak
4824	47.77	-3.64	44.13	54	-9.87	AVG
7236	58.14	-0.95	57.19	74	-16.81	peak
7236	43.65	-0.95	42.70	54	-11.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.87	-3.51	61.36	74	-12.64	peak
4874	47.77	-3.51	44.26	54	-9.74	AVG
7311	59.85	-0.82	59.03	74	-14.97	peak
7311	45.70	-0.82	44.88	54	-9.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.44	-3.51	59.93	74	-14.07	peak
4874	47.38	-3.51	43.87	54	-10.13	AVG
7311	57.84	-0.82	57.02	74	-16.98	peak
7311	42.72	-0.82	41.90	54	-12.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.57	-3.43	60.14	74	-13.86	peak
4924	48.52	-3.43	45.09	54	-8.91	AVG
7386	58.54	-0.75	57.79	74	-16.21	peak
7386	41.76	-0.75	41.01	54	-12.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.74	-3.43	59.31	74	-14.69	peak
4924	48.17	-3.43	44.74	54	-9.26	AVG
7386	57.73	-0.75	56.98	74	-17.02	peak
7386	42.56	-0.75	41.81	54	-12.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.77	-3.64	60.13	74	-13.87	peak
4824	47.57	-3.64	43.93	54	-10.07	AVG
7236	57.68	-0.95	56.73	74	-17.27	peak
7236	43.95	-0.95	43.00	54	-11.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.28	-3.64	58.64	74	-15.36	peak
4824	48.00	-3.64	44.36	54	-9.64	AVG
7236	57.34	-0.95	56.39	74	-17.61	peak
7236	45.59	-0.95	44.64	54	-9.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.78	-3.51	61.27	74.00	-12.73	peak
4874.00	49.57	-3.51	46.06	54.00	-7.94	AVG
7311.00	56.56	-0.82	55.74	74.00	-18.26	peak
7311.00	45.61	-0.82	44.79	54.00	-9.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.15	-3.51	58.64	74.00	-15.36	peak
4874.00	47.69	-3.51	44.18	54.00	-9.82	AVG
7311.00	59.22	-0.82	58.40	74.00	-15.60	peak
7311.00	43.52	-0.82	42.70	54.00	-11.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.67	-3.43	60.24	74	-13.76	peak
4924	46.28	-3.43	42.85	54	-11.15	AVG
7386	58.13	-0.75	57.38	74	-16.62	peak
7386	43.90	-0.75	43.15	54	-10.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.72	-3.43	61.29	74	-12.71	peak
4924	44.89	-3.43	41.46	54	-12.54	AVG
7386	57.30	-0.75	56.55	74	-17.45	peak
7386	42.85	-0.75	42.10	54	-11.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.04	-3.63	61.41	74	-12.59	peak
4844	49.55	-3.63	45.92	54	-8.08	AVG
7266	59.82	-0.94	58.88	74	-15.12	peak
7266	46.44	-0.94	45.50	54	-8.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.96	-3.63	61.33	74	-12.67	peak
4844	49.02	-3.63	45.39	54	-8.61	AVG
7266	58.19	-0.94	57.25	74	-16.75	peak
7266	45.19	-0.94	44.25	54	-9.75	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.37	-3.51	59.86	74	-14.14	peak
4874	48.76	-3.51	45.25	54	-8.75	AVG
7311	59.60	-0.82	58.78	74	-15.22	peak
7311	46.33	-0.82	45.51	54	-8.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.50	-3.51	42.99	54	-11.01	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.29	-0.82	42.47	54	-11.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.57	-3.43	59.14	74	-14.86	peak
4904	47.70	-3.43	44.27	54	-9.73	AVG
7356	57.59	-0.75	56.84	74	-17.16	peak
7356	42.95	-0.75	42.20	54	-11.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.57	-3.43	61.14	74	-12.86	peak
4904	47.78	-3.43	44.35	54	-9.65	AVG
7356	58.39	-0.75	57.64	74	-16.36	peak
7356	44.77	-0.75	44.02	54	-9.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.59	-5.81	51.78	74	-22.22	
2390	/	-5.81	/	54	/	AVG
2399	64.60	-5.84	58.76	74	-15.24	peak
2399	49.02	-5.84	43.18	54	-10.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.46	-5.81	50.65	74	-23.35	
2390	/	-5.81	/	54	/	AVG
2399	62.03	-5.84	56.19	74	-17.81	peak
2399	46.26	-5.84	40.42	54	-13.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.25	-5.65	51.60	74	-22.40	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.99	-5.65	51.34	74	-22.66	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.80	-5.81	52.99	74	-21.01	peak
2390	/	-5.81	/	54	/	AVG
2399	62.32	-5.84	56.48	74	-17.52	peak
2399	47.42	-5.84	41.58	54	-12.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.18	-5.81	50.37	74	-23.63	peak
2390	/	-5.81	/	54	/	AVG
2399	62.22	-5.84	56.38	74	-17.62	peak
2399	46.59	-5.84	40.75	54	-13.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.16	-5.65	51.51	74	-22.49	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.74	-5.65	51.09	74	-22.91	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.05	-5.81	51.24	74	-22.76	peak
2390	/	-5.81	/	54	/	AVG
2399	63.68	-5.84	57.84	74	-16.16	peak
2399	47.59	-5.84	41.75	54	-12.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.48	-5.81	51.67	74	-22.33	peak
2390	/	-5.81	/	54	/	AVG
2399	60.97	-5.84	55.13	74	-18.87	peak
2399	48.21	-5.84	42.37	54	-11.63	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.97	-5.65	51.32	74	-22.68	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.71	-5.65	51.06	74	-22.94	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.69	-5.81	51.88	74	-22.12	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.89	-5.81	52.08	74	-21.92	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.14	-5.65	52.49	74	-21.51	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.24	-5.65	49.59	74	-24.41	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

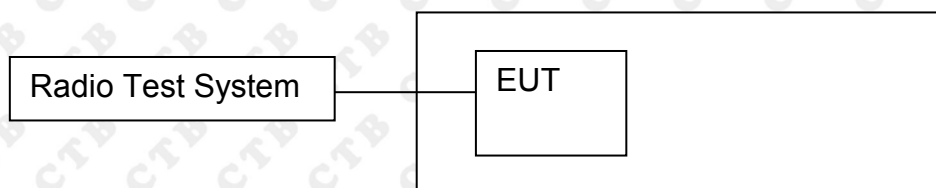

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result





BAND EDGE Graphs

802.11g/LCH

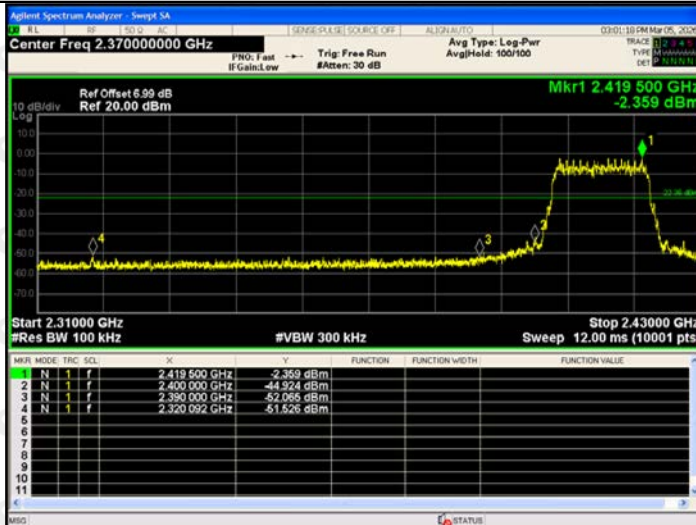

802.11g/HCH

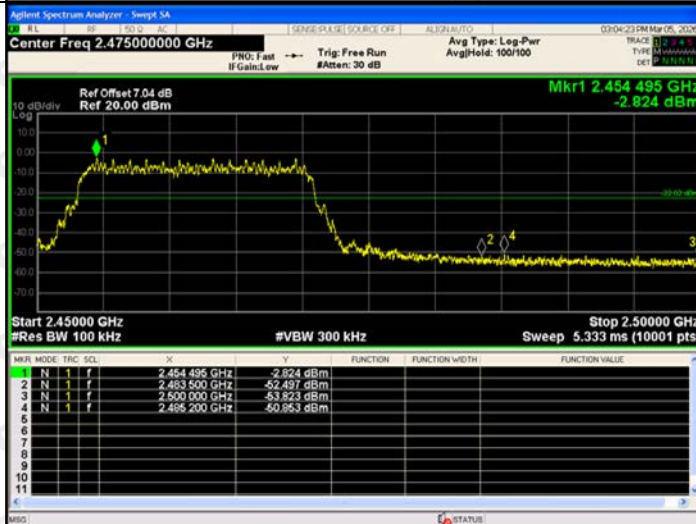


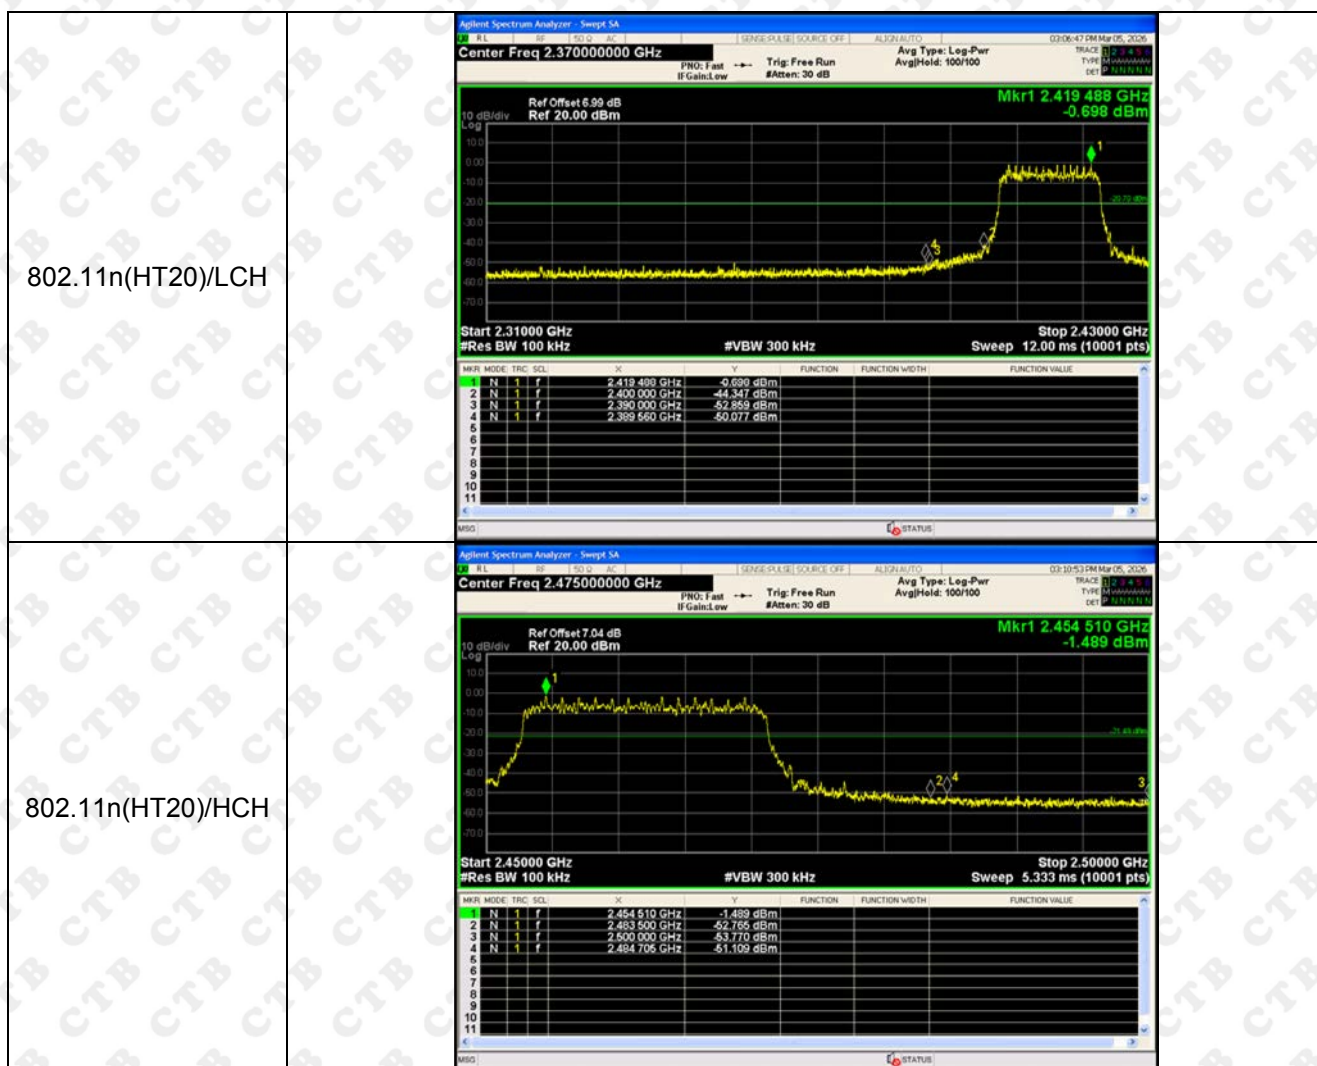




RF Conducted Spurious Emissions Graphs


802.11b/LCH

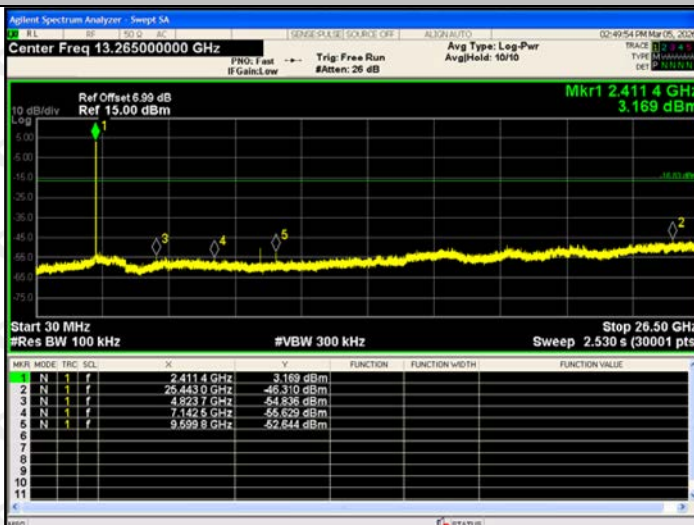

802.11b/MCH

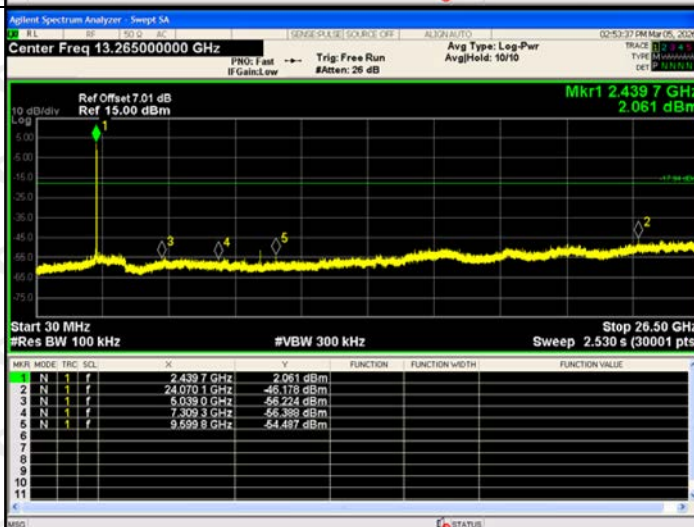


802.11b/HCH

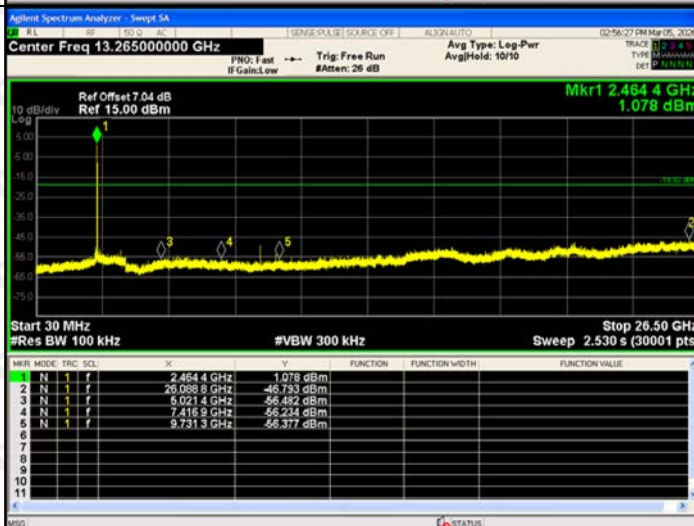


RF Conducted Spurious Emissions Graphs


802.11g/LCH

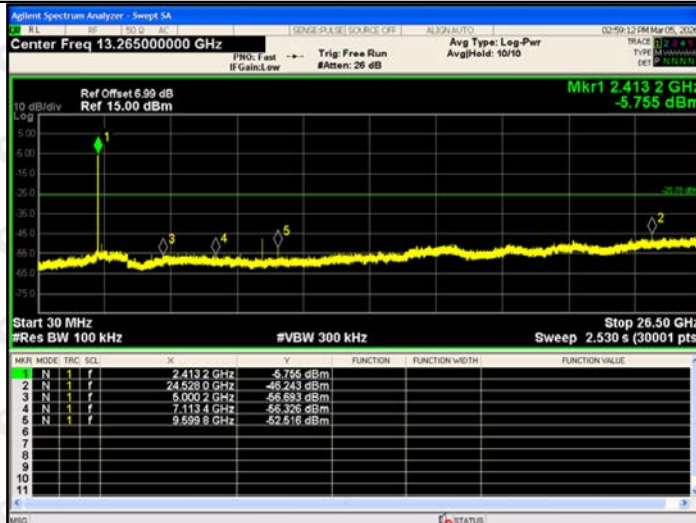

802.11g/MCH

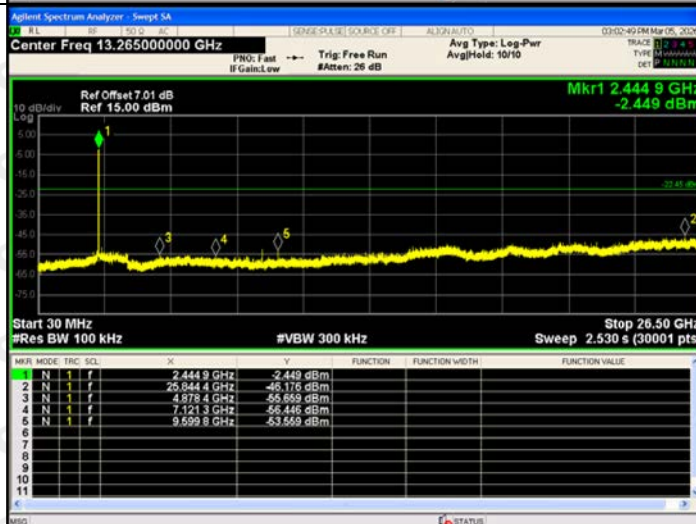


802.11g/HCH

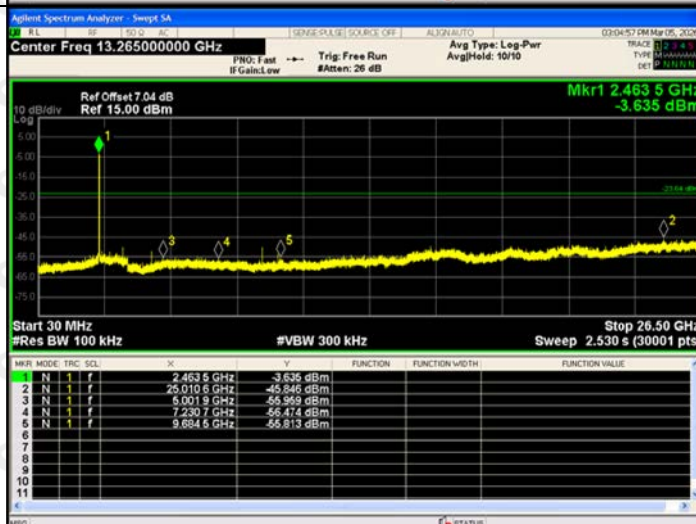


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

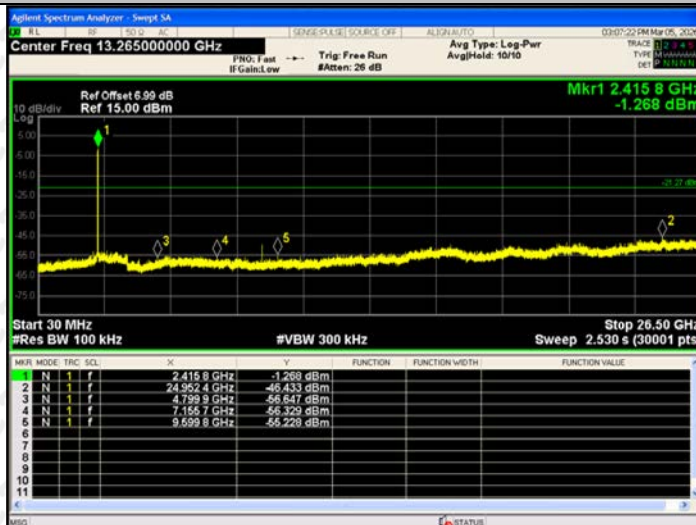


802.11n(HT20)/MCH

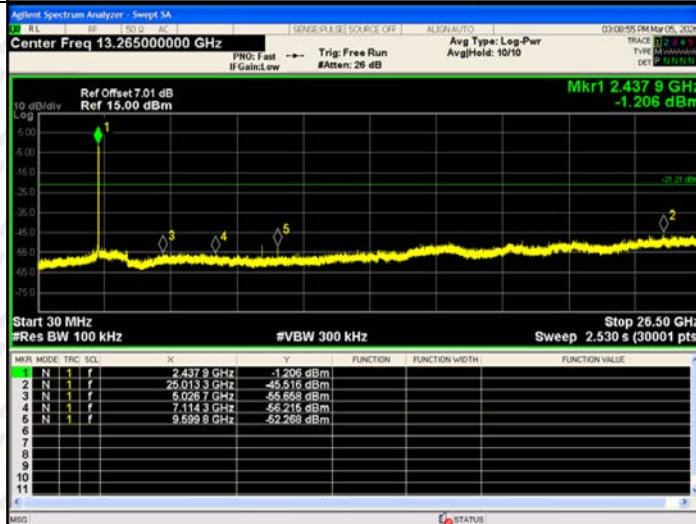

802.11n(HT20)/HCH

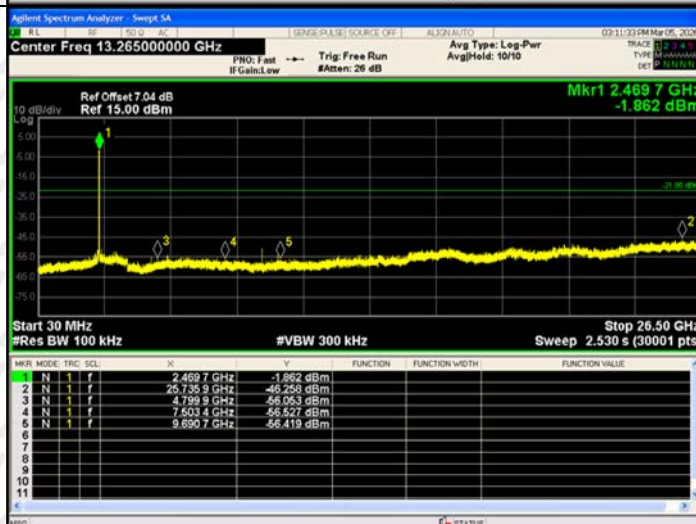

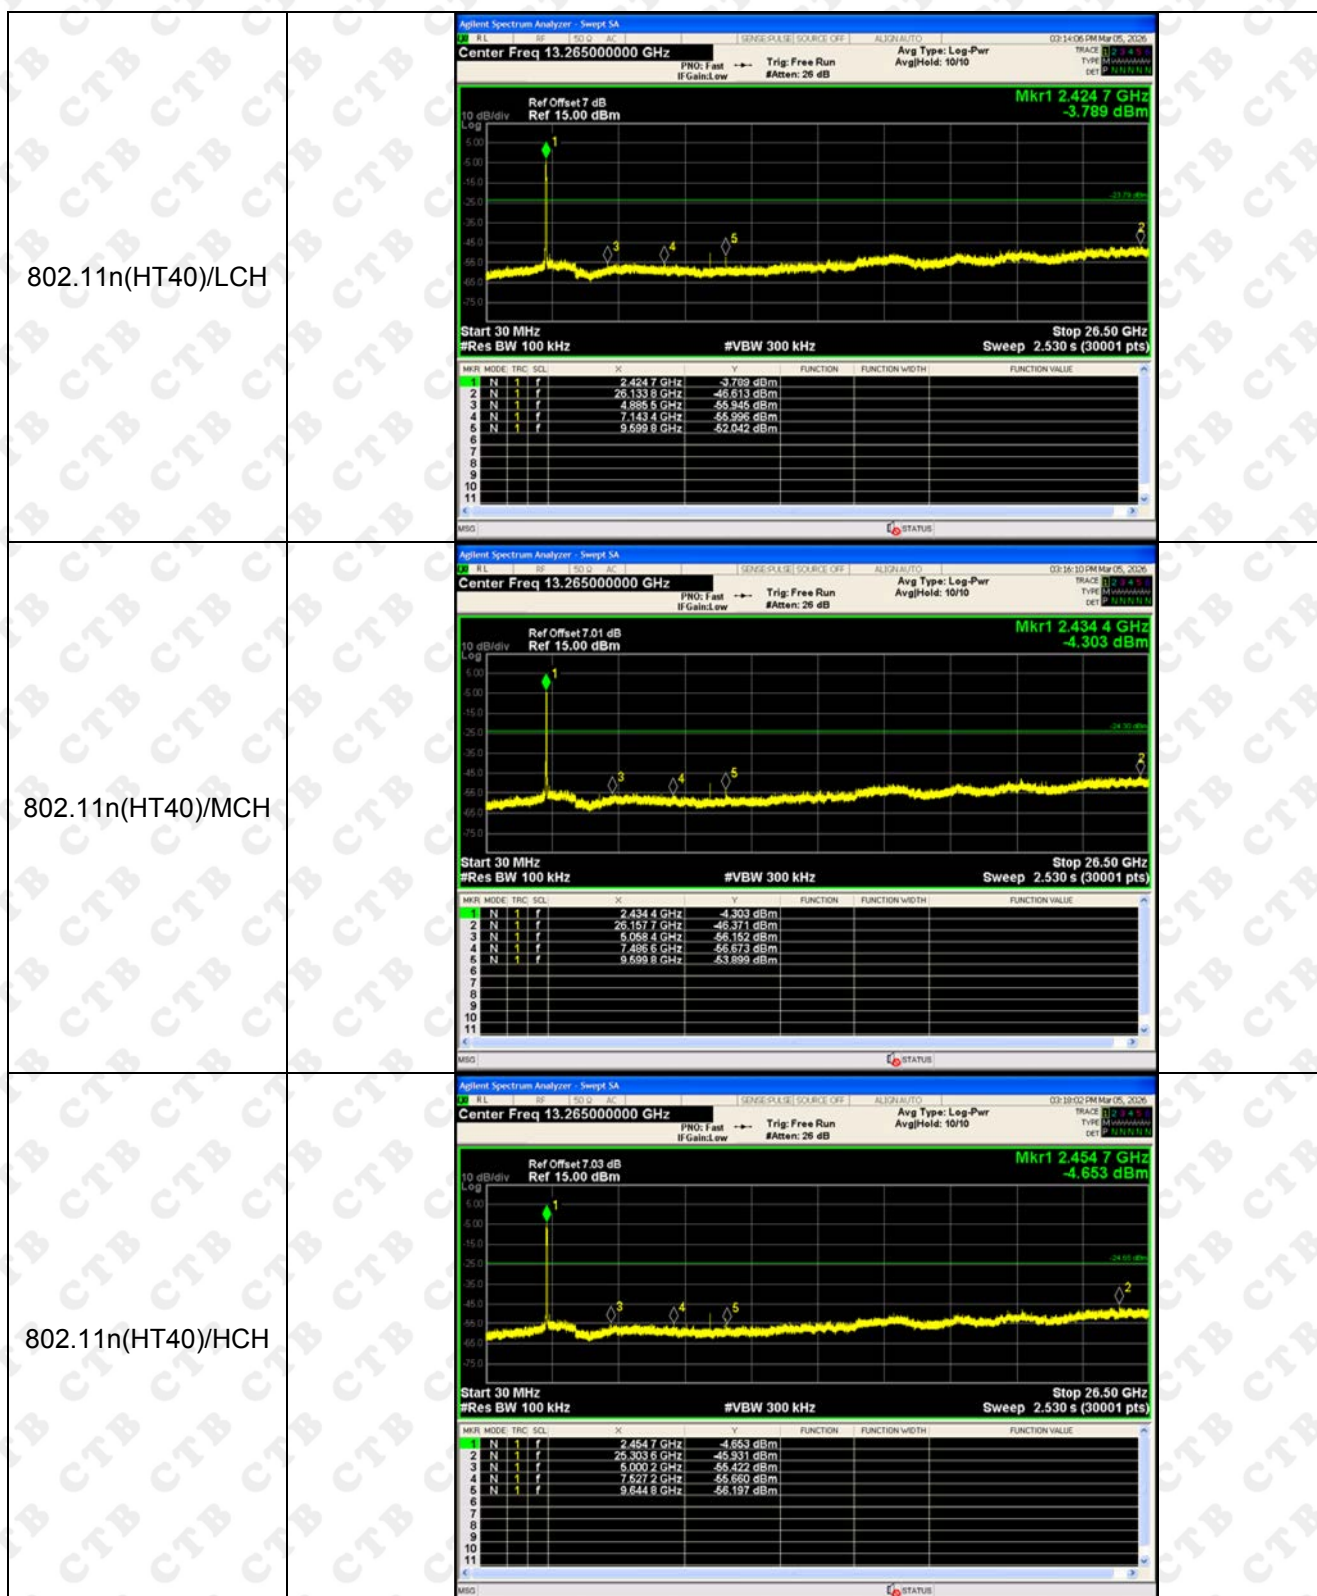

9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	18.99	30	PASS
	MCH	18.433	30	PASS
	HCH	17.701	30	PASS
802.11g	LCH	16.144	30	PASS
	MCH	16.347	30	PASS
	HCH	15.739	30	PASS
802.11n(HT20)	LCH	17.564	30	PASS
	MCH	17.231	30	PASS
	HCH	16.659	30	PASS
802.11n(HT40)	LCH	16.689	30	PASS
	MCH	16.537	30	PASS
	HCH	16.065	30	PASS

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

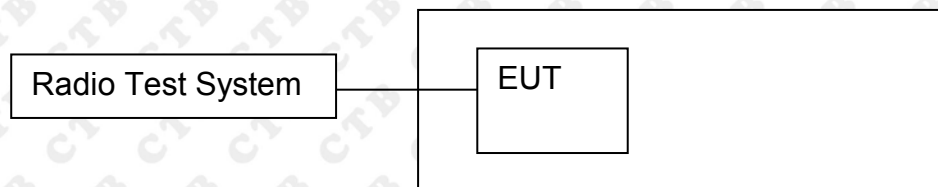

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.029	500	PASS
	MCH	9.25	500	PASS
	HCH	8.93	500	PASS
802.11g	LCH	17.277	500	PASS
	MCH	17.382	500	PASS
	HCH	17.285	500	PASS
802.11n(HT20)	LCH	17.952	500	PASS
	MCH	17.995	500	PASS
	HCH	17.981	500	PASS
802.11n(HT40)	LCH	35.367	500	PASS
	MCH	35.518	500	PASS
	HCH	35.327	500	PASS

Test Graph:



802.11g/LCH

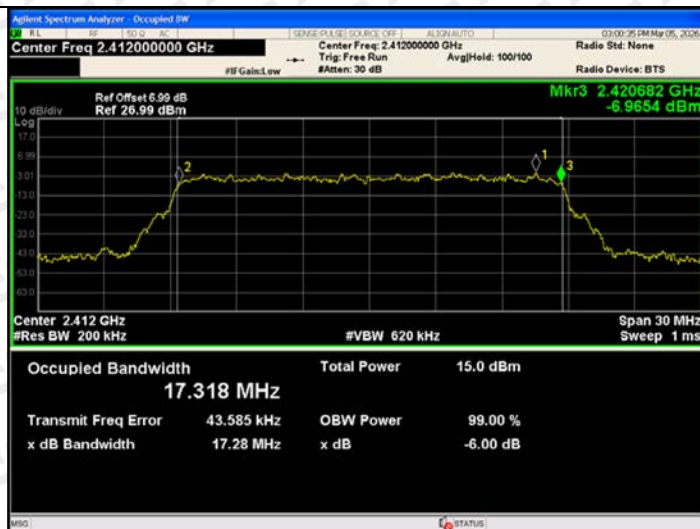

802.11g/MCH



802.11g/HCH




802.11n(HT20)/LCH	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 6.99 dB Ref: 26.99 dBm Occupied Bandwidth: 18.087 MHz Total Power: 16.5 dBm Transmit Freq Error: -23.258 kHz x dB Bandwidth: 17.95 MHz Mkr3: 2.420953 GHz -7.8640 dBm
802.11n(HT20)/MCH	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 7.01 dB Ref: 27.01 dBm Occupied Bandwidth: 18.073 MHz Total Power: 16.3 dBm Transmit Freq Error: -40.930 kHz x dB Bandwidth: 17.99 MHz Mkr3: 2.445956 GHz -7.5428 dBm
802.11n(HT20)/HCH	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Occupied Bandwidth: 18.095 MHz Total Power: 15.6 dBm Transmit Freq Error: -32.983 kHz x dB Bandwidth: 17.98 MHz Mkr3: 2.470957 GHz -8.7142 dBm

802.11n(HT40)/LCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.0 dB Ref 27.00 dBm Mkr3 2.439736 GHz -5.6885 dBm Center 2.422 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 35.884 MHz Total Power 15.9 dBm Transmit Freq Error 52.122 kHz OBW Power 99.00 % x dB Bandwidth 35.37 MHz x dB -6.00 dB
802.11n(HT40)/MCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.454781 GHz -5.9582 dBm Center 2.437 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 35.921 MHz Total Power 15.6 dBm Transmit Freq Error 21.576 kHz OBW Power 99.00 % x dB Bandwidth 35.52 MHz x dB -6.00 dB
802.11n(HT40)/HCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.469678 GHz -5.9397 dBm Center 2.452 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 35.923 MHz Total Power 15.1 dBm Transmit Freq Error 14.872 kHz OBW Power 99.00 % x dB Bandwidth 35.33 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

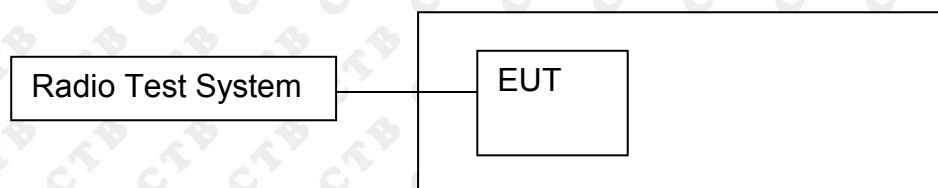

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3kHz]	Limit(8 dBm (in any 3kHz))	Verdict
802.11b	LCH	-10.033	8	PASS
	MCH	-11.206	8	PASS
	HCH	-12.158	8	PASS
802.11g	LCH	-16.46	8	PASS
	MCH	-16.195	8	PASS
	HCH	-16.657	8	PASS
802.11n(HT20)	LCH	-13.988	8	PASS
	MCH	-14.377	8	PASS
	HCH	-14.97	8	PASS
802.11n(HT40)	LCH	-15.199	8	PASS
	MCH	-15.474	8	PASS
	HCH	-15.871	8	PASS


Test Graph

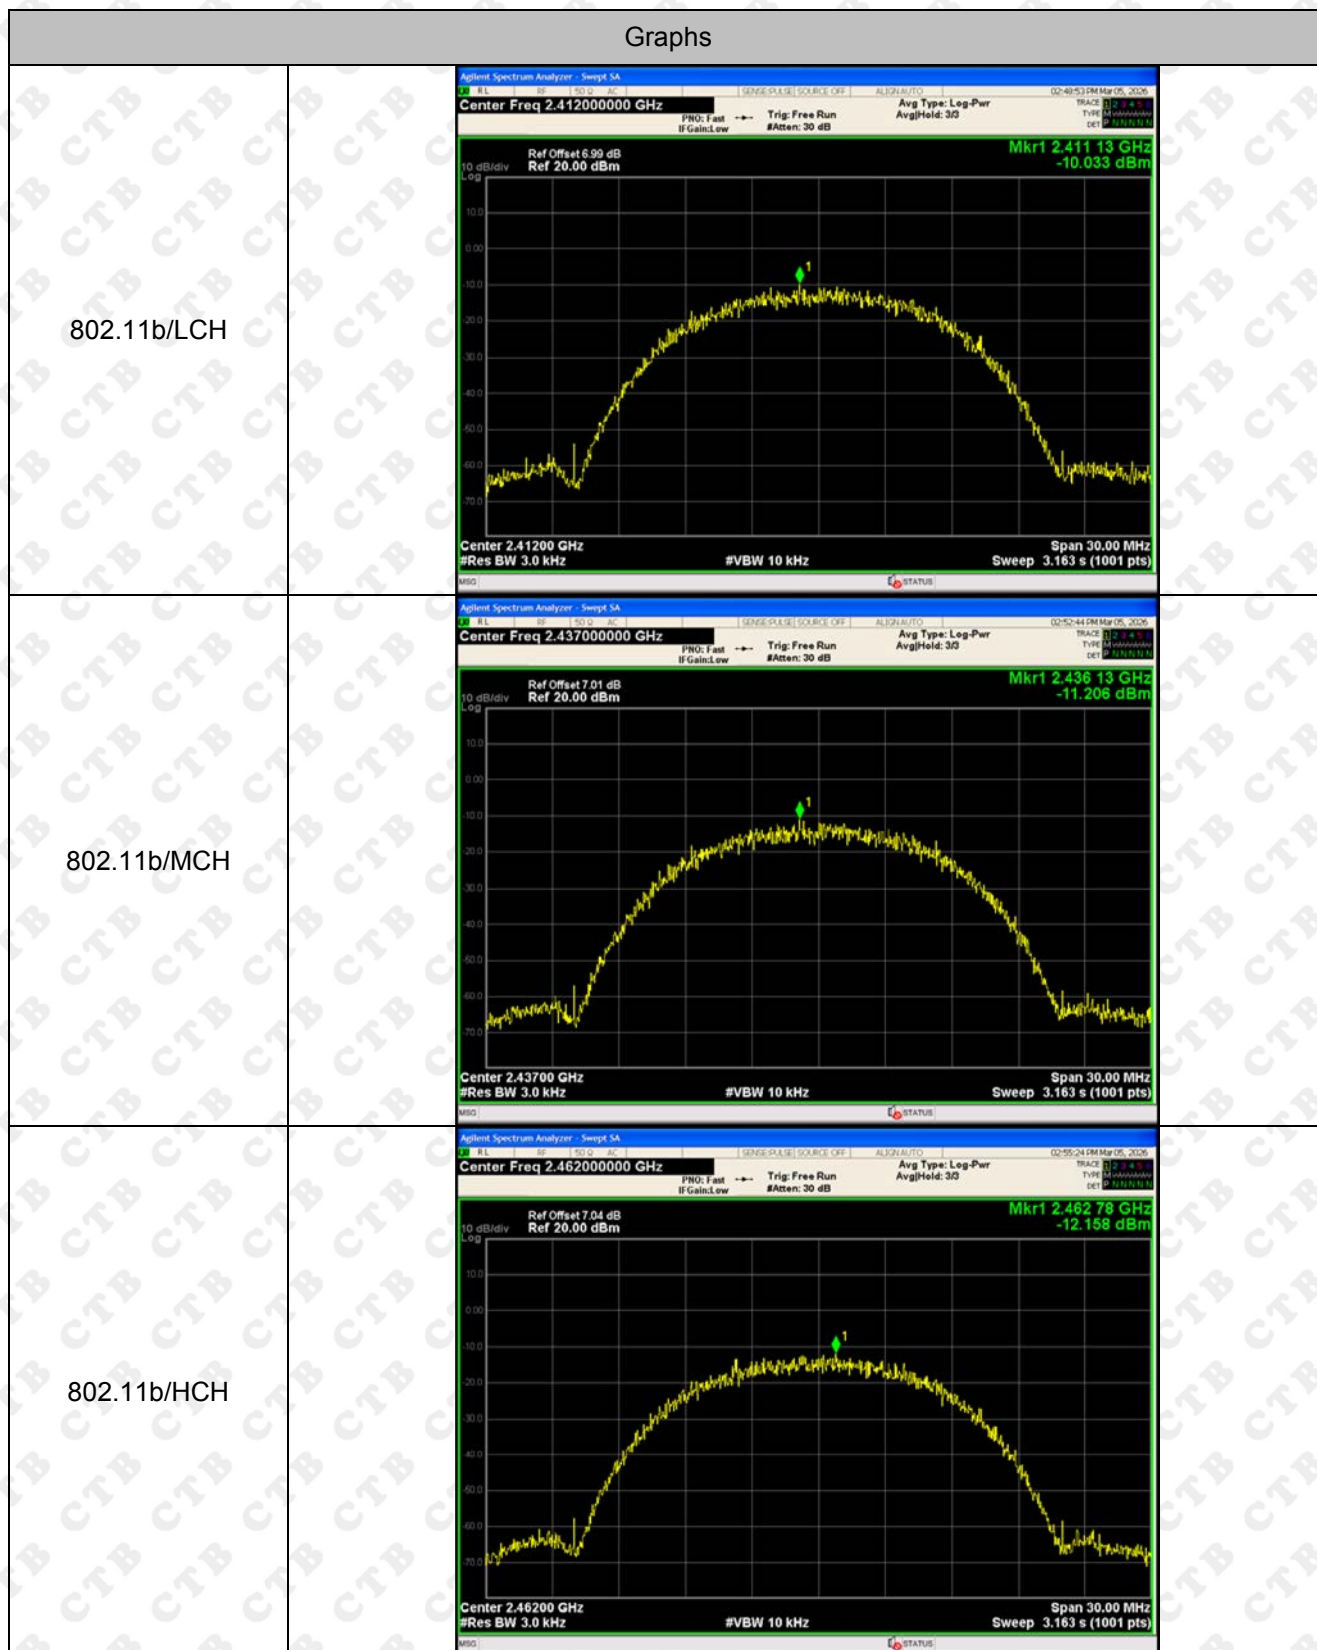


802.11g/LCH

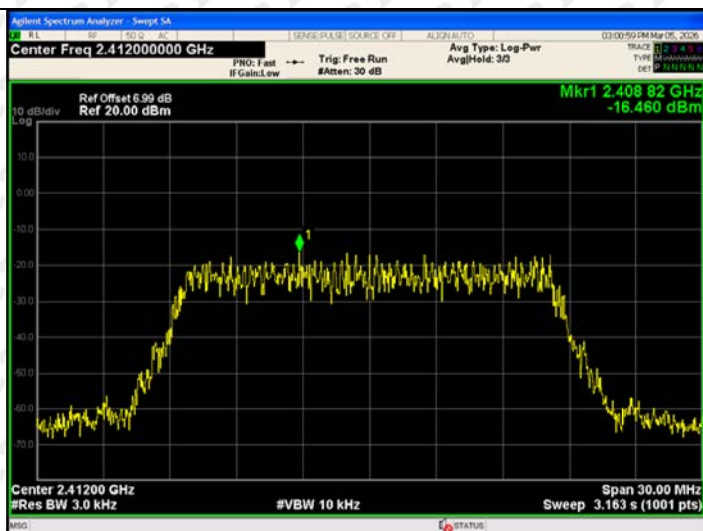





802.11g/MCH

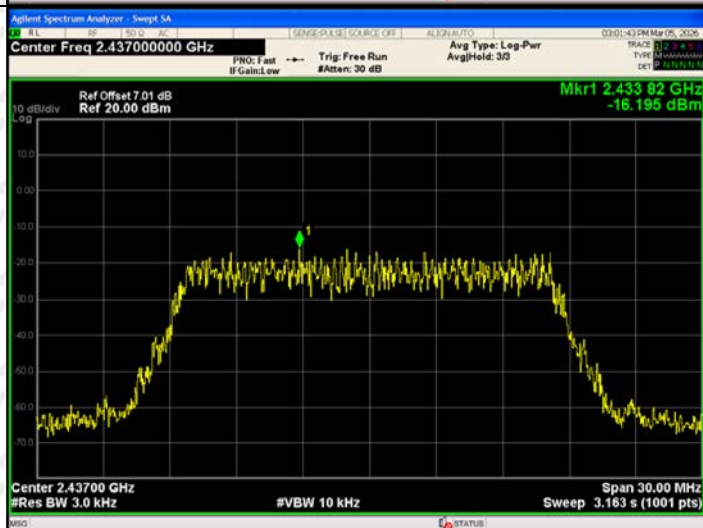

802.11g/HCH

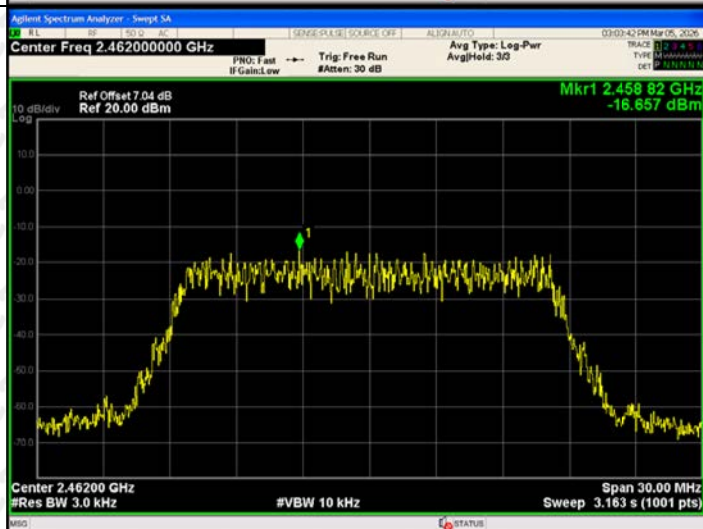

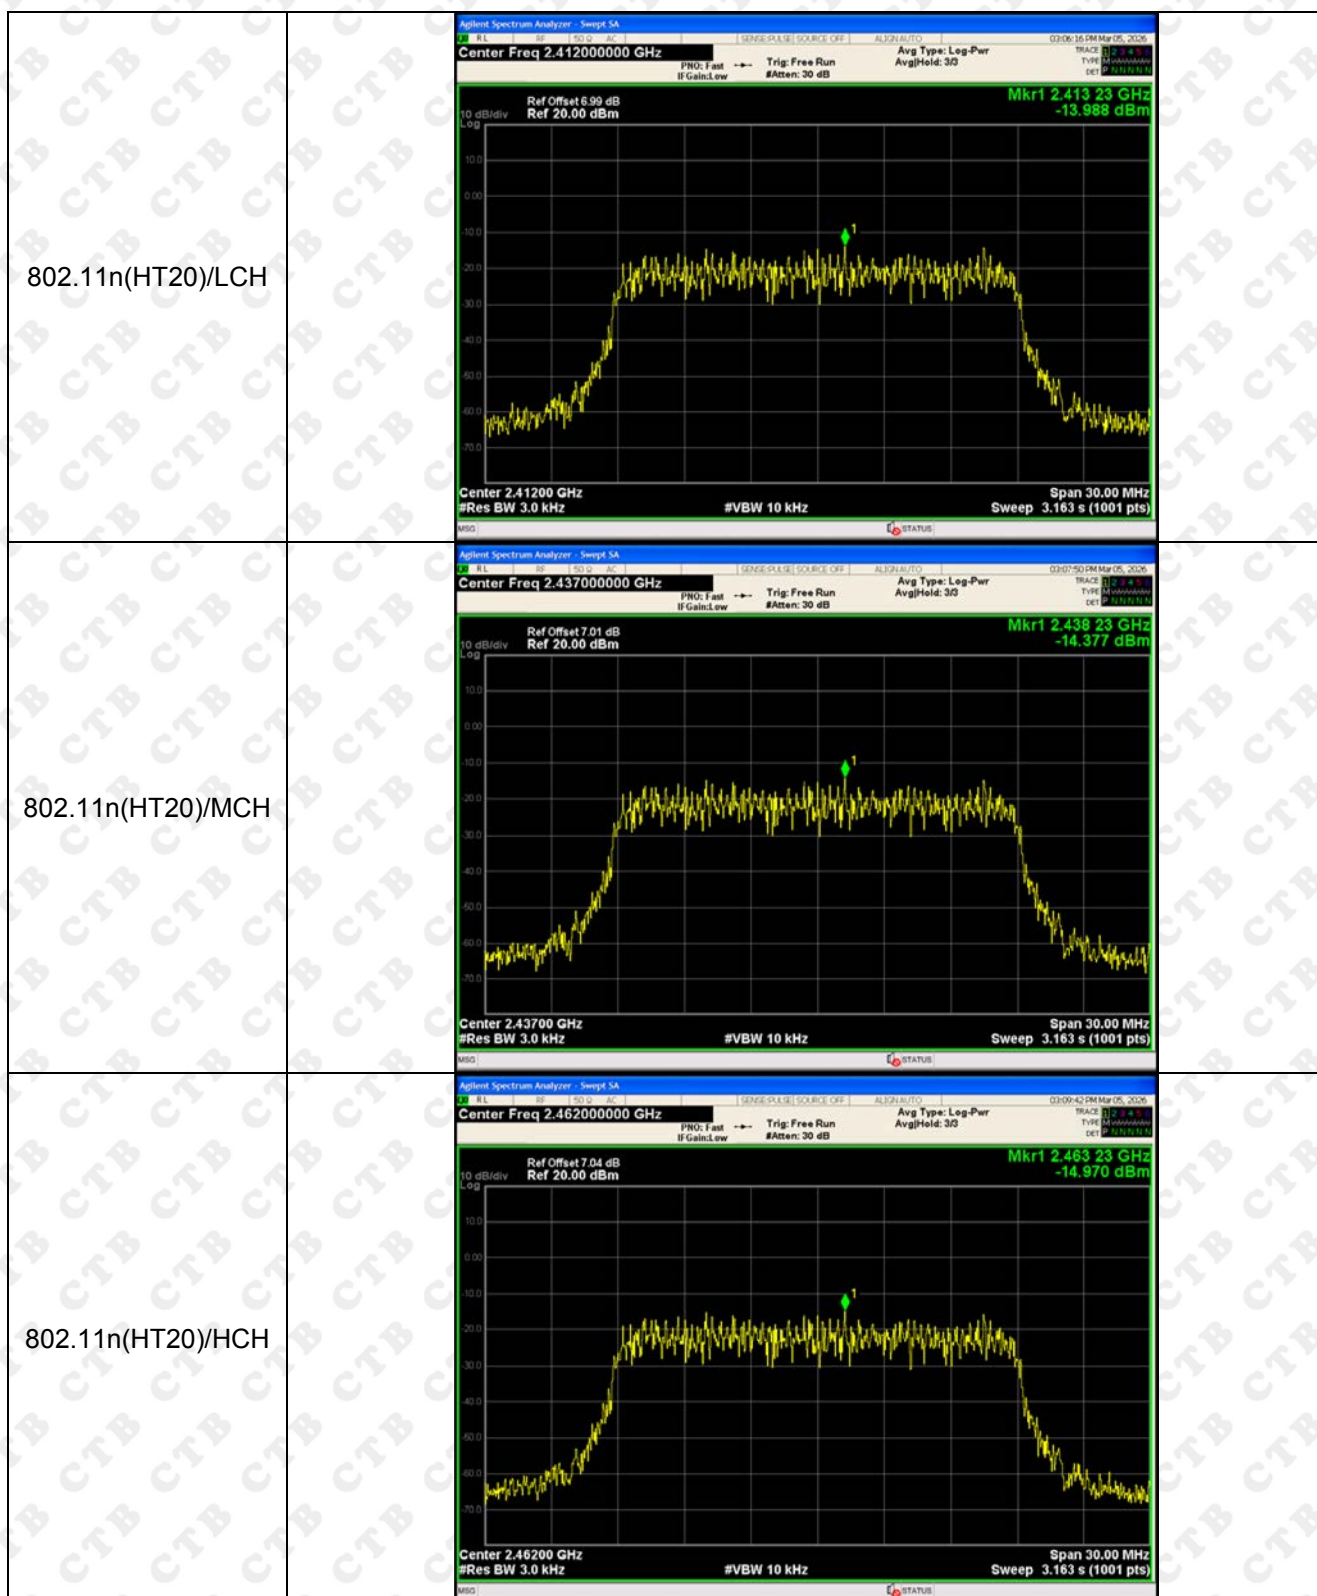

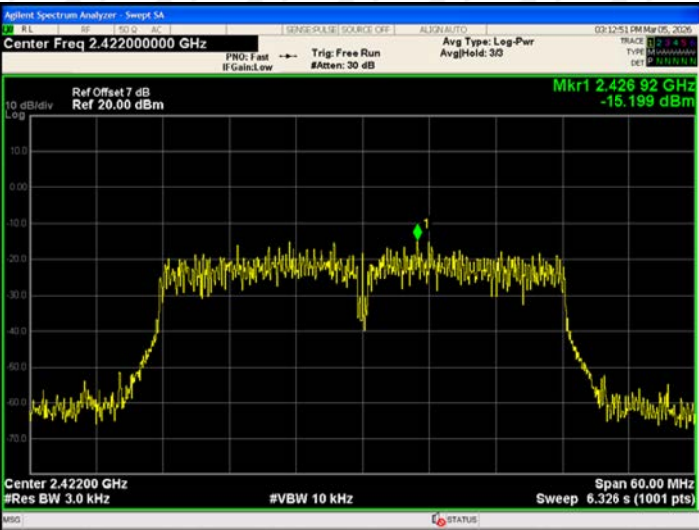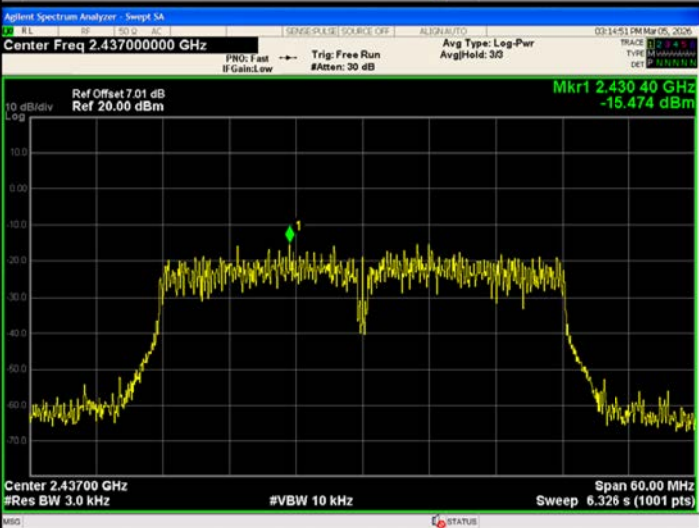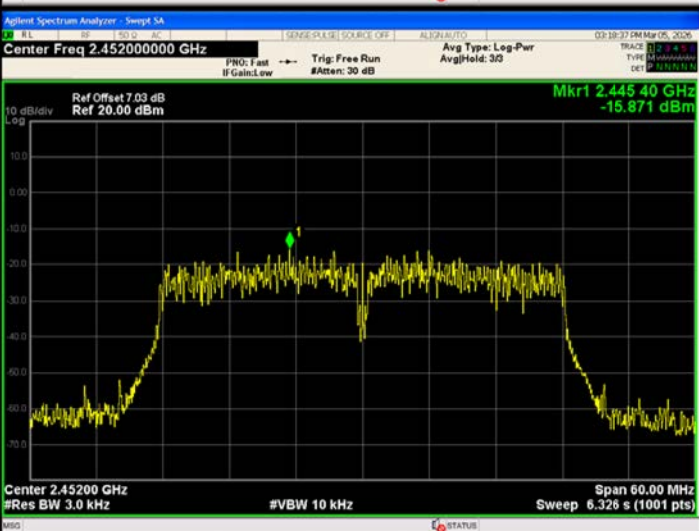802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.426 92 GHz -15.199 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.437000000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.430 40 GHz -15.474 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.452000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.445 40 GHz -15.871 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:


The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is 3.17dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission
BST-0266

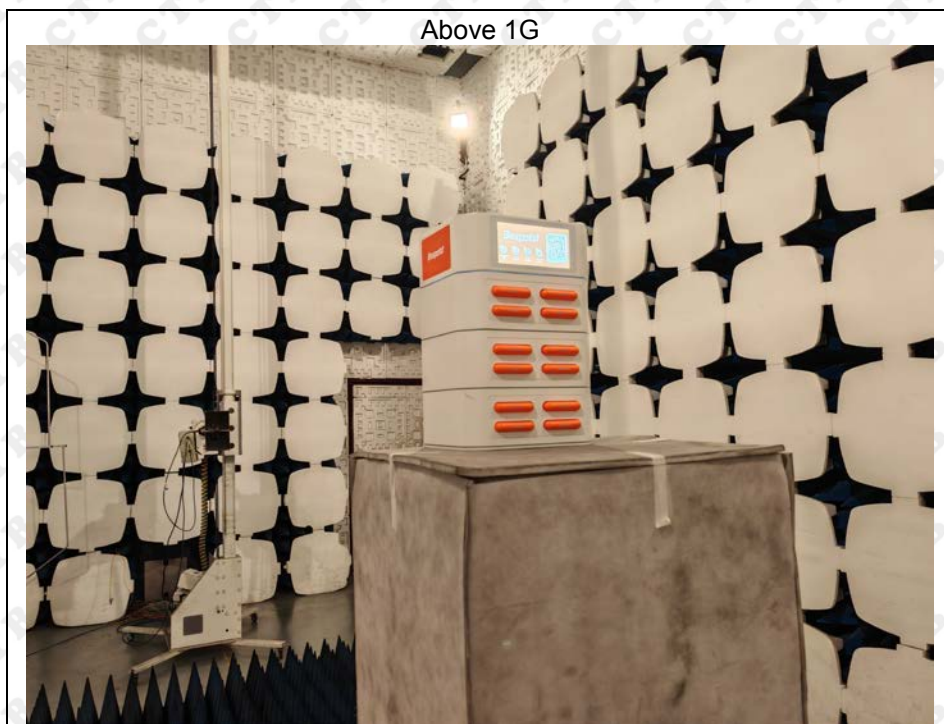

Conducted Emission



Radiated Emission
BST-0264

Below 1G



Above 1G



Conducted Emission




Radiated Emission
BST-0267

Below 1G



Above 1G

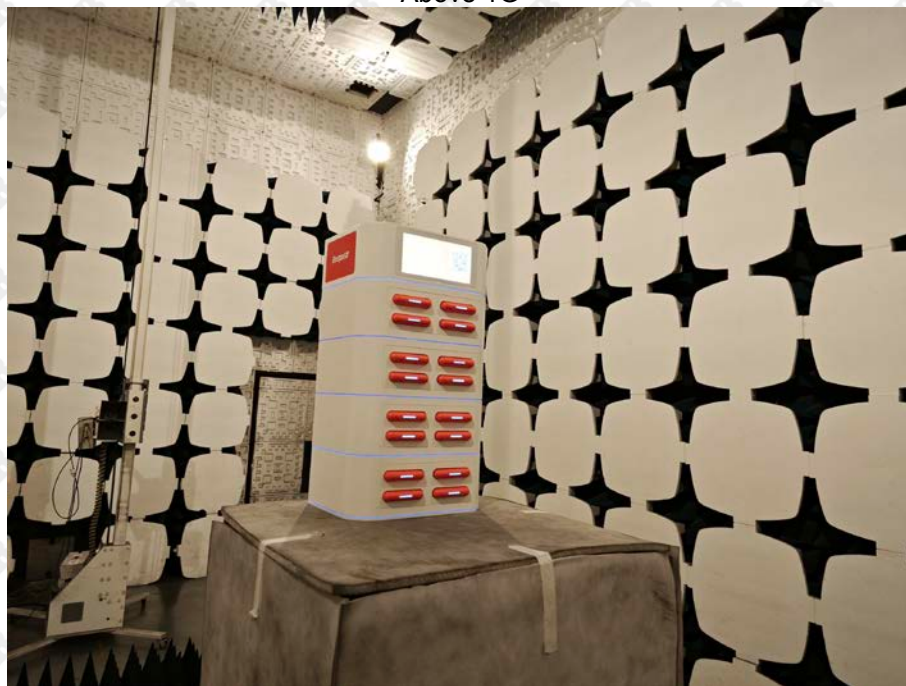


Conducted Emission




Radiated Emission
BST-0265

Below 1G

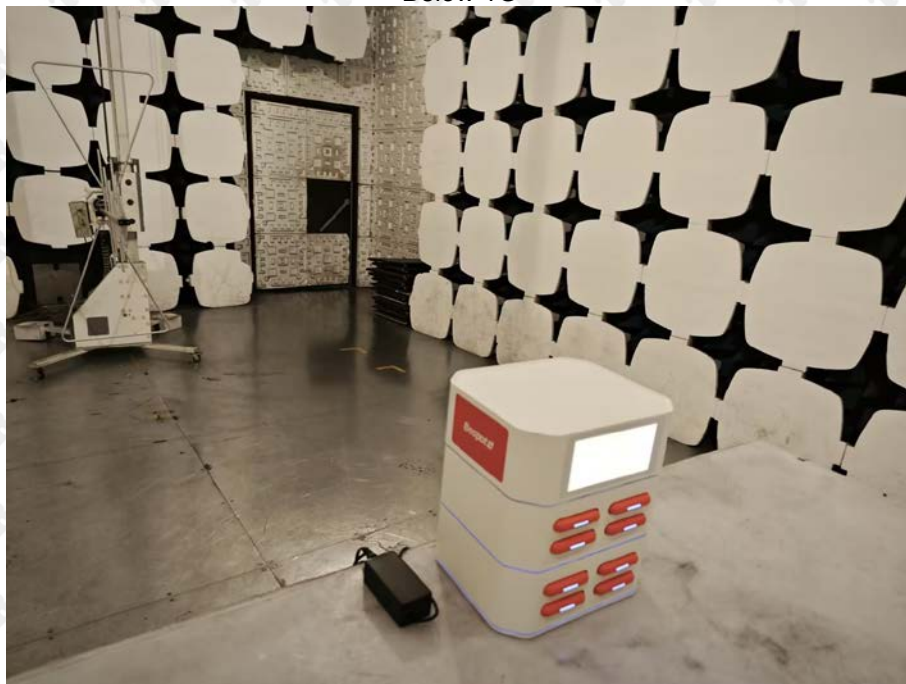

Above 1G

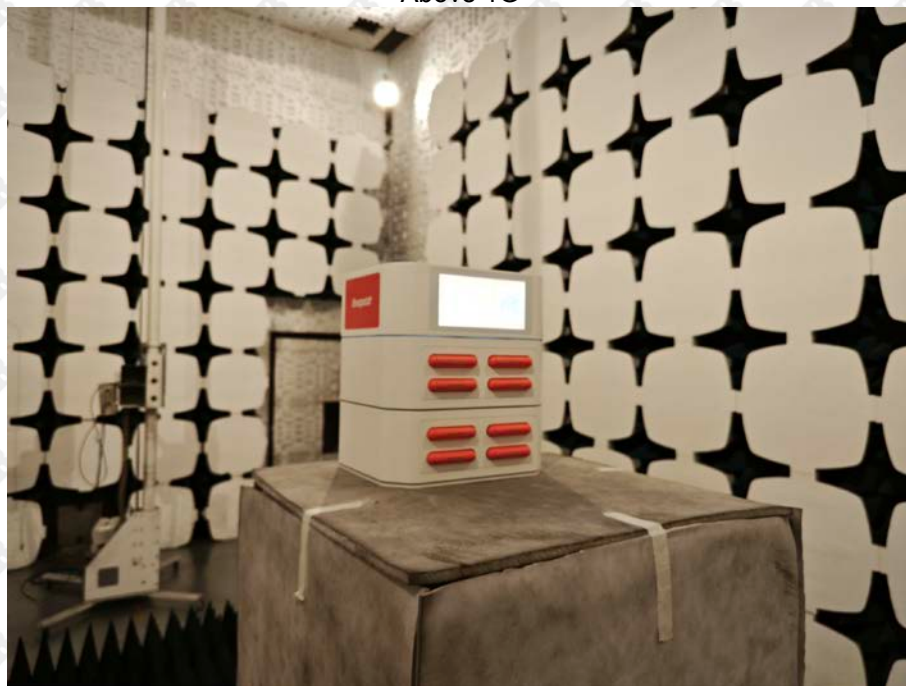

Conducted Emission



***** END OF REPORT *****