




WIFI 5.8G


Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	90.47	0.43	0.72
NVNT	a	5785	Ant1	90.61	0.43	0.72
NVNT	a	5825	Ant1	99.06	0.04	0.67
NVNT	n20	5745	Ant1	88.94	0.51	0.85
NVNT	n20	5785	Ant1	89.08	0.5	0.85
NVNT	n20	5825	Ant1	89.01	0.51	0.85
NVNT	n40	5755	Ant1	80.8	0.93	1.69
NVNT	n40	5795	Ant1	97	0.13	100
NVNT	ac20	5745	Ant1	89.25	0.49	0.84
NVNT	ac20	5785	Ant1	89.08	0.5	0.84
NVNT	ac20	5825	Ant1	89.11	0.5	0.84
NVNT	ac40	5755	Ant1	80.3	0.95	1.69
NVNT	ac40	5795	Ant1	80.38	0.95	1.69
NVNT	ac80	5775	Ant1	68.38	1.65	3.45

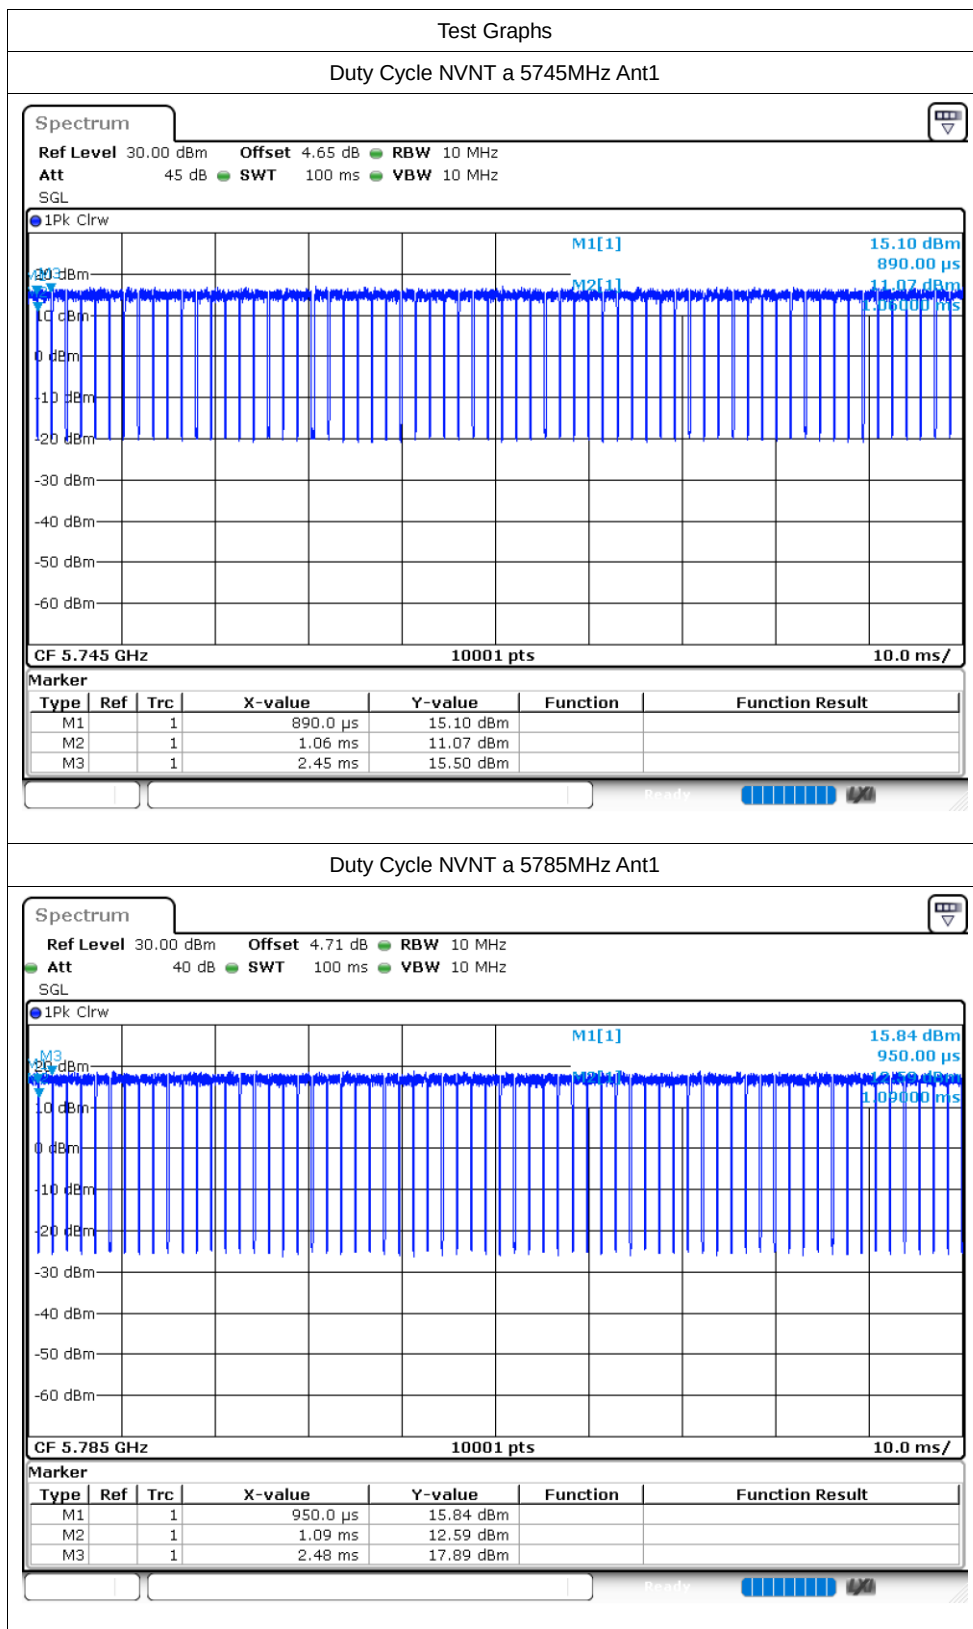


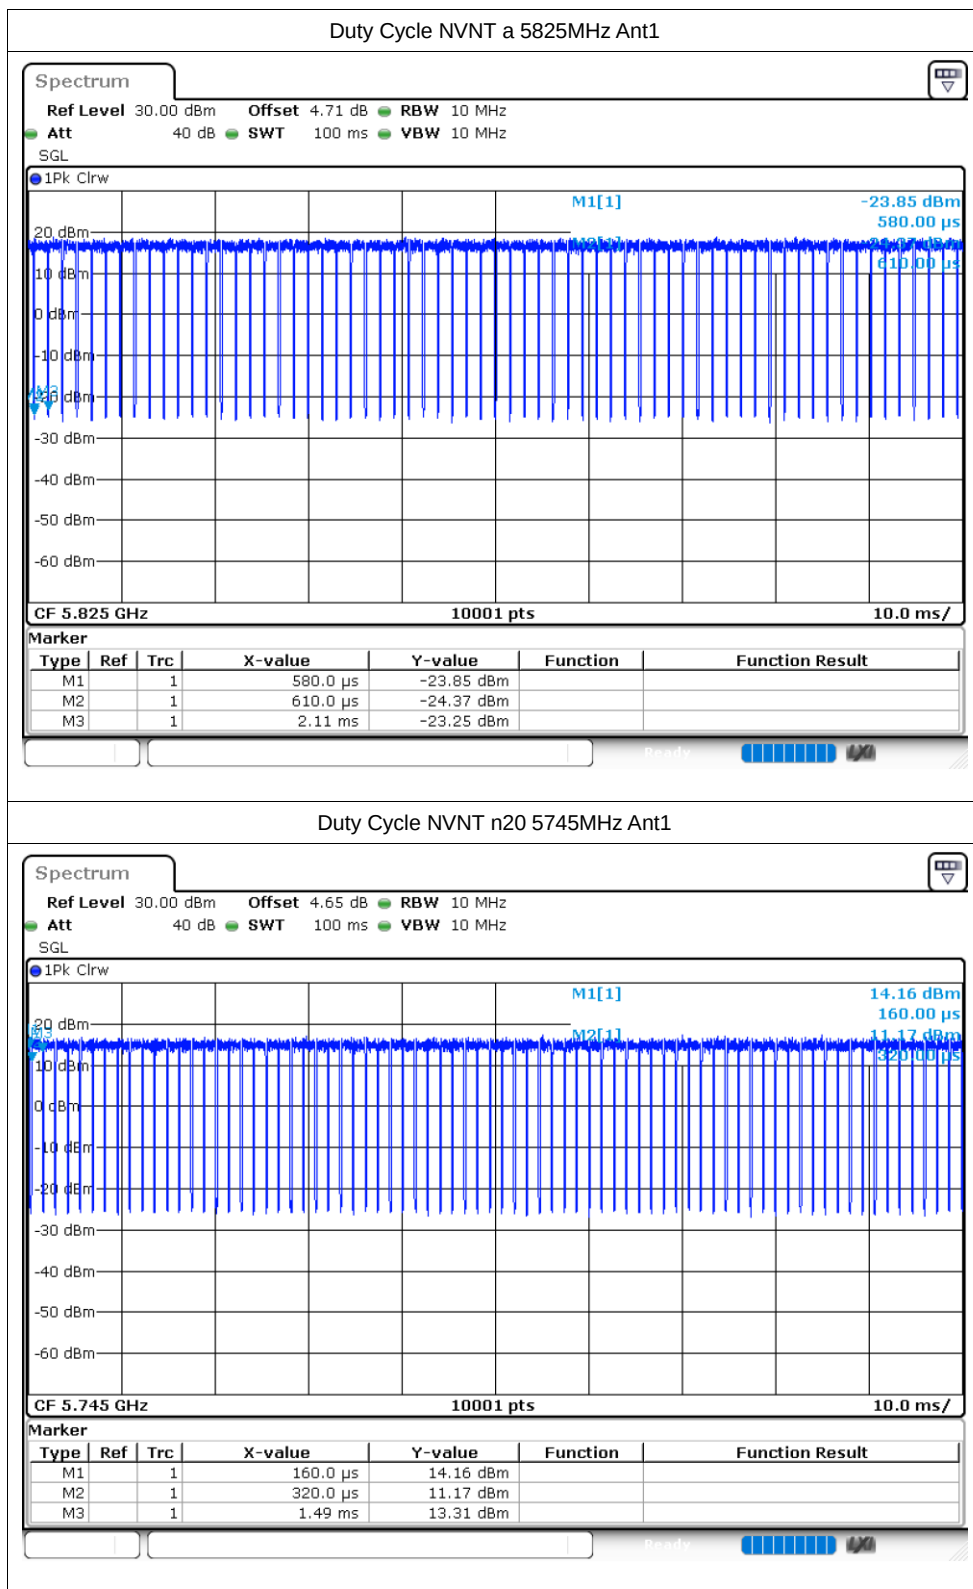


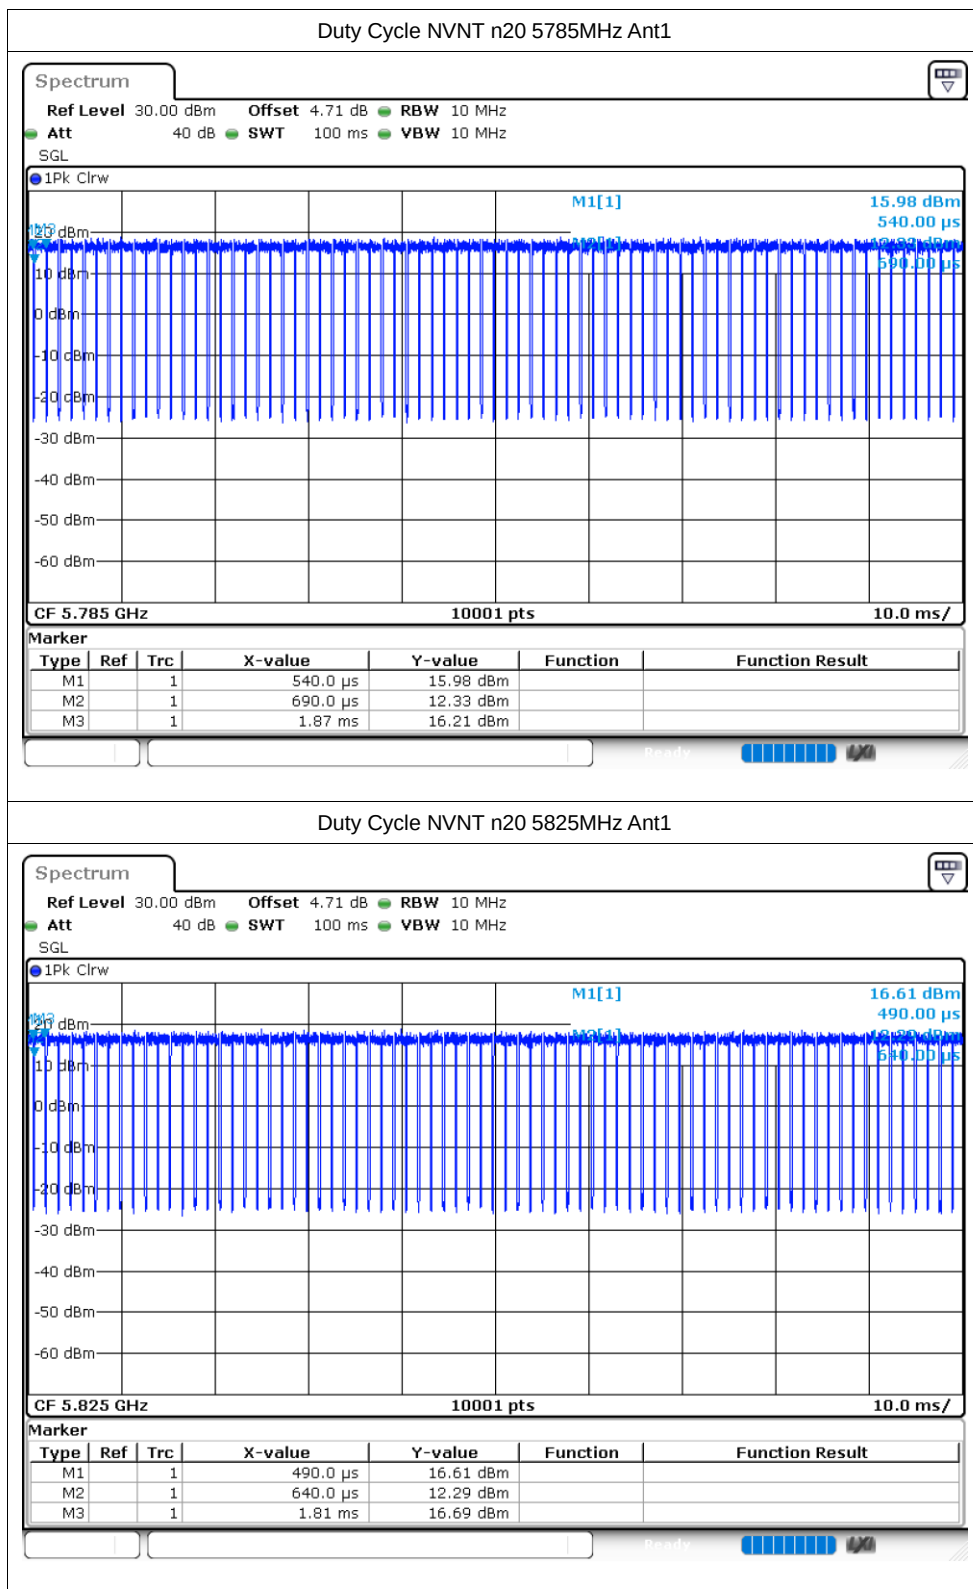

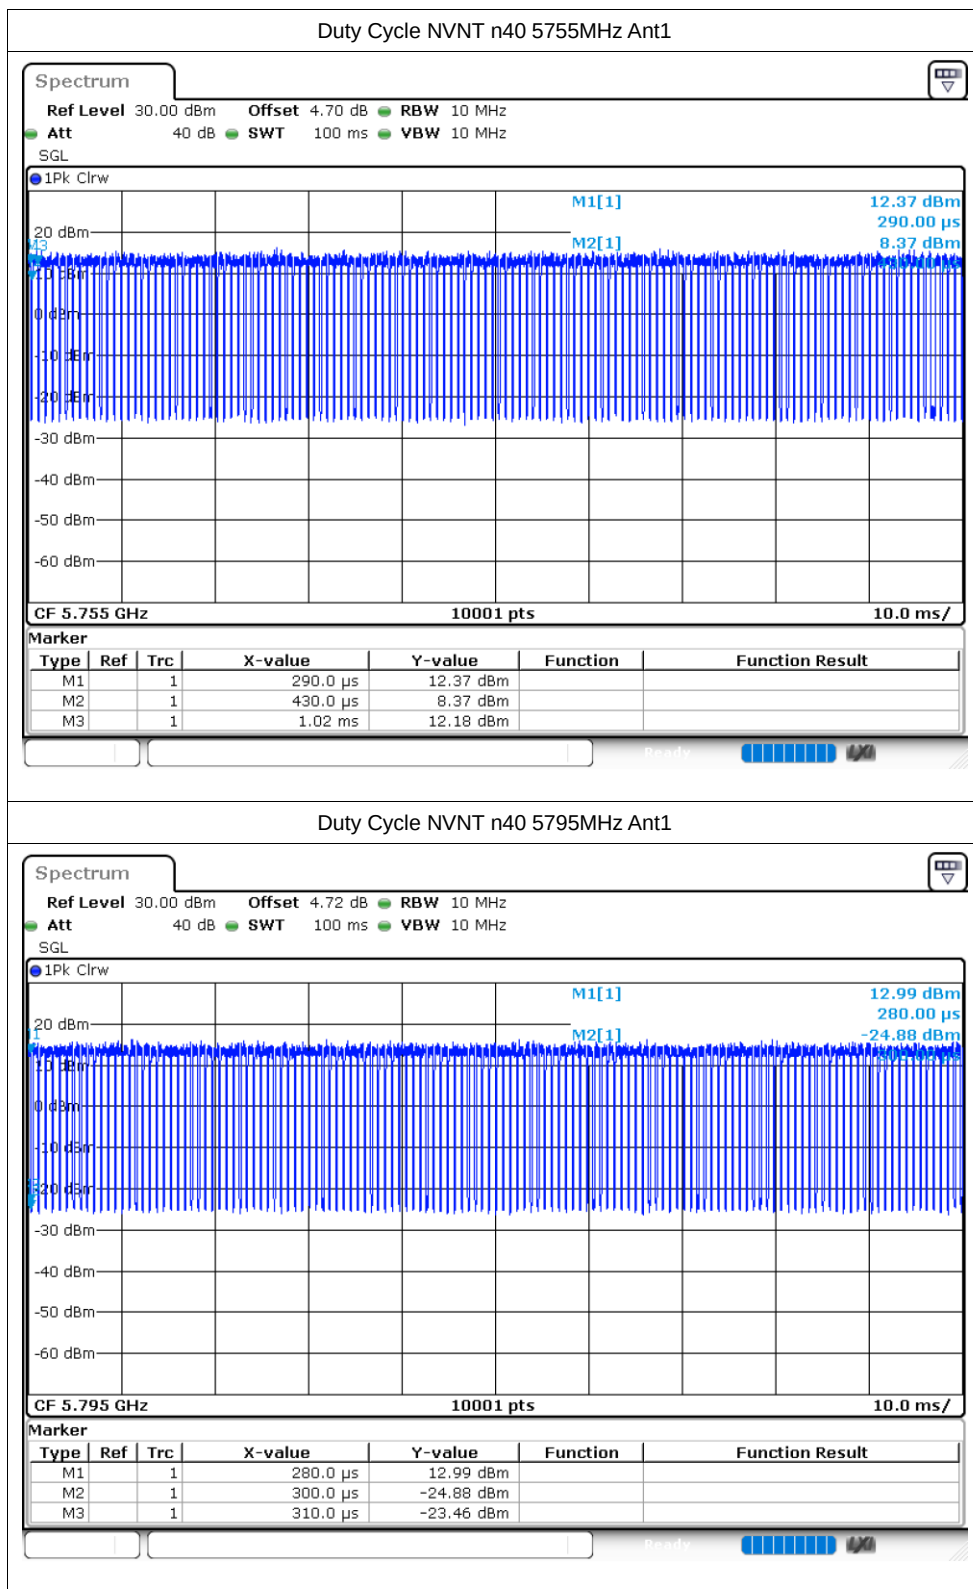

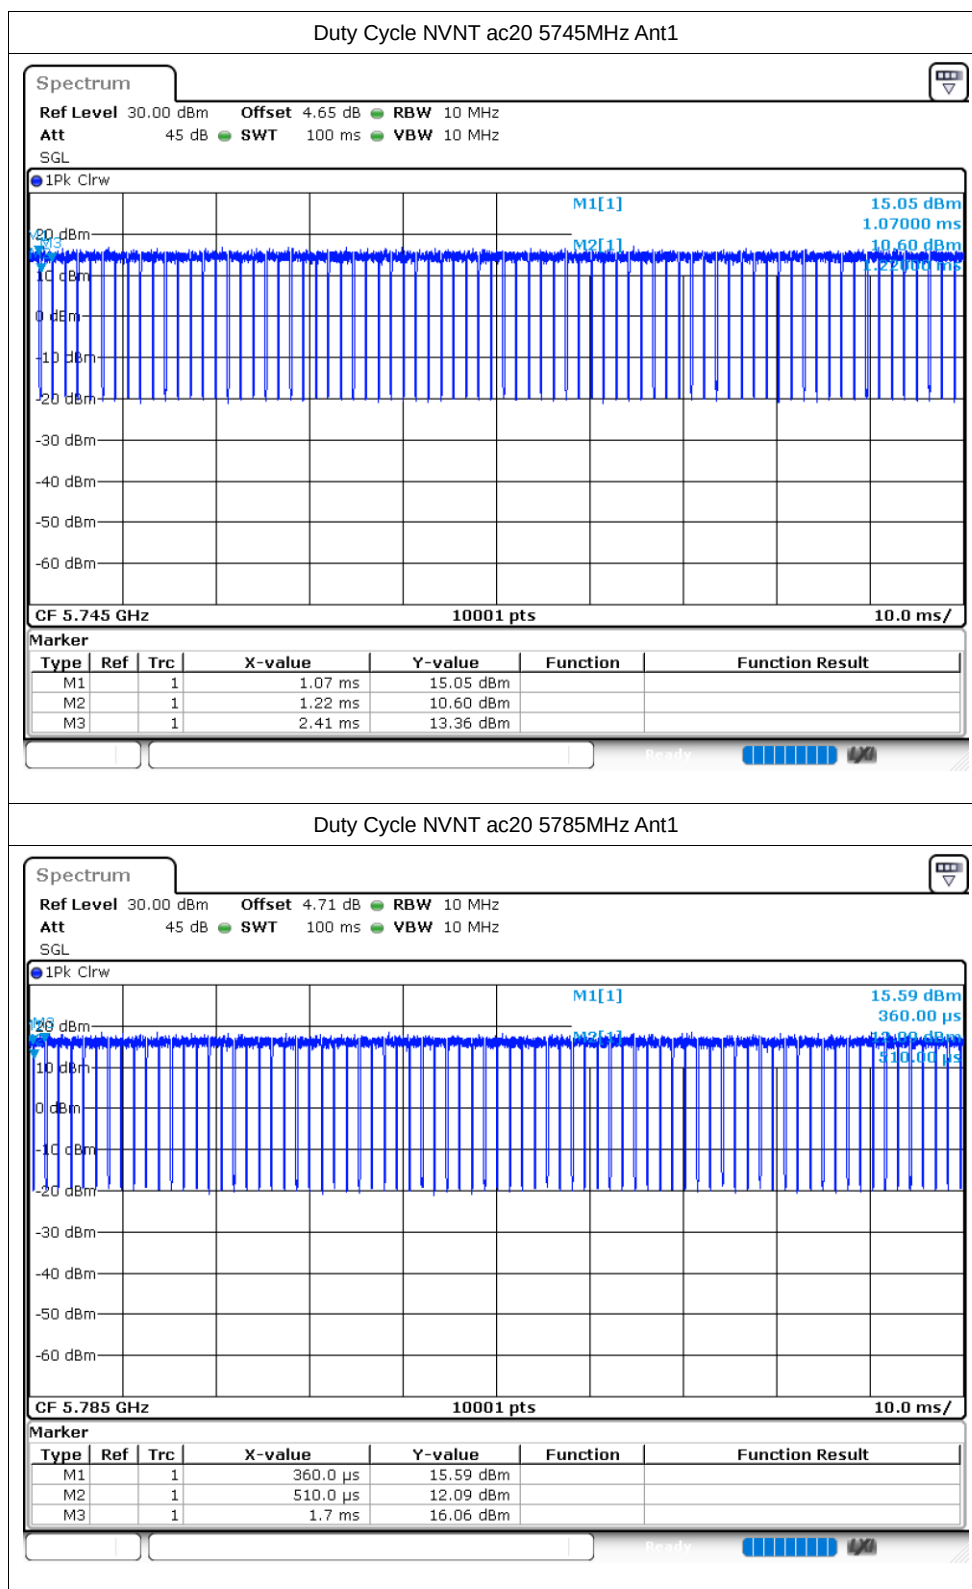

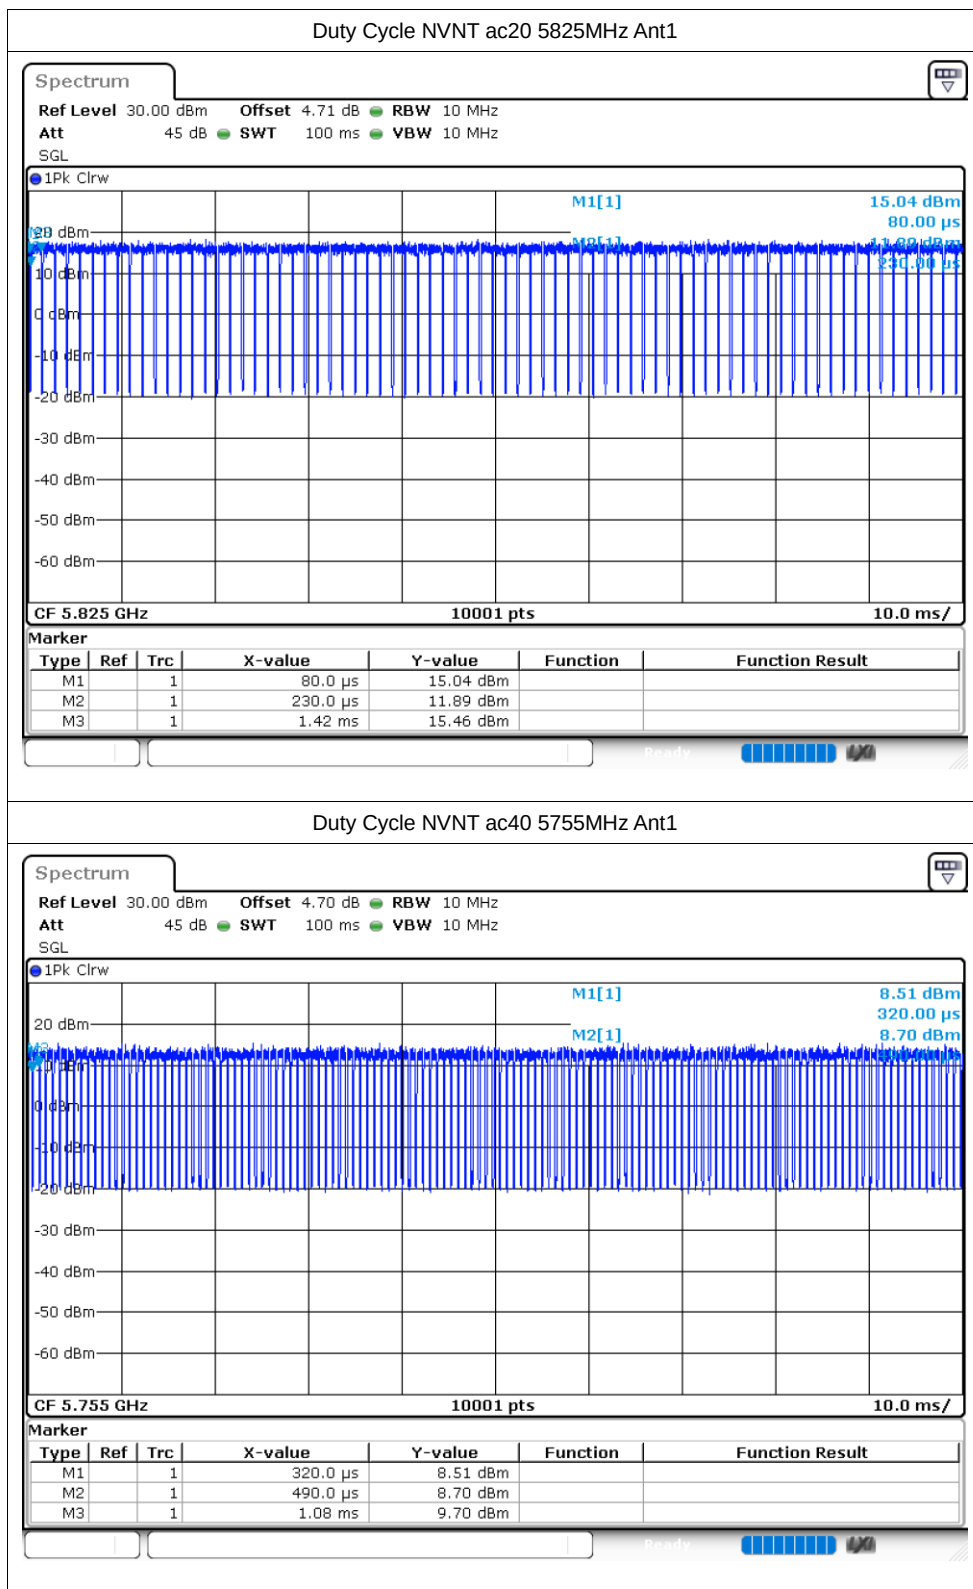

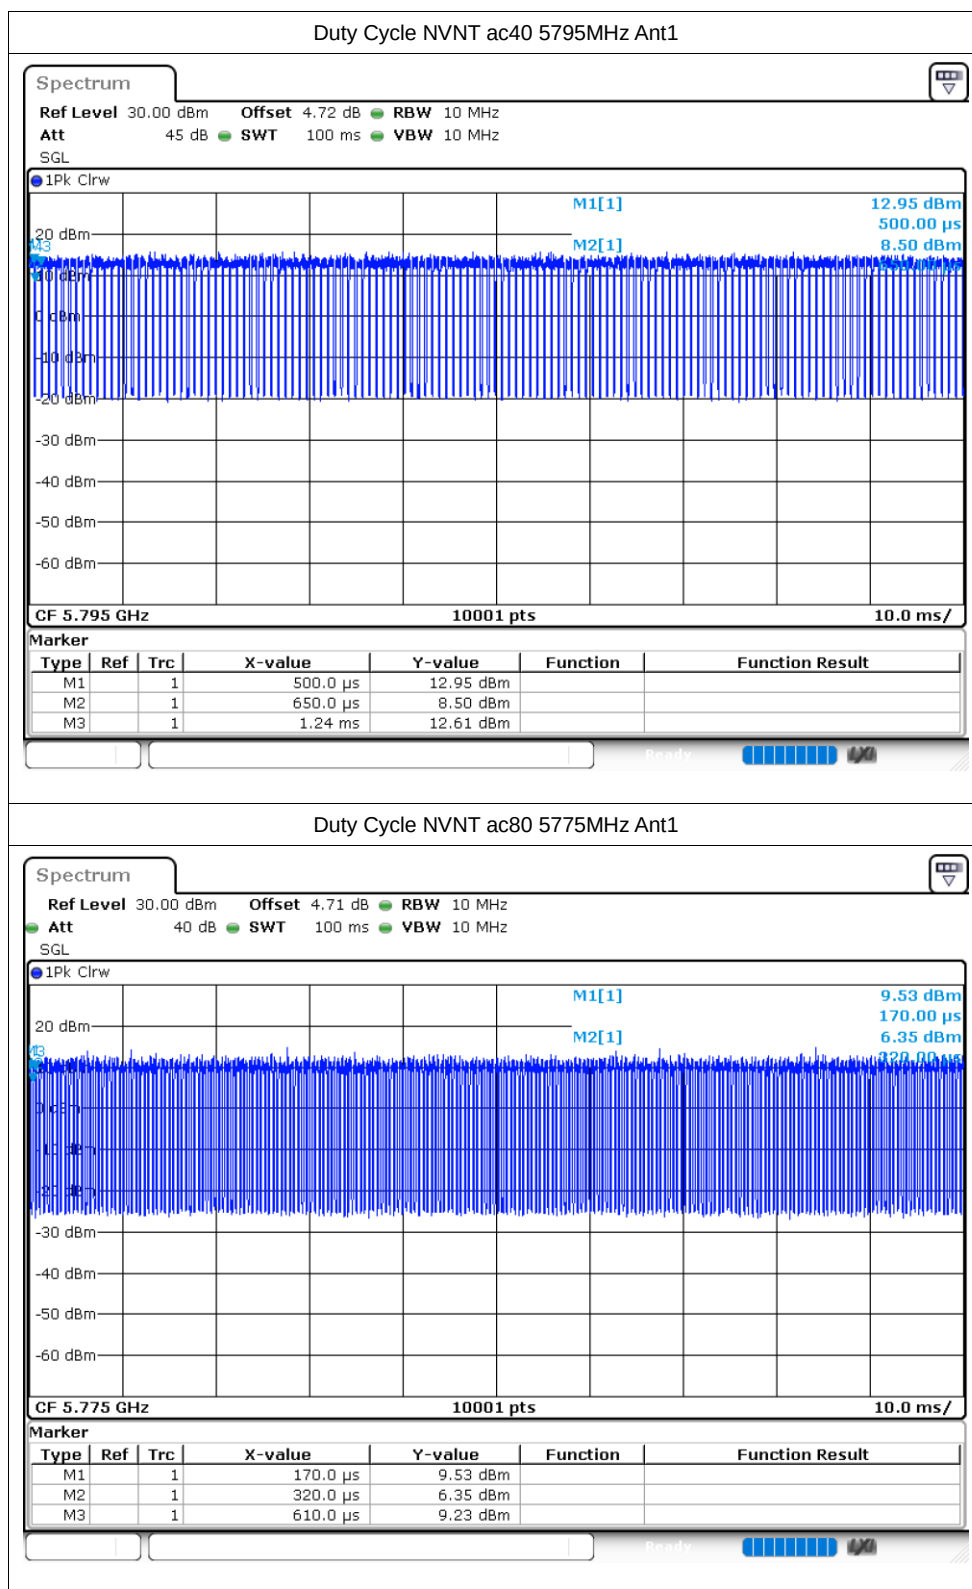

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	11.06	30	Pass
NVNT	a	5785	Ant1	11.82	30	Pass
NVNT	a	5825	Ant1	12.27	30	Pass
NVNT	n20	5745	Ant1	11.01	30	Pass
NVNT	n20	5785	Ant1	11.88	30	Pass
NVNT	n20	5825	Ant1	12.07	30	Pass
NVNT	n40	5755	Ant1	11.92	30	Pass
NVNT	n40	5795	Ant1	12.03	30	Pass
NVNT	ac20	5745	Ant1	11.02	30	Pass
NVNT	ac20	5785	Ant1	11.56	30	Pass
NVNT	ac20	5825	Ant1	12.06	30	Pass
NVNT	ac40	5755	Ant1	11.73	30	Pass
NVNT	ac40	5795	Ant1	12.27	30	Pass
NVNT	ac80	5775	Ant1	11.93	30	Pass


Note: The AVG power has contained duty factor

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.383	0.5	Pass
NVNT	a	5785	Ant1	16.359	0.5	Pass
NVNT	a	5825	Ant1	16.38	0.5	Pass
NVNT	n20	5745	Ant1	16.989	0.5	Pass
NVNT	n20	5785	Ant1	17.592	0.5	Pass
NVNT	n20	5825	Ant1	17.553	0.5	Pass
NVNT	n40	5755	Ant1	35.886	0.5	Pass
NVNT	n40	5795	Ant1	36	0.5	Pass
NVNT	ac20	5745	Ant1	17.589	0.5	Pass
NVNT	ac20	5785	Ant1	17.01	0.5	Pass
NVNT	ac20	5825	Ant1	17.574	0.5	Pass
NVNT	ac40	5755	Ant1	35.76	0.5	Pass
NVNT	ac40	5795	Ant1	36.162	0.5	Pass
NVNT	ac80	5775	Ant1	75.096	0.5	Pass


Test Graphs


-6dB Bandwidth NVNT a 5745MHz Ant1

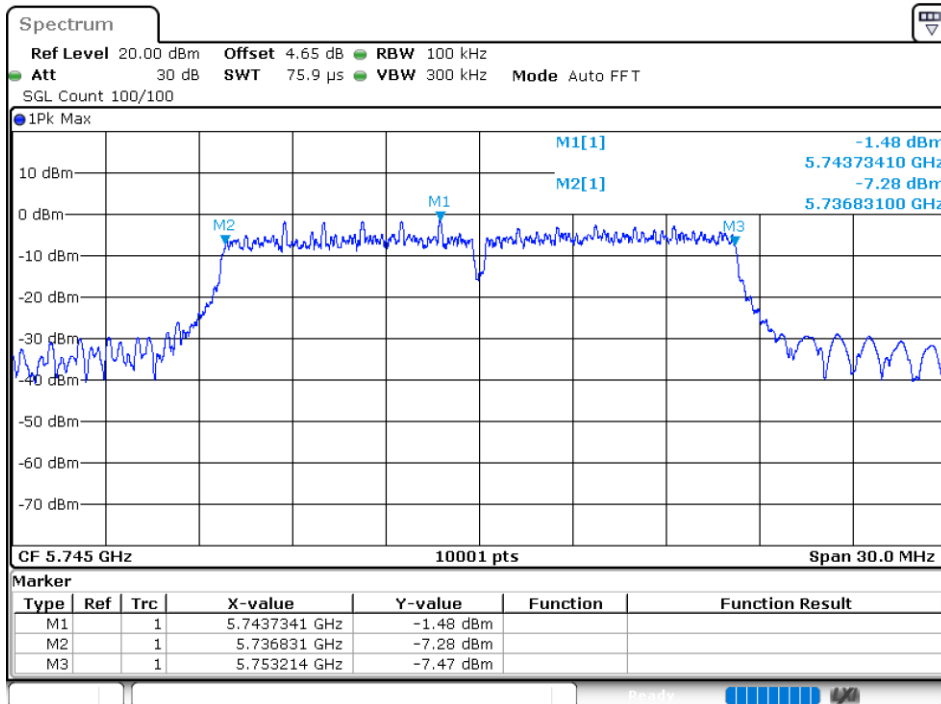



-6dB Bandwidth NVNT a 5785MHz Ant1

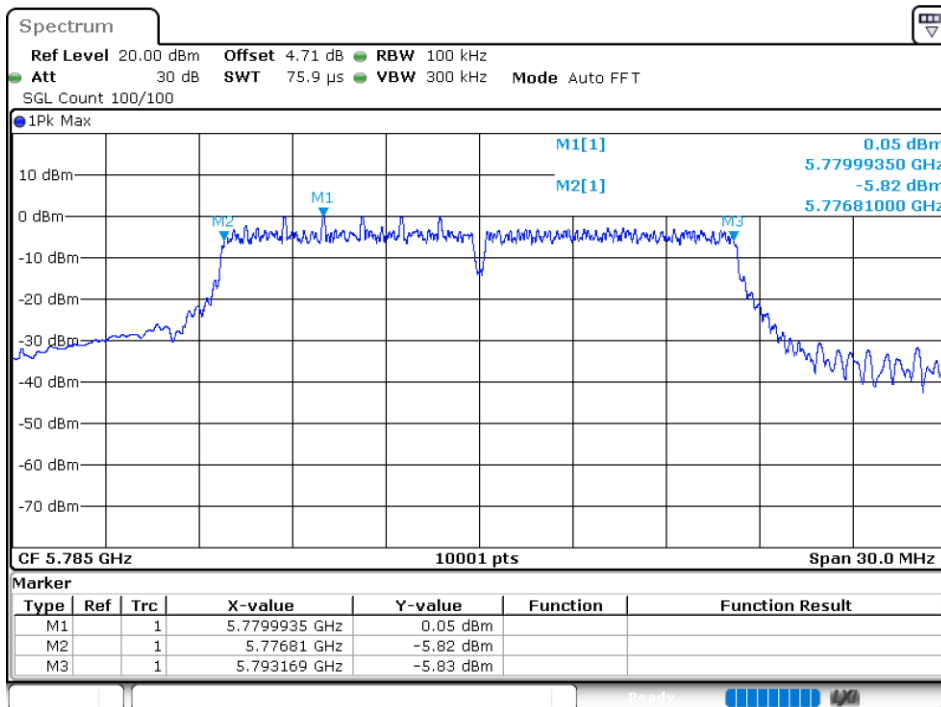


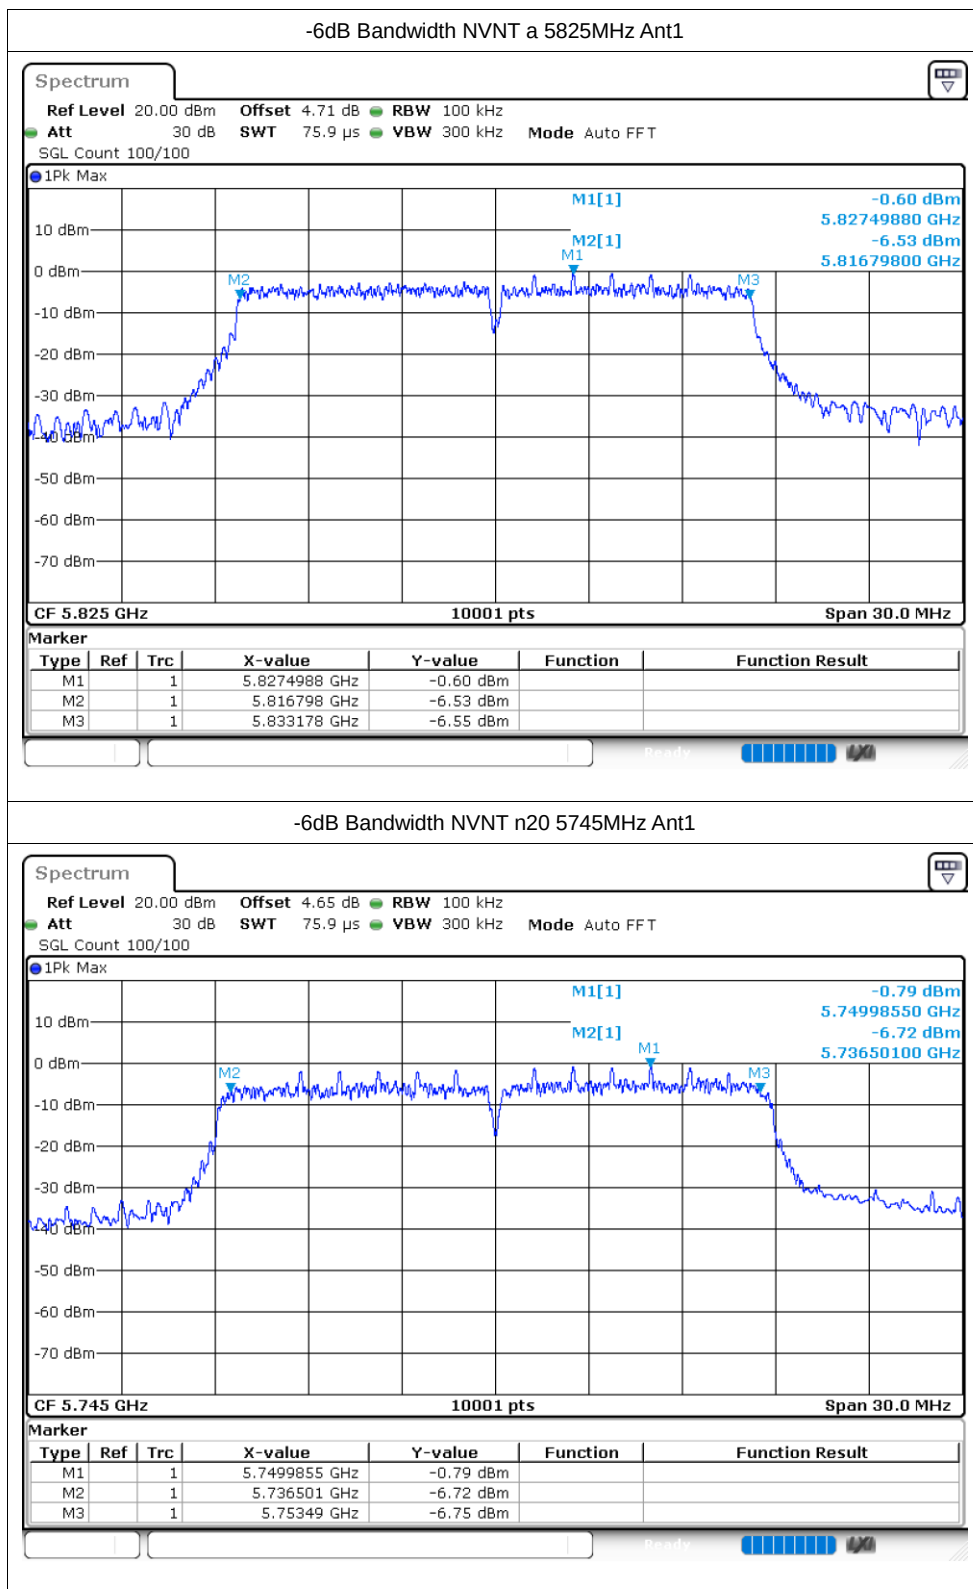


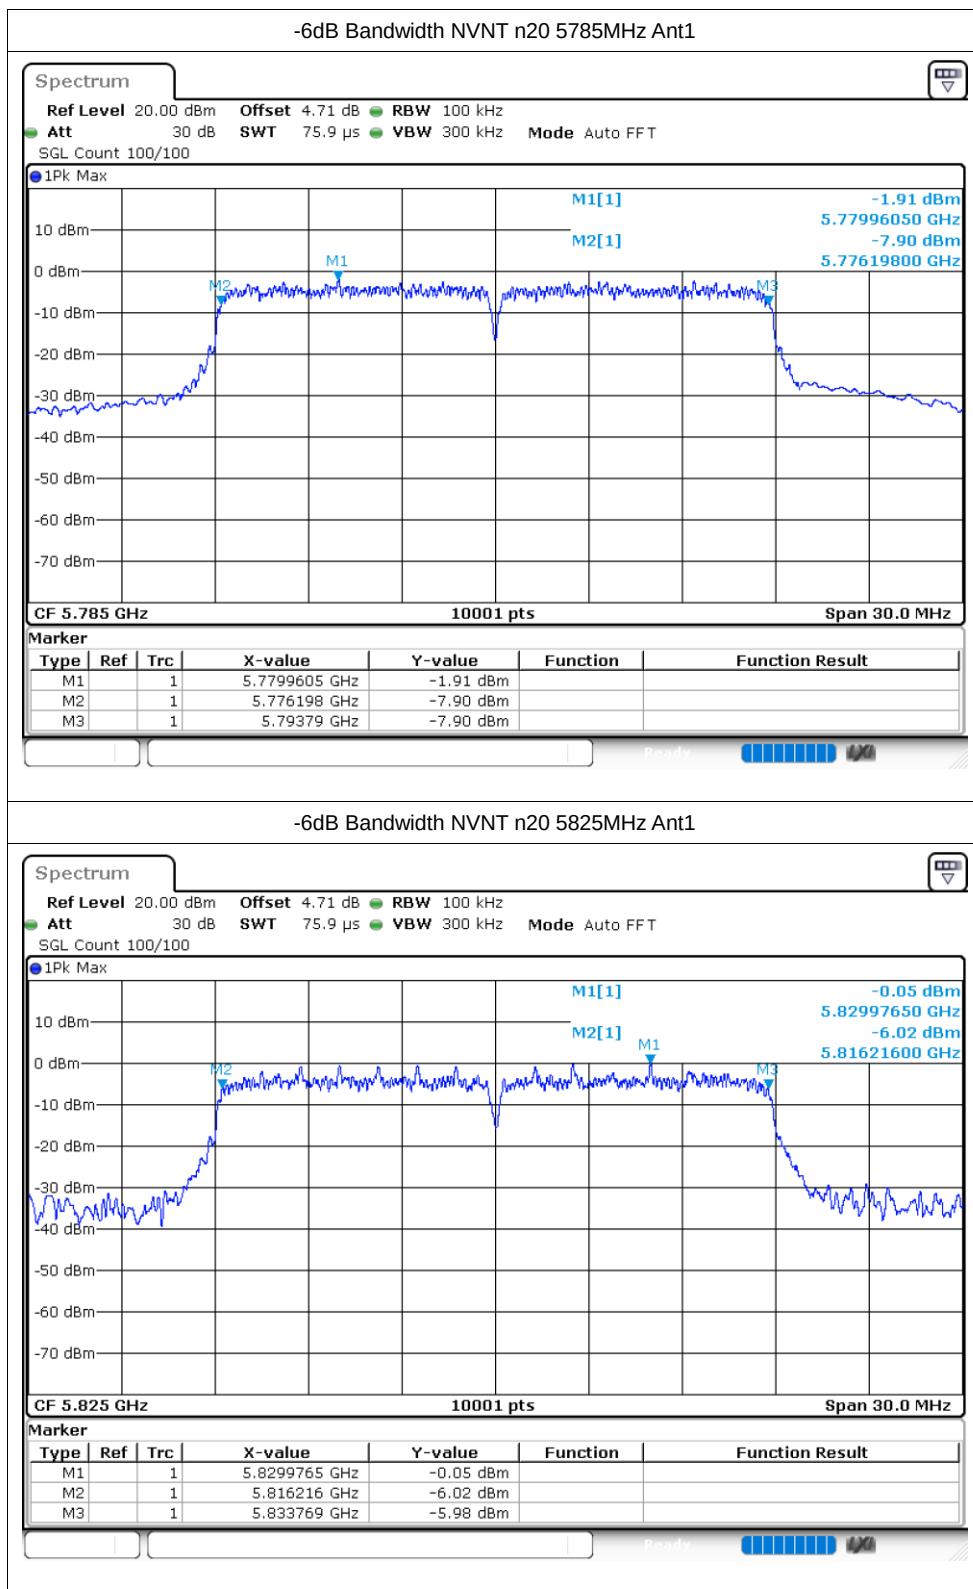

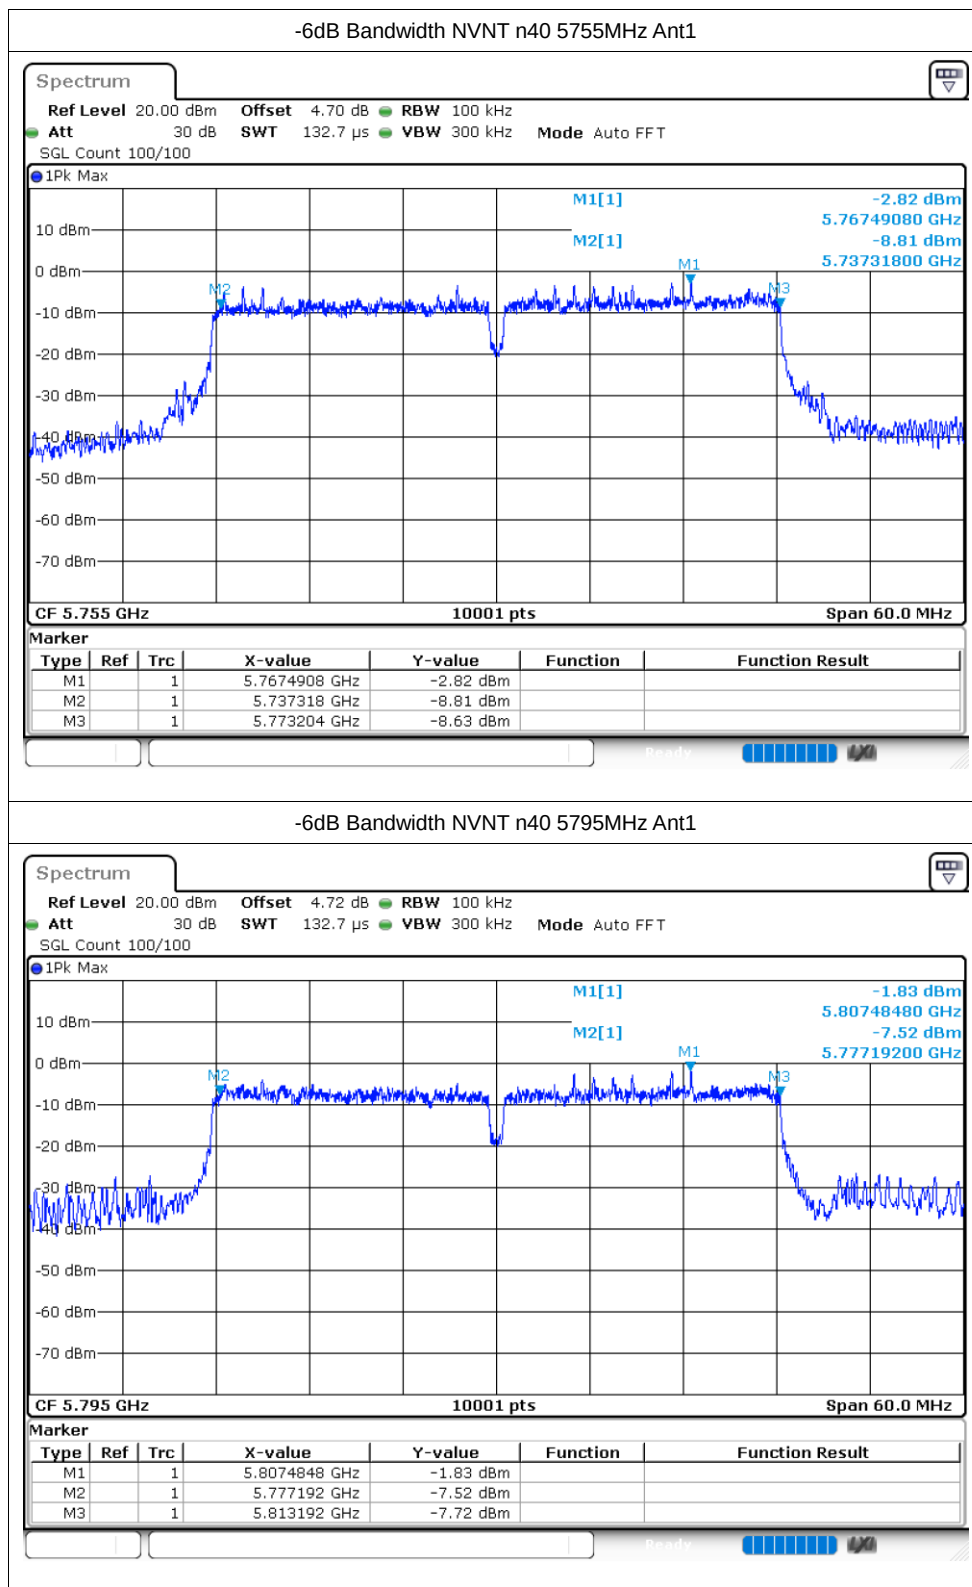

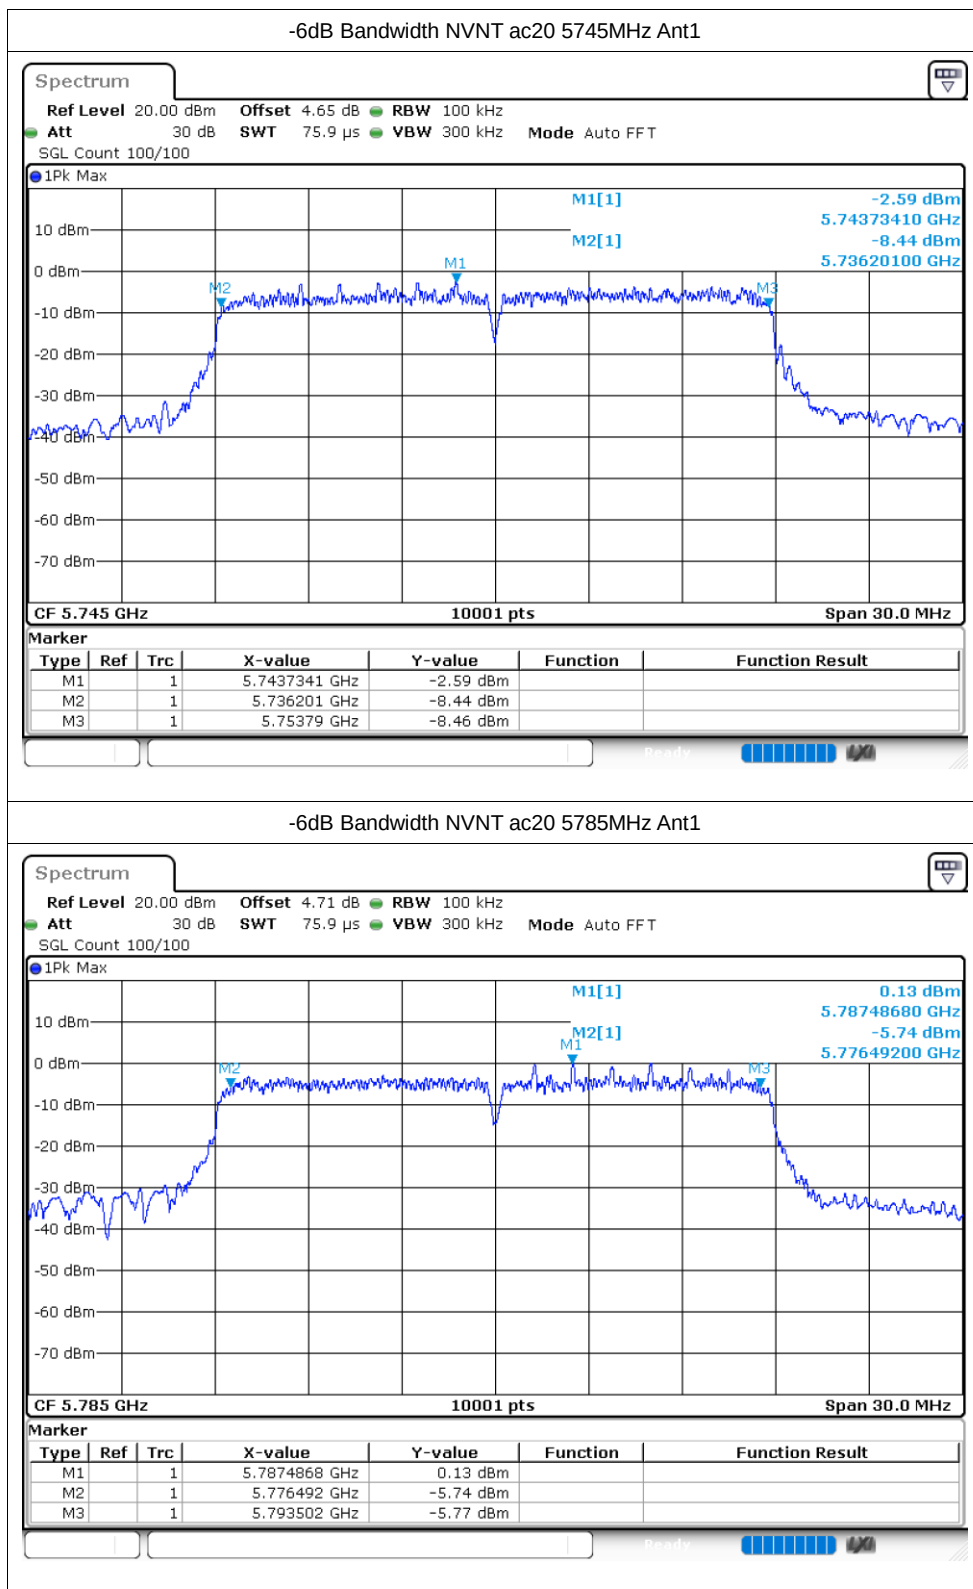

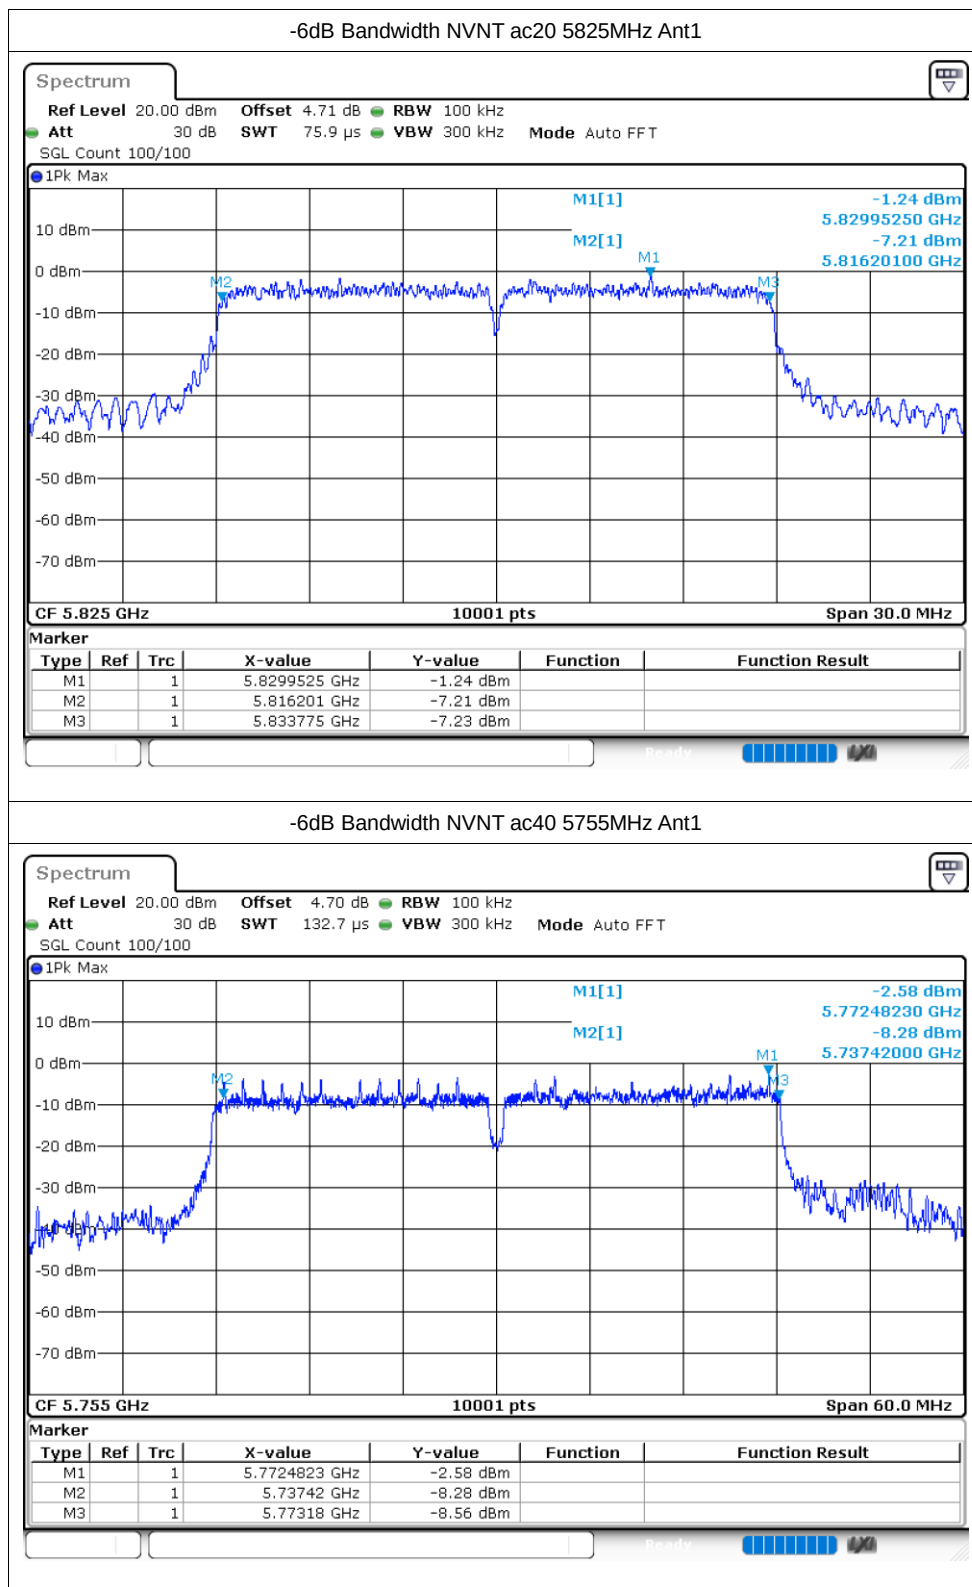

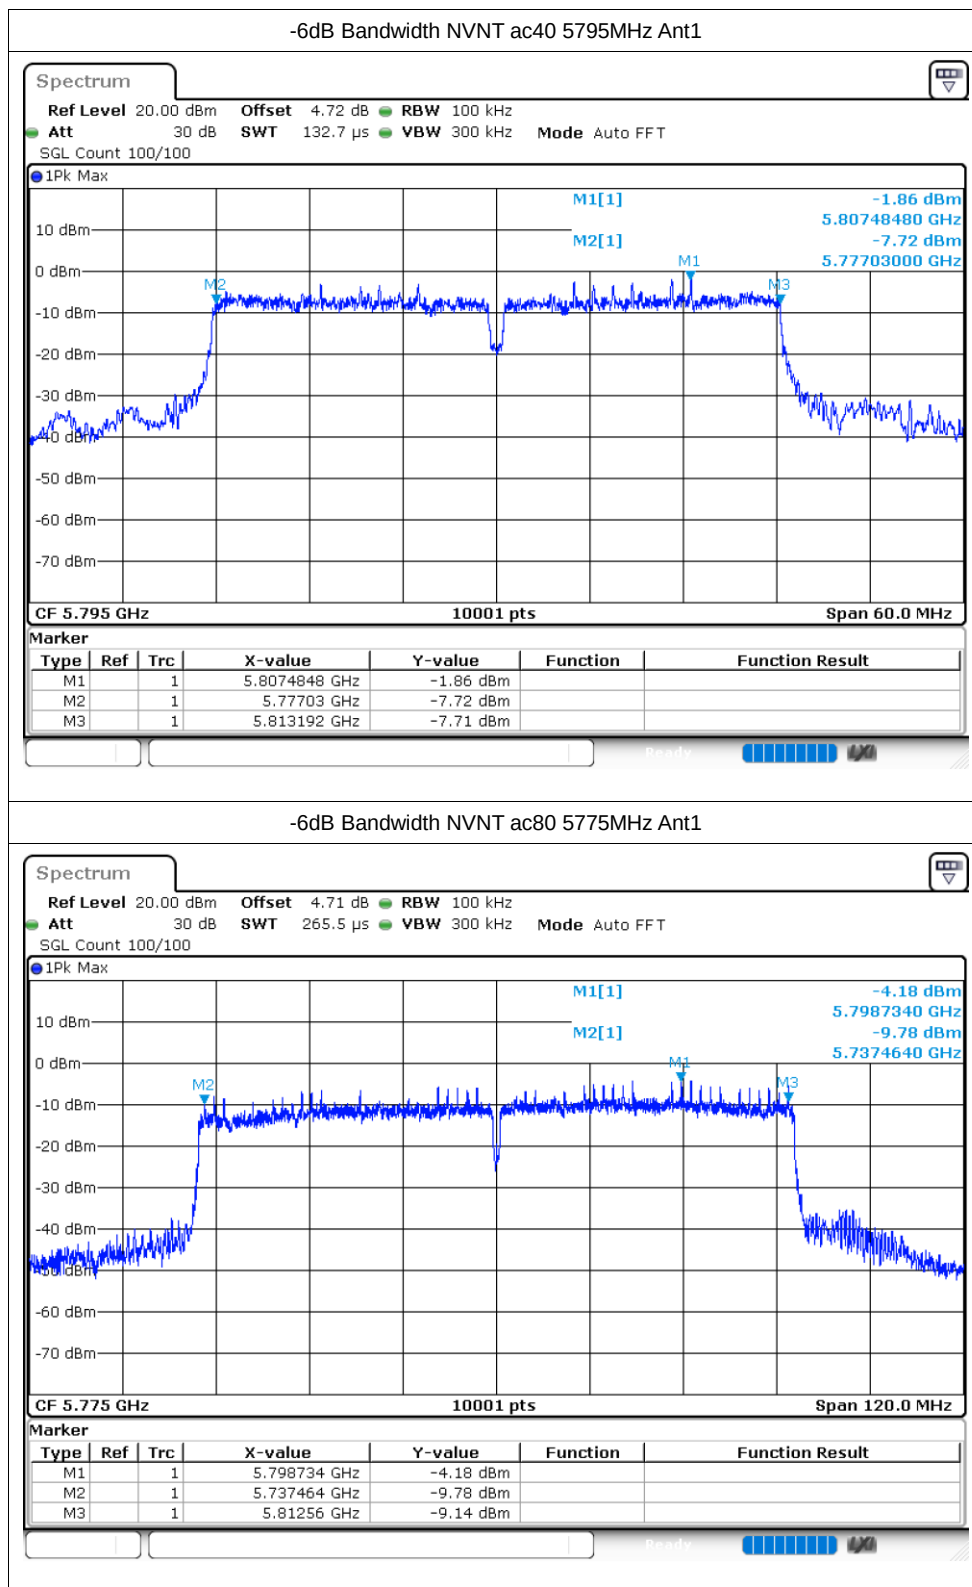


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.639
NVNT	a	5785	Ant1	16.54
NVNT	a	5825	Ant1	16.528
NVNT	n20	5745	Ant1	17.644
NVNT	n20	5785	Ant1	17.701
NVNT	n20	5825	Ant1	17.797
NVNT	n40	5755	Ant1	36.374
NVNT	n40	5795	Ant1	36.488
NVNT	ac20	5745	Ant1	17.623
NVNT	ac20	5785	Ant1	17.56
NVNT	ac20	5825	Ant1	17.728
NVNT	ac40	5755	Ant1	36.386
NVNT	ac40	5795	Ant1	36.506
NVNT	ac80	5775	Ant1	75.328


Test Graphs


OBW NVNT a 5745MHz Ant1

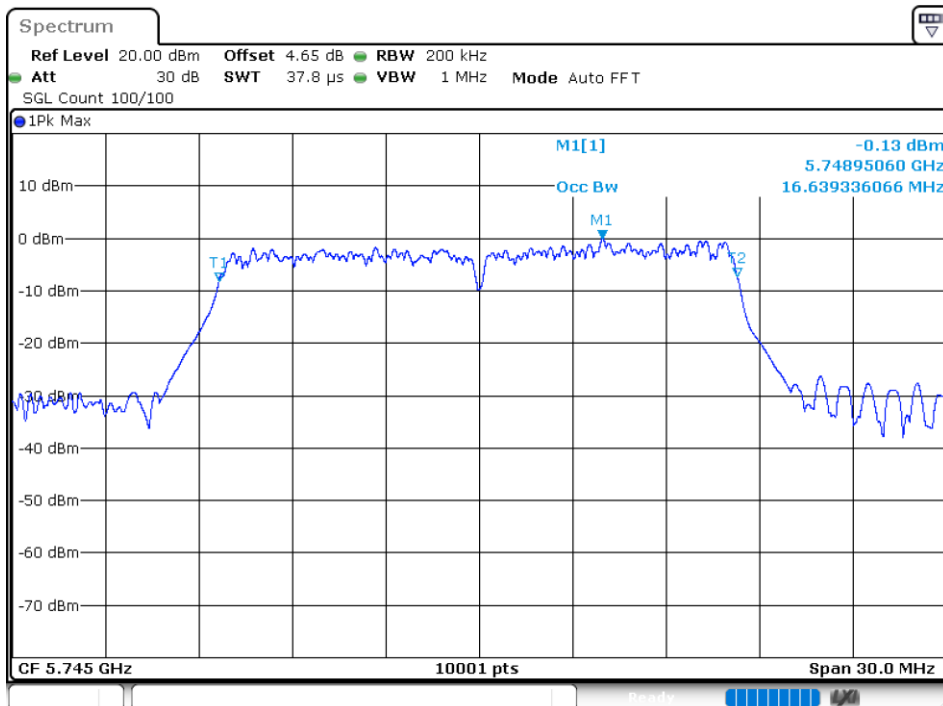



OBW NVNT a 5785MHz Ant1

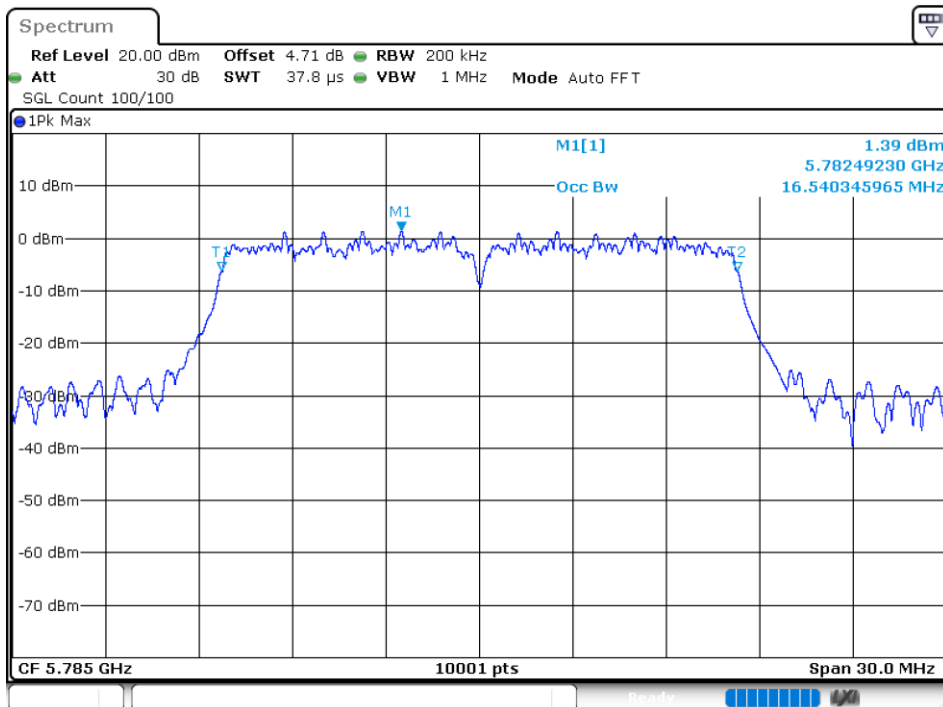


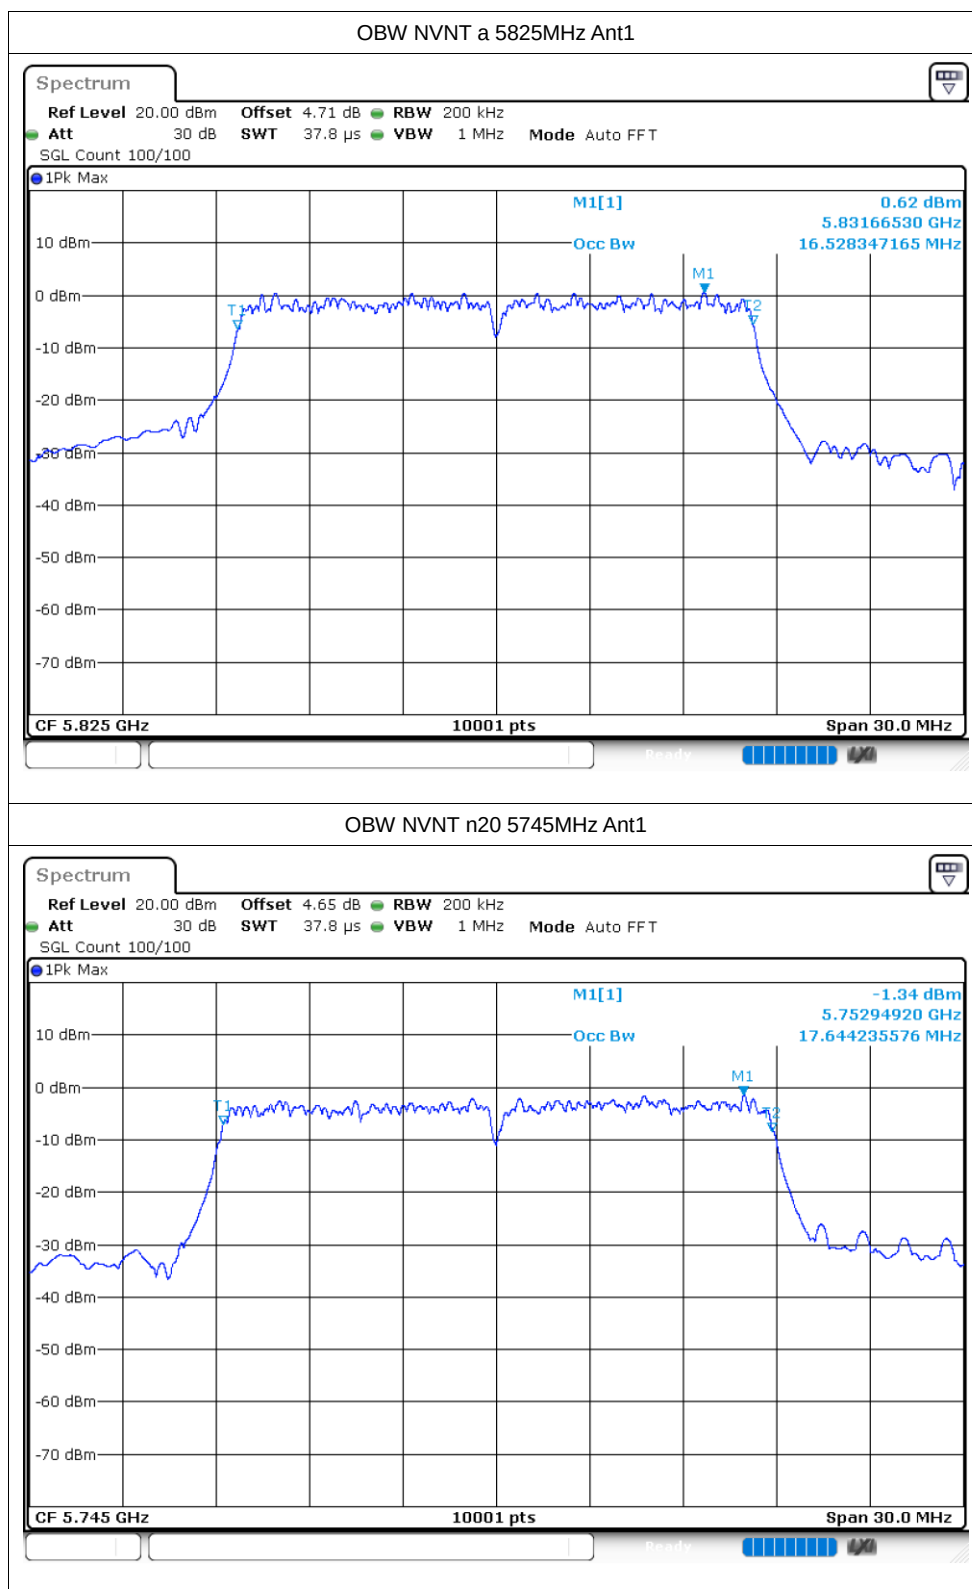


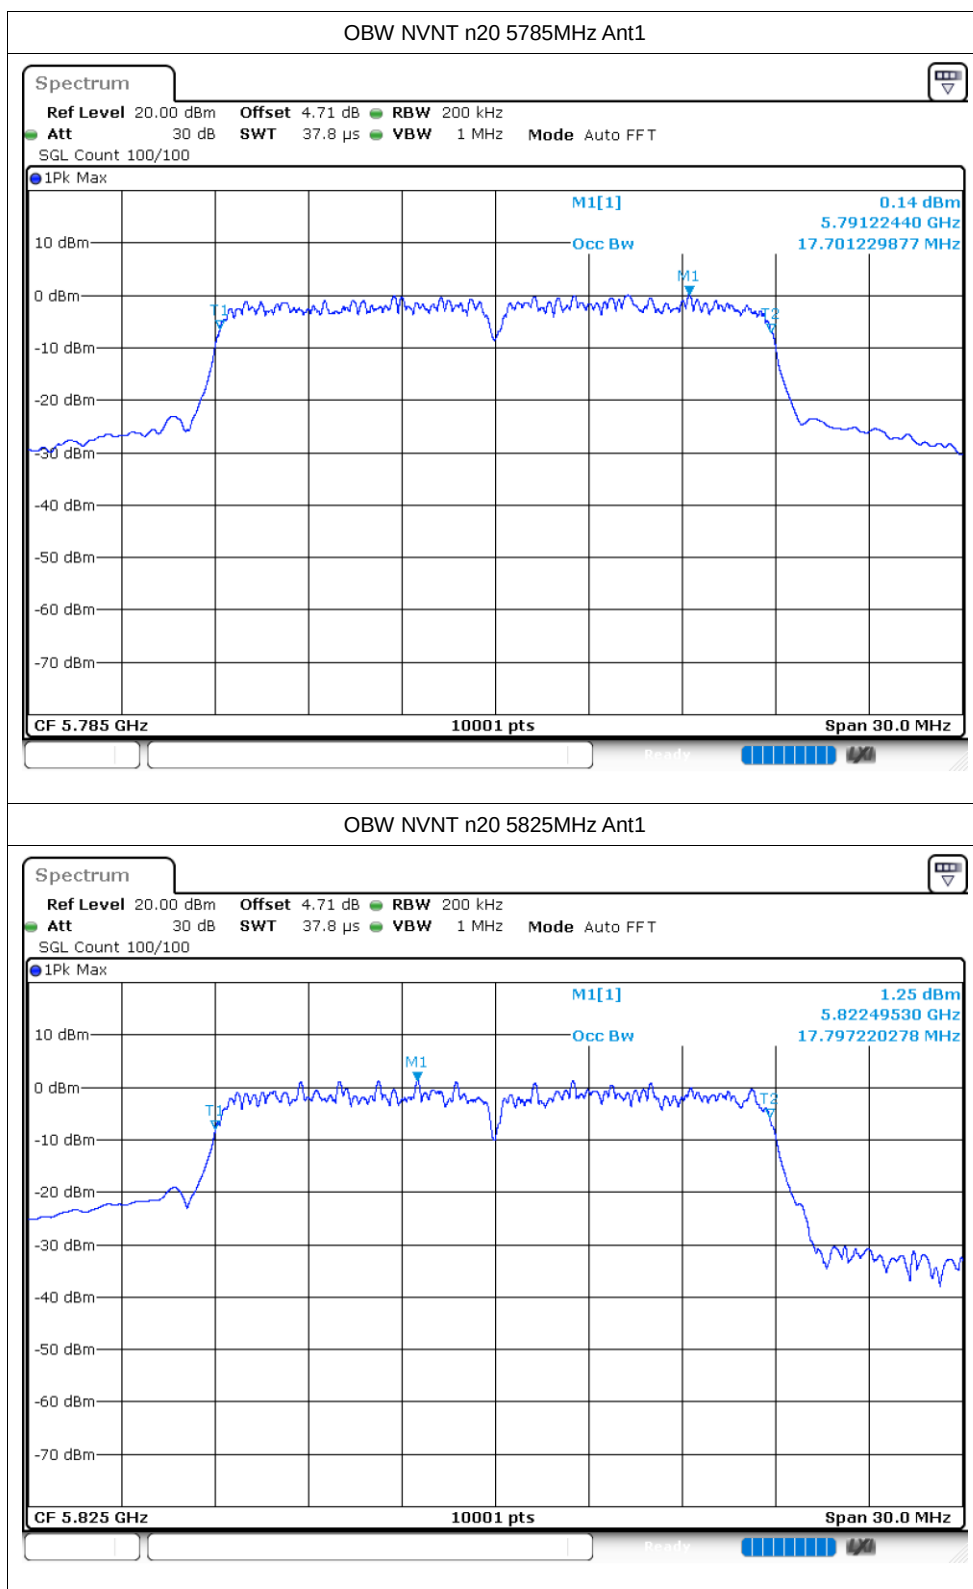

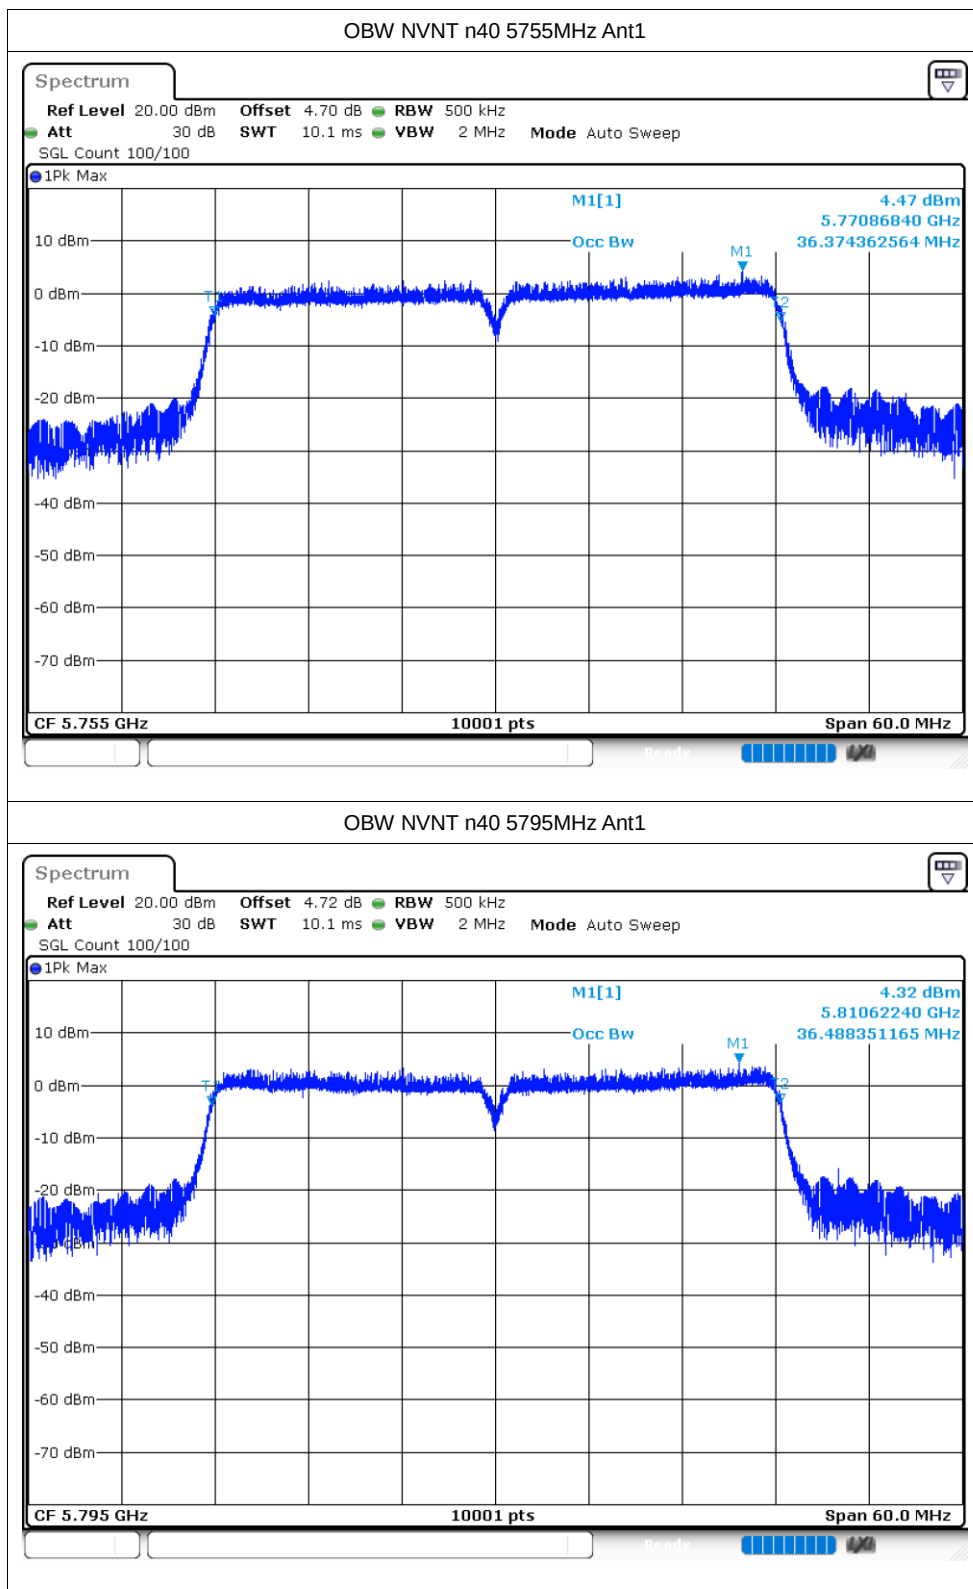

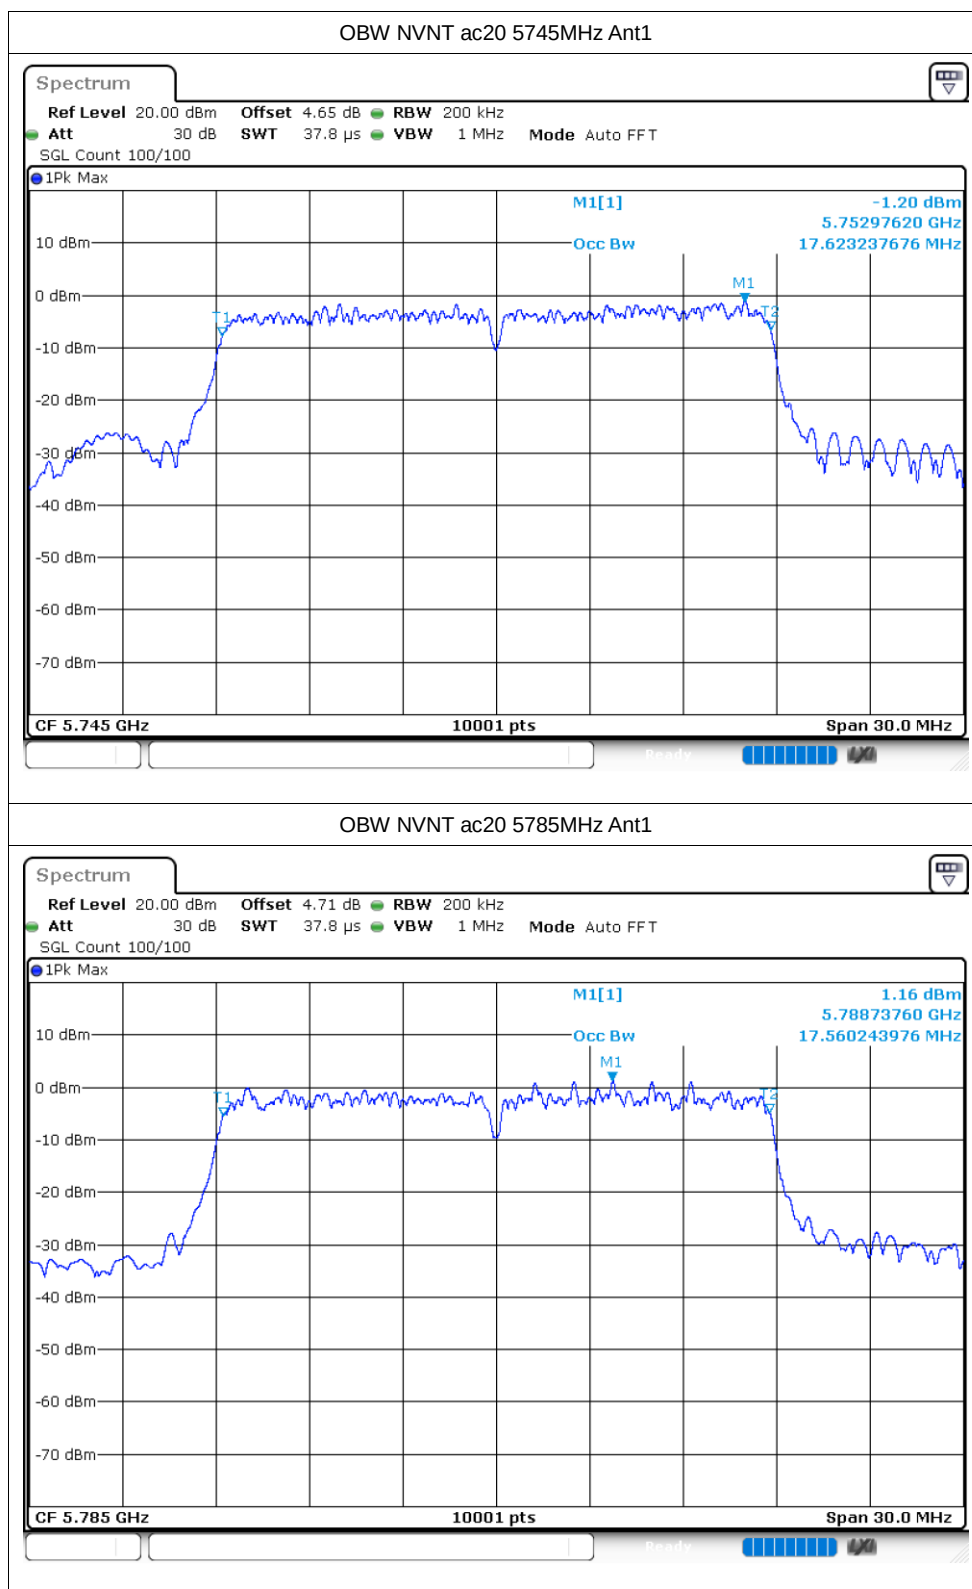

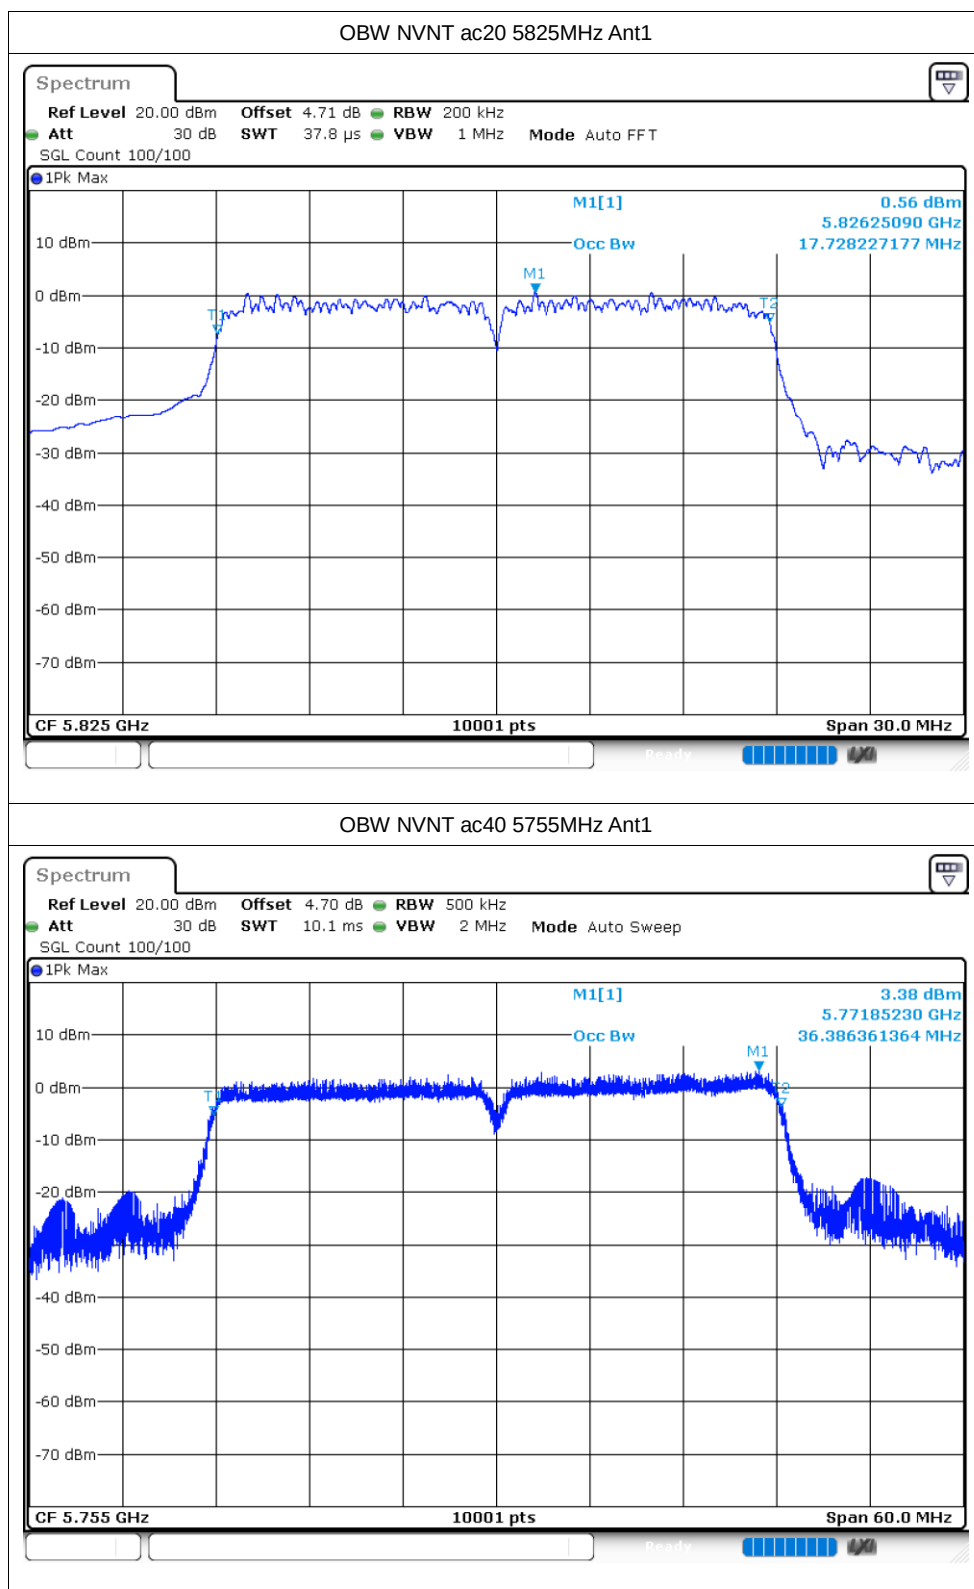

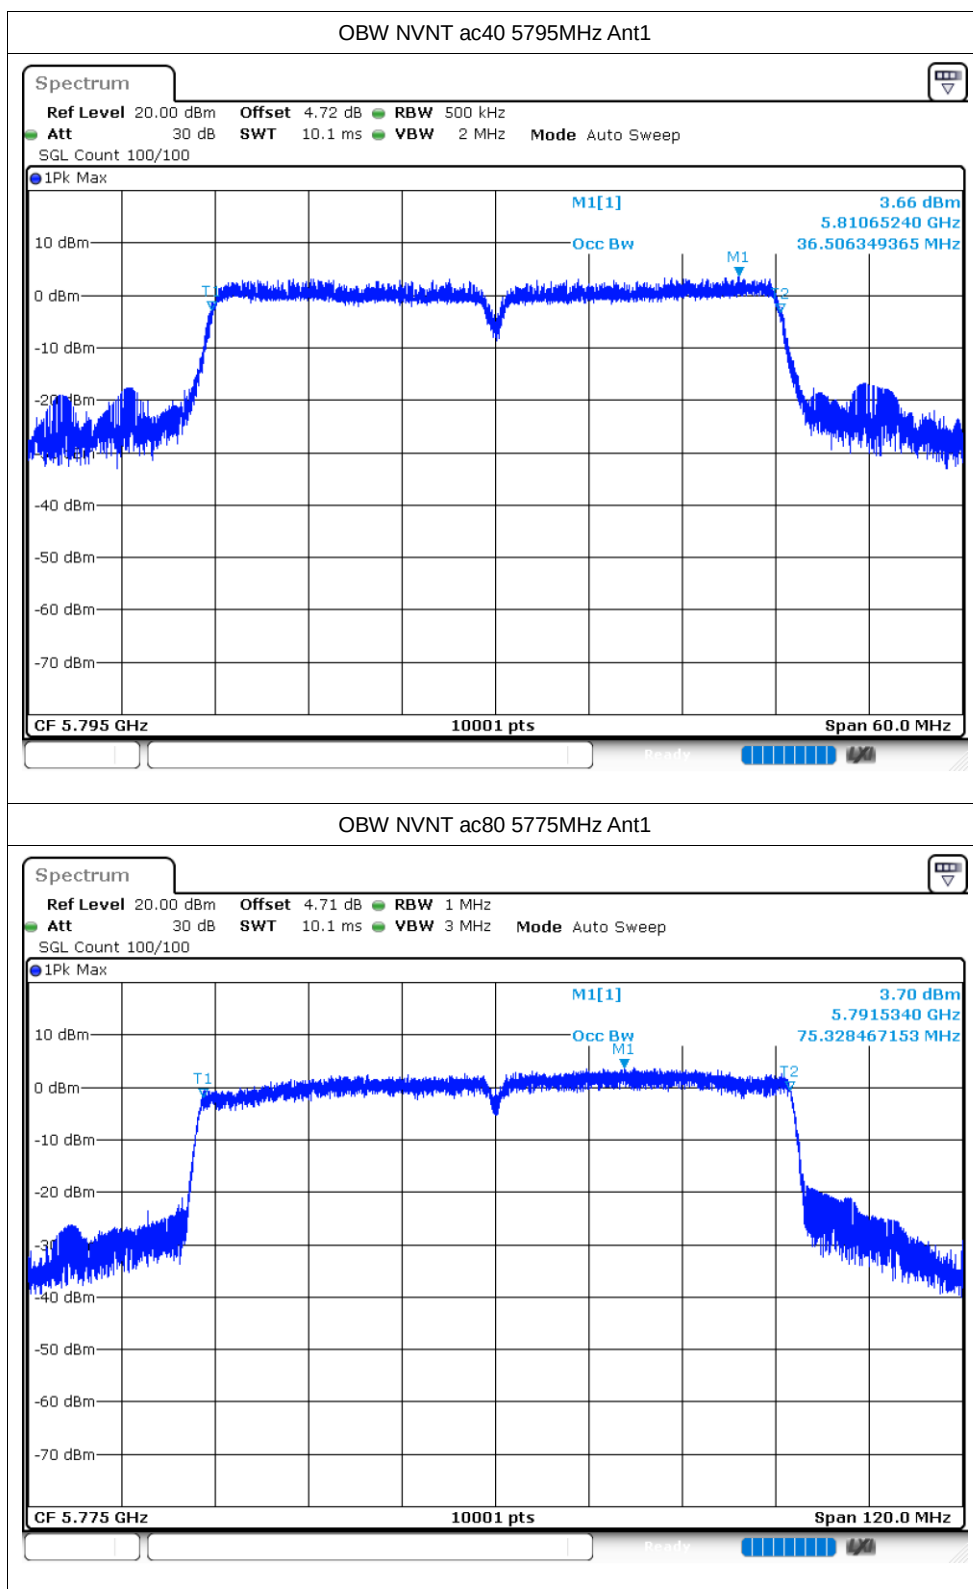


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-3.13	0.43	-2.7	30	Pass
NVNT	a	5785	Ant1	-2.06	0.43	-1.63	30	Pass
NVNT	a	5825	Ant1	-2.19	0.04	-2.15	30	Pass
NVNT	n20	5745	Ant1	-3.5	0.51	-2.99	30	Pass
NVNT	n20	5785	Ant1	-2.78	0.5	-2.28	30	Pass
NVNT	n20	5825	Ant1	-2.55	0.51	-2.04	30	Pass
NVNT	n40	5755	Ant1	-5.56	0.93	-4.63	30	Pass
NVNT	n40	5795	Ant1	-5.06	0.13	-4.93	30	Pass
NVNT	ac20	5745	Ant1	-3.7	0.49	-3.21	30	Pass
NVNT	ac20	5785	Ant1	-2.66	0.5	-2.16	30	Pass
NVNT	ac20	5825	Ant1	-3.13	0.5	-2.63	30	Pass
NVNT	ac40	5755	Ant1	-5.34	0.95	-4.39	30	Pass
NVNT	ac40	5795	Ant1	-5.41	0.95	-4.46	30	Pass
NVNT	ac80	5775	Ant1	-9.02	1.65	-7.37	30	Pass


Test Graphs


PSD NVNT a 5745MHz Ant1

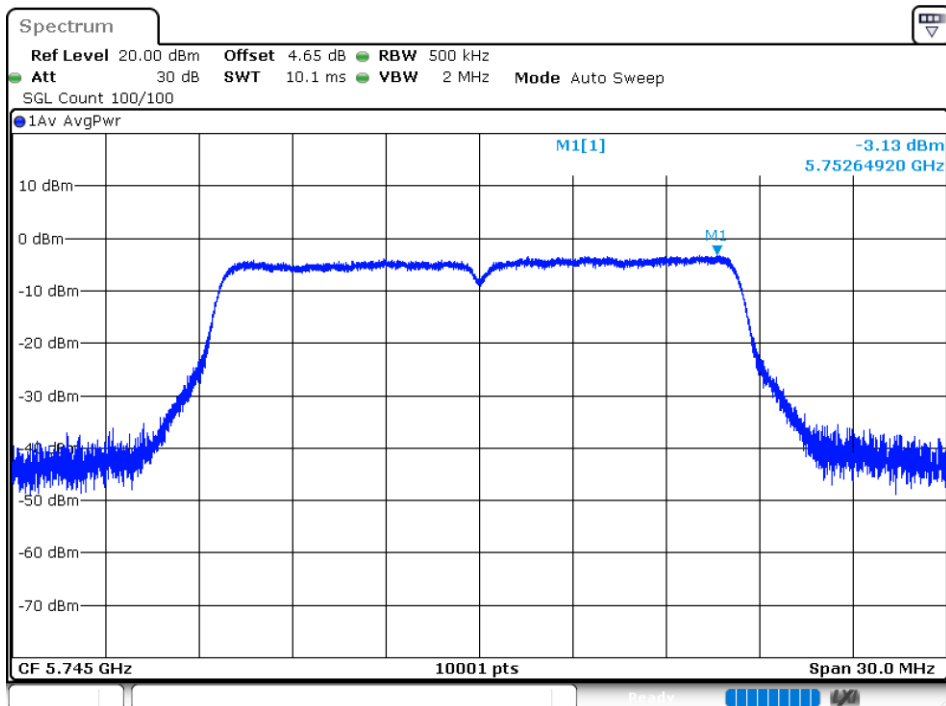



PSD NVNT a 5785MHz Ant1

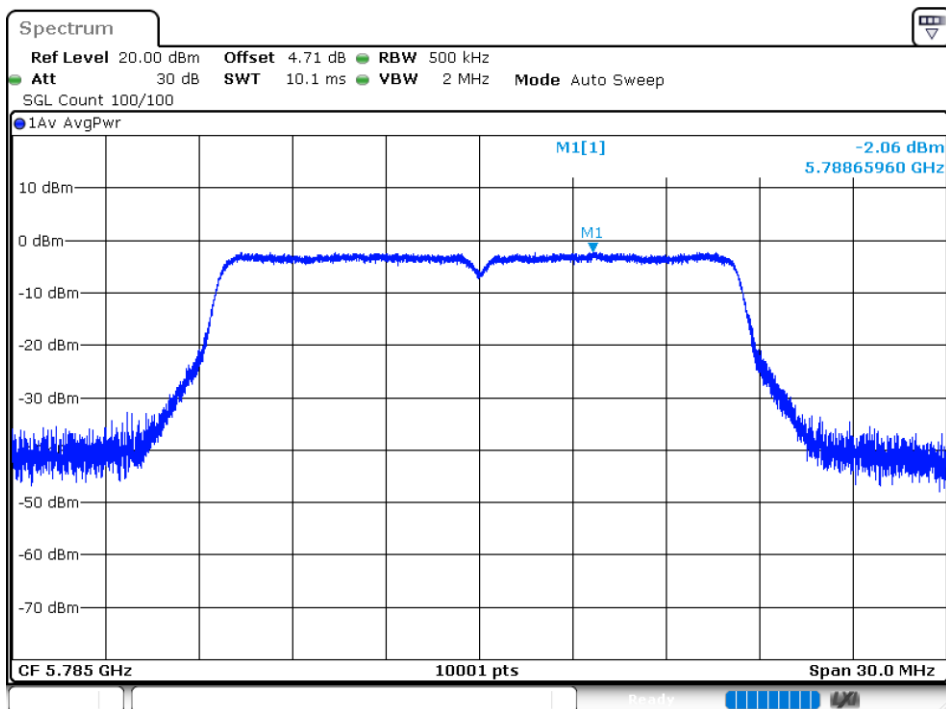


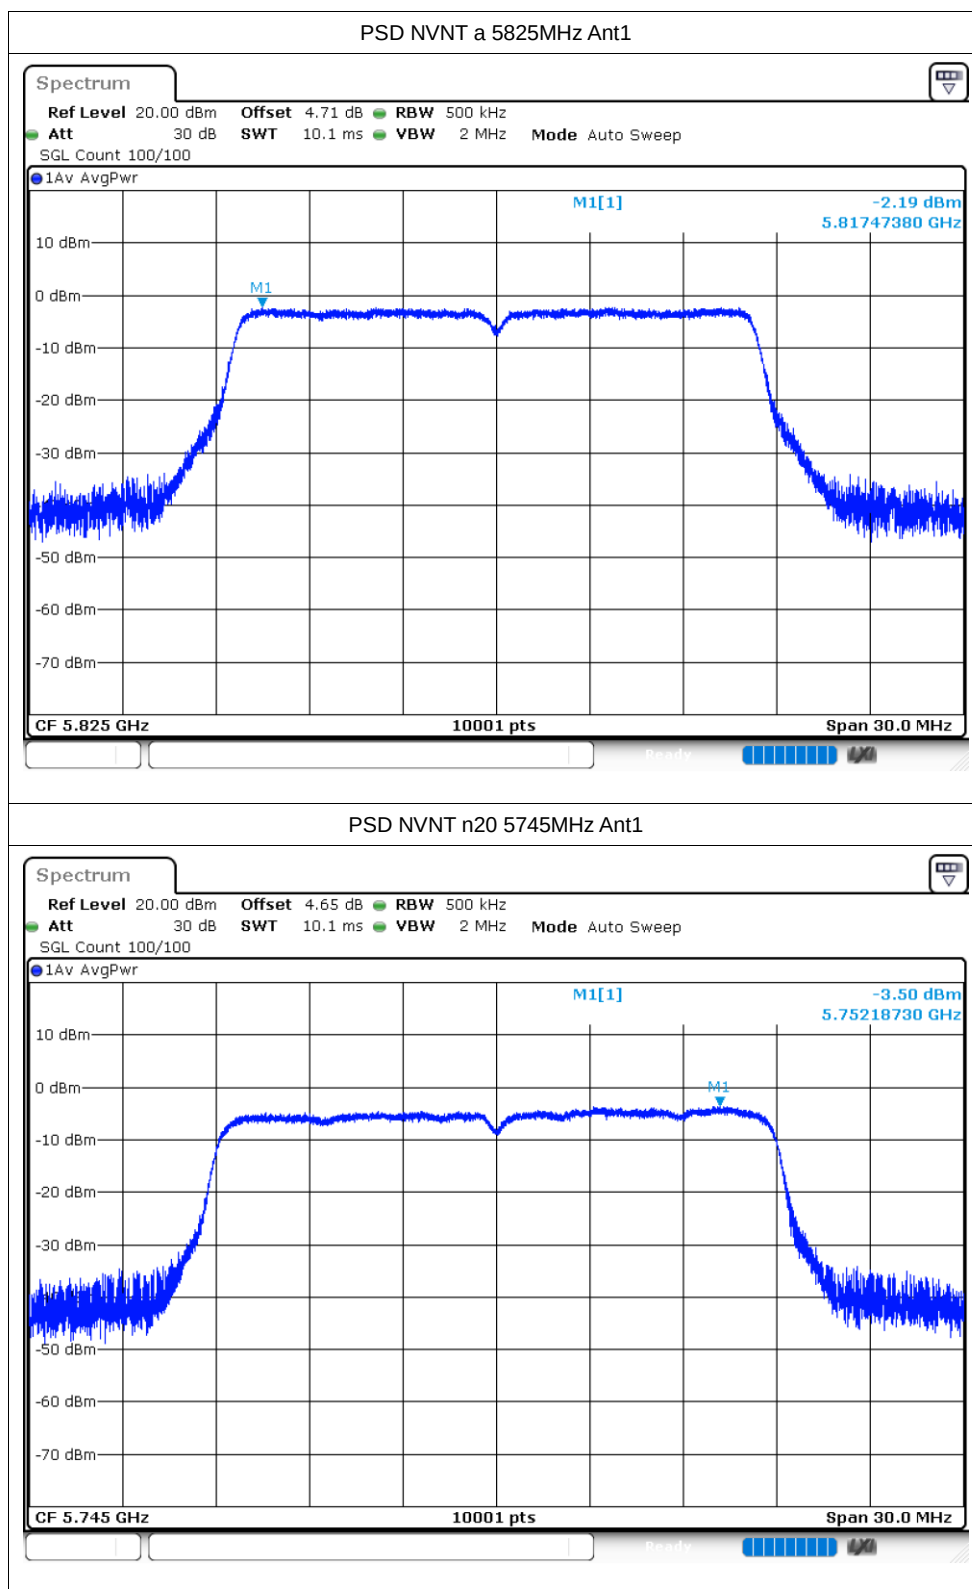


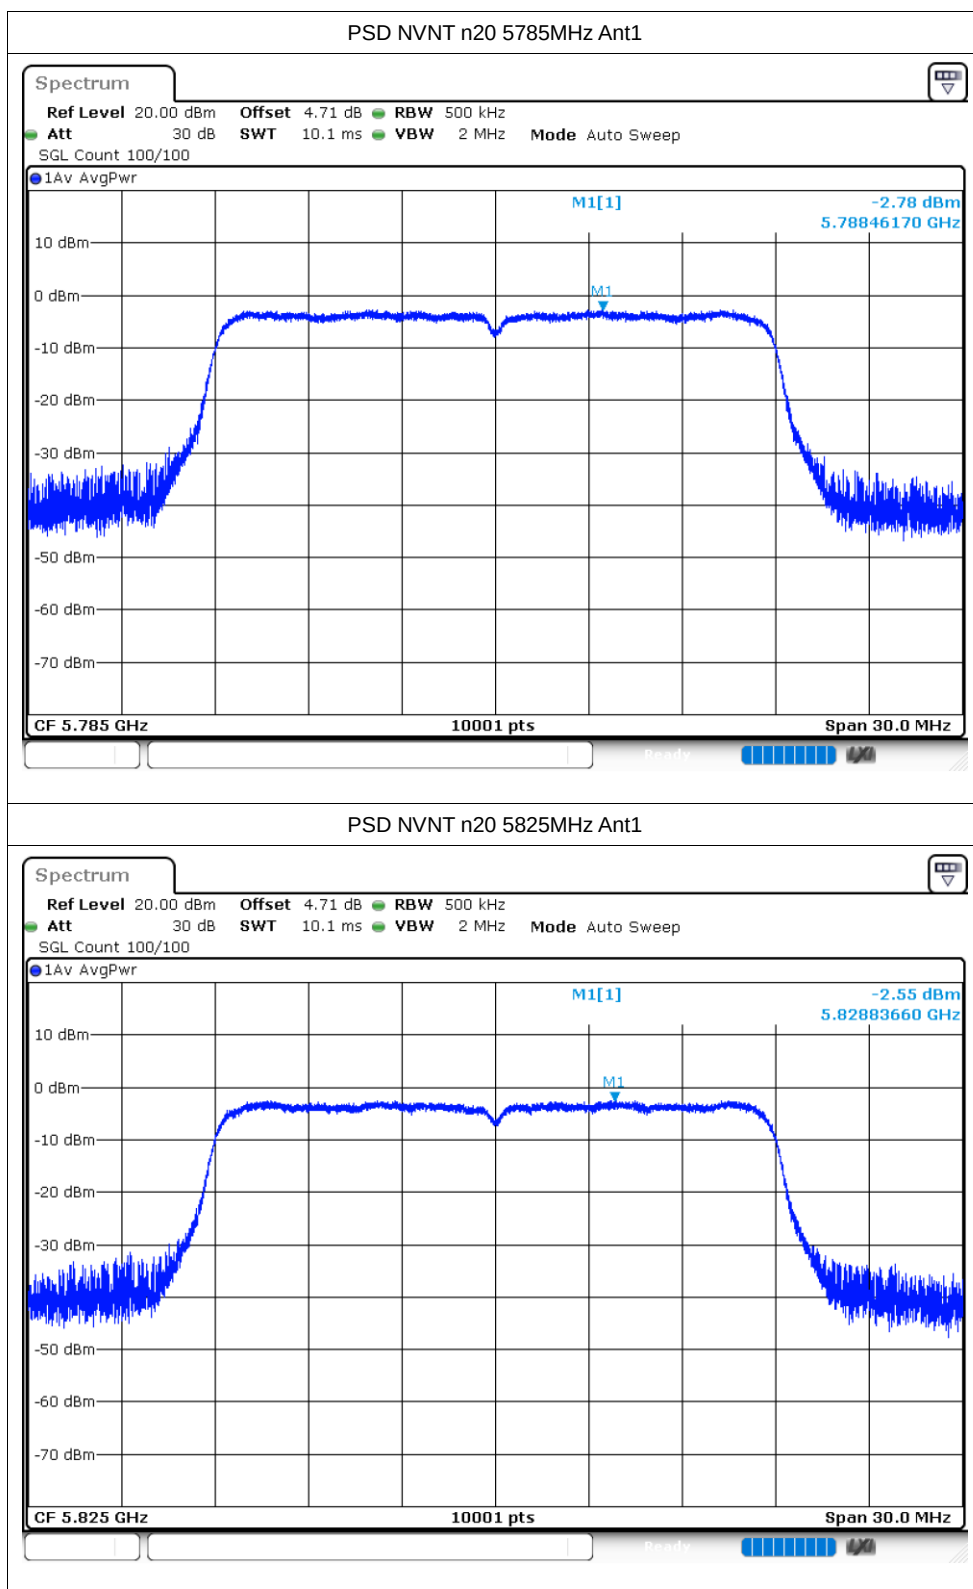

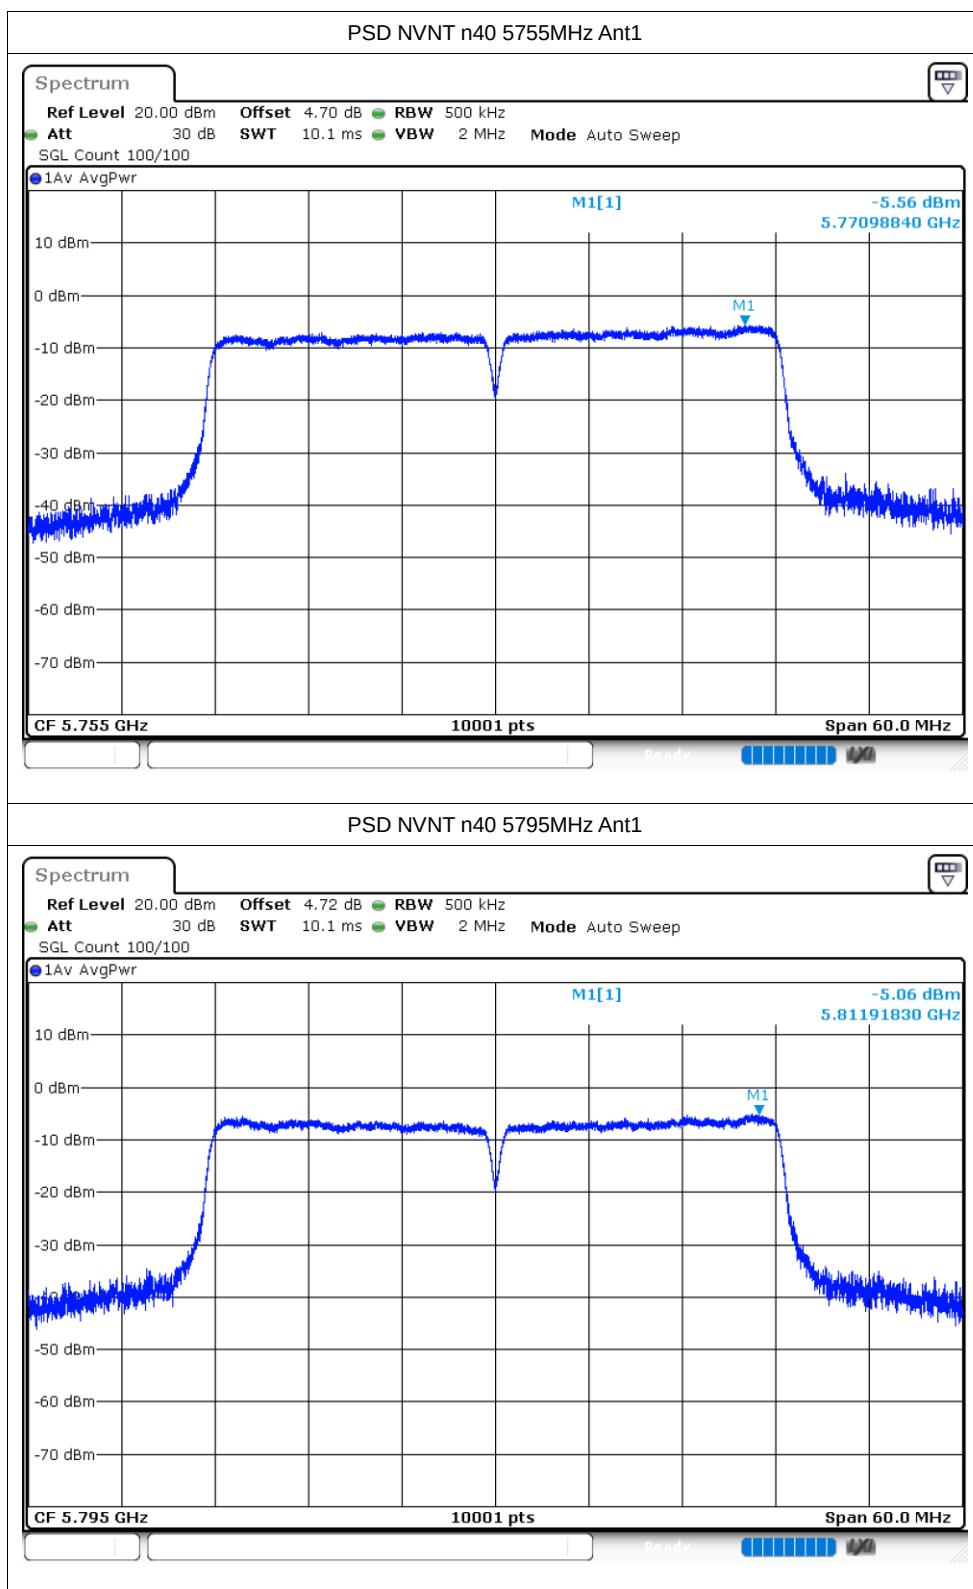

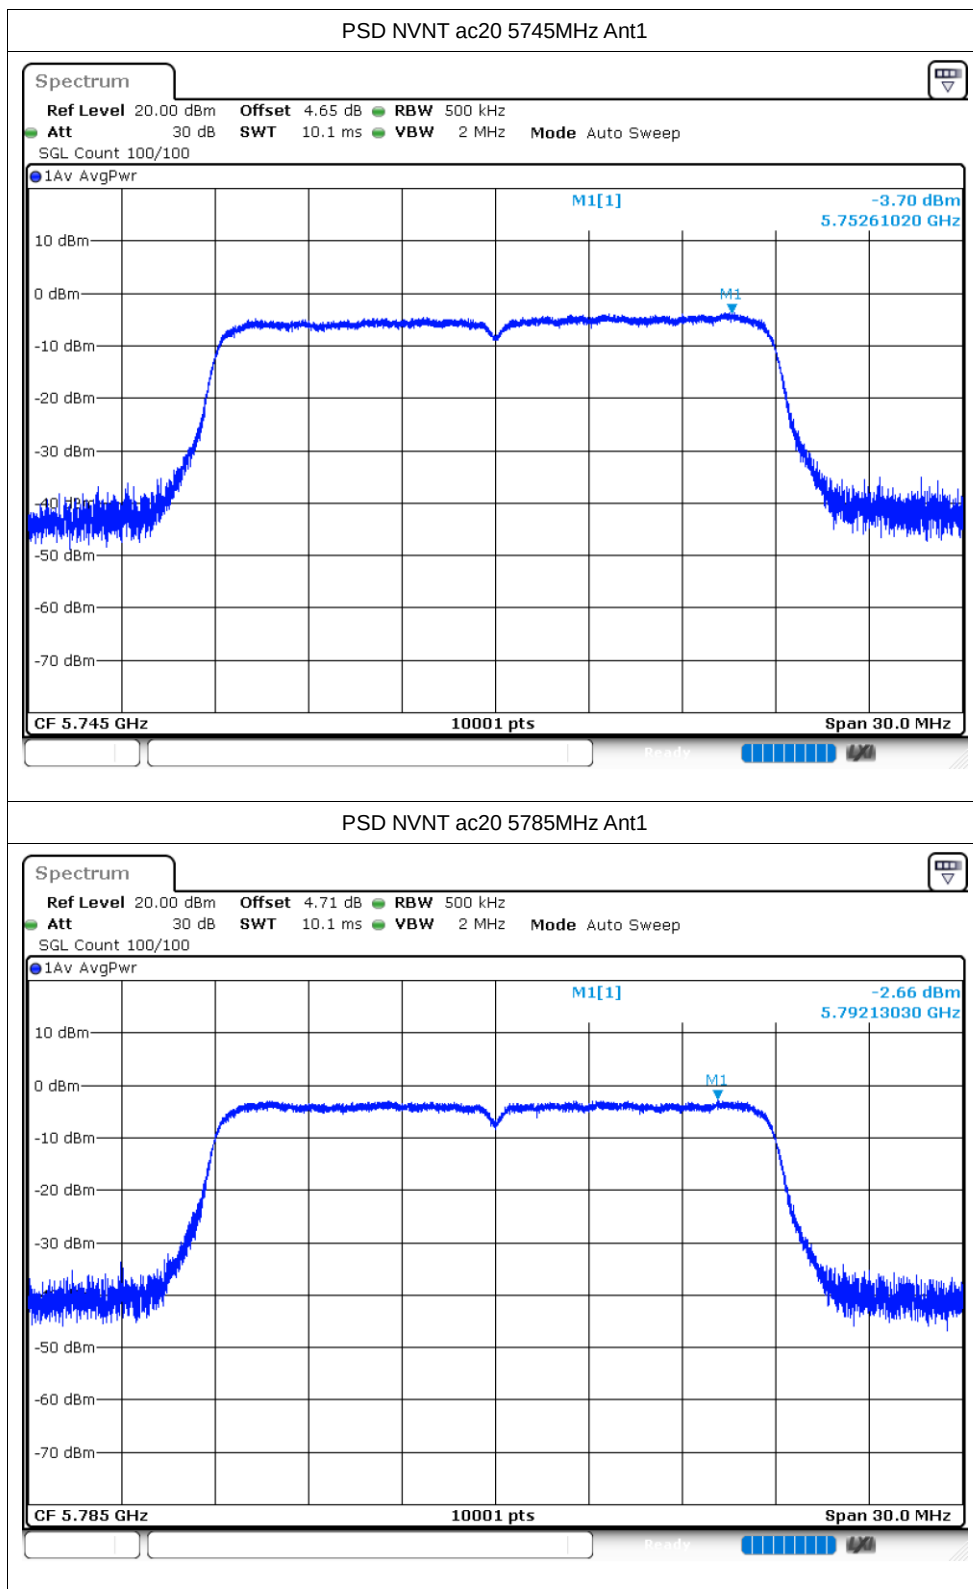

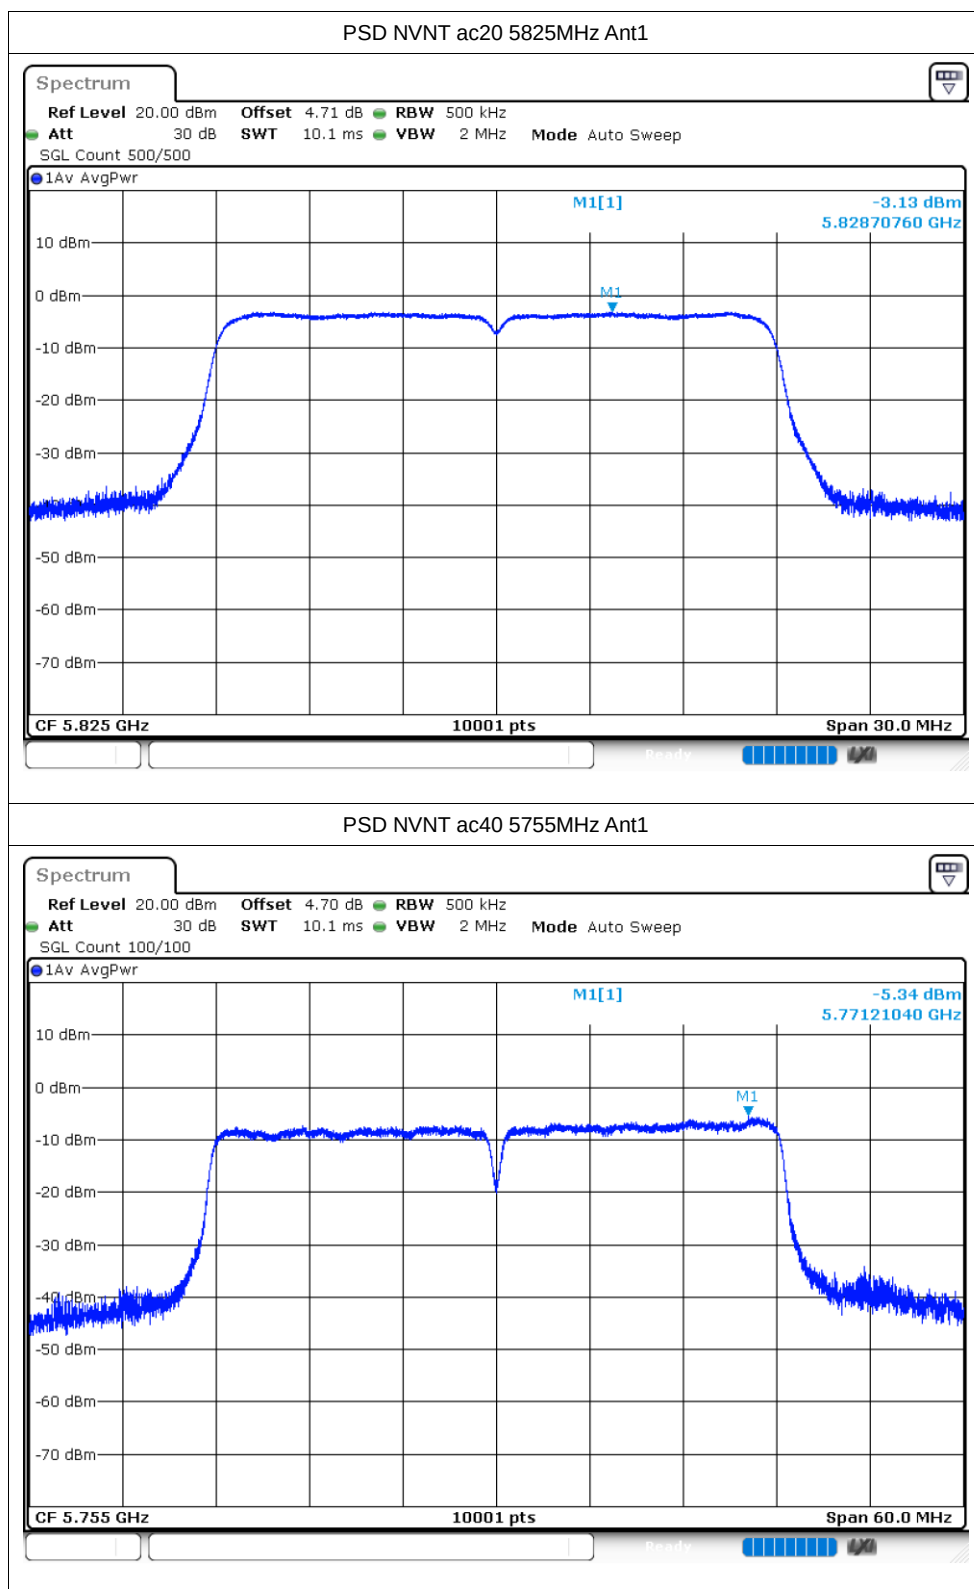

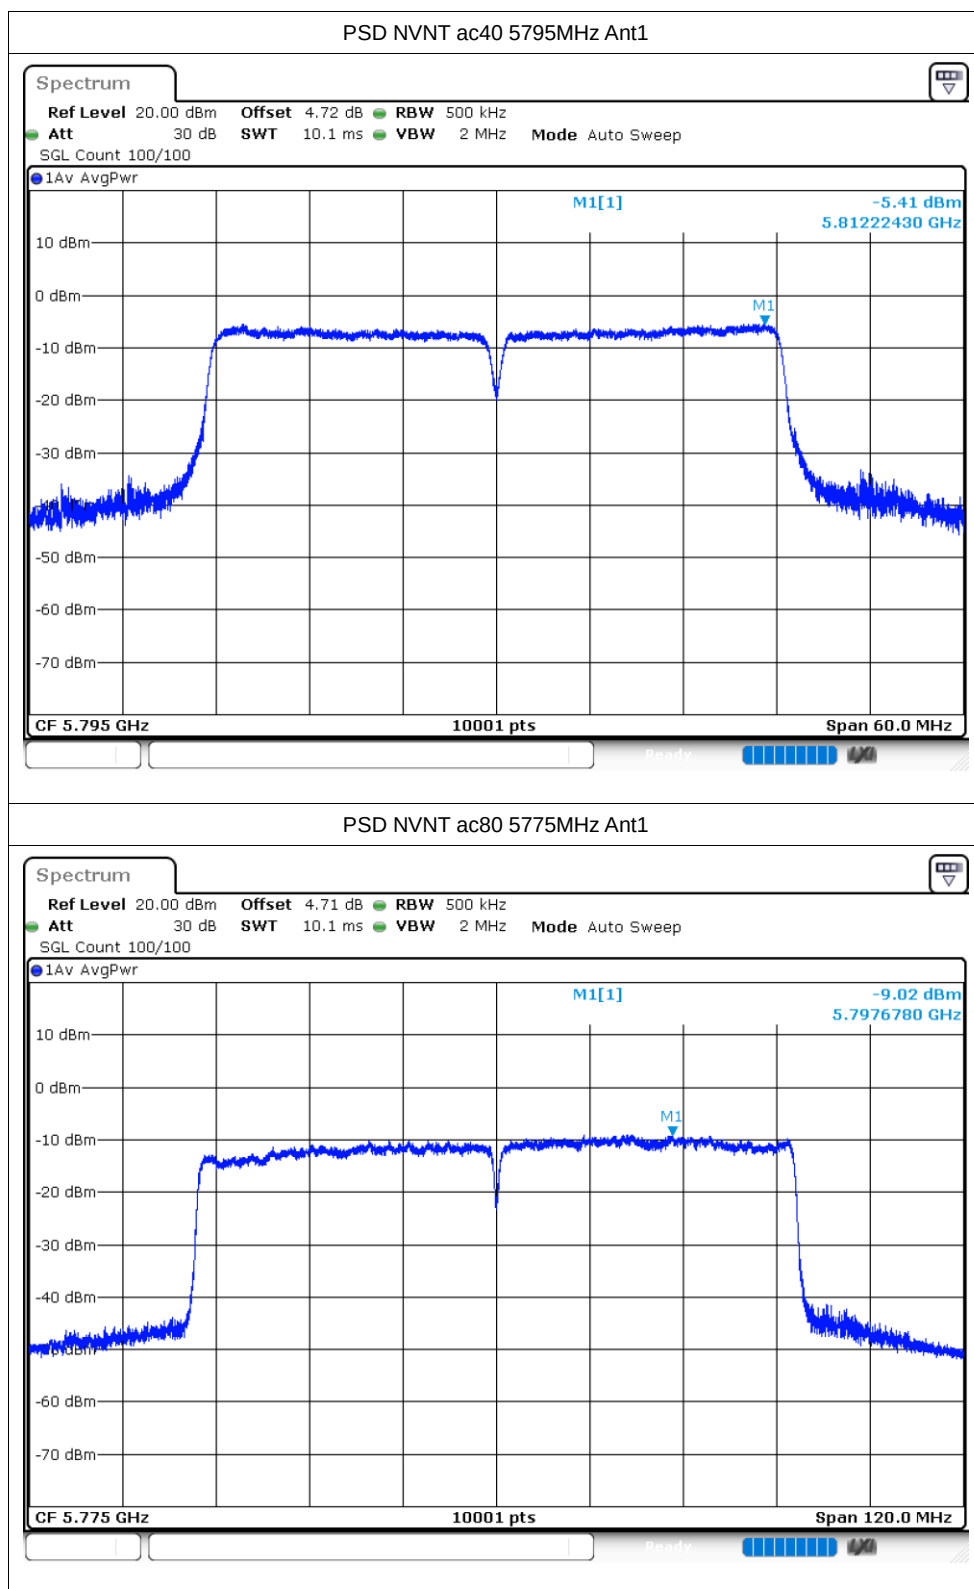


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-35.17	-27	Pass
NVNT	a	5825	Ant1	-33.83	-27	Pass
NVNT	n20	5745	Ant1	-35.89	-27	Pass
NVNT	n20	5825	Ant1	-33.38	-27	Pass
NVNT	n40	5755	Ant1	-35.35	-27	Pass
NVNT	n40	5795	Ant1	-33.8	-27	Pass
NVNT	ac20	5745	Ant1	-35.85	-27	Pass
NVNT	ac20	5825	Ant1	-33.83	-27	Pass
NVNT	ac40	5755	Ant1	-35.45	-27	Pass
NVNT	ac40	5795	Ant1	-34.67	-27	Pass
NVNT	ac80	5755	Ant1	-34.27	-27	Pass
NVNT	ac80	5755	Ant1	-35.77	-27	Pass


Test Graphs

Band Edge NVNT a 5745MHz Low Ant1

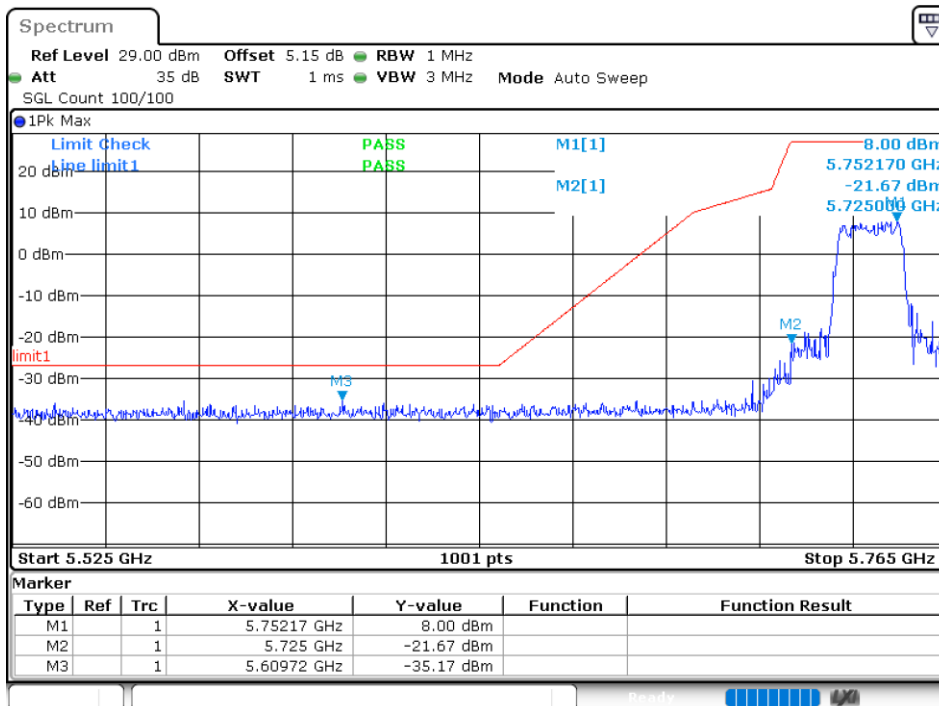


Band Edge NVNT a 5825MHz High Ant1

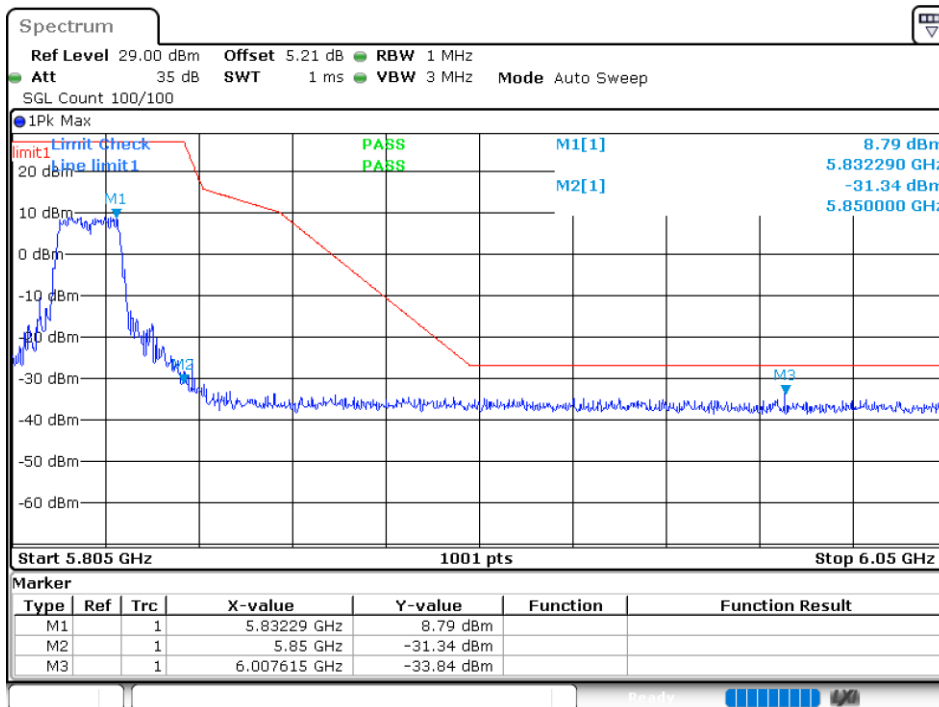


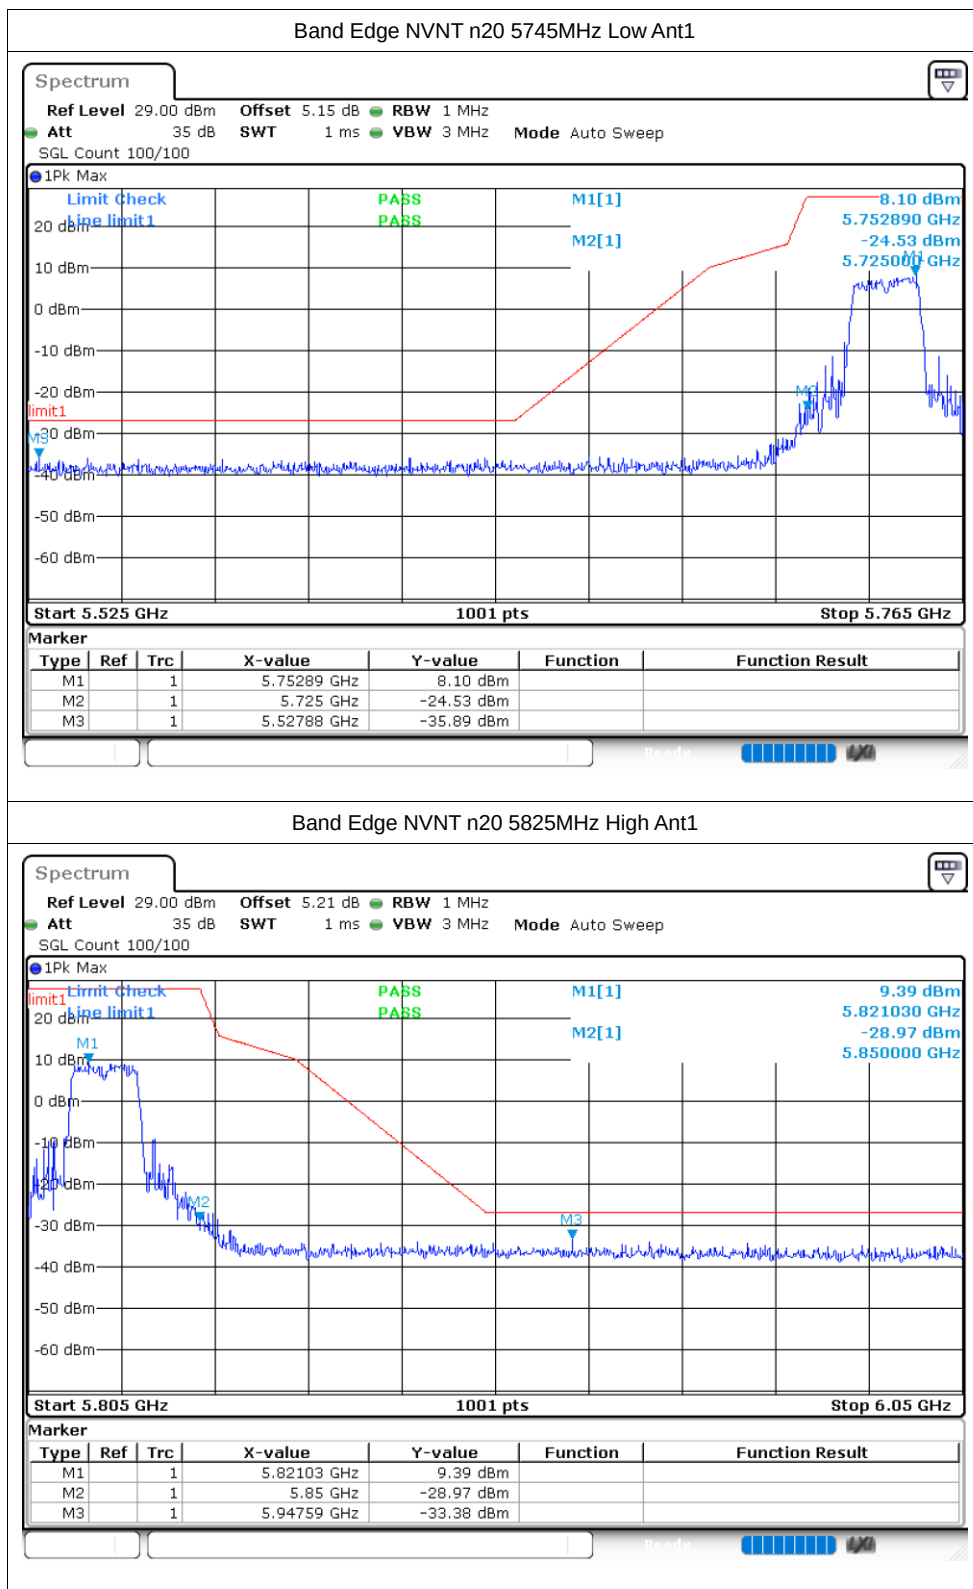



Band Edge NVNT n40 5755MHz Low Ant1

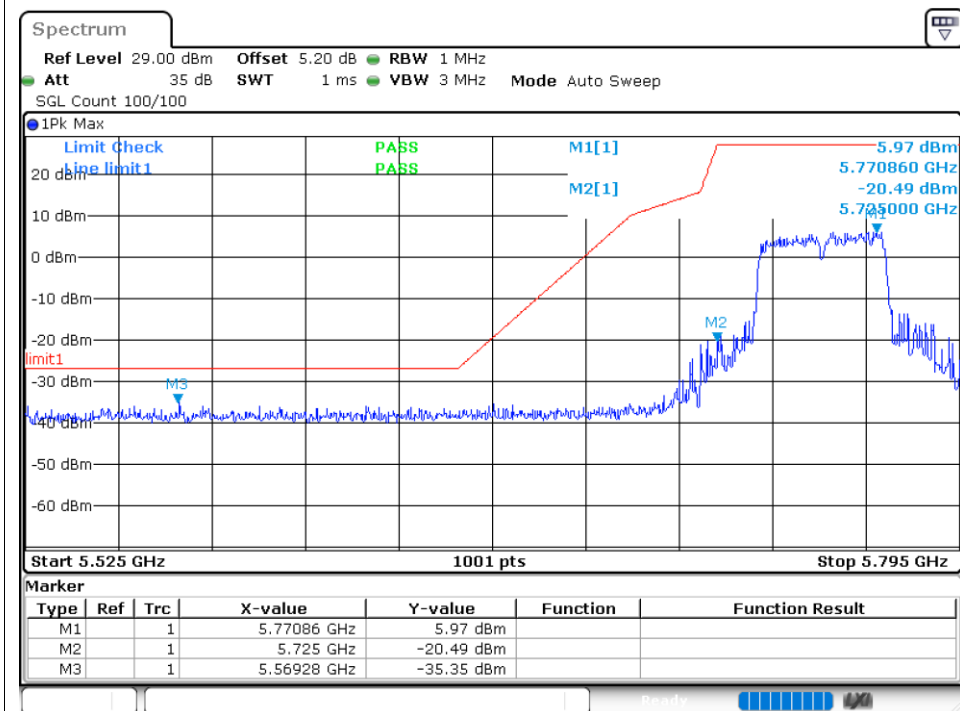


Band Edge NVNT n40 5795MHz High Ant1

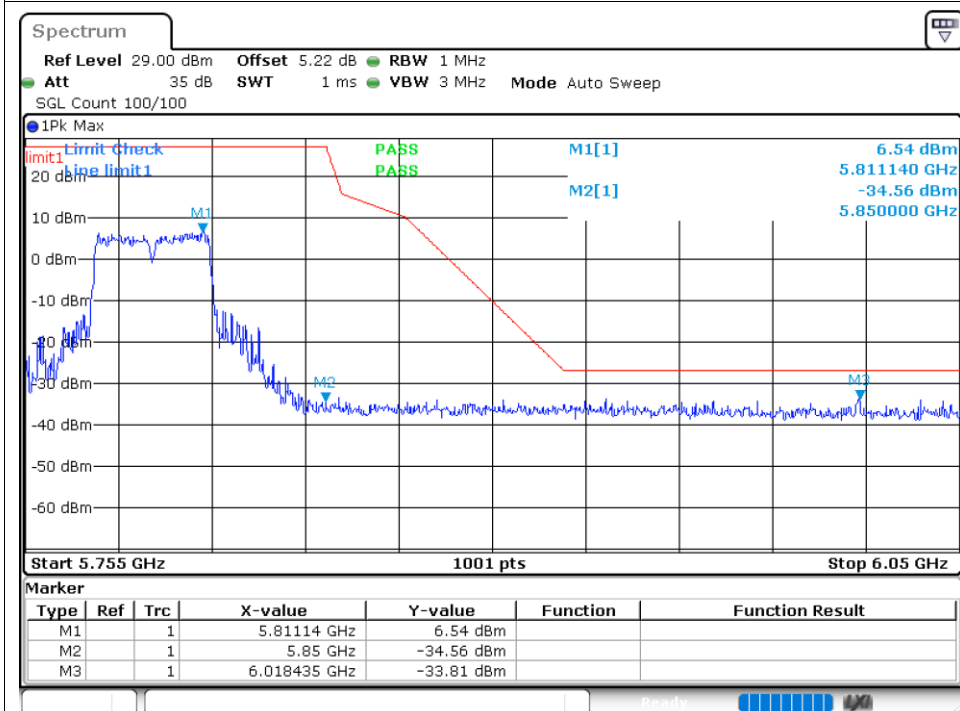

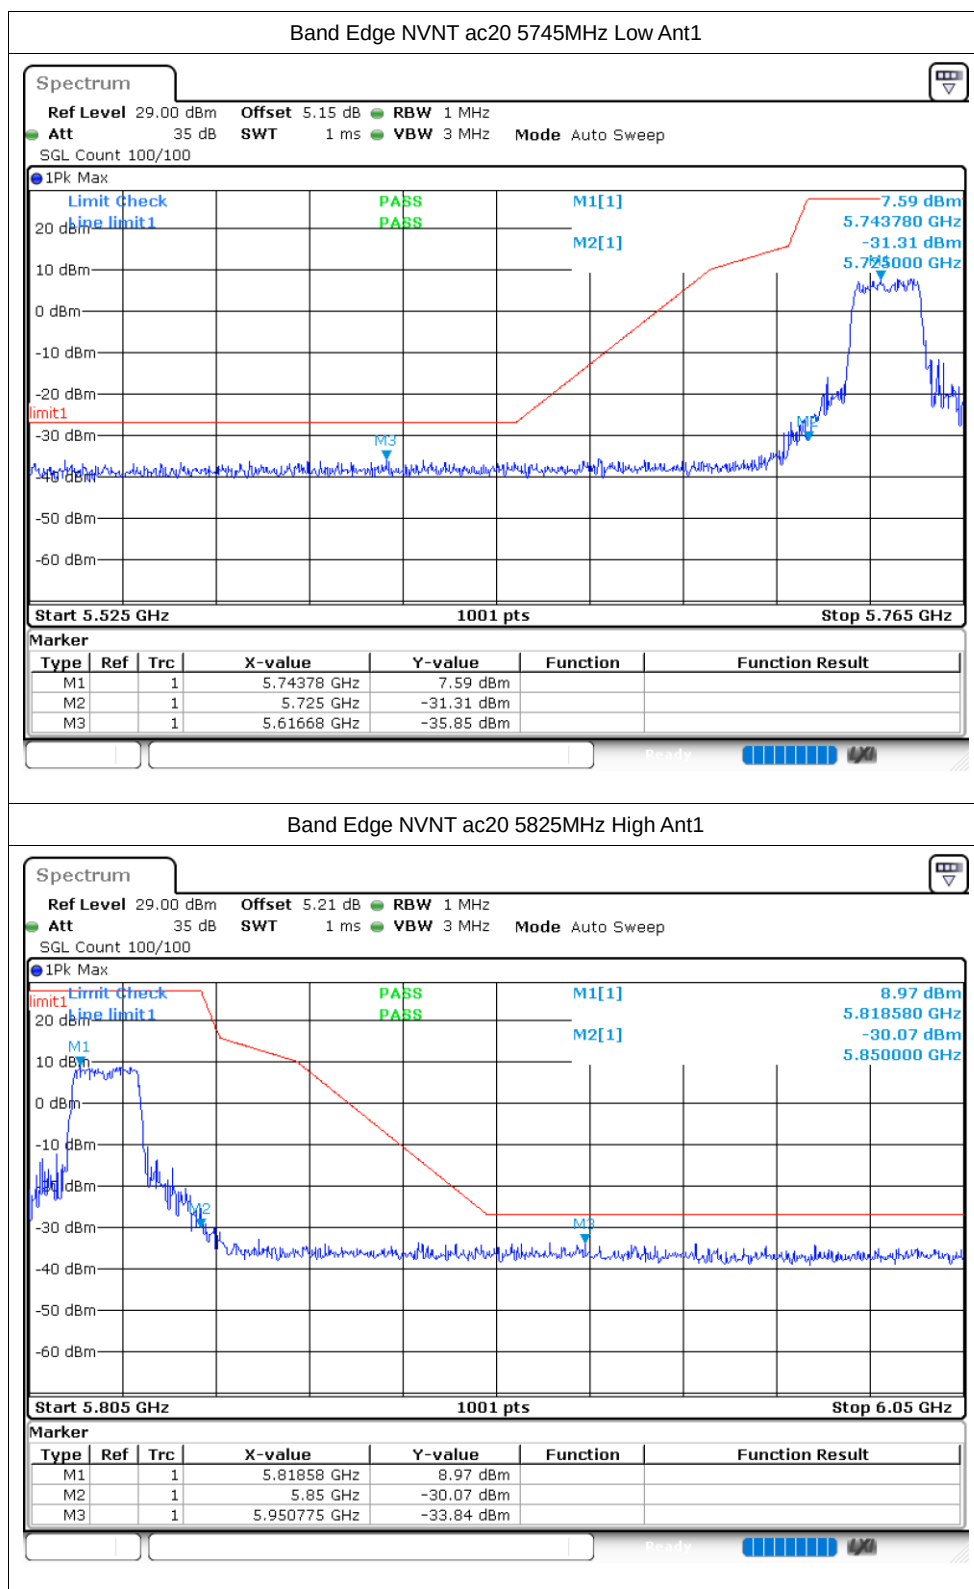

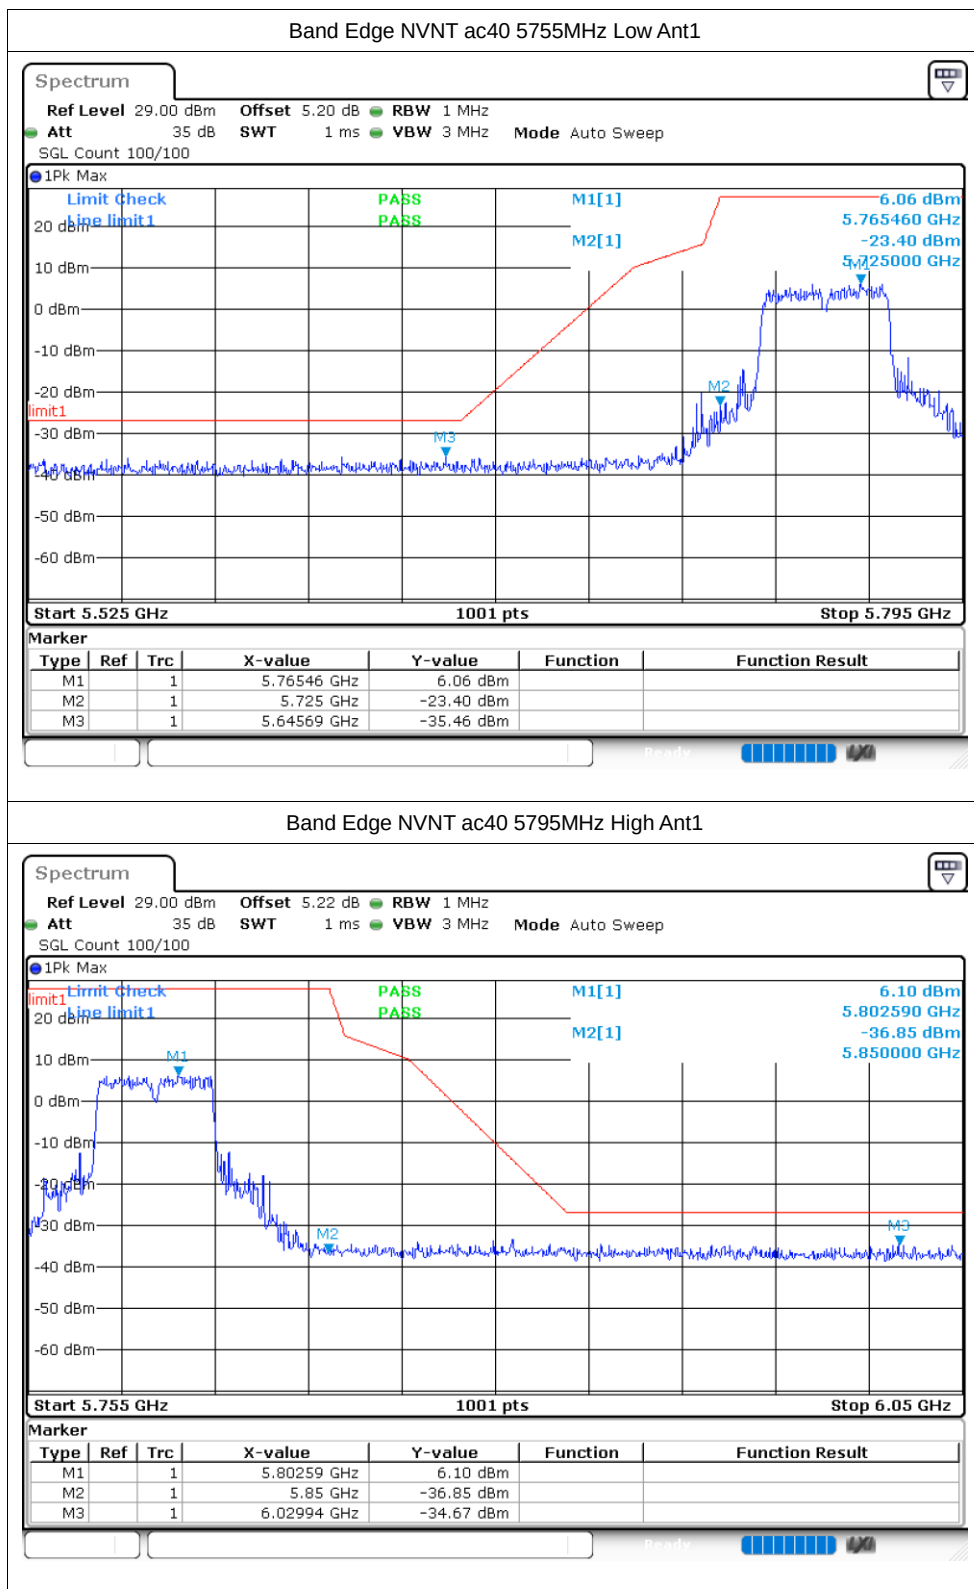

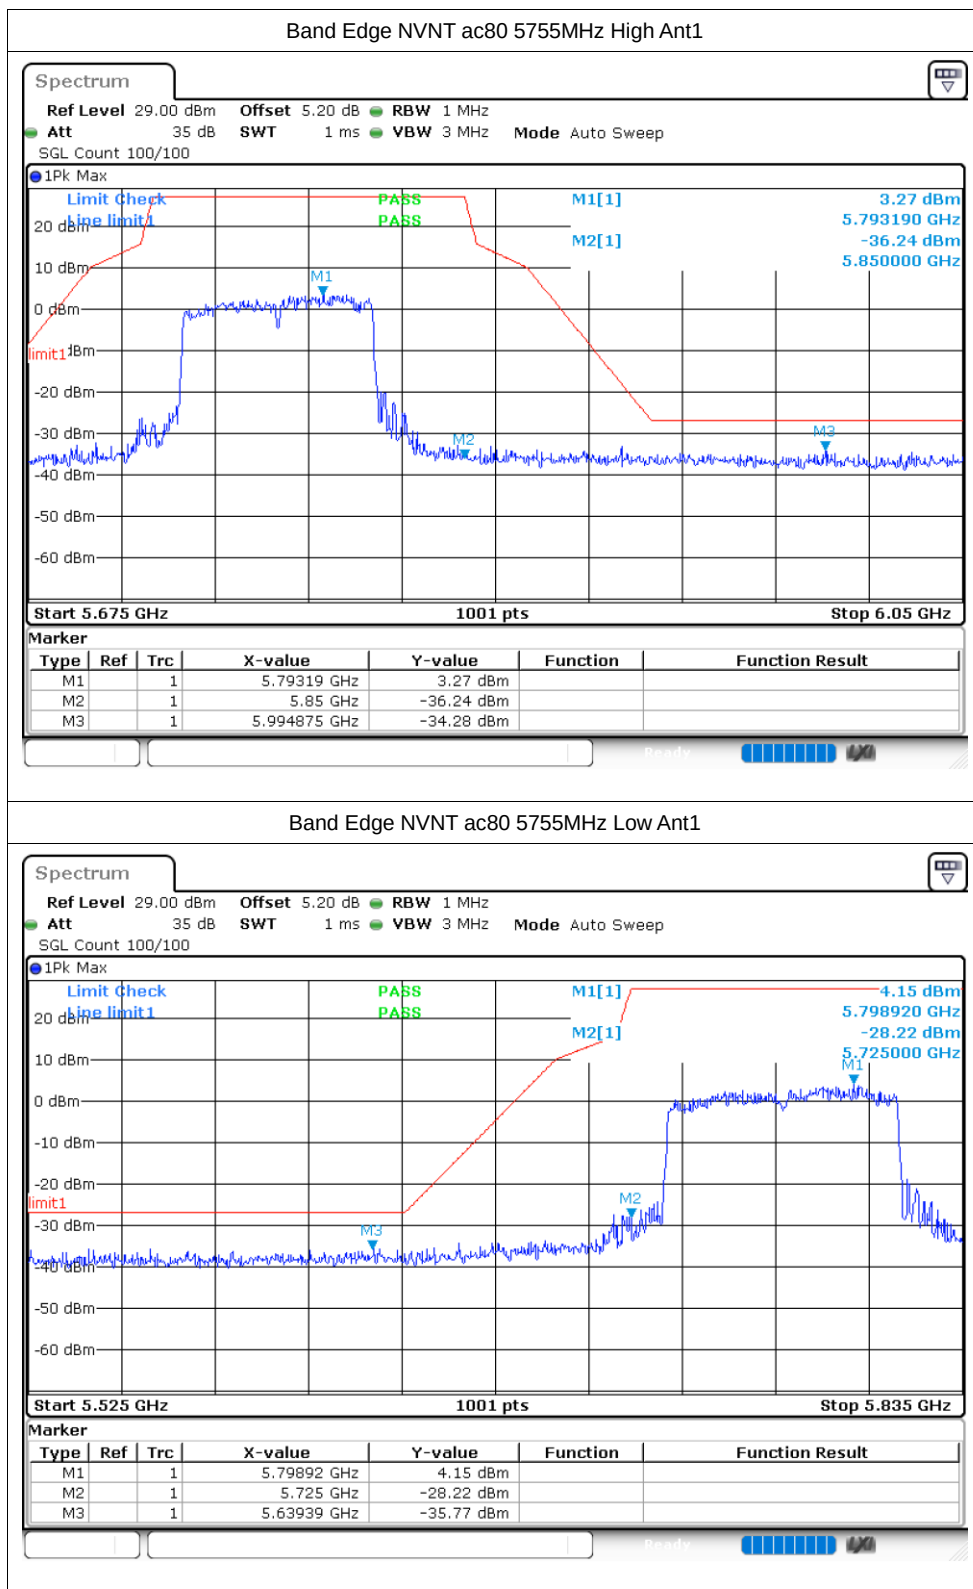

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-35.46	-27	Pass
NVNT	a	5785	Ant1	-35.18	-27	Pass
NVNT	a	5825	Ant1	-34.51	-27	Pass
NVNT	n20	5745	Ant1	-36.04	-27	Pass
NVNT	n20	5785	Ant1	-34.76	-27	Pass
NVNT	n20	5825	Ant1	-34.51	-27	Pass
NVNT	n40	5755	Ant1	-36.06	-27	Pass
NVNT	n40	5795	Ant1	-33.82	-27	Pass
NVNT	ac20	5745	Ant1	-35.68	-27	Pass
NVNT	ac20	5785	Ant1	-35.75	-27	Pass
NVNT	ac20	5825	Ant1	-35.76	-27	Pass
NVNT	ac40	5755	Ant1	-35.37	-27	Pass
NVNT	ac40	5795	Ant1	-35.29	-27	Pass
NVNT	ac80	5775	Ant1	-35.55	-27	Pass

