# 13 100kHz Bandwidth of Frequency Band Edge Requirement

## 13.1 Test Standard and Limit

| | |
|---|---|
| Test Standard | FCC Part15 C Section 15.247 (d) |
| Test Limit | in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a). |

## 13.2 Test Setup

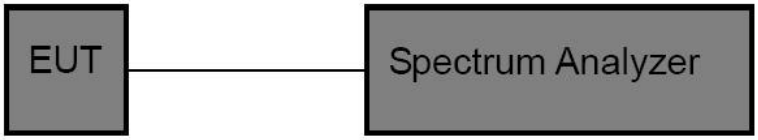


## 13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

**Reference Level:**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum; Set to the maximum power setting and enable the EUT transmit continuously.
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto.
Detector function = peak, Trace = max hold.

**Spurious Emissions Measurement:**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto.
Detector function = peak, Trace = max hold.

## 13.4 Test Data

| | | | | | |
|---|---|---|---|---|---|
| Test Item | : | Band edge | Test Mode | : | CH Low ~ CH High |
| Test Voltage | : | AC 110V | Temperature | : | 24.5℃ |
| Test Result | : | PASS | Humidity | : | 55%RH |

| TestMode | Antenna | ChName | Frequency[MHz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|---|---|---|---|---|---|---|---|
| DH5 | Ant1 | Low | 2402 | 3.77 | -41.9 | ≤-16.23 | PASS |
| DH5 | Ant1 | High | 2480 | 2.78 | -42.46 | ≤-17.22 | PASS |
| DH5 | Ant1 | Low | Hop_2402 | 4.68 | -42.65 | ≤-15.32 | PASS |
| DH5 | Ant1 | High | Hop_2480 | 4.16 | -41.98 | ≤-15.84 | PASS |
| 2DH5 | Ant1 | Low | 2402 | 3.09 | -42.36 | ≤-16.92 | PASS |
| 2DH5 | Ant1 | High | 2480 | 2.29 | -42.18 | ≤-17.71 | PASS |
| 2DH5 | Ant1 | Low | Hop_2402 | 1.69 | -41.87 | ≤-18.31 | PASS |
| 2DH5 | Ant1 | High | Hop_2480 | 4.40 | -41.04 | ≤-15.6 | PASS |
| 3DH5 | Ant1 | Low | 2402 | 2.04 | -42.51 | ≤-17.96 | PASS |
| 3DH5 | Ant1 | High | 2480 | 1.93 | -40.96 | ≤-18.07 | PASS |
| 3DH5 | Ant1 | Low | Hop_2402 | 0.27 | -42.16 | ≤-19.73 | PASS |
| 3DH5 | Ant1 | High | Hop_2480 | 3.74 | -41.9 | ≤-16.27 | PASS |

## Test Graphs:

DH5-Ant1-2402-PASS

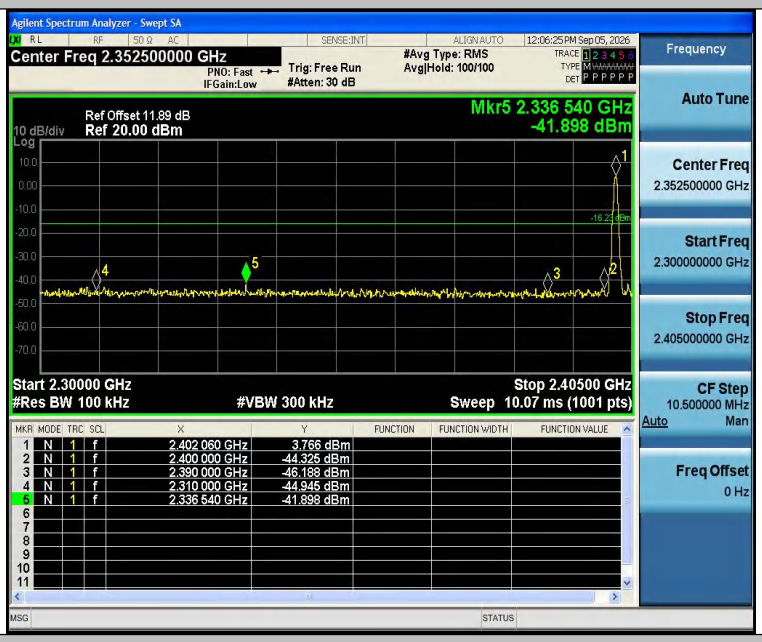


DH5-Ant1-2480-PASS

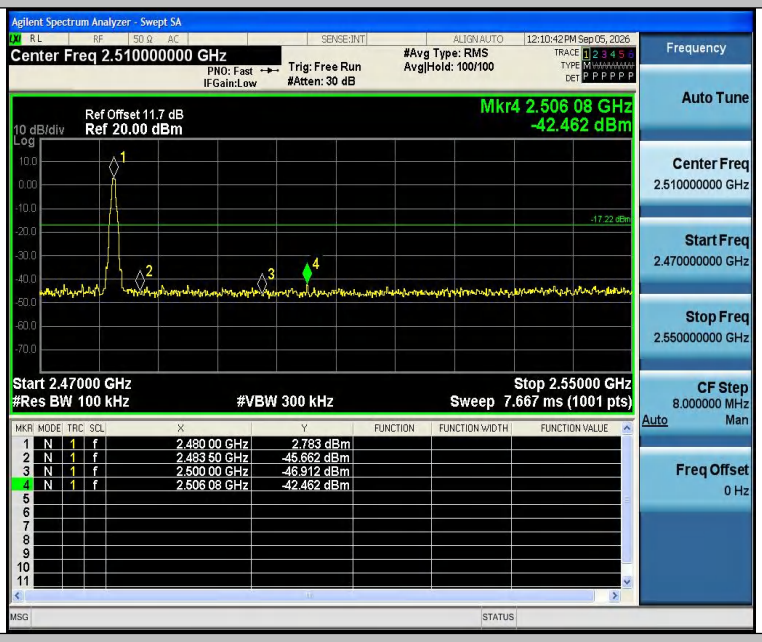


DH5-Ant1-Hop_2402-PASS

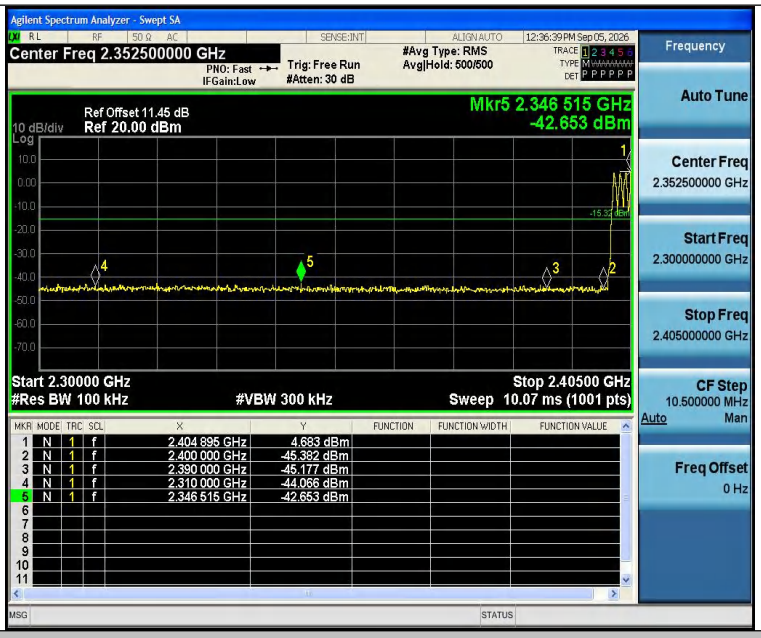


DH5-Ant1-Hop_2480-PASS

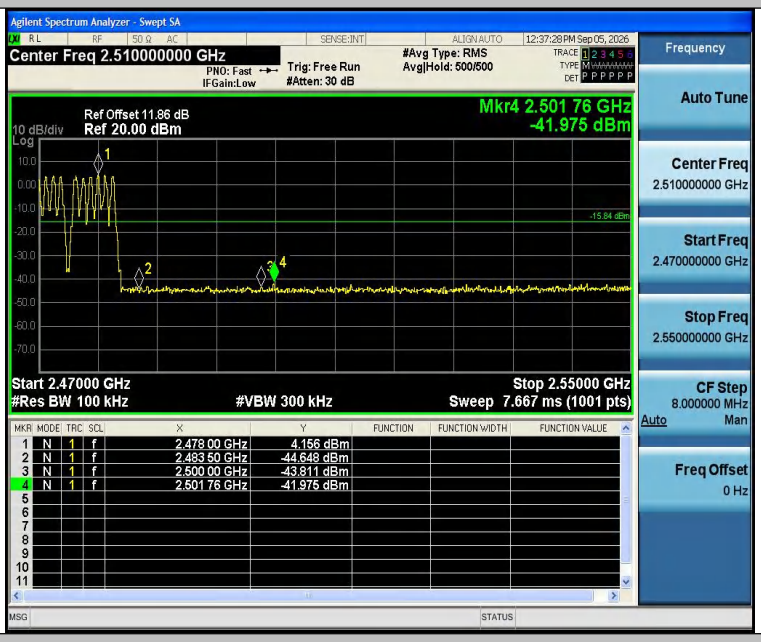


2DH5-Ant1-2402-PASS

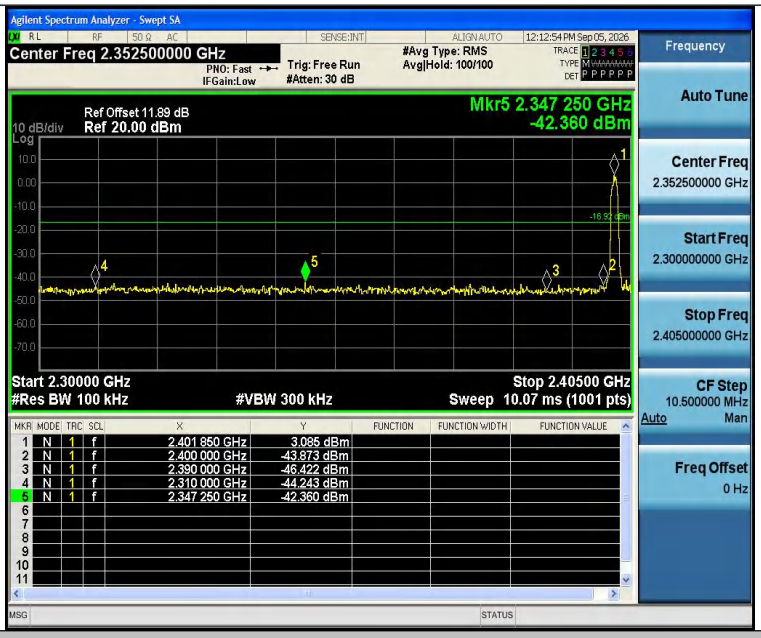


2DH5-Ant1-2480-PASS

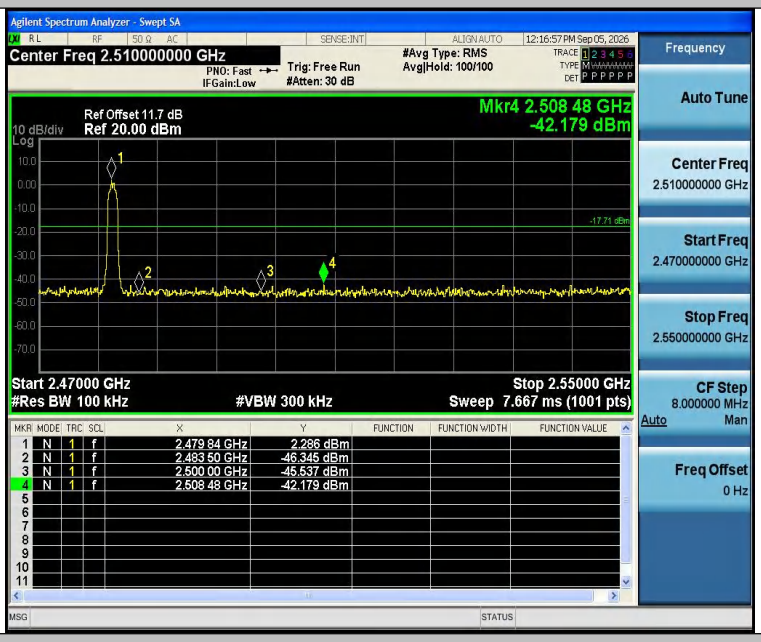


2DH5-Ant1-Hop_2402-PASS

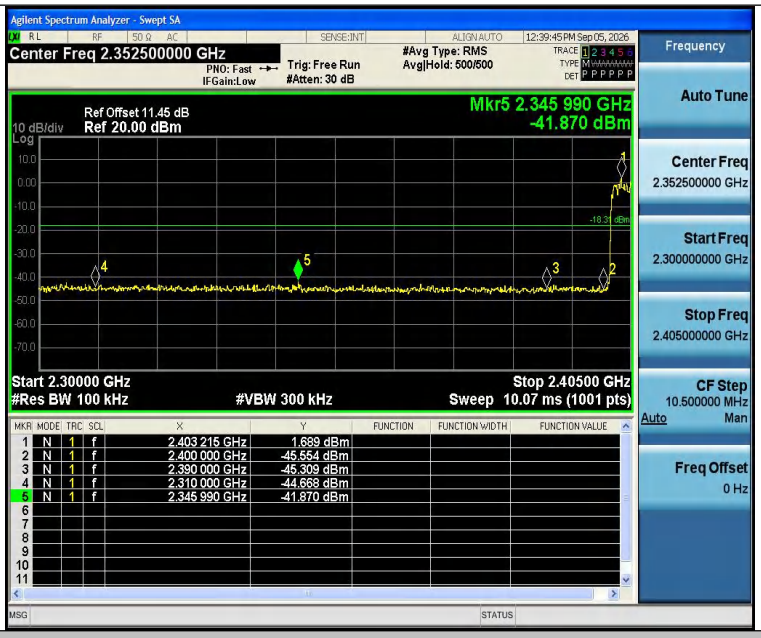


2DH5-Ant1-Hop_2480-PASS

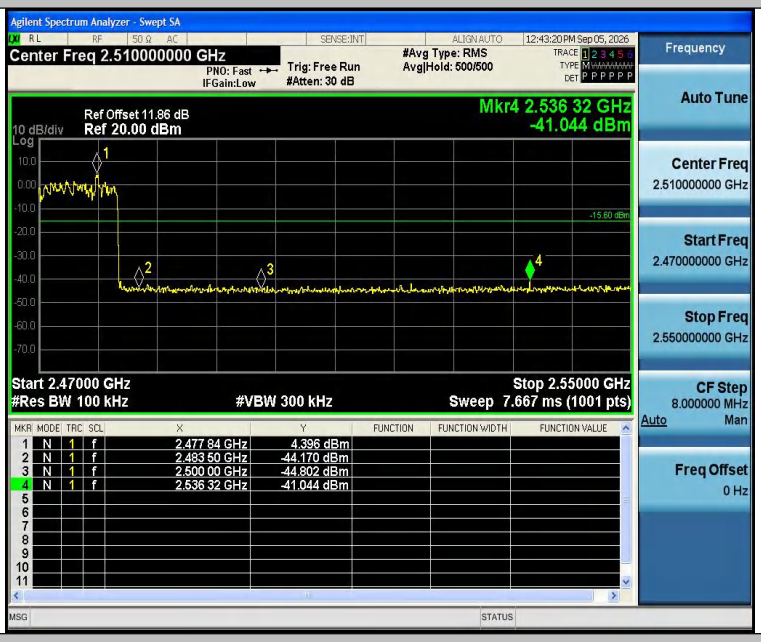


3DH5-Ant1-2402-PASS

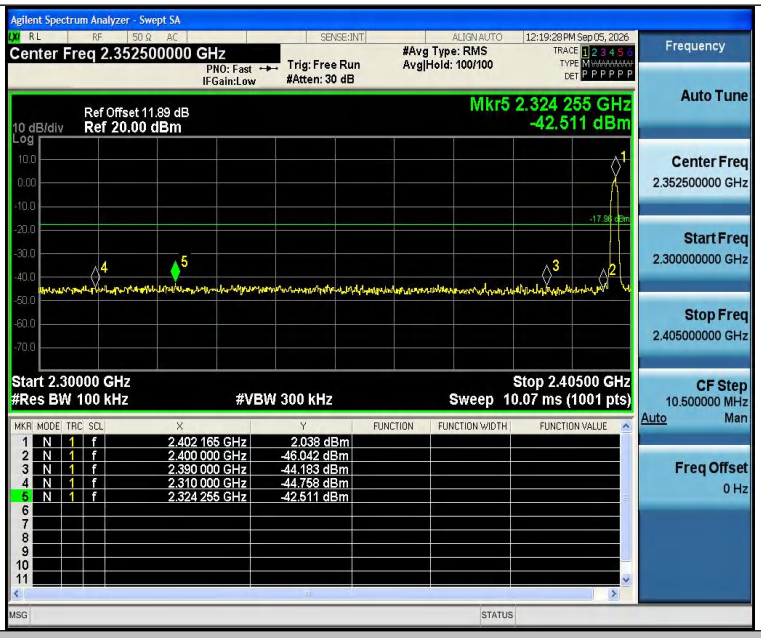


3DH5-Ant1-2480-PASS

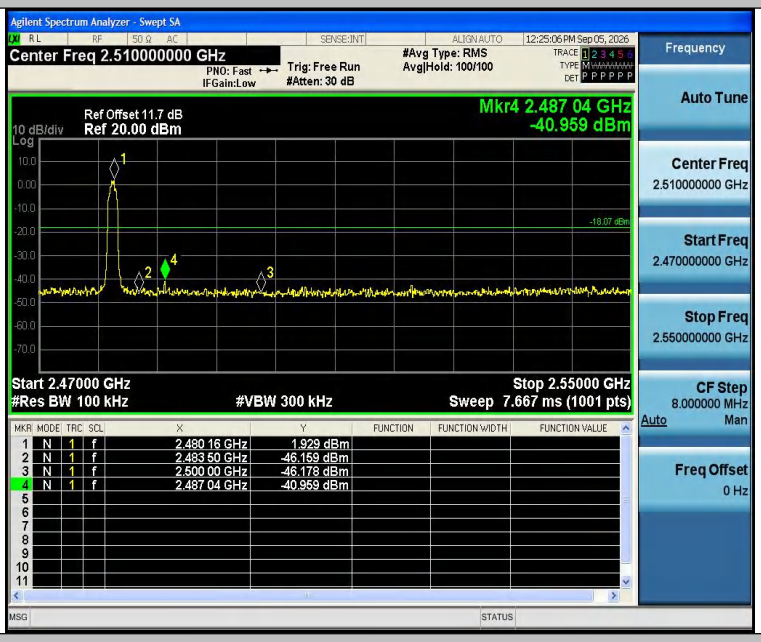


3DH5-Ant1-Hop_2402-PASS

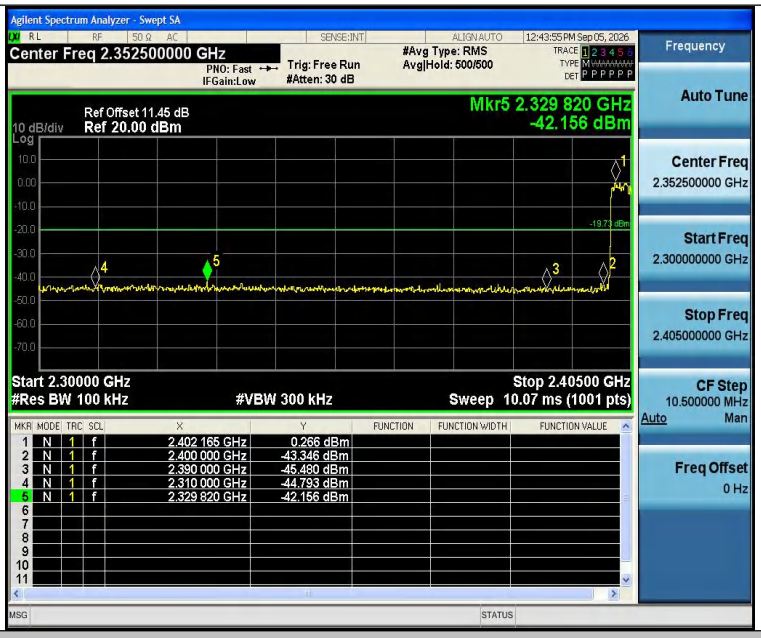


3DH5-Ant1-Hop_2480-PASS

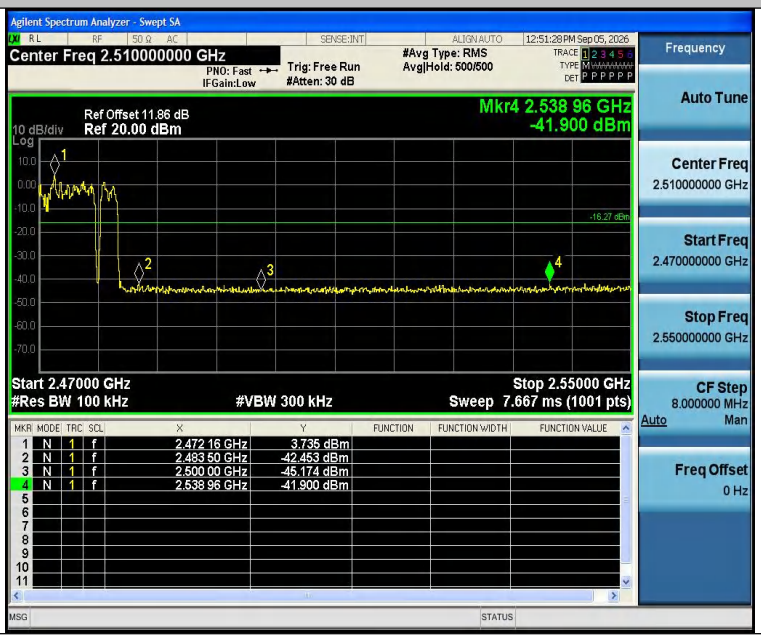

Conducted Emission Method

Test Result

| TestMode | Antenna | Frequency[MHz] | FreqRange [MHz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|---|---|---|---|---|---|---|---|
| DH5 | Ant1 | 2402 | 0~Reference | 3.41 | 3.41 | --- | PASS |
| DH5 | Ant1 | 2402 | 30~1000 | 3.41 | -54.13 | ≤-16.59 | PASS |
| DH5 | Ant1 | 2402 | 1000~26500 | 3.41 | -41.78 | ≤-16.59 | PASS |
| DH5 | Ant1 | 2441 | 0~Reference | 2.58 | 2.58 | --- | PASS |
| DH5 | Ant1 | 2441 | 30~1000 | 2.58 | -54.2 | ≤-17.42 | PASS |
| DH5 | Ant1 | 2441 | 1000~26500 | 2.58 | -42.94 | ≤-17.42 | PASS |
| DH5 | Ant1 | 2480 | 0~Reference | 2.37 | 2.37 | --- | PASS |
| DH5 | Ant1 | 2480 | 30~1000 | 2.37 | -54.36 | ≤-17.63 | PASS |
| DH5 | Ant1 | 2480 | 1000~26500 | 2.37 | -43.03 | ≤-17.63 | PASS |
| 2DH5 | Ant1 | 2402 | 0~Reference | -0.17 | -0.17 | --- | PASS |
| 2DH5 | Ant1 | 2402 | 30~1000 | -0.17 | -54.78 | ≤-20.17 | PASS |
| 2DH5 | Ant1 | 2402 | 1000~26500 | -0.17 | -42.72 | ≤-20.17 | PASS |
| 2DH5 | Ant1 | 2441 | 0~Reference | 2.27 | 2.27 | --- | PASS |
| 2DH5 | Ant1 | 2441 | 30~1000 | 2.27 | -53.73 | ≤-17.73 | PASS |
| 2DH5 | Ant1 | 2441 | 1000~26500 | 2.27 | -41.98 | ≤-17.73 | PASS |
| 2DH5 | Ant1 | 2480 | 0~Reference | -1.11 | -1.11 | --- | PASS |
| 2DH5 | Ant1 | 2480 | 30~1000 | -1.11 | -54.93 | ≤-21.11 | PASS |
| 2DH5 | Ant1 | 2480 | 1000~26500 | -1.11 | -42.96 | ≤-21.11 | PASS |
| 3DH5 | Ant1 | 2402 | 0~Reference | 0.32 | 0.32 | --- | PASS |
| 3DH5 | Ant1 | 2402 | 30~1000 | 0.32 | -53.4 | ≤-19.68 | PASS |
| 3DH5 | Ant1 | 2402 | 1000~26500 | 0.32 | -42.4 | ≤-19.68 | PASS |
| 3DH5 | Ant1 | 2441 | 0~Reference | -0.82 | -0.82 | --- | PASS |
| 3DH5 | Ant1 | 2441 | 30~1000 | -0.82 | -54.18 | ≤-20.82 | PASS |
| 3DH5 | Ant1 | 2441 | 1000~26500 | -0.82 | -43.1 | ≤-20.82 | PASS |
| 3DH5 | Ant1 | 2480 | 0~Reference | -0.59 | -0.59 | --- | PASS |
| 3DH5 | Ant1 | 2480 | 30~1000 | -0.59 | -53.38 | ≤-20.59 | PASS |
| 3DH5 | Ant1 | 2480 | 1000~26500 | -0.59 | -42.64 | ≤-20.59 | PASS |

Test Graphs:

DH5-Ant1-2402-0~Reference-PASS

DH5-Ant1-2402-30~1000-PASS

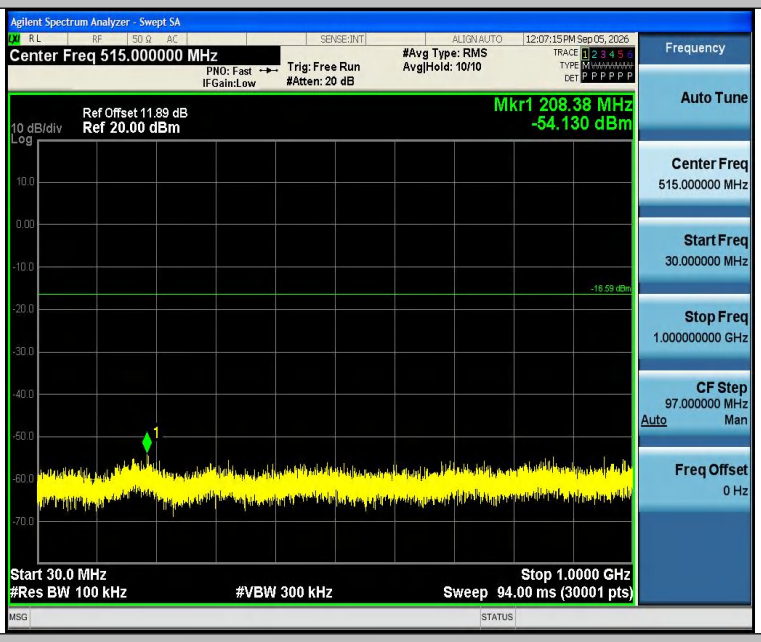


DH5-Ant1-2402-1000~26500-PASS

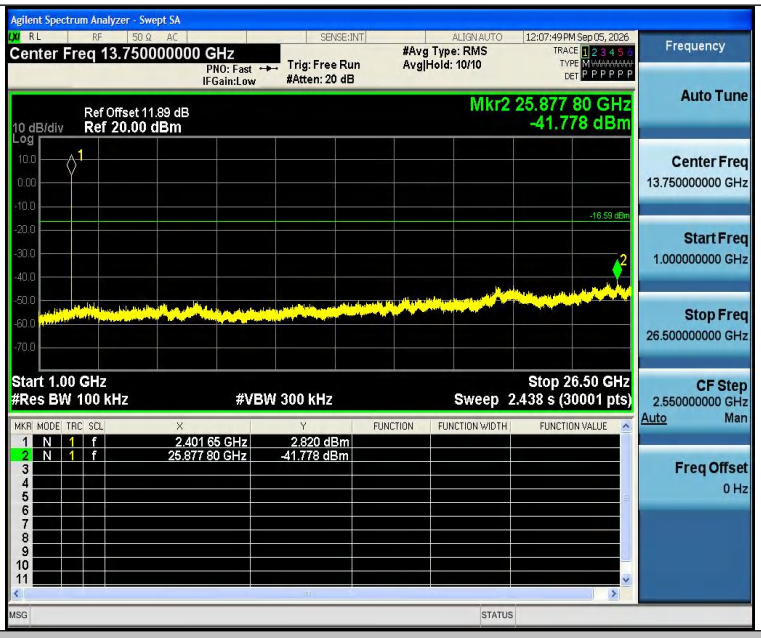


DH5-Ant1-2441-0~Reference-PASS

DH5-Ant1-2441-30~1000-PASS

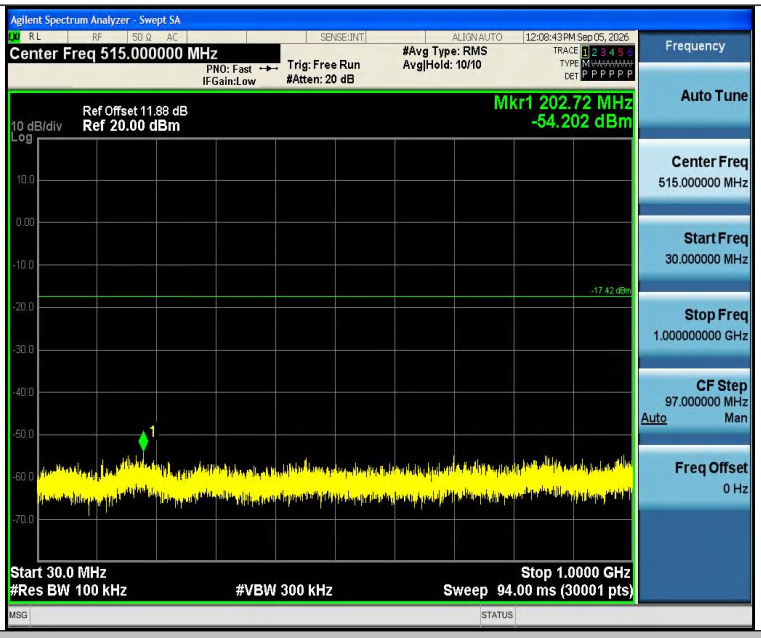


DH5-Ant1-2441-1000~26500-PASS

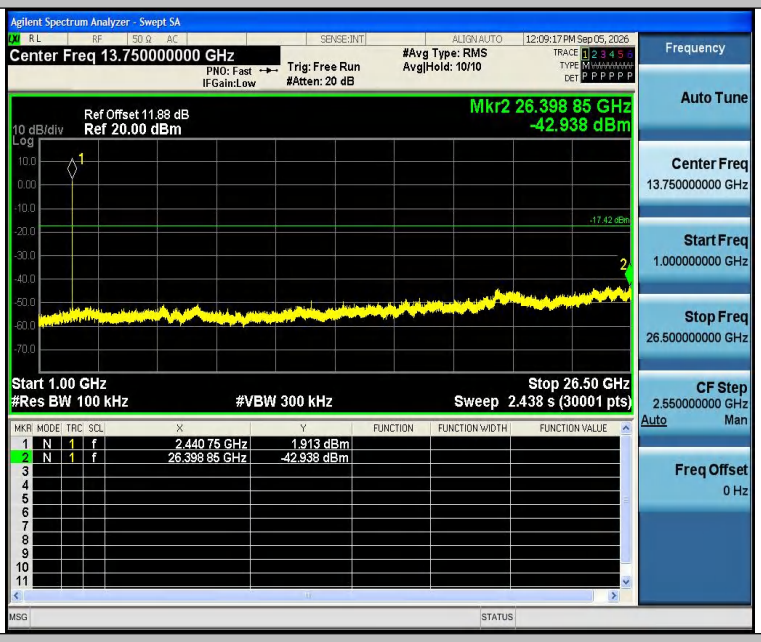


DH5-Ant1-2480-0~Reference-PASS

DH5-Ant1-2480-30~1000-PASS

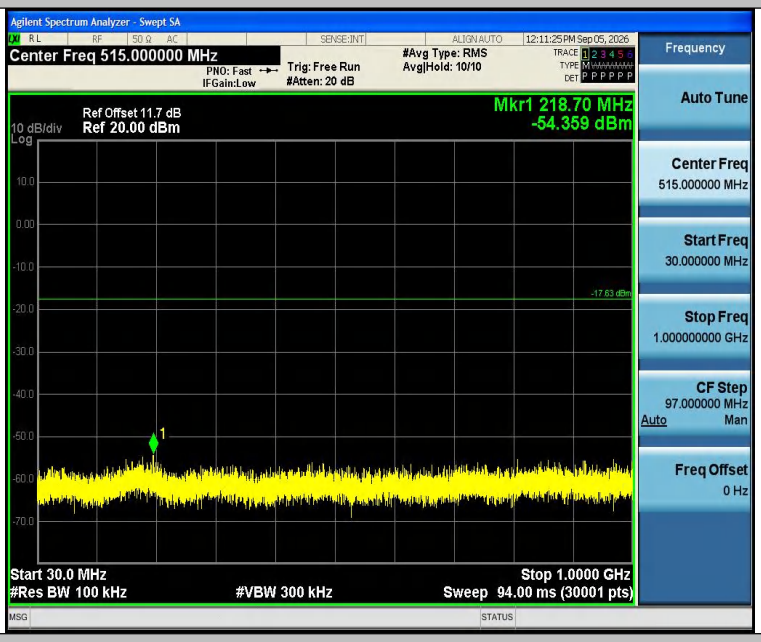


DH5-Ant1-2480-1000~26500-PASS

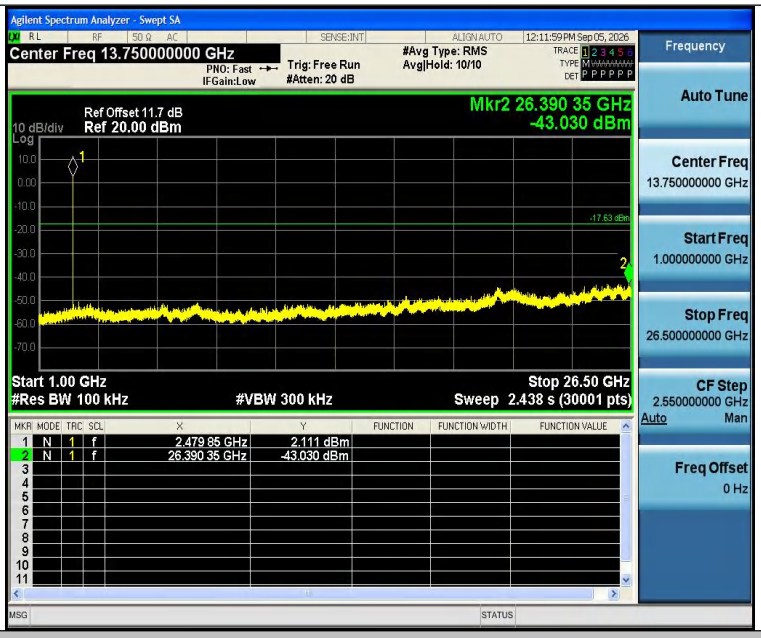


2DH5-Ant1-2402-0~Reference-PASS

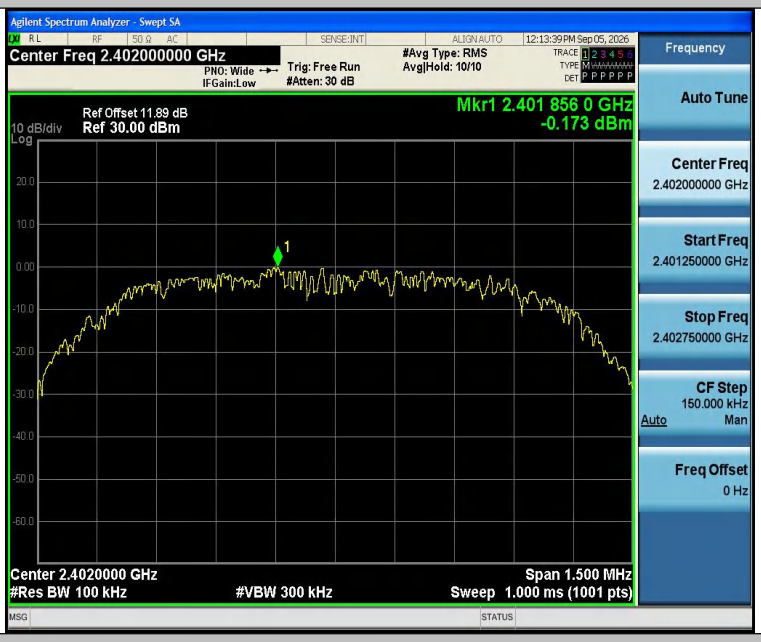


2DH5-Ant1-2402-30~1000-PASS

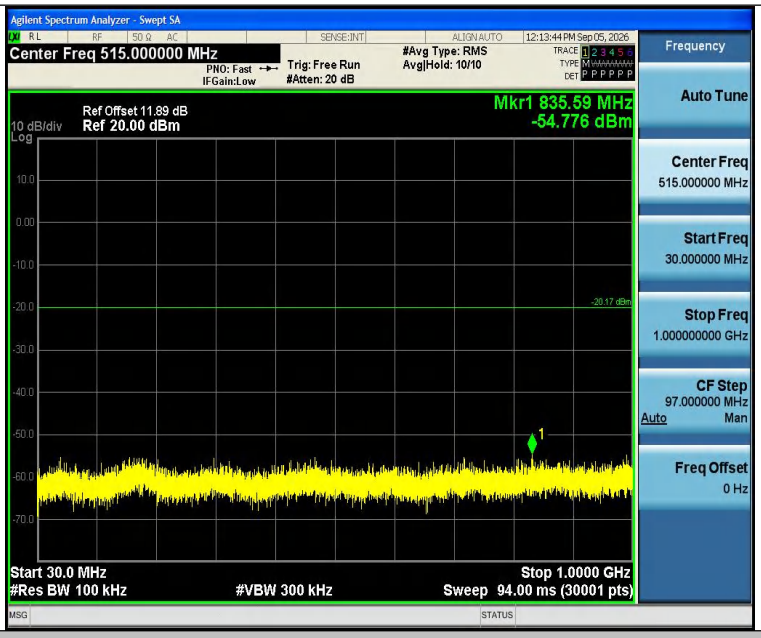


2DH5-Ant1-2402-1000~26500-PASS

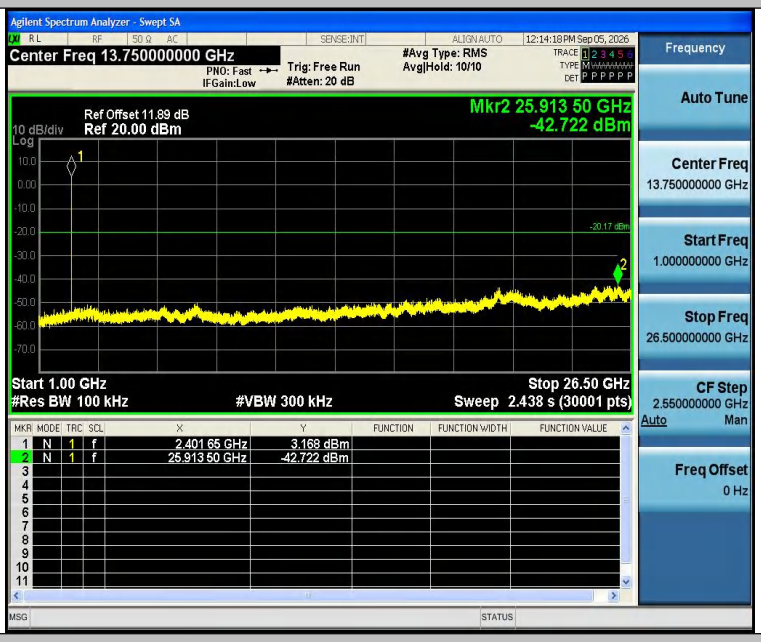


2DH5-Ant1-2441-0~Reference-PASS

2DH5-Ant1-2441-30~1000-PASS

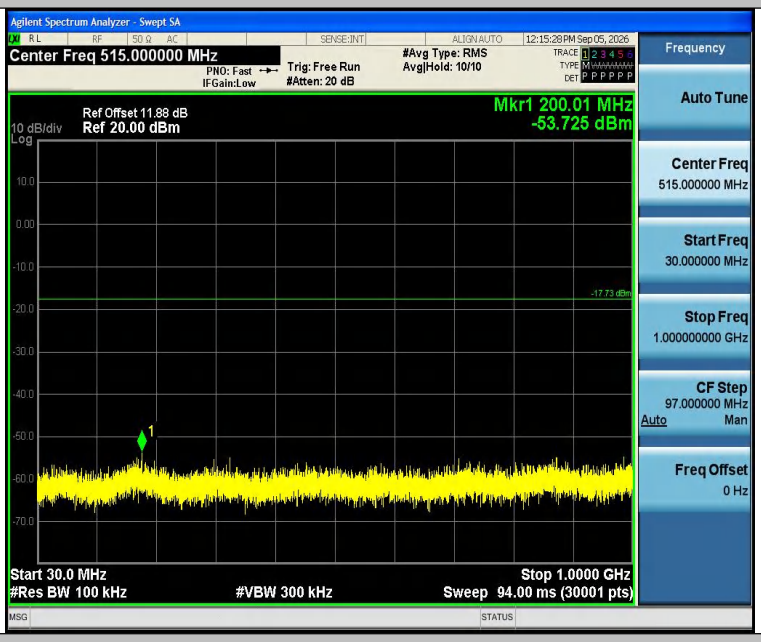


2DH5-Ant1-2441-1000~26500-PASS

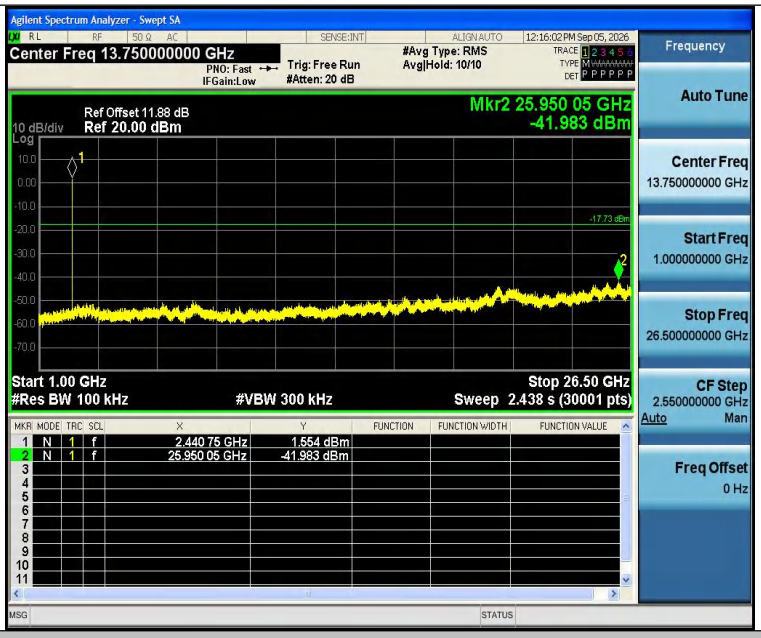


2DH5-Ant1-2480-0~Reference-PASS

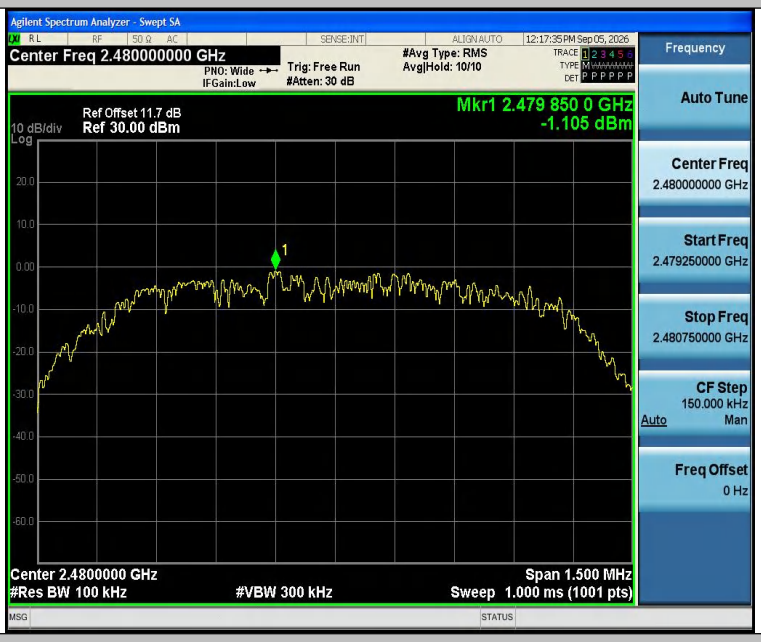


2DH5-Ant1-2480-30~1000-PASS

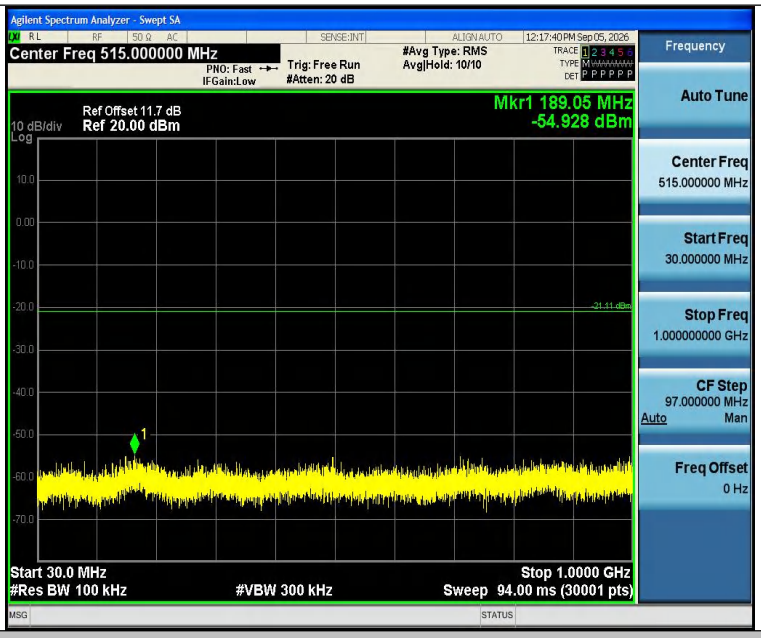


2DH5-Ant1-2480-1000~26500-PASS

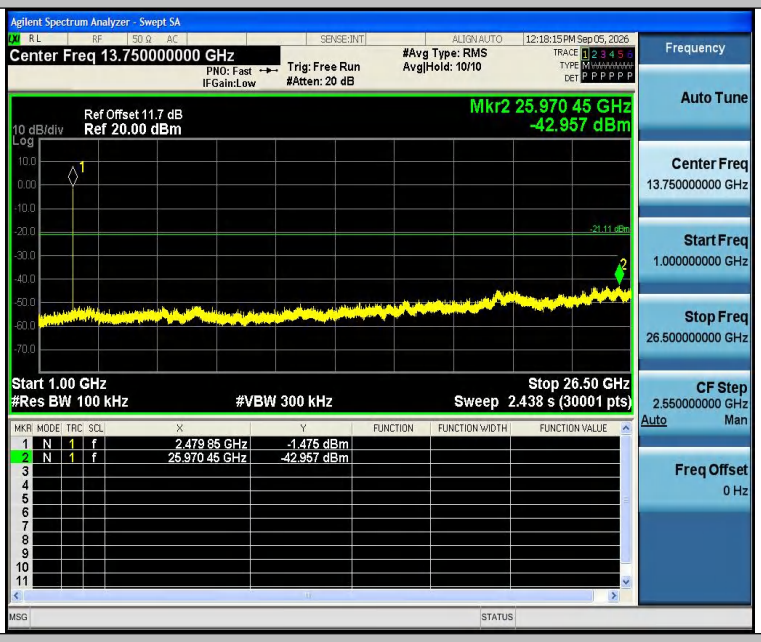


3DH5-Ant1-2402-0~Reference-PASS

3DH5-Ant1-2402-30~1000-PASS

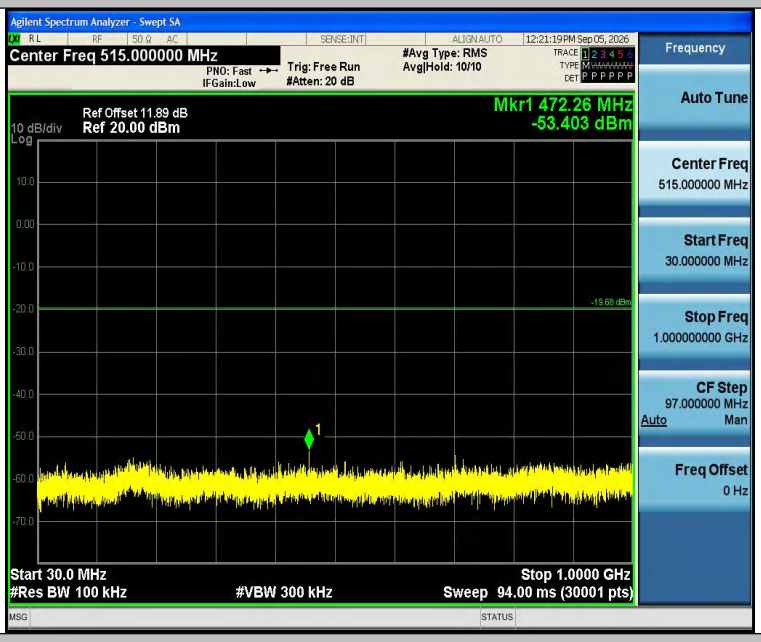


3DH5-Ant1-2402-1000~26500-PASS

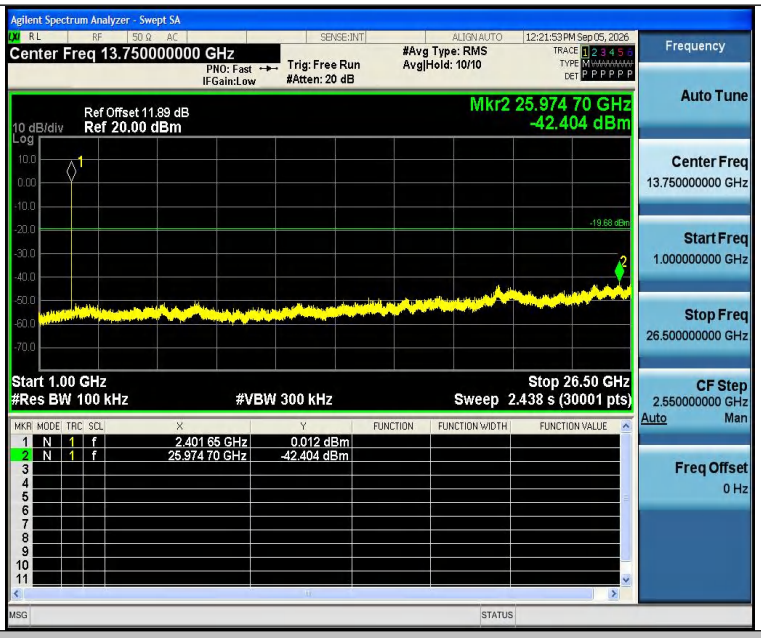


3DH5-Ant1-2441-0~Reference-PASS

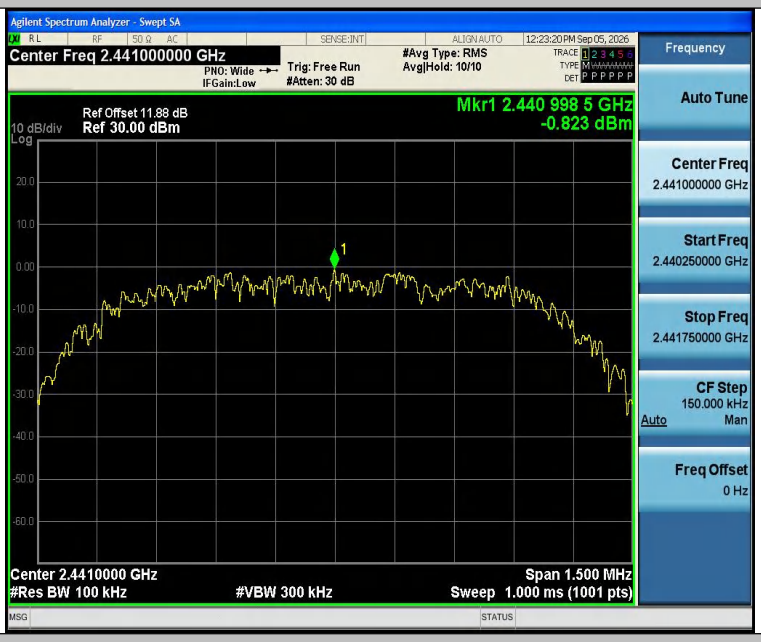


3DH5-Ant1-2441-30~1000-PASS

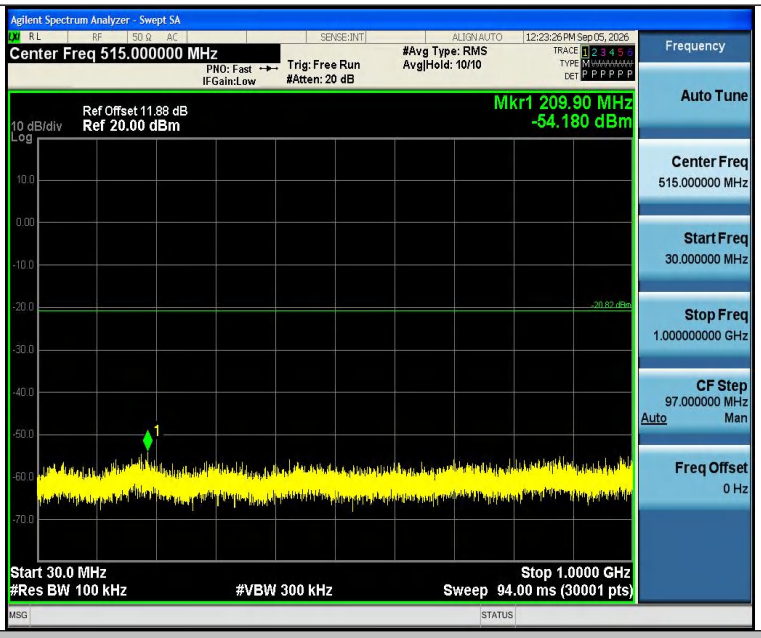


3DH5-Ant1-2441-1000~26500-PASS

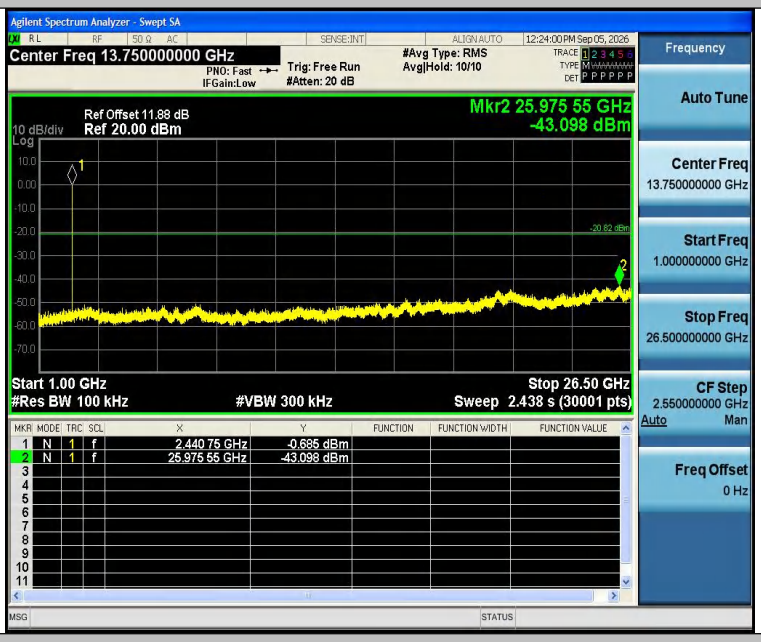


3DH5-Ant1-2480-0~Reference-PASS

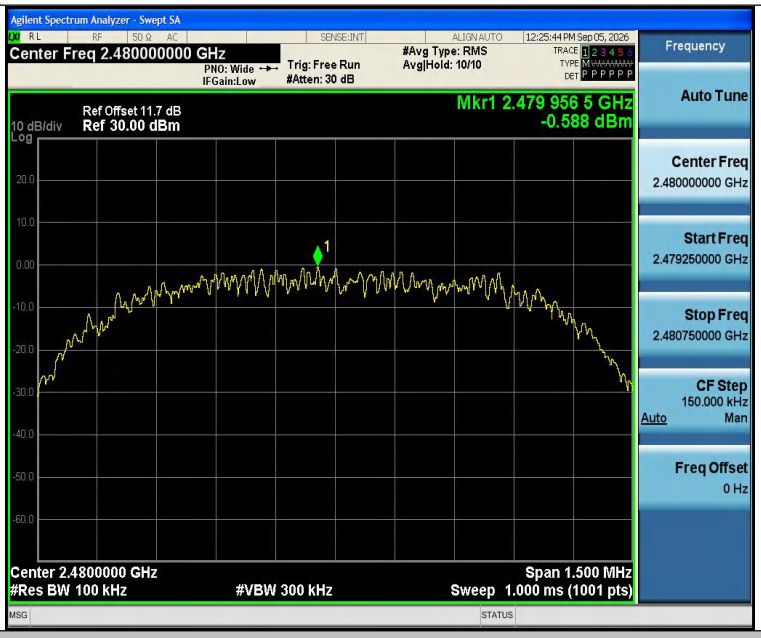


3DH5-Ant1-2480-30~1000-PASS

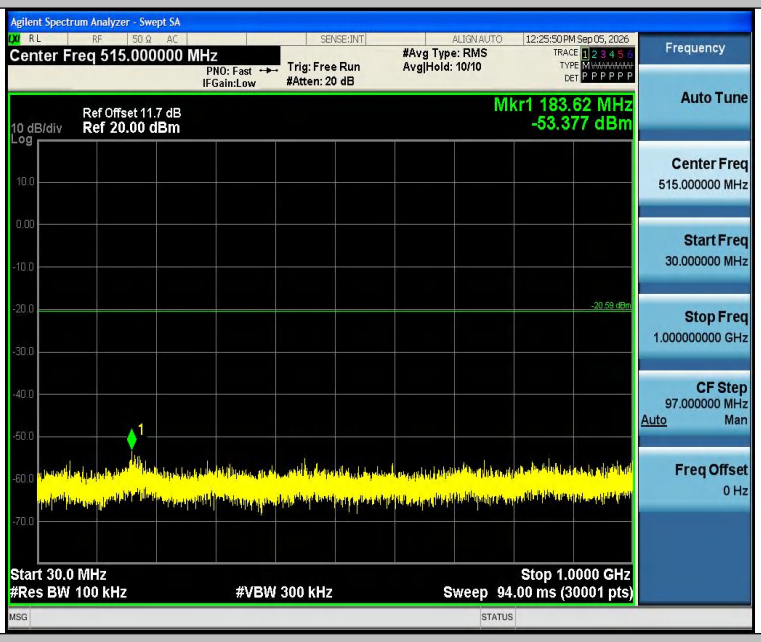


3DH5-Ant1-2480-1000~26500-PASS

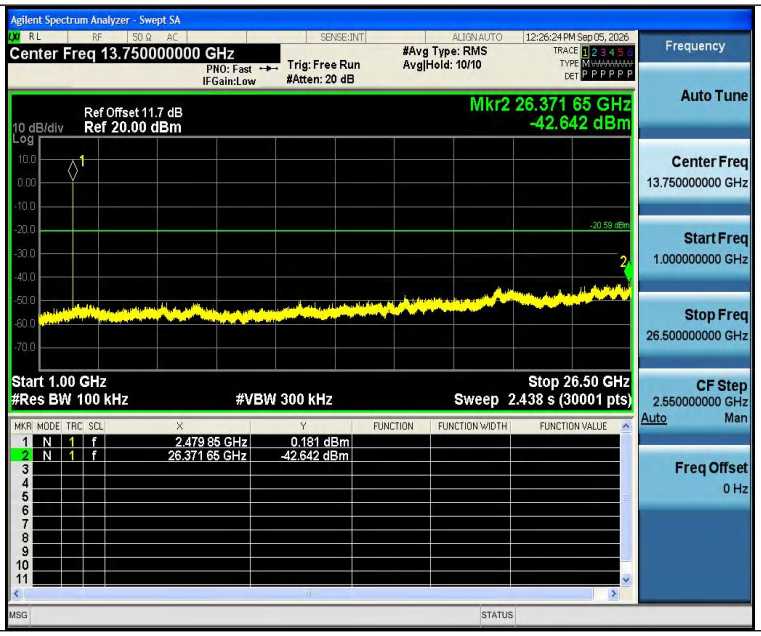
Agilent Spectrum Analyzer - Swept SA
Center Freq 13.750000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
#Avg Type: RMS
Avg|Hold: 10/10
12:26:24 PM Sep 05, 2026
Ref Offset 11.7 dB
10 dB/div
Ref 20.00 dBm
Log
Mkr2 26.371 65 GHz
-42.642 dBm
-20.59 dBm
Start 1.00 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 26.50 GHz
Sweep 2.438 s (30001 pts)
MKR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE
1 N 1 f 2.479 85 GHz 0.181 dBm
2 N 1 f 26.371 65 GHz -42.642 dBm
Frequency
Auto Tune
Center Freq
13.750000000 GHz
Start Freq
1.000000000 GHz
Stop Freq
26.500000000 GHz
CF Step
2.550000000 GHz
Auto Man
Freq Offset
0 Hz
MSG
STATUS

# 14 Antenna Requirement

## 14.1 Test Standard and Requirement

| | |
|---|---|
| Test Standard | FCC Part15 Section 15.203 /247(c) |
| Requirement | 1) 15.203 requirement:<br><br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.<br><br>2) 15.247(c) (1)(i) requirement:<br><br>Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. |

## 14.2 Antenna Connected Construction

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is 2.27 dBi. It complies with the standard requirement.

# 15 APPENDIX I -- TEST SETUP PHOTOGRAPH

Conducted Emissions

Radiated Emissions
From 30M-1GHz

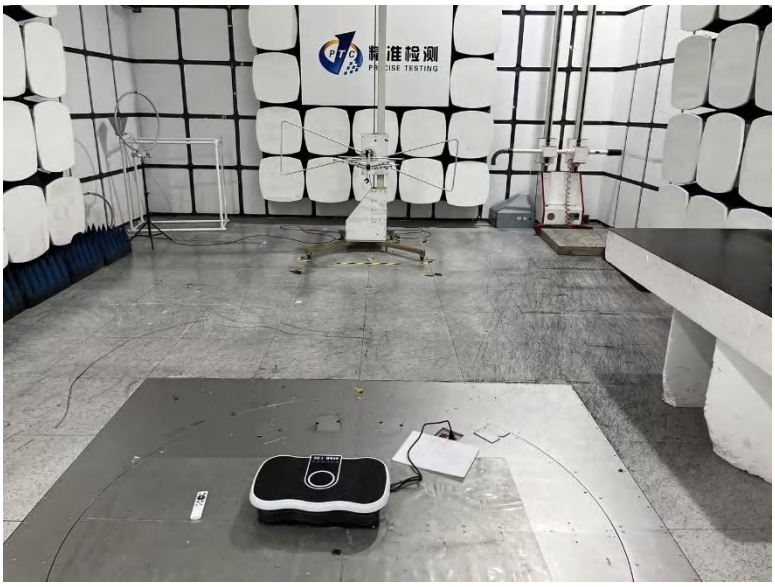

Above 1GHz

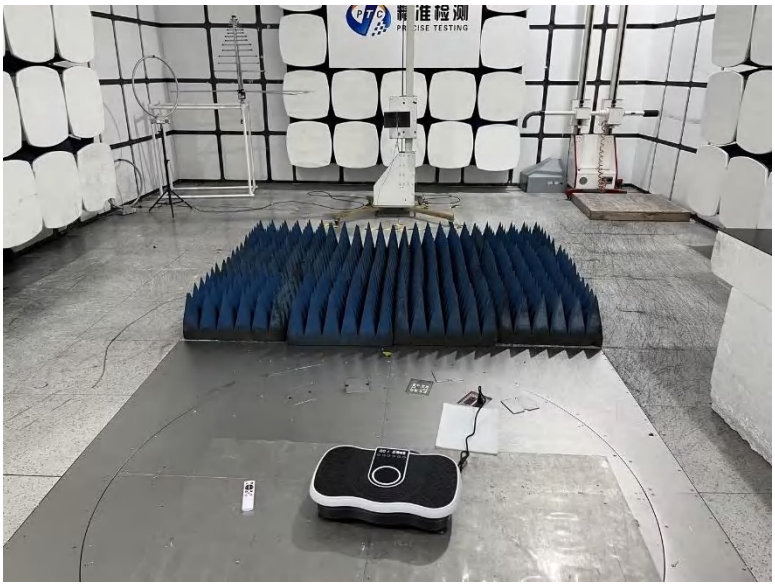

# 16 APPENDIX II -- EUT PHOTOGRAPH

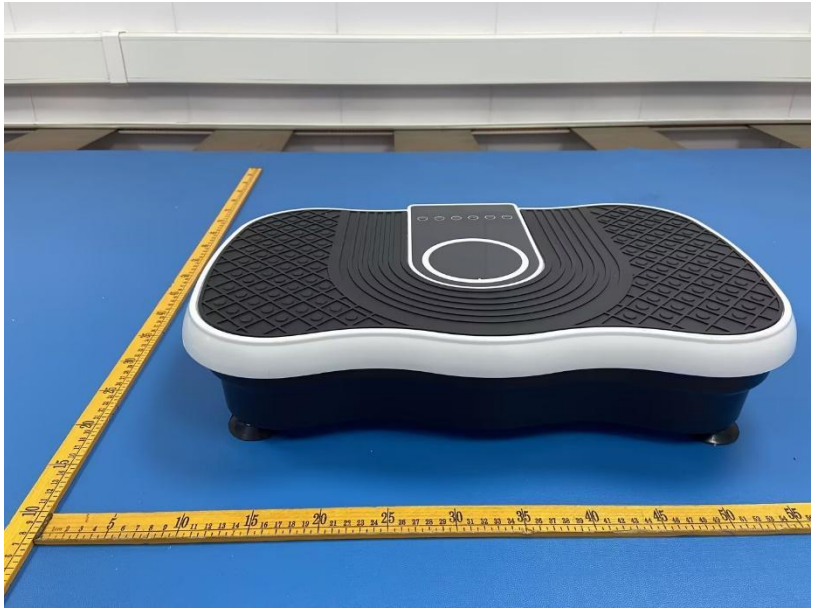

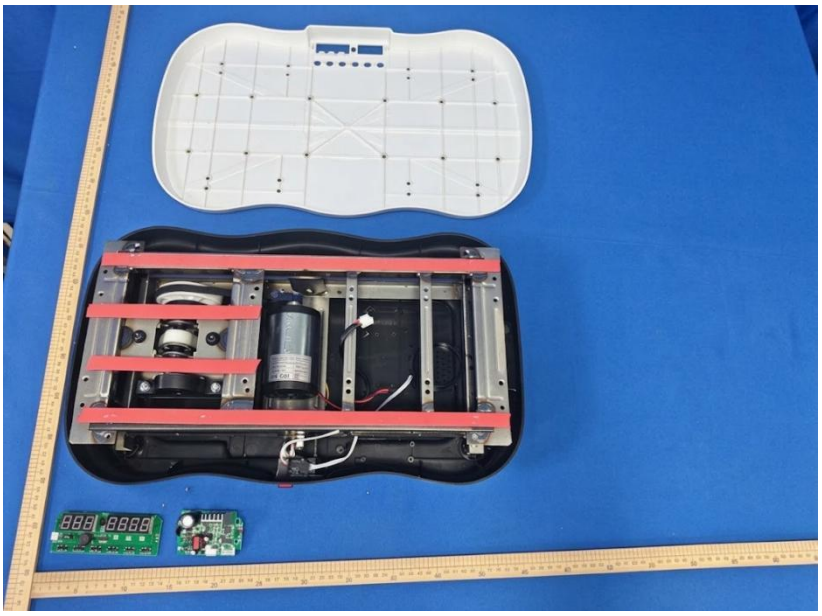

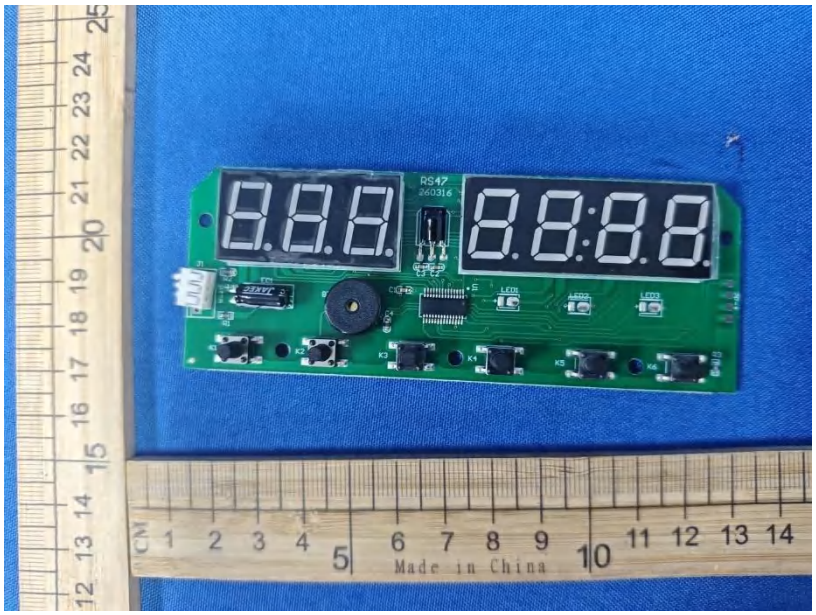
RS47
260316
Made in China

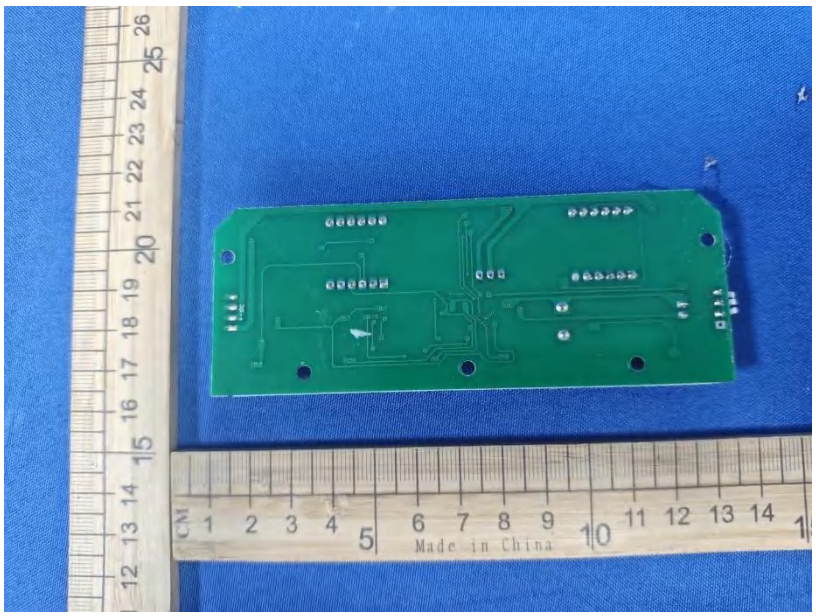
Made in China

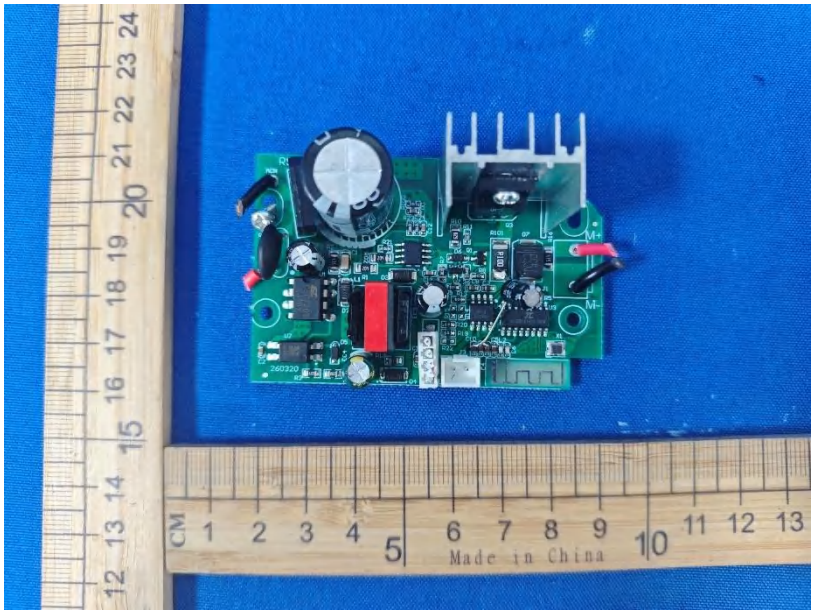
CM
Made in China

260320
PC817C
CSC7203
RS27A

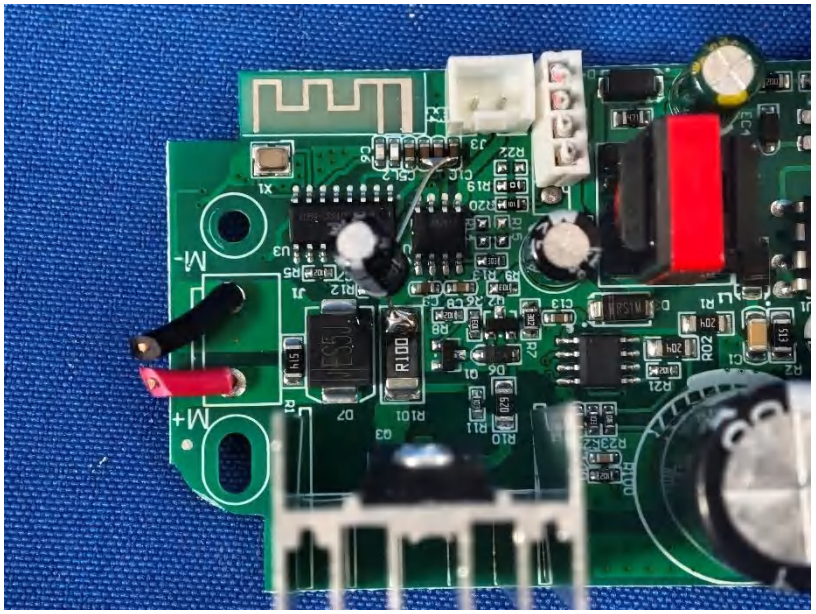


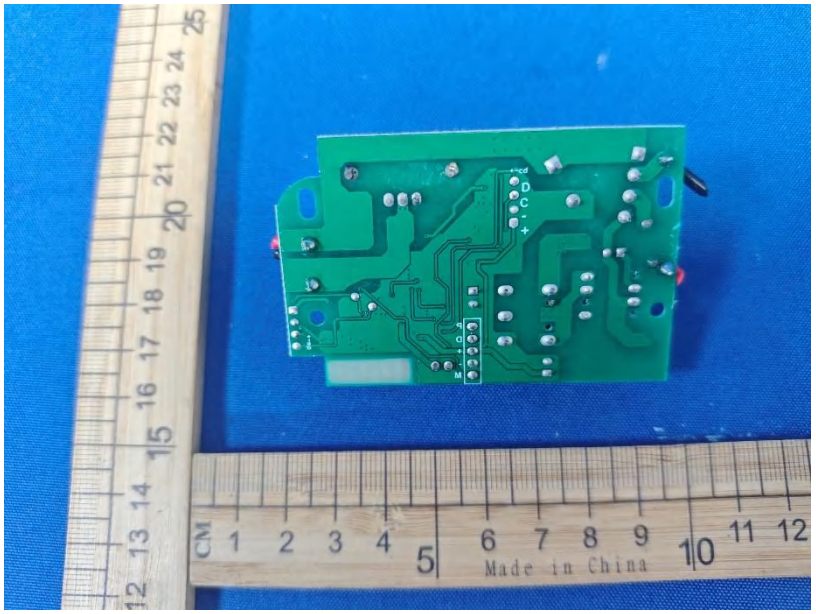


********THE END REPORT********