



: Signal source shortcut keys, touch to switch signal channels as shown below:



⌵ Toolbar call-out button, click as shown below (you can also swipe right from the leftmost side of the screen or swipe left from the rightmost side of the screen to call out):



: Split screen, the screen can start two apps at the same time; for

example, open the whiteboard first, then click the split screen function, and then open the welcome message



: Child lock, click it to lock the screen and no operation can be performed. The default password for child lock is: 2580



: Energy saving shortcut key. When you click it, the screen backlight will go out. When you touch the display again, it will turn on automatically.。



: Screen capture shortcut key. Click it to take a screenshot of the screen display and automatically save it to the local memory. There is also this function button on the remote control.



: Screen recording function button, click it as shown below:



After clicking Start, some operations under Android will be recorded in MP4 format and saved in the BSDScreen folder on the local disk.



: : Magnifying glass function, enlarge the fonts and pictures on Android, as shown below:



There are options for 2x/4x magnification.



: There are options for 2x/4x magnification:



: Photo function, the machine is connected to a camera.



: Customize and set the shortcut key to open the application, as shown below:



If you want to cancel the shortcut key function after setting, long press this icon.



: Power off button




: One-click jump to the built-in computer channel




: Menu setting function, click to open the setting menu

8. Settings Menu Introduction

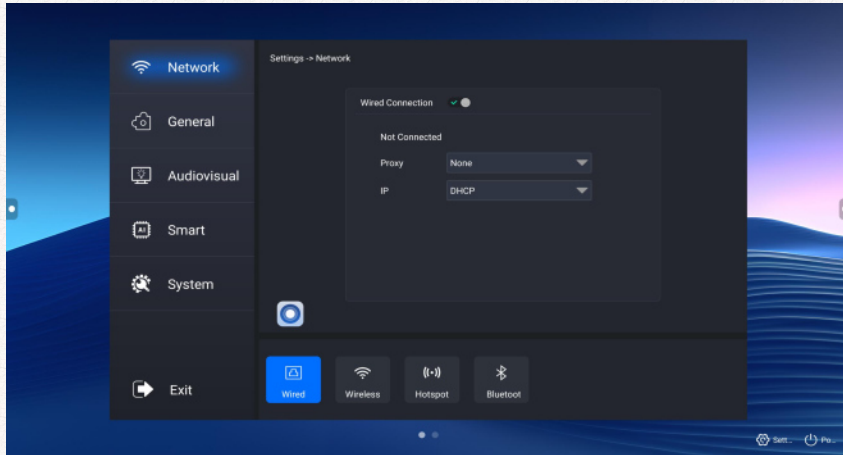

1. Network: wireless WiFi, screen projection hotspot, wired connection, Bluetooth function (only one of the wired and wireless can be turned on, and they cannot be used at the same time)。

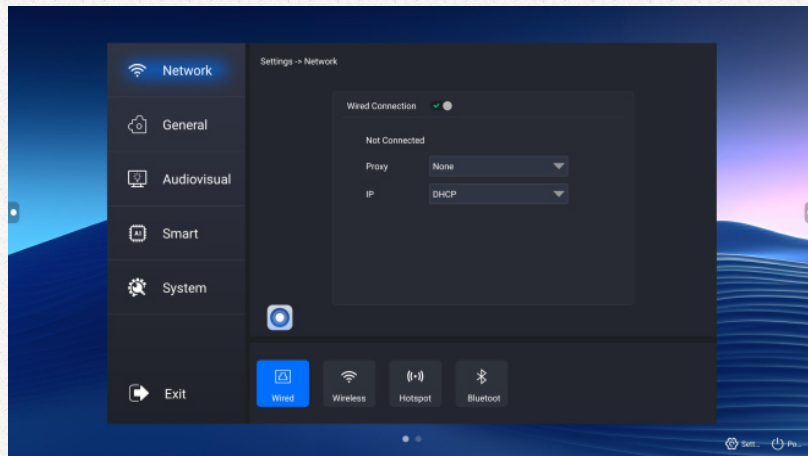


Screen projection hotspot: It needs to be turned on when projecting the screen. When mobile phones, computers and other devices are projecting the screen wirelessly, they must connect to this hotspot before they can

perform the screen projection operation.。

热点打开后，默认连接密码为：12345678. 如果要修改热点名称或密码需要先关闭热点才可修改 After the hotspot is turned on, the default connection password is: 12345678. If you want to change the hotspot name or password, you need to close the hotspot before you can modify it.

2. General:

<1 theme:

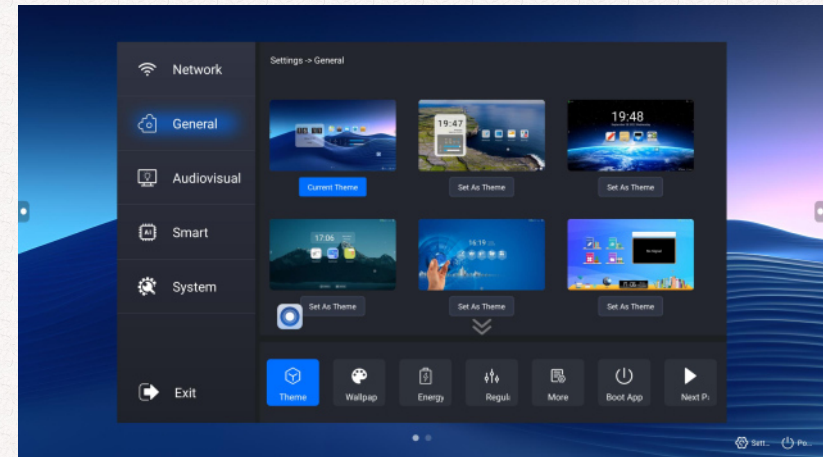


Conference Topic 1:



Conference Topic 2:



Conference Topic 3:

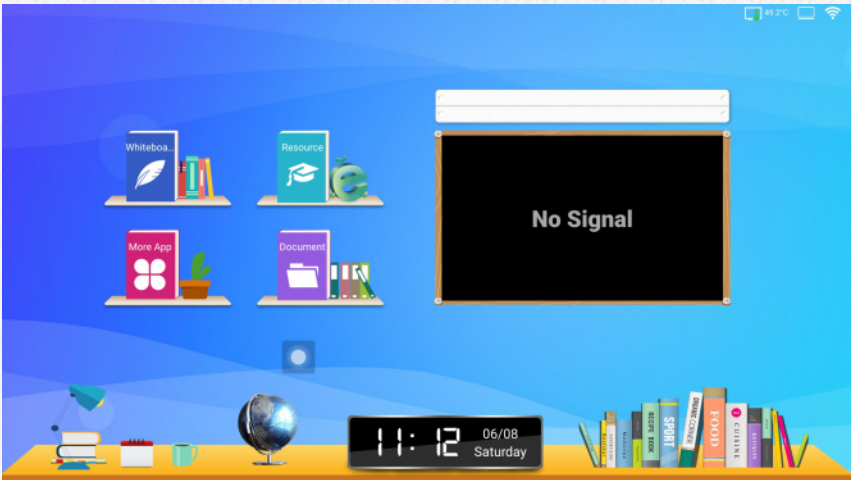

Conference Topic 4:



Conference Topic 5:



Conference Topic 6:



Conference Topic7: The subject can be rotated to 90 degrees, 180 degrees, 270 degrees



Conference Topic8:

