



深圳市亚岱科技有限公司
SHENZHEN A&D TECHNOLOGY CO.



Address: A701E, Building 1, Shenzhen Software Industry Base, No. 81, 83, 85 Gaoxin South 10th Road, Binhai Community, Yuehai Street, Nanshan District, Shenzhen, Guangdong Province, China

EV21AD LA Antenna Product specification

Quick Reference Data

Antenna Layout & module on the system board	
Frequency Range	5135-5250MHz / 5725 ~ 5850MHz
Ant. Port Input Pwr. (dBm)	10
(dBi)	0 (all direction antenna)
Efficiency (dB)	62.67 %
Gain (dBi)	0.5 (peak Gain XY-plane)
Input Impedence(ohm)	50
Polarization Type	Vertical & Horizontal
VSWR	< 2


Antenna Layout & module on the system board

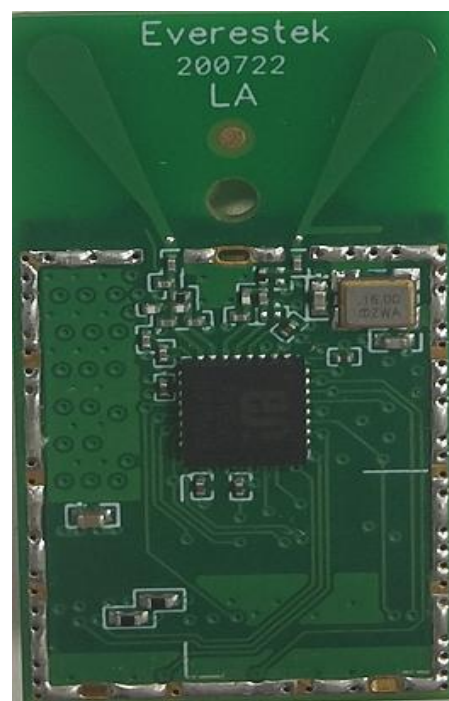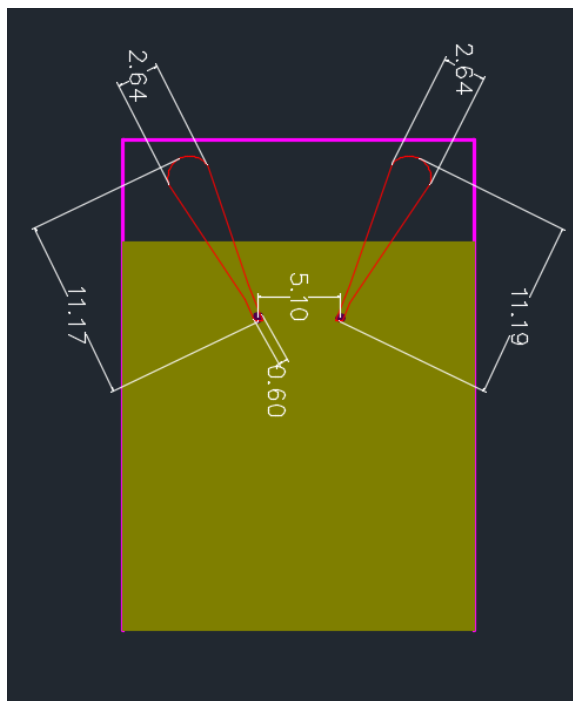

Antenna Gain



Freq.[MHZ]	5725	5800	5850
Eff.[%]	59.08%	62.67%	60.14%
Peak Gain [dBi]	0.1	0.2	0.26

The Environment of Antenna Radiation Pattern

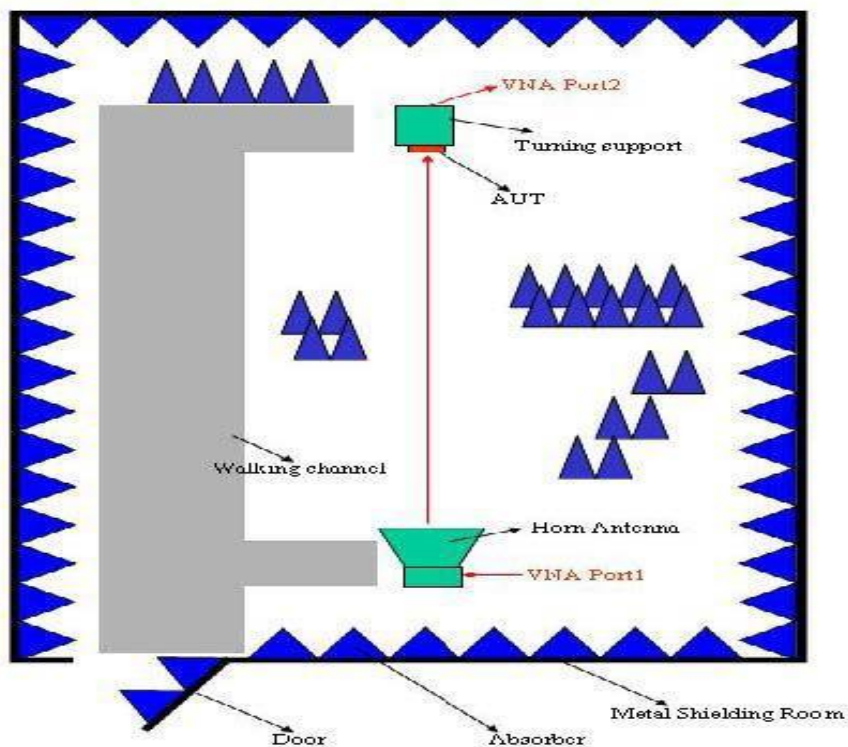

3D radiation pattern diagram

5135Mhz-5250Mhz : < 0.48dBi

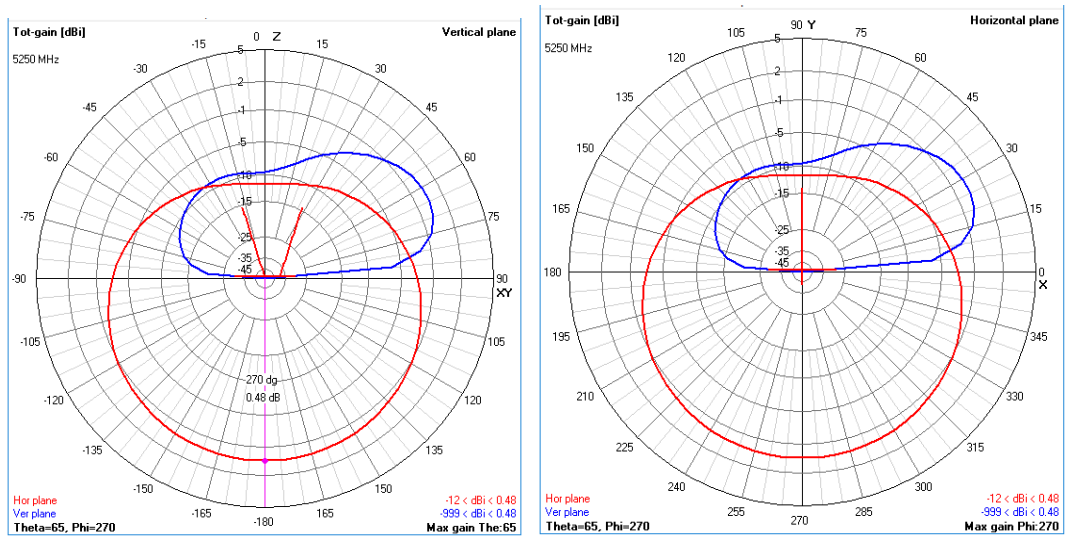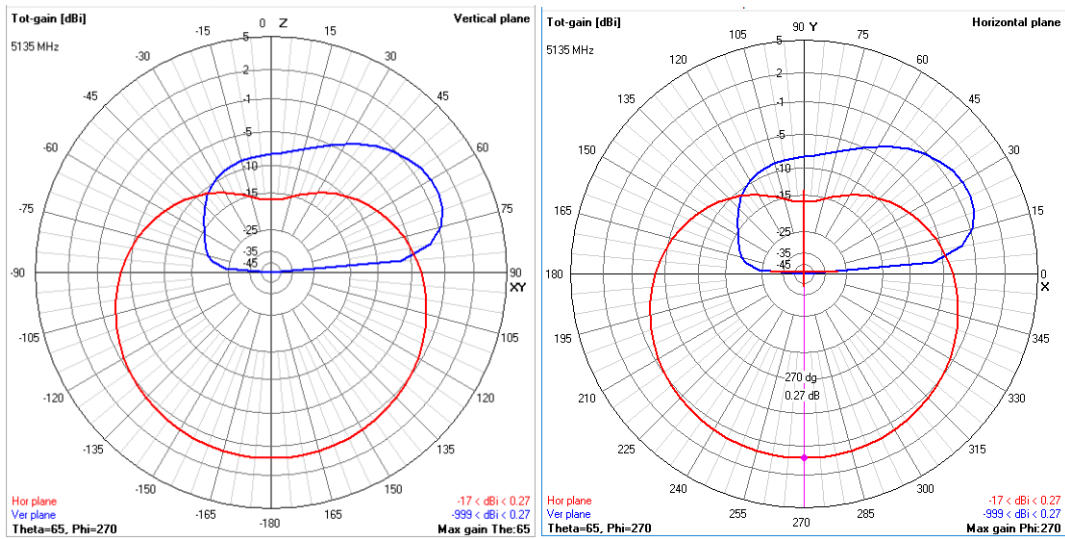

5725Mhz - 5850Mhz : < 0.26dBi

