


S11 Parameter-VSWR

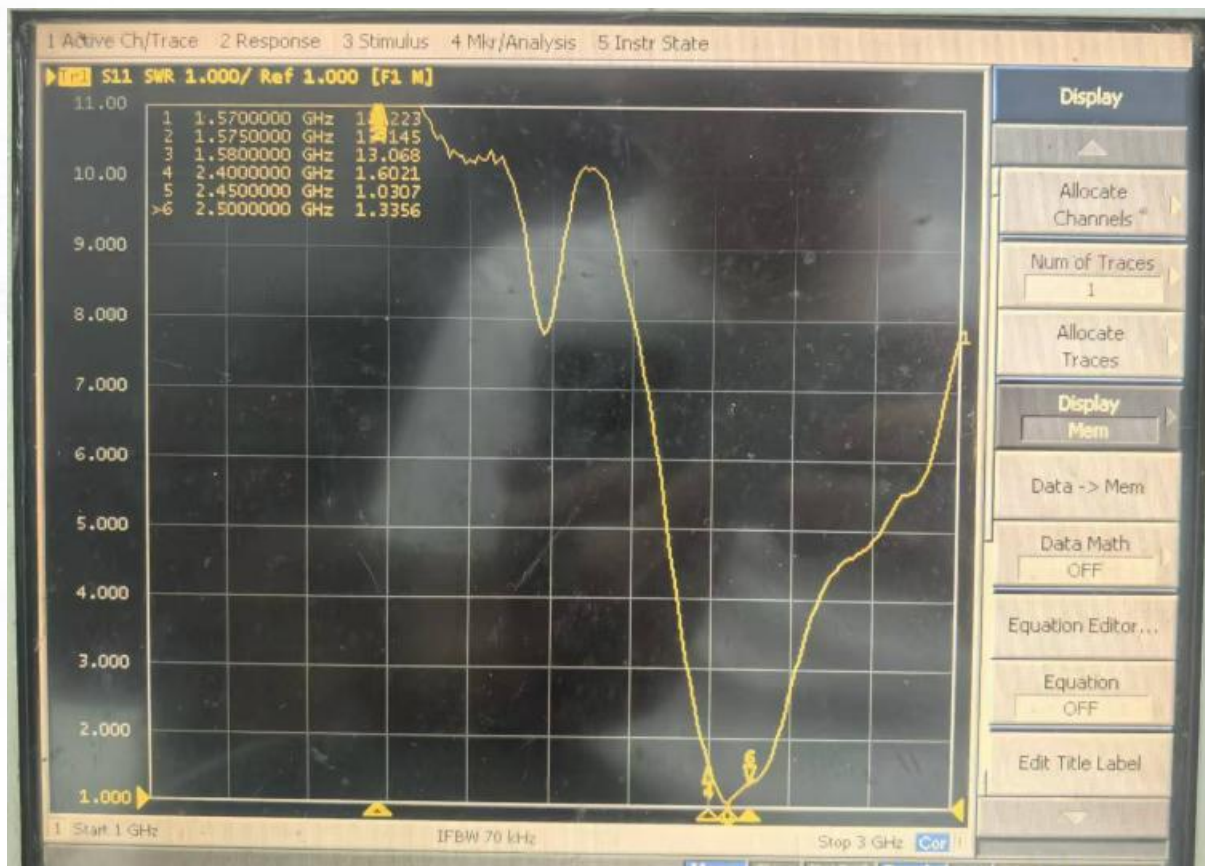

WiFi天线 尺寸14.4X5.4mm


Frequency(MHz)	2400	2450	2500
VSWR	1.60	1.03	1.33

Gain & Efficiency


Passive Test For 2.4G

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	irectivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
2400	28.62	-5.75	-2.07	-4.22	10.807	15.812	-2.07	-15.24	3.68	0	47.77	47.82
2425	29.42	-5.46	-1.15	-3.3	11.788	16.633	-1.15	-16.29	4.32	120	48.06	48.12
2450	32.46	-4.89	-0.36	-2.51	13.911	18.553	-0.36	-15.15	4.53	60	48.56	48.53
2475	32.34	-4.9	-0.21	-2.36	14.221	18.119	-0.21	-14.95	4.69	60	48.46	48.26
2500	30.44	-5.17	-0.41	-2.56	13.569	16.869	-0.41	-17.58	4.75	60	48.42	48.12


2400.000MHz




2400.000MHz H




2425.000MHz




2425.000MHz H




2450.000MHz




2450.000MHz H




2400.000MHz E1




2400.000MHz E2




2425.000MHz E1




2425.000MHz E2



2450.000MHz E1



2450.000MHz E2




Gain & Efficiency


Passive Test For 2.4G

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	irectivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
2400	28.62	-5.75	-2.07	-4.22	10.807	15.812	-2.07	-15.24	3.68	0	47.77	47.82
2425	29.42	-5.46	-1.15	-3.3	11.788	16.633	-1.15	-16.29	4.32	120	48.06	48.12
2450	32.46	-4.89	-0.36	-2.51	13.911	18.553	-0.36	-15.15	4.53	60	48.56	48.53
2475	32.34	-4.9	-0.21	-2.36	14.221	18.119	-0.21	-14.95	4.69	60	48.46	48.26
2500	30.44	-5.17	-0.41	-2.56	13.569	16.869	-0.41	-17.58	4.75	60	48.42	48.12


2475.000MHz




2475.000MHz H

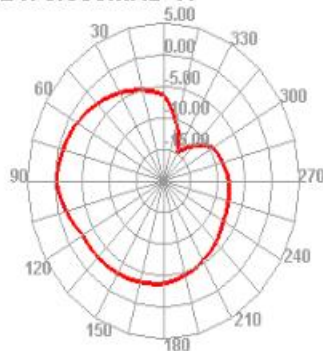


2500.000MHz




2500.000MHz H




2475.000MHz E1

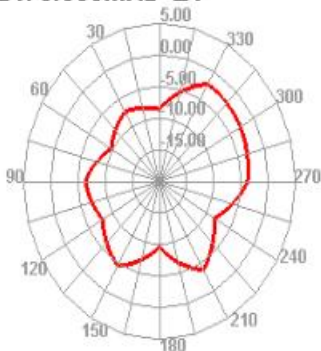

2475.000MHz E2

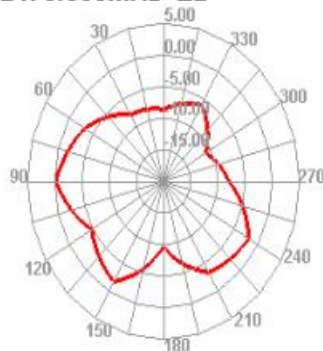

2500.000MHz E1



2500.000MHz E2

