

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.123	2.500	84.92	0.71	0.03
		2440	2.123	2.500	84.92	0.71	0.03
		2480	2.124	2.501	84.93	0.71	0.03

1.2 Test Graph

1.2.1 Ant1

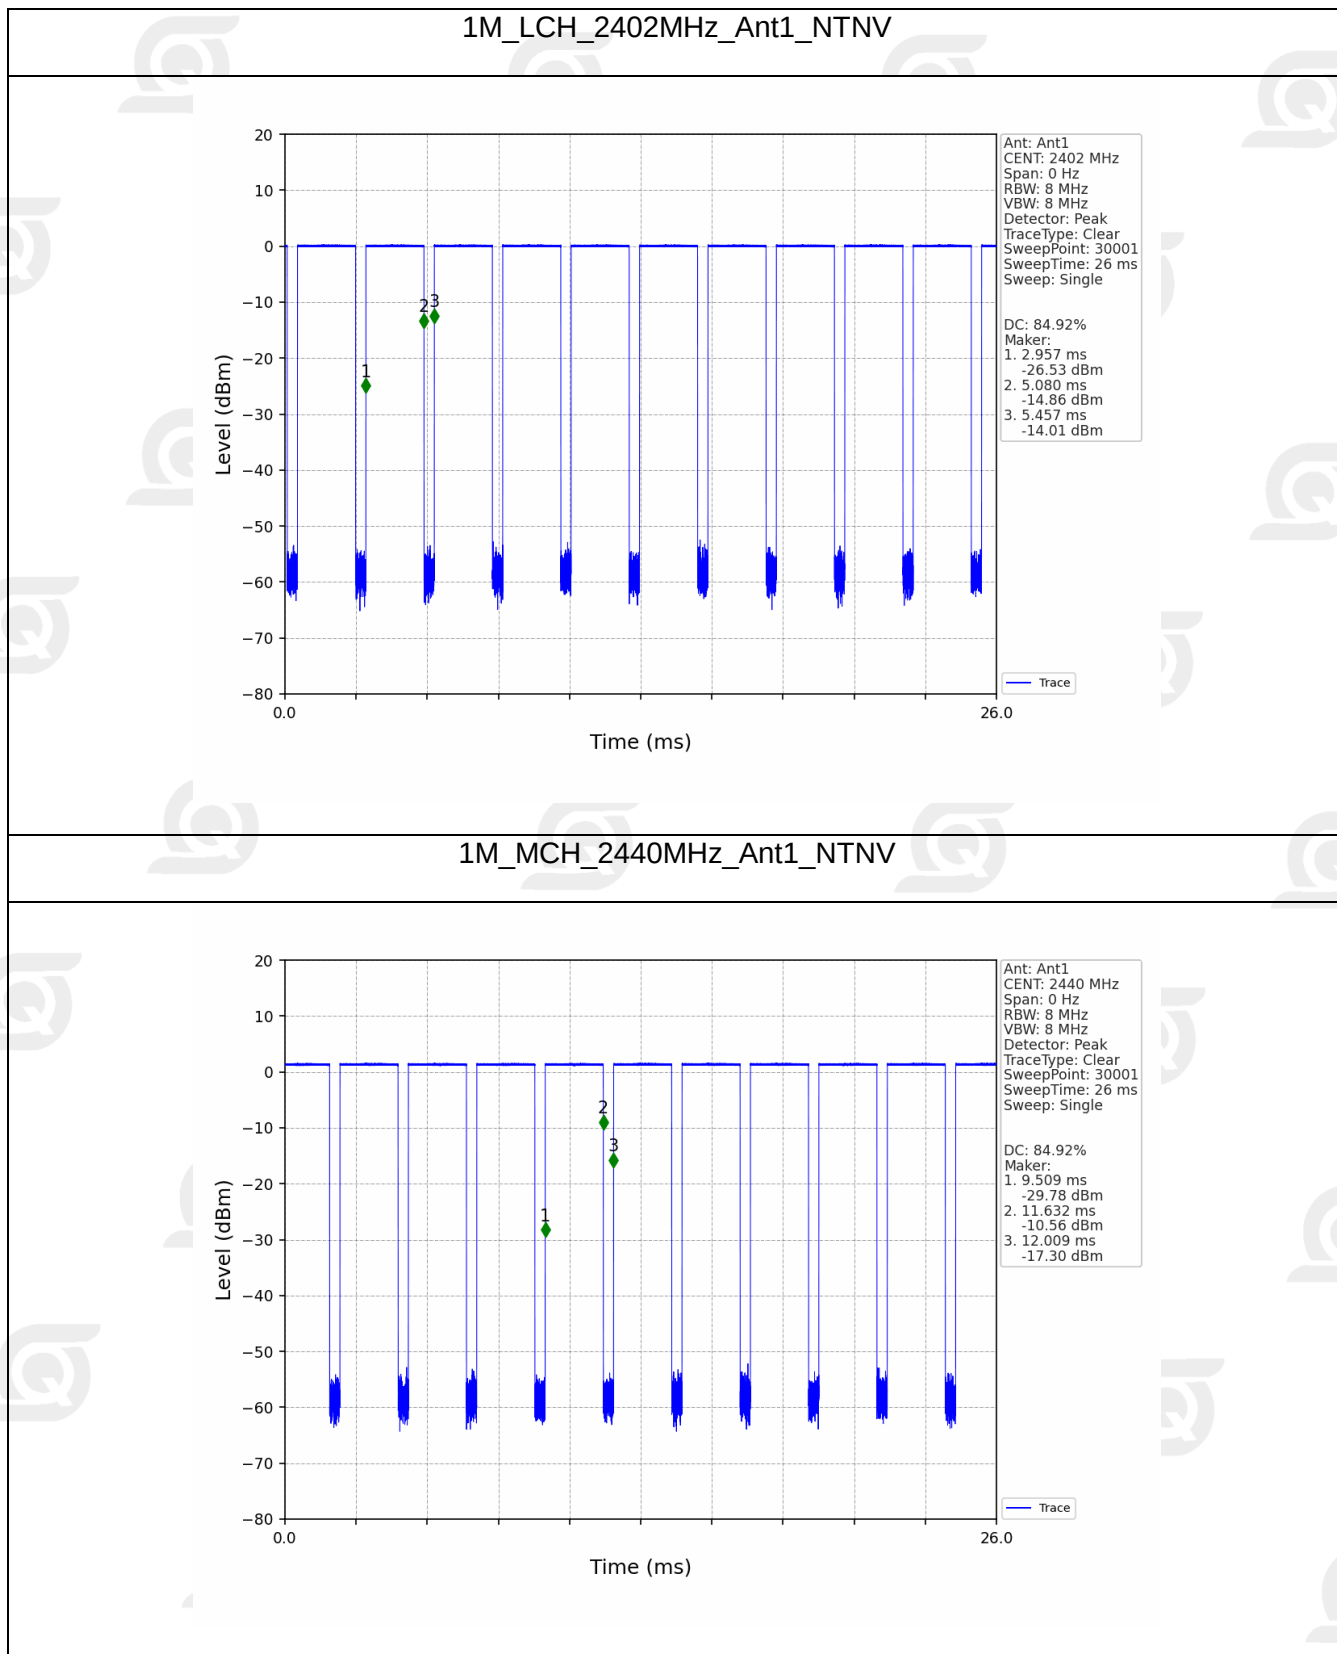

1M_HCH_2480MHz_Ant1_NTNV

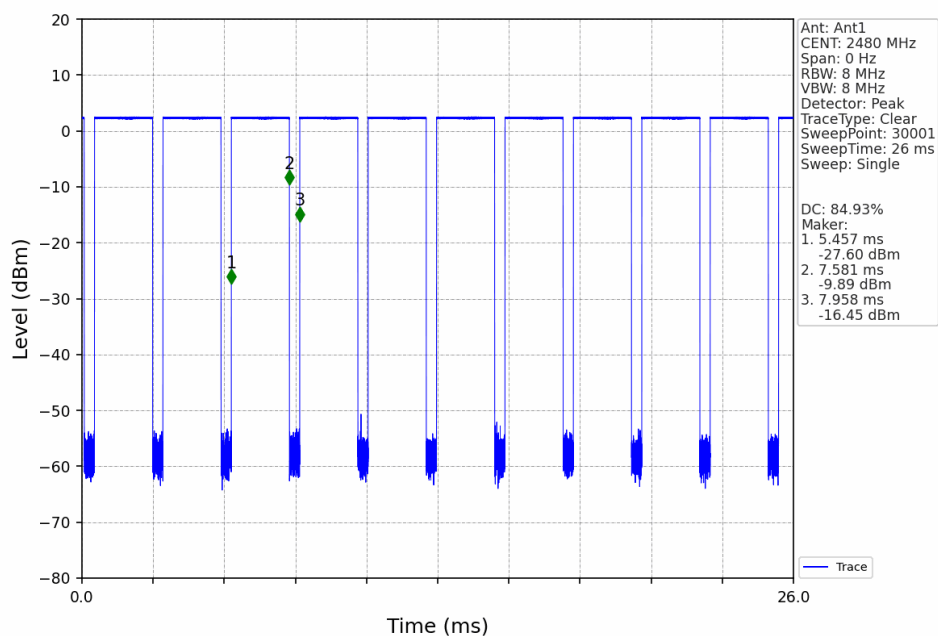

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.033	/	Pass
		2440	1	1.031	/	Pass
		2480	1	1.024	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.663	≥ 0.5	Pass
		2440	1	0.663	≥ 0.5	Pass
		2480	1	0.663	≥ 0.5	Pass

2.2 Test Graph

2.2.1 OBW

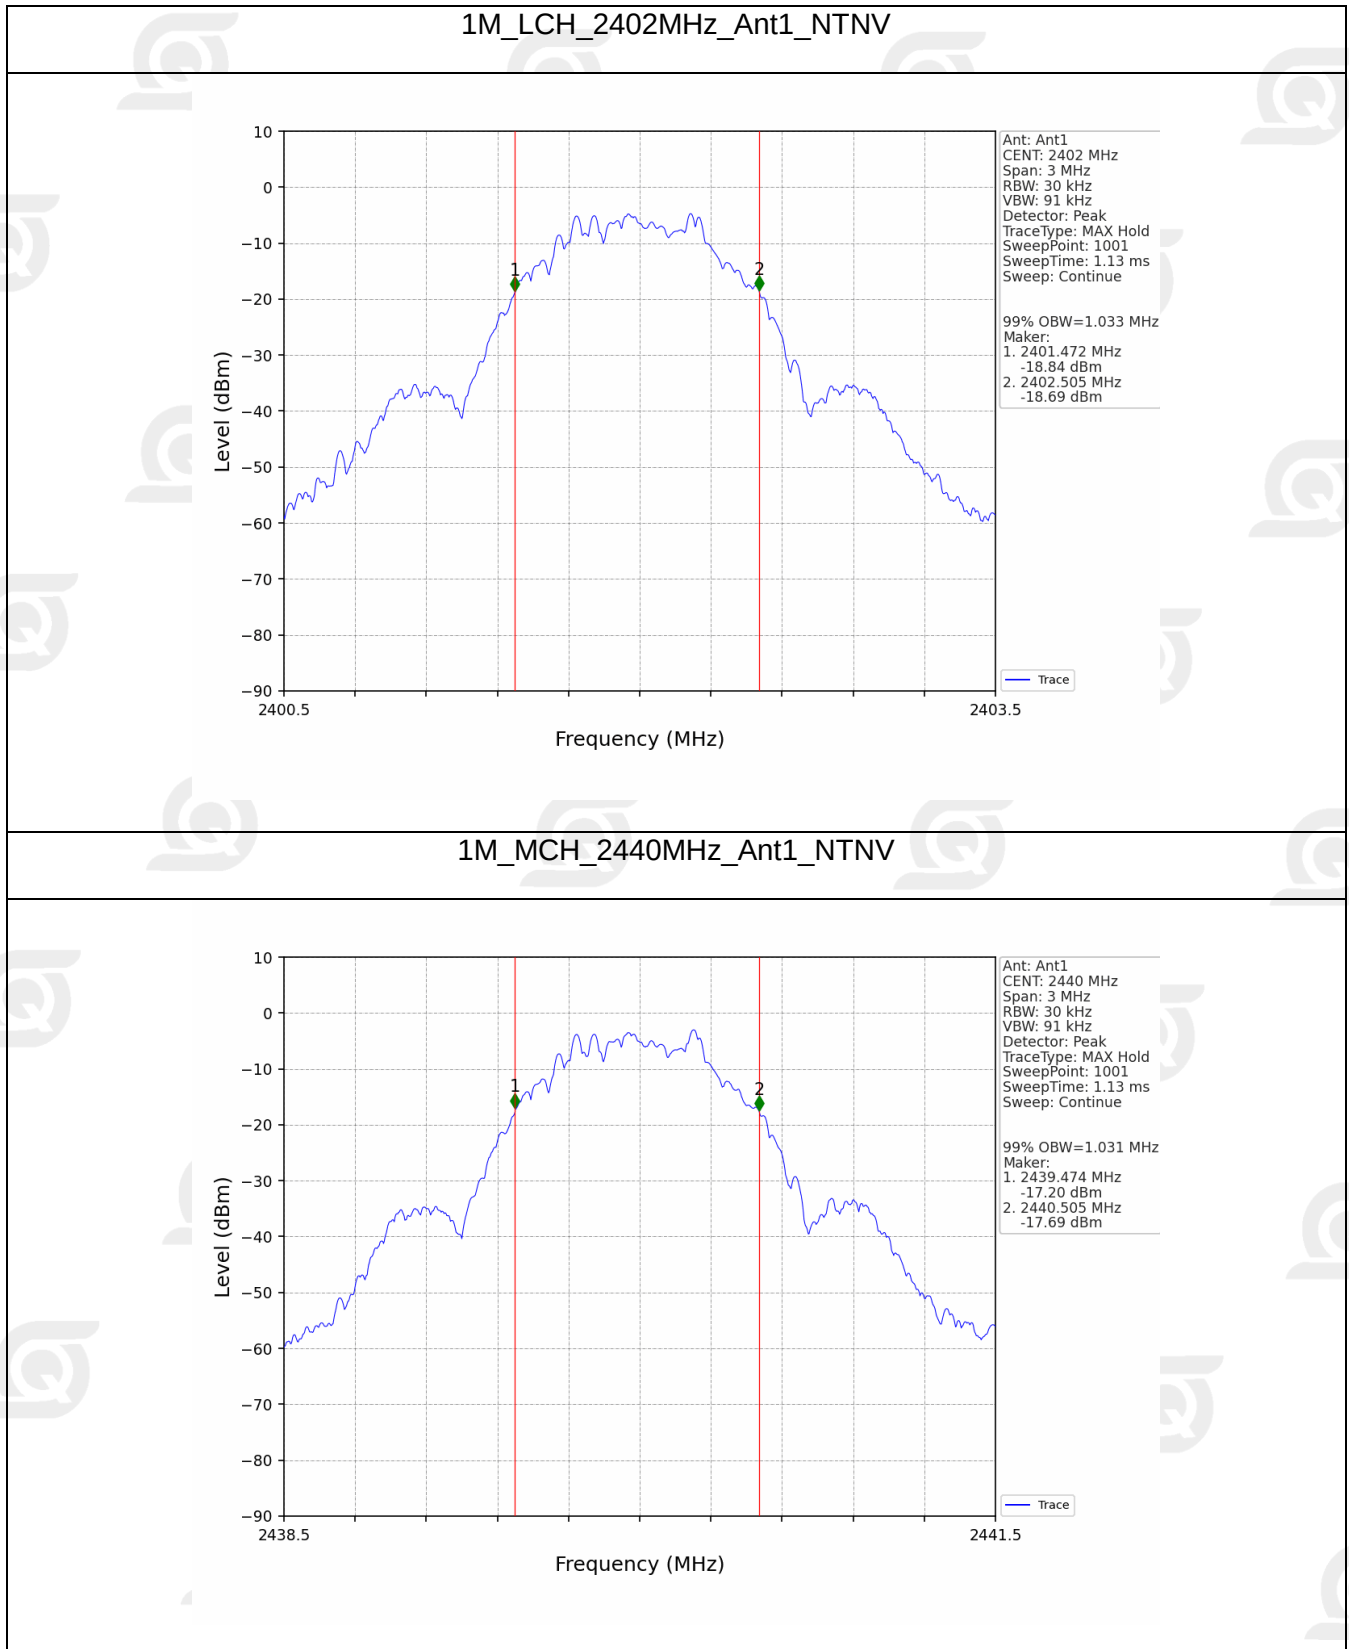


1M_HCH_2480MHz_Ant1_NTNV

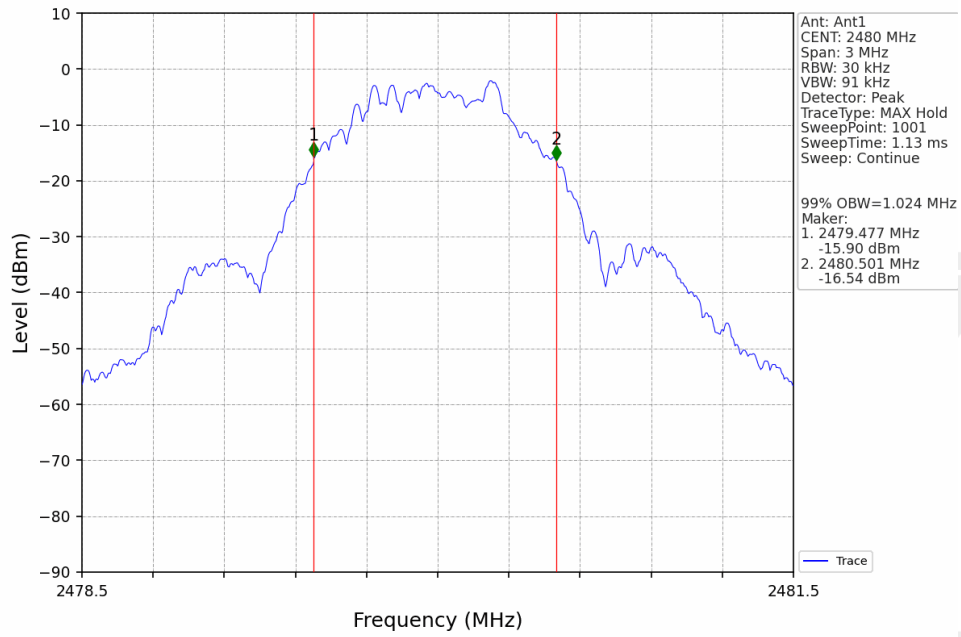


2.2.2 6dB BW


1M_LCH_2402MHz_Ant1_NTNV

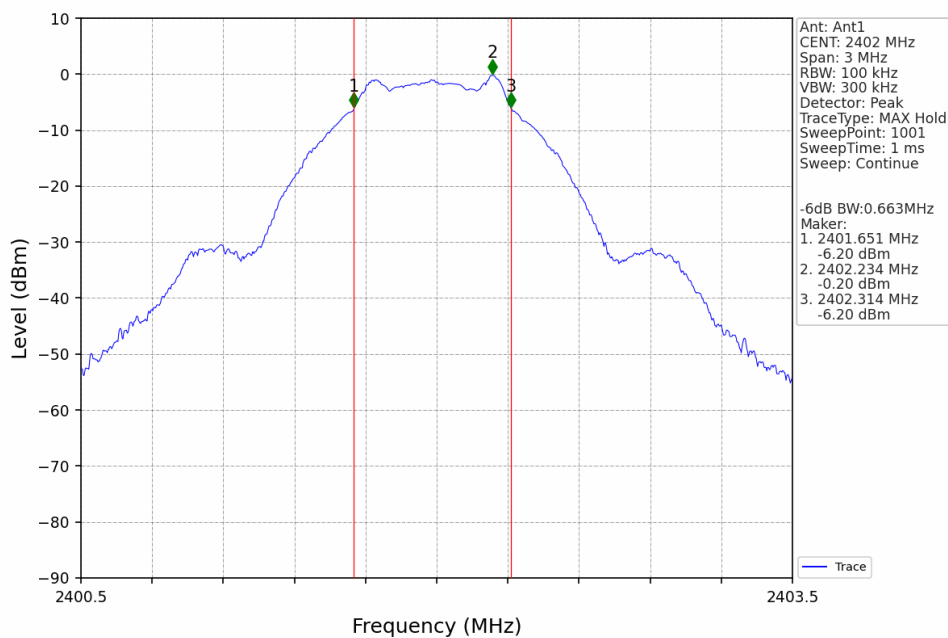

1M_MCH_2440MHz_Ant1_NTNV

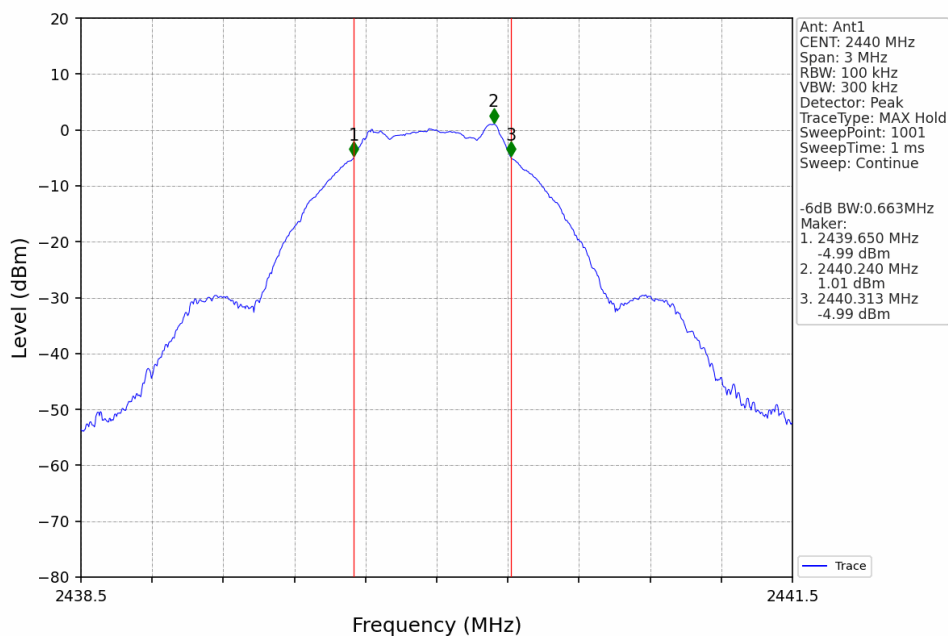

1M_HCH_2480MHz_Ant1_NTNV

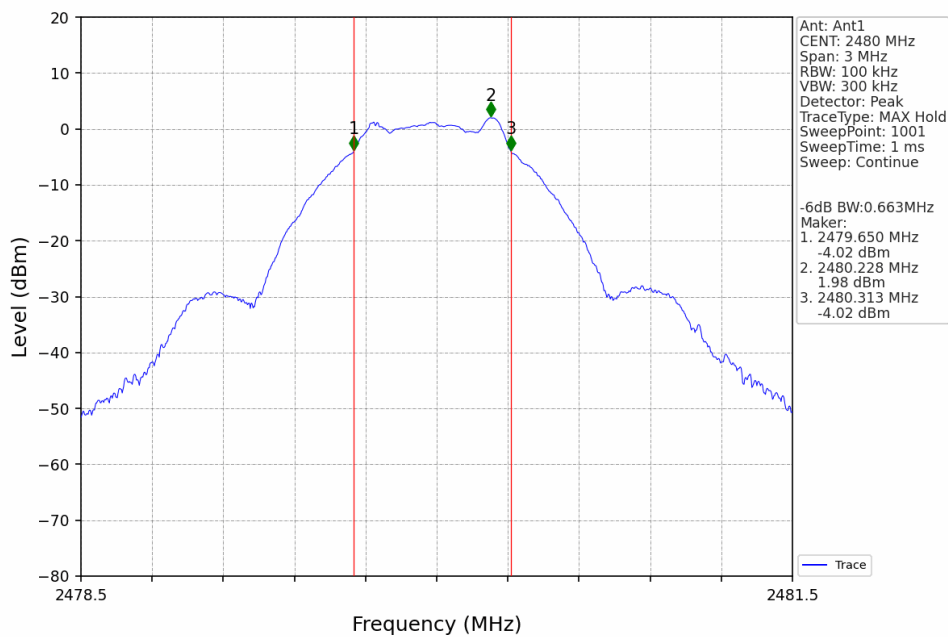

3. Maximum Conducted Output Power


3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	0.07	≤ 30	Pass
		2440	1.37	≤ 30	Pass
		2480	2.31	≤ 30	Pass

3.2 Test Graph

3.2.1 Power

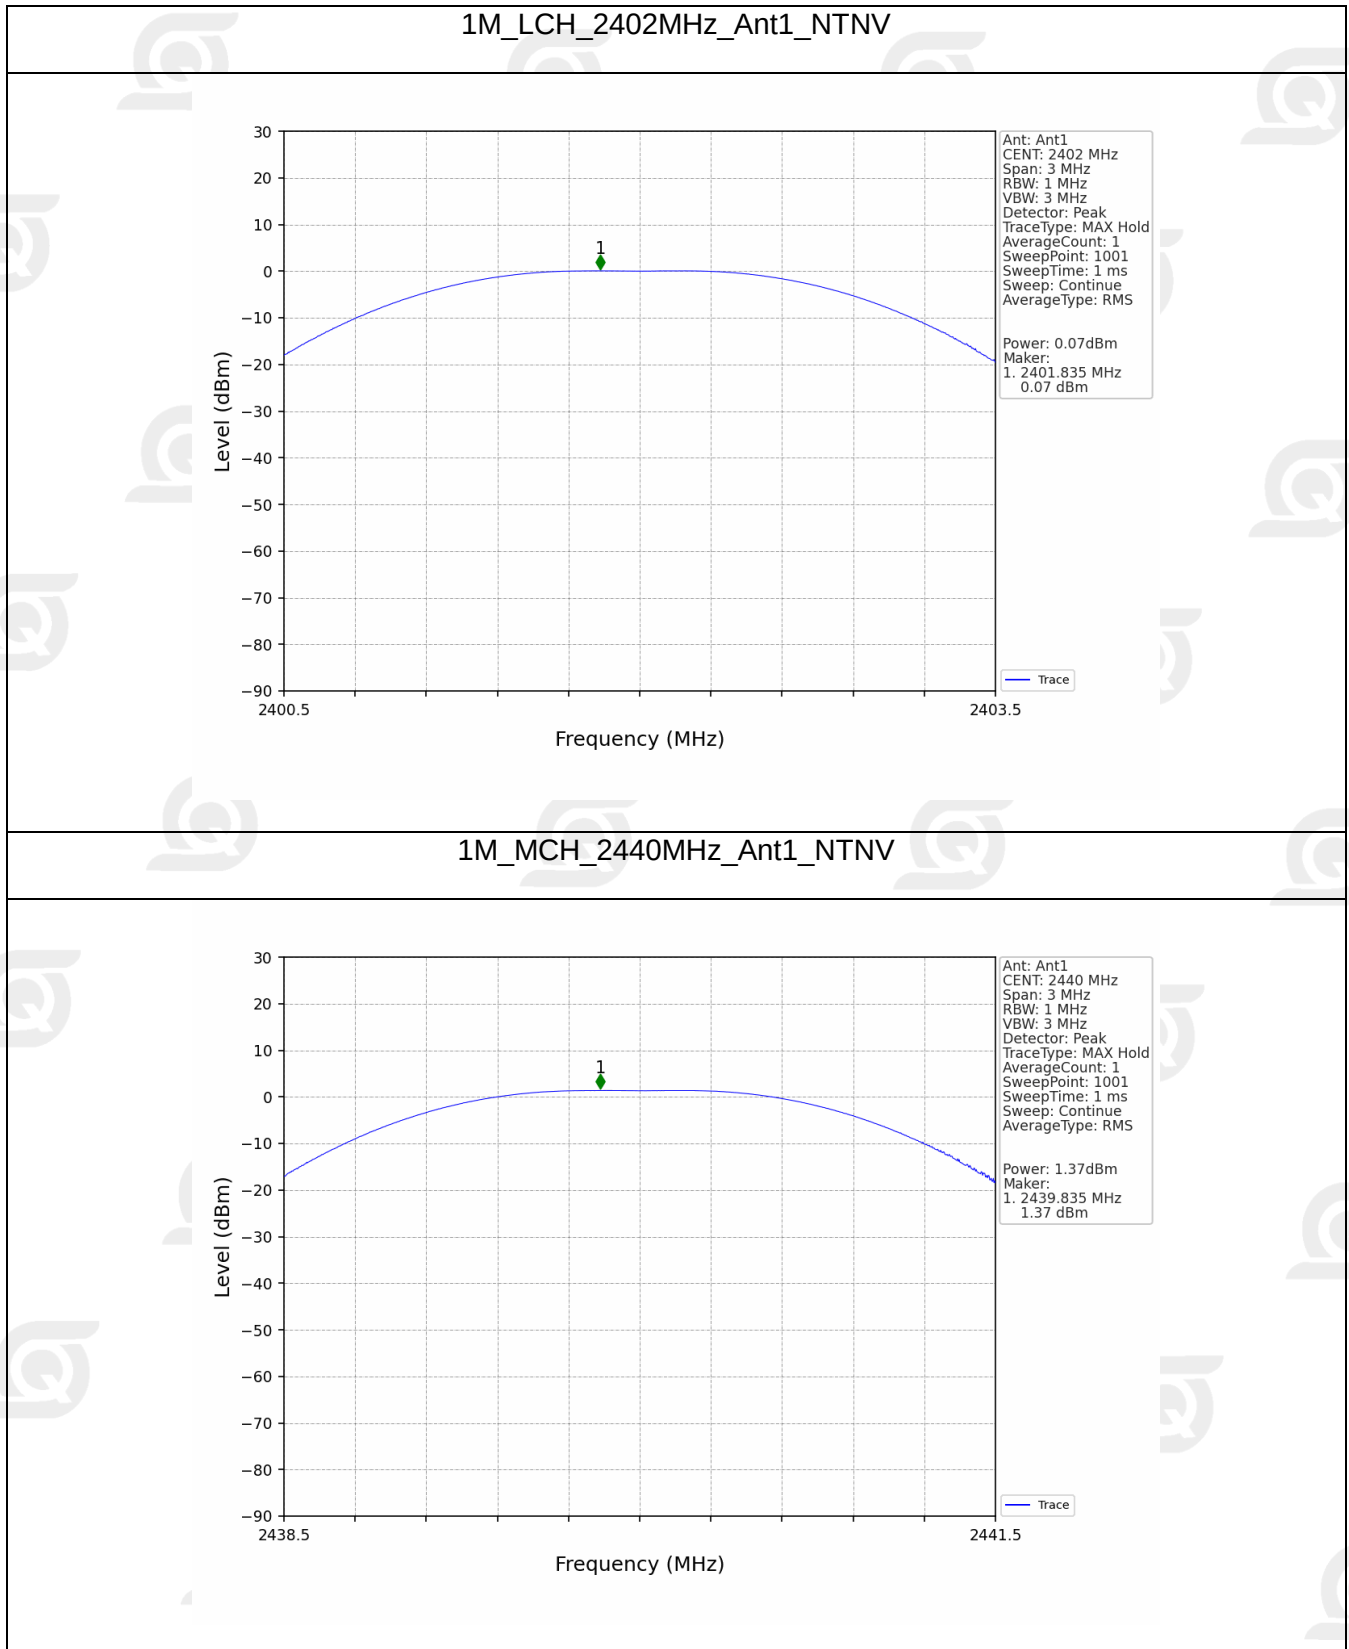

1M_HCH_2480MHz_Ant1_NTNV

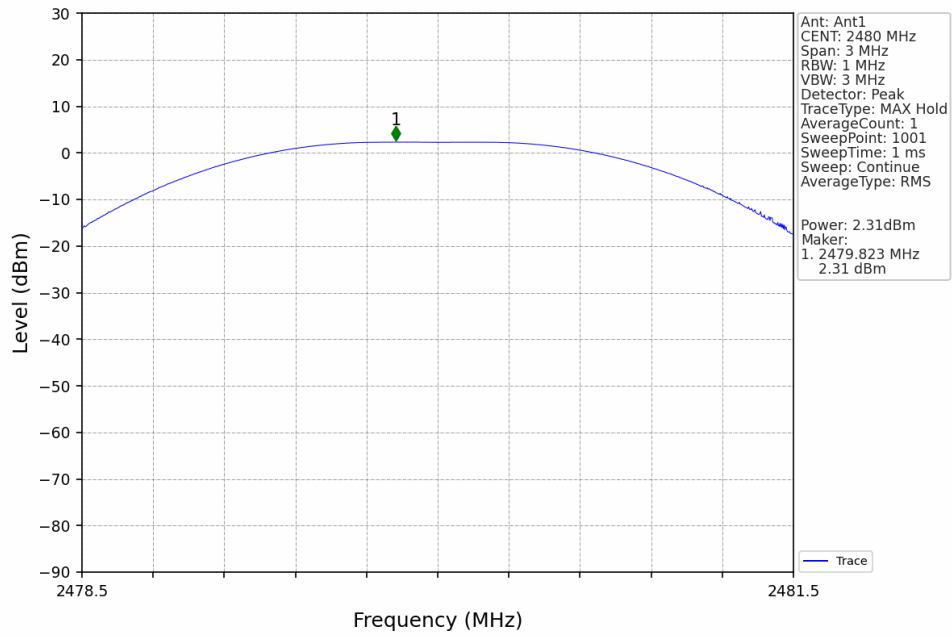

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-16.92	≤ 8	Pass
		2440	-15.68	≤ 8	Pass
		2480	-14.65	≤ 8	Pass

4.2 Test Graph

4.2.1 PSD

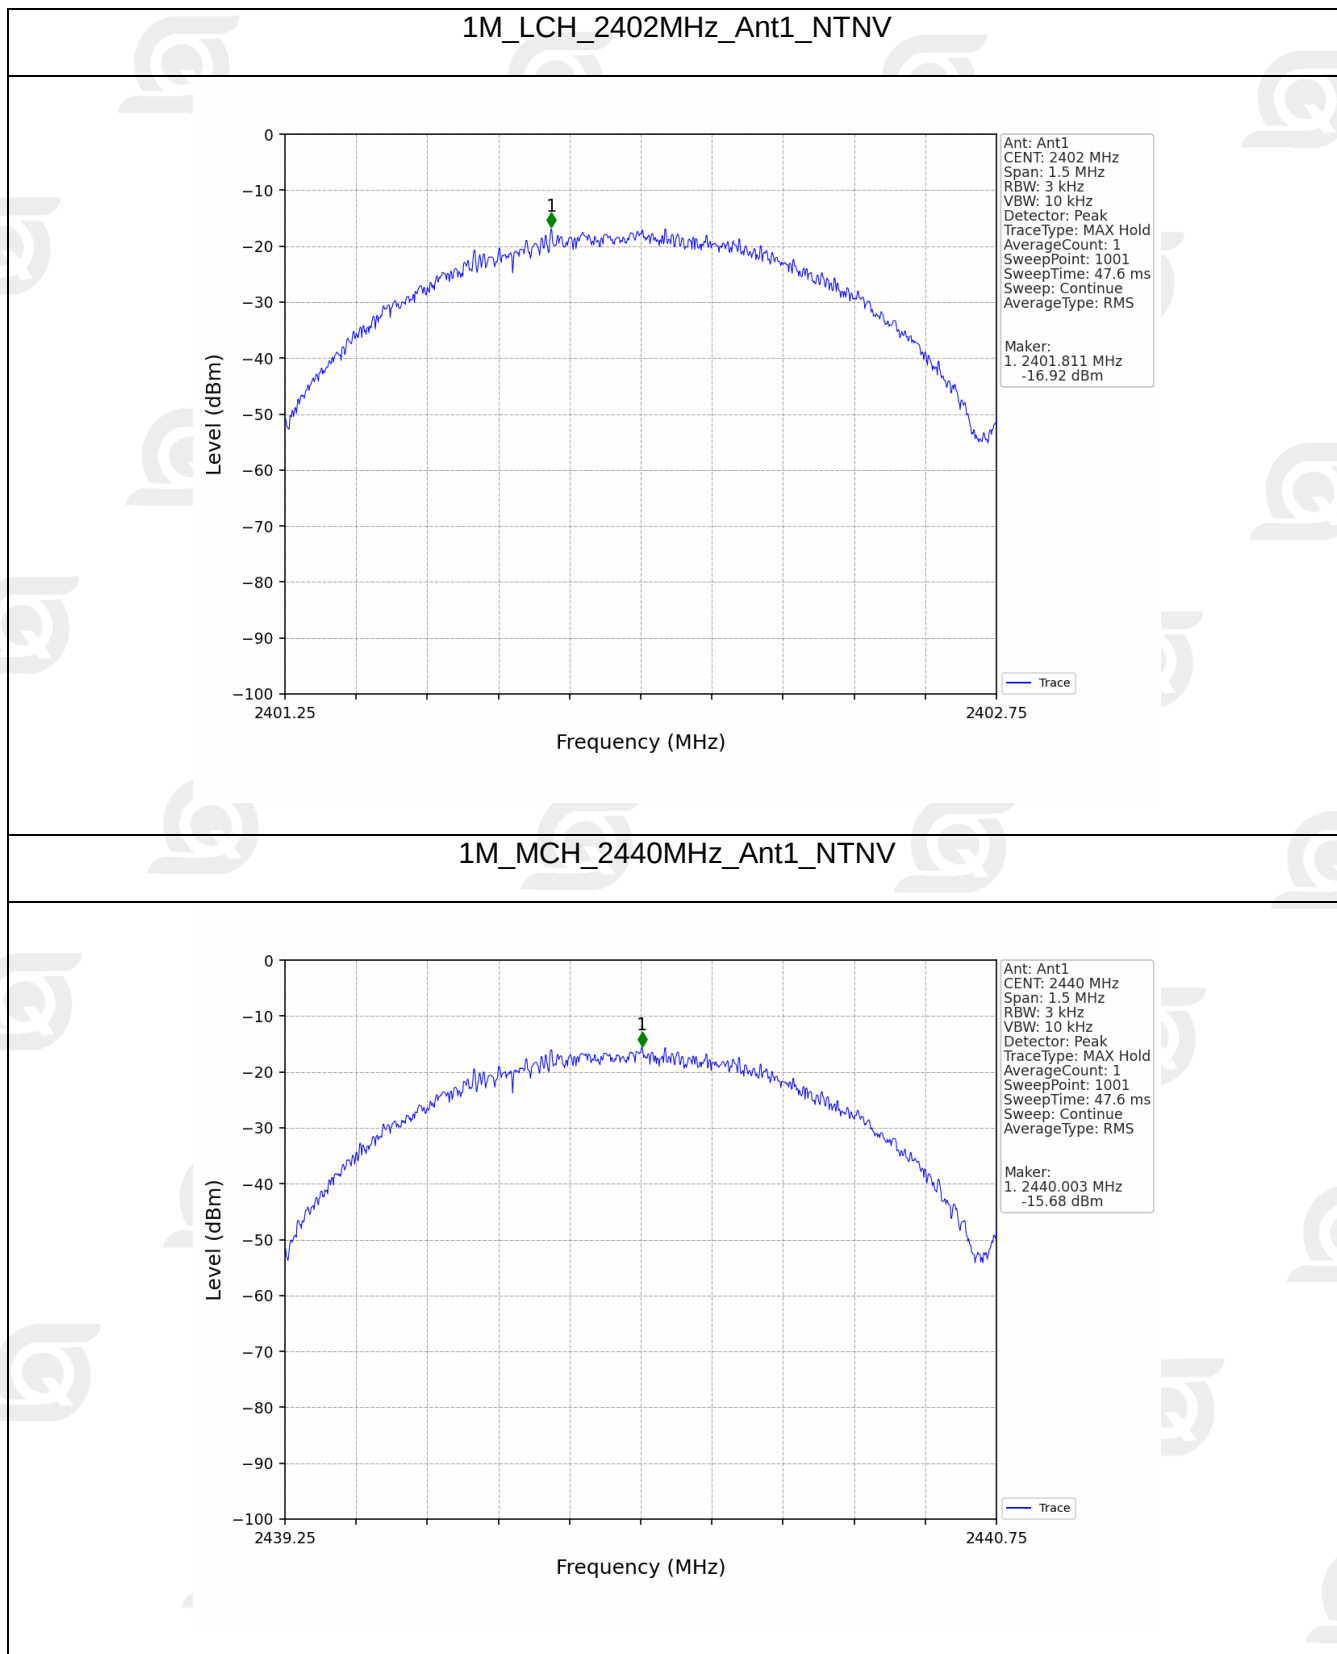

1M_HCH_2480MHz_Ant1_NTNV

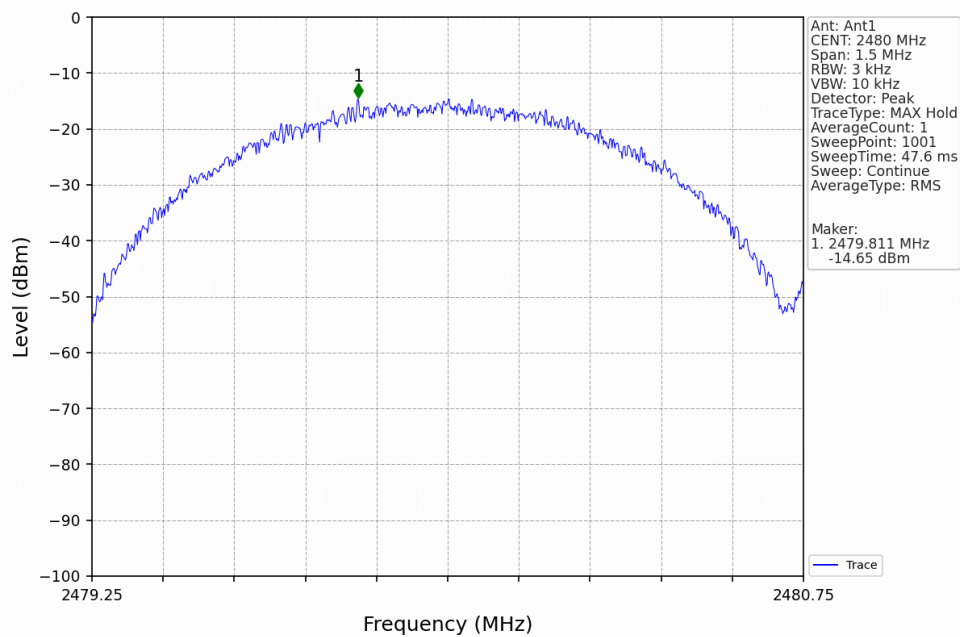

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-0.21
		2440	1	1.09
		2480	1	2.04

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-0.21	-20.21	Pass
		2440	1	1.09	-18.91	Pass
		2480	1	2.04	-17.96	Pass

5.2 Test Graph

5.2.1 Ref

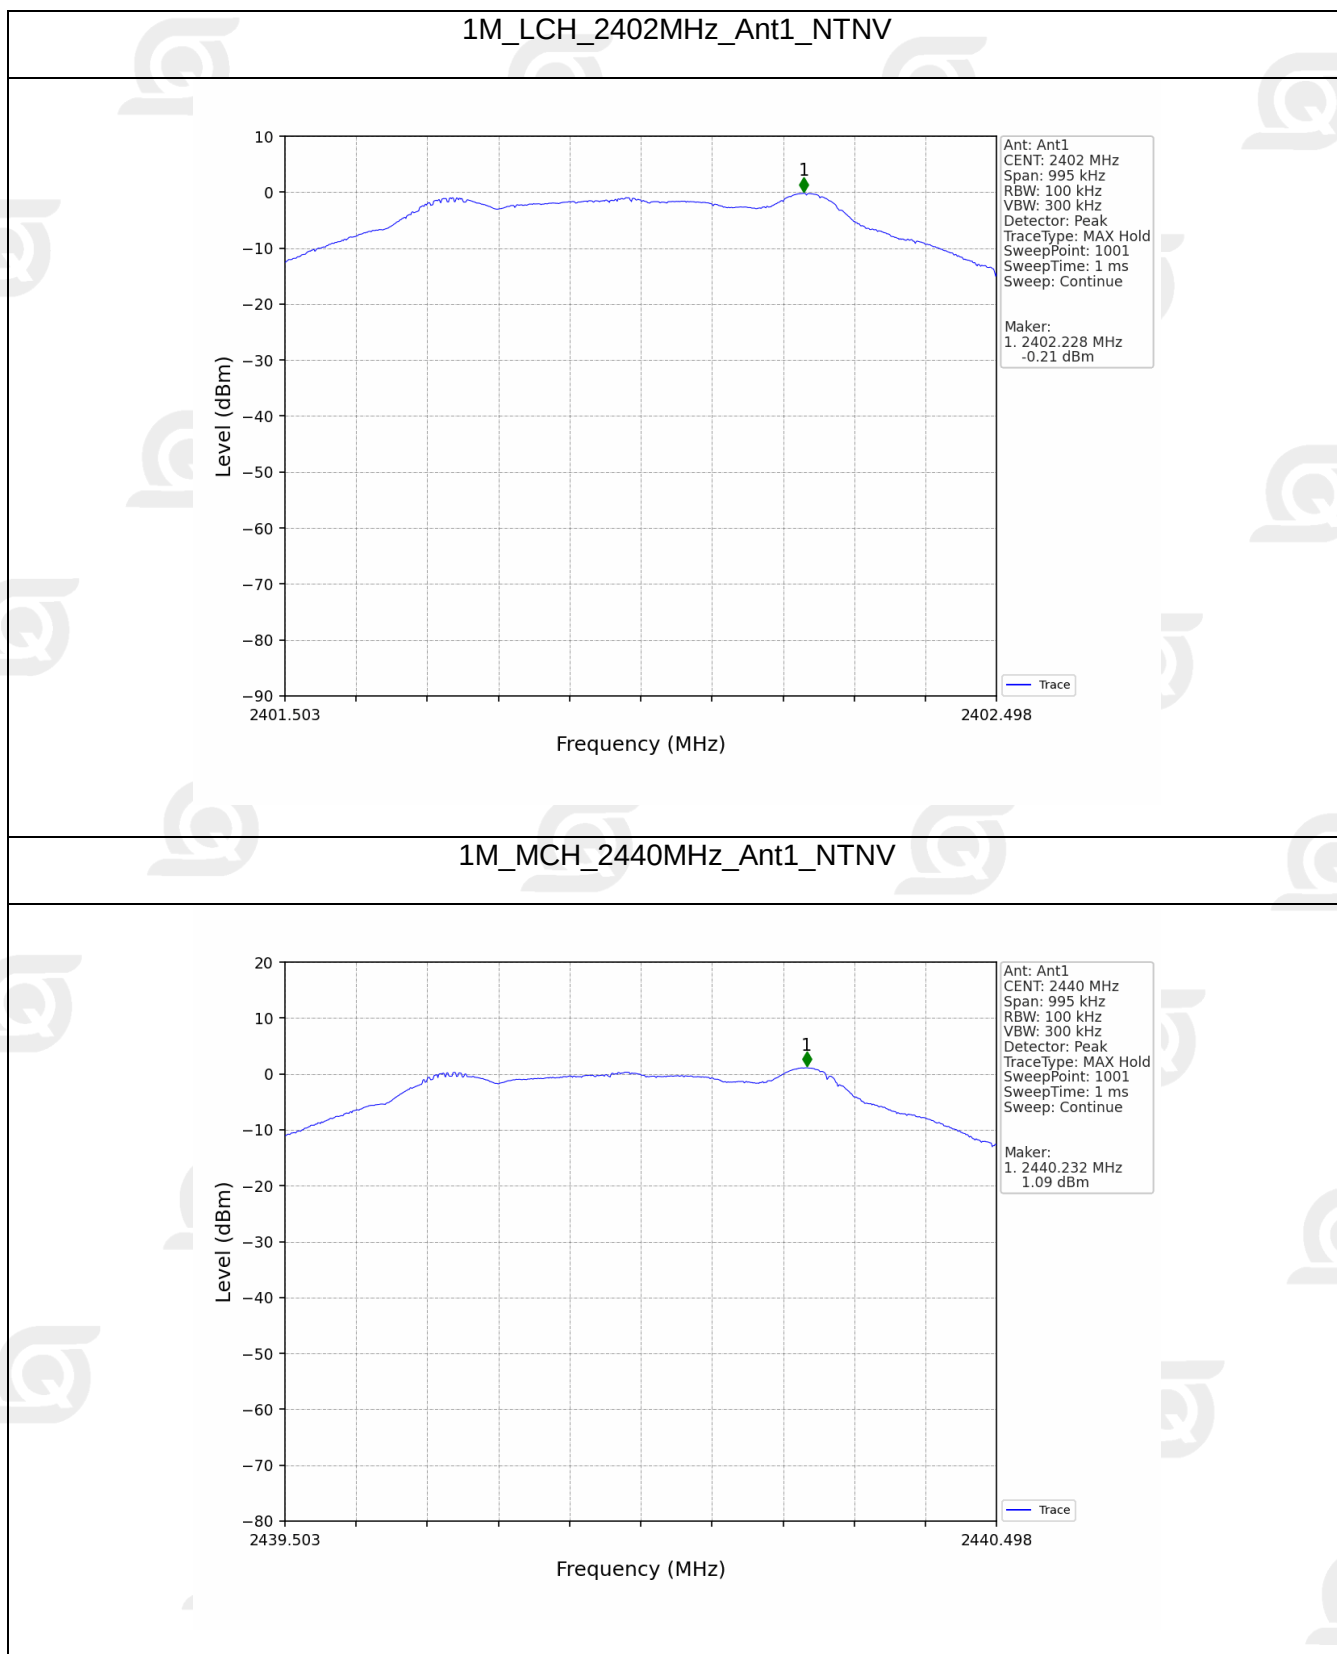


1M_HCH_2480MHz_Ant1_NTNV

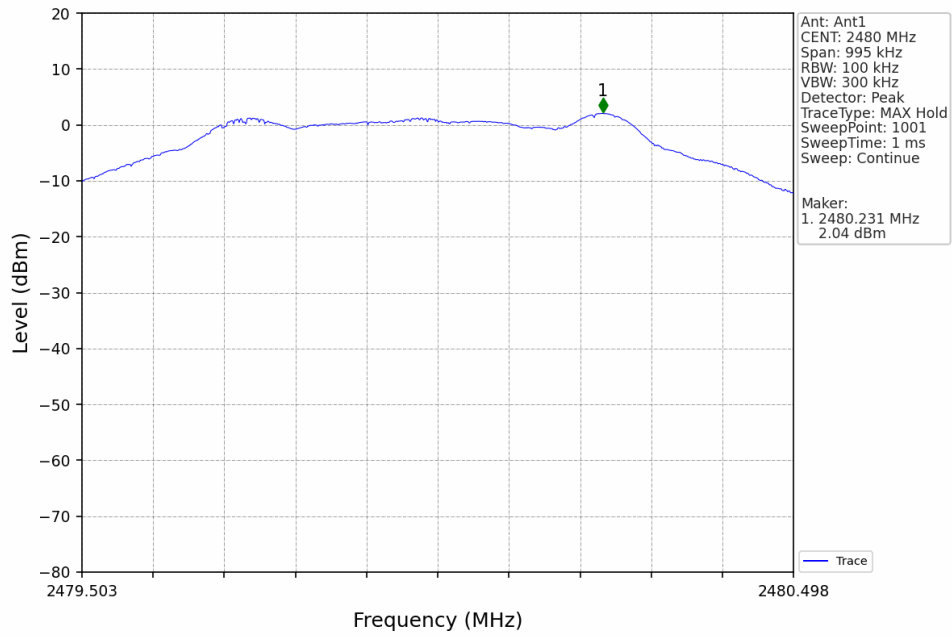


5.2.2 CSE


1M_LCH_2402MHz_Ant1_NTNV

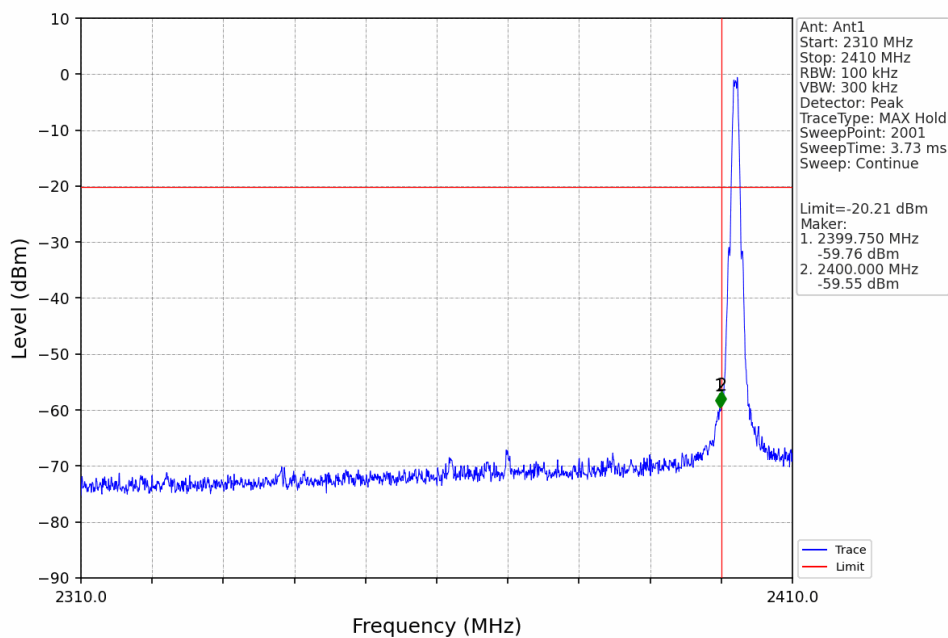


1M_LCH_2402MHz_Ant1_NTNV

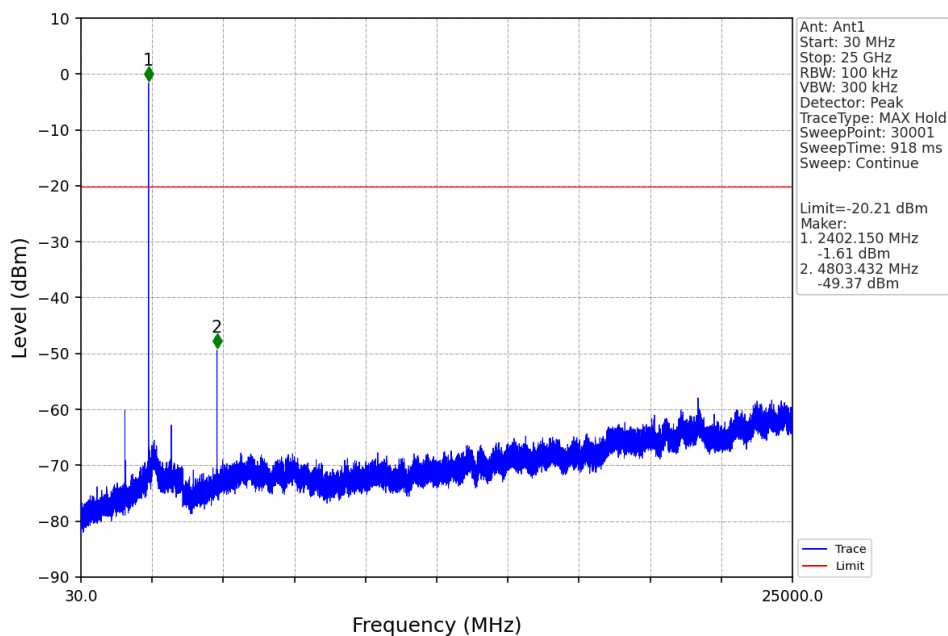


1M_MCH_2440MHz_Ant1_NTNV

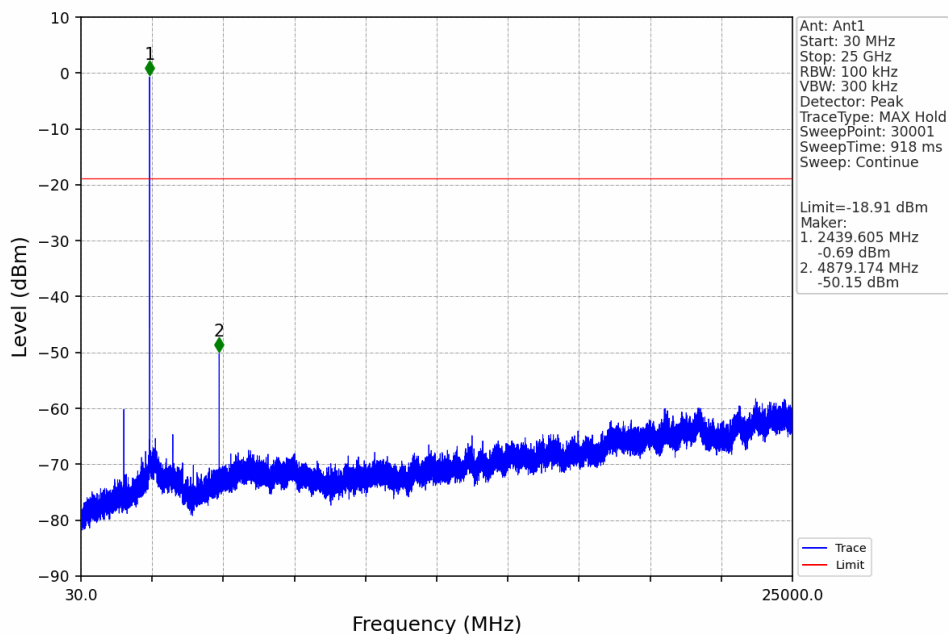

1M_HCH_2480MHz_Ant1_NTNV

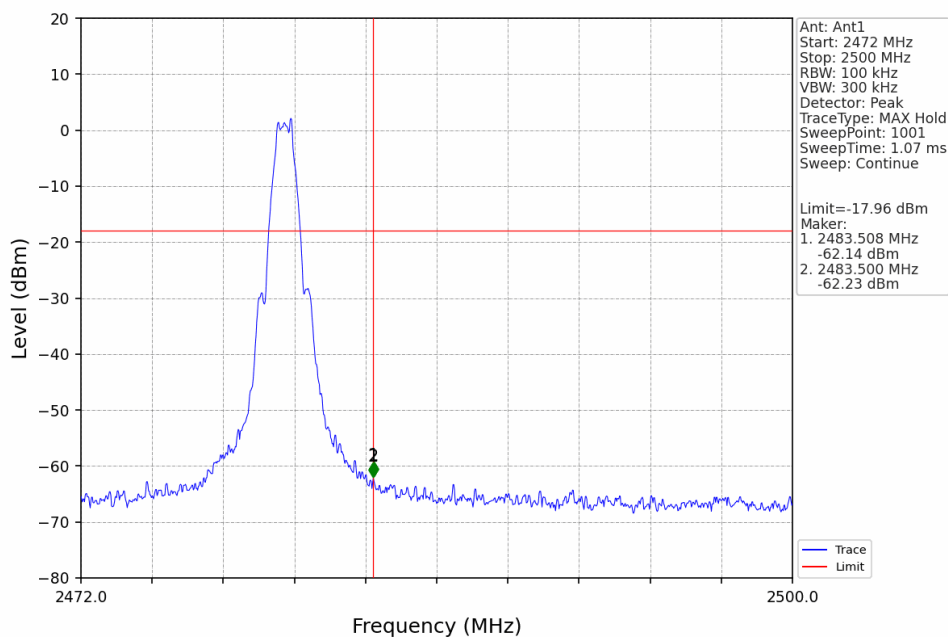

1M_HCH_2480MHz_Ant1_NTNV

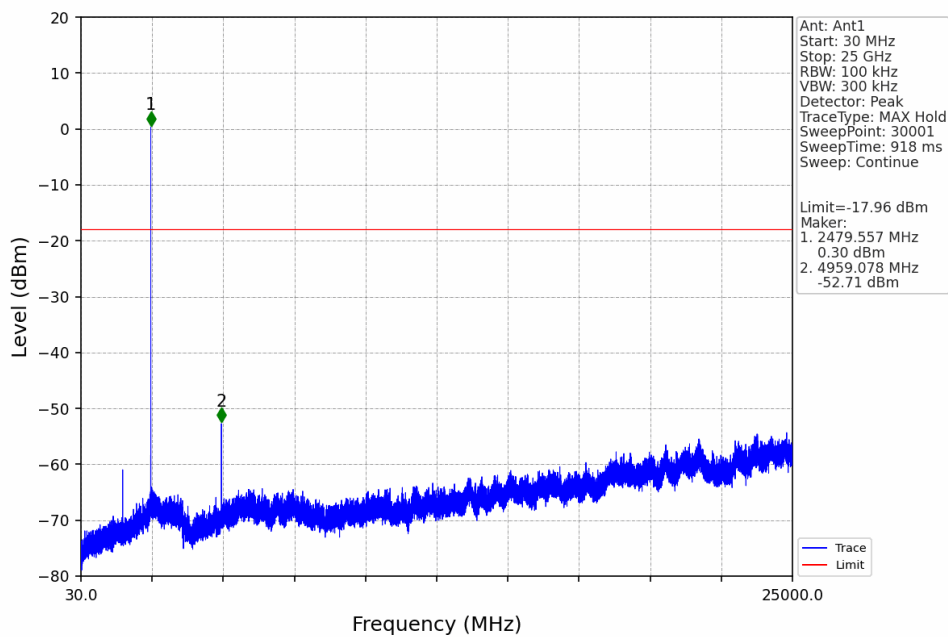

▶▶▶ END ◀◀◀