



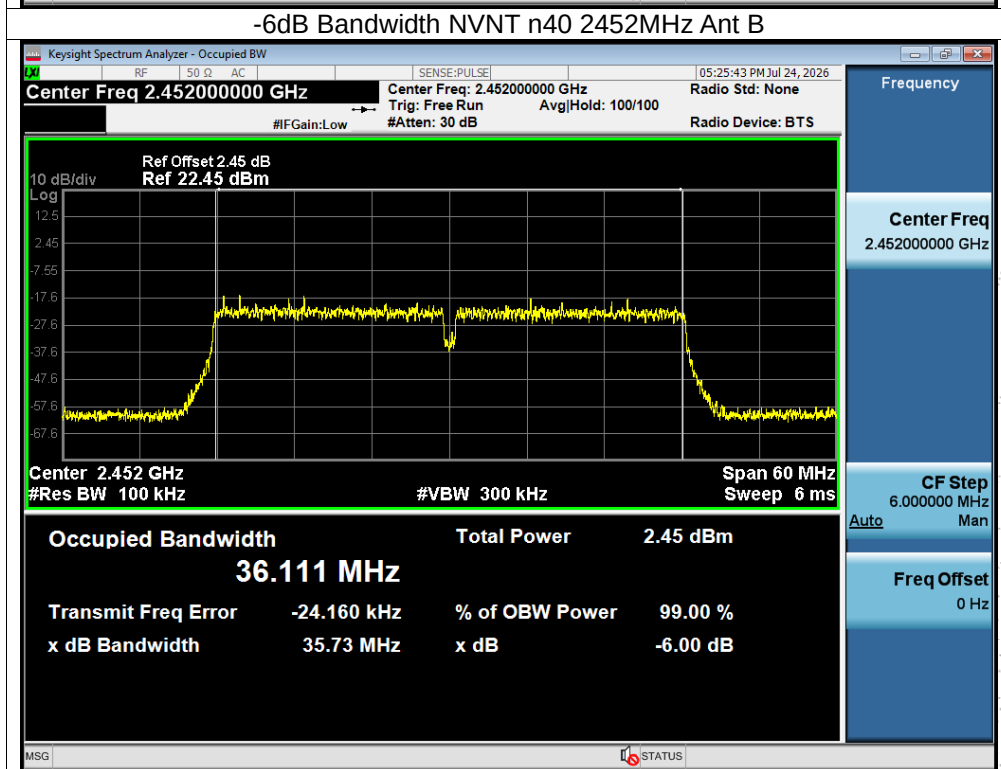
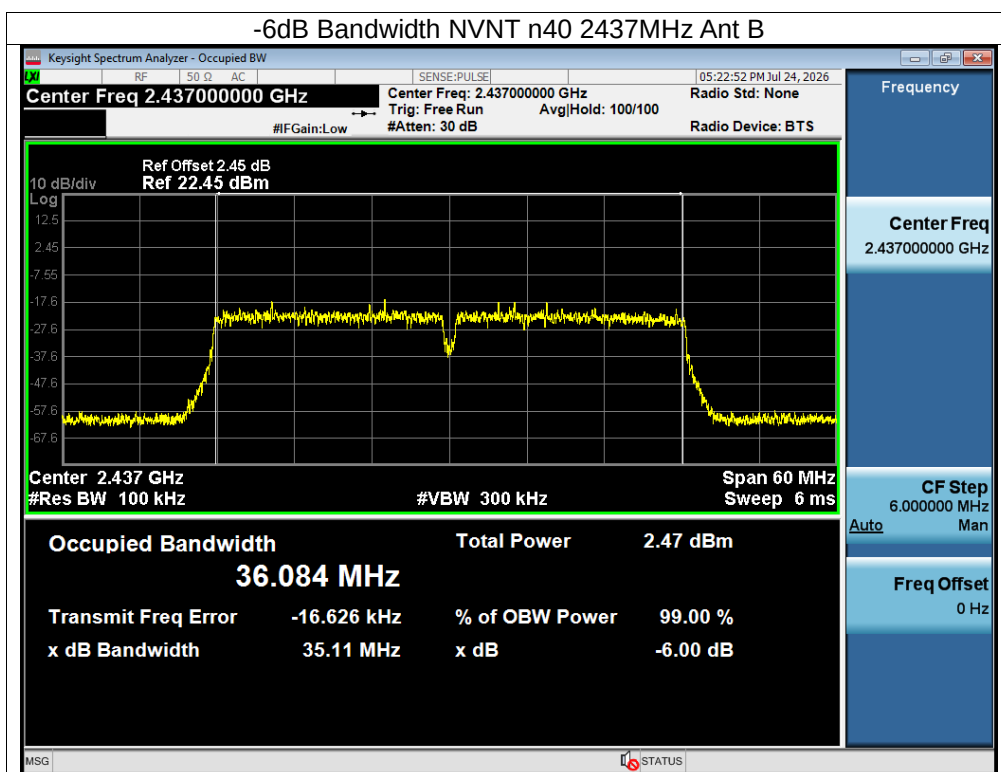
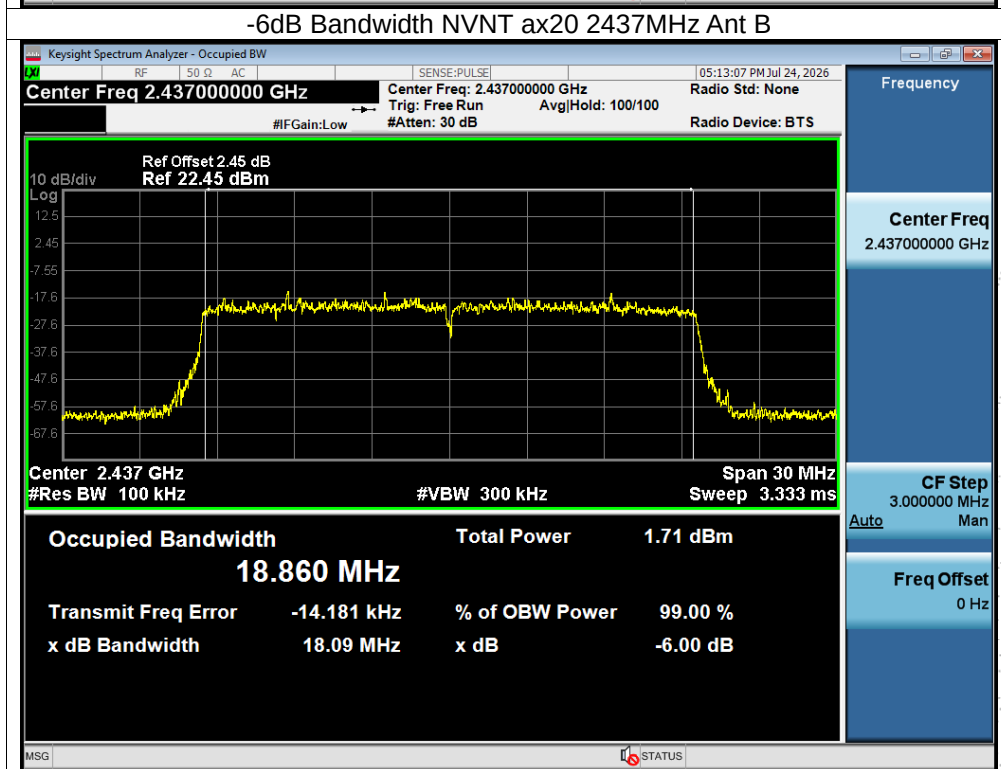
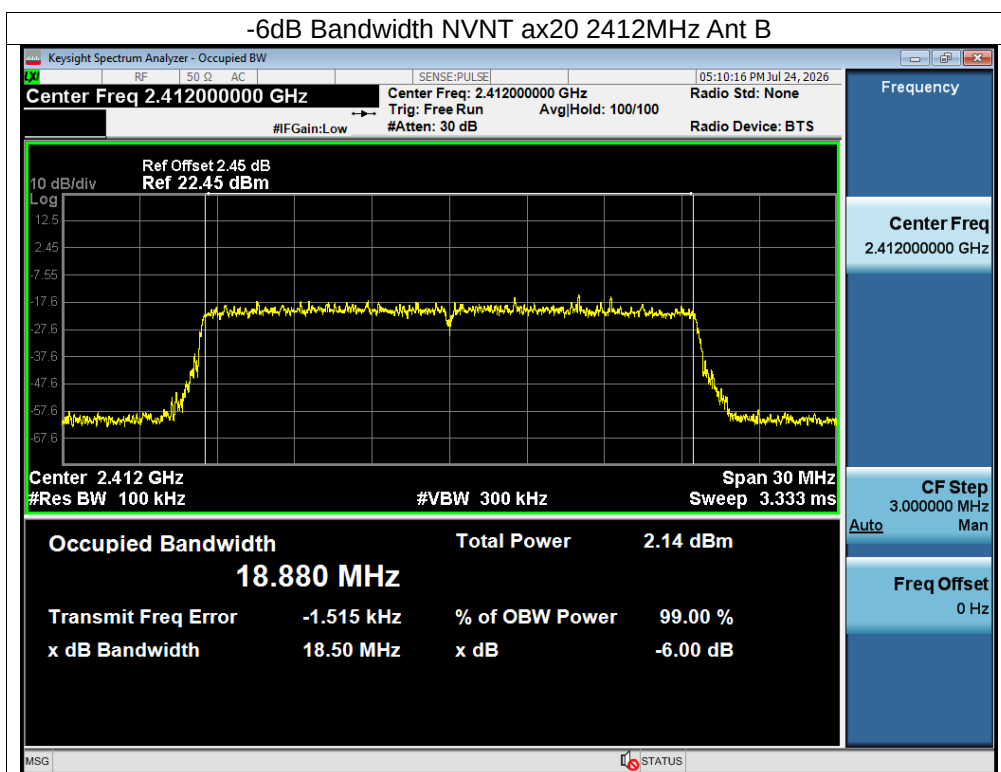


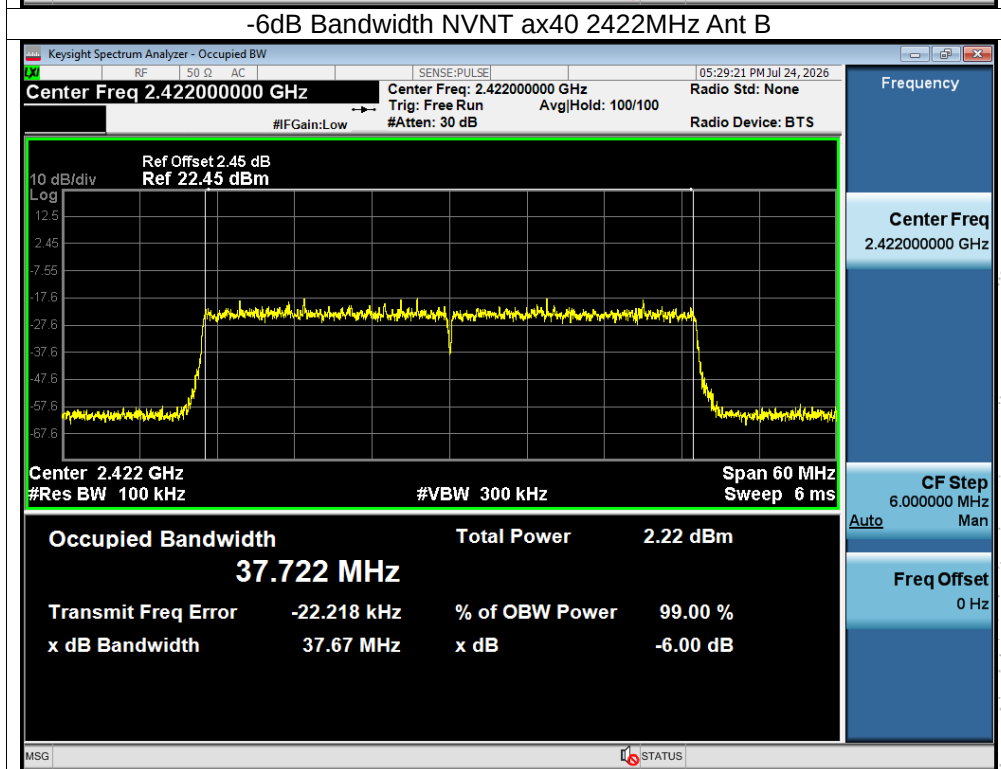

SHENZHEN

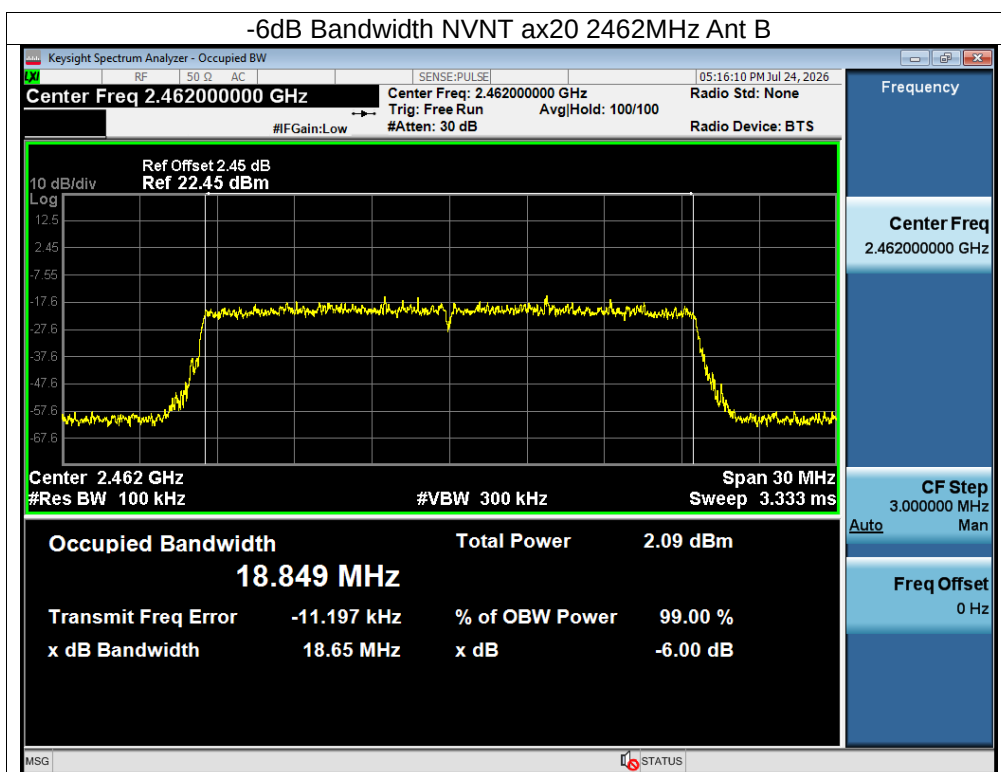

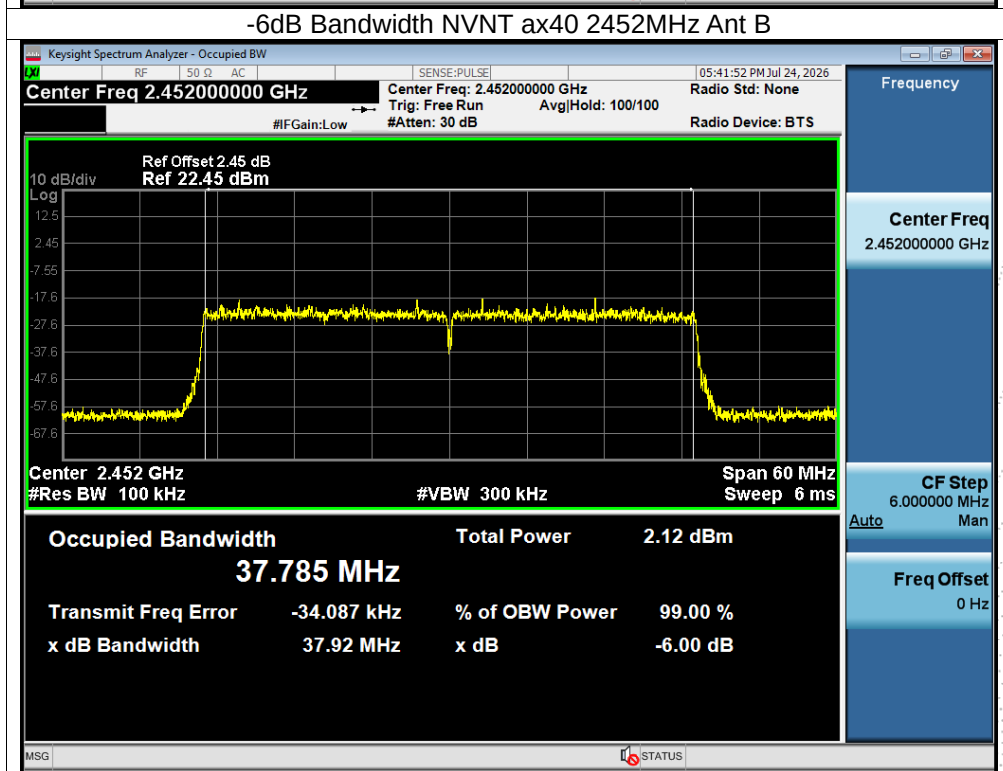

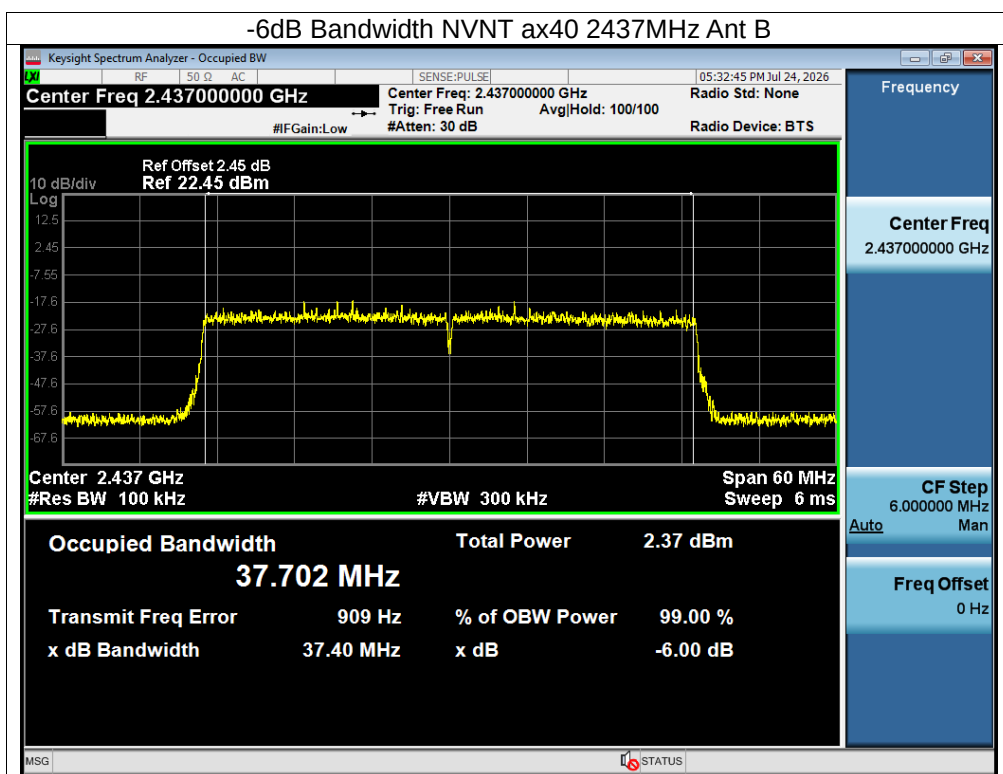

11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

11.3 Test Procedure

- a. The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

11.5 Test Result

Temperature:	23.6℃	Relative Humidity:	50%
Pressure:	101KPa	Test Voltage:	DC 11.4V

Test Mode	Frequency(MHz)	Ant A Maximum Conducted Output Power(PK) (dBm)	Ant B Maximum Conducted Output Power(PK) (dBm)	Limit (dBm)
802.11b	2412	2.69	2.84	30
	2437	2.65	2.67	30
	2462	2.24	2.22	30
802.11g	2412	1.92	2.03	30
	2437	2.07	1.74	30
	2462	1.85	1.71	30
802.11n20	2412	1.46	1.99	30
	2437	1.87	1.79	30
	2462	1.83	1.58	30
802.11n40	2422	0.93	0.62	30
	2437	1.35	1.05	30
	2452	0.94	0.95	30
802.11ax20	2412	1.91	1.97	30
	2437	1.84	1.42	30
	2462	1.54	1.47	30
802.11ax40	2422	1.34	1.05	30
	2437	1.51	1.37	30
	2452	1.11	1.16	30

BCTC CO., LTD

For 2T2R

Test Mode	Frequency(MHz)	Maximum Conducted Output Power(PK) (dBm)	Limit (dBm)	Result
802.11n20	2412	4.74	30	PASS
	2437	4.84	30	PASS
	2462	4.72	30	PASS
802.11n40	2422	3.79	30	PASS
	2437	4.21	30	PASS
	2452	3.96	30	PASS
802.11ax20	2412	4.95	30	PASS
	2437	4.65	30	PASS
	2462	4.52	30	PASS
802.11ax40	2422	4.21	30	PASS
	2437	4.45	30	PASS
	2452	4.15	30	PASS

SHENZHEN

12. 100 kHz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup



12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test Procedure

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize..


12.4 EUT Operating Conditions



The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



Note: Power Spectral Density(dBm)=Reading+Cable Loss



12.5 Test Result



Ant A


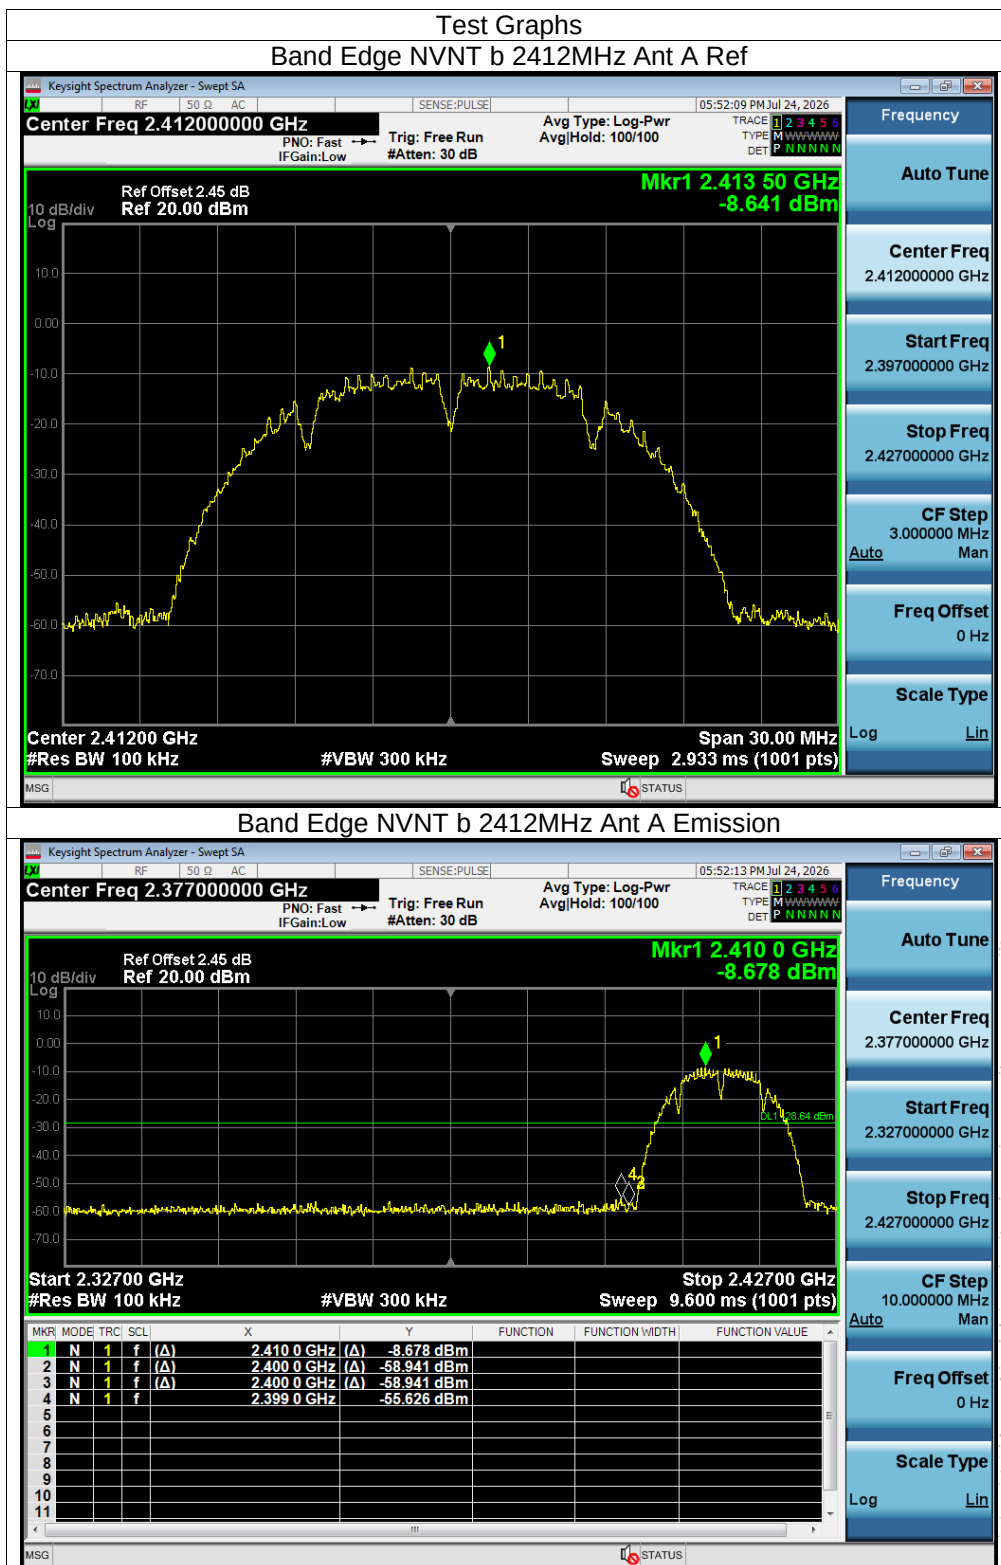


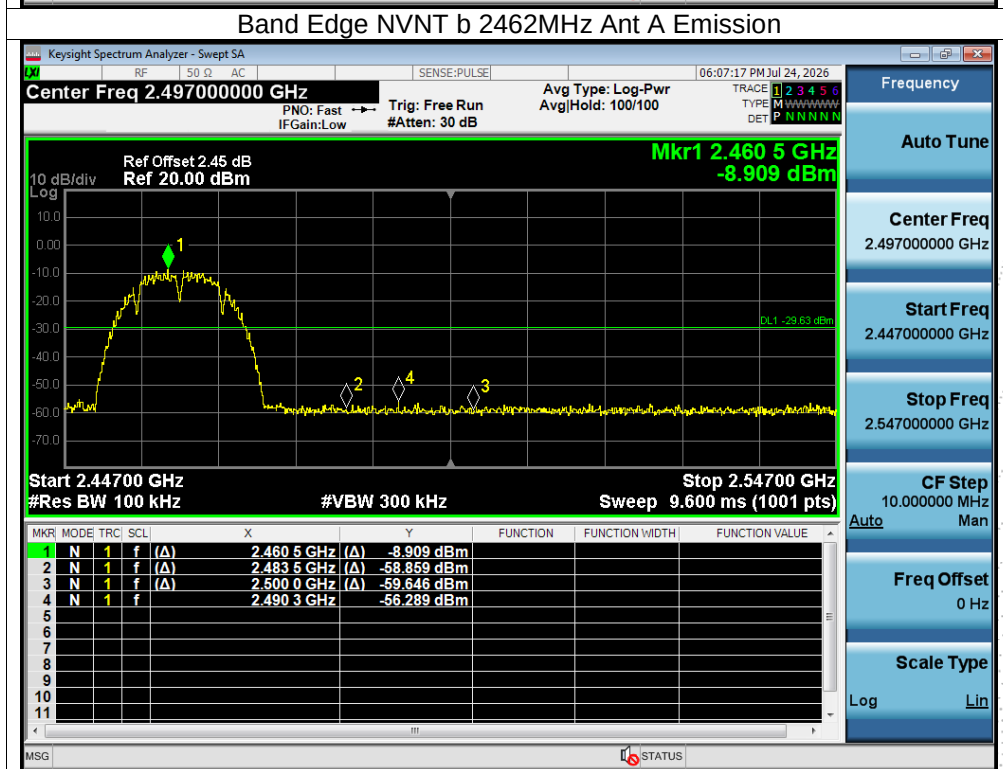
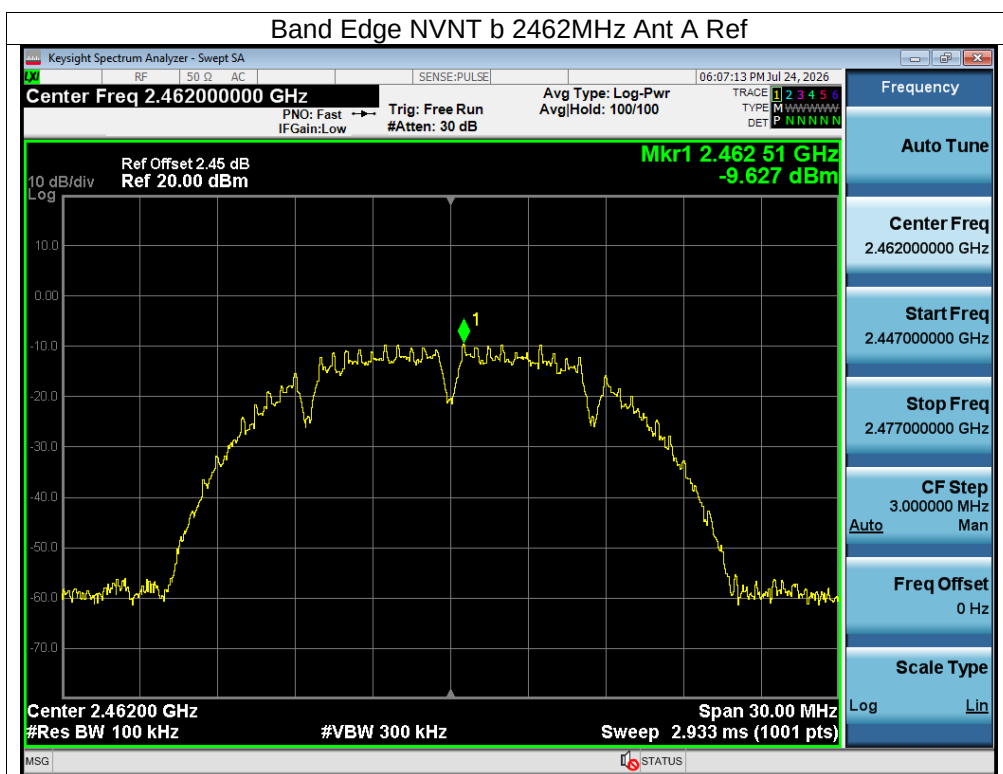


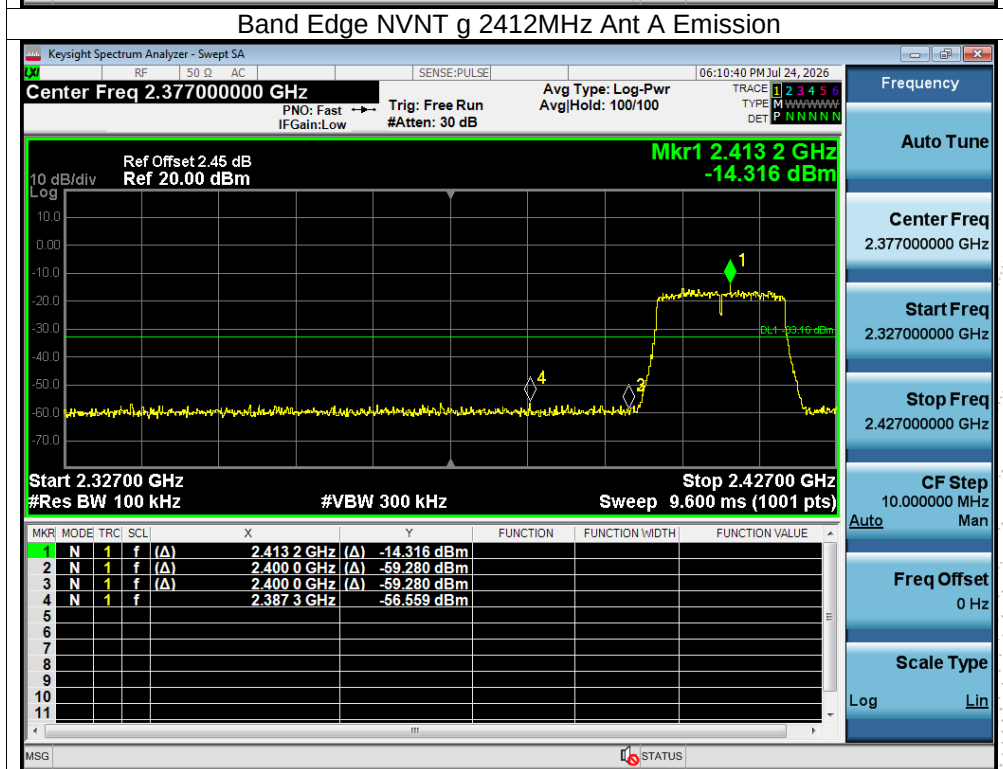
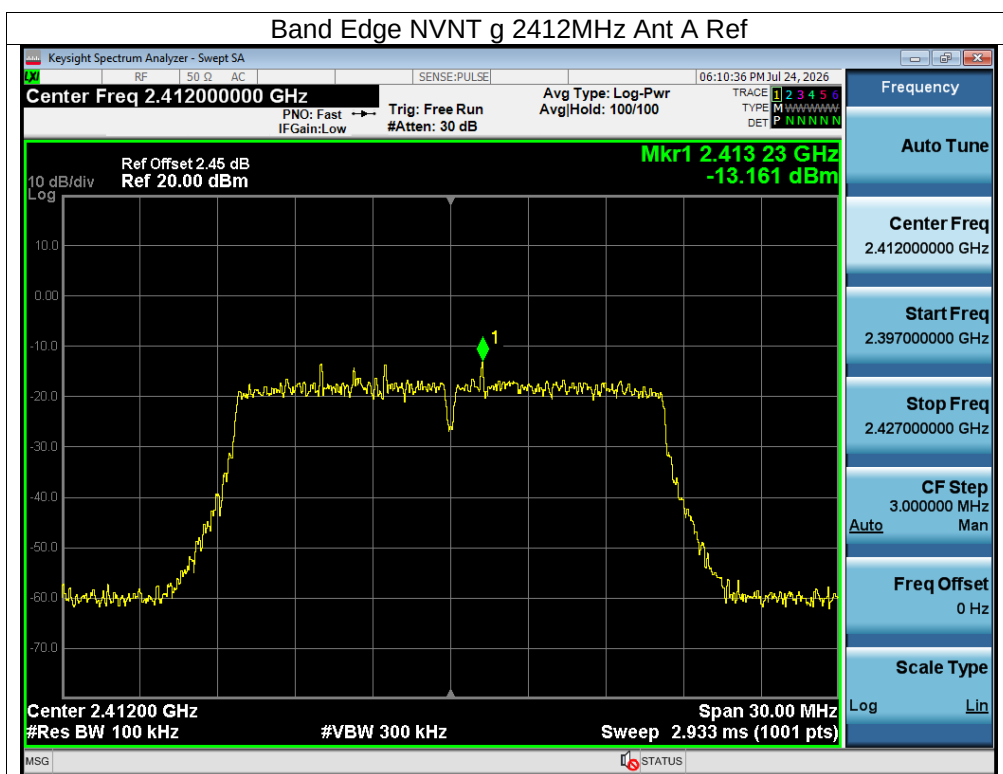


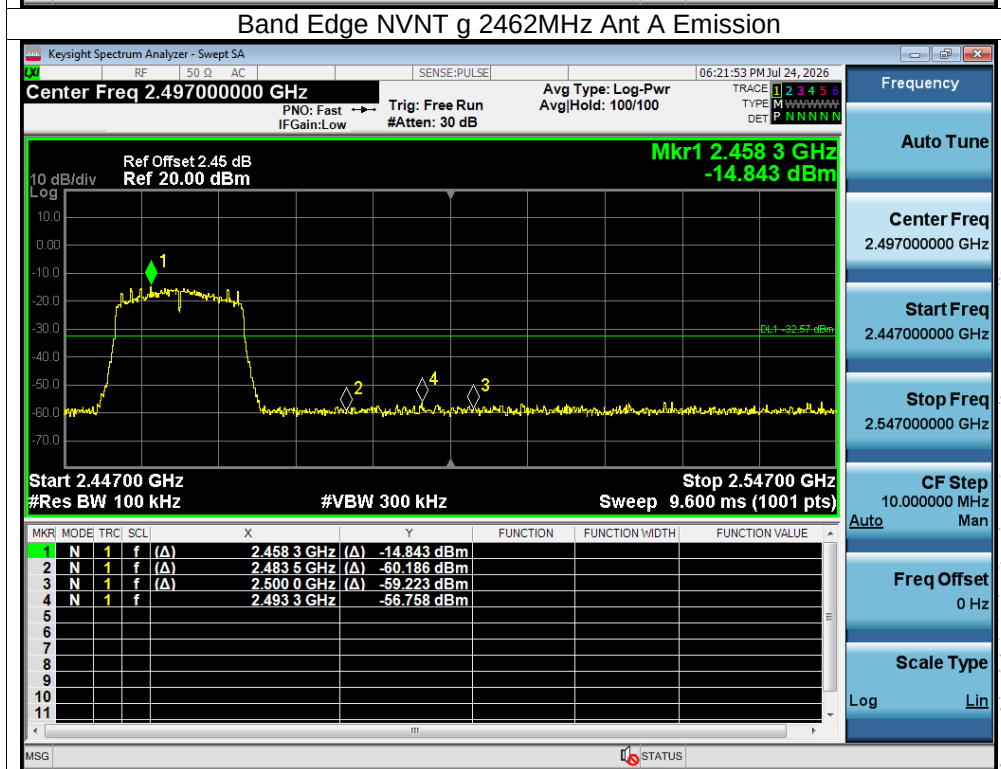
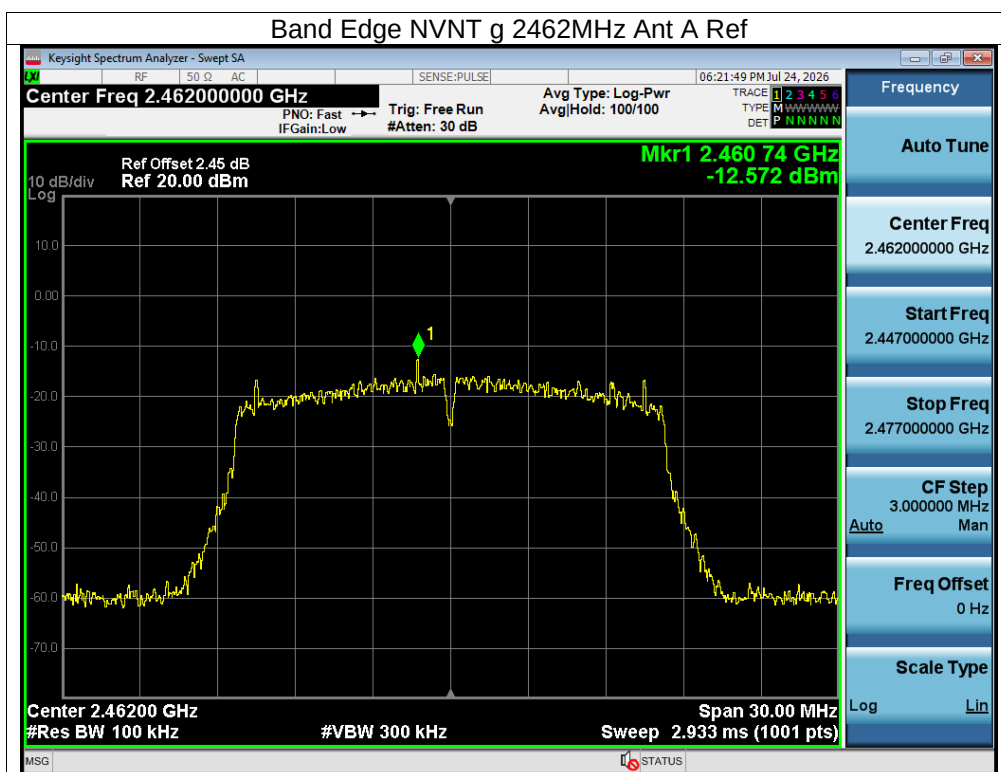


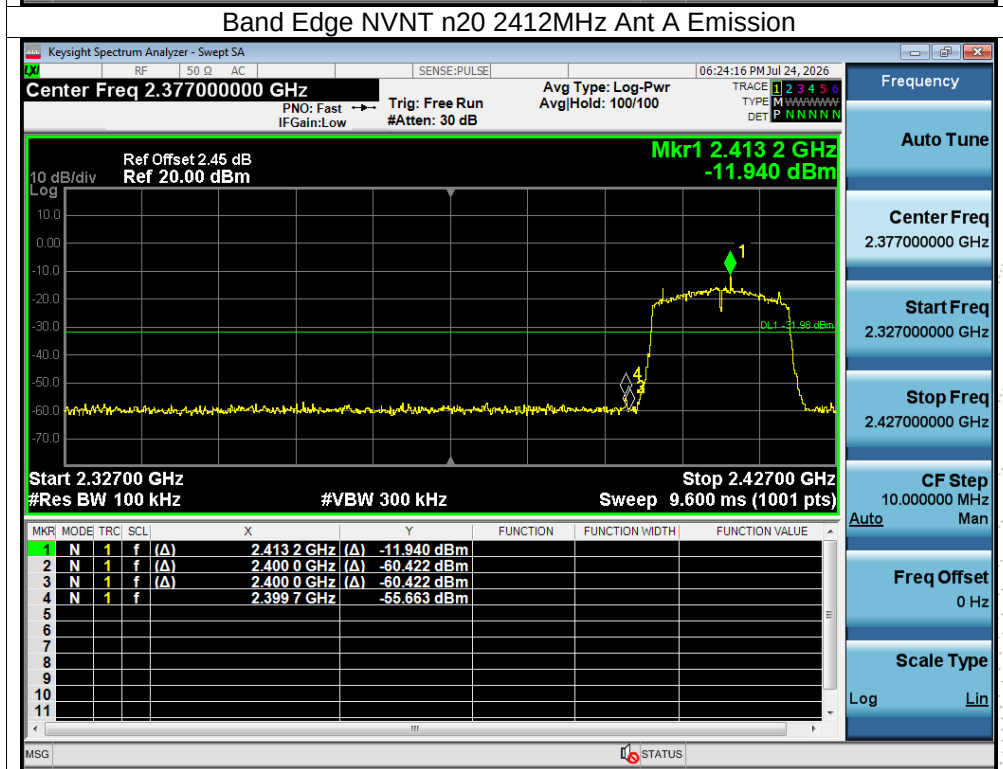
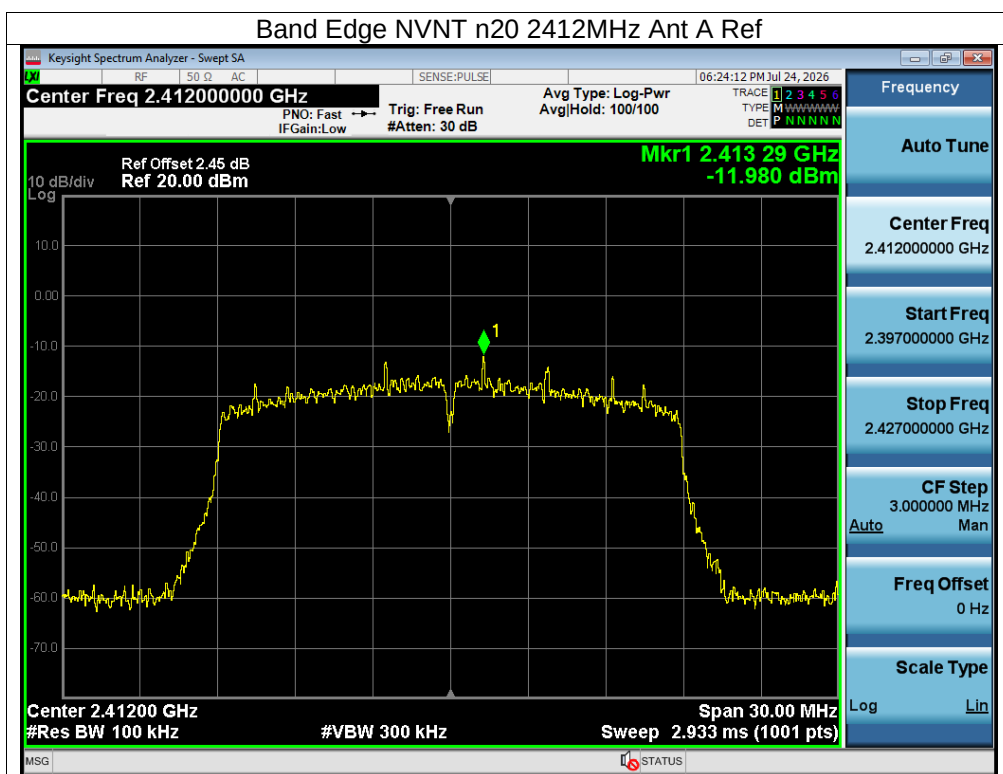


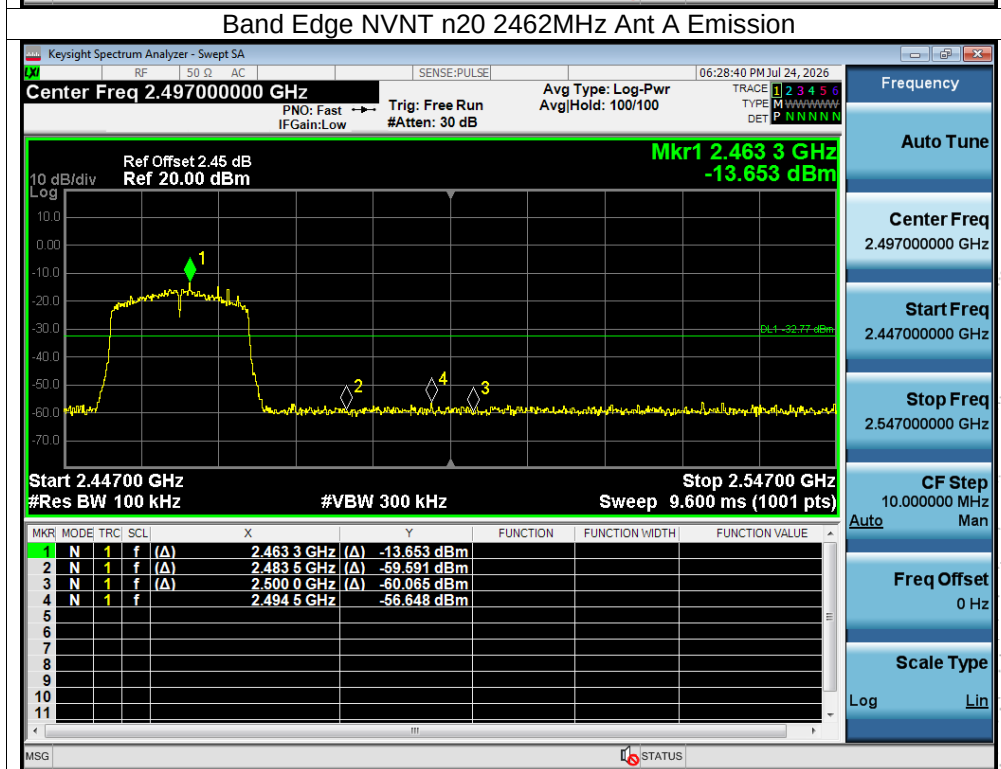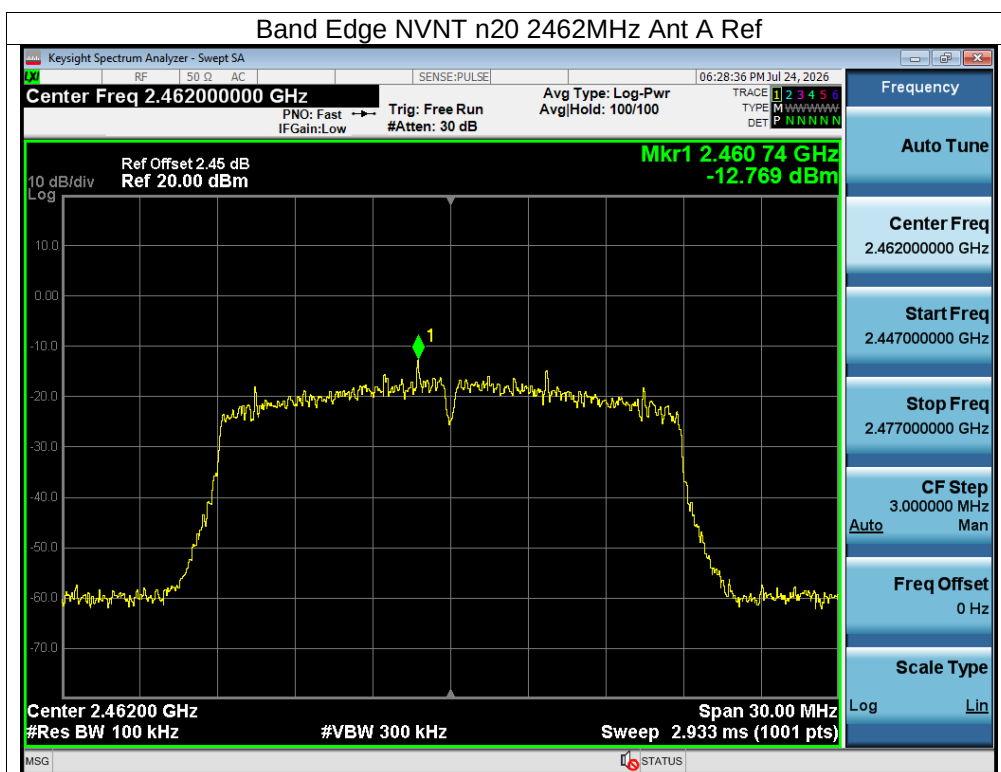

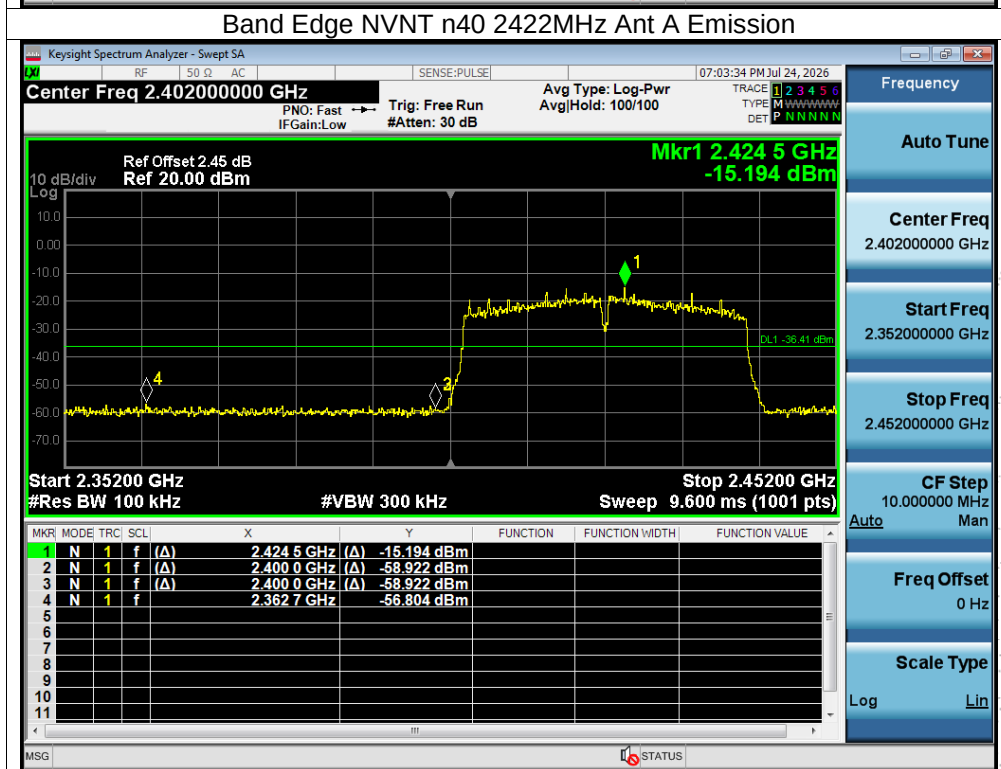
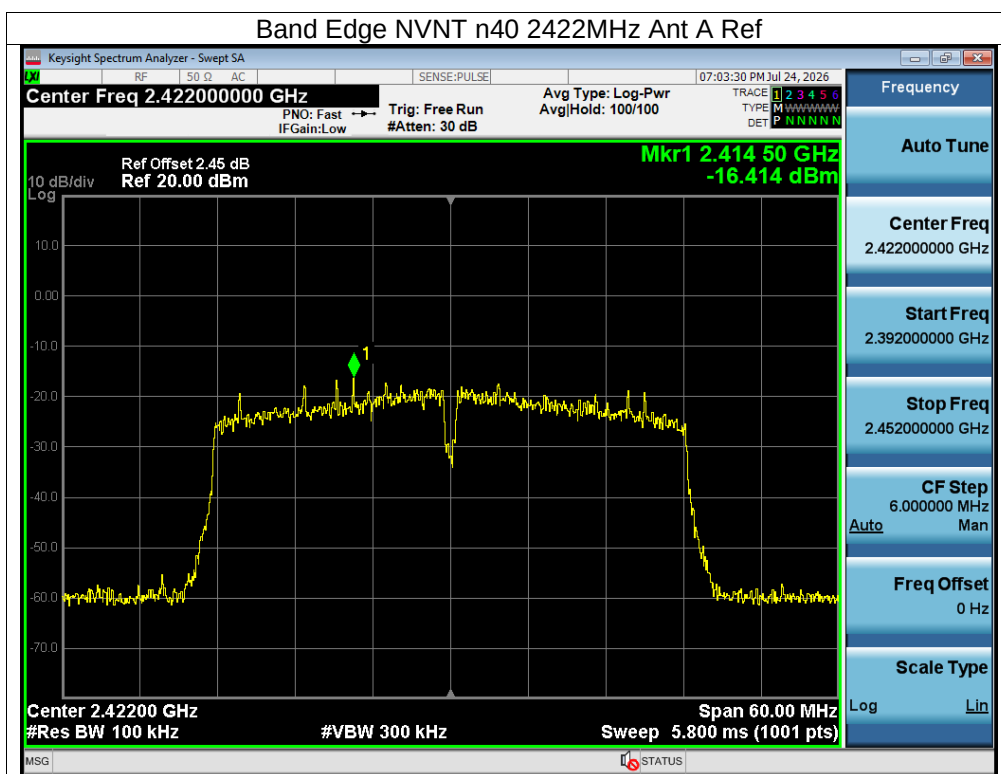


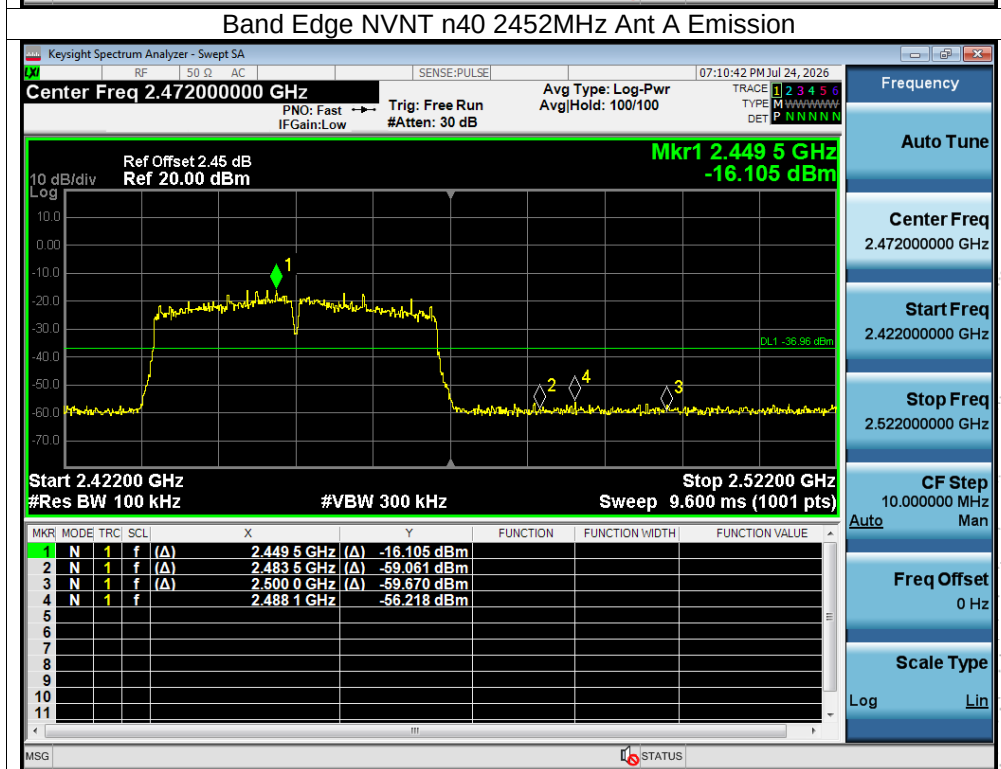
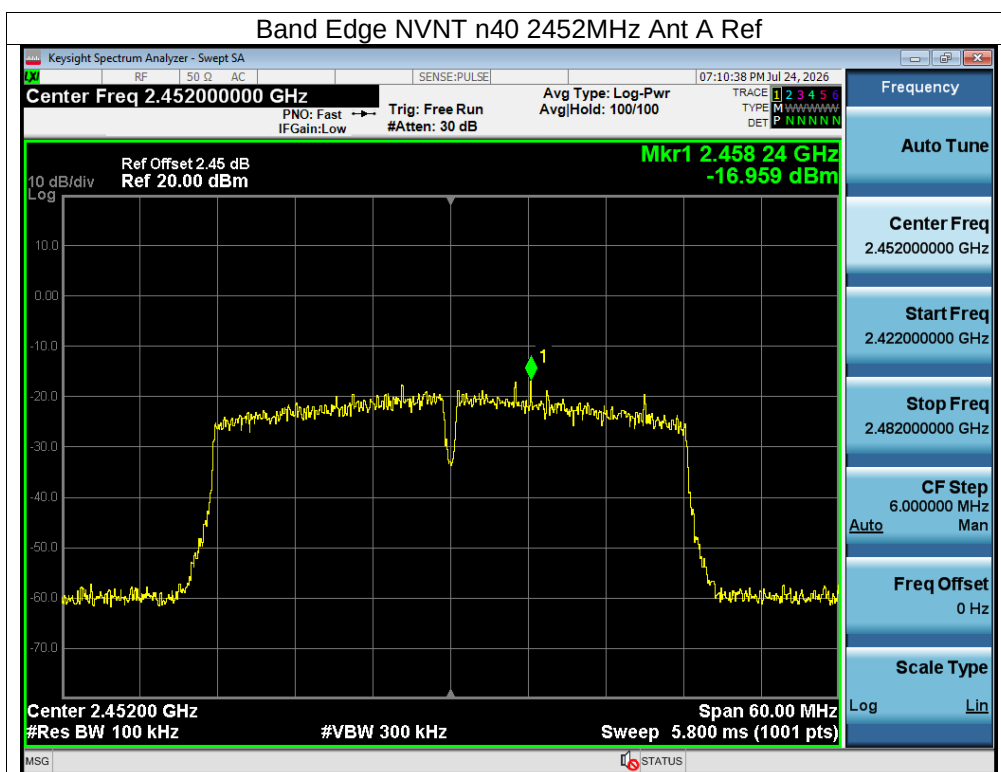


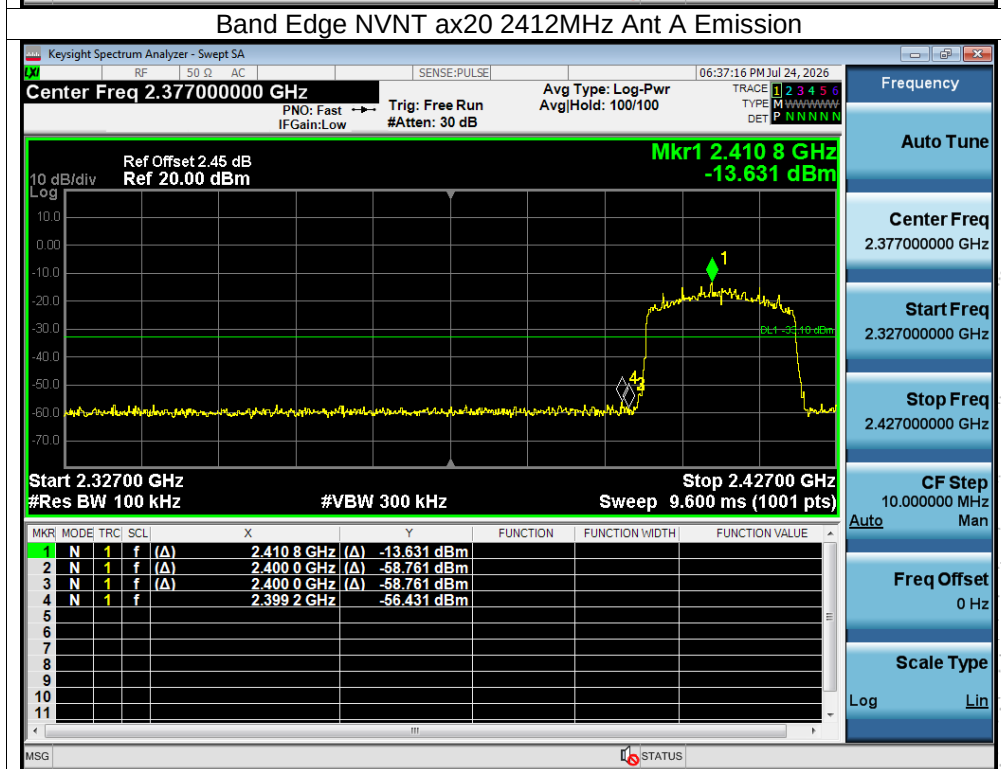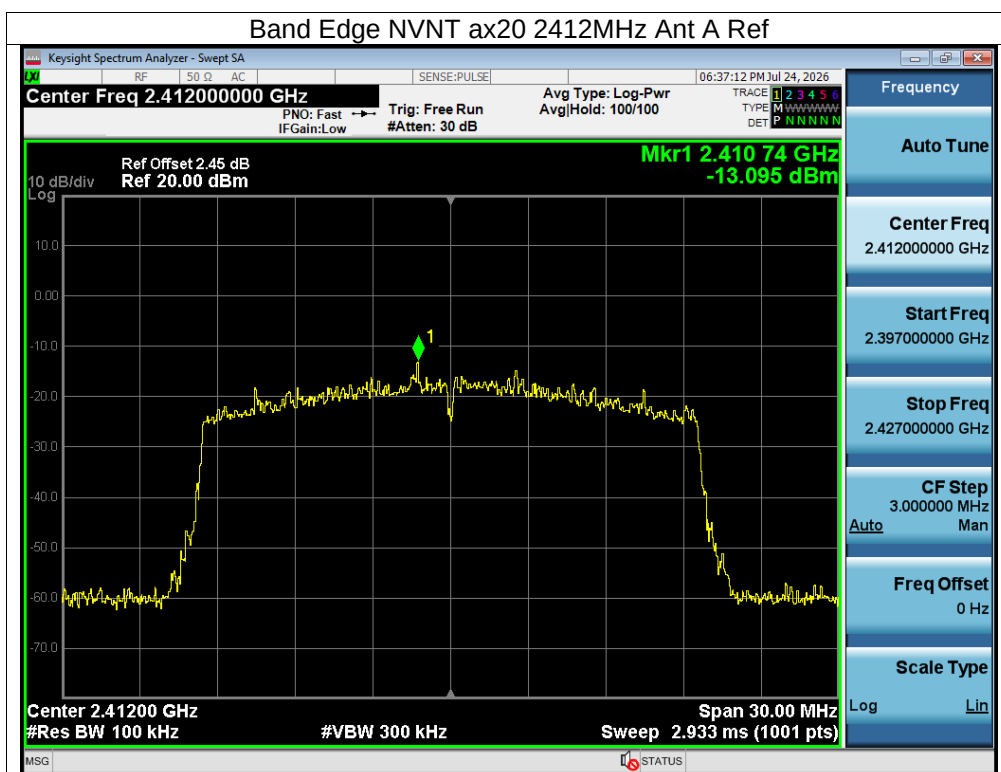


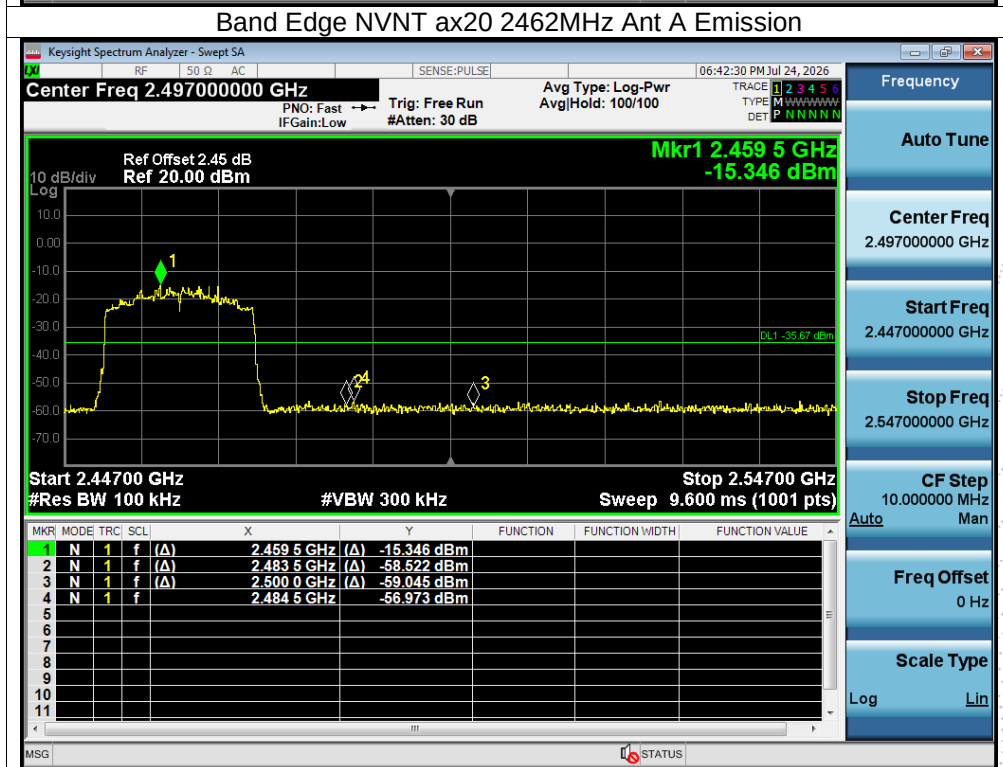
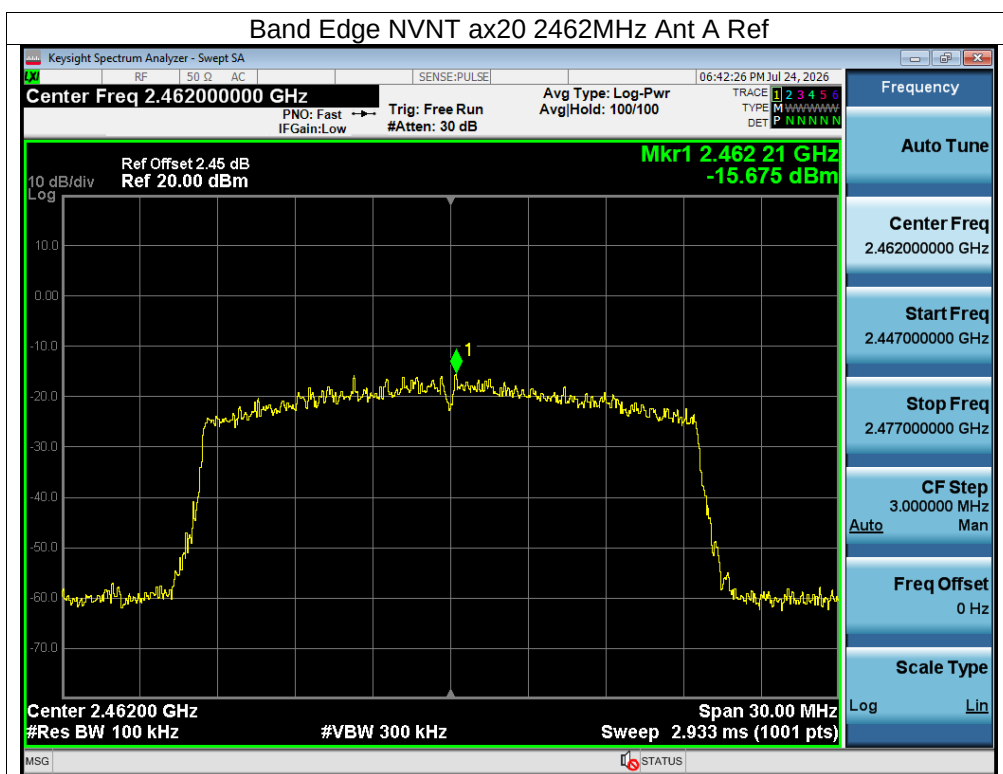


BCTC CO., LTD

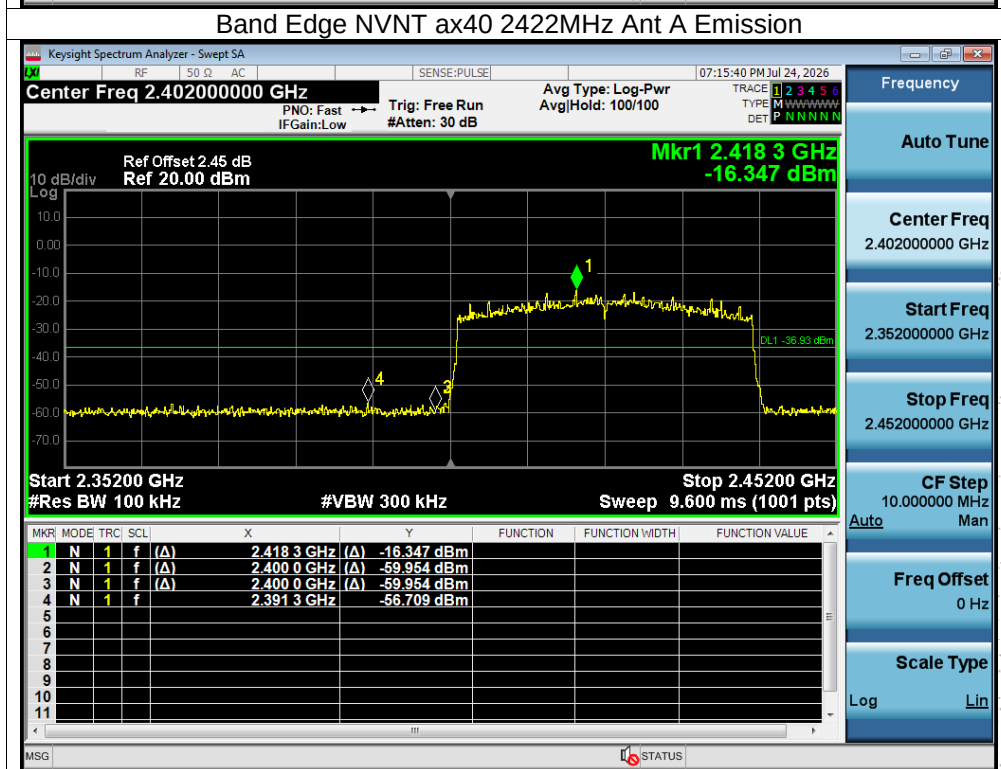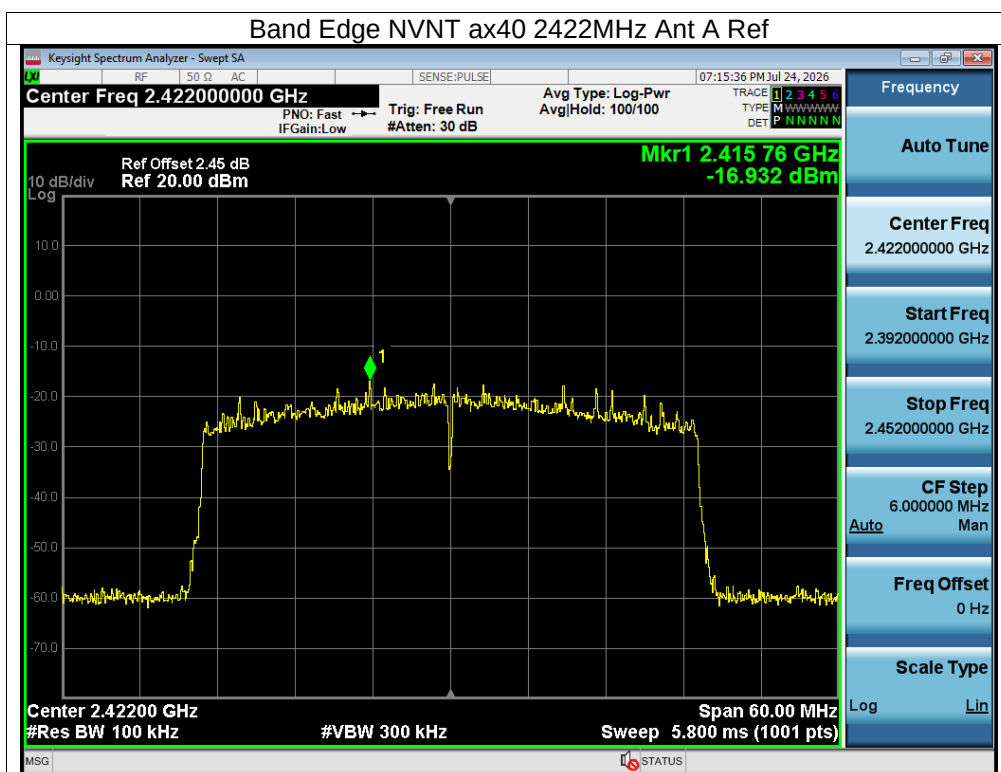


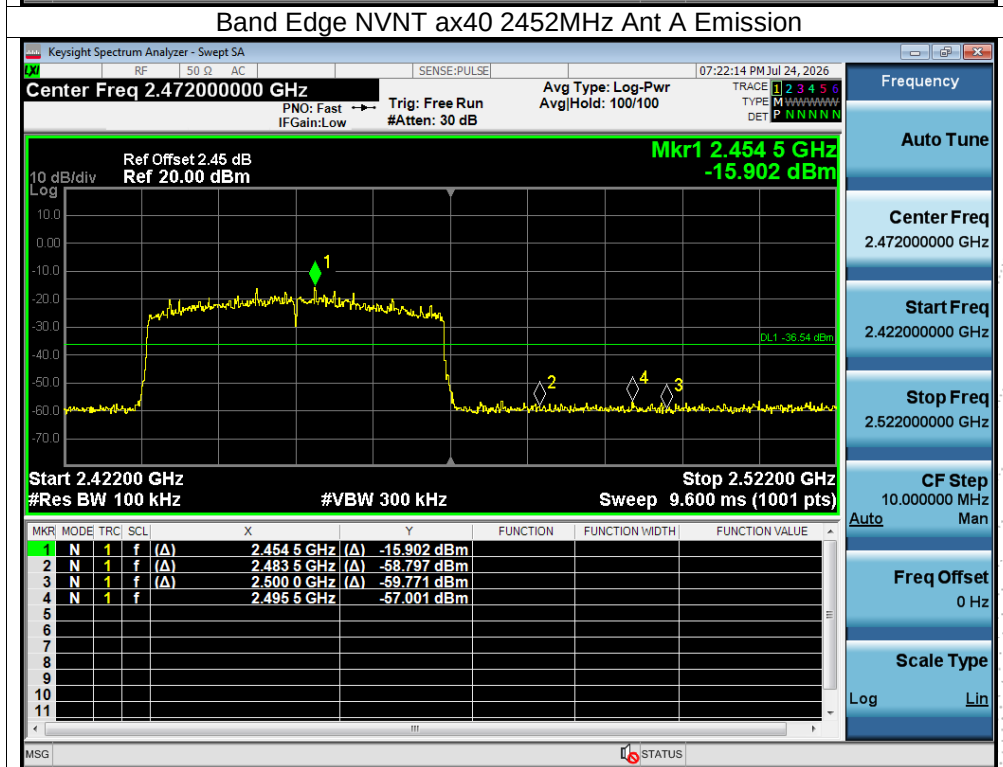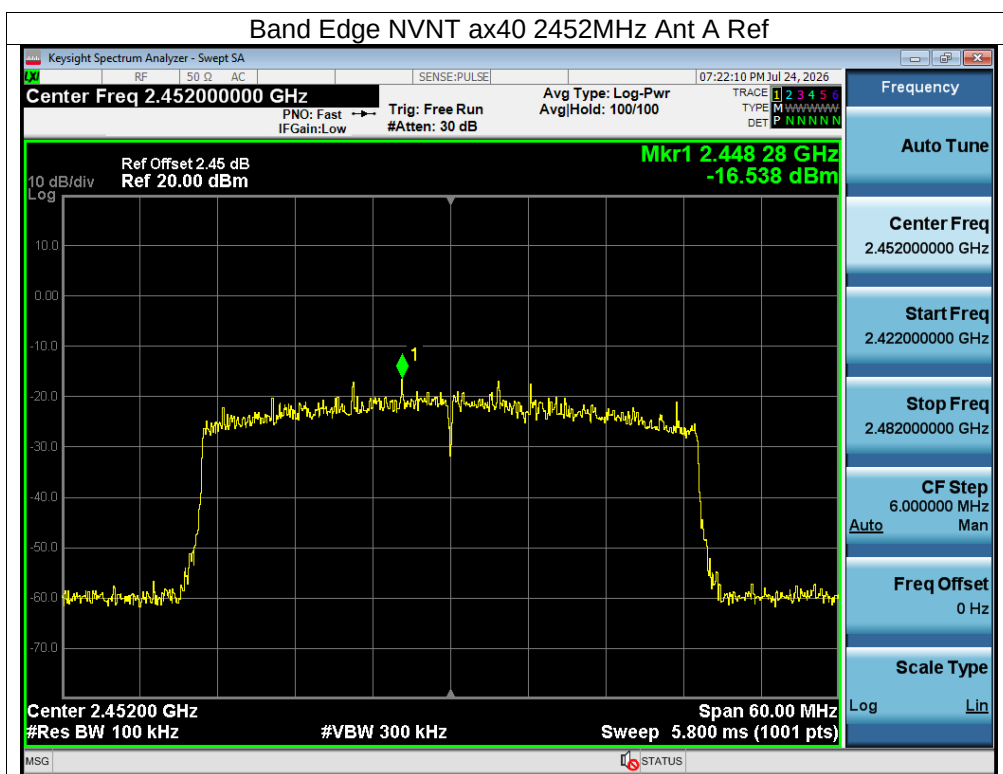

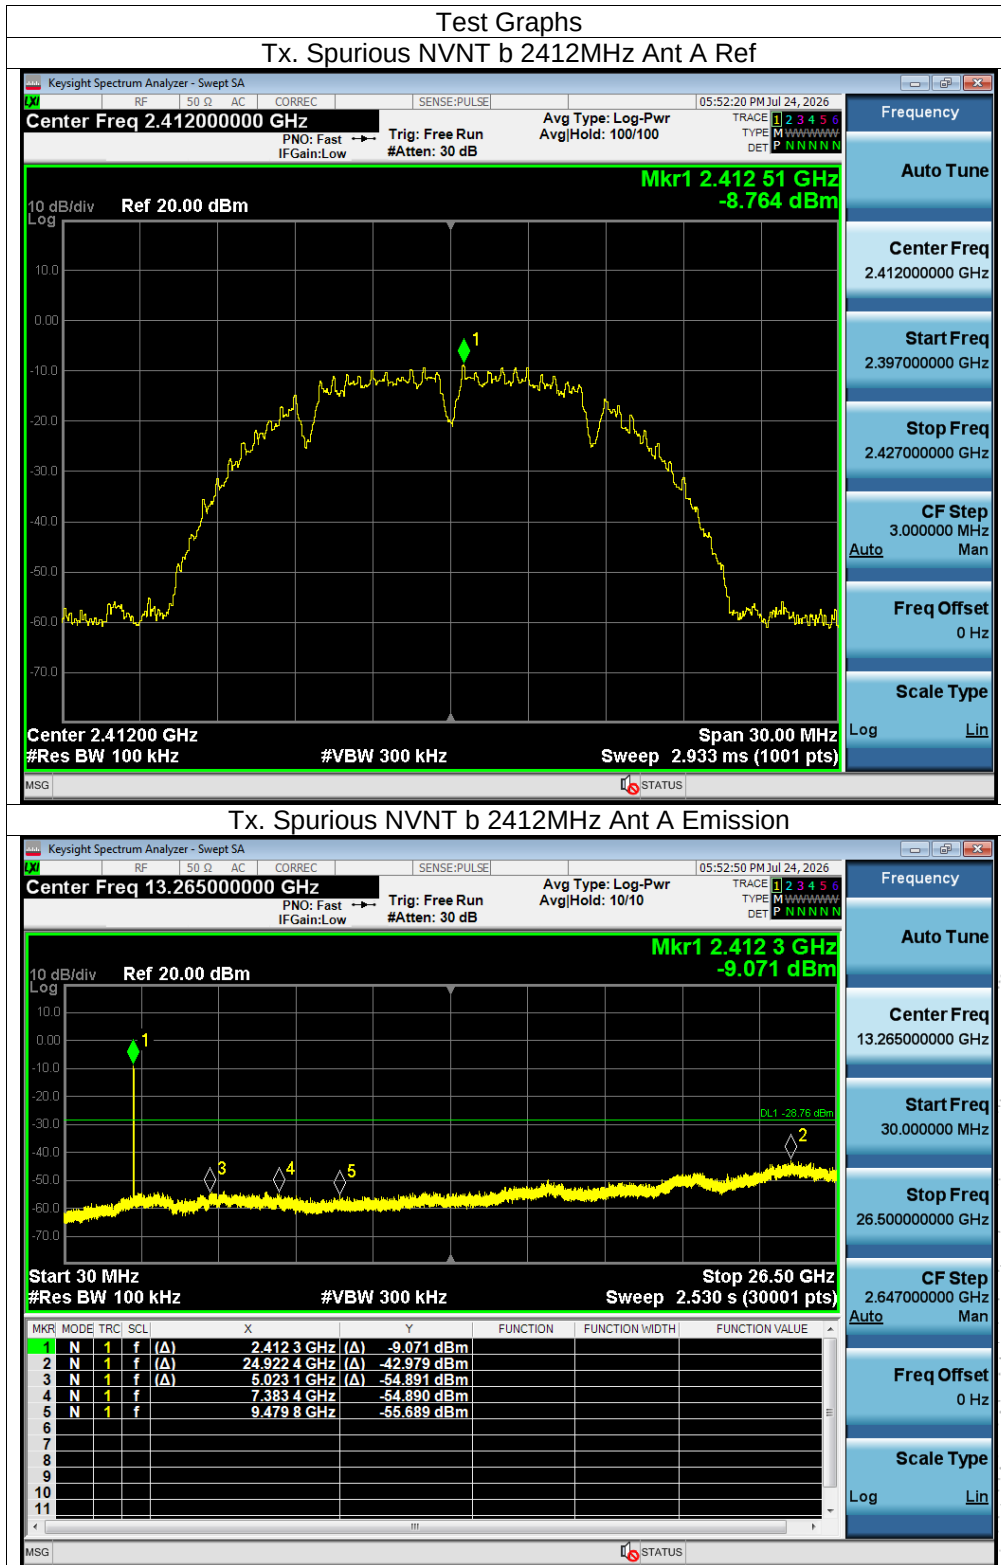
Conducted RF Spurious Emission

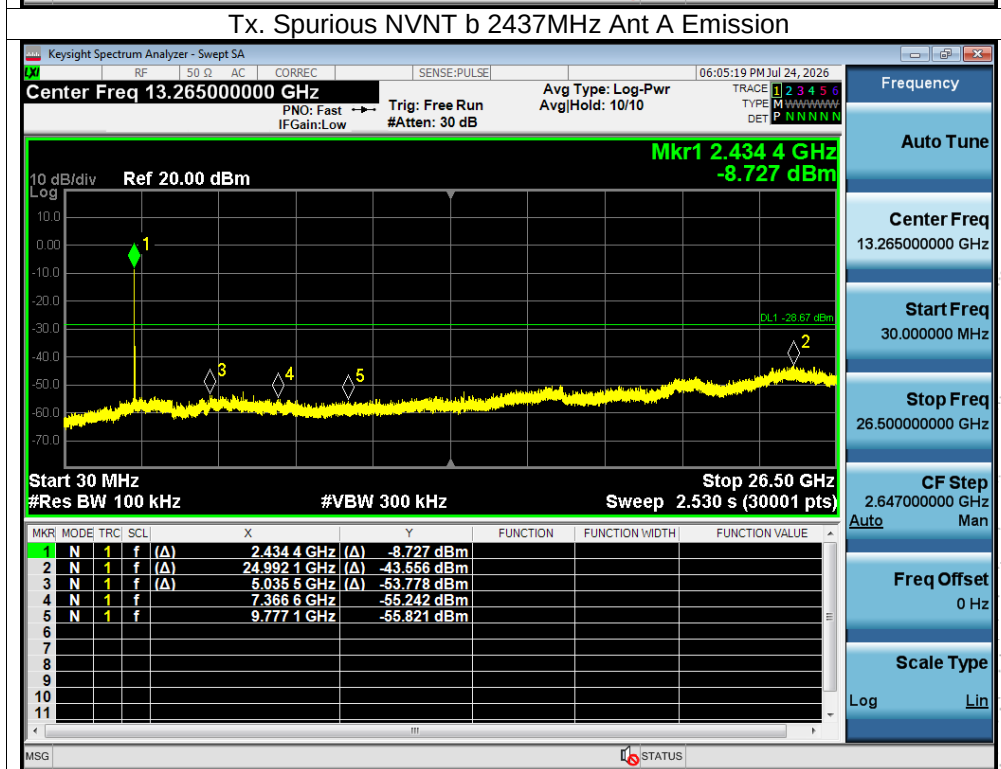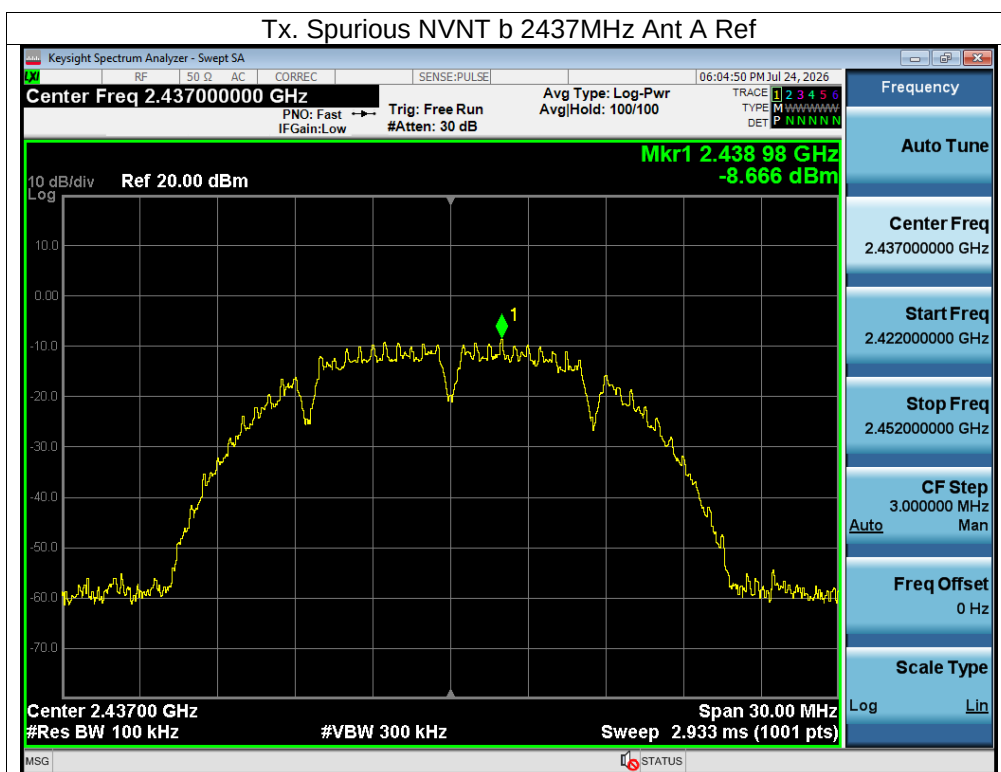
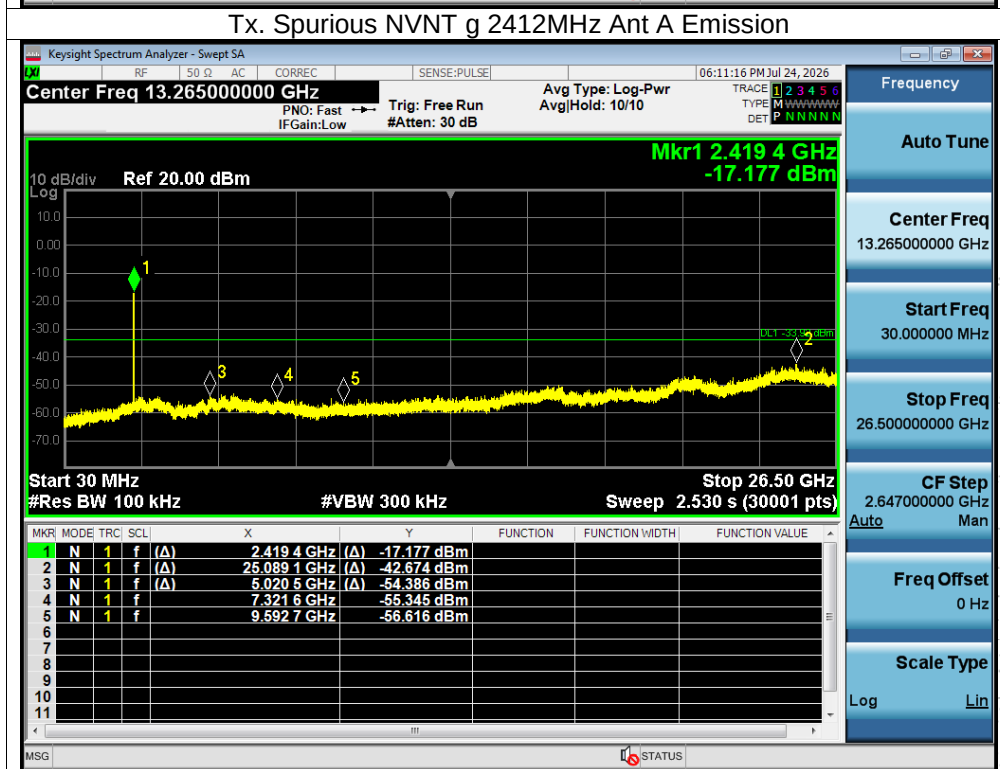
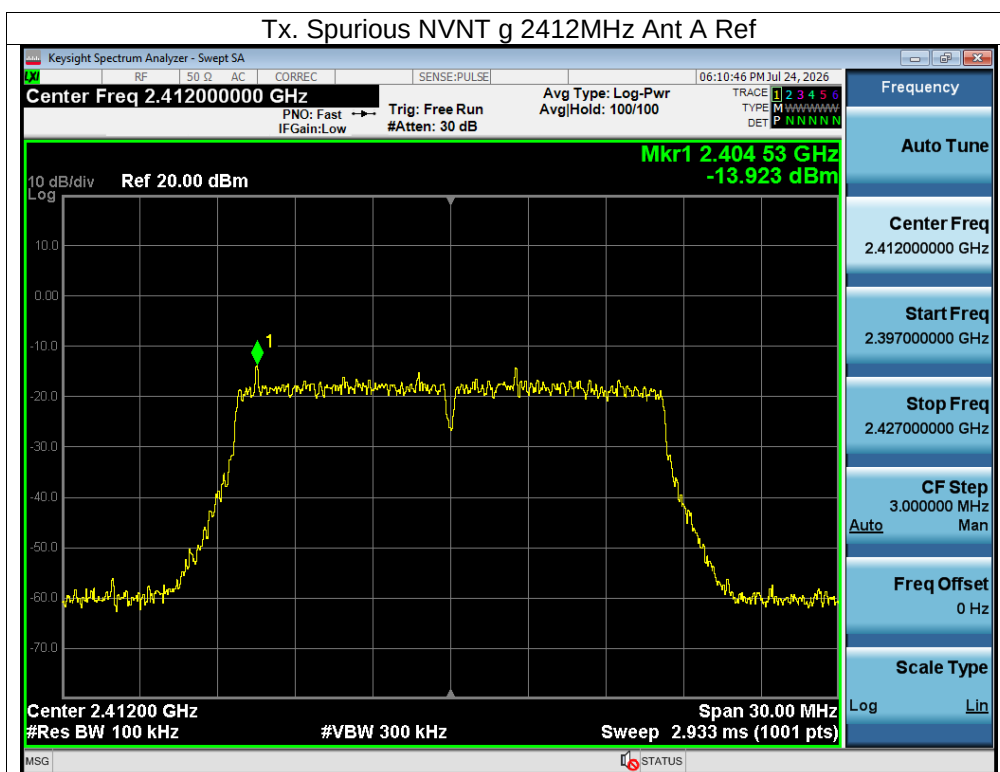


Tx. Spurious NVNT b 2462MHz Ant A Ref

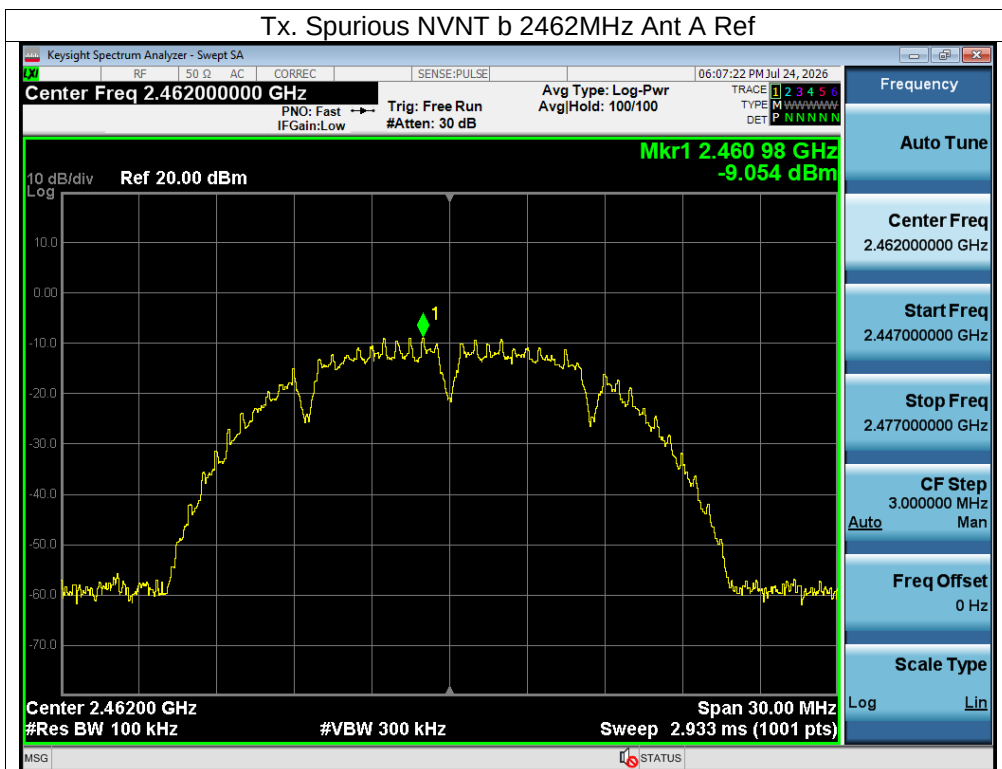


Tx. Spurious NVNT b 2462MHz Ant A Emission

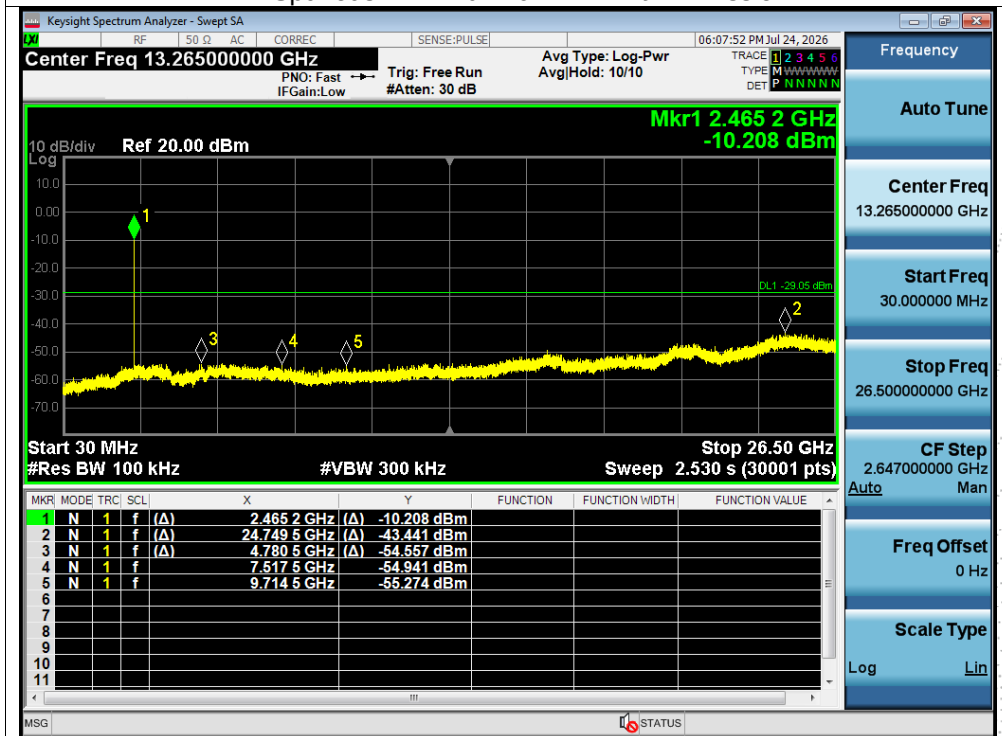




BCTC CO., LTD


Tx. Spurious NVNT g 2437MHz Ant A Ref

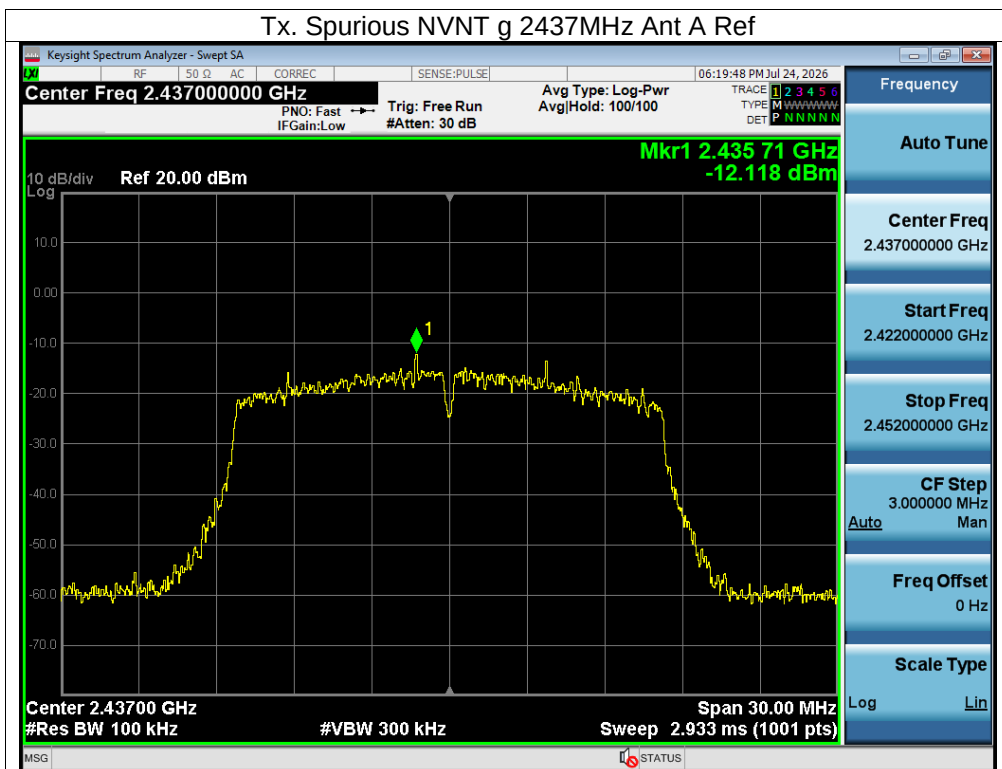


Tx. Spurious NVNT g 2437MHz Ant A Emission


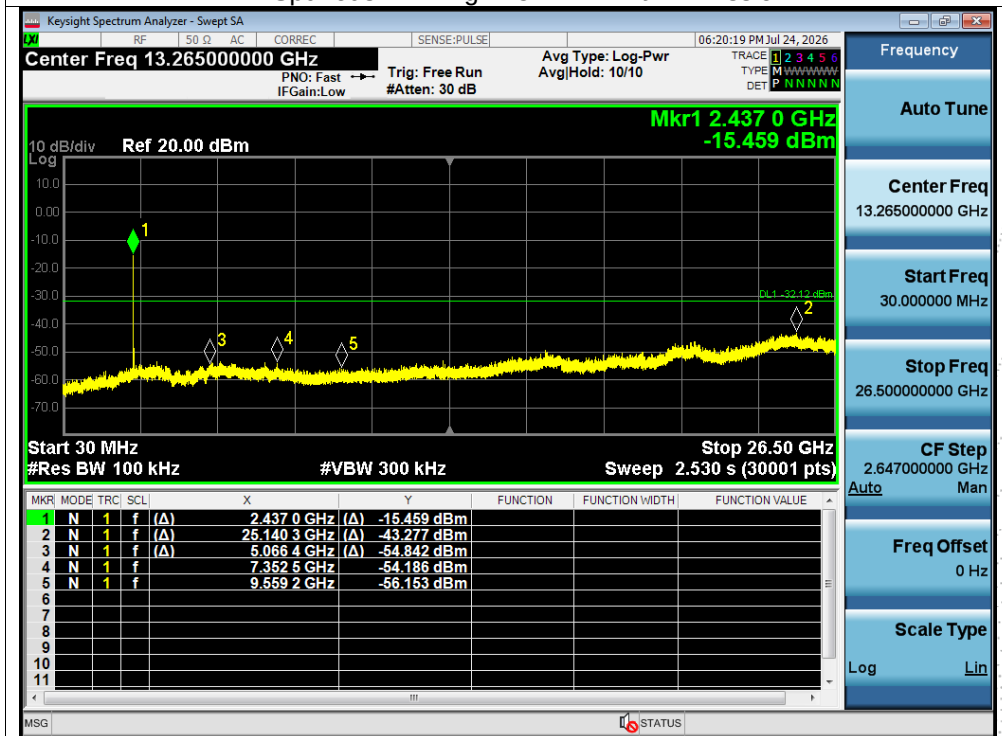




Tx. Spurious NVNT g 2462MHz Ant A Ref


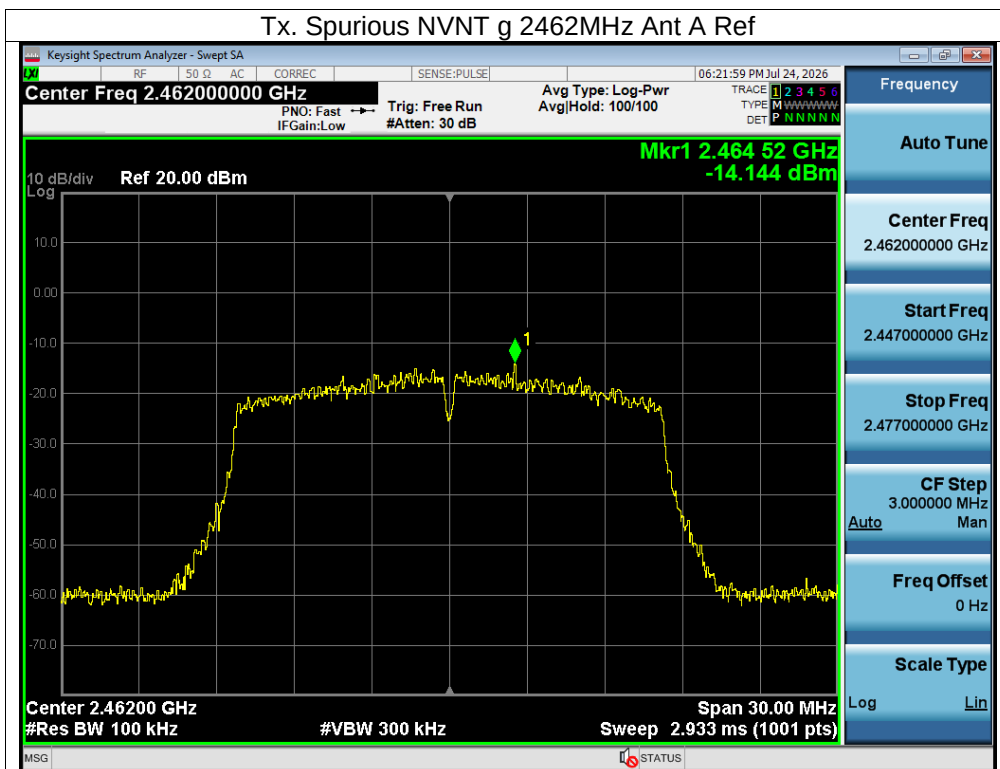




Tx. Spurious NVNT g 2462MHz Ant A Emission

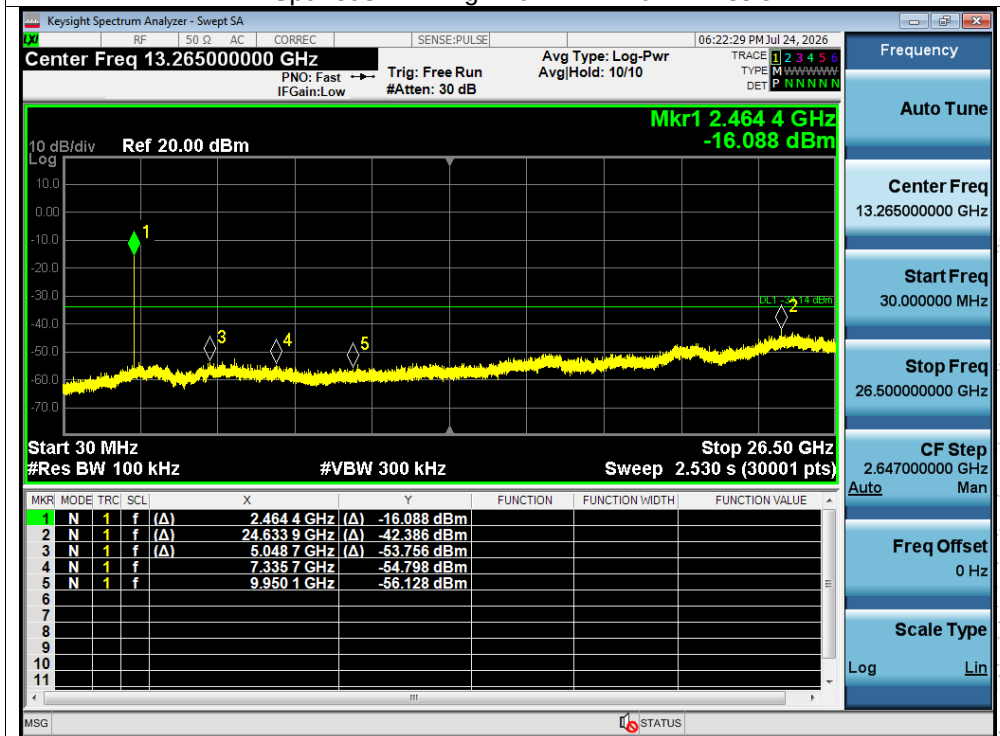

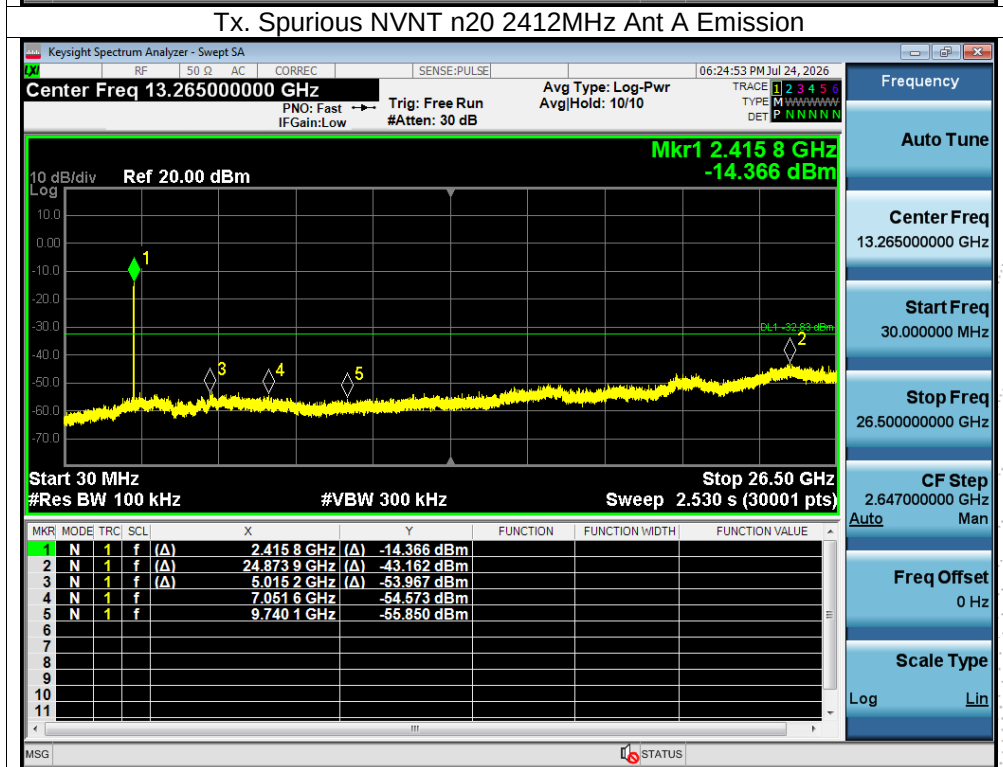
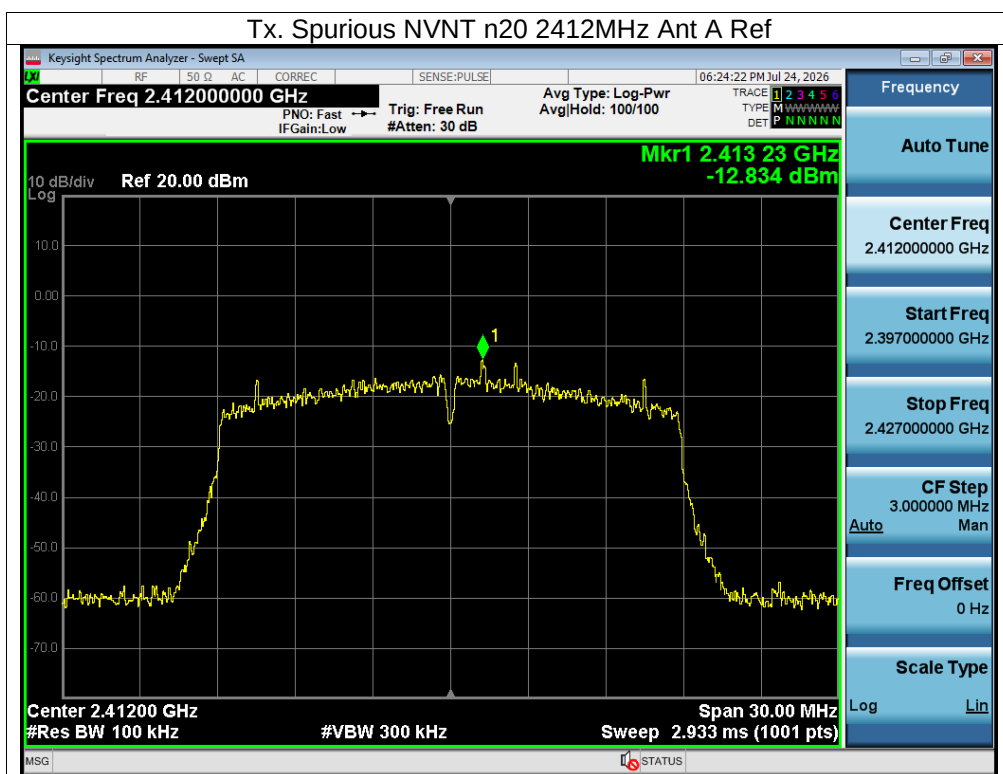


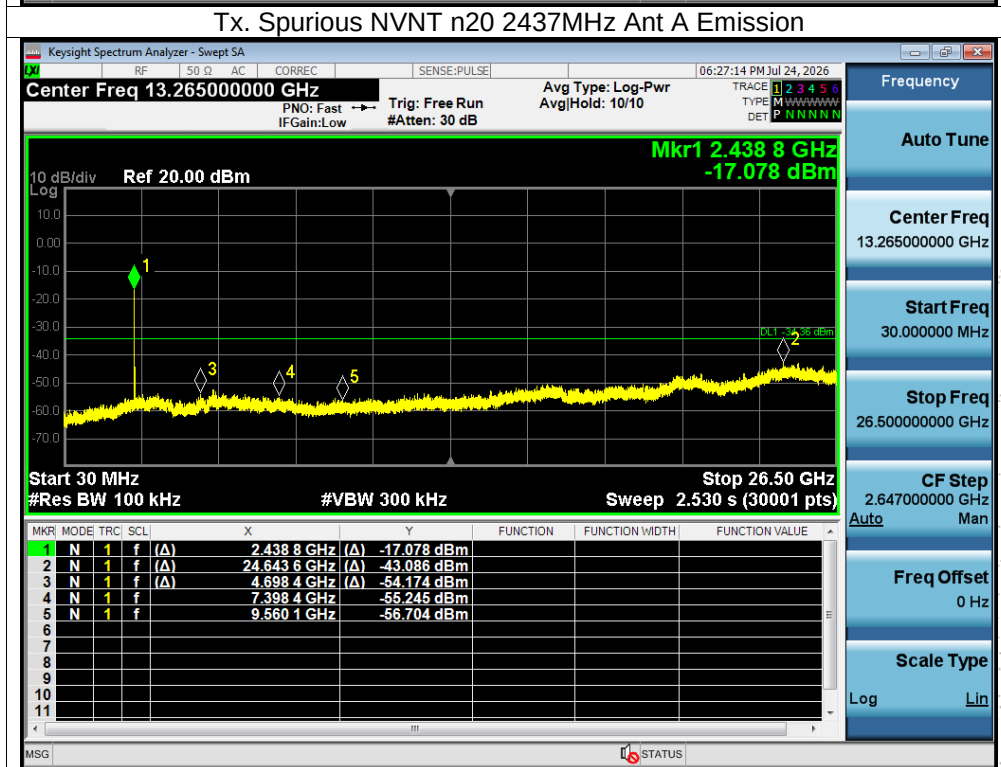
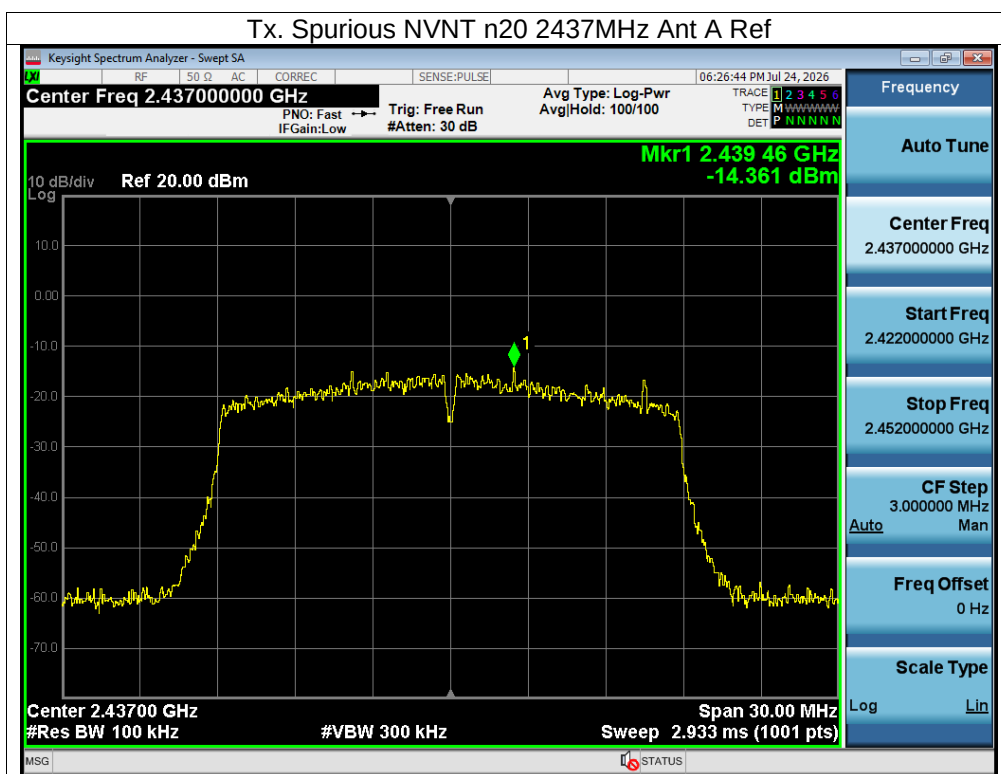


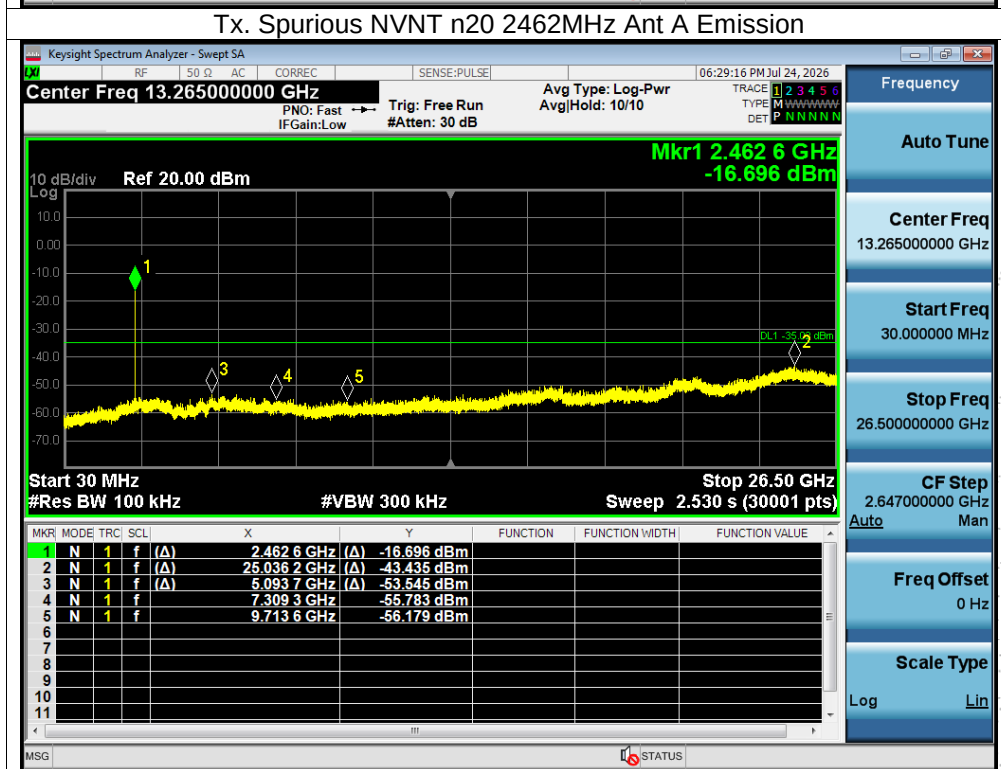
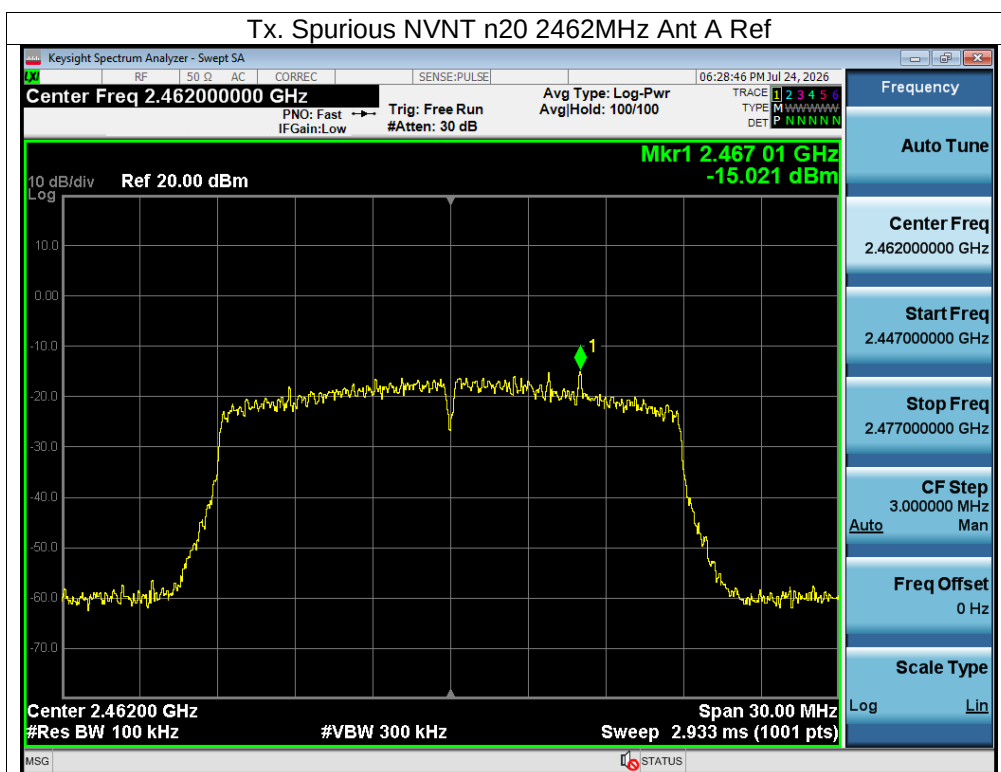


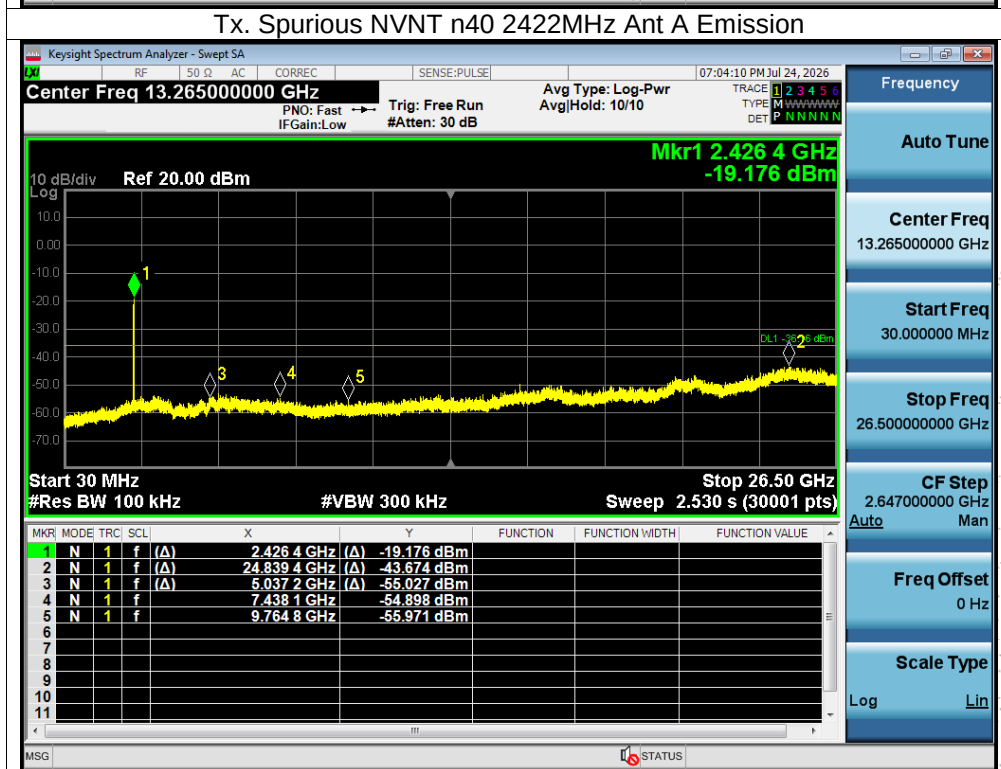
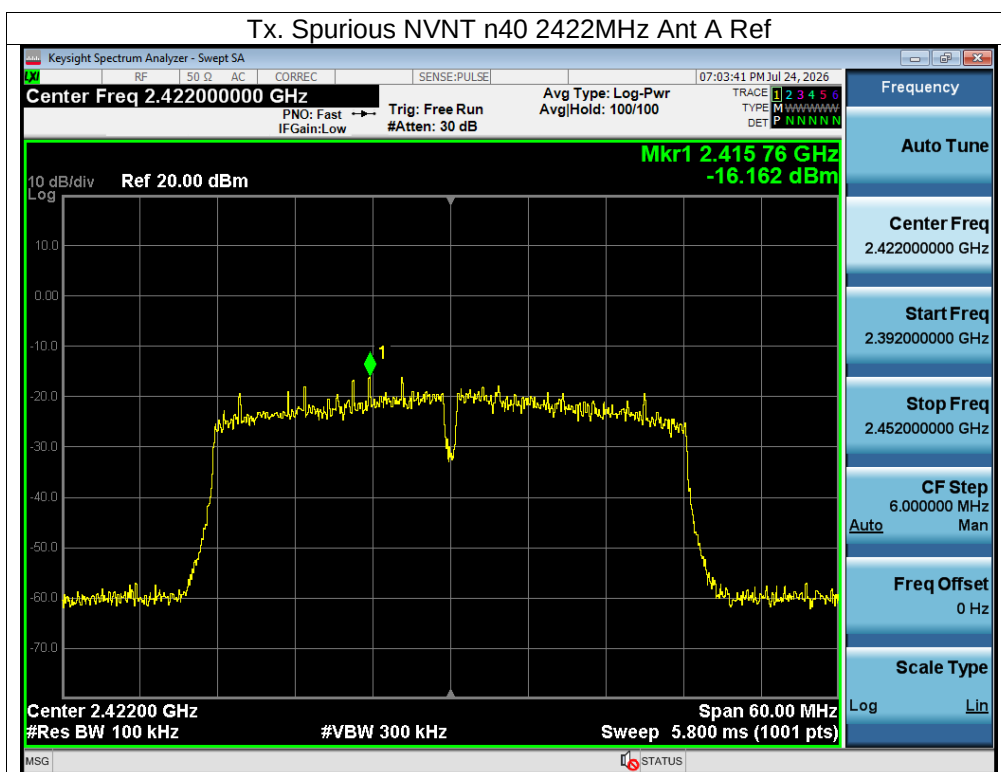




CO., LTD

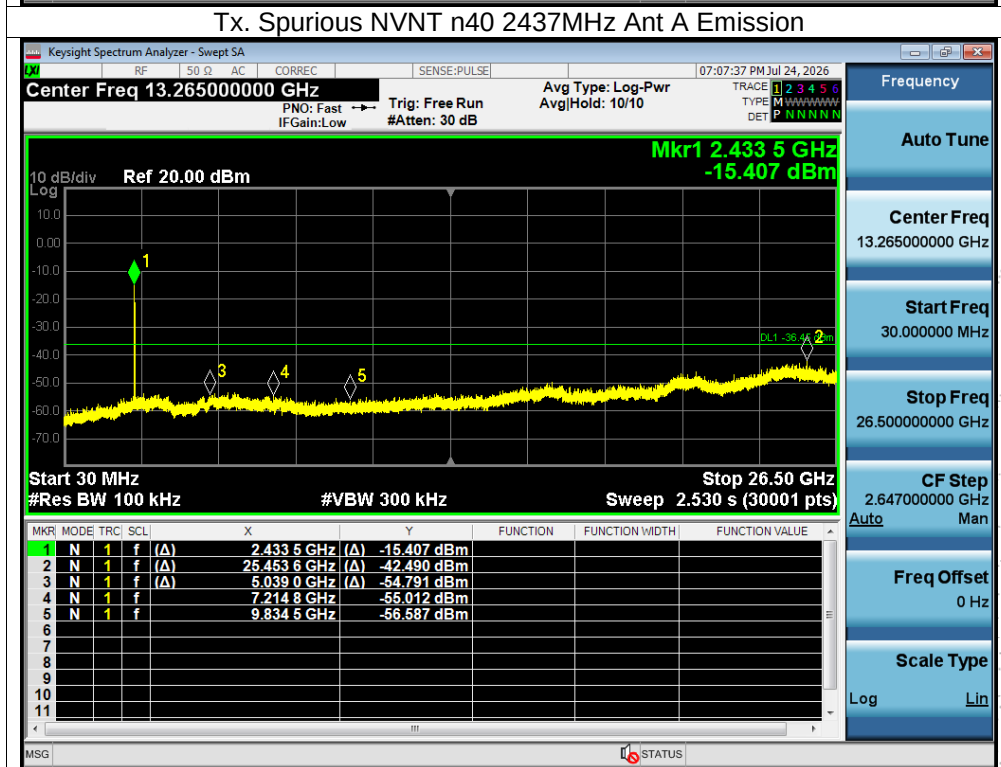
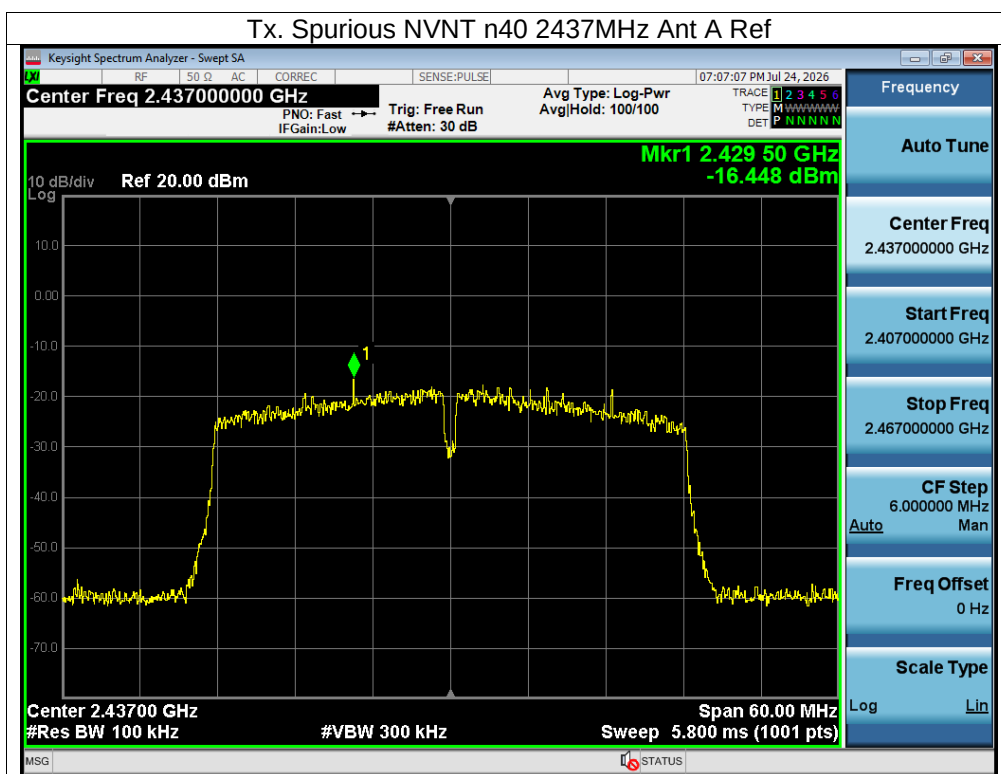


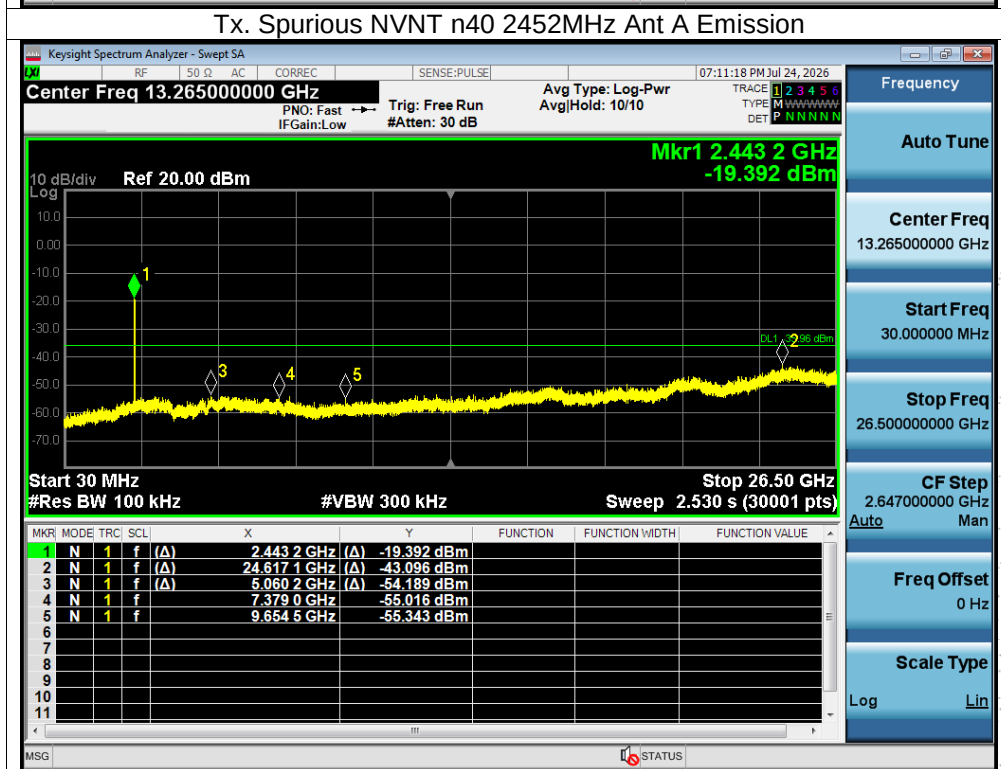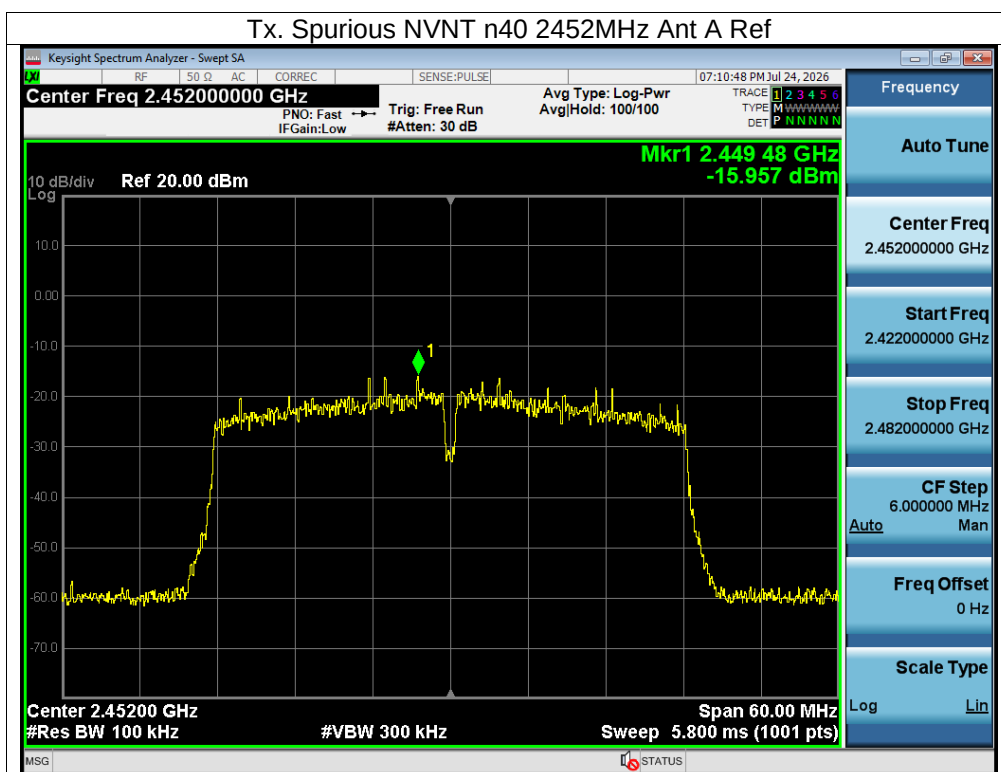

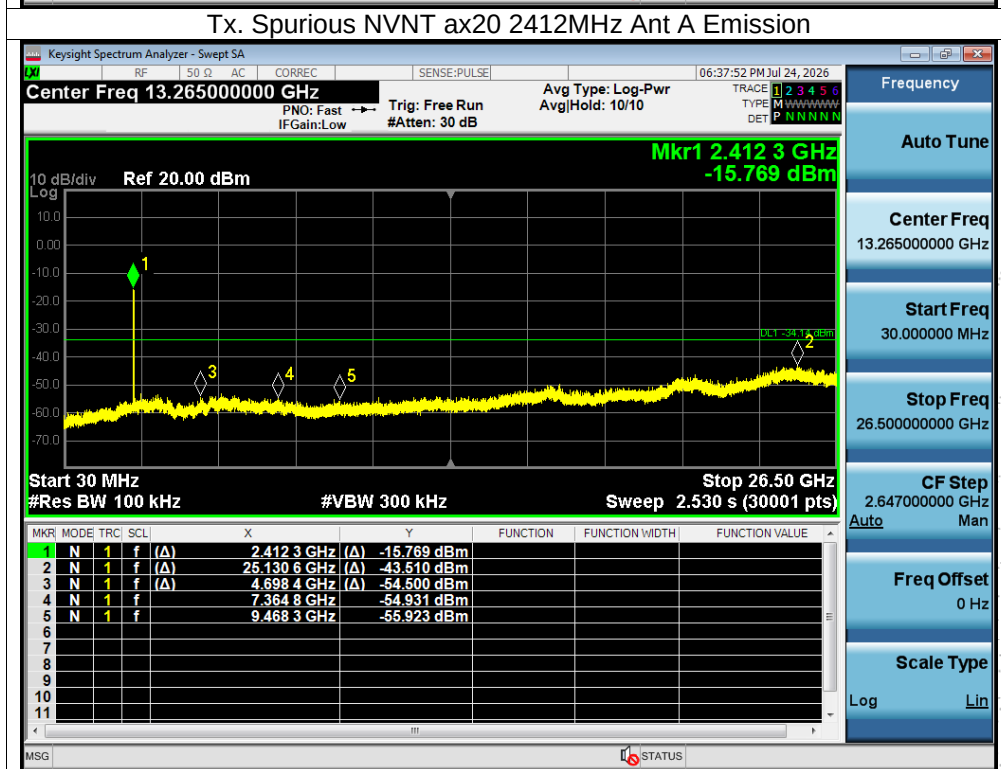
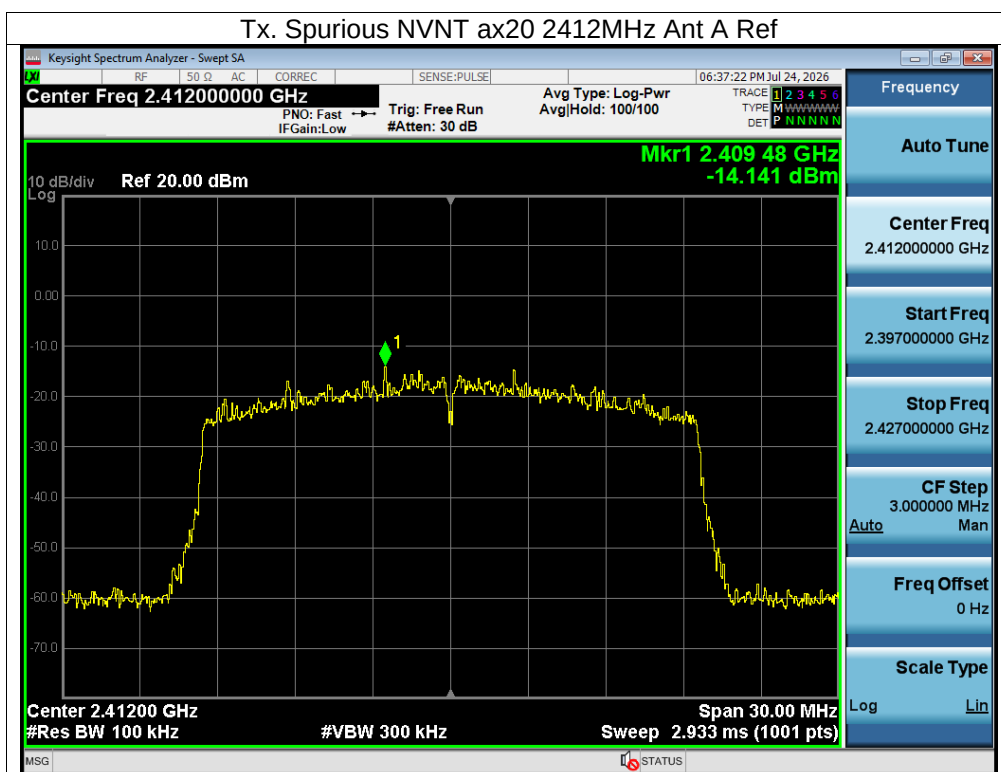


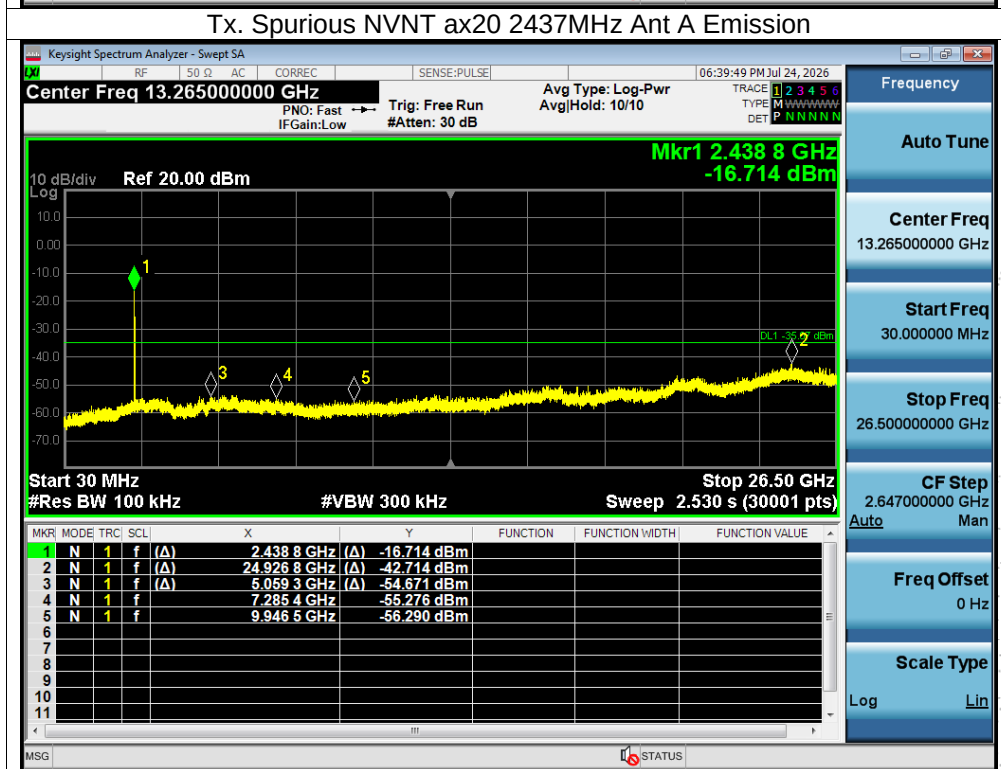
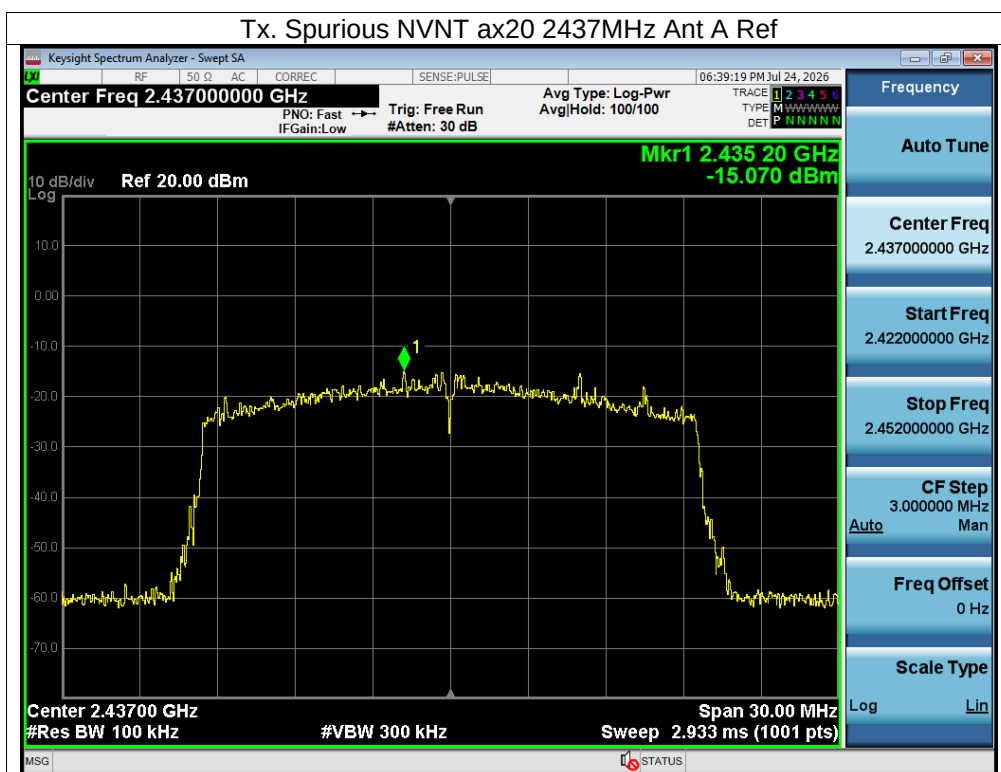


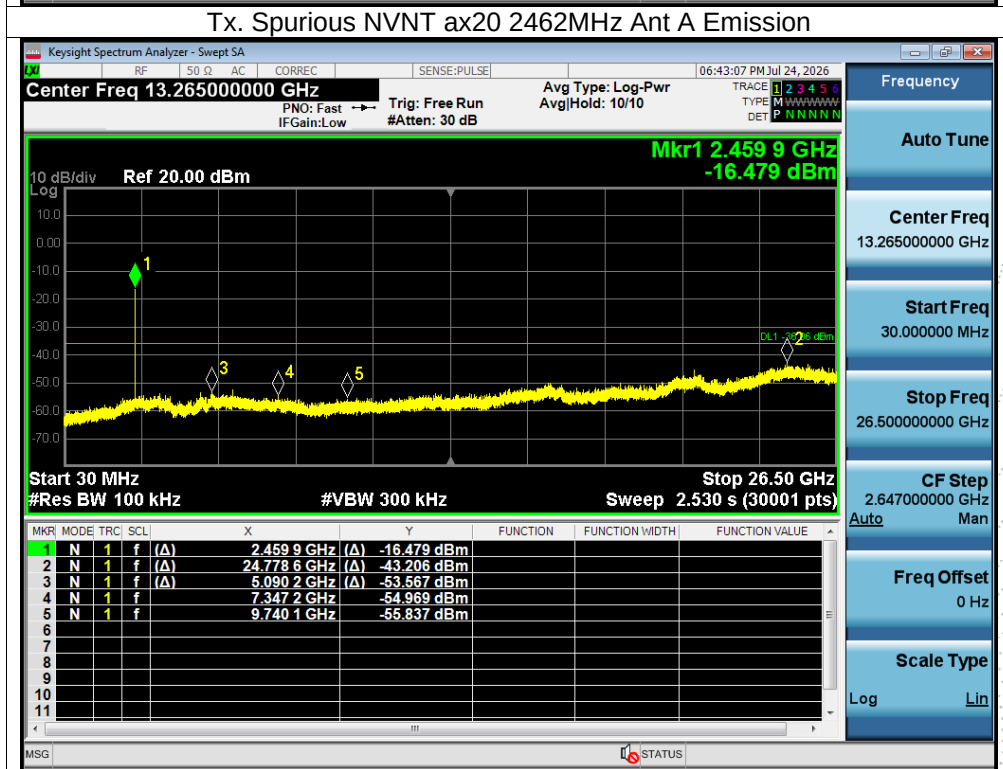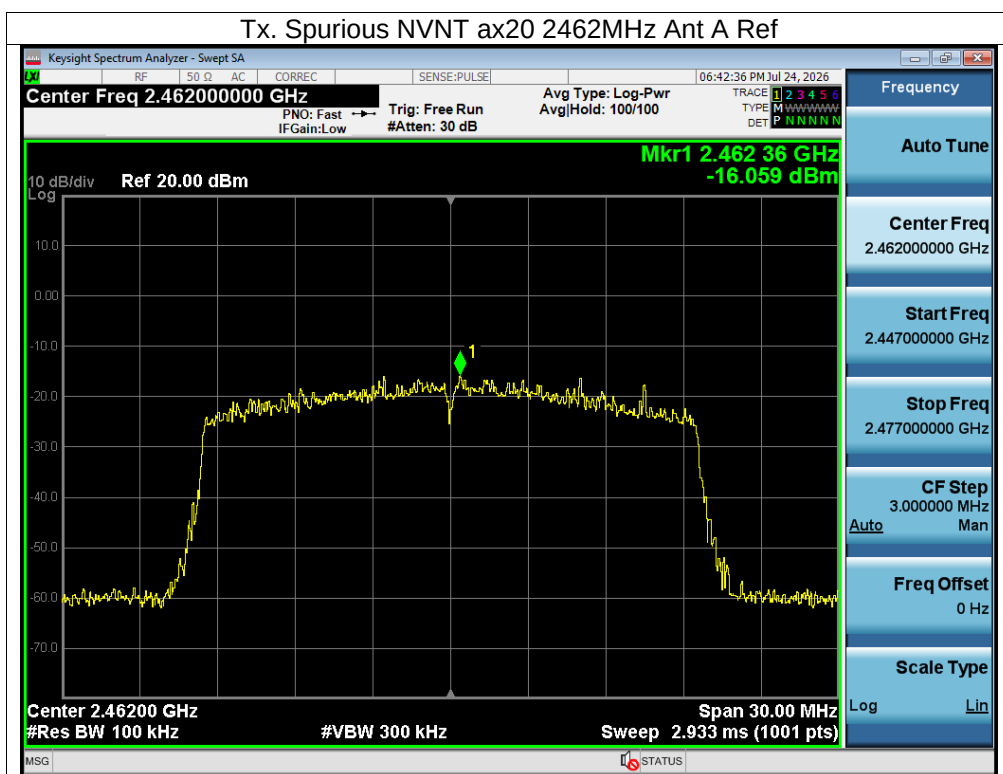

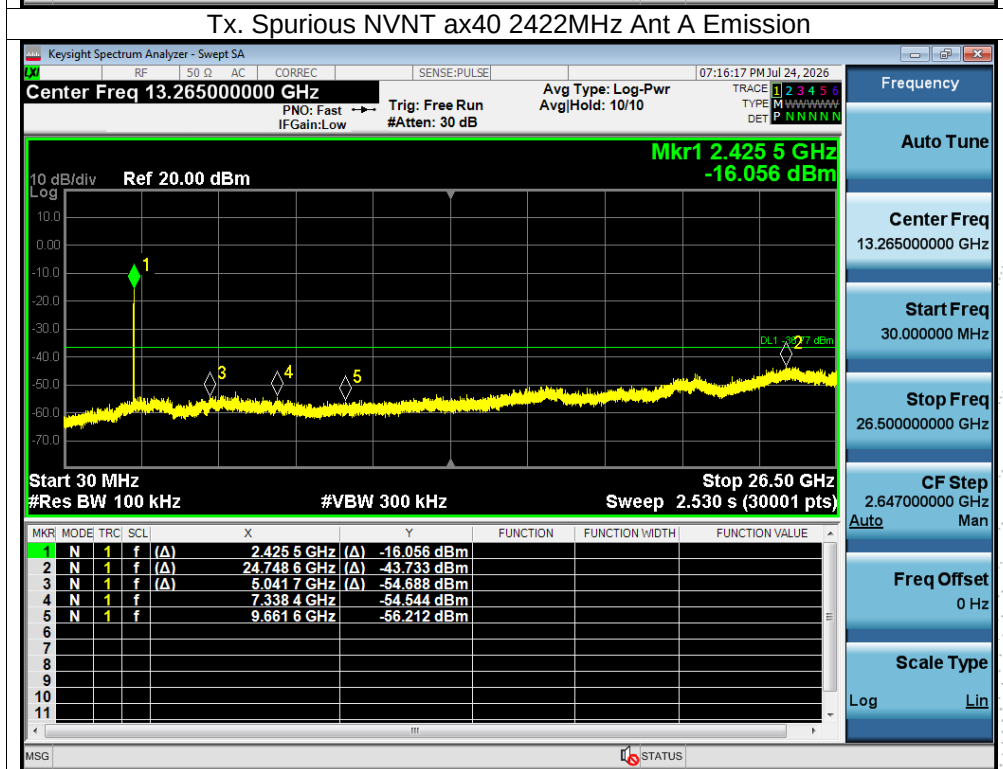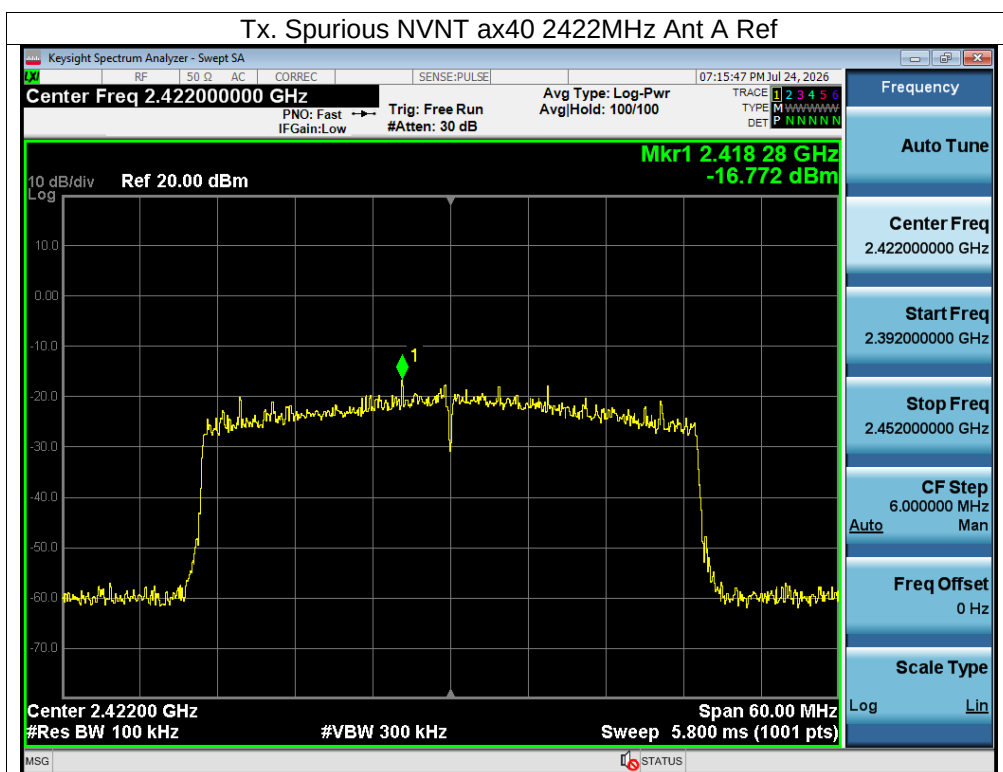

CO., LTD

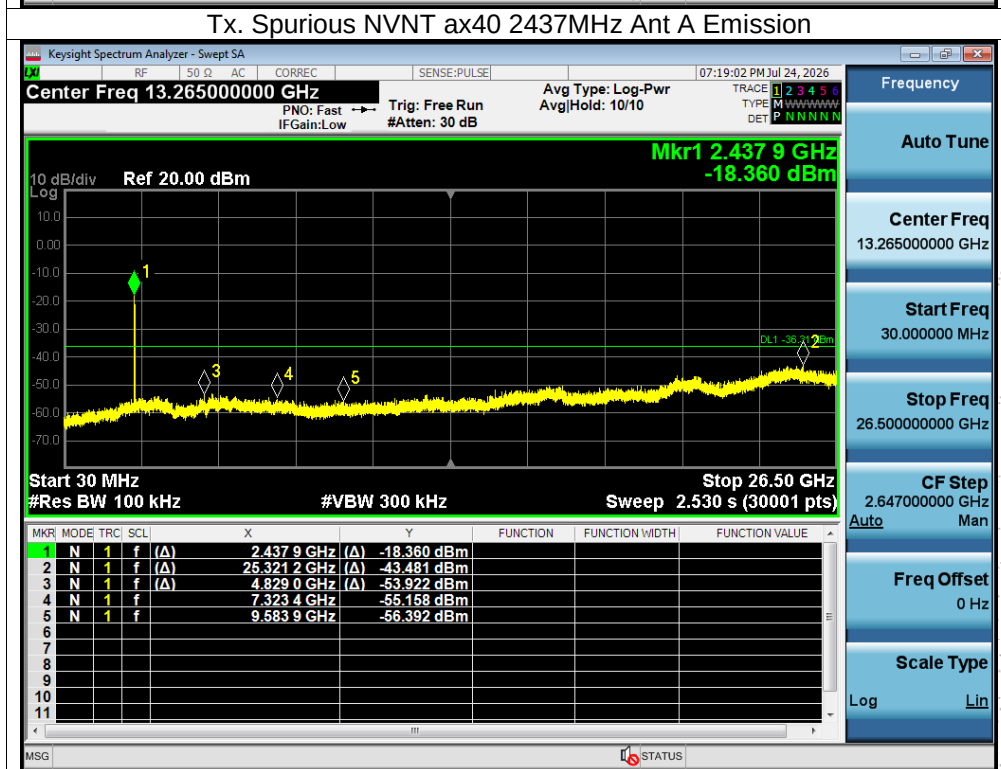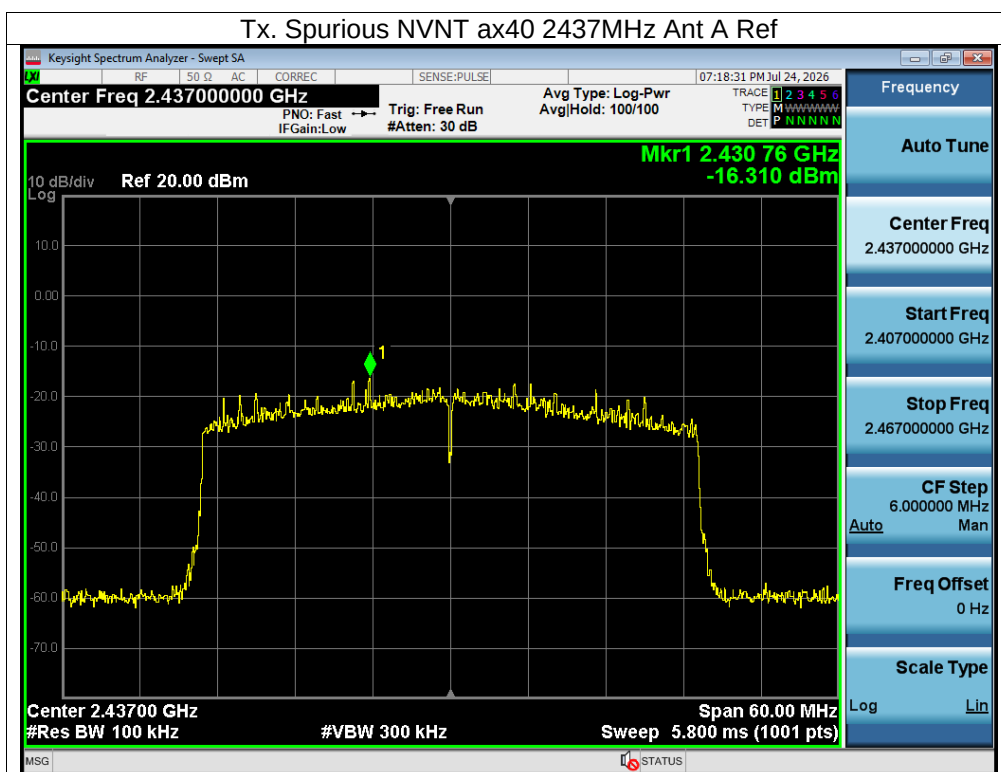

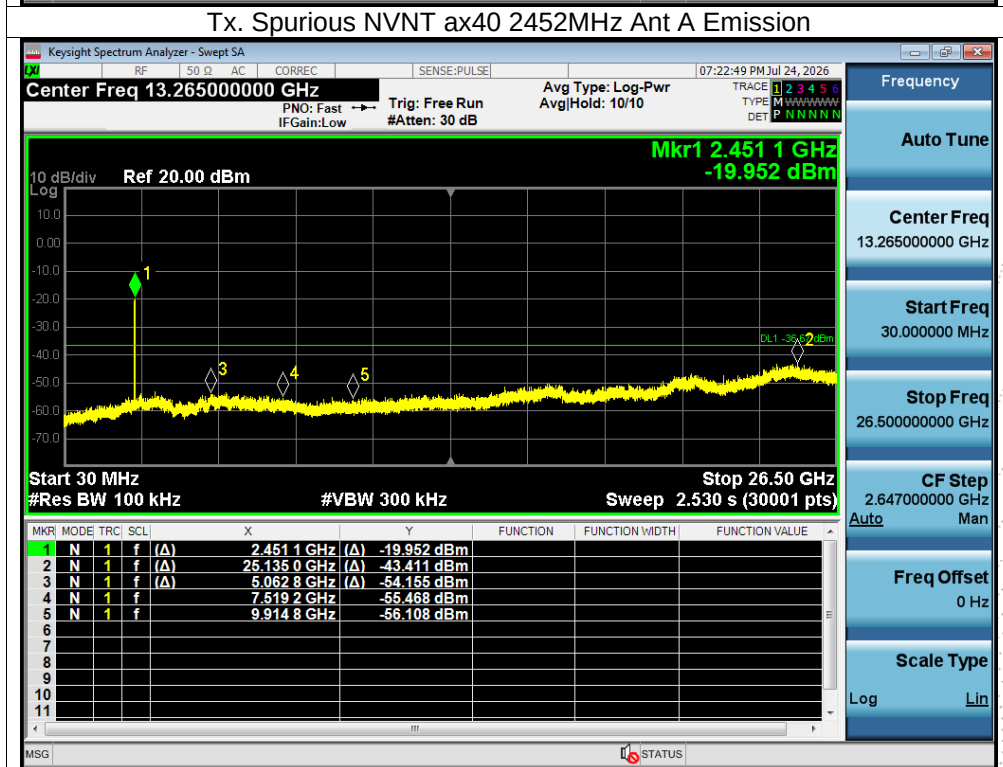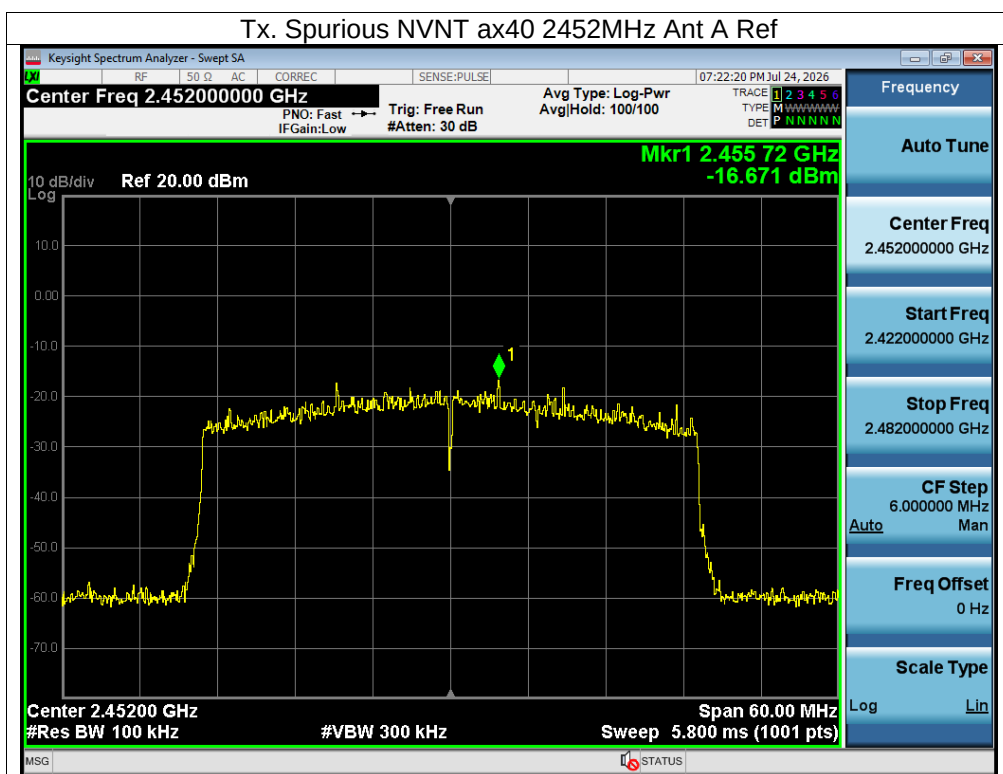



Ant B

