

---

# Product Specifications Sheet

customer name : \_\_\_\_\_

Customer Part Number: \_\_\_\_\_

Product Name: 433 Remote Control \_\_\_\_\_

Product Model: JR-B26-RF-6666 \_\_\_\_\_

---

Please confirm and then send back; thank you!

---

## Remote Control Overview

### I. External dimensions:

1.1 130 mm (length) × 39 mm (width) × 16 mm (thickness)

### II. Material:

2.1 Face sheet: 0.125 mm PET material

2.2 Enclosure: Made of 475 material, black

2.3 Battery: AA battery; Voltage: 3V; Capacity: 160 mAh

### 三. Control angle:

3.1 Effective emission angle: Through-wall

3.2 Control distance:

4.1 Effective range: ≥12 m

四. Button lifespan: ≥20,000 cycles

## Remote Control Technical Specifications and

### Standards


| test item         | unit | test condition        | least value | standard value | crest value |
|-------------------|------|-----------------------|-------------|----------------|-------------|
| quiescent current | uA   | No key pressed        |             | 2              | 5           |
| Operating current | mA   | When a key is pressed |             | 12             | 20          |
| launch range      | M    |                       | 12          |                |             |
|                   |      |                       |             |                |             |
| working voltage   | V    |                       | 2.2         | 3              | 3.5         |
| service frequency | MHz  | customizable          | 433.82      | 433.92         | 434.02      |

|                         |     |  |     |    |    |
|-------------------------|-----|--|-----|----|----|
| Number of function keys |     |  | 1   | 16 | 21 |
| ambient temperature     | °C  |  | -10 | 25 | 40 |
| relative humidity       | °C% |  |     | 40 | 90 |

### Remote control-related drawings

|                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                |                       |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--|--|-----------------|--|--|----|--|----|--|----|--|----|----|----|--|----|--|----|--|----|--|----|--|----|--|----|
| Remote control renderings                                                          | subscriber number    :                                                                                                                                                                                                                                                                                                                                                                                         |                       |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
|  | Key codes: <table><tr><td colspan="3">Model: JR-B26-RF-6666</td></tr><tr><td colspan="3">Fixed Code:6666</td></tr><tr><td>01</td><td></td><td>03</td></tr><tr><td></td><td>09</td><td></td></tr><tr><td>05</td><td>0B</td><td>11</td></tr><tr><td></td><td>07</td><td></td></tr><tr><td>08</td><td></td><td>06</td></tr><tr><td></td><td>0E</td><td></td></tr><tr><td>10</td><td></td><td>12</td></tr></table> | Model: JR-B26-RF-6666 |  |  | Fixed Code:6666 |  |  | 01 |  | 03 |  | 09 |  | 05 | 0B | 11 |  | 07 |  | 08 |  | 06 |  | 0E |  | 10 |  | 12 |
| Model: JR-B26-RF-6666                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                |                       |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
| Fixed Code:6666                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                |                       |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
| 01                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                | 03                    |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
|                                                                                    | 09                                                                                                                                                                                                                                                                                                                                                                                                             |                       |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
| 05                                                                                 | 0B                                                                                                                                                                                                                                                                                                                                                                                                             | 11                    |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
|                                                                                    | 07                                                                                                                                                                                                                                                                                                                                                                                                             |                       |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
| 08                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                | 06                    |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
|                                                                                    | 0E                                                                                                                                                                                                                                                                                                                                                                                                             |                       |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |
| 10                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                | 12                    |  |  |                 |  |  |    |  |    |  |    |  |    |    |    |  |    |  |    |  |    |  |    |  |    |  |    |

Frequency: 433.92MHz  
Antenna Gain: 0dBi

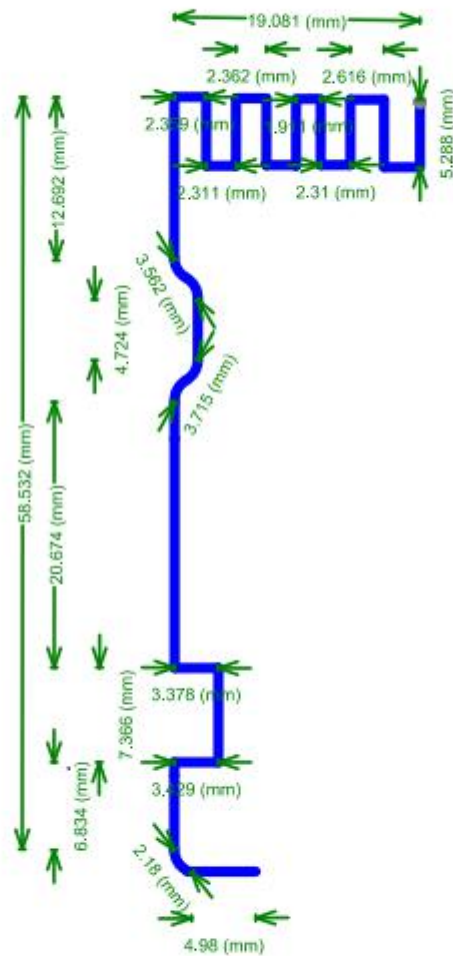

线宽0.8mm

Manufacturer Foshan Jierui Electronic Technology Co., Ltd.

Address: 3rd Floor, No.49 Wenjiao Road, Nanhai District, Foshan City

We, Zhongshan Dishun Electrical Technology Co.,Ltd., states that All measurements were performed radiated and therefore additional antenna gain documentation is not required.