



Table of Contents

1. -26dB and 99% Emission Bandwidth	2
2. Duty Cycle.....	37
3. Maximum Conducted Output Power	55
4. Power Spectral Density	56
5. Frequency Stability	74


1. -26dB and 99% Emission Bandwidth

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5500.00	18.83	16.35
NVNT	ANT1	802.11a	5600.00	18.33	16.30
NVNT	ANT1	802.11a	5700.00	19.25	16.33
NVNT	ANT1	802.11n(HT20)	5500.00	19.54	17.52
NVNT	ANT1	802.11n(HT20)	5600.00	19.43	17.51
NVNT	ANT1	802.11n(HT20)	5700.00	19.44	17.52
NVNT	ANT1	802.11ac(VHT20)	5500.00	20.11	17.53
NVNT	ANT1	802.11ac(VHT20)	5600.00	19.45	17.50
NVNT	ANT1	802.11ac(VHT20)	5700.00	19.44	17.51
NVNT	ANT1	802.11n(HT40)	5510.00	41.40	36.13
NVNT	ANT1	802.11n(HT40)	5590.00	41.08	36.05
NVNT	ANT1	802.11n(HT40)	5670.00	41.18	36.05
NVNT	ANT1	802.11ac(VHT40)	5510.00	41.85	36.12
NVNT	ANT1	802.11ac(VHT40)	5590.00	40.77	36.00
NVNT	ANT1	802.11ac(VHT40)	5670.00	41.62	36.09
NVNT	ANT1	802.11ac(VHT80)	5530.00	81.53	74.83
NVNT	ANT1	802.11ac(VHT80)	5610.00	81.67	74.94
NVNT	ANT2	802.11a	5500.00	18.41	16.31
NVNT	ANT2	802.11a	5600.00	18.35	16.30
NVNT	ANT2	802.11a	5700.00	18.29	16.31
NVNT	ANT2	802.11n(HT20)	5500.00	19.36	17.48
NVNT	ANT2	802.11n(HT20)	5600.00	19.46	17.49
NVNT	ANT2	802.11n(HT20)	5700.00	19.47	17.52
NVNT	ANT2	802.11ac(VHT20)	5500.00	19.34	17.48
NVNT	ANT2	802.11ac(VHT20)	5600.00	19.36	17.49
NVNT	ANT2	802.11ac(VHT20)	5700.00	19.48	17.51
NVNT	ANT2	802.11n(HT40)	5510.00	41.27	36.09
NVNT	ANT2	802.11n(HT40)	5590.00	40.72	36.04
NVNT	ANT2	802.11n(HT40)	5670.00	40.98	36.04
NVNT	ANT2	802.11ac(VHT40)	5510.00	41.19	36.08
NVNT	ANT2	802.11ac(VHT40)	5590.00	40.97	36.06
NVNT	ANT2	802.11ac(VHT40)	5670.00	41.42	36.07
NVNT	ANT2	802.11ac(VHT80)	5530.00	81.69	74.84
NVNT	ANT2	802.11ac(VHT80)	5610.00	81.96	74.79

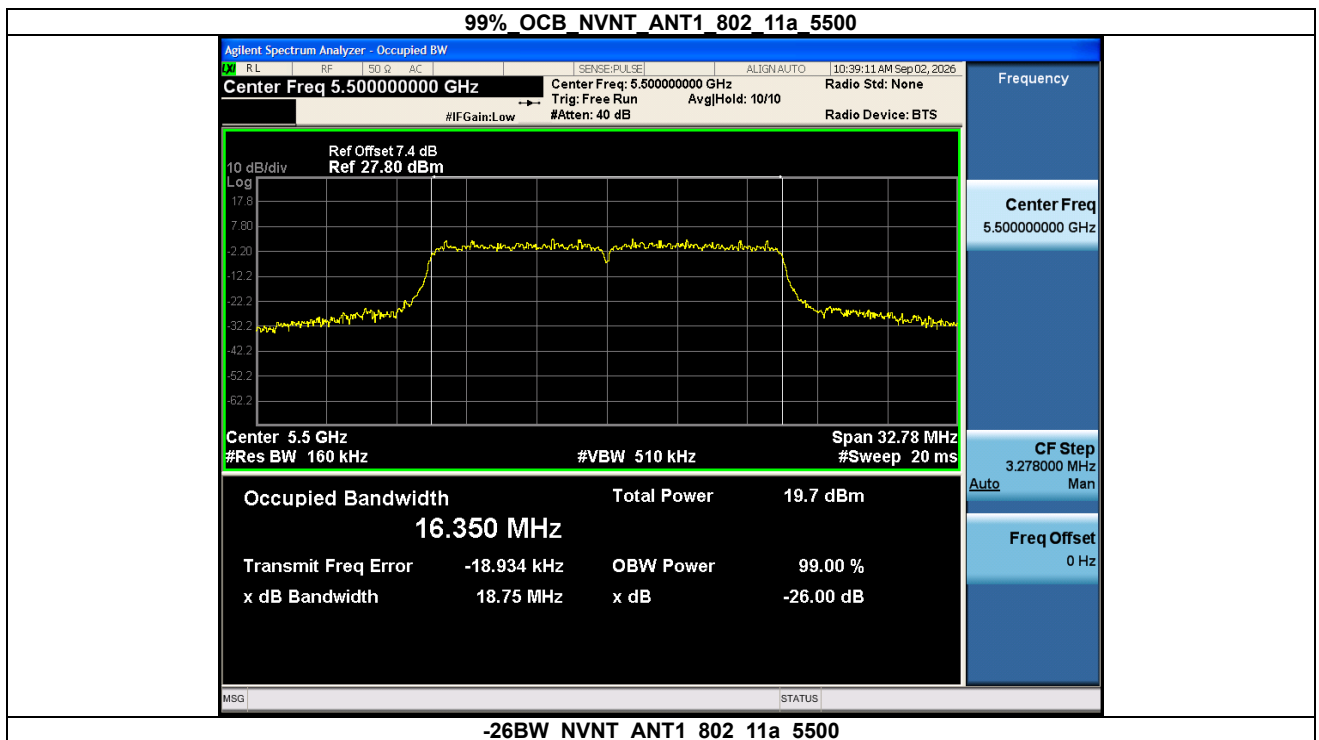


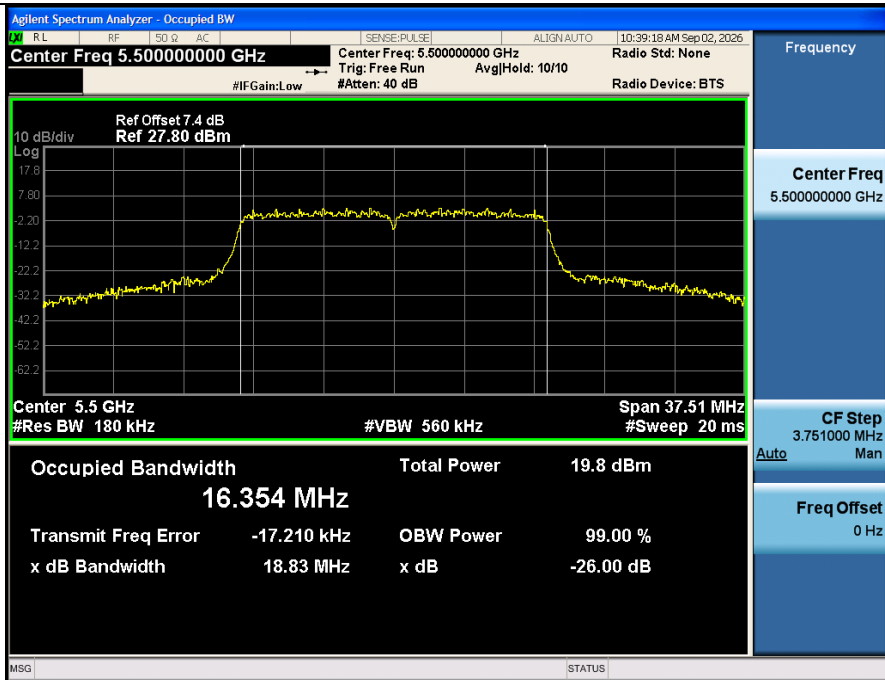


99% OCB NVNT ANT1 802 11a 5600

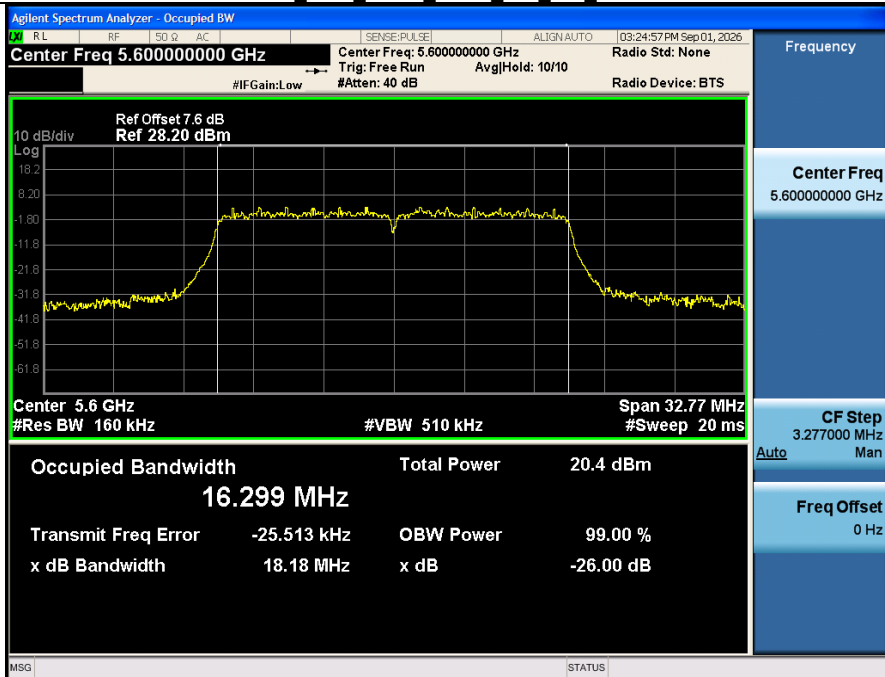


-26BW NVNT ANT1 802 11a 5600

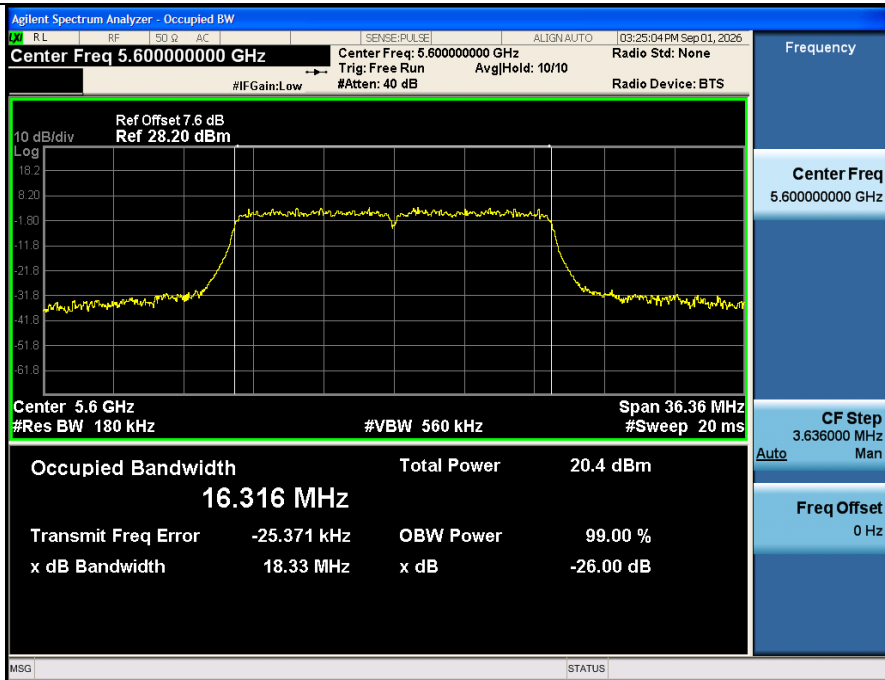


99% OCB NVNT ANT1 802 11a 5700

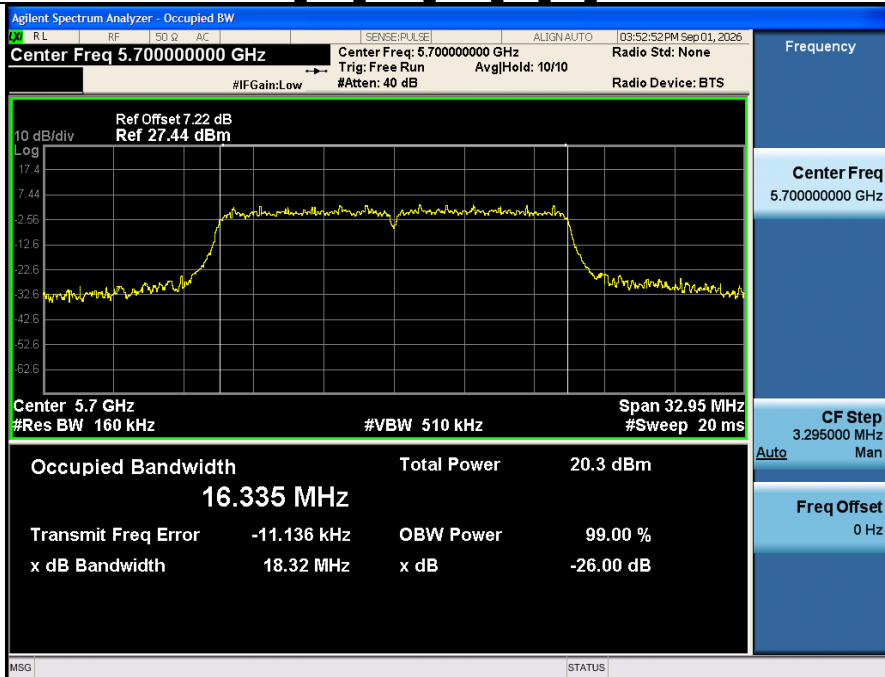


-26BW NVNT ANT1 802 11a 5700

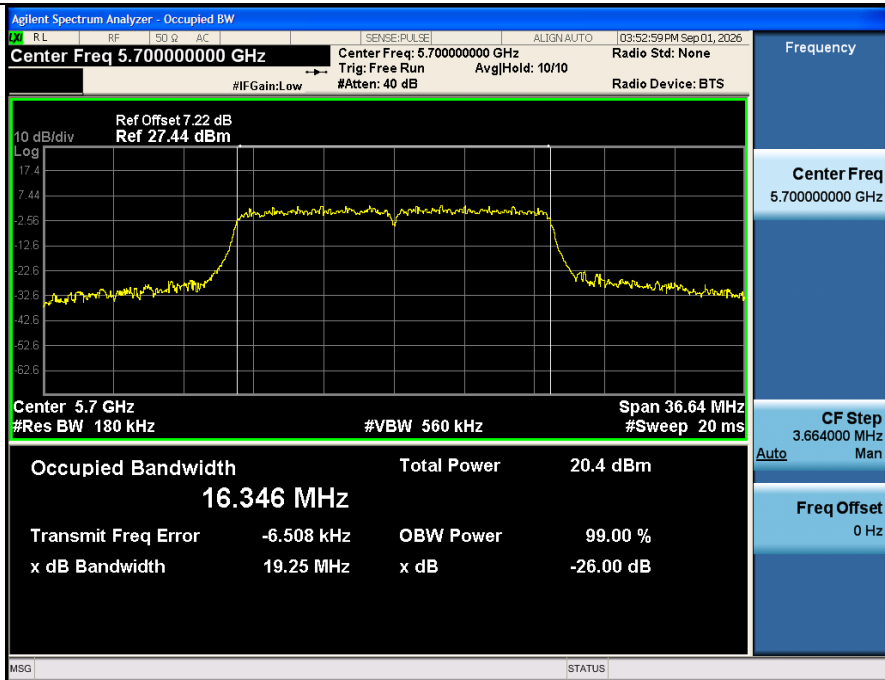


99% OCB NVNT ANT1_802_11n(HT20)_5500

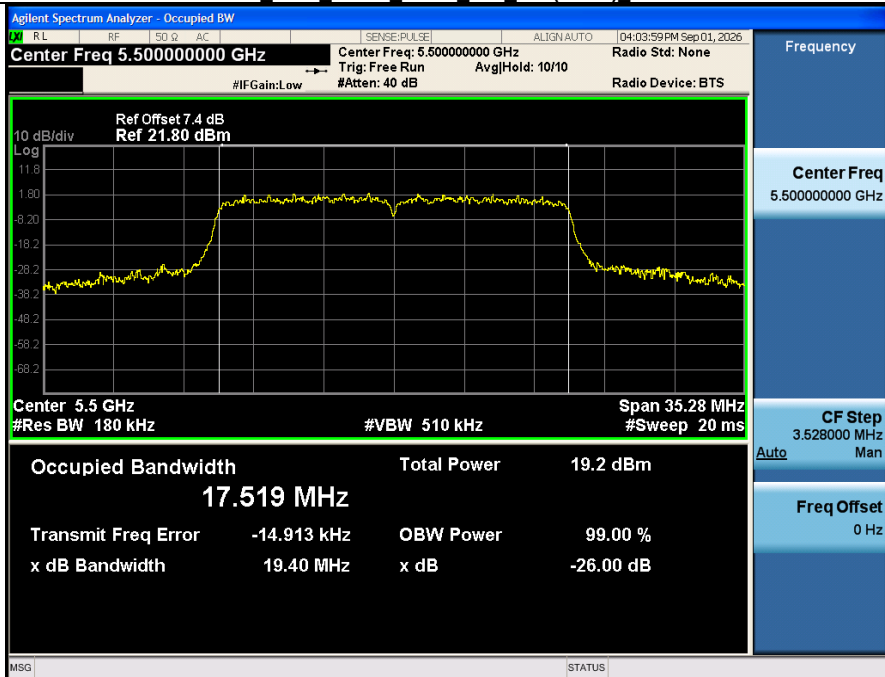


-26BW_NVNT_ANT1_802_11n(HT20)_5500

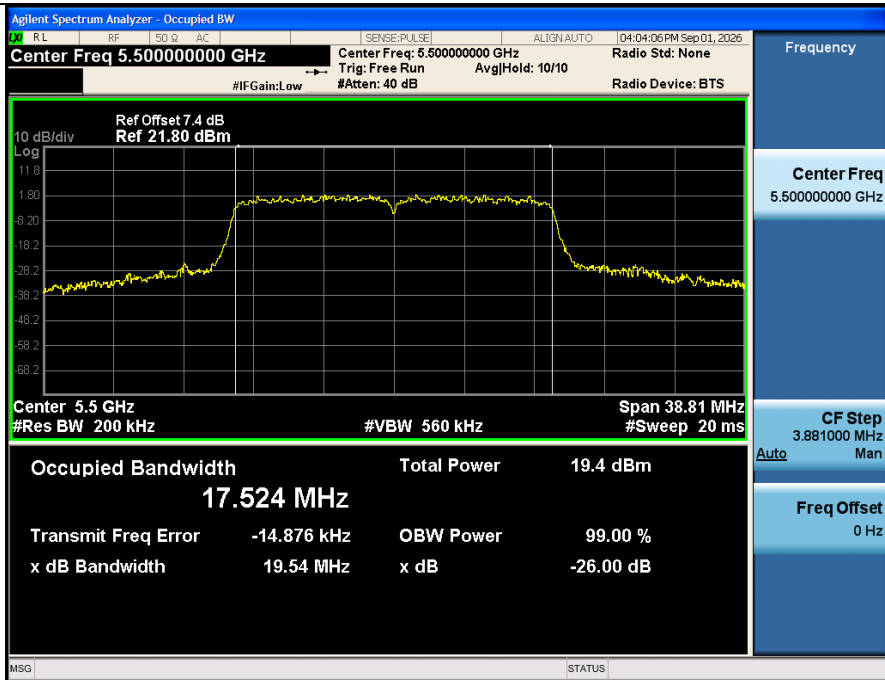


99% OCB NVNT ANT1 802 11n(HT20) 5600

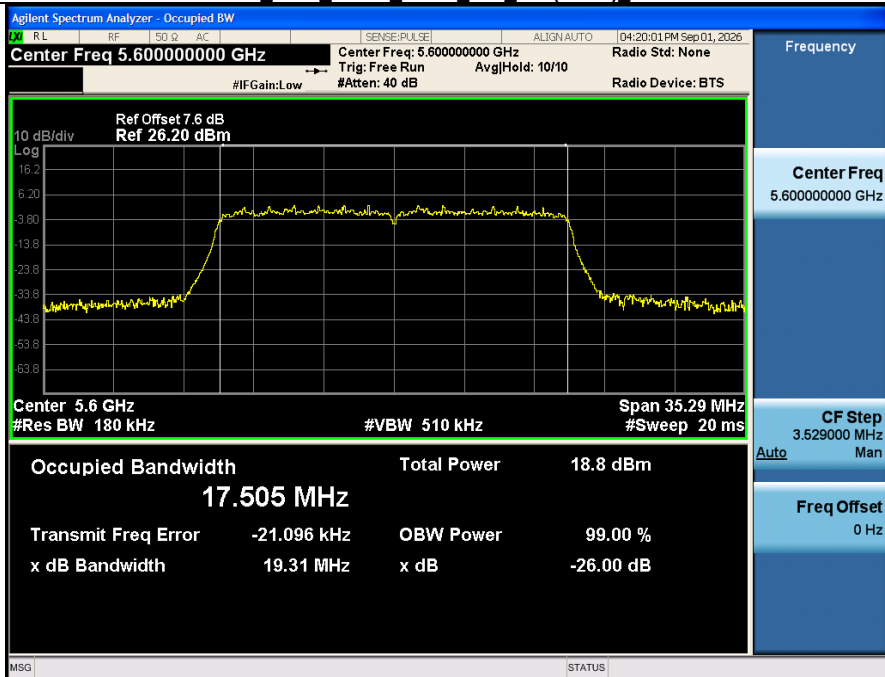


-26BW NVNT ANT1 802 11n(HT20) 5600

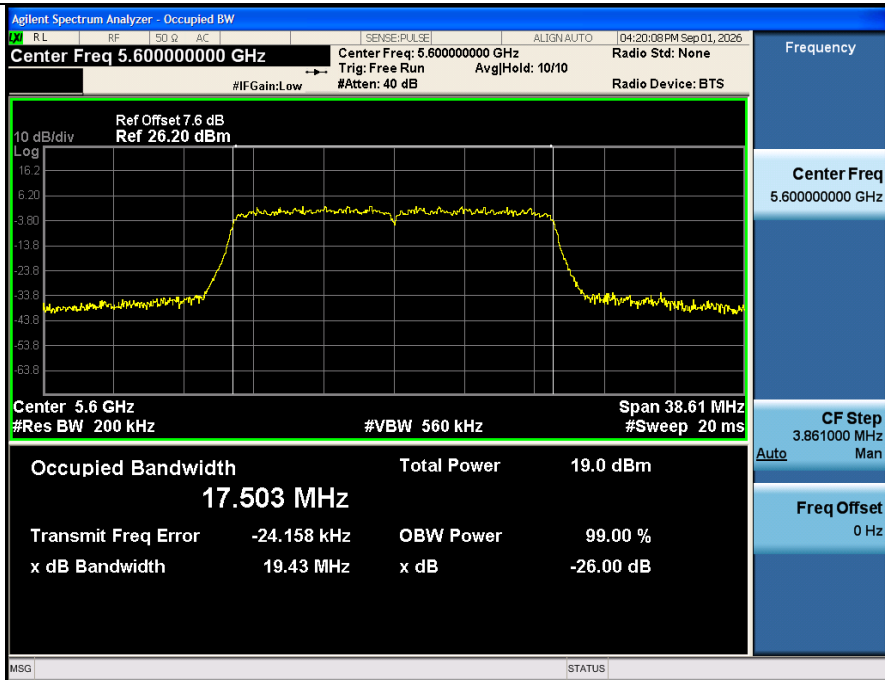


99% OCB NVNT ANT1 802 11n(HT20) 5700

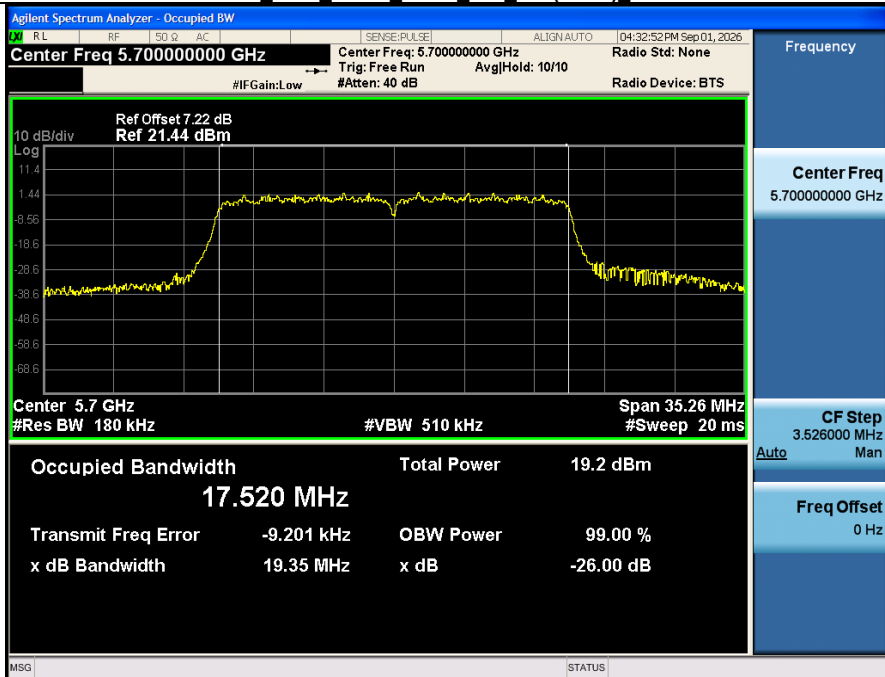


-26BW NVNT ANT1 802 11n(HT20) 5700

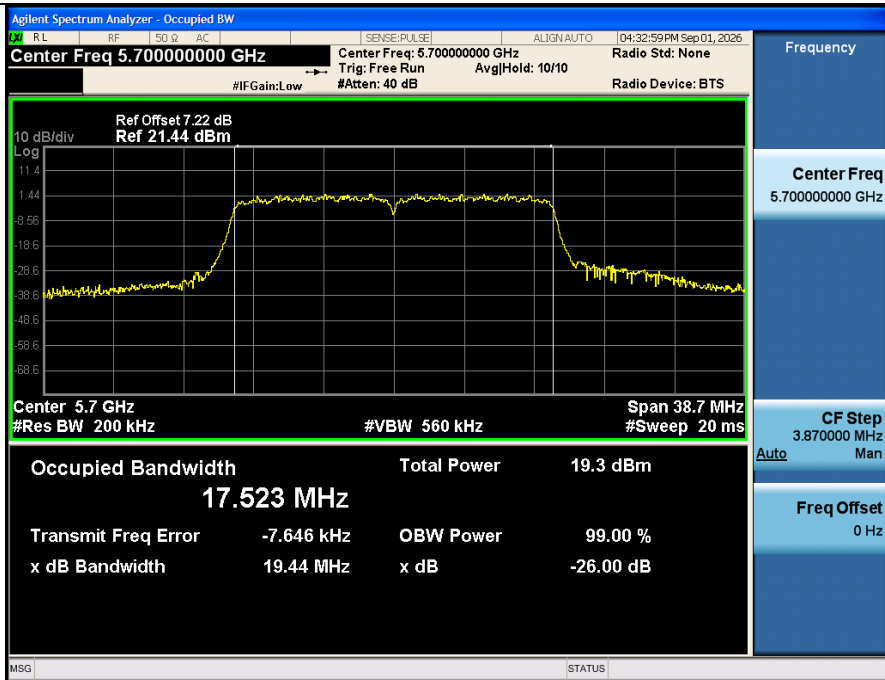


99% OCB NVNT ANT1 802 11ac(VHT20) 5500

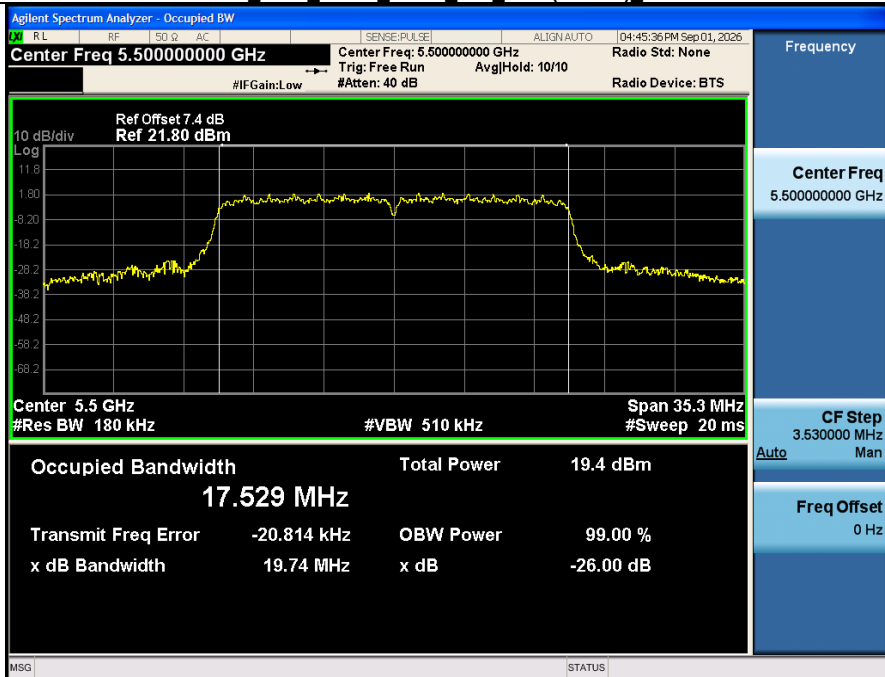


-26BW_NVNT_ANT1_802_11ac(VHT20)_5500

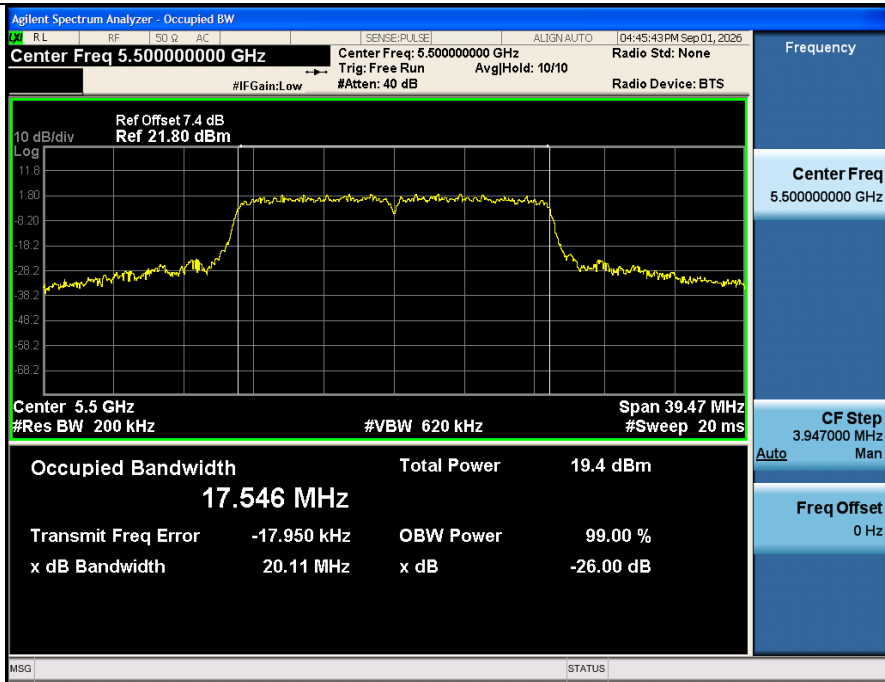


99% OCB NVNT ANT1 802 11ac(VHT20) 5600

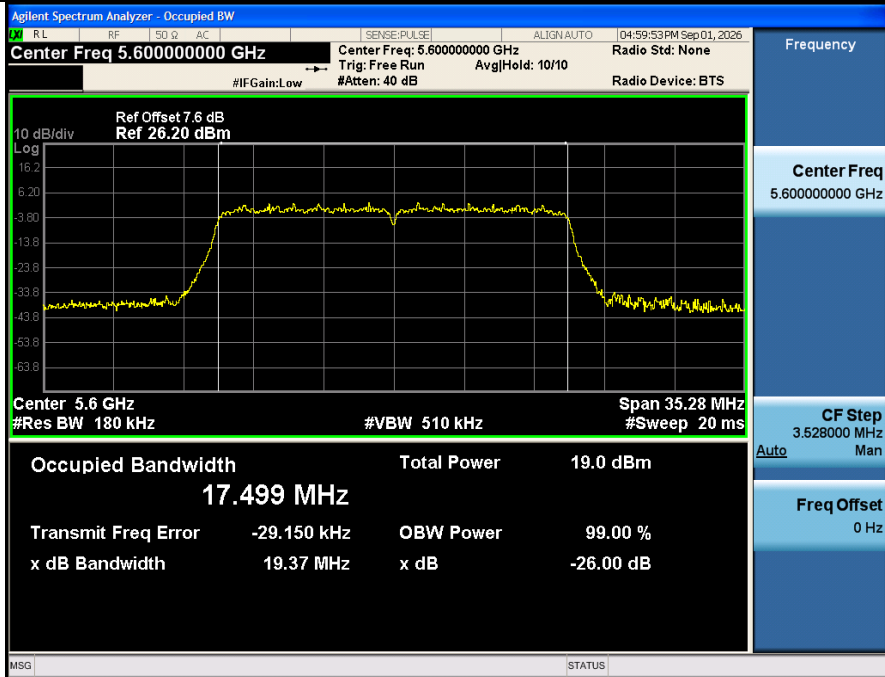


-26BW_NVNT_ANT1_802_11ac(VHT20)_5600

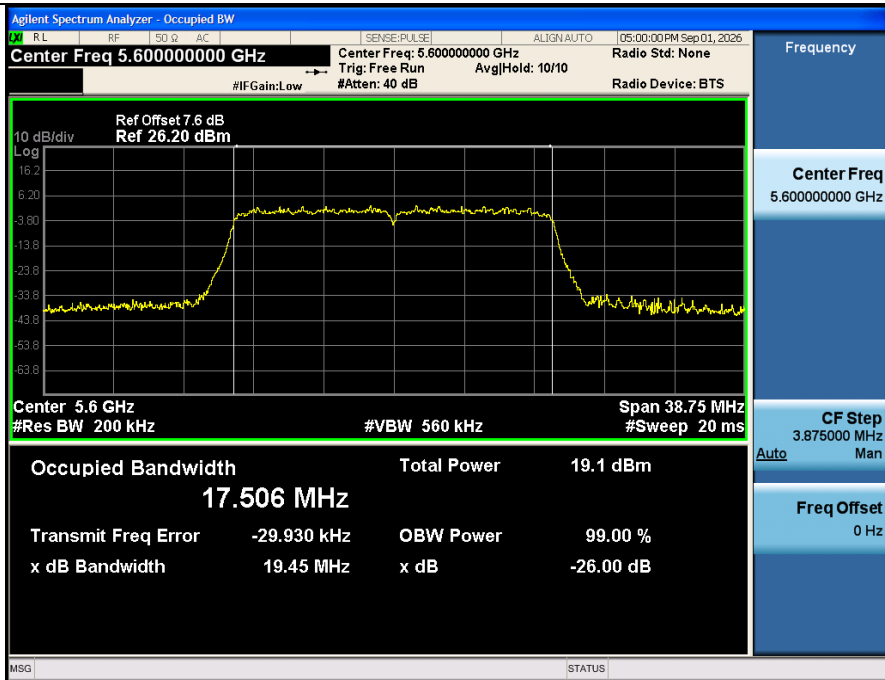


99% OCB NVNT ANT1 802 11ac(VHT20) 5700

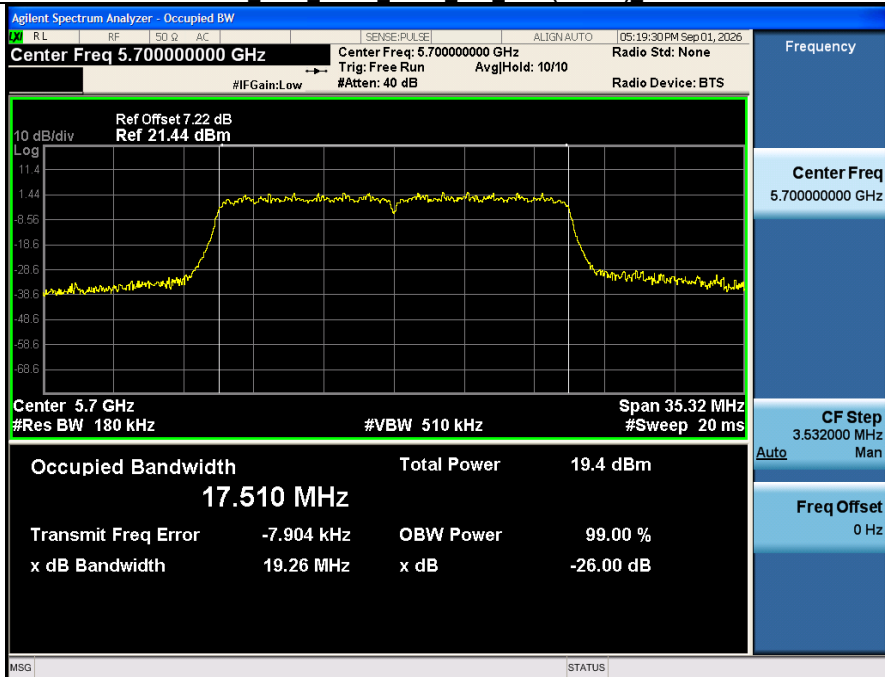


-26BW_NVNT_ANT1_802_11ac(VHT20)_5700

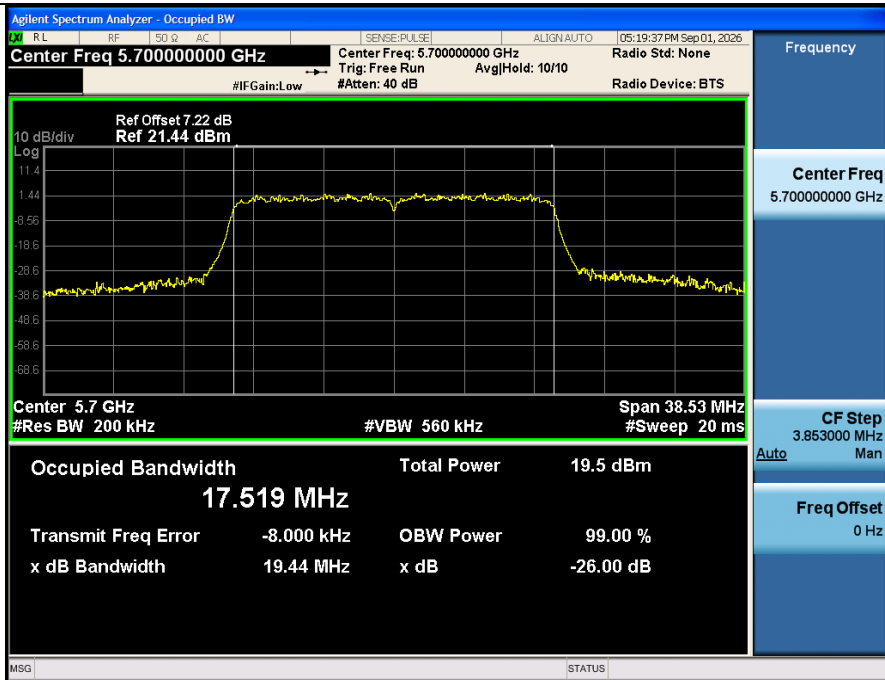


99% OCB NVNT ANT1 802 11n(HT40) 5510

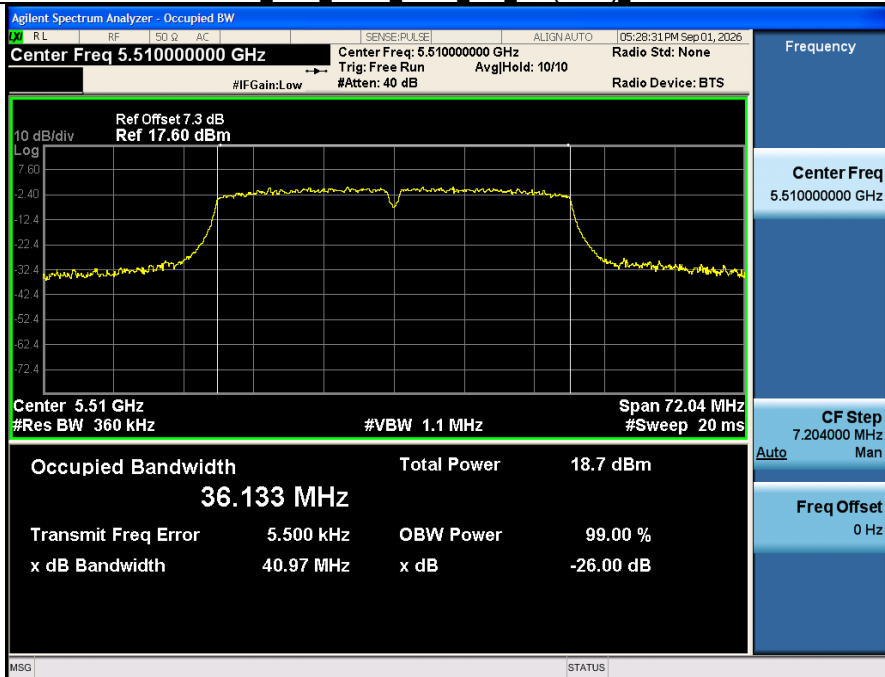


-26BW NVNT ANT1 802 11n(HT40) 5510

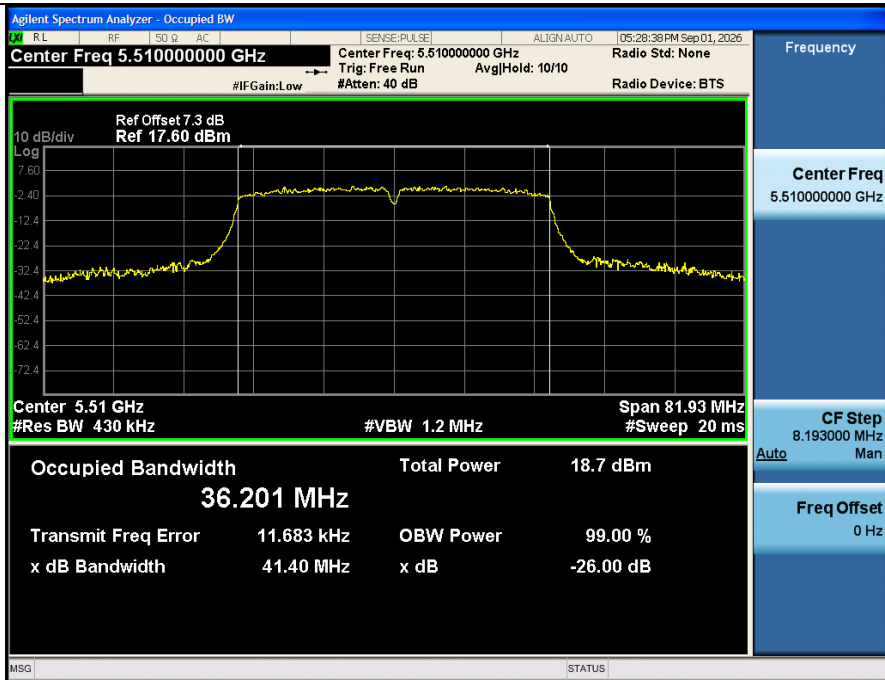


99% OCB NVNT ANT1 802 11n(HT40) 5590

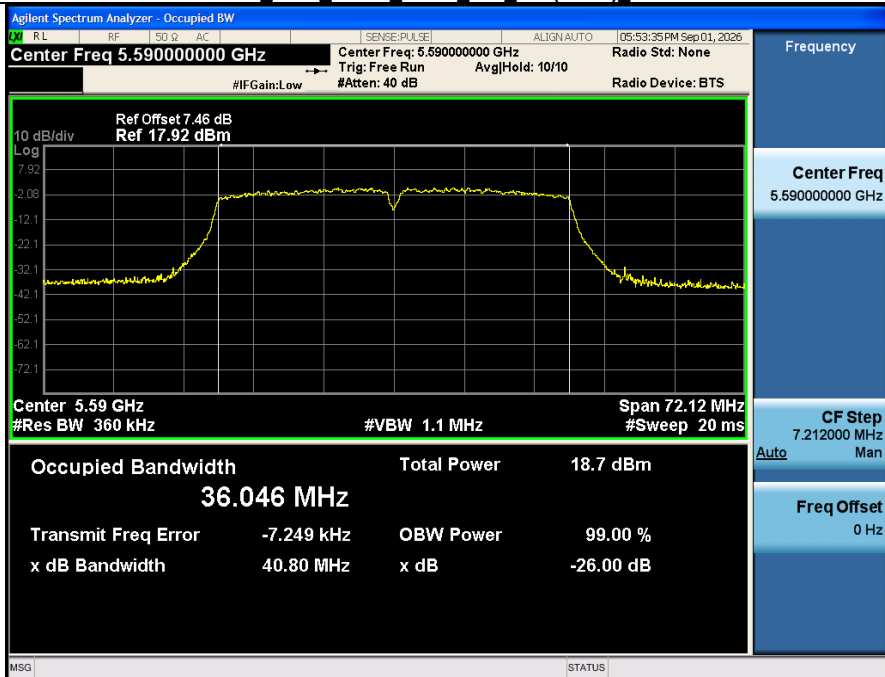


-26BW NVNT ANT1 802 11n(HT40) 5590

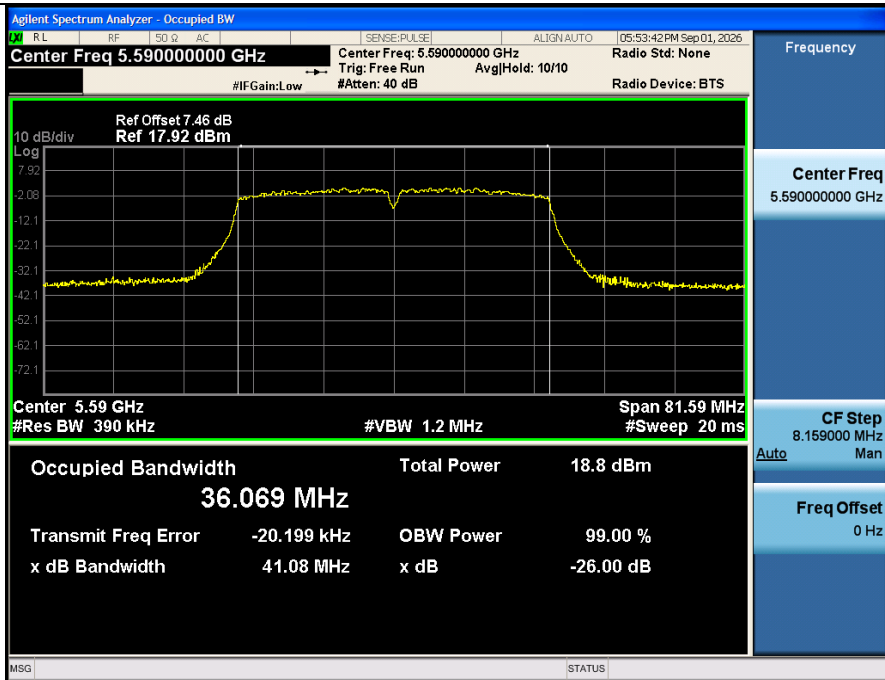


99% OCB NVNT ANT1 802 11n(HT40) 5670

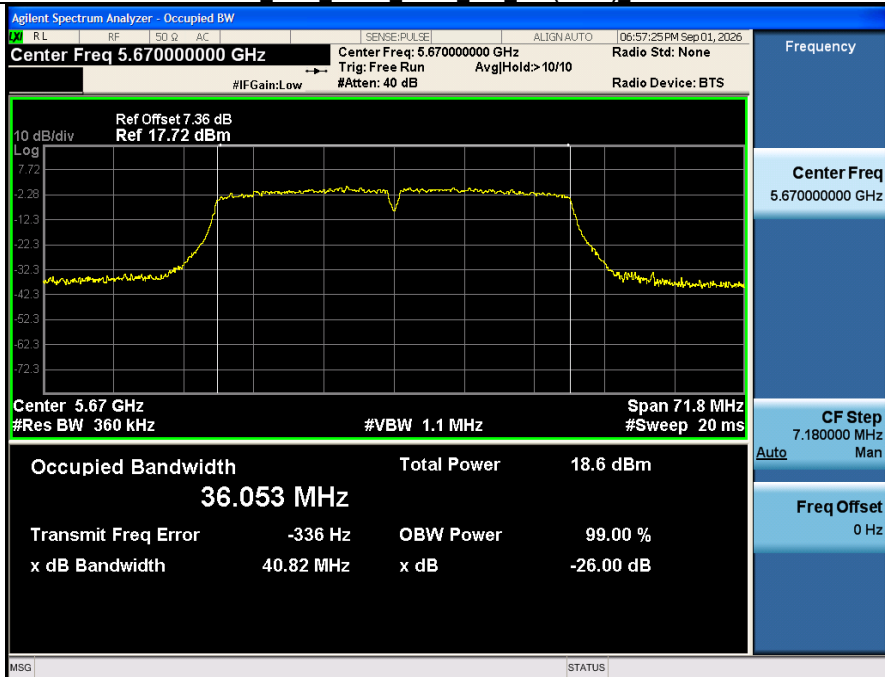


-26BW NVNT ANT1 802 11n(HT40) 5670

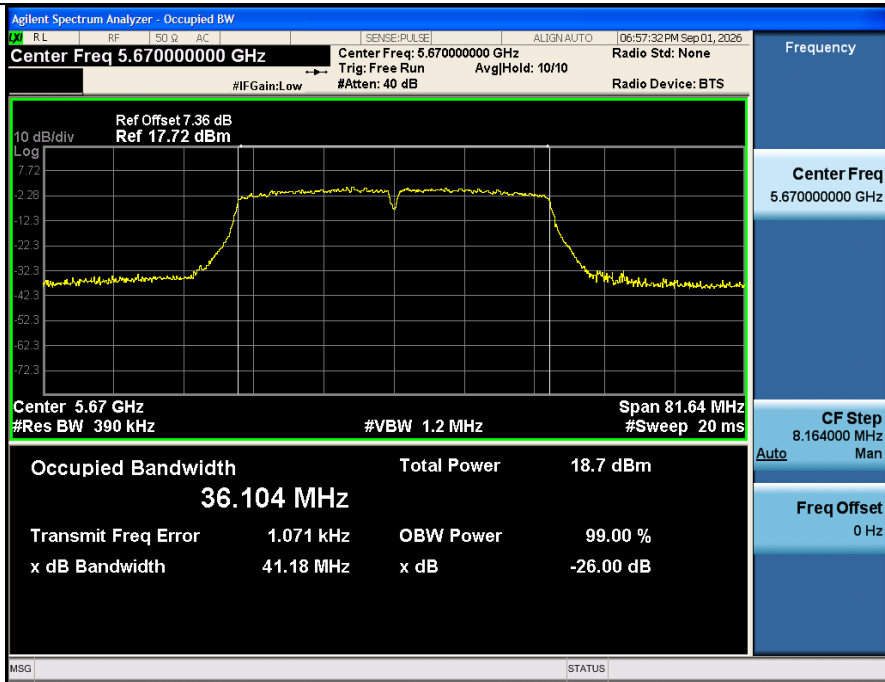


99% OCB NVNT ANT1 802 11ac(VHT40) 5510

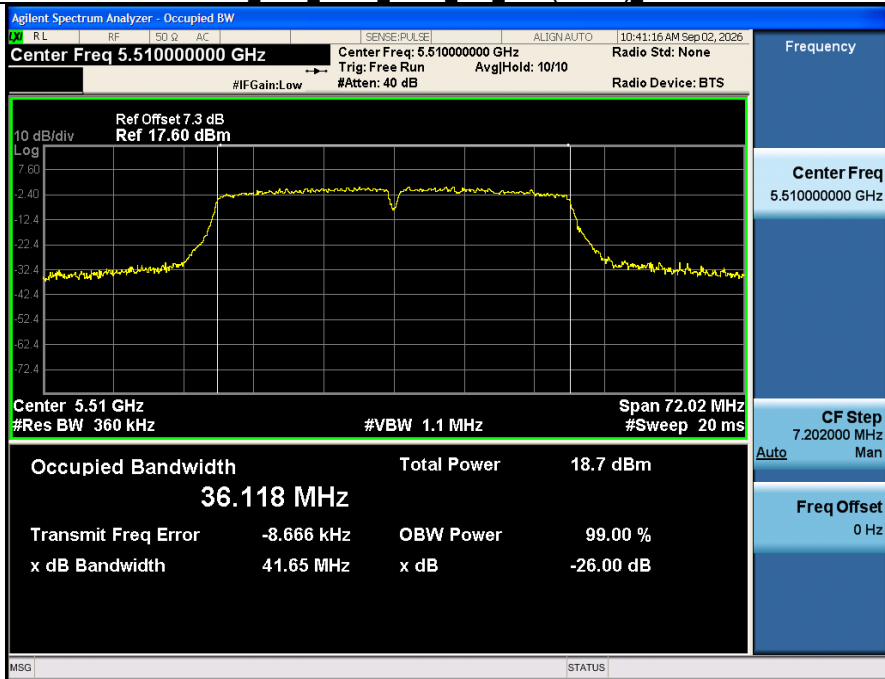


-26BW_NVNT_ANT1_802_11ac(VHT40)_5510

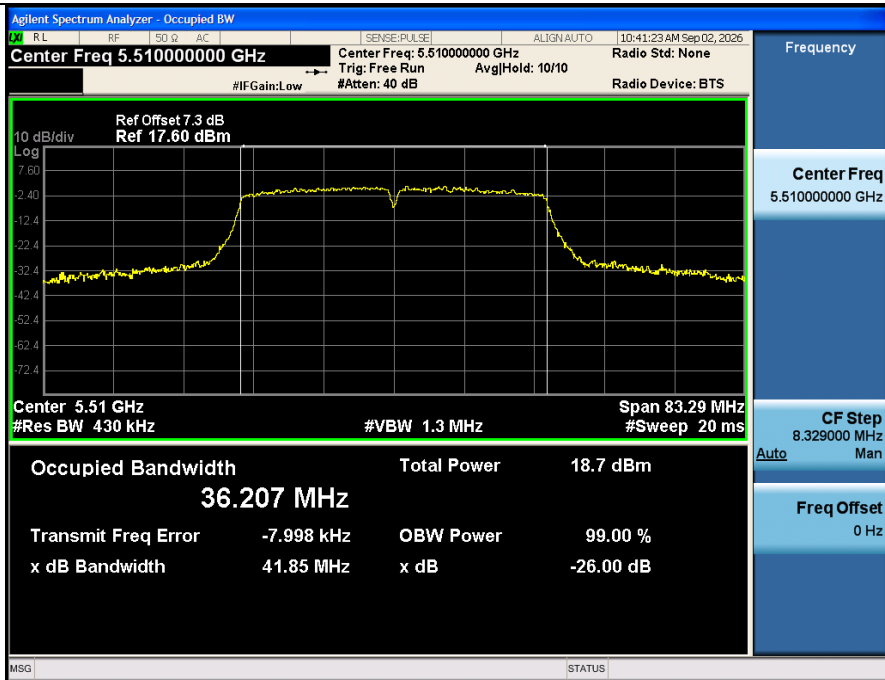


99% OCB NVNT ANT1 802 11ac(VHT40) 5590

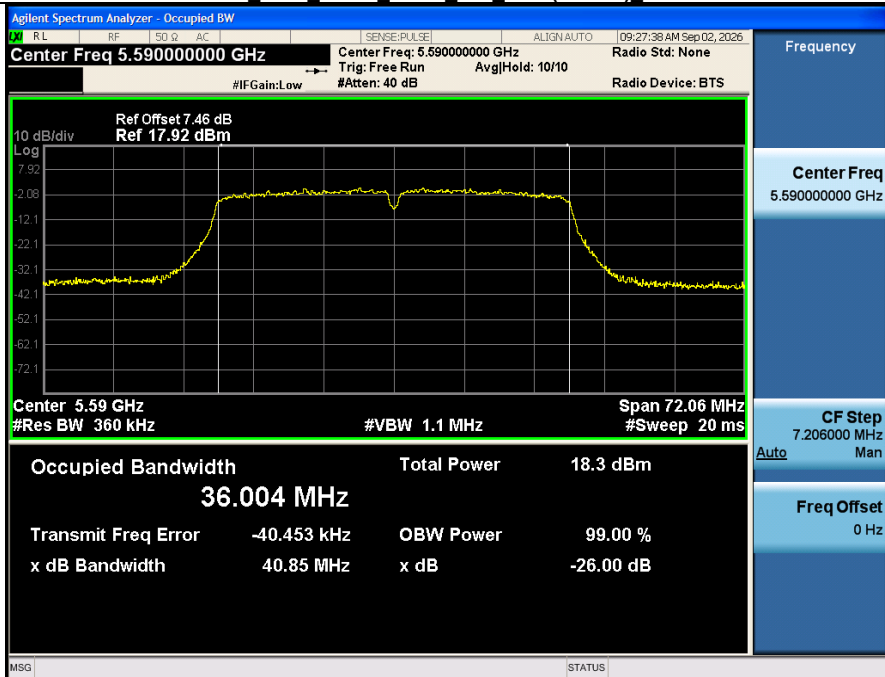


-26BW_NVNT_ANT1_802_11ac(VHT40)_5590

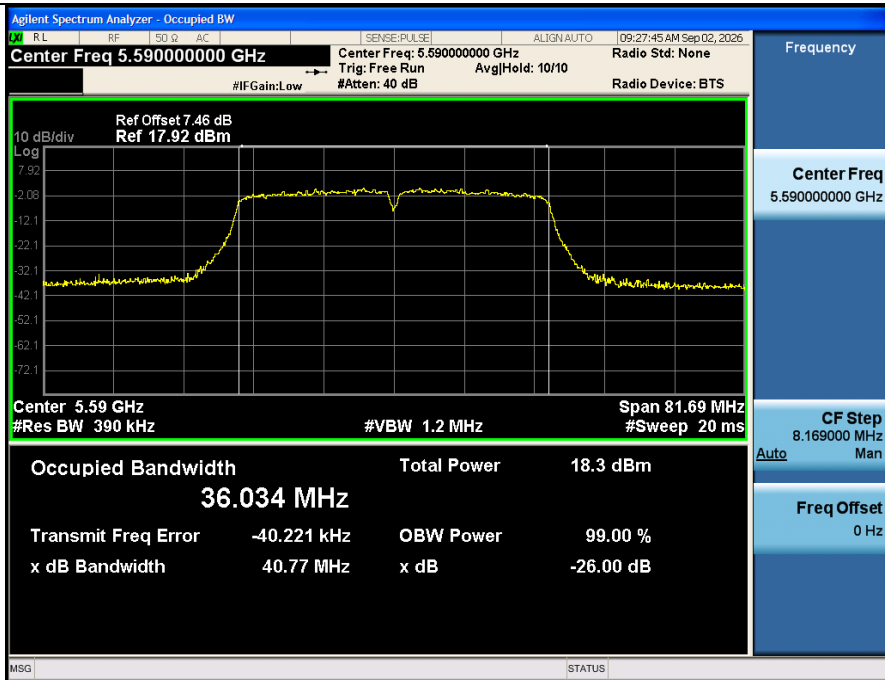


99% OCB NVNT ANT1 802 11ac(VHT40) 5670

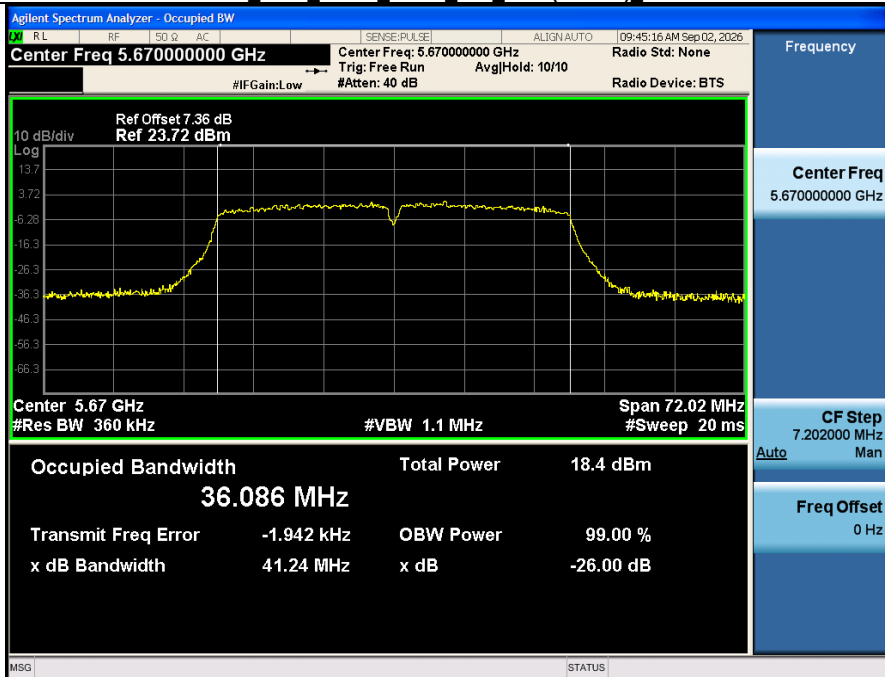


-26BW_NVNT_ANT1_802_11ac(VHT40)_5670

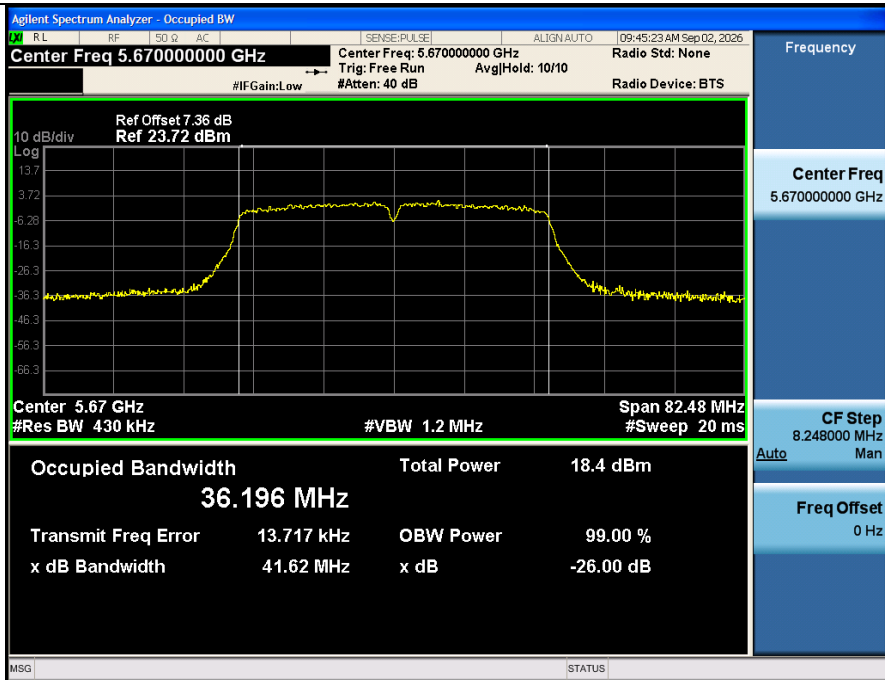


99% OCB NVNT ANT1 802 11ac(VHT80) 5530

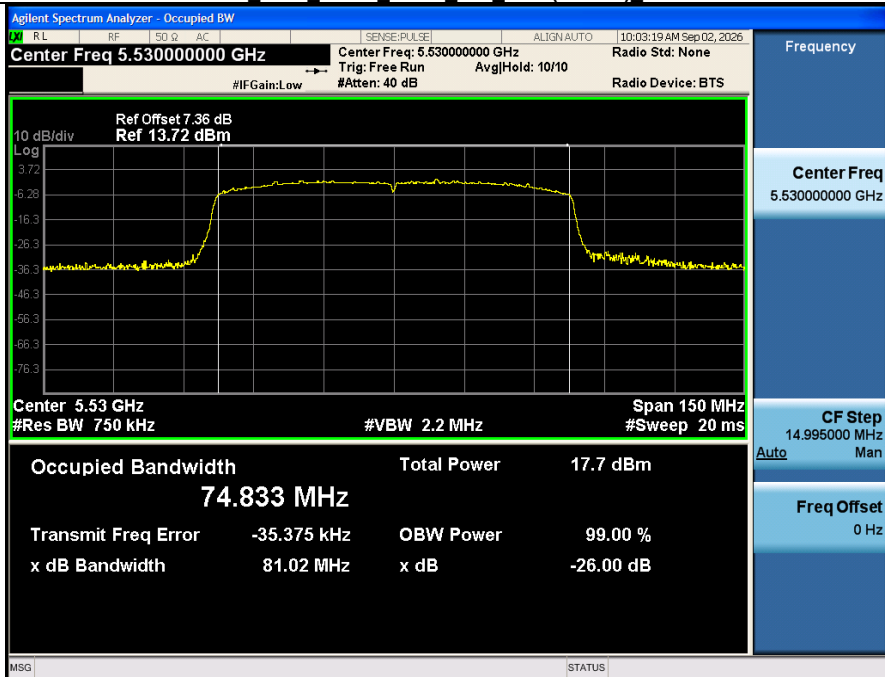


-26BW_NVNT_ANT1_802_11ac(VHT80)_5530

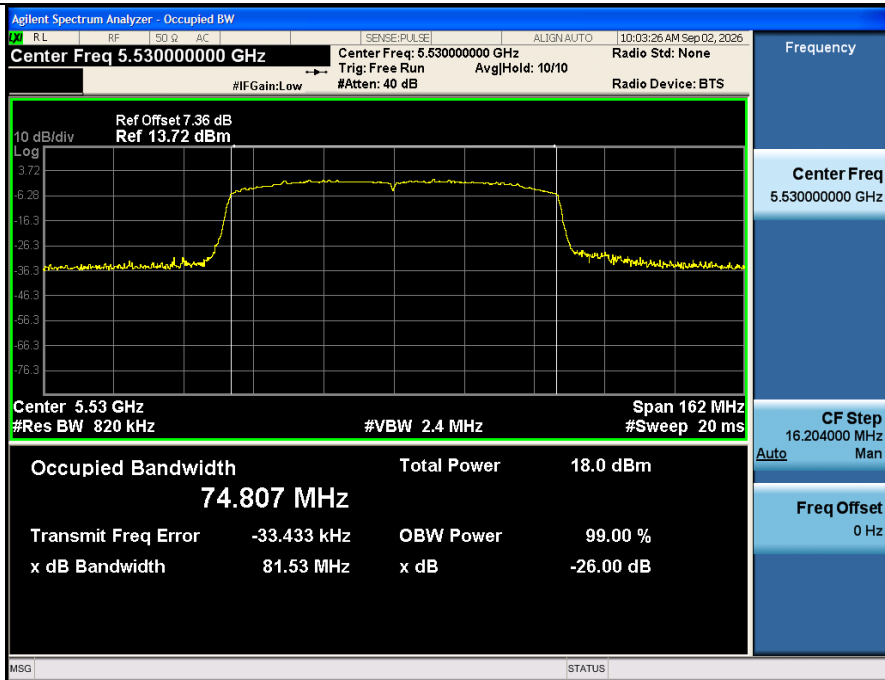


99% OCB NVNT ANT1 802 11ac(VHT80) 5610

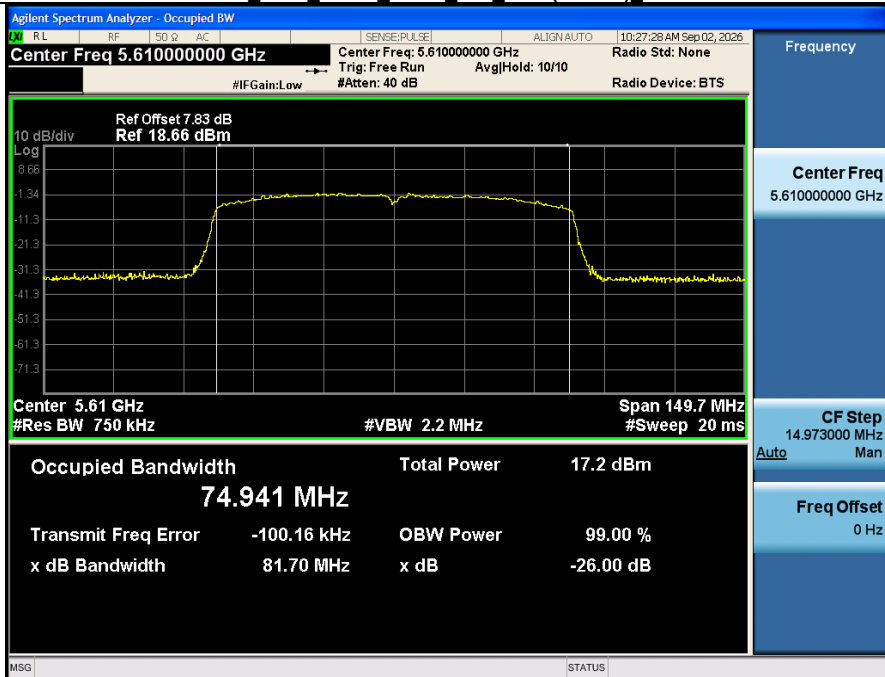


-26BW_NVNT_ANT1_802_11ac(VHT80)_5610

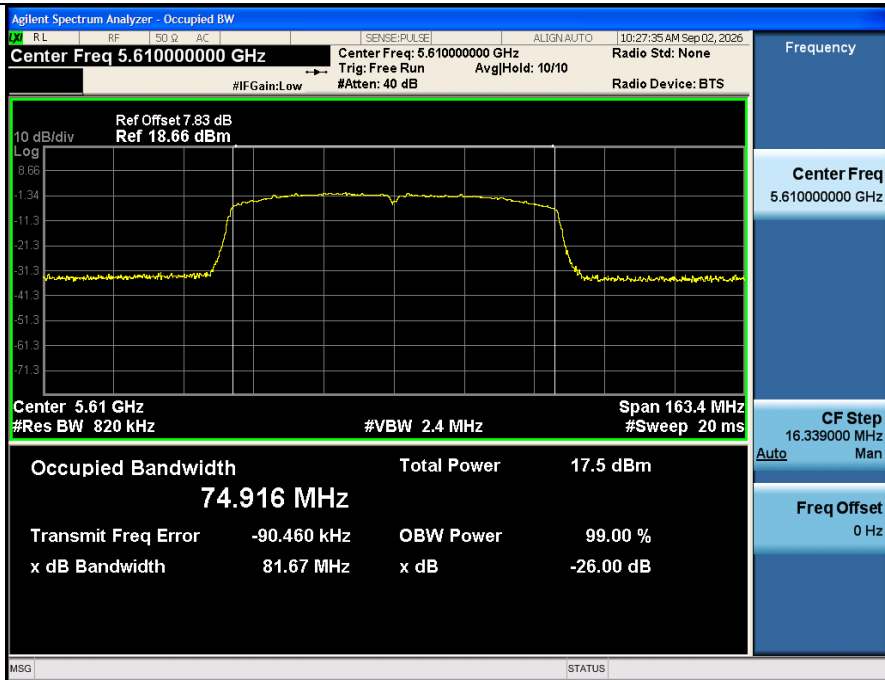


99% OCB NVNT ANT2 802 11a 5500

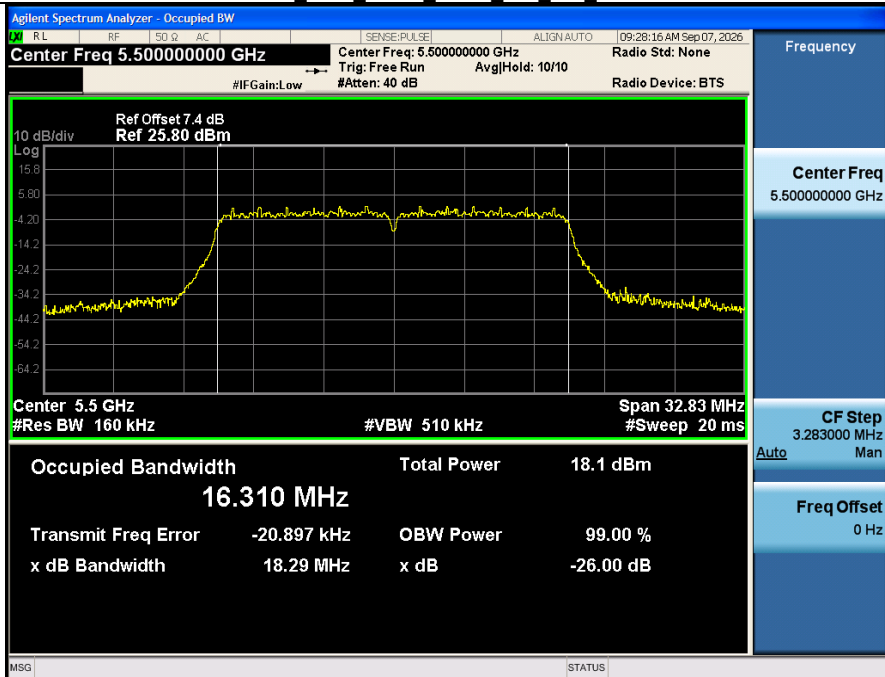


-26BW NVNT ANT2 802 11a 5500

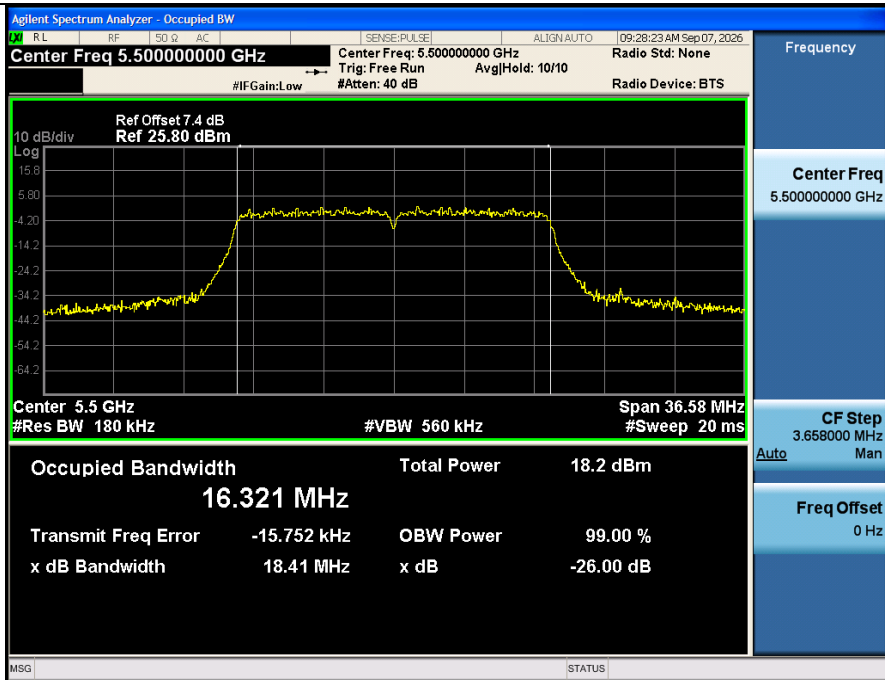


99% OCB NVNT ANT2 802 11a 5600

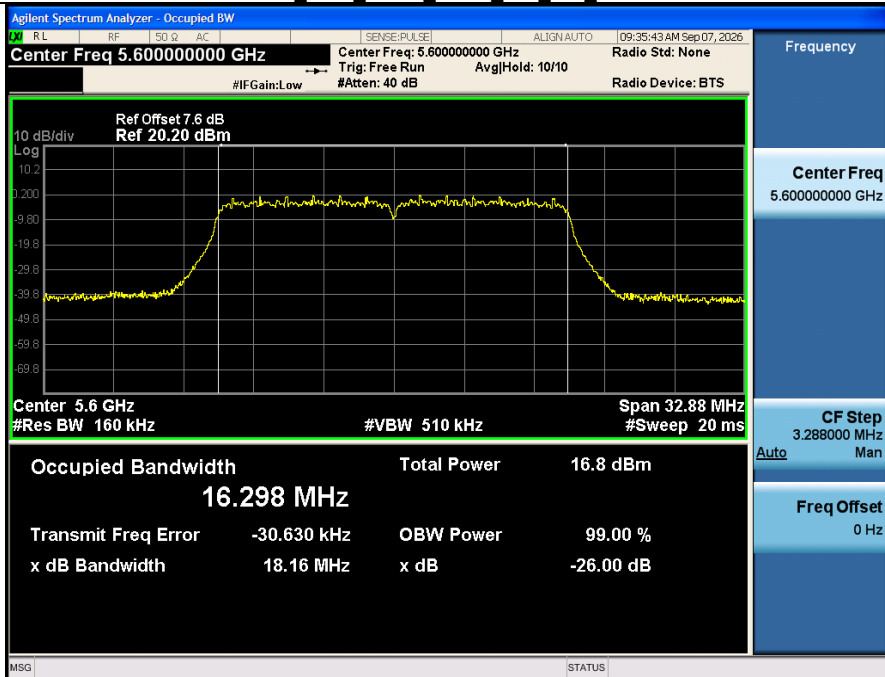


-26BW NVNT ANT2 802 11a 5600

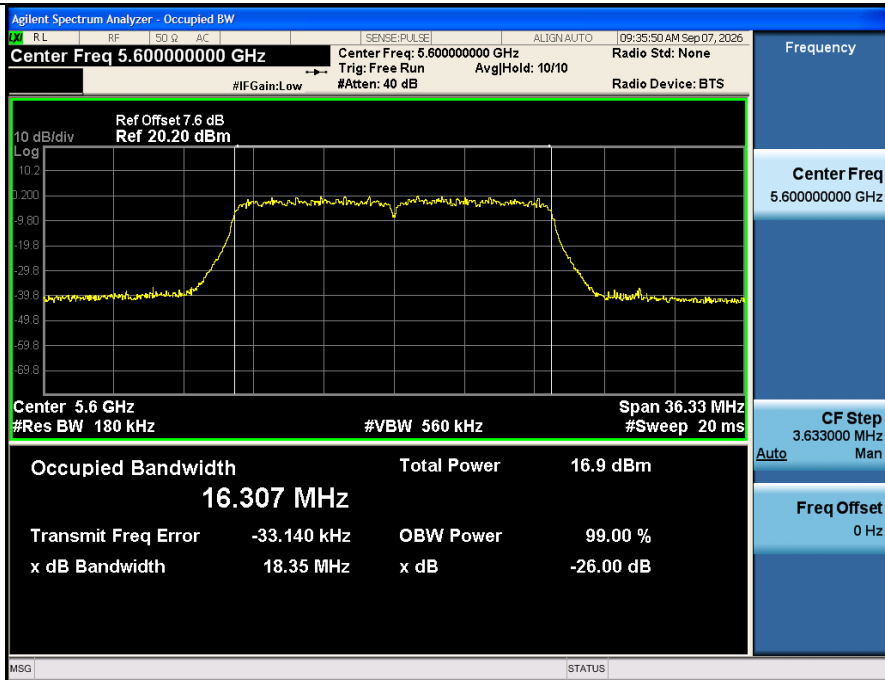


99% OCB NVNT ANT2 802 11a 5700

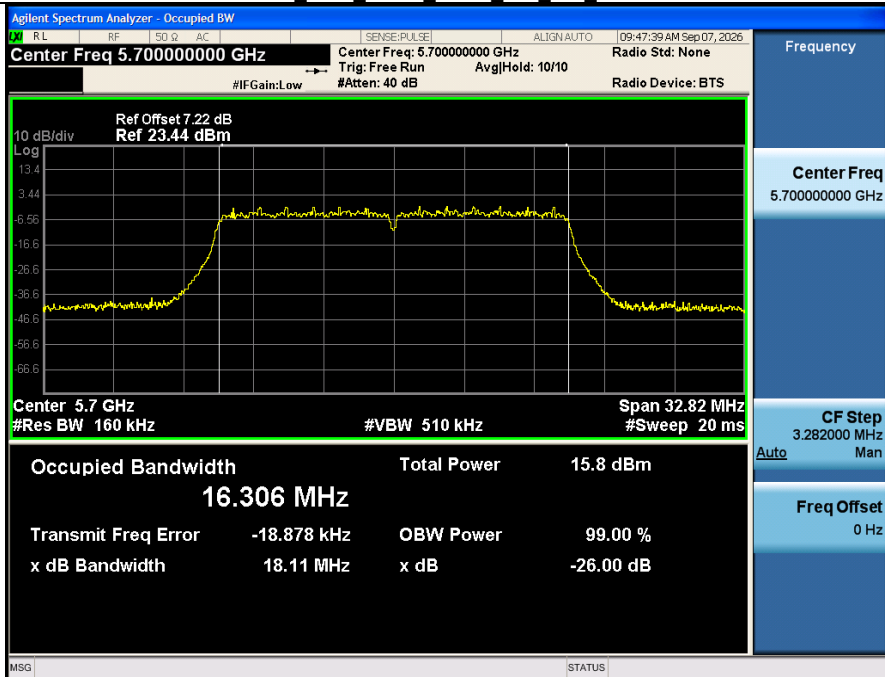


-26BW NVNT ANT2 802 11a 5700

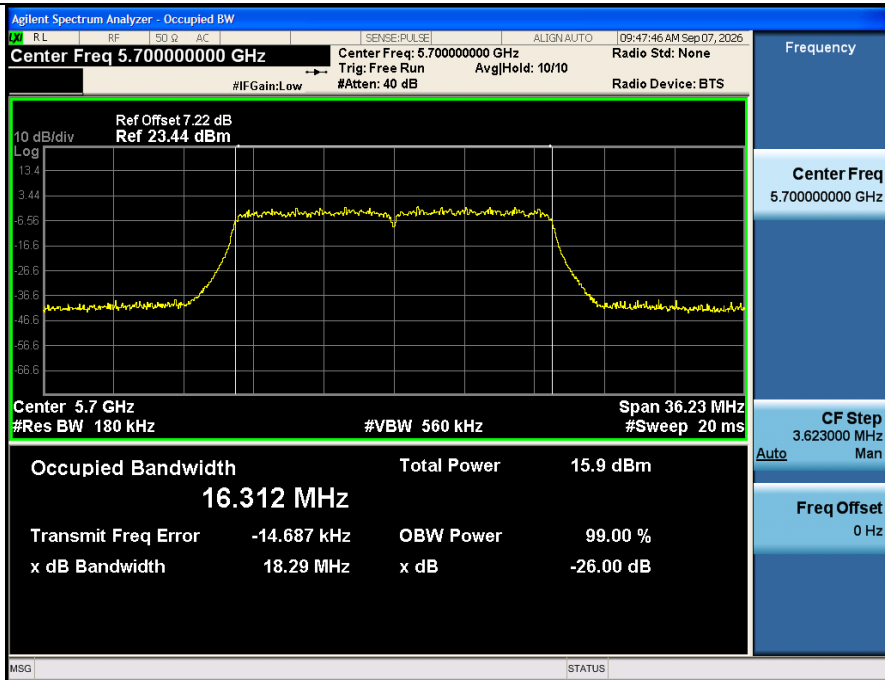


99% OCB NVNT ANT2 802 11n(HT20) 5500

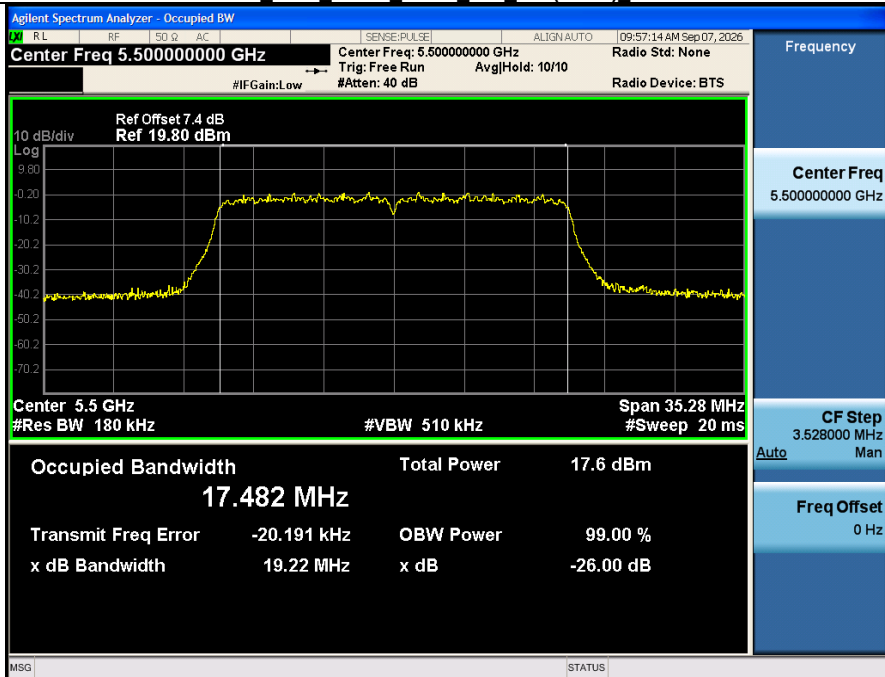


-26BW NVNT ANT2 802 11n(HT20) 5500

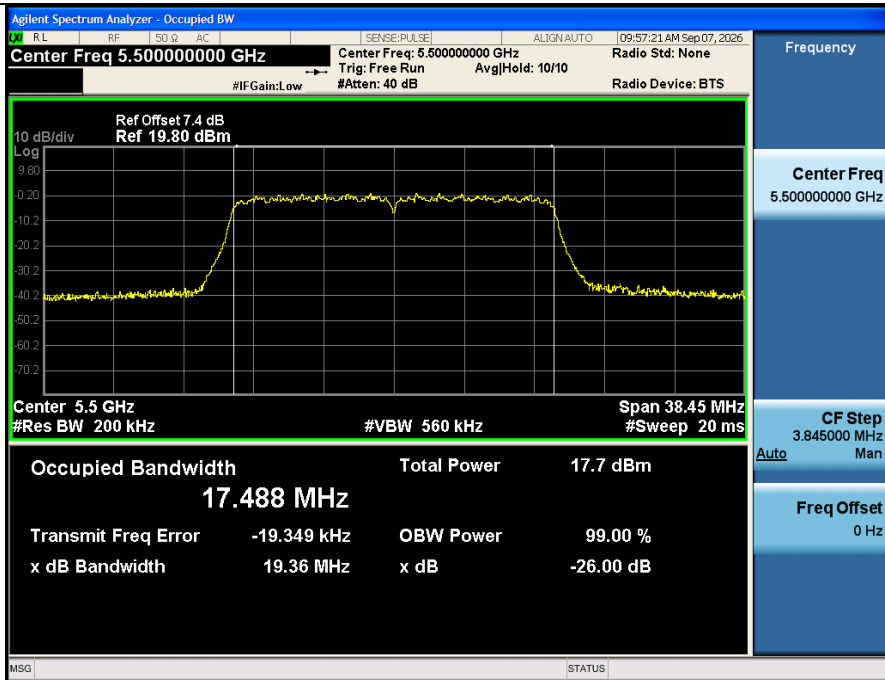


99% OCB NVNT ANT2 802 11n(HT20) 5600

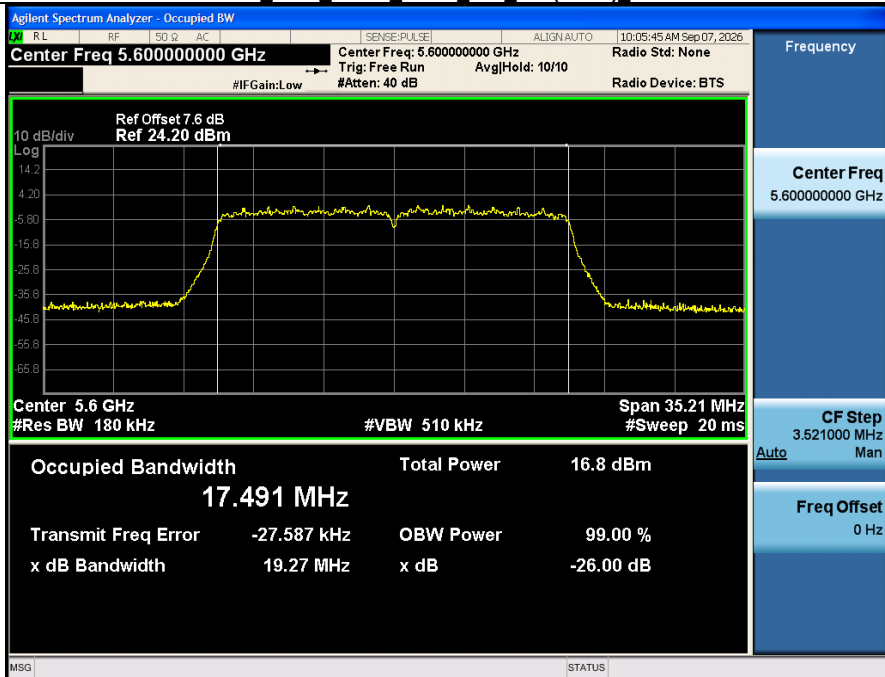


-26BW NVNT ANT2 802 11n(HT20) 5600

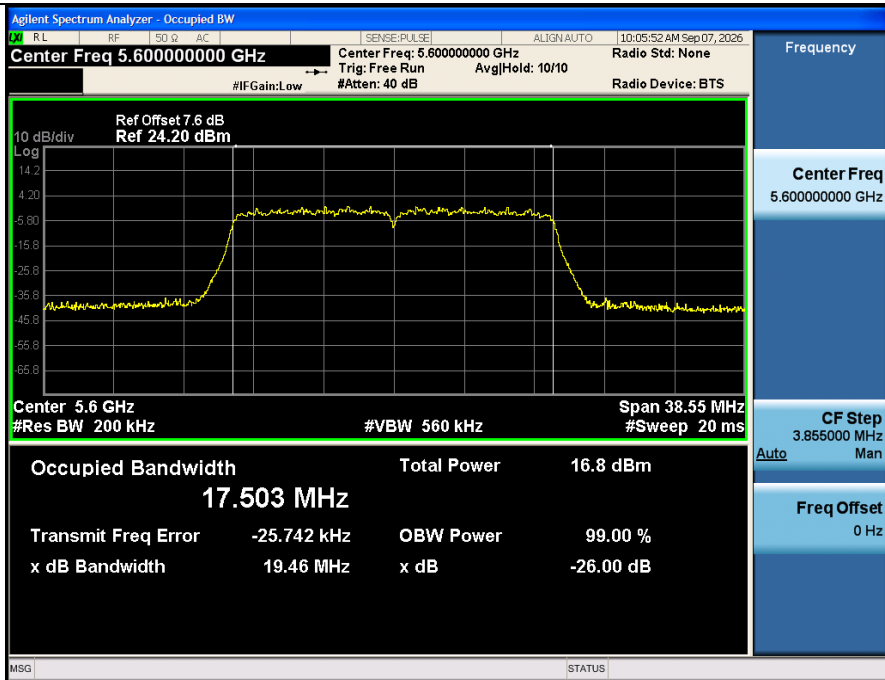


99% OCB NVNT ANT2 802 11n(HT20) 5700

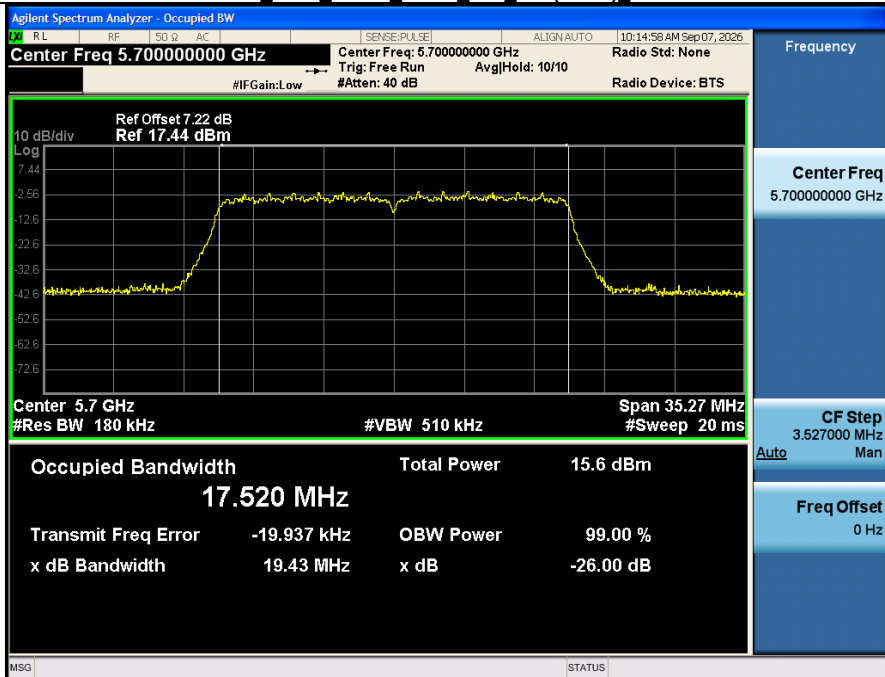


-26BW NVNT ANT2 802 11n(HT20) 5700

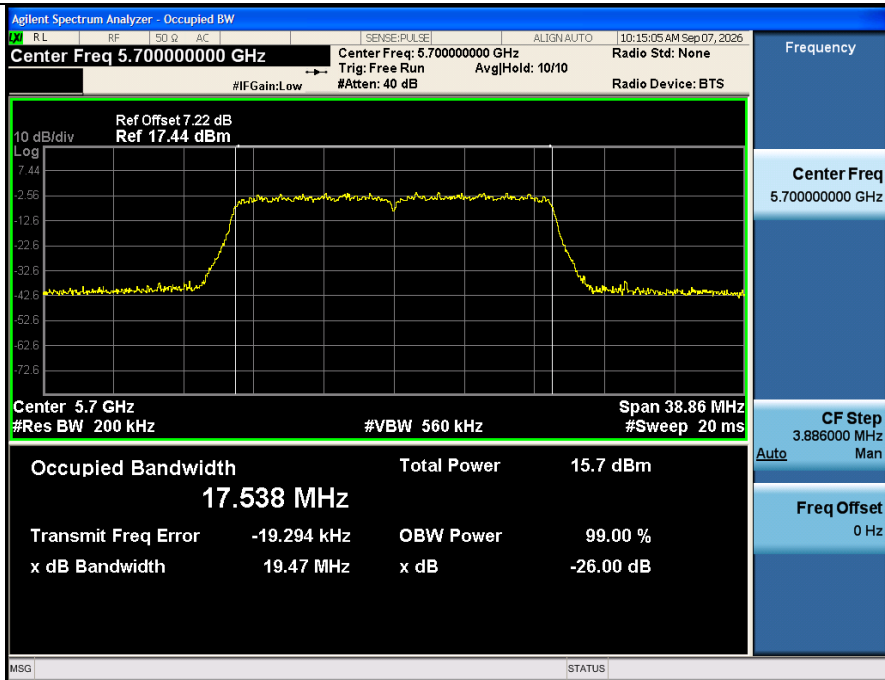


99% OCB NVNT ANT2 802 11ac(VHT20) 5500

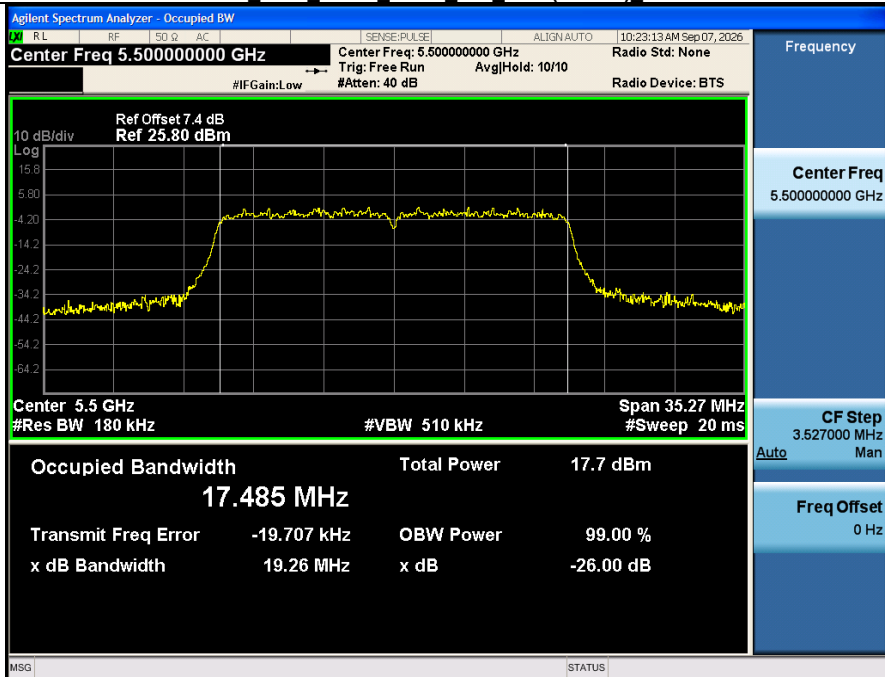


-26BW NVNT ANT2 802 11ac(VHT20) 5500

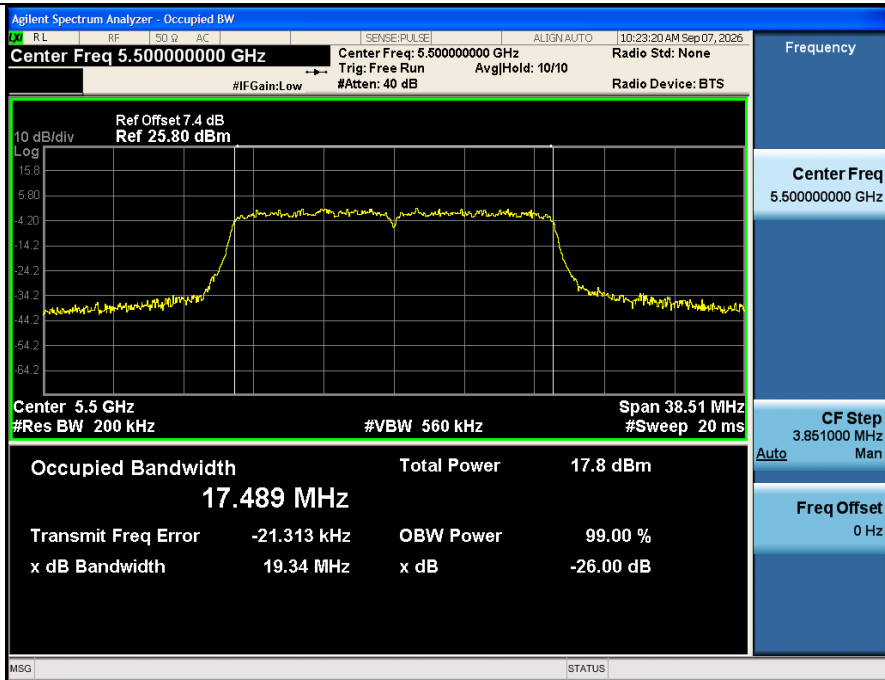


99% OCB NVNT ANT2 802 11ac(VHT20) 5600

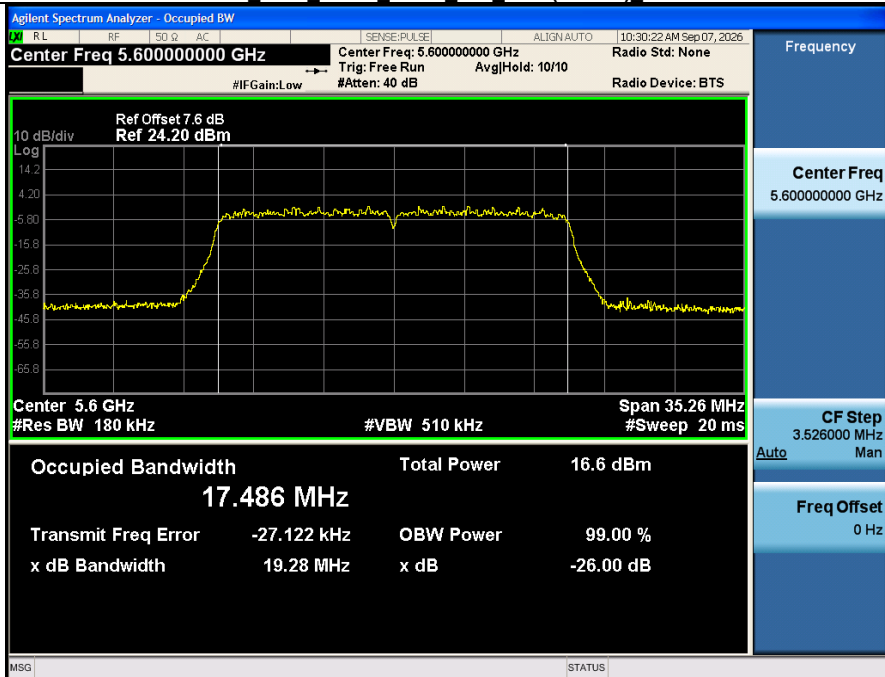


-26BW NVNT ANT2 802 11ac(VHT20) 5600

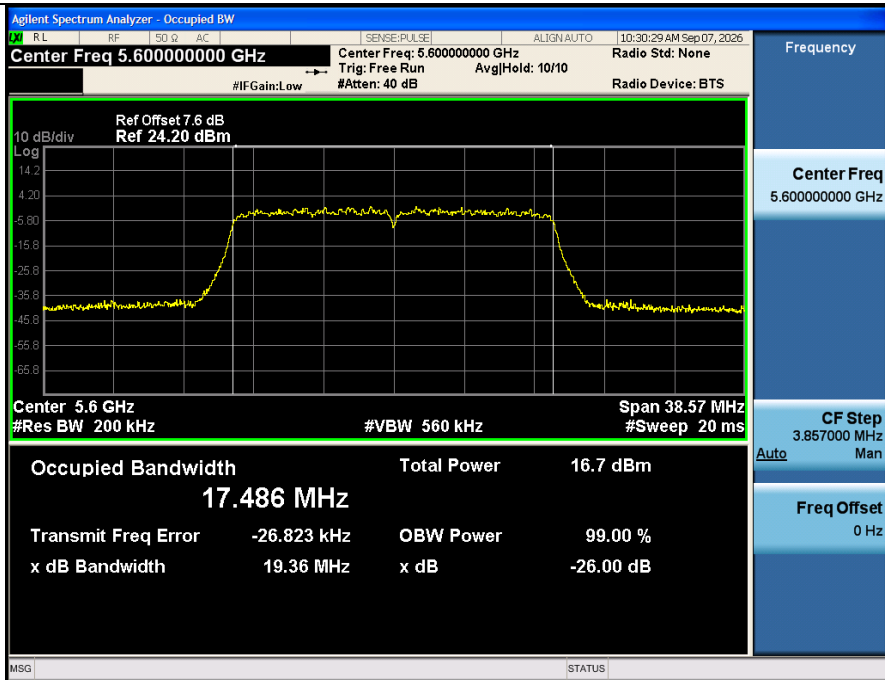


99% OCB NVNT ANT2 802 11ac(VHT20) 5700

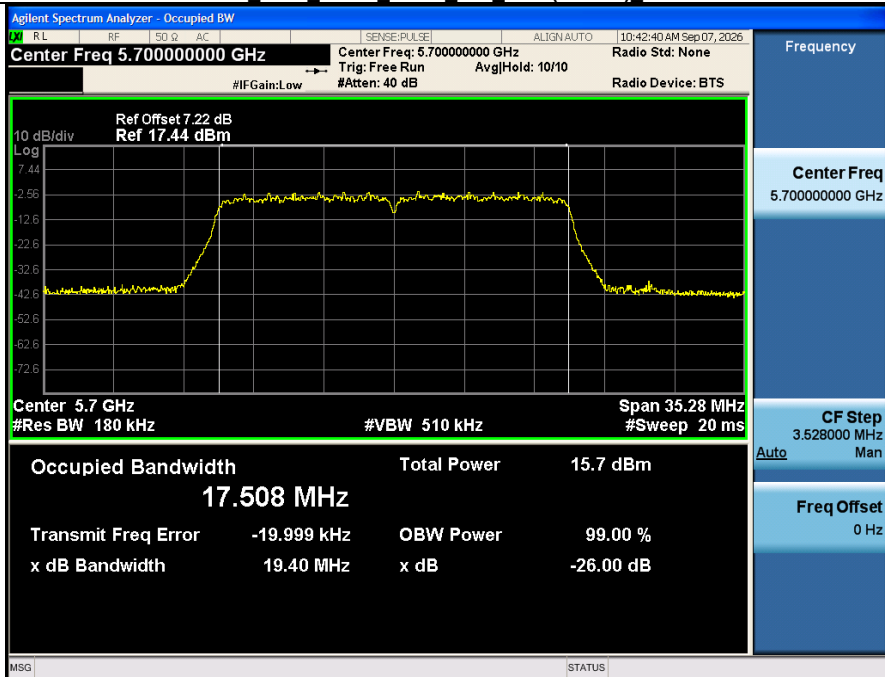


-26BW NVNT ANT2 802 11ac(VHT20) 5700

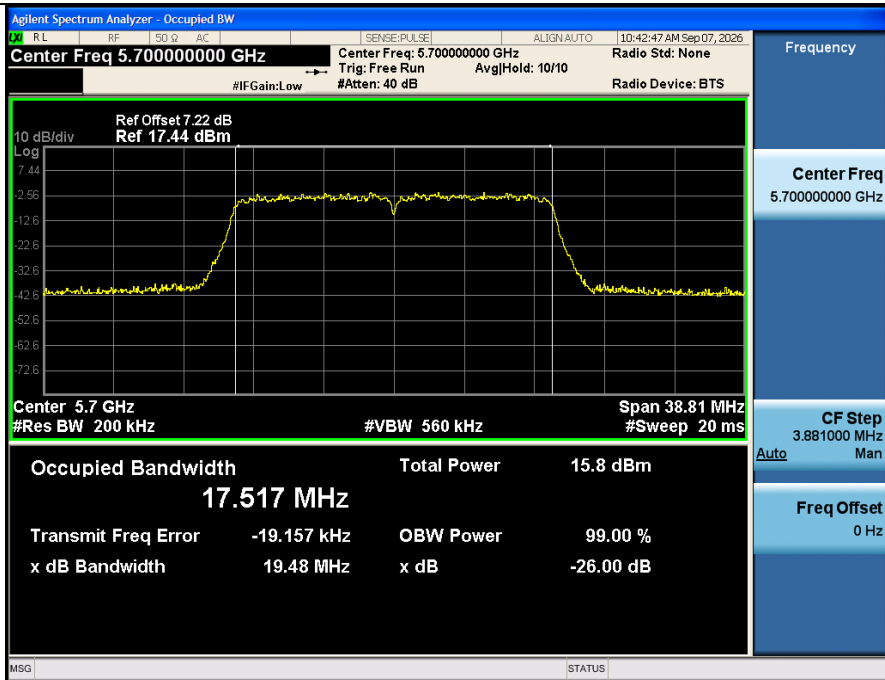


99% OCB NVNT ANT2 802 11n(HT40) 5510

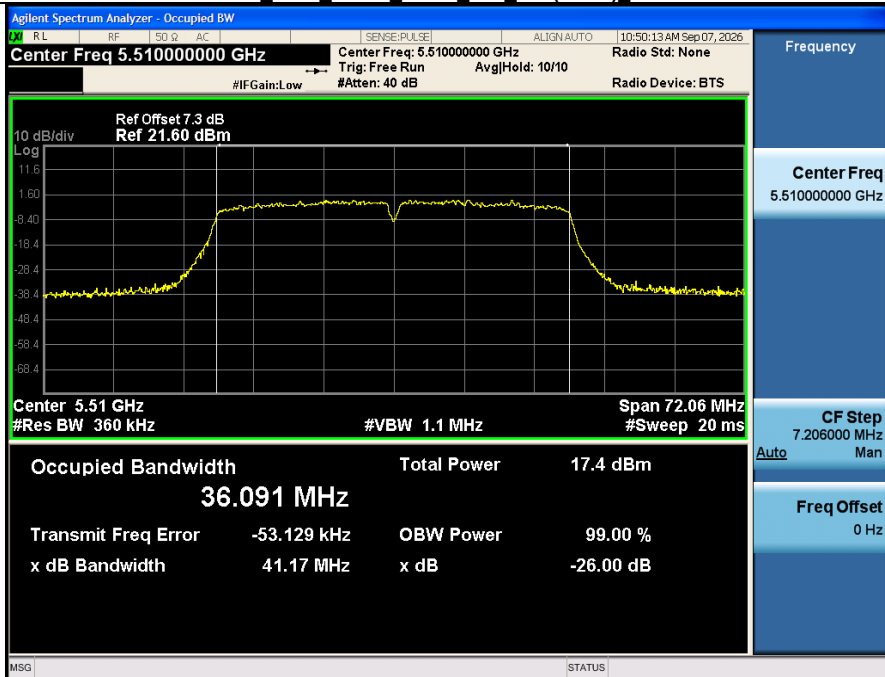


-26BW NVNT ANT2 802 11n(HT40) 5510

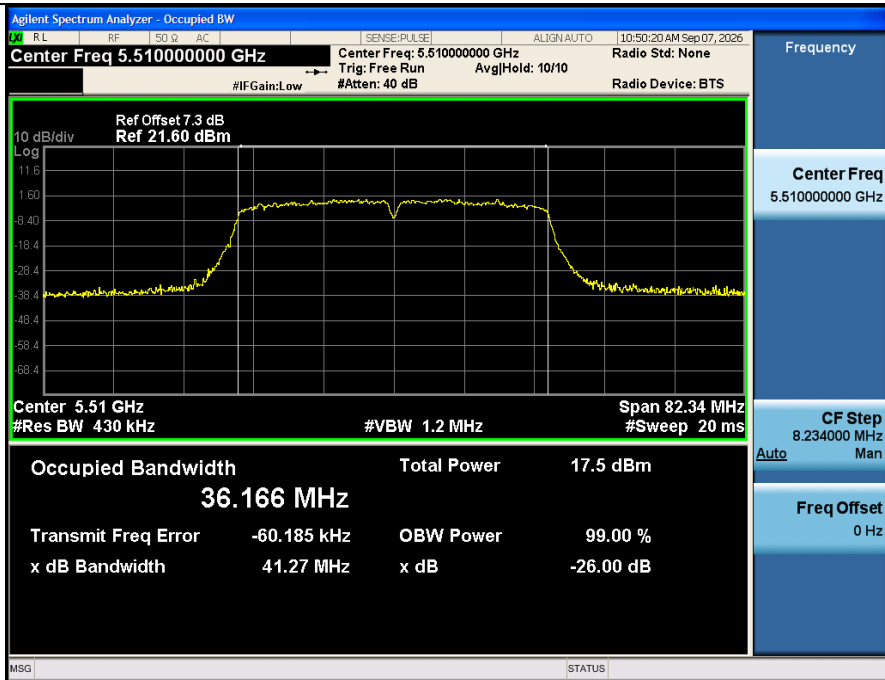


99% OCB NVNT ANT2 802 11n(HT40) 5590

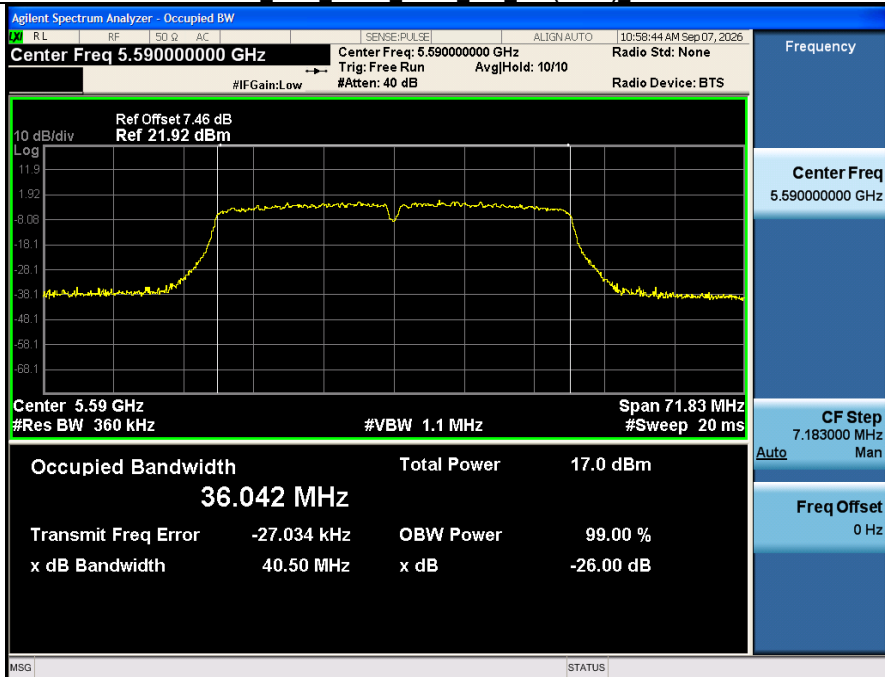


-26BW NVNT ANT2 802 11n(HT40) 5590

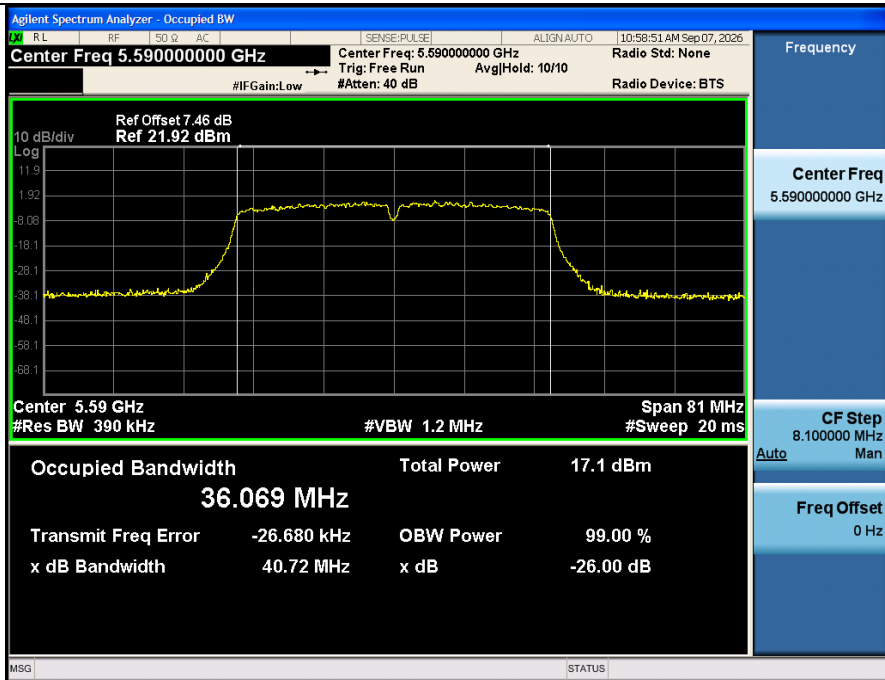


99% OCB NVNT ANT2 802 11n(HT40) 5670

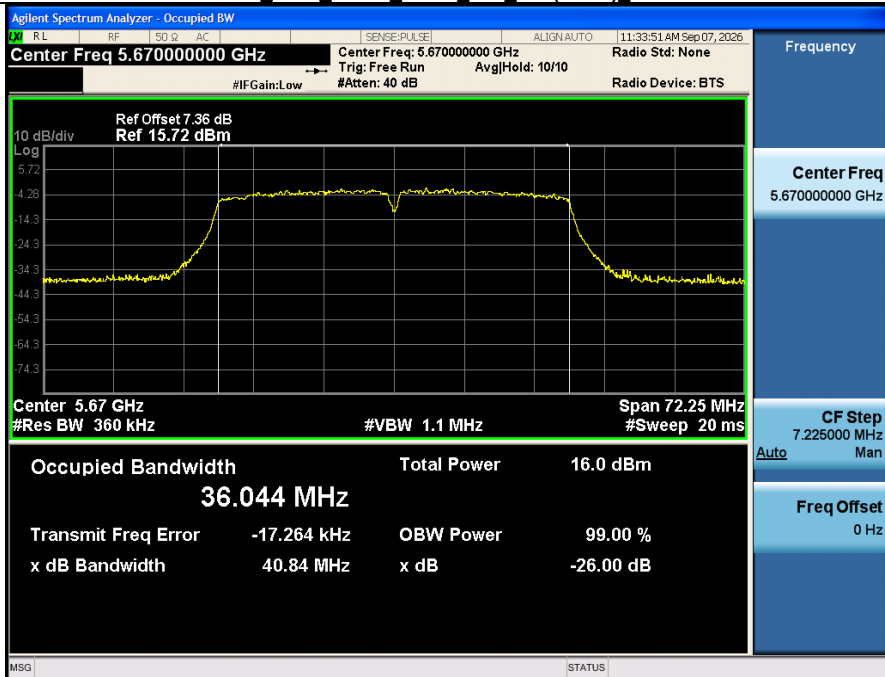


-26BW NVNT ANT2 802 11n(HT40) 5670

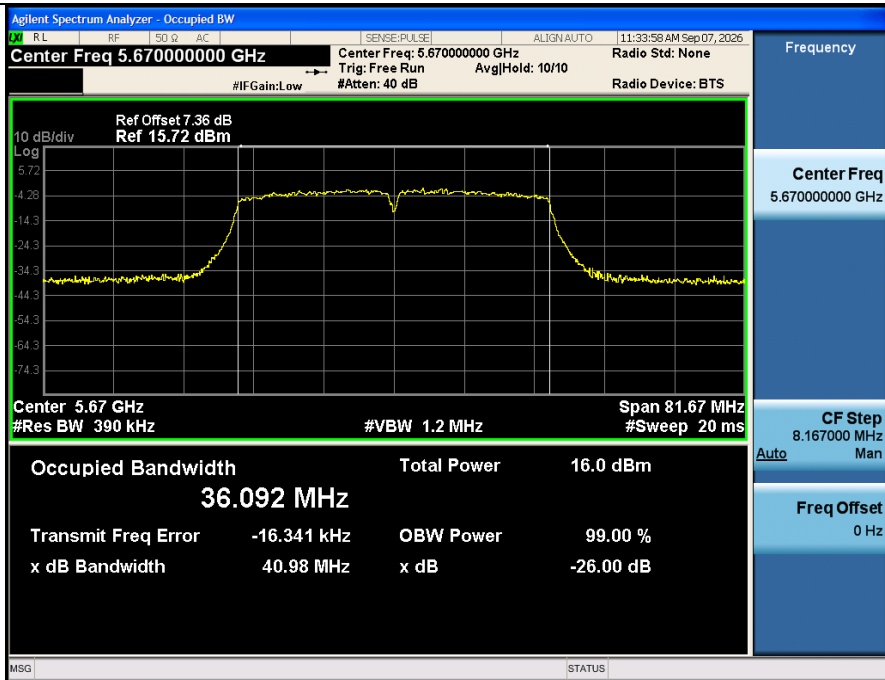


99% OCB NVNT ANT2 802 11ac(VHT40) 5510

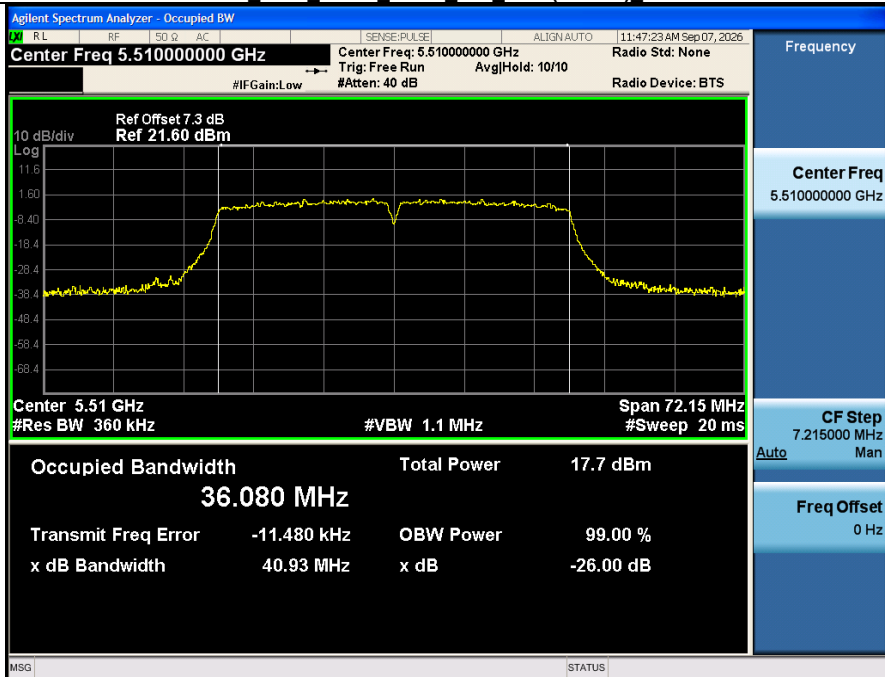


-26BW_NVNT_ANT2_802_11ac(VHT40)_5510

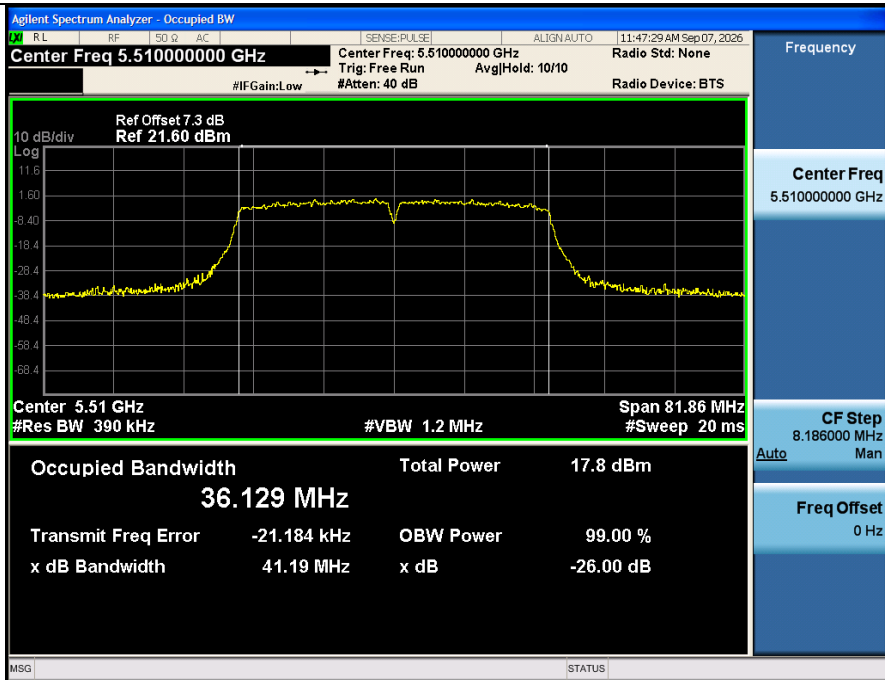


99% OCB NVNT ANT2 802 11ac(VHT40) 5590

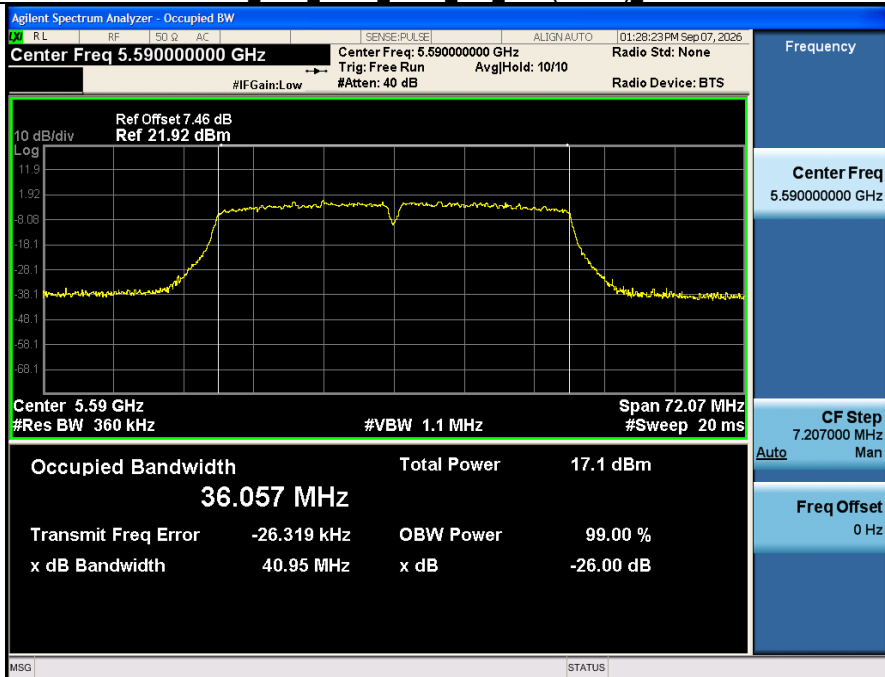


-26BW_NVNT_ANT2_802_11ac(VHT40)_5590

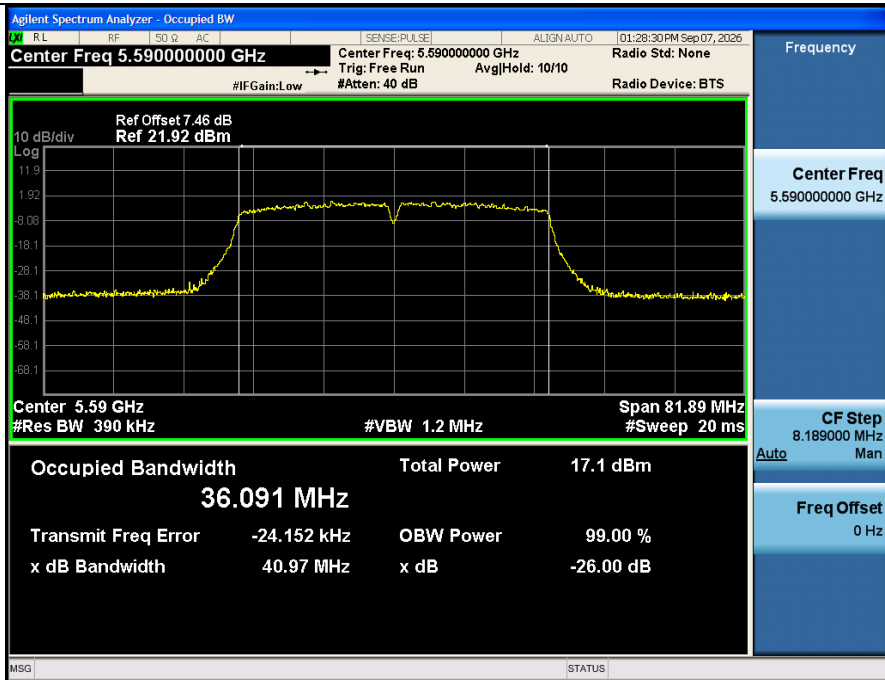


99% OCB NVNT ANT2 802 11ac(VHT40) 5670

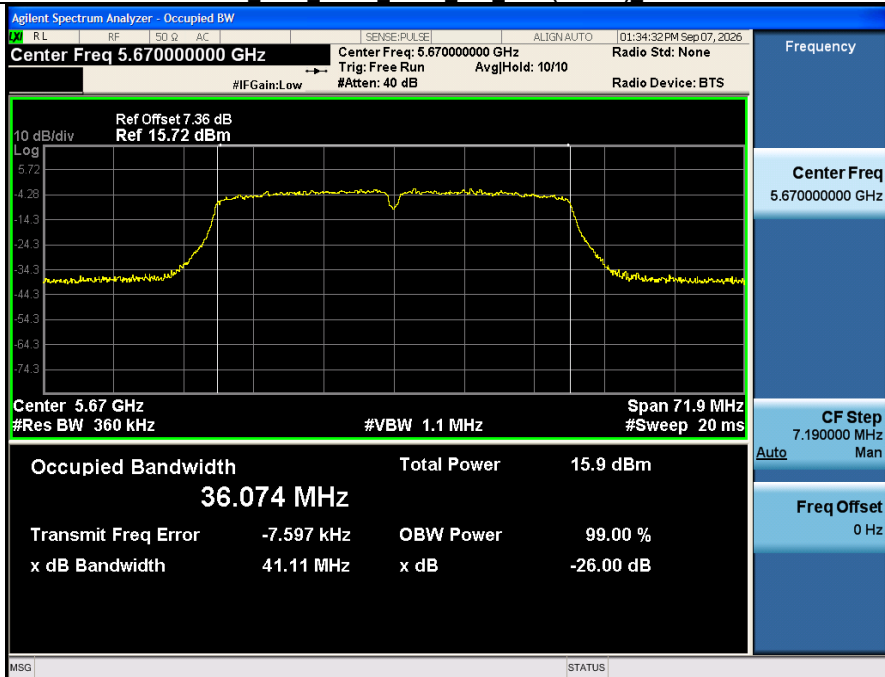


-26BW_NVNT_ANT2_802_11ac(VHT40)_5670

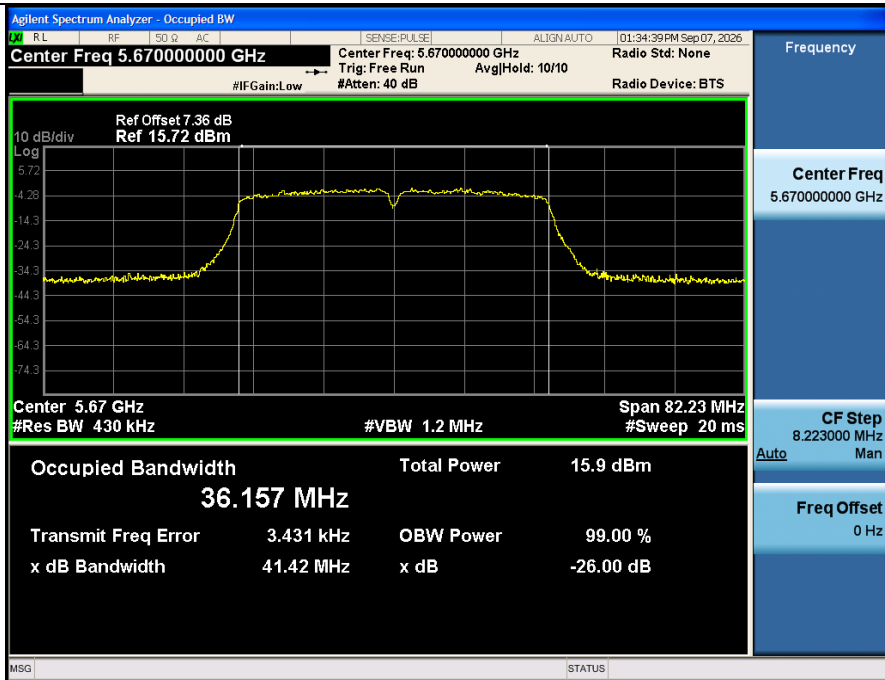


99% OCB NVNT ANT2 802 11ac(VHT80) 5530

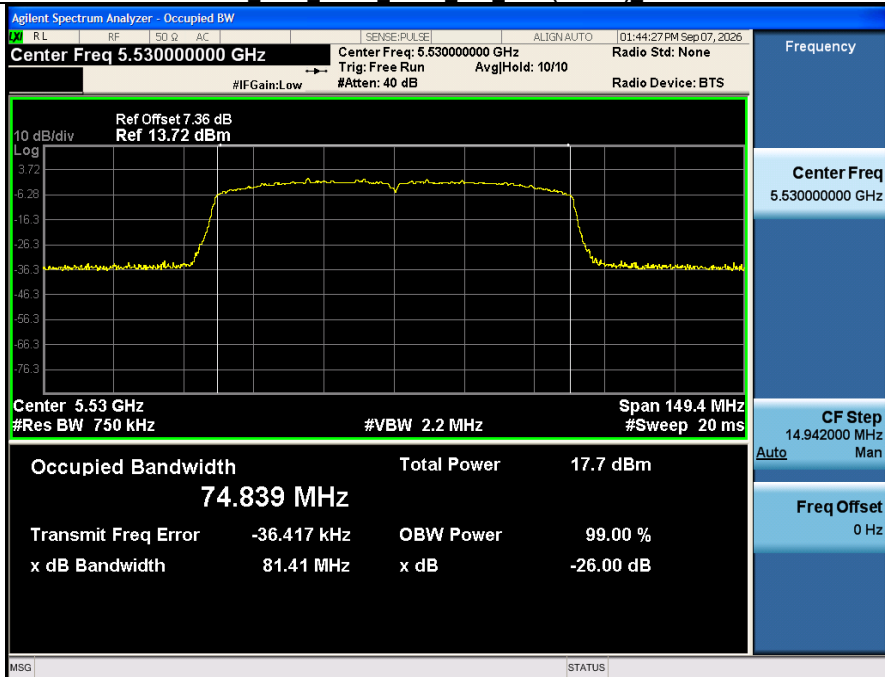


-26BW NVNT ANT2 802 11ac(VHT80) 5530

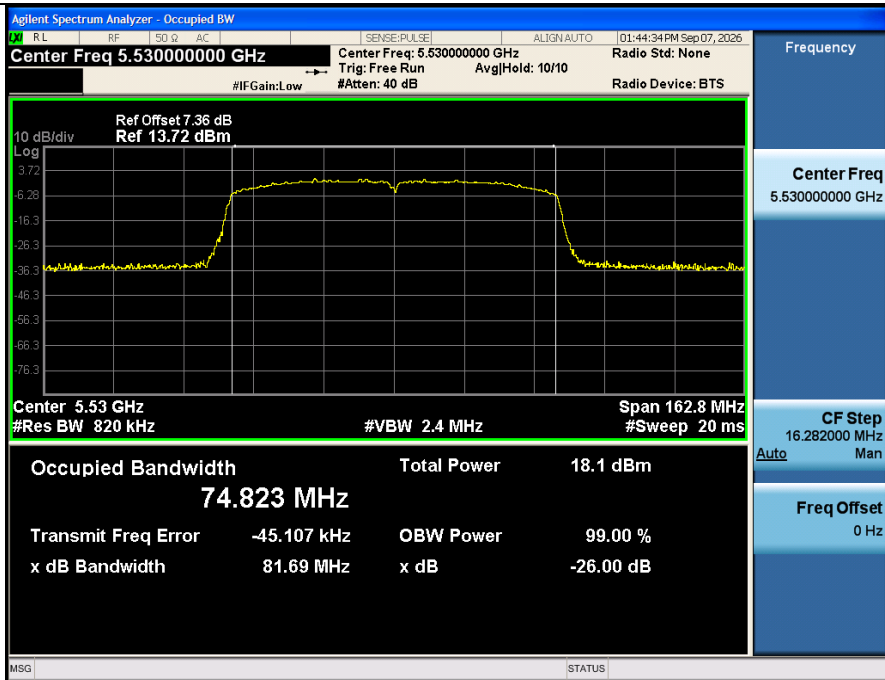

99% OCB NVNT ANT2 802 11ac(VHT80) 5610

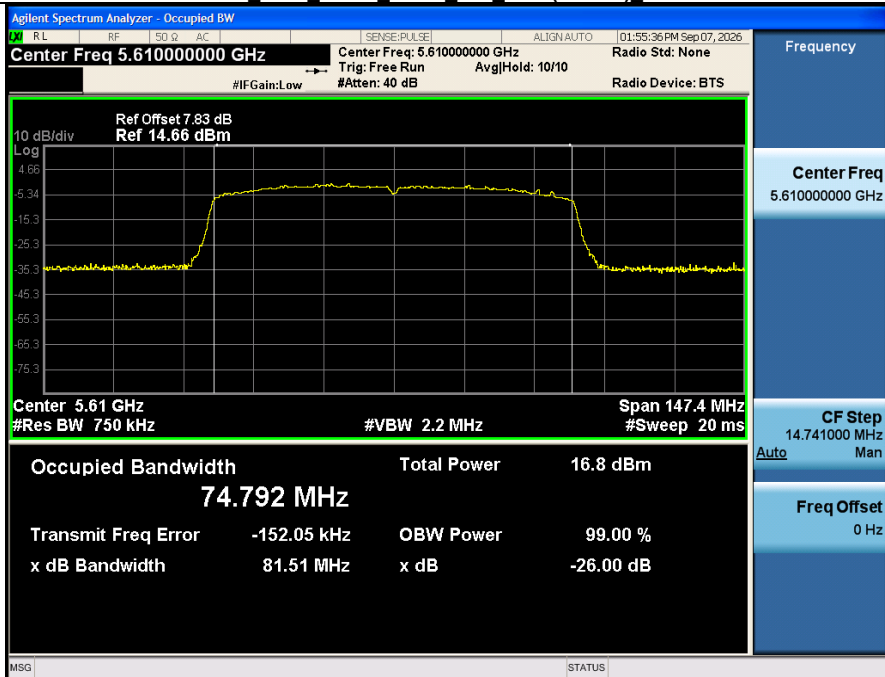


-26BW NVNT ANT2 802 11ac(VHT80) 5610

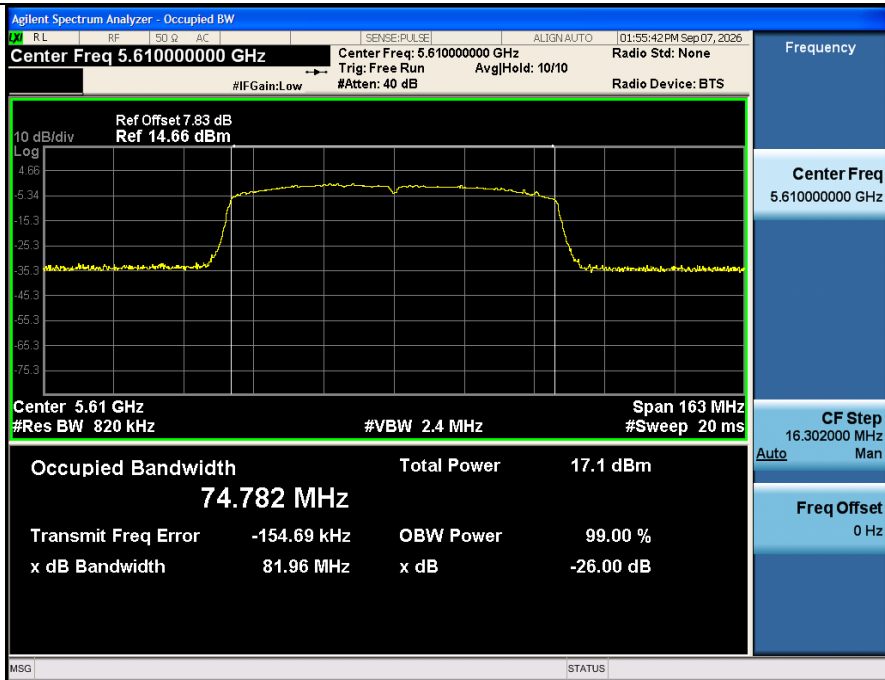


2. Duty Cycle


Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5500.00	94.50	0.25
NVNT	ANT1	802.11a	5600.00	94.50	0.25
NVNT	ANT1	802.11a	5700.00	94.12	0.26
NVNT	ANT1	802.11n(HT20)	5500.00	91.43	0.39
NVNT	ANT1	802.11n(HT20)	5600.00	91.43	0.39
NVNT	ANT1	802.11n(HT20)	5700.00	92.31	0.35
NVNT	ANT1	802.11ac(VHT20)	5500.00	93.27	0.30
NVNT	ANT1	802.11ac(VHT20)	5600.00	93.20	0.31
NVNT	ANT1	802.11ac(VHT20)	5700.00	93.27	0.30
NVNT	ANT1	802.11n(HT40)	5510.00	88.68	0.52
NVNT	ANT1	802.11n(HT40)	5590.00	88.89	0.51
NVNT	ANT1	802.11n(HT40)	5670.00	88.68	0.52
NVNT	ANT1	802.11ac(VHT40)	5510.00	85.45	0.68
NVNT	ANT1	802.11ac(VHT40)	5590.00	85.71	0.67
NVNT	ANT1	802.11ac(VHT40)	5670.00	85.71	0.67
NVNT	ANT1	802.11ac(VHT80)	5530.00	65.71	1.82
NVNT	ANT1	802.11ac(VHT80)	5610.00	65.71	1.82
NVNT	ANT2	802.11a	5500.00	91.96	0.36
NVNT	ANT2	802.11a	5600.00	91.15	0.40
NVNT	ANT2	802.11a	5700.00	91.96	0.36
NVNT	ANT2	802.11n(HT20)	5500.00	95.05	0.22
NVNT	ANT2	802.11n(HT20)	5600.00	95.00	0.22
NVNT	ANT2	802.11n(HT20)	5700.00	94.12	0.26
NVNT	ANT2	802.11ac(VHT20)	5500.00	90.57	0.43
NVNT	ANT2	802.11ac(VHT20)	5600.00	89.72	0.47
NVNT	ANT2	802.11ac(VHT20)	5700.00	89.81	0.47
NVNT	ANT2	802.11n(HT40)	5510.00	82.46	0.84
NVNT	ANT2	802.11n(HT40)	5590.00	82.46	0.84
NVNT	ANT2	802.11n(HT40)	5670.00	82.76	0.82
NVNT	ANT2	802.11ac(VHT40)	5510.00	88.89	0.51
NVNT	ANT2	802.11ac(VHT40)	5590.00	88.89	0.51
NVNT	ANT2	802.11ac(VHT40)	5670.00	88.89	0.51
NVNT	ANT2	802.11ac(VHT80)	5530.00	74.19	1.30
NVNT	ANT2	802.11ac(VHT80)	5610.00	74.19	1.30

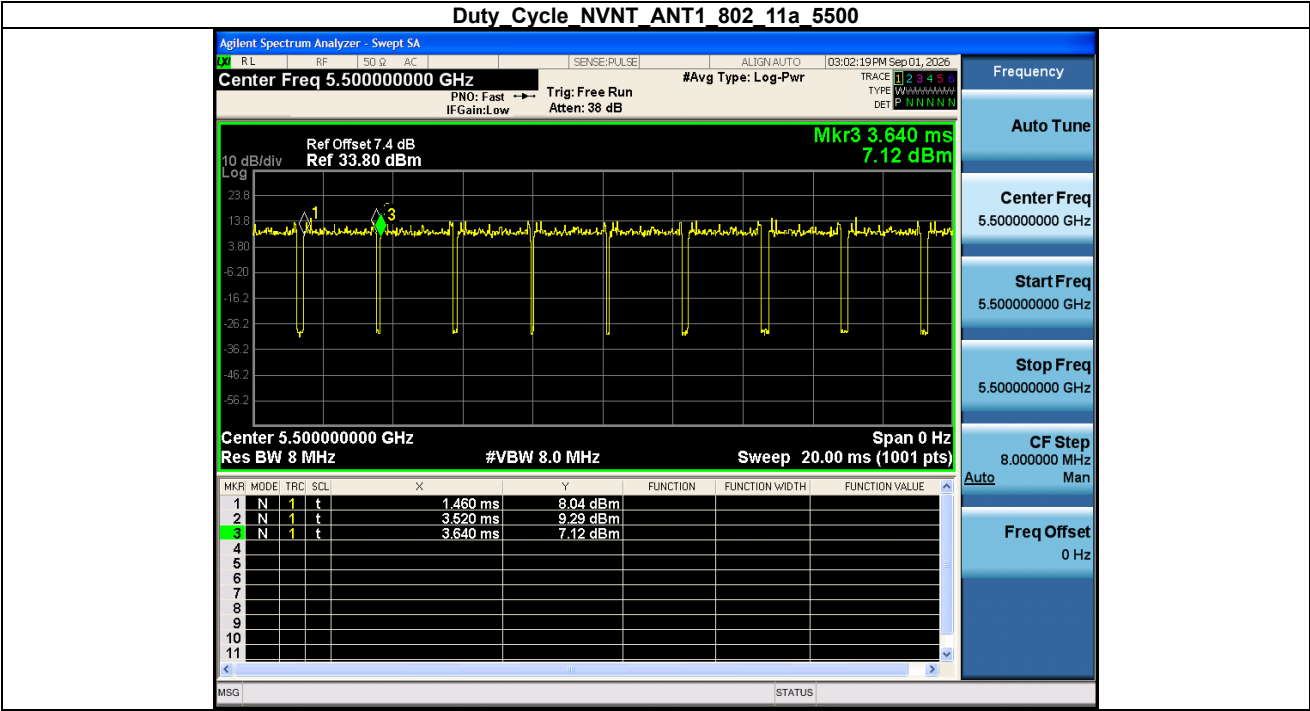


Duty Cycle NVNT ANT1 802 11a 5600

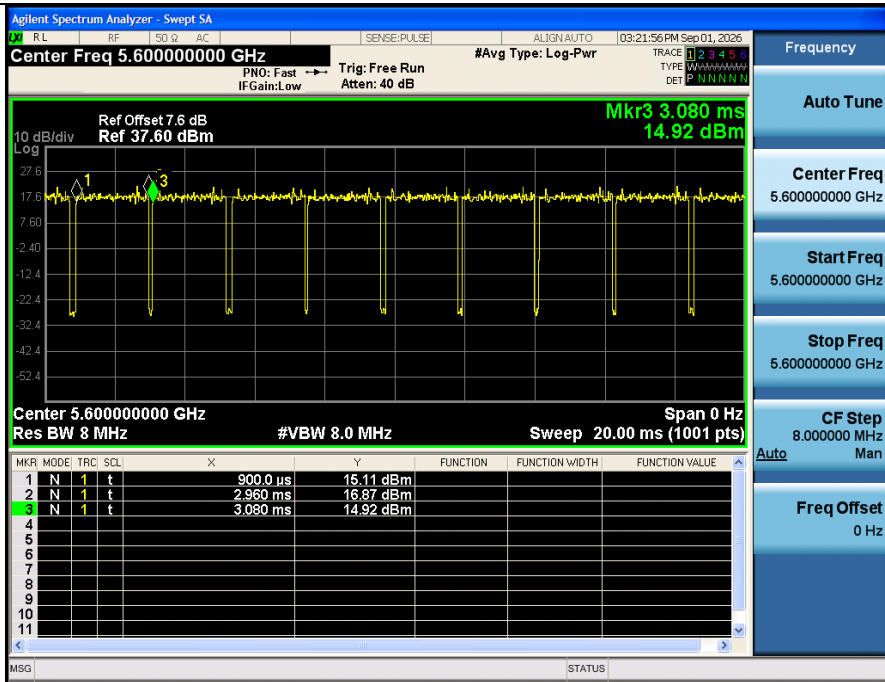


Duty Cycle NVNT ANT1 802_11a 5700

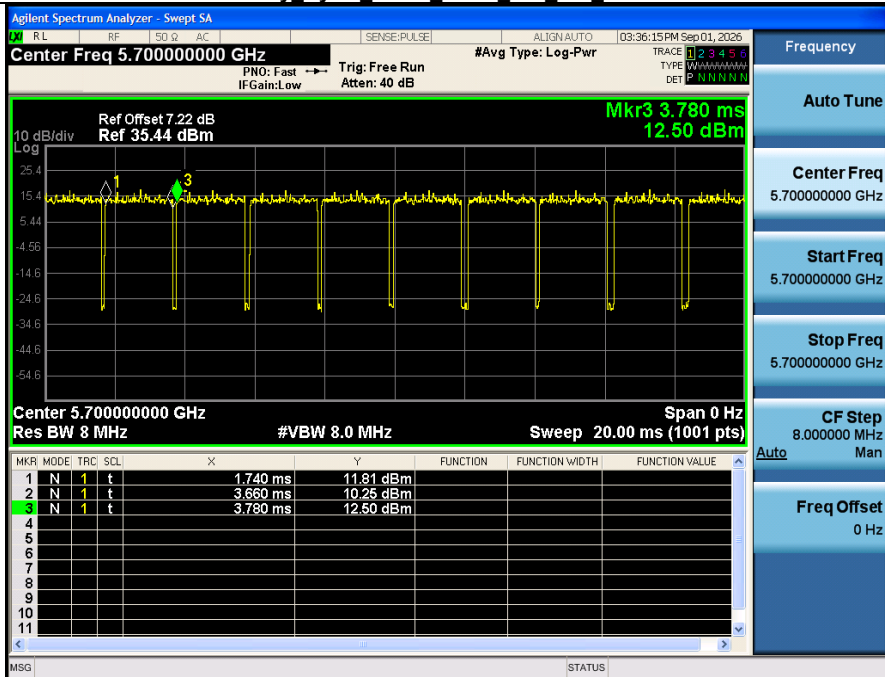


Duty Cycle NVNT ANT1 802_11n(HT20)_5500

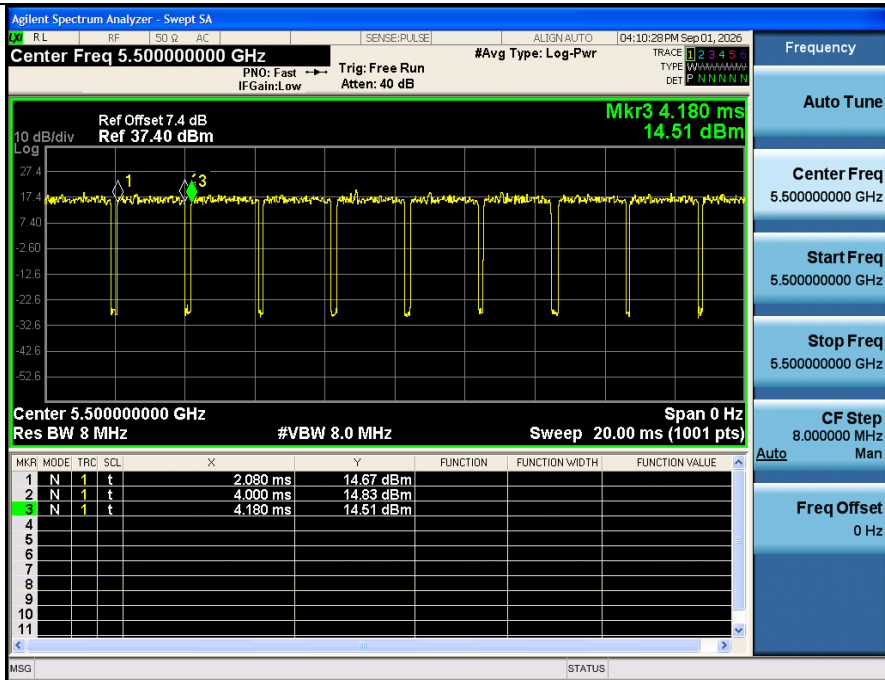


Duty Cycle NVNT ANT1_802_11n(HT20)_5600

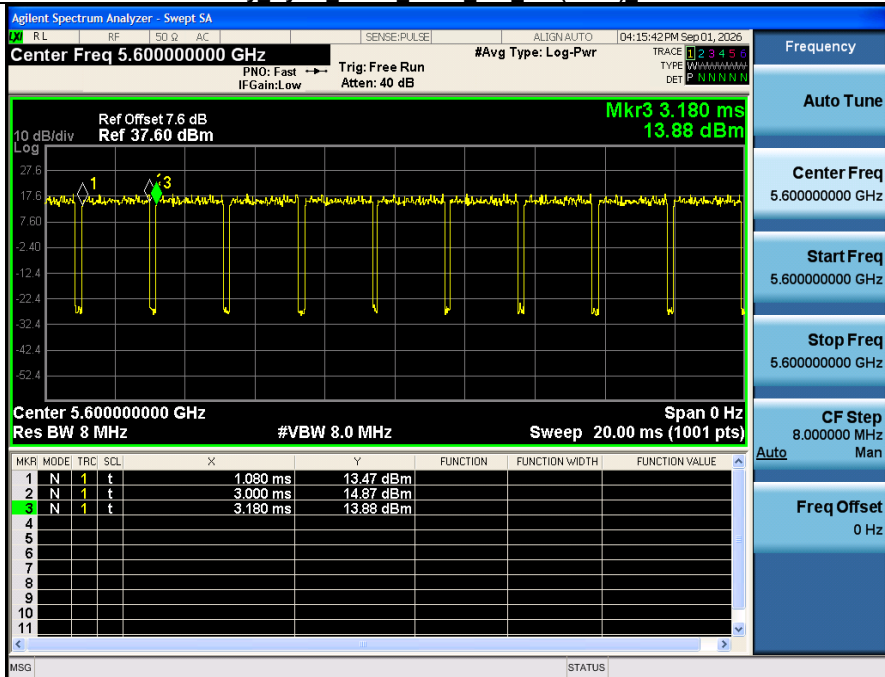


Duty Cycle NVNT ANT1_802_11n(HT20)_5700

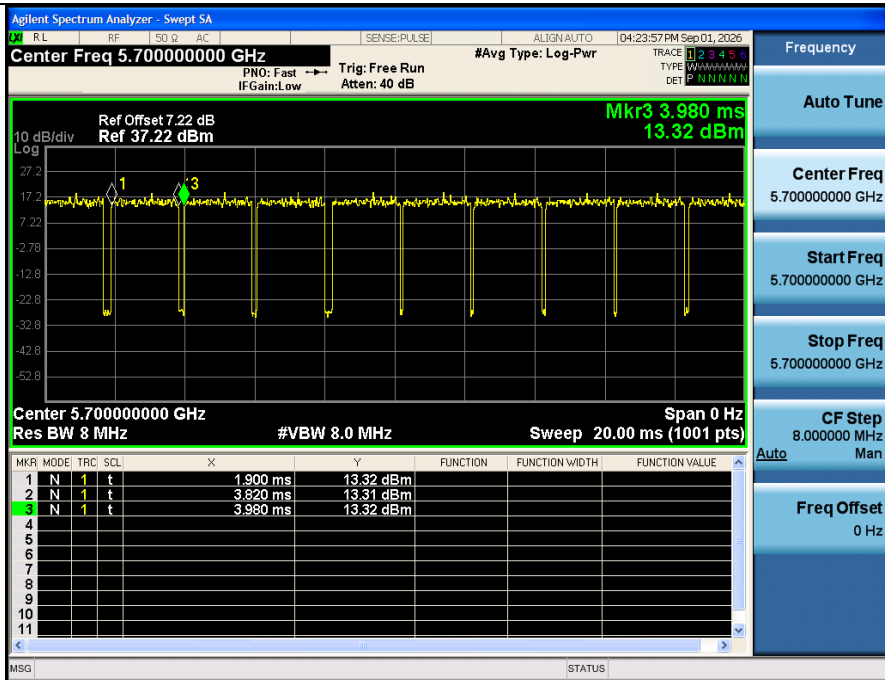


Duty_Cycle_NVNT_ANT1_802_11ac(VHT20)_5500

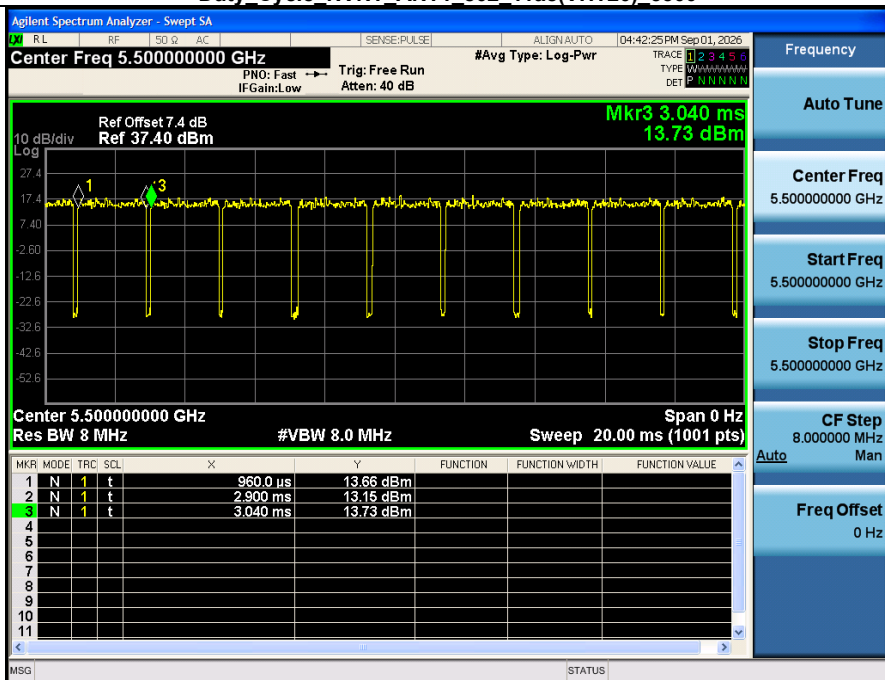


Duty_Cycle_NVNT_ANT1_802_11ac(VHT20)_5600

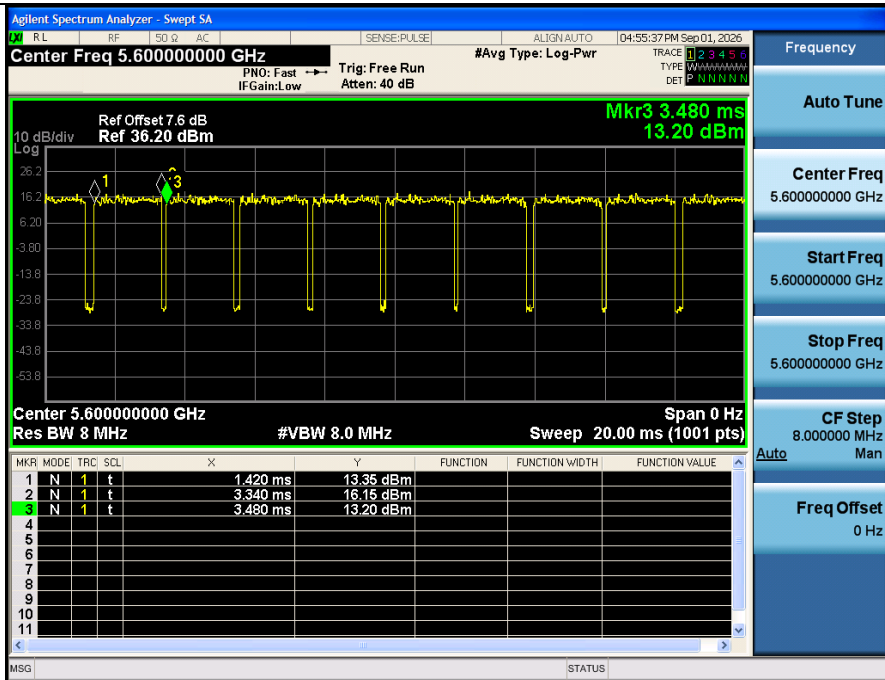


Duty Cycle NVNT ANT1 802_11ac(VHT20) 5700

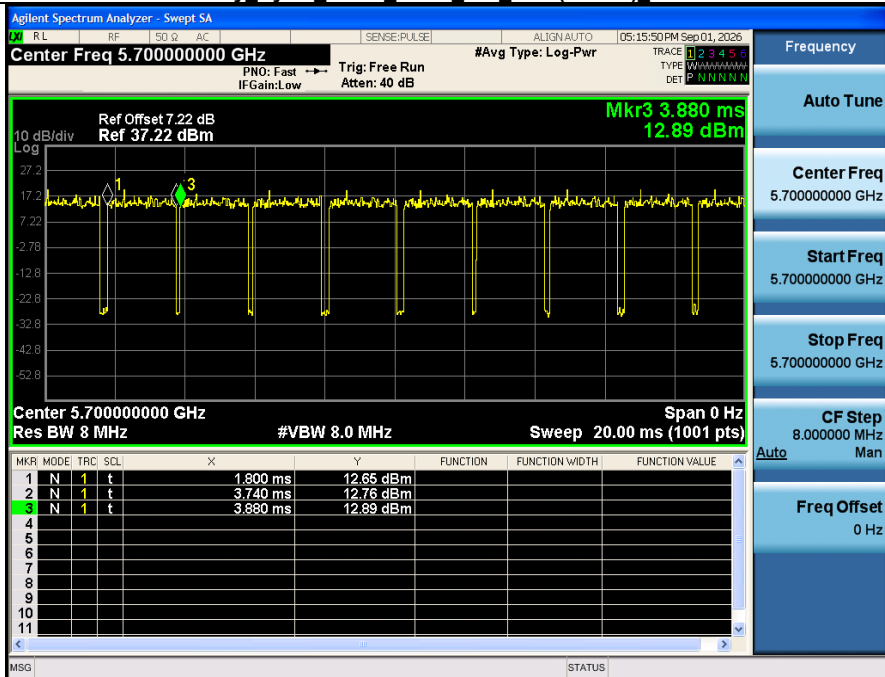


Duty Cycle NVNT ANT1 802_11n(HT40)_5510

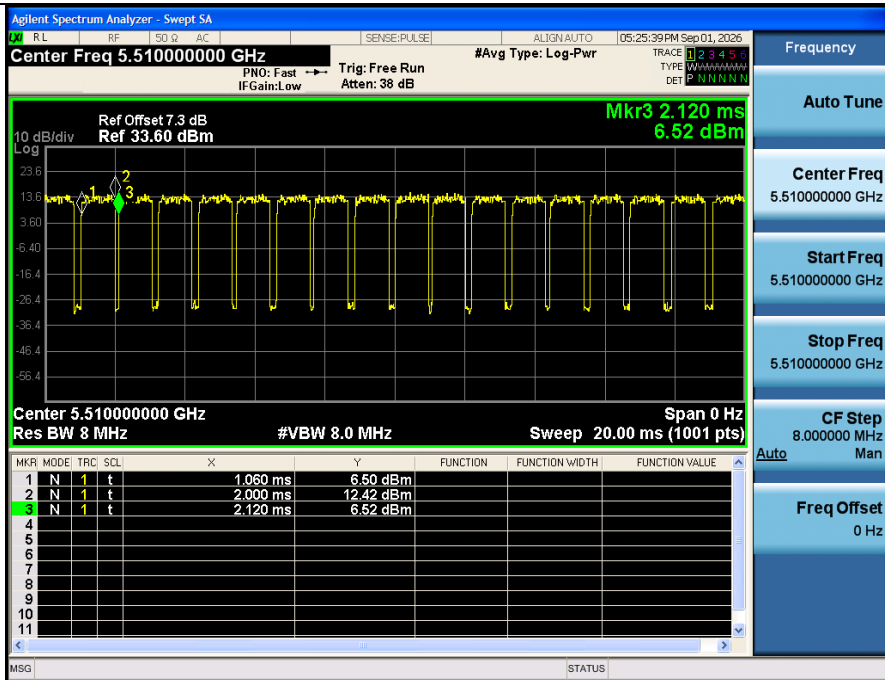


Duty Cycle NVNT ANT1_802_11n(HT40)_5590

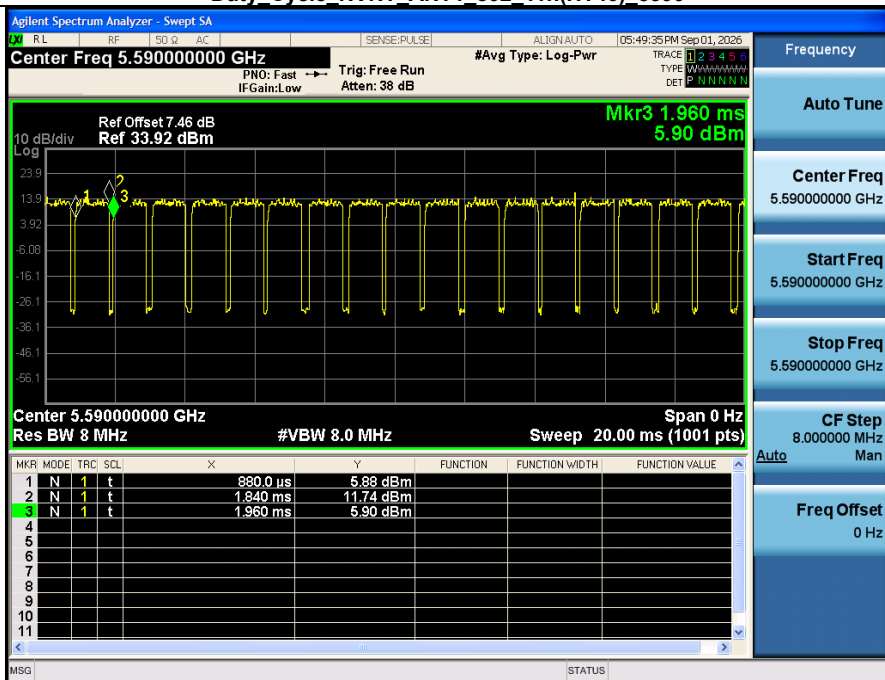


Duty Cycle NVNT ANT1_802_11n(HT40)_5670

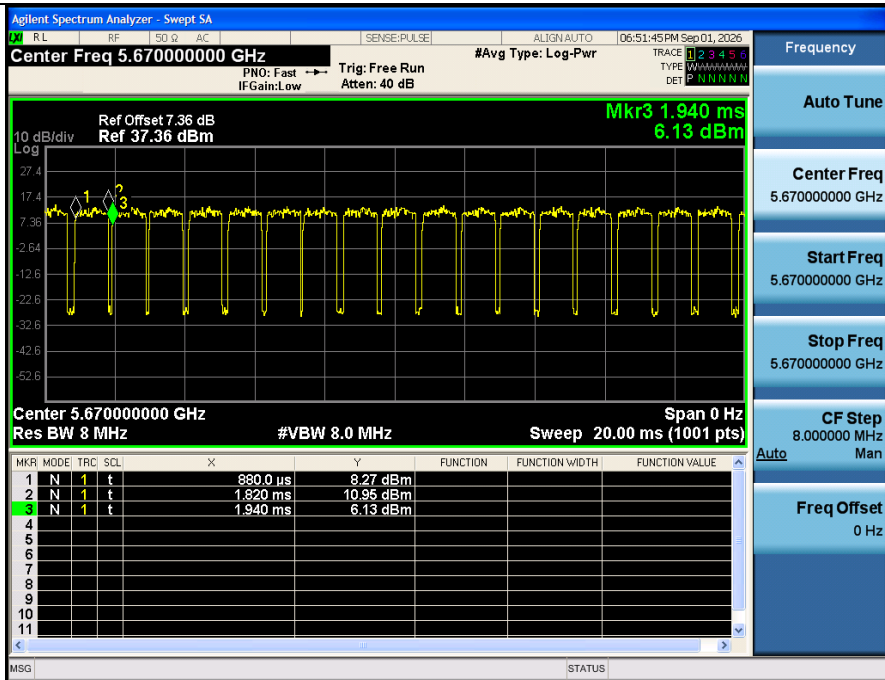


Duty Cycle NVNT ANT1 802_11ac(VHT40)_5510

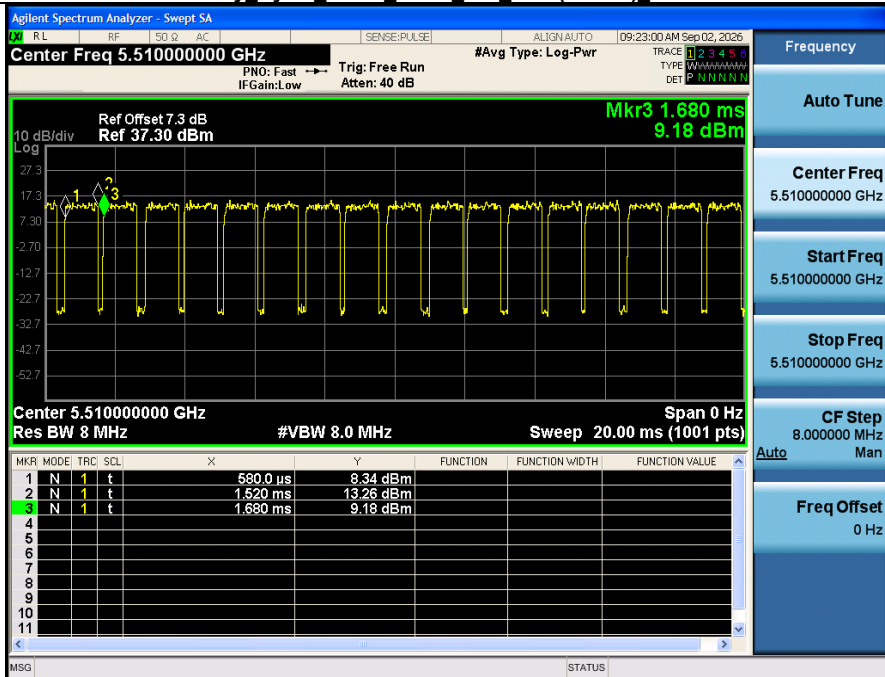


Duty Cycle NVNT ANT1 802_11ac(VHT40)_5590

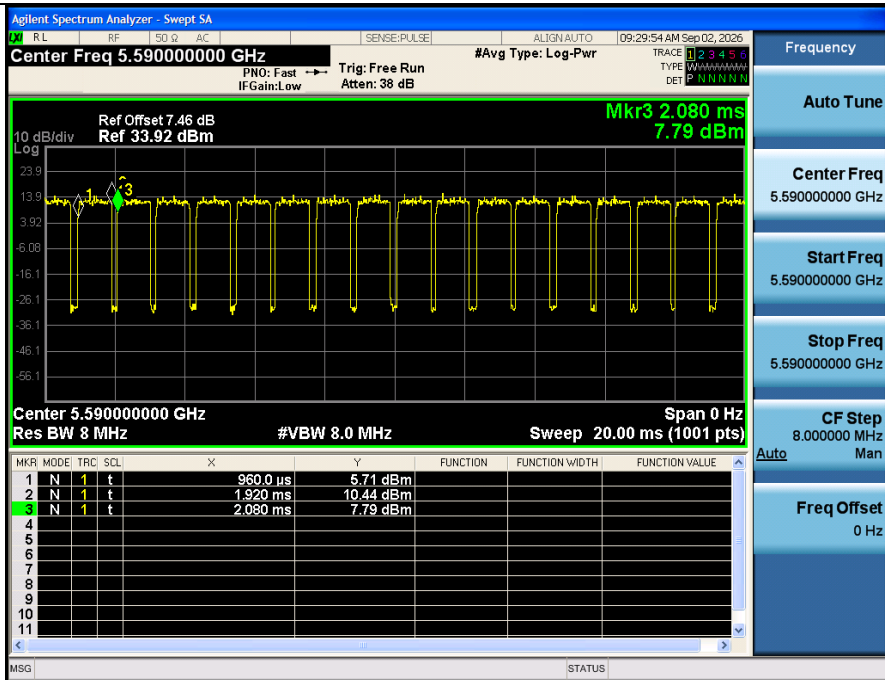


Duty_Cycle_NVNT_ANT1_802_11ac(VHT40)_5670

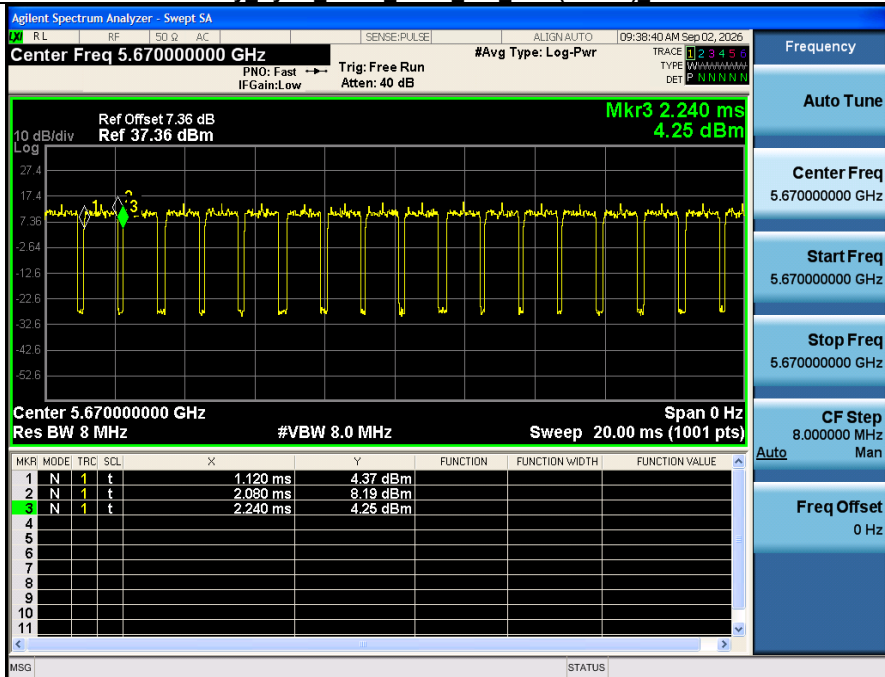


Duty_Cycle_NVNT_ANT1_802_11ac(VHT80)_5530

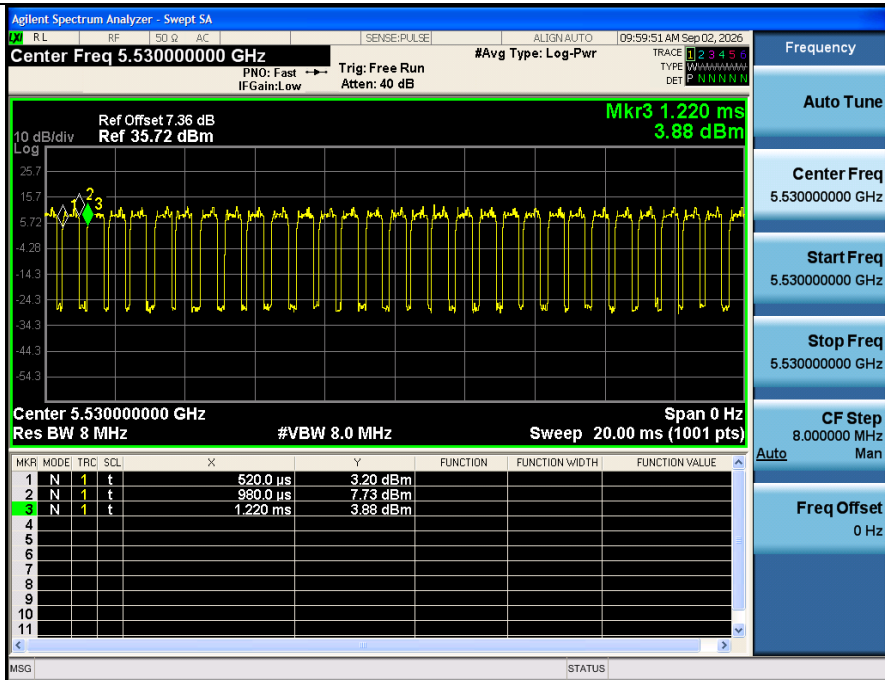


Duty Cycle NVNT ANT1 802_11ac(VHT80) 5610

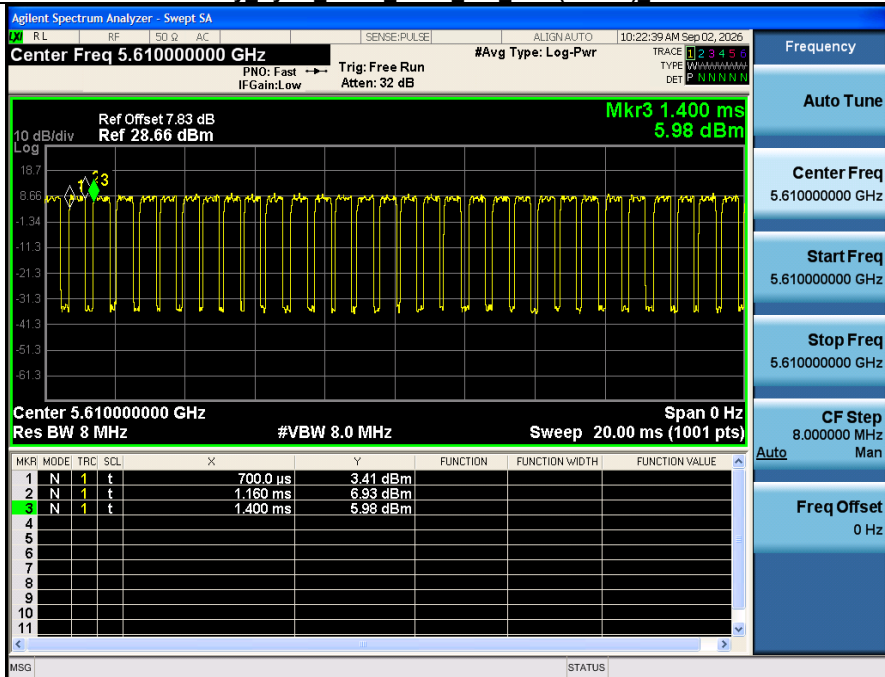


Duty Cycle NVNT ANT2 802_11a_5500

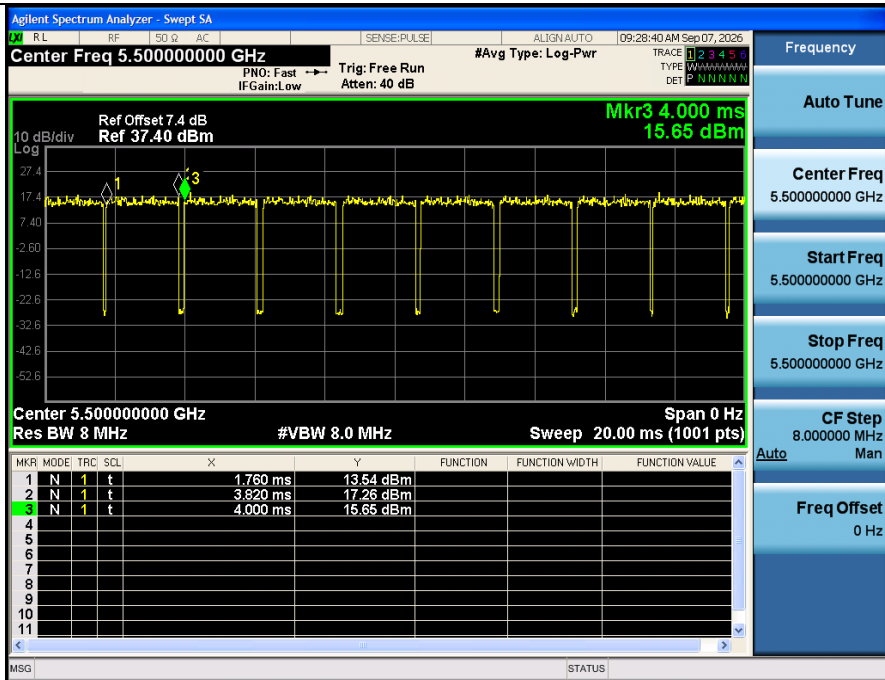


Duty Cycle NVNT ANT2_802_11a_5600

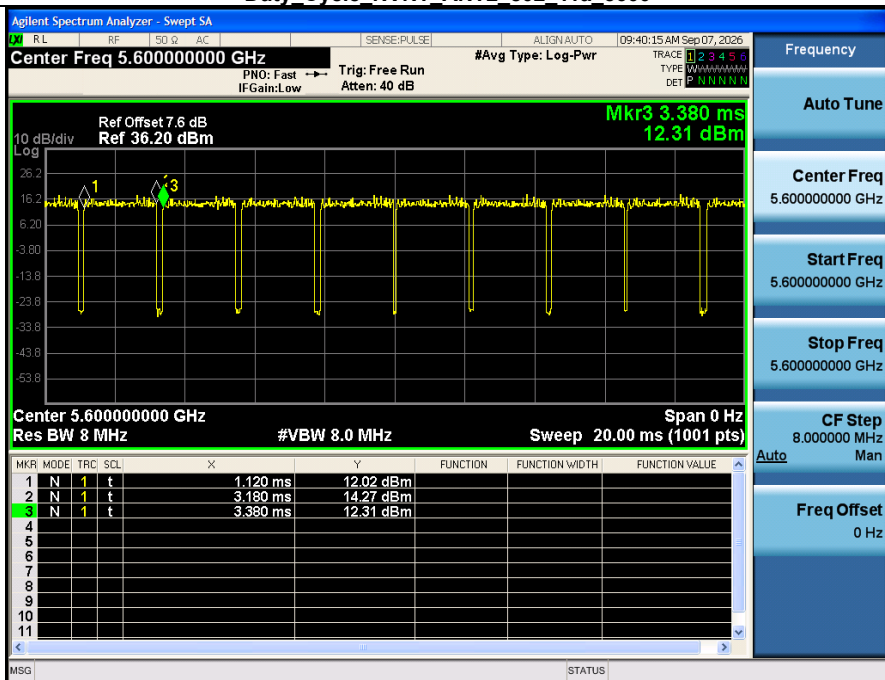


Duty Cycle NVNT ANT2_802_11a_5700

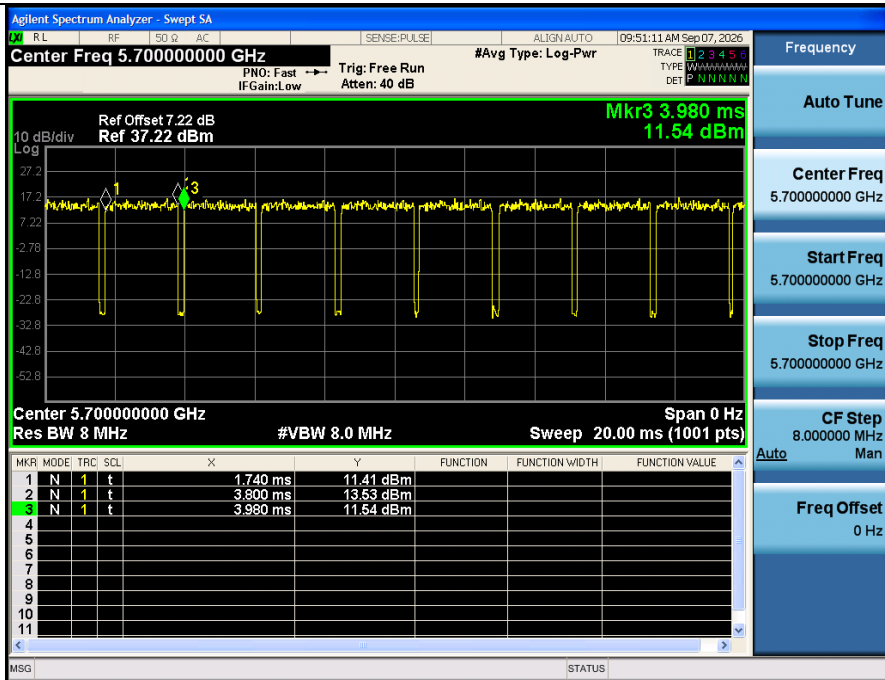


Duty Cycle NVNT ANT2 802 11n(HT20) 5500

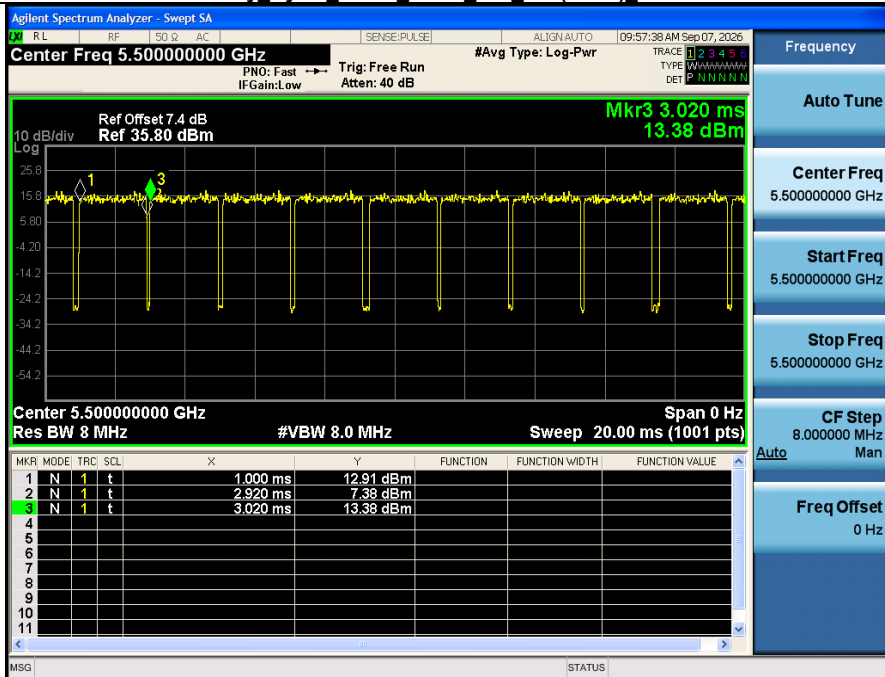


Duty Cycle NVNT ANT2 802 11n(HT20) 5600

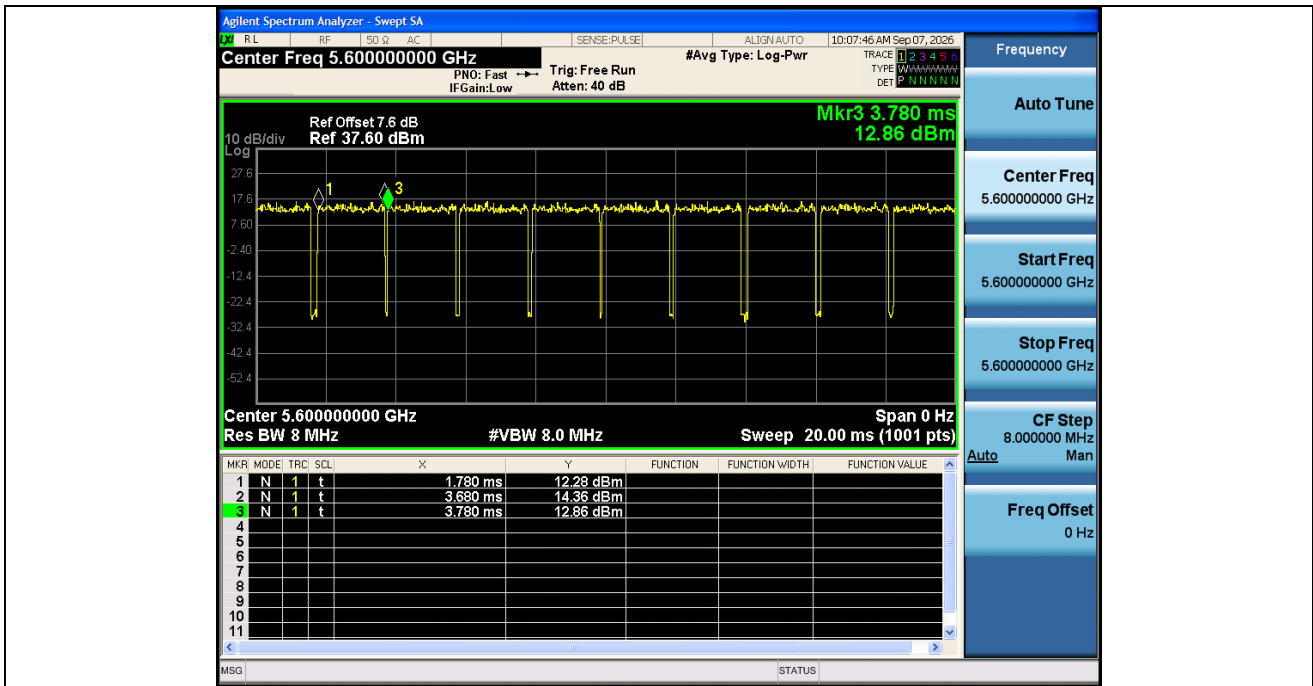


Duty_Cycle_NVNT_ANT2_802_11n(HT20)_5700

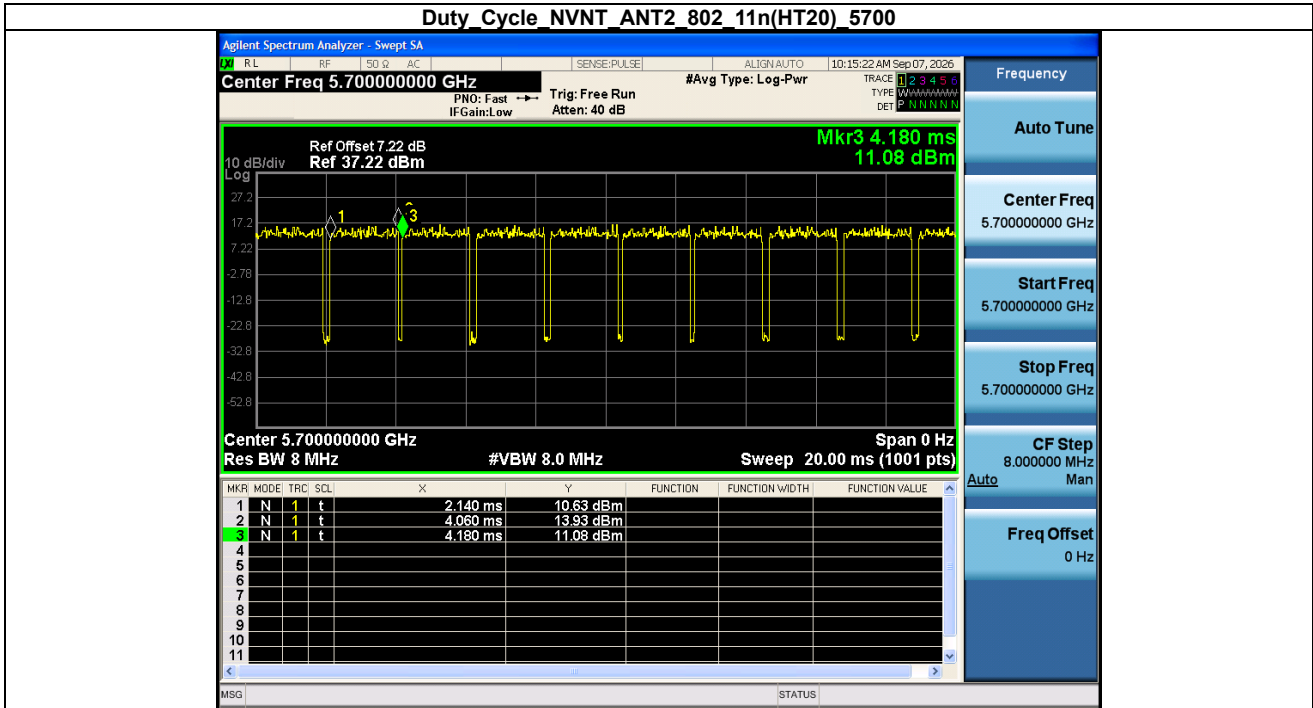


Duty_Cycle_NVNT_ANT2_802_11ac(VHT20)_5500

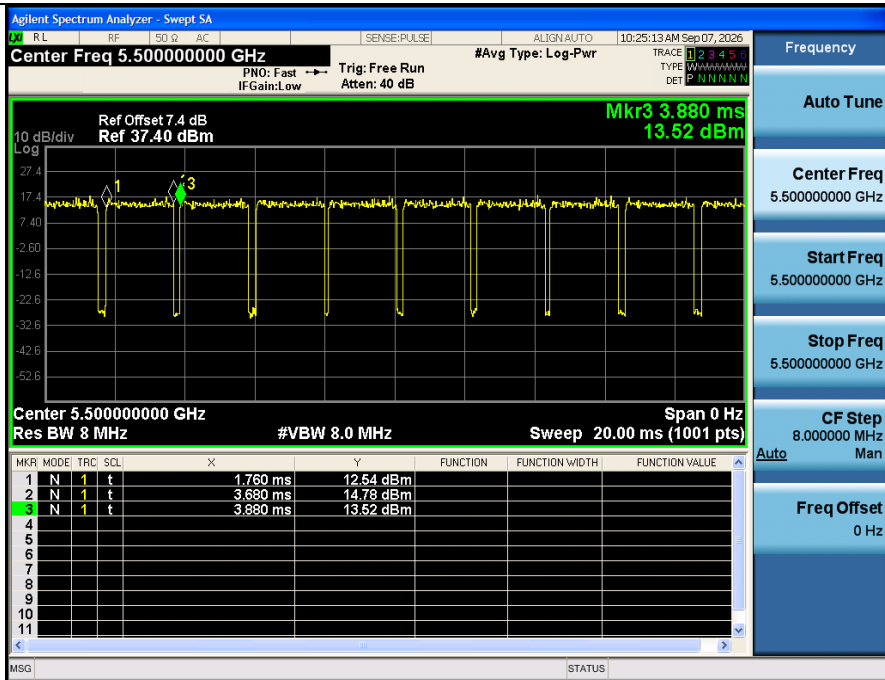


Duty_Cycle_NVNT_ANT2_802_11ac(VHT20)_5600

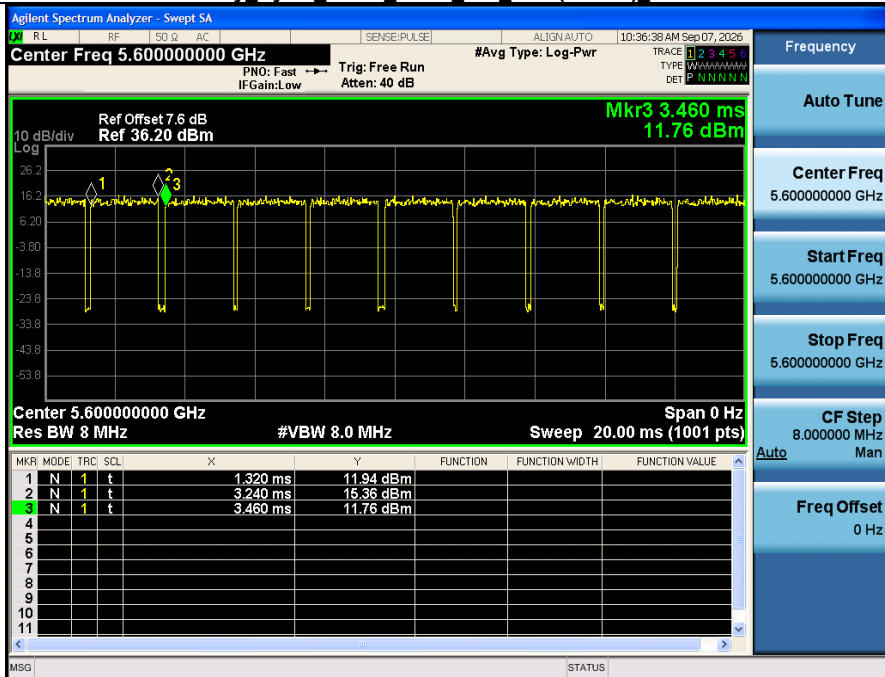


Duty_Cycle_NVNT_ANT2_802_11ac(VHT20)_5700

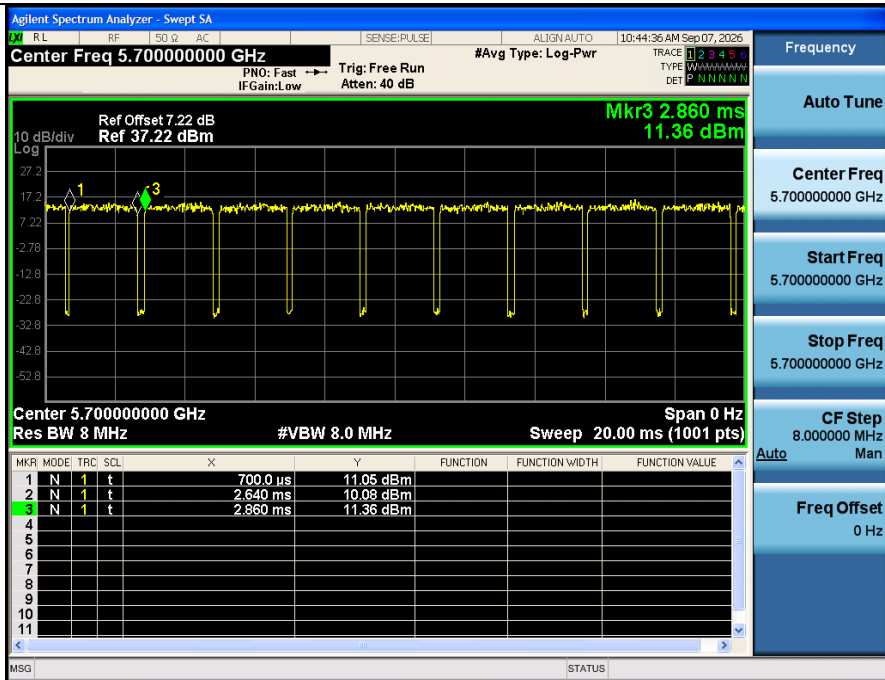


Duty_Cycle_NVNT_ANT2_802_11n(HT40)_5510

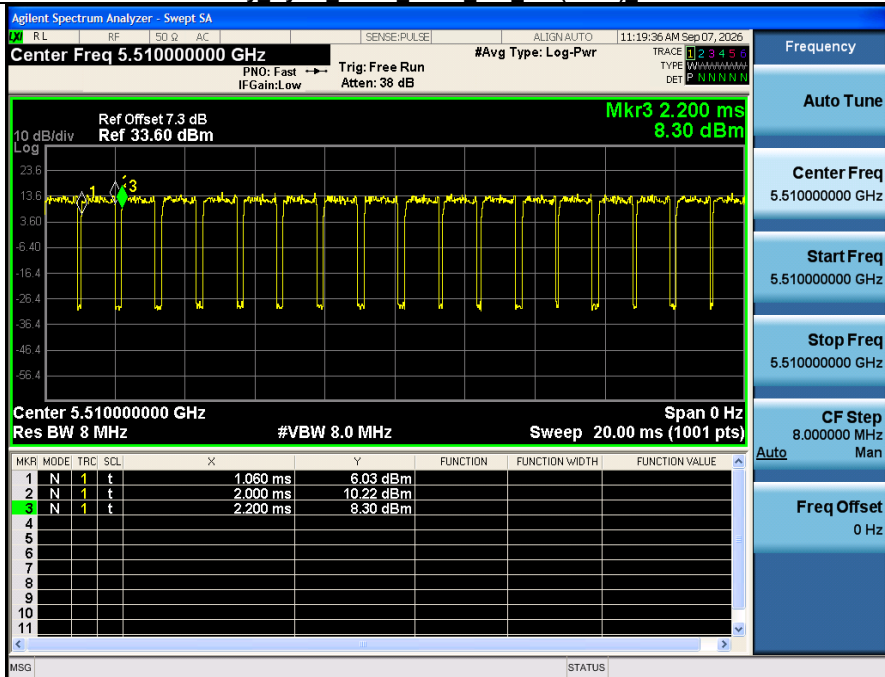


Duty_Cycle_NVNT_ANT2_802_11n(HT40)_5590

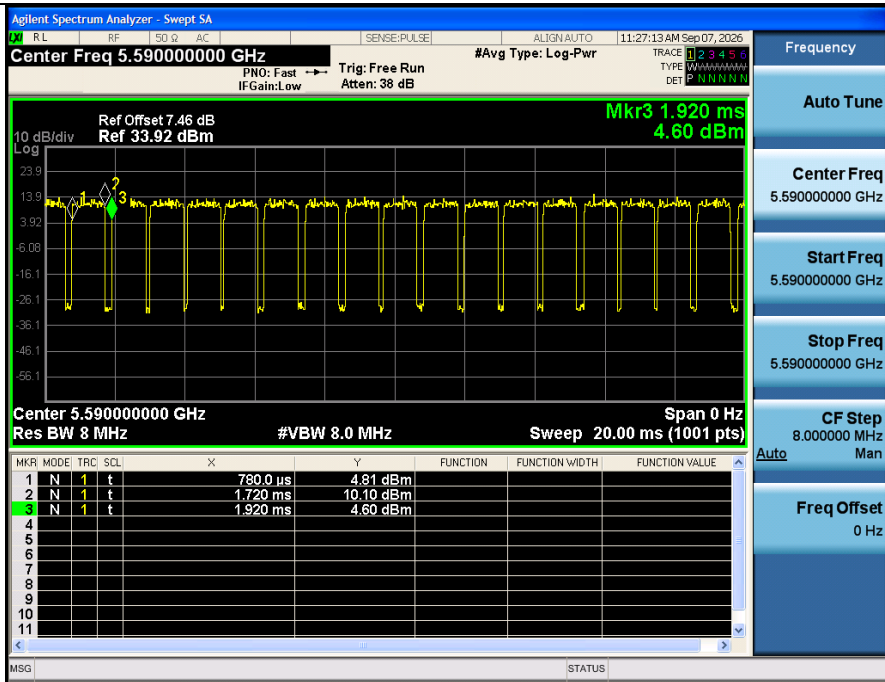


Duty Cycle NVNT ANT2 802 11n(HT40) 5670

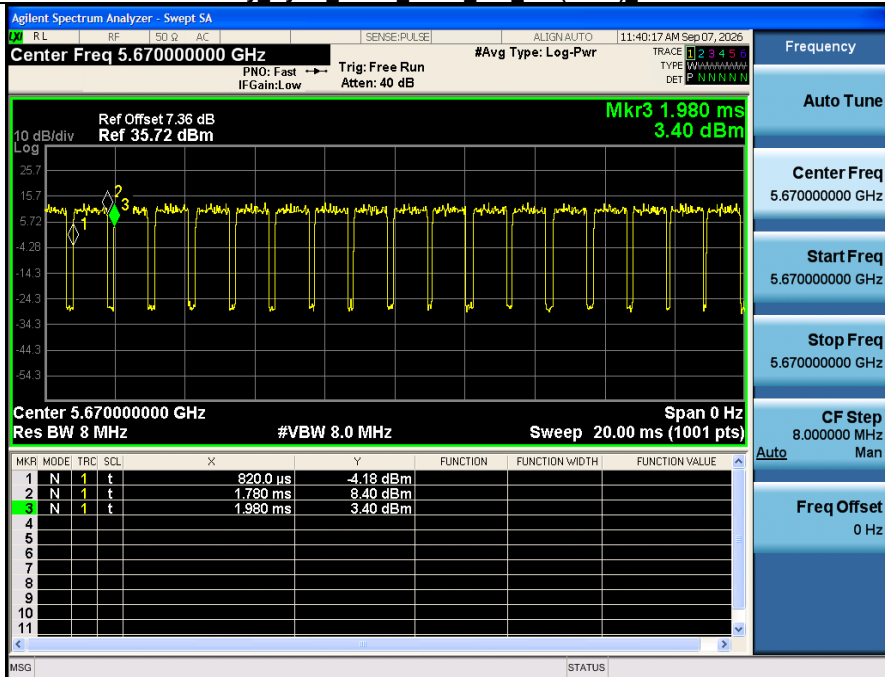


Duty Cycle NVNT ANT2 802 11ac(VHT40) 5510

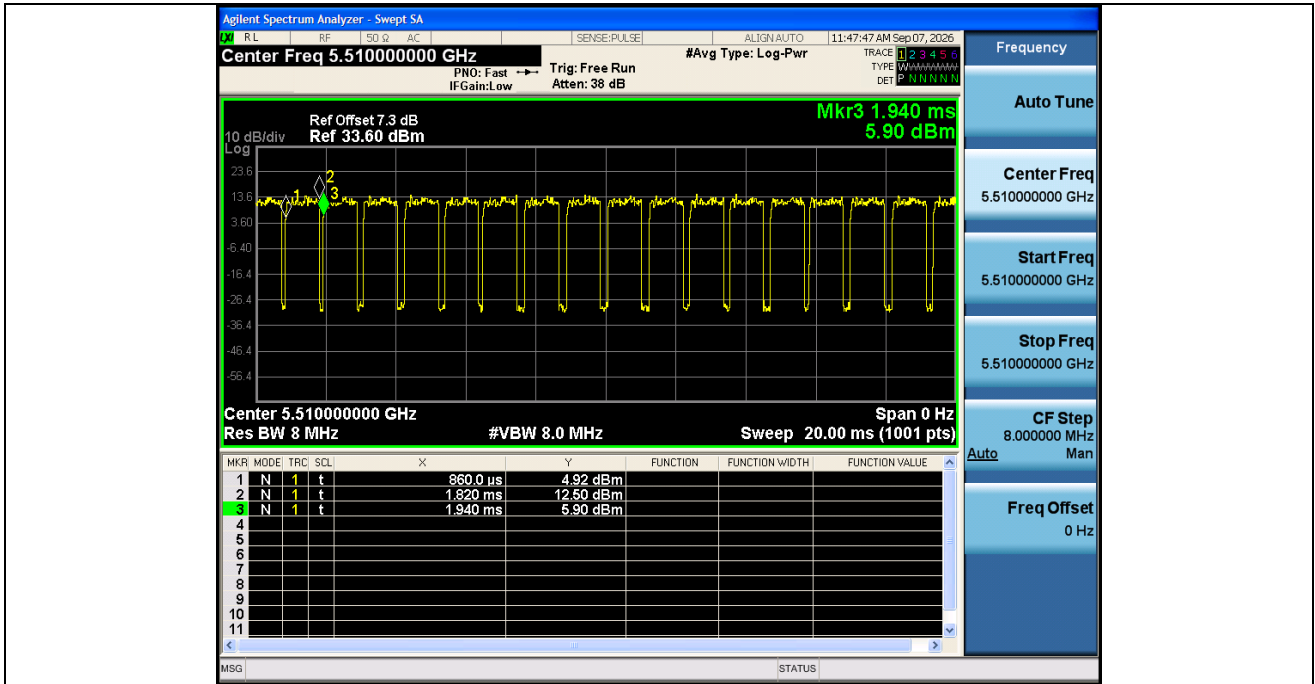


Duty_Cycle_NVNT_ANT2_802_11ac(VHT40)_5590

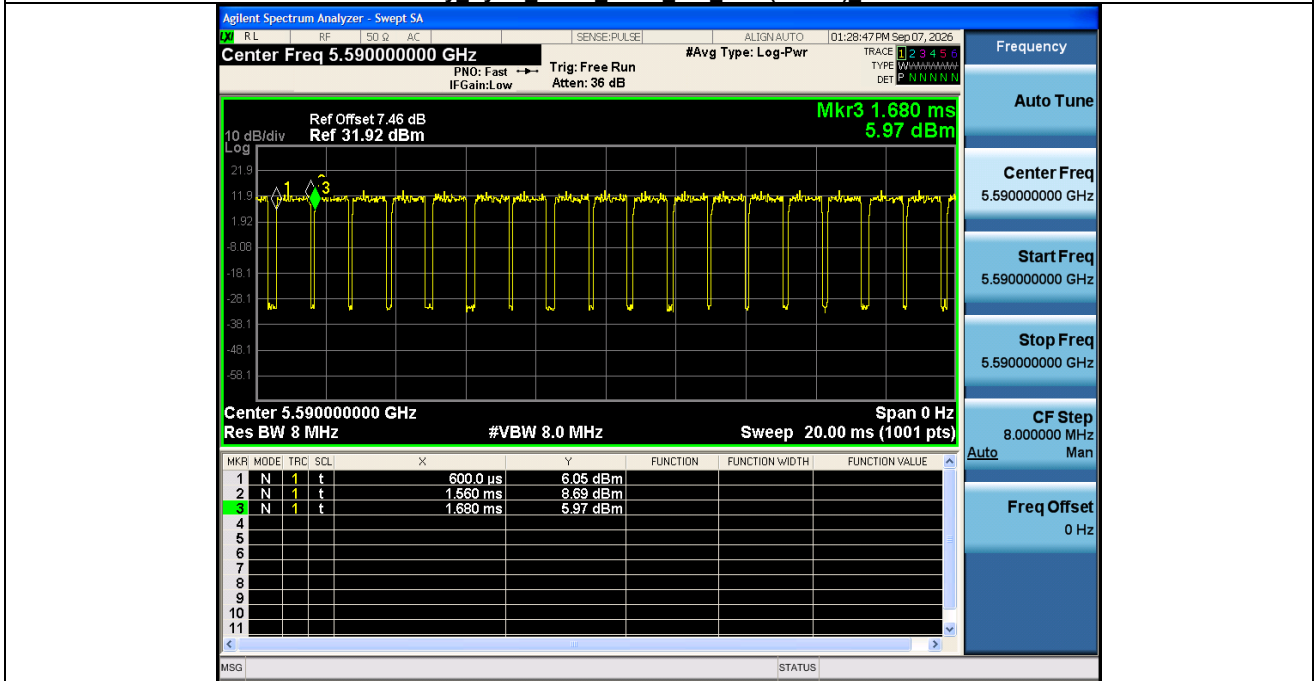


Duty_Cycle_NVNT_ANT2_802_11ac(VHT40)_5670

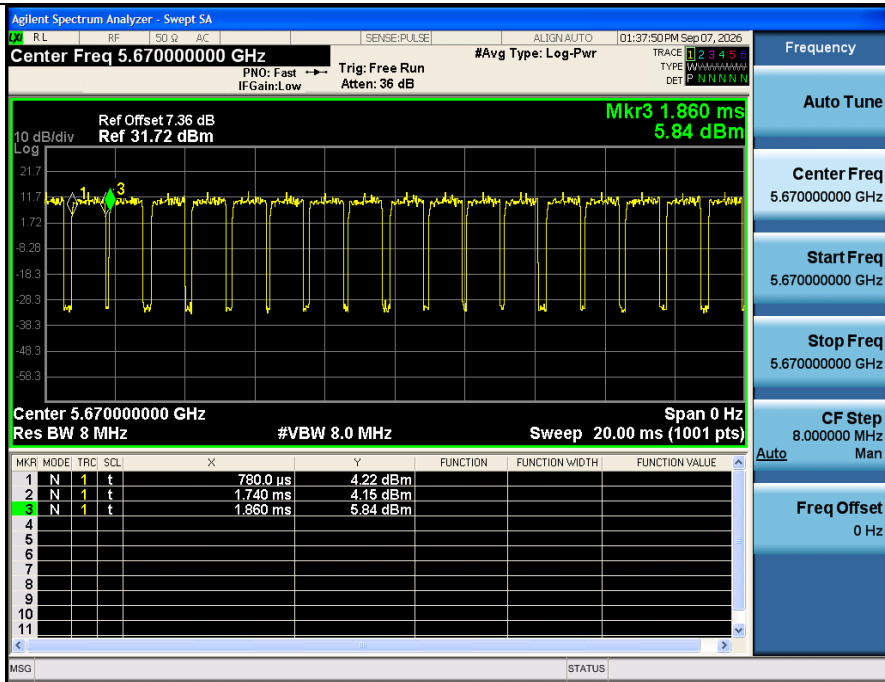

Duty_Cycle_NVNT_ANT2_802_11ac(VHT80)_5530

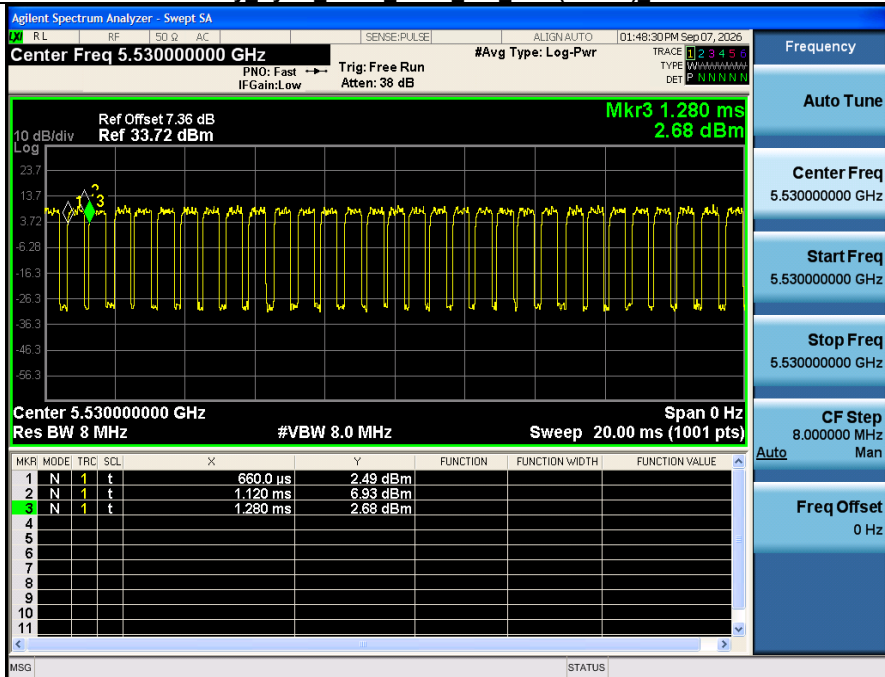

Duty_Cycle_NVNT_ANT2_802_11ac(VHT80)_5610

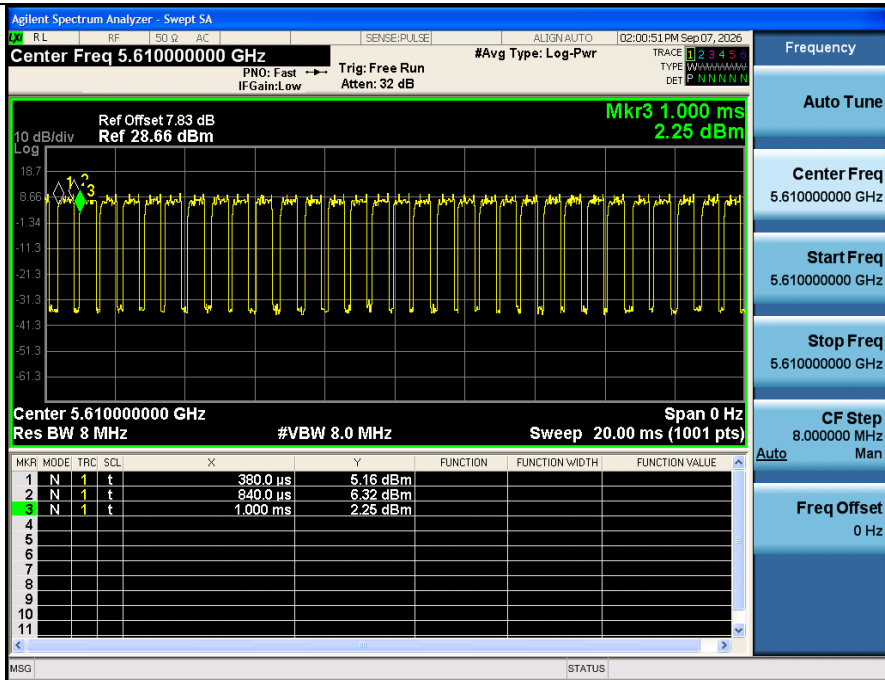

3. Maximum Conducted Output Power

Condition	Antenna	Modulation	Frequency(MHz)	Conducted Power(dBm)	E.I.R.P Power(dBm)	E.I.R.P limit(dBm)	IC Conducted limit(dBm)	FCC Conducted limit(dBm)	Result
NVNT	ANT1	802.11a	5500.00	14.05	16.32	29.14	23.14	23.98	Pass
NVNT	ANT1	802.11a	5600.00	13.96	16.23	29.12	23.12	23.98	Pass
NVNT	ANT1	802.11a	5700.00	13.81	16.08	29.13	23.13	23.98	Pass
NVNT	ANT1	802.11n(HT20)	5500.00	12.86	15.13	29.44	23.44	23.98	Pass
NVNT	ANT1	802.11n(HT20)	5600.00	12.71	14.98	29.43	23.43	23.98	Pass
NVNT	ANT1	802.11n(HT20)	5700.00	12.93	15.20	29.44	23.44	23.98	Pass
NVNT	ANT1	802.11ac(VHT20)	5500.00	12.94	15.21	29.44	23.44	23.98	Pass
NVNT	ANT1	802.11ac(VHT20)	5600.00	12.74	15.01	29.43	23.43	23.98	Pass
NVNT	ANT1	802.11ac(VHT20)	5700.00	12.97	15.24	29.43	23.43	23.98	Pass
NVNT	ANT1	802.11n(HT40)	5510.00	11.92	14.19	30	23.98	23.98	Pass
NVNT	ANT1	802.11n(HT40)	5590.00	11.89	14.16	30	23.98	23.98	Pass
NVNT	ANT1	802.11n(HT40)	5670.00	11.89	14.16	30	23.98	23.98	Pass
NVNT	ANT1	802.11ac(VHT40)	5510.00	11.76	14.03	30	23.98	23.98	Pass
NVNT	ANT1	802.11ac(VHT40)	5590.00	11.71	13.98	30	23.98	23.98	Pass
NVNT	ANT1	802.11ac(VHT40)	5670.00	11.78	14.05	30	23.98	23.98	Pass
NVNT	ANT1	802.11ac(VHT80)	5530.00	10.93	13.20	30	23.98	23.98	Pass
NVNT	ANT1	802.11ac(VHT80)	5610.00	10.81	13.08	30	23.98	23.98	Pass
NVNT	ANT2	802.11a	5500.00	13.62	15.84	29.12	23.12	23.98	Pass
NVNT	ANT2	802.11a	5600.00	13.52	15.74	29.12	23.12	23.98	Pass
NVNT	ANT2	802.11a	5700.00	13.45	15.67	29.12	23.12	23.98	Pass
NVNT	ANT2	802.11n(HT20)	5500.00	12.67	14.89	29.43	23.43	23.98	Pass
NVNT	ANT2	802.11n(HT20)	5600.00	12.41	14.63	29.43	23.43	23.98	Pass
NVNT	ANT2	802.11n(HT20)	5700.00	12.67	14.89	29.44	23.44	23.98	Pass
NVNT	ANT2	802.11ac(VHT20)	5500.00	12.66	14.88	29.43	23.43	23.98	Pass
NVNT	ANT2	802.11ac(VHT20)	5600.00	12.74	14.96	29.43	23.43	23.98	Pass
NVNT	ANT2	802.11ac(VHT20)	5700.00	12.64	14.86	29.43	23.43	23.98	Pass
NVNT	ANT2	802.11n(HT40)	5510.00	11.55	13.77	30	23.98	23.98	Pass
NVNT	ANT2	802.11n(HT40)	5590.00	11.33	13.55	30	23.98	23.98	Pass
NVNT	ANT2	802.11n(HT40)	5670.00	11.41	13.63	30	23.98	23.98	Pass
NVNT	ANT2	802.11ac(VHT40)	5510.00	11.30	13.52	30	23.98	23.98	Pass
NVNT	ANT2	802.11ac(VHT40)	5590.00	11.26	13.48	30	23.98	23.98	Pass
NVNT	ANT2	802.11ac(VHT40)	5670.00	11.32	13.54	30	23.98	23.98	Pass
NVNT	ANT2	802.11ac(VHT80)	5530.00	10.39	12.61	30	23.98	23.98	Pass
NVNT	ANT2	802.11ac(VHT80)	5610.00	10.53	12.75	30	23.98	23.98	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	E.I.R.P Power(dBm)	E.I.R.P limit(dBm)	IC Conducted limit(dBm)	FCC Conducted limit(dBm)	Result
NVNT	MIMO	802.11n(HT20)	5500.00	15.57	20.83	29.43	23.43	23.98	Pass
NVNT	MIMO	802.11n(HT20)	5600.00	15.81	21.07	29.43	23.43	23.98	Pass
NVNT	MIMO	802.11n(HT20)	5700.00	15.81	21.07	29.43	23.43	23.98	Pass
NVNT	MIMO	802.11ac(VHT20)	5500.00	15.75	21.01	29.43	23.43	23.98	Pass
NVNT	MIMO	802.11ac(VHT20)	5600.00	15.82	21.08	29.43	23.43	23.98	Pass
NVNT	MIMO	802.11ac(VHT20)	5700.00	14.75	20.01	29.43	23.43	23.98	Pass
NVNT	MIMO	802.11n(HT40)	5510.00	14.63	19.89	30	23.98	23.98	Pass
NVNT	MIMO	802.11n(HT40)	5590.00	14.67	19.93	30	23.98	23.98	Pass
NVNT	MIMO	802.11n(HT40)	5670.00	14.55	19.81	30	23.98	23.98	Pass
NVNT	MIMO	802.11ac(VHT40)	5510.00	14.50	19.76	30	23.98	23.98	Pass
NVNT	MIMO	802.11ac(VHT40)	5590.00	14.57	19.83	30	23.98	23.98	Pass
NVNT	MIMO	802.11ac(VHT40)	5670.00	13.68	18.94	30	23.98	23.98	Pass
NVNT	MIMO	802.11ac(VHT80)	5530.00	13.68	18.94	30	23.98	23.98	Pass
NVNT	MIMO	802.11ac(VHT80)	5610.00	15.57	20.83	30	23.98	23.98	Pass

Note 1: EIRP= Output Power + Antenna Gain, Ant 1 Gain=2.27dBi, Ant 2 Gain=2.22dBi, Directional gain: 5.26dBi

Note 2: MIMO=Ant 1 + Ant 2

Note 3: The maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 99% EBW emission bandwidth in megahertz.

Note 4: The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log10B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.


4. Power Spectral Density

Condition	Antenna	Modulation	Frequency (MHz)	PSD (dBm/MHz)	Duty factor(dB)	Total PSD (dBm/MHz)	limit(dBm)	Result
NVNT	ANT1	802.11a	5500.00	-0.89	0.25	-0.64	11	Pass
NVNT	ANT1	802.11a	5600.00	-2.01	0.25	-1.76	11	Pass
NVNT	ANT1	802.11a	5700.00	-1.48	0.26	-1.22	11	Pass
NVNT	ANT1	802.11n(HT20)	5500.00	-3.44	0.47	-2.97	11	Pass
NVNT	ANT1	802.11n(HT20)	5600.00	-3.45	0.39	-3.06	11	Pass
NVNT	ANT1	802.11n(HT20)	5700.00	-2.52	0.35	-2.17	11	Pass
NVNT	ANT1	802.11ac(VHT20)	5500.00	-4.14	0.30	-3.84	11	Pass
NVNT	ANT1	802.11ac(VHT20)	5600.00	-5.99	0.31	-5.68	11	Pass
NVNT	ANT1	802.11ac(VHT20)	5700.00	-5.03	0.30	-4.73	11	Pass
NVNT	ANT1	802.11n(HT40)	5510.00	-12.58	0.52	-12.06	11	Pass
NVNT	ANT1	802.11n(HT40)	5590.00	-10.85	0.51	-10.34	11	Pass
NVNT	ANT1	802.11n(HT40)	5670.00	-10.16	0.52	-9.64	11	Pass
NVNT	ANT1	802.11ac(VHT40)	5510.00	-10.81	0.68	-10.13	11	Pass
NVNT	ANT1	802.11ac(VHT40)	5590.00	-13.97	0.67	-13.30	11	Pass
NVNT	ANT1	802.11ac(VHT40)	5670.00	-10.52	0.67	-9.85	11	Pass
NVNT	ANT1	802.11ac(VHT80)	5530.00	-23.15	1.82	-21.33	11	Pass
NVNT	ANT1	802.11ac(VHT80)	5610.00	-20.50	1.82	-18.68	11	Pass
NVNT	ANT2	802.11a	5500.00	-3.41	0.36	-3.05	11	Pass
NVNT	ANT2	802.11a	5600.00	-1.89	0.40	-1.49	11	Pass
NVNT	ANT2	802.11a	5700.00	-2.39	0.36	-2.03	11	Pass
NVNT	ANT2	802.11n(HT20)	5500.00	-2.44	0.22	-2.22	11	Pass
NVNT	ANT2	802.11n(HT20)	5600.00	-2.24	0.22	-2.02	11	Pass
NVNT	ANT2	802.11n(HT20)	5700.00	-2.73	0.26	-2.47	11	Pass
NVNT	ANT2	802.11ac(VHT20)	5500.00	-5.63	0.43	-5.20	11	Pass
NVNT	ANT2	802.11ac(VHT20)	5600.00	-5.40	0.47	-4.93	11	Pass
NVNT	ANT2	802.11ac(VHT20)	5700.00	-4.36	0.47	-3.89	11	Pass
NVNT	ANT2	802.11n(HT40)	5510.00	-11.03	0.84	-10.19	11	Pass
NVNT	ANT2	802.11n(HT40)	5590.00	-11.83	0.84	-10.99	11	Pass
NVNT	ANT2	802.11n(HT40)	5670.00	-12.28	0.82	-11.46	11	Pass
NVNT	ANT2	802.11ac(VHT40)	5510.00	-11.75	0.51	-11.24	11	Pass
NVNT	ANT2	802.11ac(VHT40)	5590.00	-11.17	0.51	-10.66	11	Pass
NVNT	ANT2	802.11ac(VHT40)	5670.00	-13.27	0.51	-12.76	11	Pass
NVNT	ANT2	802.11ac(VHT80)	5530.00	-22.48	1.30	-21.18	11	Pass
NVNT	ANT2	802.11ac(VHT80)	5610.00	-24.20	1.30	-22.90	11	Pass


Condition	Antenna	Modulation	Frequency (MHz)	PSD (dBm/MHz)	Conducted limit(dBm)	Result
NVNT	MIMO	802.11n(HT20)	5500.00	0.43	11	Pass
NVNT	MIMO	802.11n(HT20)	5600.00	0.50	11	Pass
NVNT	MIMO	802.11n(HT20)	5700.00	0.69	11	Pass
NVNT	MIMO	802.11ac(VHT20)	5500.00	-1.46	11	Pass
NVNT	MIMO	802.11ac(VHT20)	5600.00	-2.28	11	Pass
NVNT	MIMO	802.11ac(VHT20)	5700.00	-1.28	11	Pass
NVNT	MIMO	802.11n(HT40)	5510.00	-8.01	11	Pass
NVNT	MIMO	802.11n(HT40)	5590.00	-7.64	11	Pass
NVNT	MIMO	802.11n(HT40)	5670.00	-7.45	11	Pass
NVNT	MIMO	802.11ac(VHT40)	5510.00	-7.64	11	Pass
NVNT	MIMO	802.11ac(VHT40)	5590.00	-8.77	11	Pass
NVNT	MIMO	802.11ac(VHT40)	5670.00	-8.06	11	Pass
NVNT	MIMO	802.11ac(VHT80)	5530.00	-18.24	11	Pass
NVNT	MIMO	802.11ac(VHT80)	5610.00	-17.29	11	Pass

Note 2: MIMO=Ant 1 + Ant 2

Power_Spectral_Density_NVNT_ANT1_802_11a_5500

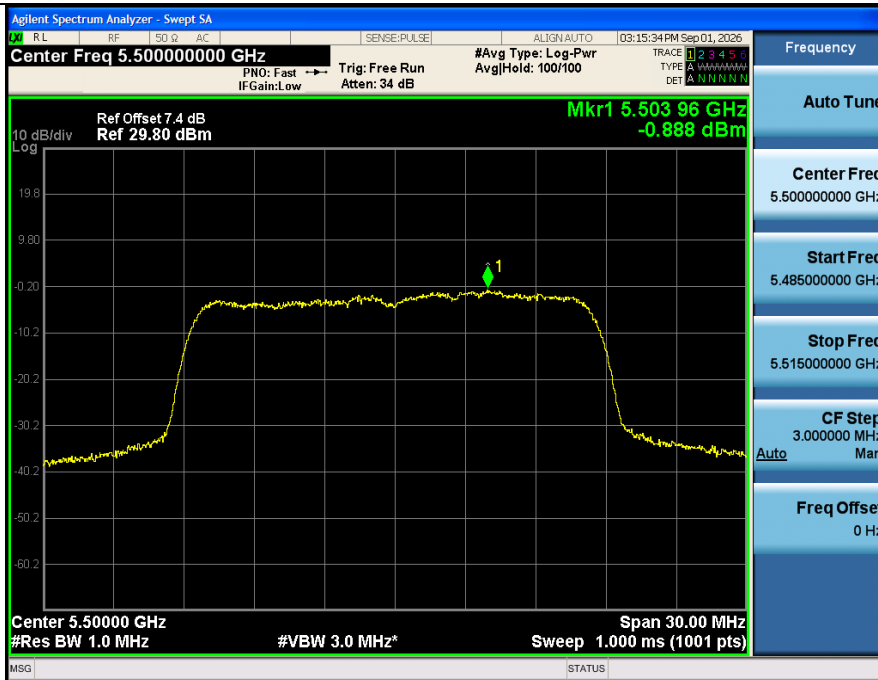

Power_Spectral_Density_NVNT_ANT1_802_11a_5600

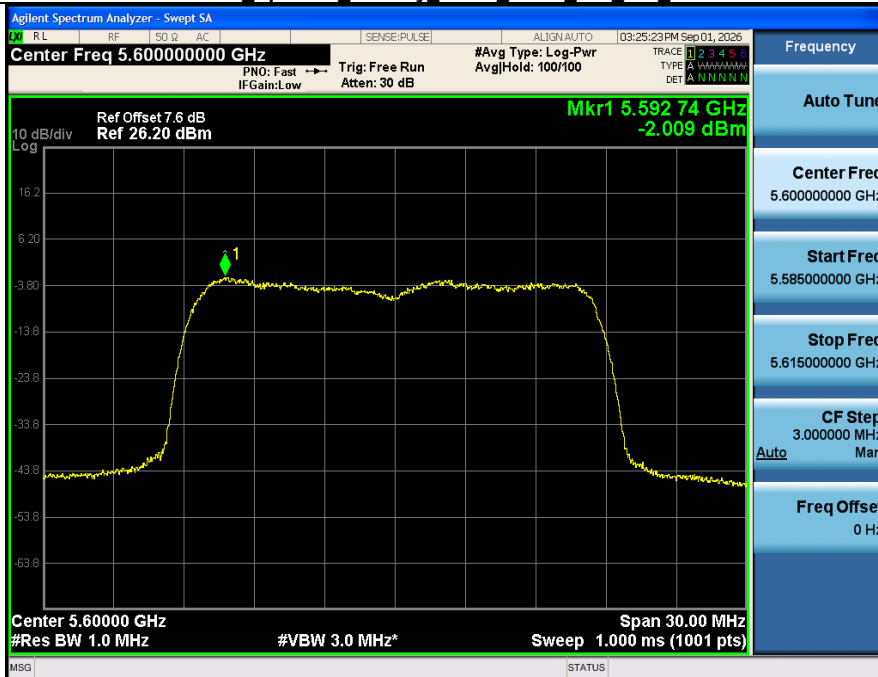

Power_Spectral_Density_NVNT_ANT1_802_11a_5700

