

Test mode:	802.11n20	Test channel:	Highest
------------	-----------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	51.6	-7.49	44.11	74	-29.89	Vertical
7386	46.36	-1.18	45.18	74	-28.82	Vertical
9848	46.7	1.12	47.82	74	-26.18	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	52.07	-7.49	44.58	74	-29.42	Horizontal
7386	50.01	-1.18	48.83	74	-25.17	Horizontal
9848	46.5	1.12	47.62	74	-26.38	Horizontal
12310	*	--		74		Horizontal
14772	*	--		74		Horizontal
17234	*	--		74		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	40.39	-7.49	32.9	74	-41.10	Vertical
7386	36.65	-1.18	35.47	74	-38.53	Vertical
9848	35.74	1.12	36.86	74	-37.14	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	41.21	-7.49	33.72	74	-40.28	Horizontal
7386	39.04	-1.18	37.86	74	-36.14	Horizontal
9848	36.03	1.12	37.15	74	-36.85	Horizontal
12310	*	--		74		Horizontal
14772	*	--		74		Horizontal
17234	*	--		74		Horizontal

Remark:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n40	Test channel:	Lowest
------------	-----------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844	49.43	-7.63	41.8	74	-32.20	Vertical
7266	46.06	-1.53	44.53	74	-29.47	Vertical
9688	44.17	1.24	45.41	74	-28.59	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4844	47.73	-7.63	40.1	74	-33.90	Horizontal
7266	44.36	-1.53	42.83	74	-31.17	Horizontal
9688	53.08	1.24	54.32	74	-19.68	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844	40.15	-7.63	32.52	74	-41.48	Vertical
7266	36.75	-1.53	35.22	74	-38.78	Vertical
9688	35.08	1.24	36.32	74	-37.68	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4844	40.16	-7.63	32.53	74	-41.47	Horizontal
7266	37.16	-1.53	35.63	74	-38.37	Horizontal
9688	36.82	1.24	38.06	74	-35.94	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Remark:

1. $Level = Read\ level + Factor$
2. $Factor = Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11n40	Test channel:	Middle
------------	-----------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	50.09	-7.58	42.51	74	-31.49	Vertical
7311	49.31	-1.4	47.91	74	-26.09	Vertical
9748	46.07	1.2	47.27	74	-26.73	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	51.07	-7.58	43.49	74	-30.51	Horizontal
7311	46.66	-1.4	45.26	74	-28.74	Horizontal
9748	45.46	1.2	46.66	74	-27.34	Horizontal
12185	*	--		74		Horizontal
14622	*	--		74		Horizontal
17059	*	--		74		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	41.36	-7.58	33.78	74	-40.22	Vertical
7311	38.39	-1.4	36.99	74	-37.01	Vertical
9748	36.61	1.2	37.81	74	-36.19	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	41.48	-7.58	33.9	74	-40.10	Horizontal
7311	38.79	-1.4	37.39	74	-36.61	Horizontal
9748	35.42	1.2	36.62	74	-37.38	Horizontal
12185	*	--		74		Horizontal
14622	*	--		74		Horizontal
17059	*	--		74		Horizontal

Remark:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11n40	Test channel:	Highest
------------	-----------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	49.92	-7.52	42.4	74	-31.60	Vertical
7356	45.52	-1.26	44.26	74	-29.74	Vertical
9808	47.13	1.16	48.29	74	-25.71	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4904	50.04	-7.52	42.52	74	-31.48	Horizontal
7356	48.75	-1.26	47.49	74	-26.51	Horizontal
9808	45.95	1.16	47.11	74	-26.89	Horizontal
12310	*	--		74		Horizontal
14772	*	--		74		Horizontal
17234	*	--		74		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	40.39	-7.52	32.87	74	-41.13	Vertical
7356	37.2	-1.26	35.94	74	-38.06	Vertical
9808	36.17	1.16	37.33	74	-36.67	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4904	41.49	-7.52	33.97	74	-40.03	Horizontal
7356	38.61	-1.26	37.35	74	-36.65	Horizontal
9808	36.04	1.16	37.2	74	-36.80	Horizontal
12310	*	--		74		Horizontal
14772	*	--		74		Horizontal
17234	*	--		74		Horizontal

Remark:

1. *Level = Read level + Factor*
2. *Factor =Antenna Factor + Cable Loss – Preamplifier Factor*
3. *“*” , means this data is the too weak instrument of signal is unable to test.*
4. *Emissions more than 20 dB below the limit do not need to be reported.*



Test mode:	802.11ax20	Test channel:	Lowest
------------	------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	52.4	-7.66	44.74	74	-29.26	Vertical
7236	46.9	-1.62	45.28	74	-28.72	Vertical
9648	47.8	1.27	49.07	74	-24.93	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4824	50.67	-7.66	43.01	74	-30.99	Horizontal
7236	47.16	-1.62	45.54	74	-28.46	Horizontal
9648	46.45	1.27	47.72	74	-26.28	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	41.78	-7.66	34.12	74	-39.88	Vertical
7236	38	-1.62	36.38	74	-37.62	Vertical
9648	37.19	1.27	38.46	74	-35.54	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4824	42.13	-7.66	34.47	74	-39.53	Horizontal
7236	38.05	-1.62	36.43	74	-37.57	Horizontal
9648	37.16	1.27	38.43	74	-35.57	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Remark:

5. $Level = Read\ level + Factor$
6. $Factor = Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$
7. “*”, means this data is the too weak instrument of signal is unable to test.
8. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11ax20	Test channel:	Middle
------------	------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	50.92	-7.58	43.34	74	-30.66	Vertical
7311	50.79	-1.4	49.39	74	-24.61	Vertical
9748	46.97	1.2	48.17	74	-25.83	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	52.45	-7.58	44.87	74	-29.13	Horizontal
7311	46.01	-1.4	44.61	74	-29.39	Horizontal
9748	48.1	1.2	49.3	74	-24.70	Horizontal
12185		--		74		Horizontal
14622	*	--		74		Horizontal
17059	*	--		74		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	42.66	-7.58	35.08	74	-38.92	Vertical
7311	39.52	-1.4	38.12	74	-35.88	Vertical
9748	38.27	1.2	39.47	74	-34.53	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	42.9	-7.58	35.32	74	-38.68	Horizontal
7311	39.15	-1.4	37.75	74	-36.25	Horizontal
9748	37.92	1.2	39.12	74	-34.88	Horizontal
12185	*	--		74		Horizontal
14622	*	--		74		Horizontal
17059	*	--		74		Horizontal

Remark:

5. $Level = Read\ level + Factor$
6. $Factor = Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$
7. “*”, means this data is the too weak instrument of signal is unable to test.
8. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11ax20	Test channel:	Highest
------------	------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	51.04	-7.49	43.55	74	-30.45	Vertical
7386	45.65	-1.18	44.47	74	-29.53	Vertical
9848	46.84	1.12	47.96	74	-26.04	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	51.75	-7.49	44.26	74	-29.74	Horizontal
7386	49.59	-1.18	48.41	74	-25.59	Horizontal
9848	46.98	1.12	48.1	74	-25.90	Horizontal
12310	*	--		74		Horizontal
14772	*	--		74		Horizontal
17234	*	--		74		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	40.4	-7.49	32.91	74	-41.09	Vertical
7386	35.89	-1.18	34.71	74	-39.29	Vertical
9848	35.48	1.12	36.6	74	-37.40	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	41.58	-7.49	34.09	74	-39.91	Horizontal
7386	38.46	-1.18	37.28	74	-36.72	Horizontal
9848	35.94	1.12	37.06	74	-36.94	Horizontal
12310	*	--		74		Horizontal
14772	*	--		74		Horizontal
17234	*	--		74		Horizontal

Remark:

5. $Level = Read\ level + Factor$
6. $Factor = Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$
7. “*”, means this data is the too weak instrument of signal is unable to test.
8. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11ax40	Test channel:	Lowest
------------	------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4844	49.53	-7.63	41.9	74	-32.10	Vertical
7266	45.43	-1.53	43.9	74	-30.10	Vertical
9688	43.96	1.24	45.2	74	-28.80	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4844	48.17	-7.63	40.54	74	-33.46	Horizontal
7266	45.11	-1.53	43.58	74	-30.42	Horizontal
9688	53.06	1.24	54.3	74	-19.70	Horizontal
12060	*	--		74		Horizontal
14472	*	--		74		Horizontal
16884	*	--		74		Horizontal

Average value:

Frequency (MHz)	Read Level (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4844	39.58	-7.63	31.95	74	-42.05	Vertical
7266	36.14	-1.53	34.61	74	-39.39	Vertical
9688	35.51	1.24	36.75	74	-37.25	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4844	40.64	-7.63	33.01	74	-40.99	Horizontal
7266	36.57	-1.53	35.04	74	-38.96	Horizontal
9688	37.12	1.24	38.36	74	-35.64	Horizontal
12060	*	--		74		Horizontal
14472	*	--		74		Horizontal
16884	*	--		74		Horizontal

Remark:

9. $Level = Read\ level + Factor$

10. $Factor = Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$

11. “*”, means this data is the too weak instrument of signal is unable to test.

12. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11ax40	Test channel:	Middle
------------	------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	49.72	-7.58	42.14	74	-31.86	Vertical
7311	48.83	-1.4	47.43	74	-26.57	Vertical
9748	46.11	1.2	47.31	74	-26.69	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	51.15	-7.58	43.57	74	-30.43	Horizontal
7311	46.31	-1.4	44.91	74	-29.09	Horizontal
9748	45.52	1.2	46.72	74	-27.28	Horizontal
12185	*	--		74		Horizontal
14622	*	--		74		Horizontal
17059	*	--		74		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	40.78	-7.58	33.2	74	-40.80	Vertical
7311	39.12	-1.4	37.72	74	-36.28	Vertical
9748	36.61	1.2	37.81	74	-36.19	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	41.28	-7.58	33.7	74	-40.30	Horizontal
7311	37.84	-1.4	36.44	74	-37.56	Horizontal
9748	35.23	1.2	36.43	74	-37.57	Horizontal
12185	*	--		74		Horizontal
14622	*	--		74		Horizontal
17059	*	--		74		Horizontal

Remark:

5. *Level = Read level + Factor*
6. *Factor = Antenna Factor + Cable Loss – Preamplifier Factor*
7. *“*” means this data is too weak, the instrument of signal is unable to test.*
8. *Emissions more than 20 dB below the limit do not need to be reported.*



Test mode:	802.11ax40	Test channel:	Highest
------------	------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	49.4	-7.52	41.88	74	-32.12	Vertical
7356	45.64	-1.26	44.38	74	-29.62	Vertical
9808	47.24	1.16	48.4	74	-25.60	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4904	50.44	-7.52	42.92	74	-31.08	Horizontal
7356	48.18	-1.26	46.92	74	-27.08	Horizontal
9808	46.31	1.16	47.47	74	-26.53	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	40.13	-7.52	32.61	74	-41.39	Vertical
7356	37.81	-1.26	36.55	74	-37.45	Vertical
9808	36.52	1.16	37.68	74	-36.32	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4904	41.34	-7.52	33.82	74	-40.18	Horizontal
7356	38.74	-1.26	37.48	74	-36.52	Horizontal
9808	36.45	1.16	37.61	74	-36.39	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal


Remark:



5. $Level = Read\ level + Factor$
6. $Factor = Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$
7. “*”, means this data is the too weak instrument of signal is unable to test.
8. Emissions more than 20 dB below the limit do not need to be reported.



5. APPENDIX 1-TEST DATA



Duty Cycle



Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
b	2412	8.35	8.4	99.4	0.03	0.12
b	2437	8.35	8.395	99.46	0.02	0.12
b	2462	8.355	8.395	99.52	0.02	0.12
g	2412	0.96	1.007	95.33	0.21	1.04
g	2437	0.96	1.006	95.43	0.2	1.04
g	2462	0.96	1.008	95.24	0.21	1.04
n20	2412	0.96	1.007	95.33	0.21	1.04
n20	2437	0.96	1.007	95.33	0.21	1.04
n20	2462	0.96	1.008	95.24	0.21	1.04
n40	2422	0.976	1.024	95.31	0.21	1.02
n40	2437	0.976	1.023	95.41	0.2	1.02
n40	2452	0.976	1.024	95.31	0.21	1.02
ax20	2412	0.979	1.028	95.23	0.21	1.02
ax20	2437	0.979	1.027	95.33	0.21	1.02
ax20	2462	0.979	1.026	95.42	0.2	1.02
ax40	2422	0.978	1.024	95.51	0.2	1.02
ax40	2437	0.978	1.024	95.51	0.2	1.02
ax40	2452	0.977	1.024	95.41	0.2	1.02


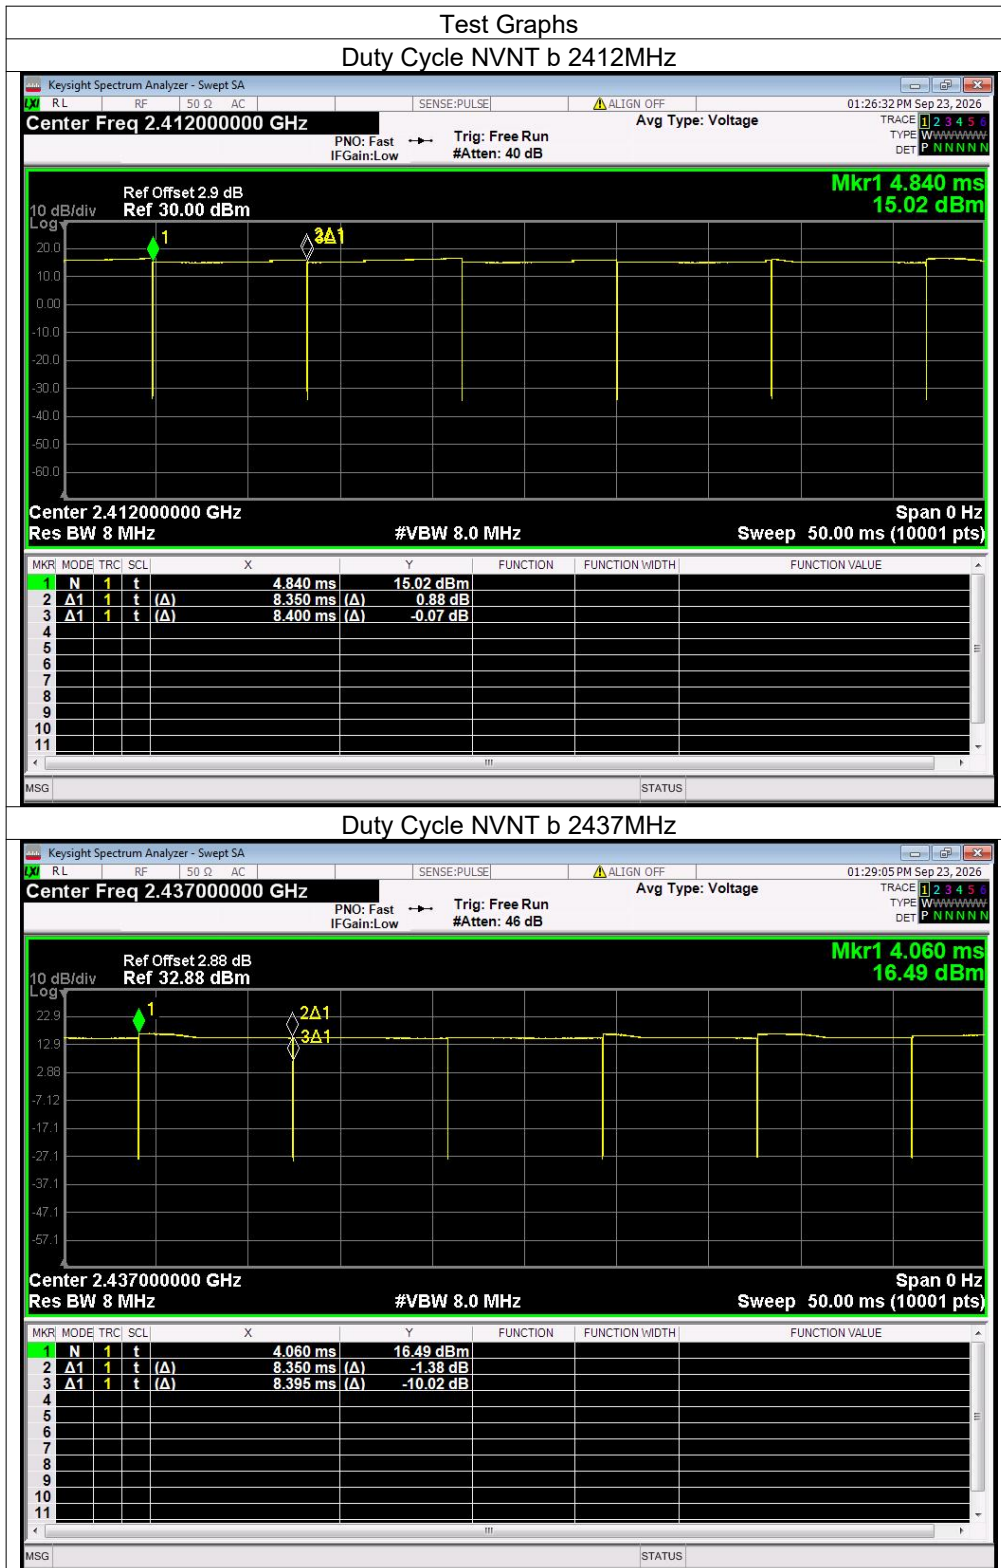


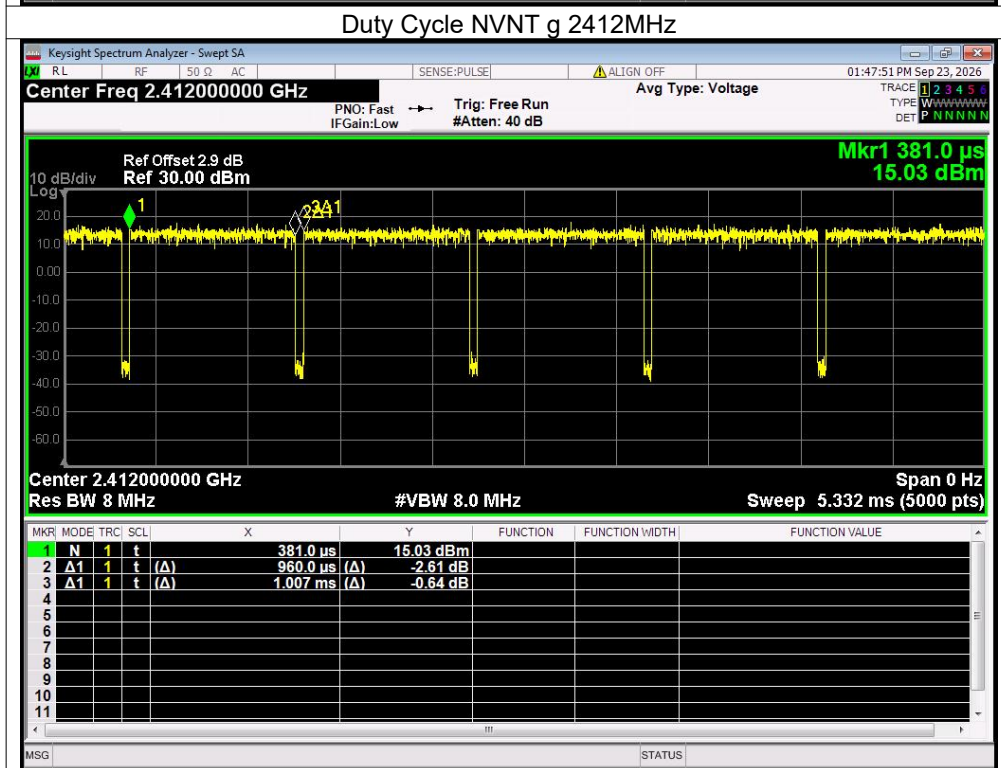
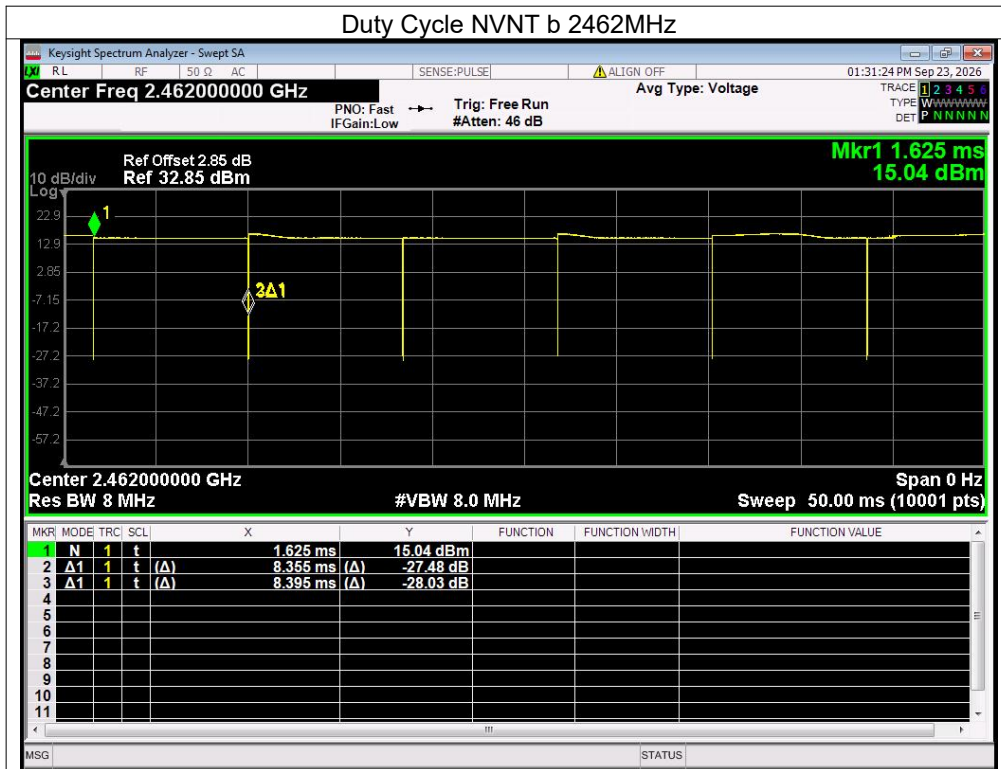


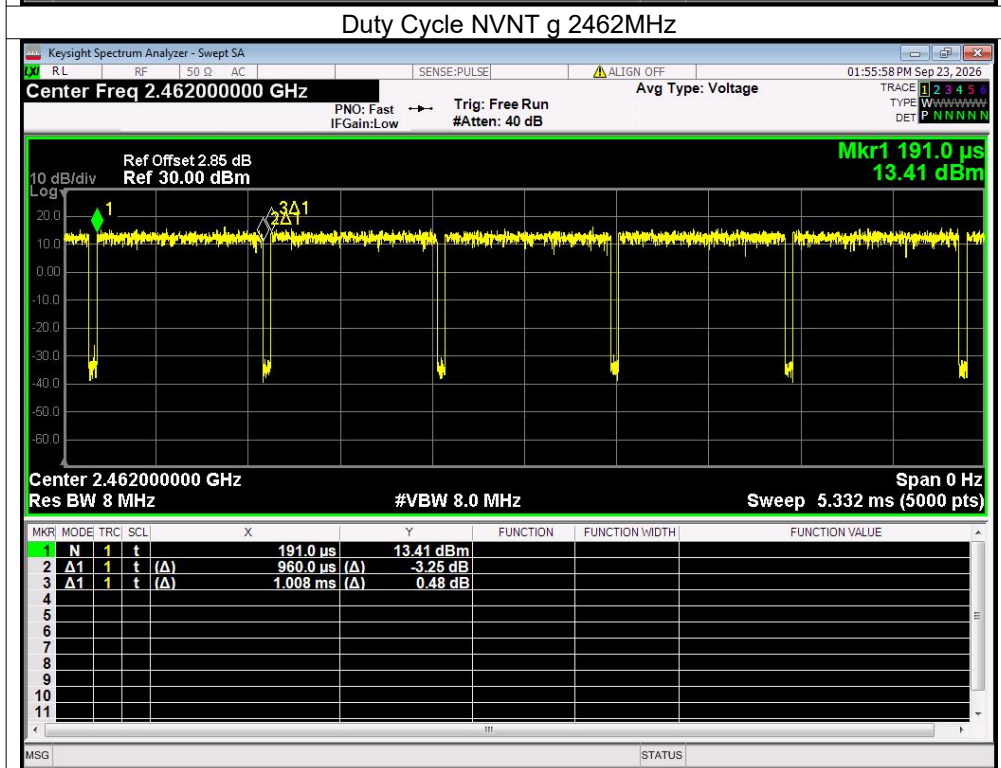
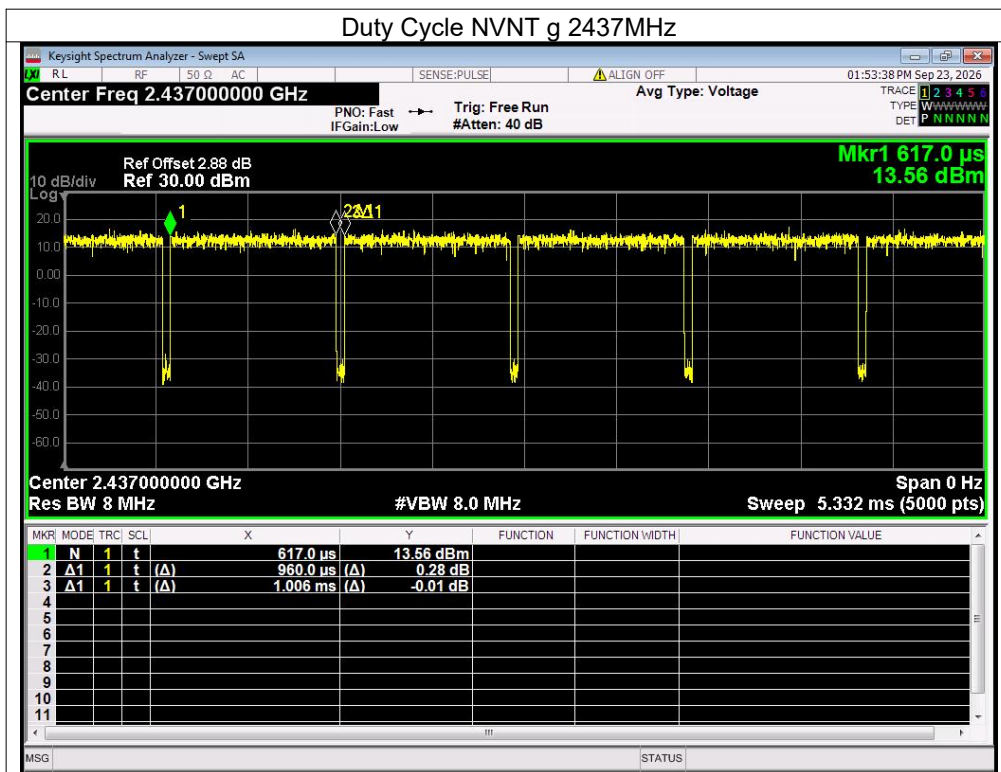


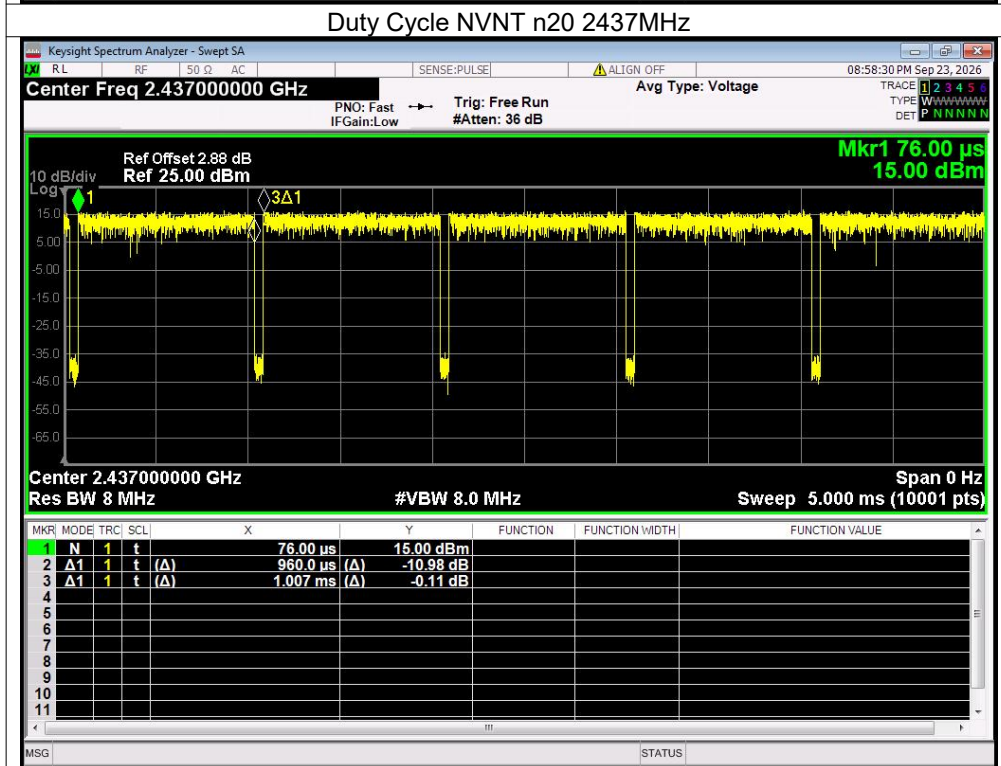
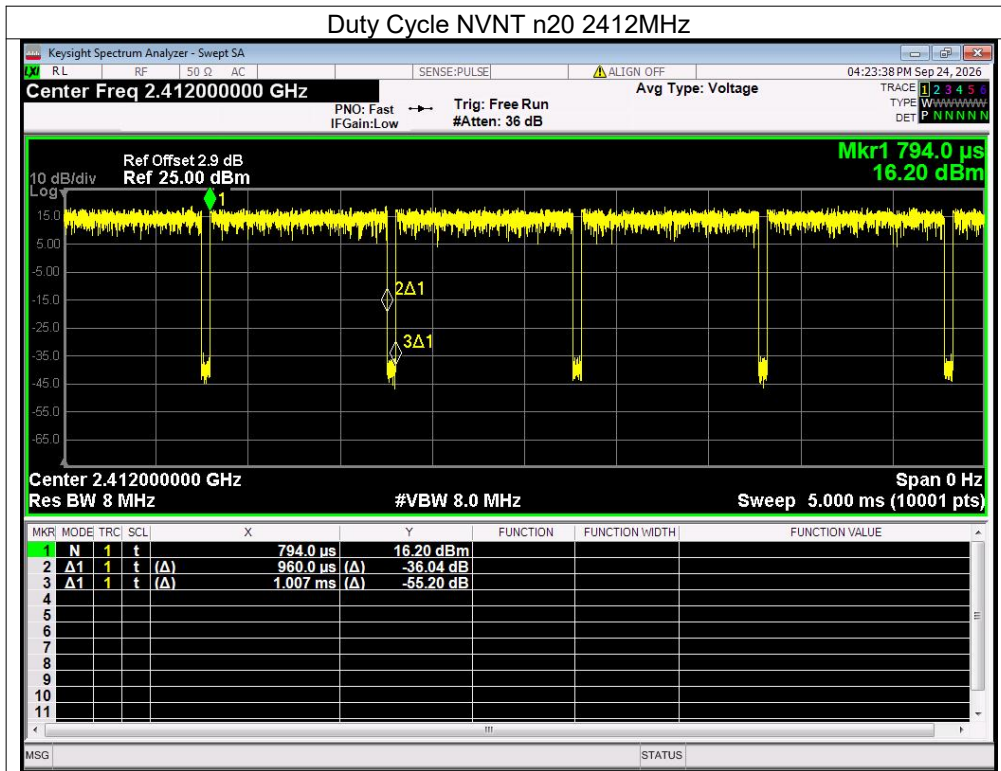


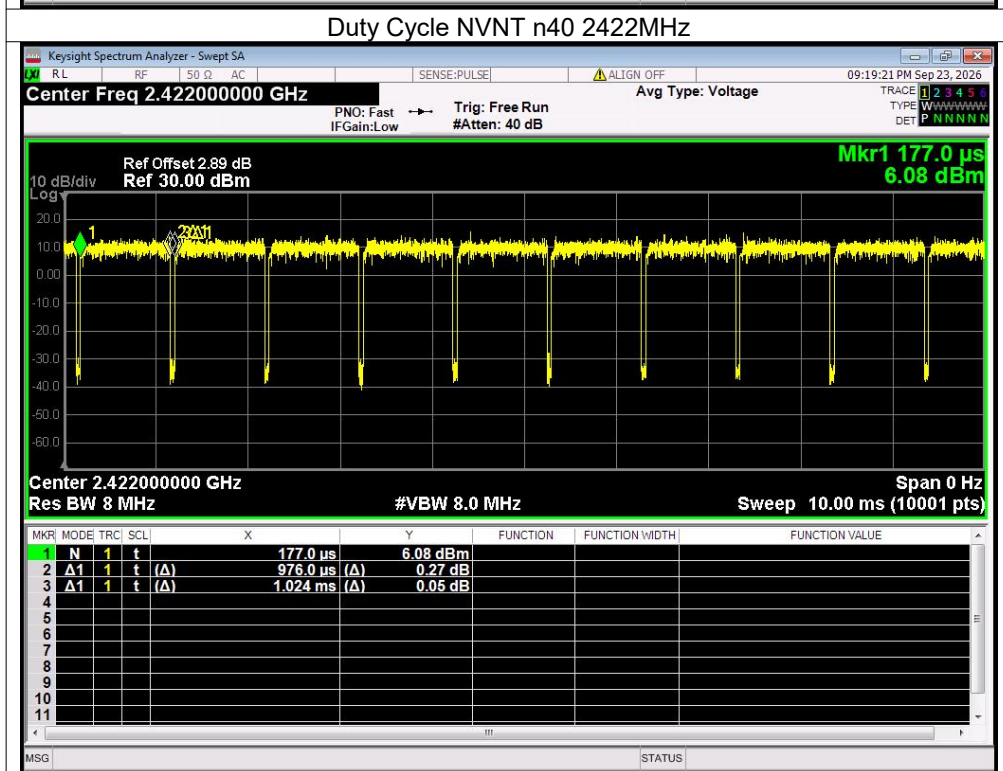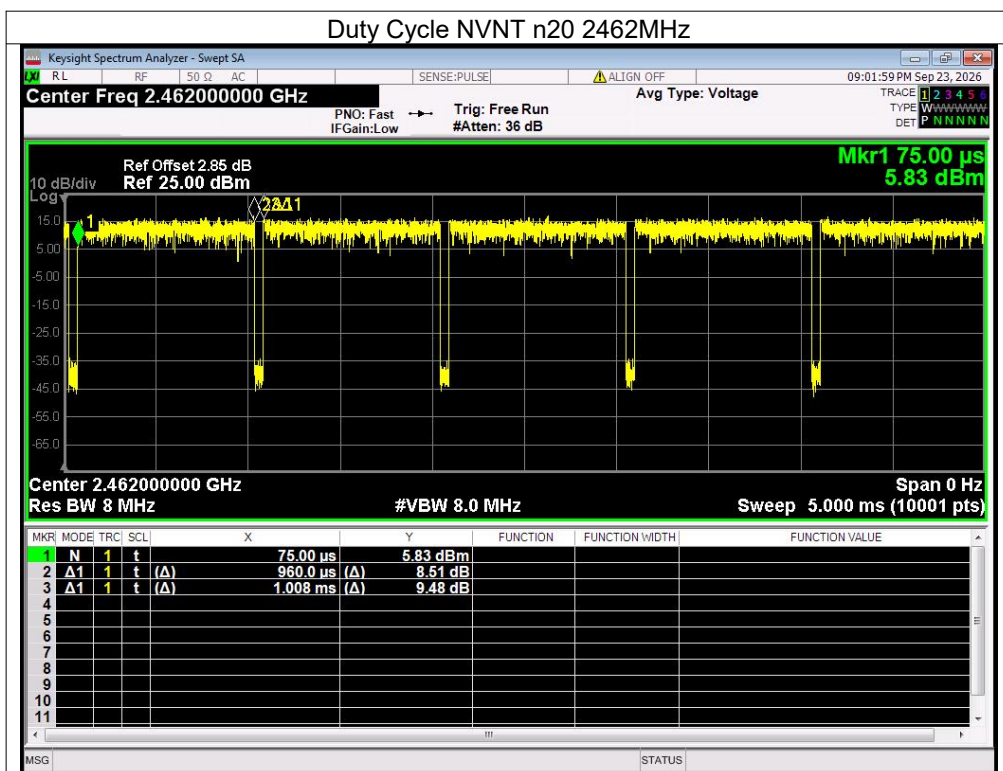

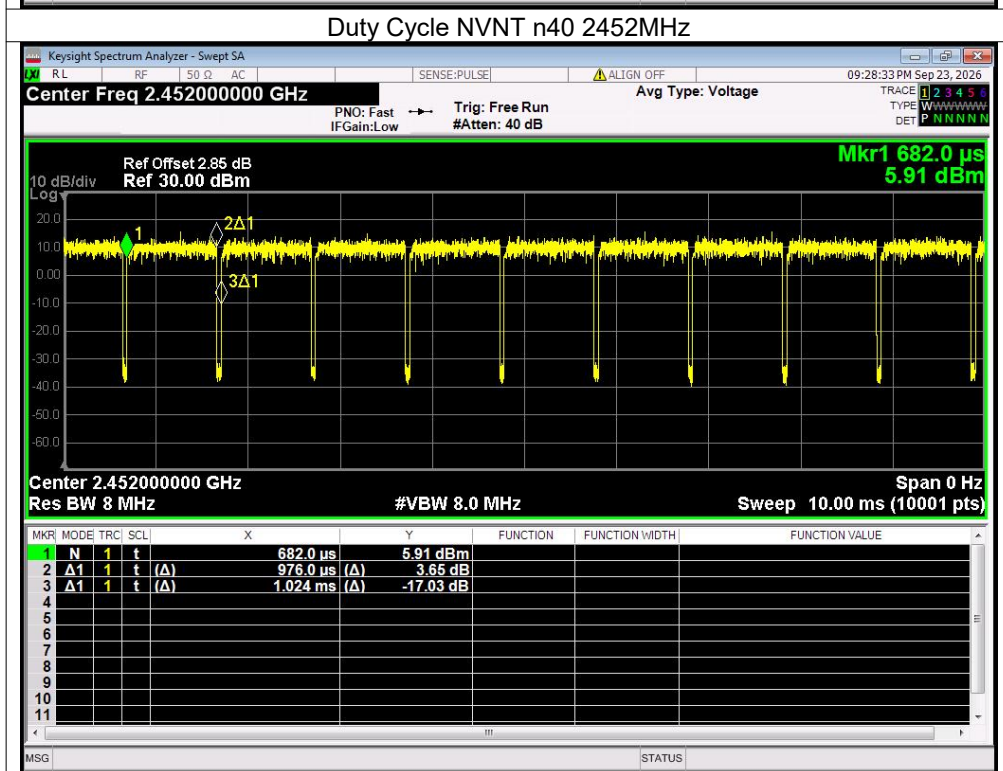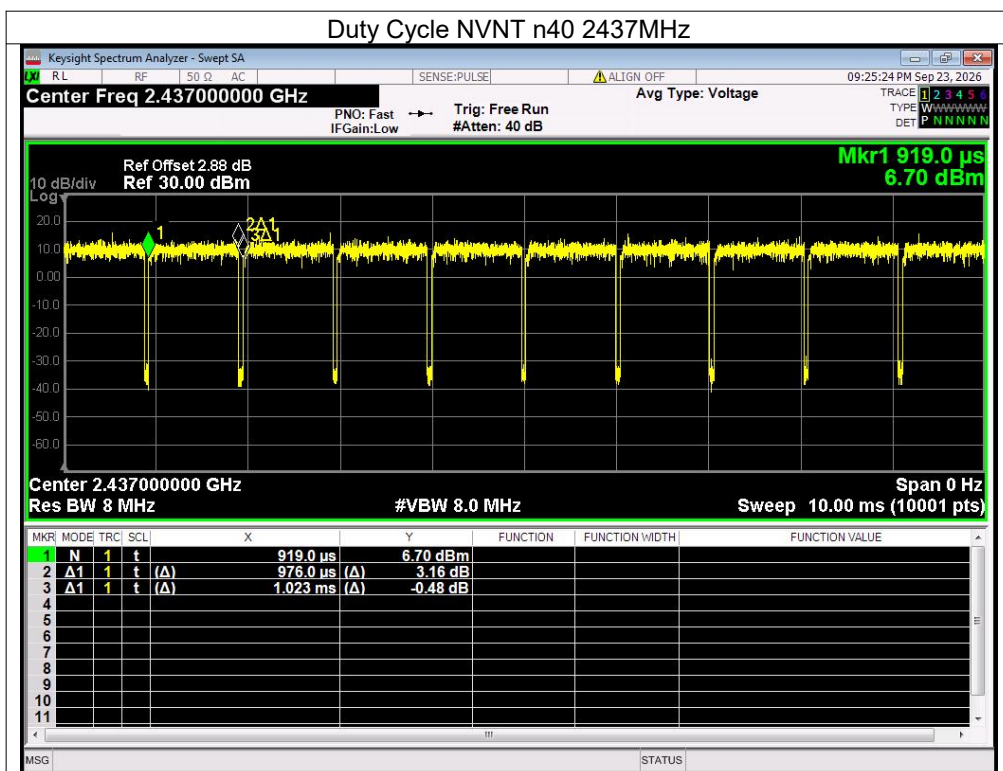

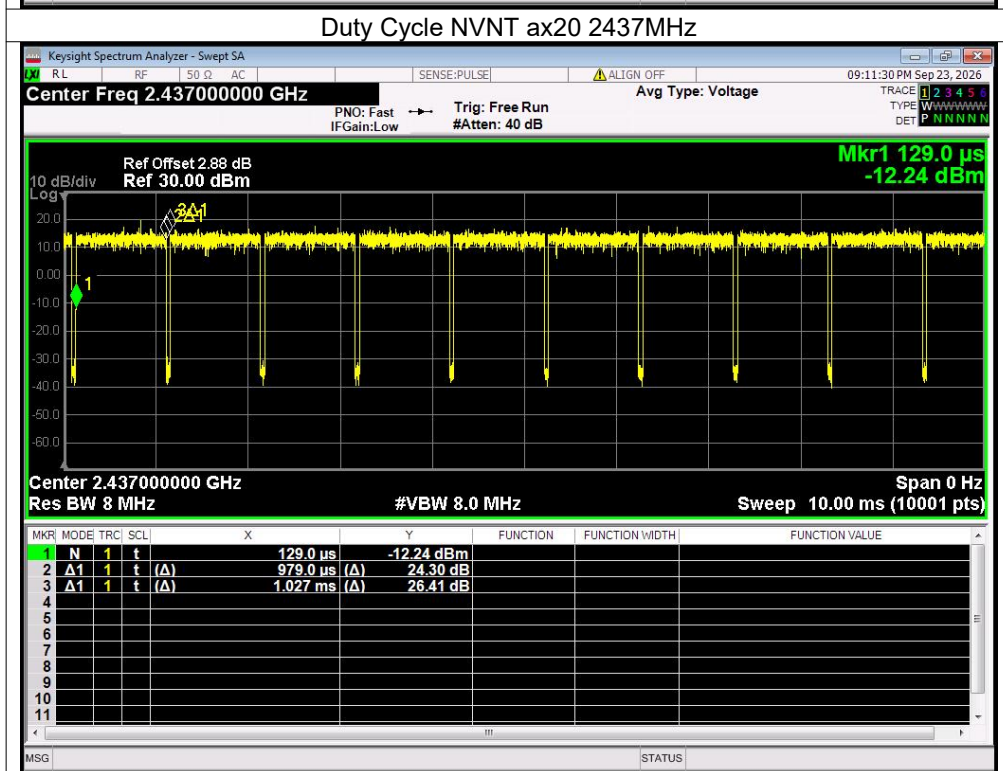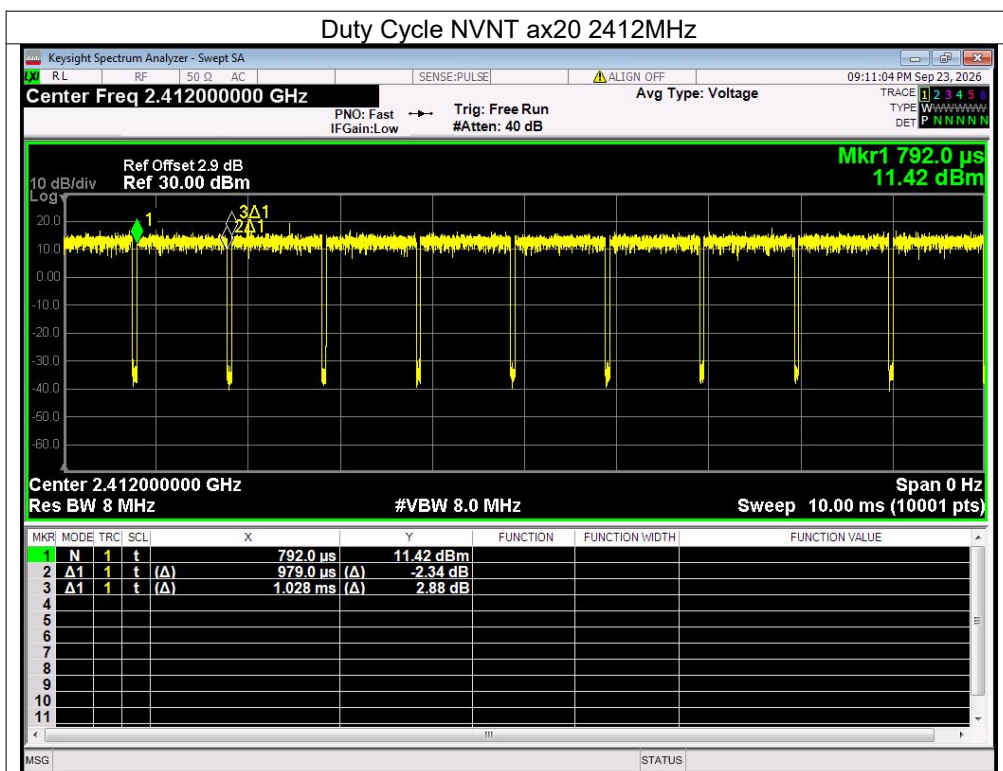

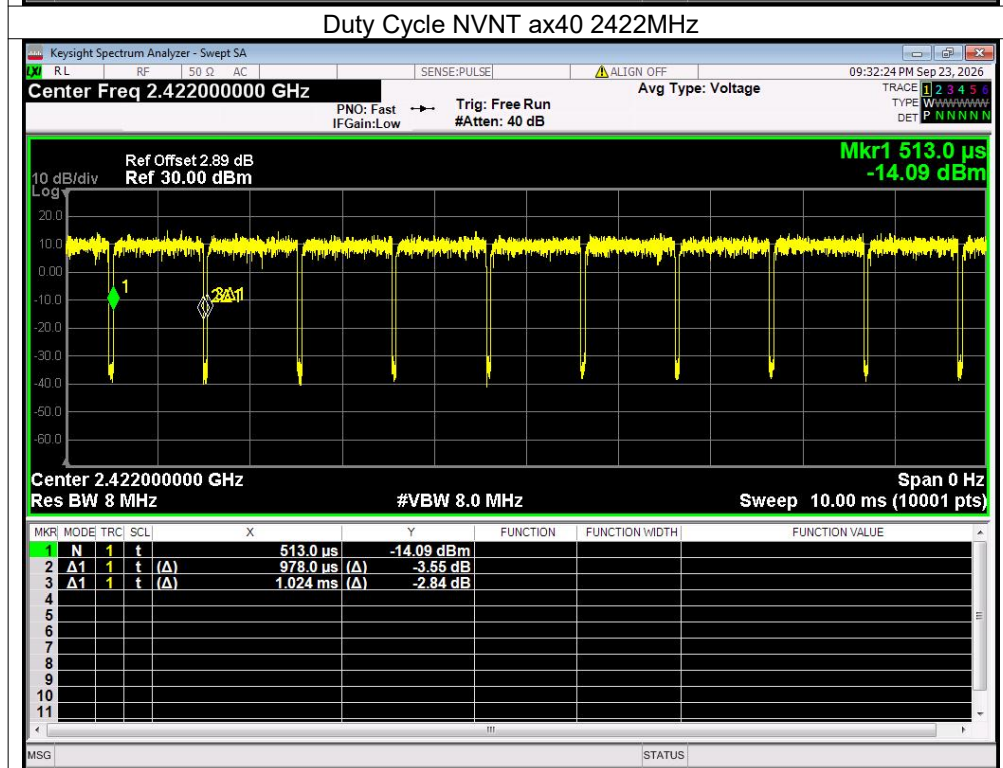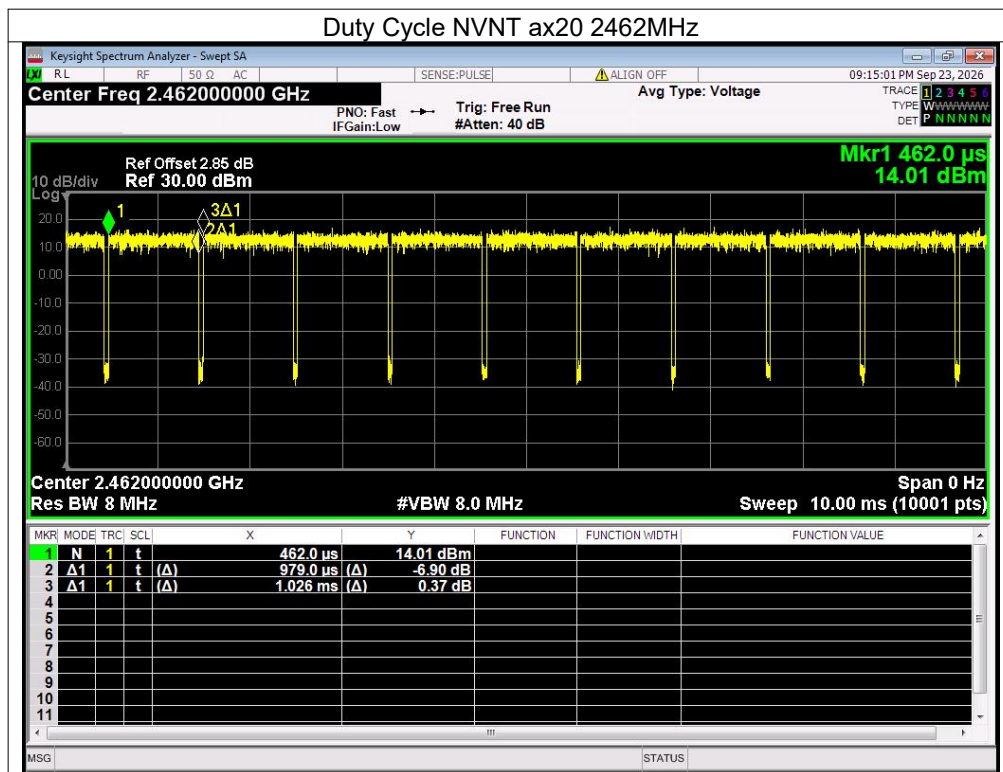

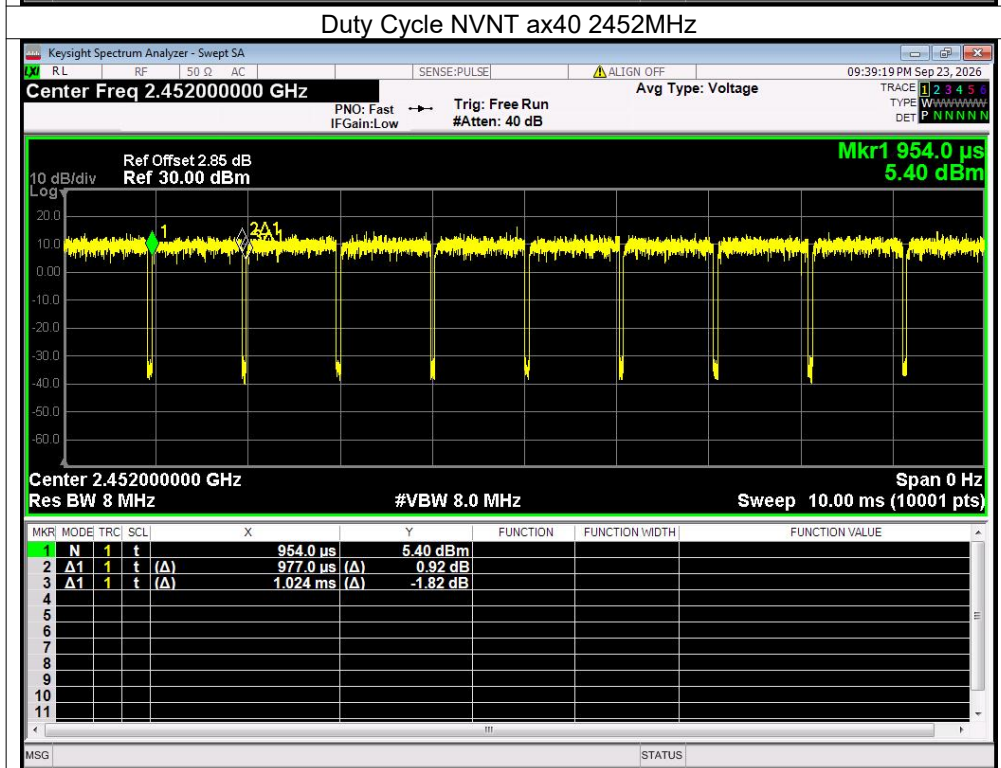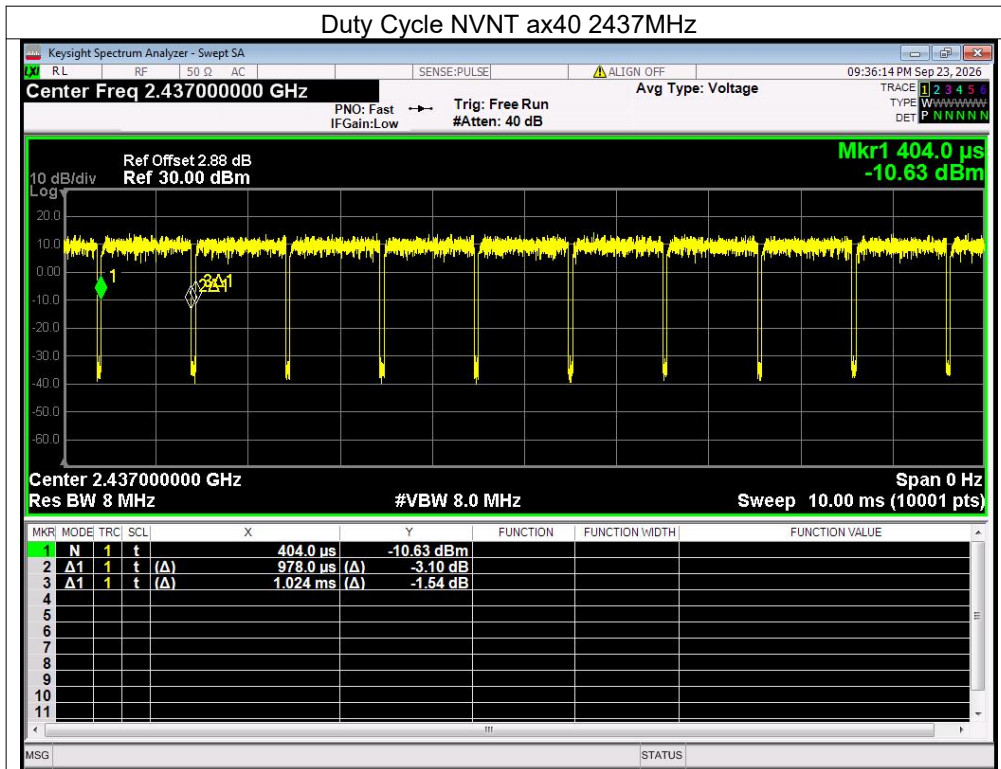


Maximum Peak Conducted Output Power



Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
b	2412	17.44	<=30	Pass
b	2437	17.37	<=30	Pass
b	2462	17.37	<=30	Pass
g	2412	17.94	<=30	Pass
g	2437	17.98	<=30	Pass
g	2462	17.91	<=30	Pass
n20	2412	18.74	<=30	Pass
n20	2437	18.94	<=30	Pass
n20	2462	18.71	<=30	Pass
n40	2422	18.11	<=30	Pass
n40	2437	17.83	<=30	Pass
n40	2452	17.81	<=30	Pass
ax20	2412	18.14	<=30	Pass
ax20	2437	18.18	<=30	Pass
ax20	2462	17.58	<=30	Pass
ax40	2422	18.5	<=30	Pass
ax40	2437	18.39	<=30	Pass
ax40	2452	18.23	<=30	Pass







-6dB Bandwidth



Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	10.18	≥ 0.5	Pass
b	2437	10.19	≥ 0.5	Pass
b	2462	10.18	≥ 0.5	Pass
g	2412	15.63	≥ 0.5	Pass
g	2437	15.86	≥ 0.5	Pass
g	2462	15.72	≥ 0.5	Pass
n20	2412	16.71	≥ 0.5	Pass
n20	2437	16.96	≥ 0.5	Pass
n20	2462	16.19	≥ 0.5	Pass
n40	2422	35.88	≥ 0.5	Pass
n40	2437	35.24	≥ 0.5	Pass
n40	2452	35.96	≥ 0.5	Pass
ax20	2412	16.37	≥ 0.5	Pass
ax20	2437	17.46	≥ 0.5	Pass
ax20	2462	14.79	≥ 0.5	Pass
ax40	2422	35.09	≥ 0.5	Pass
ax40	2437	35.08	≥ 0.5	Pass
ax40	2452	33.8	≥ 0.5	Pass


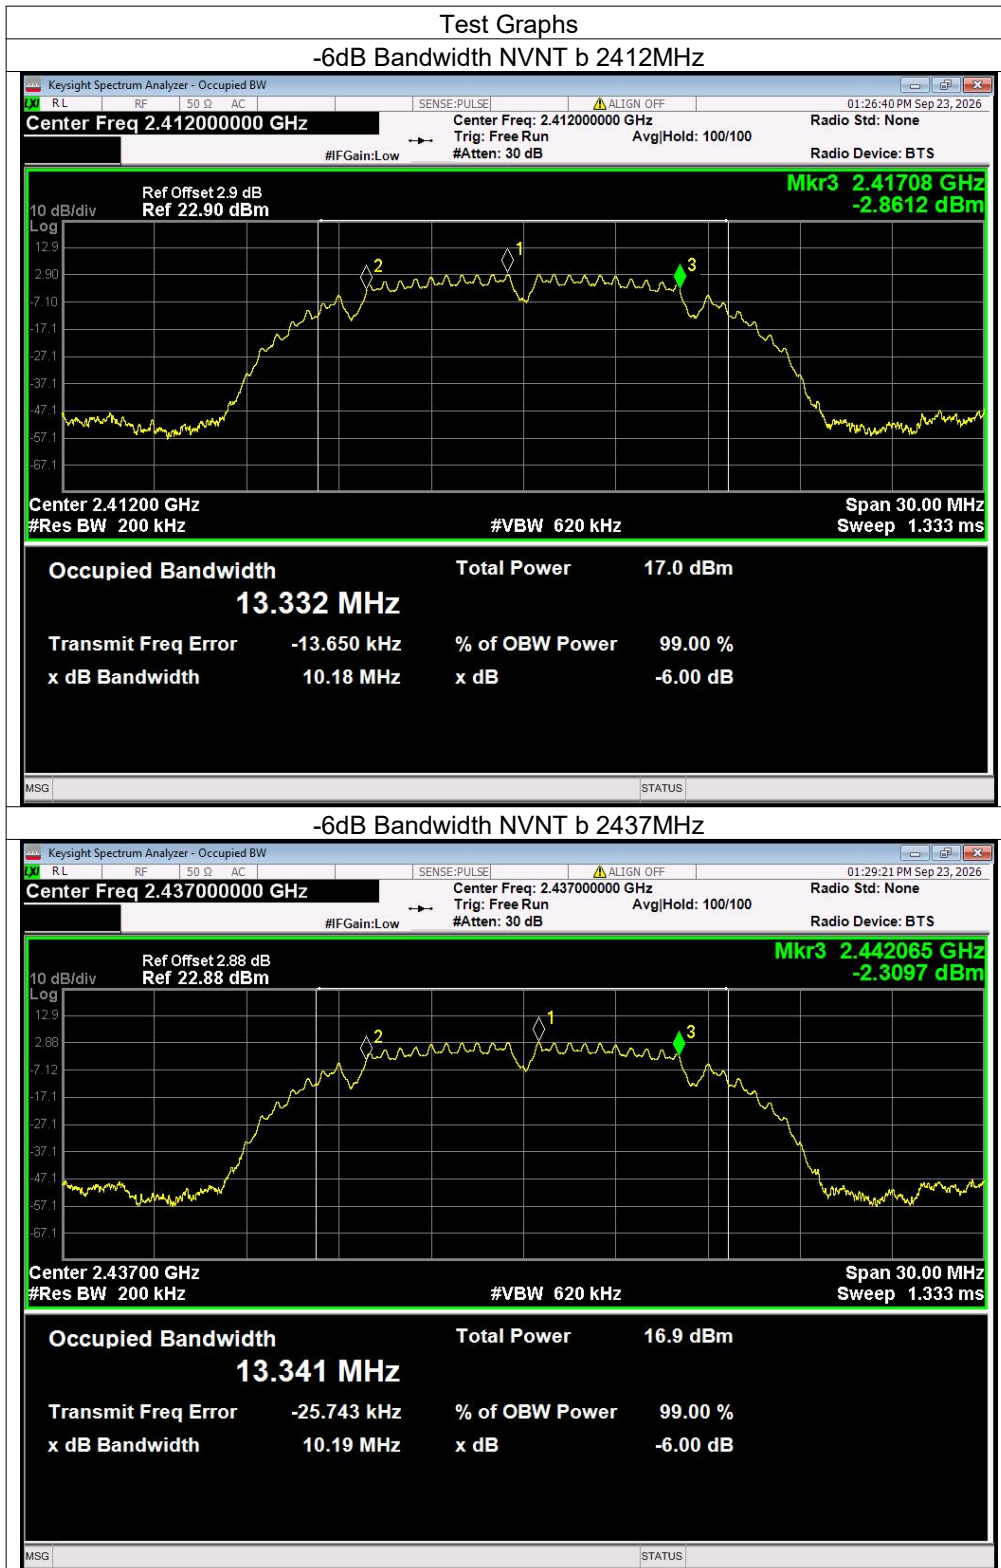


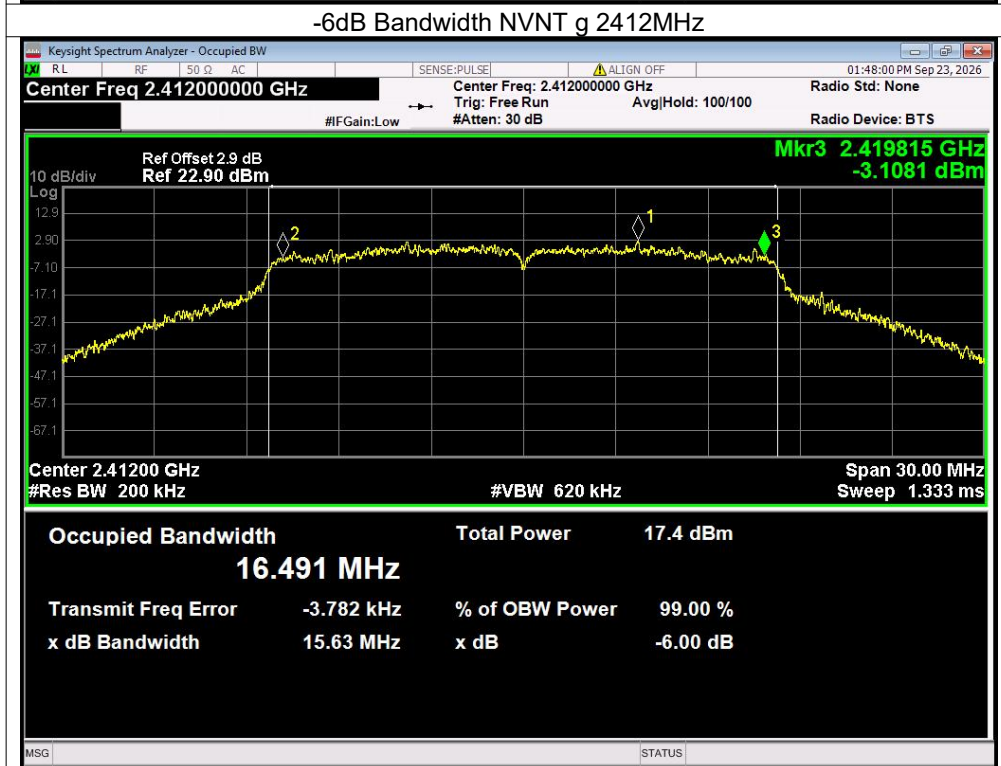
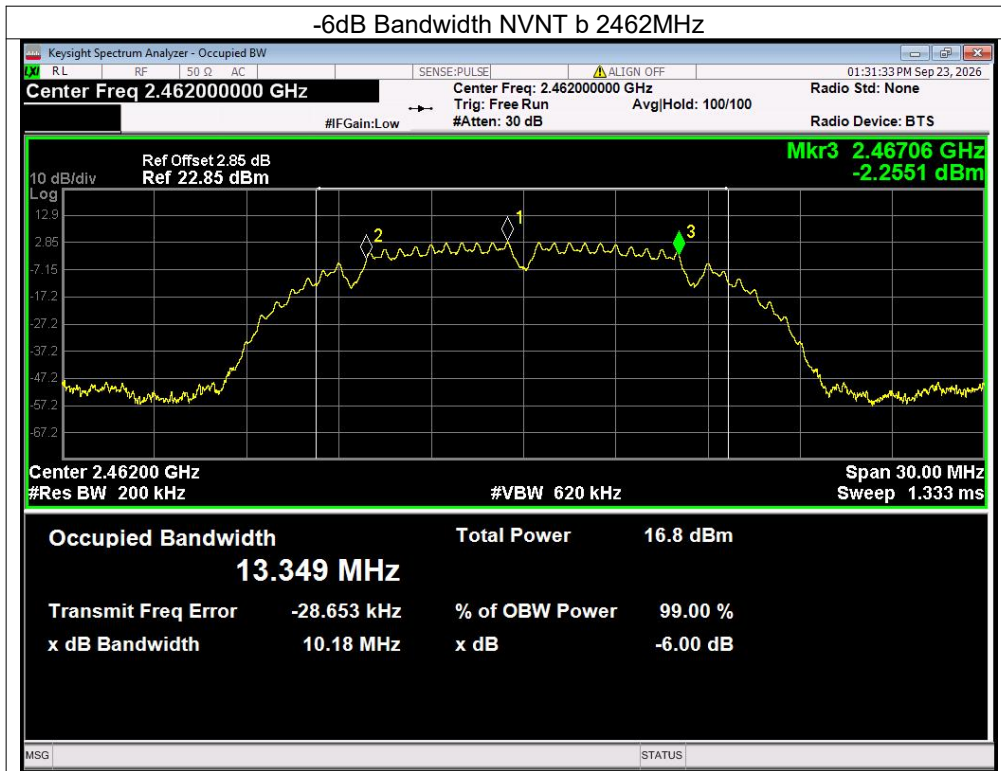


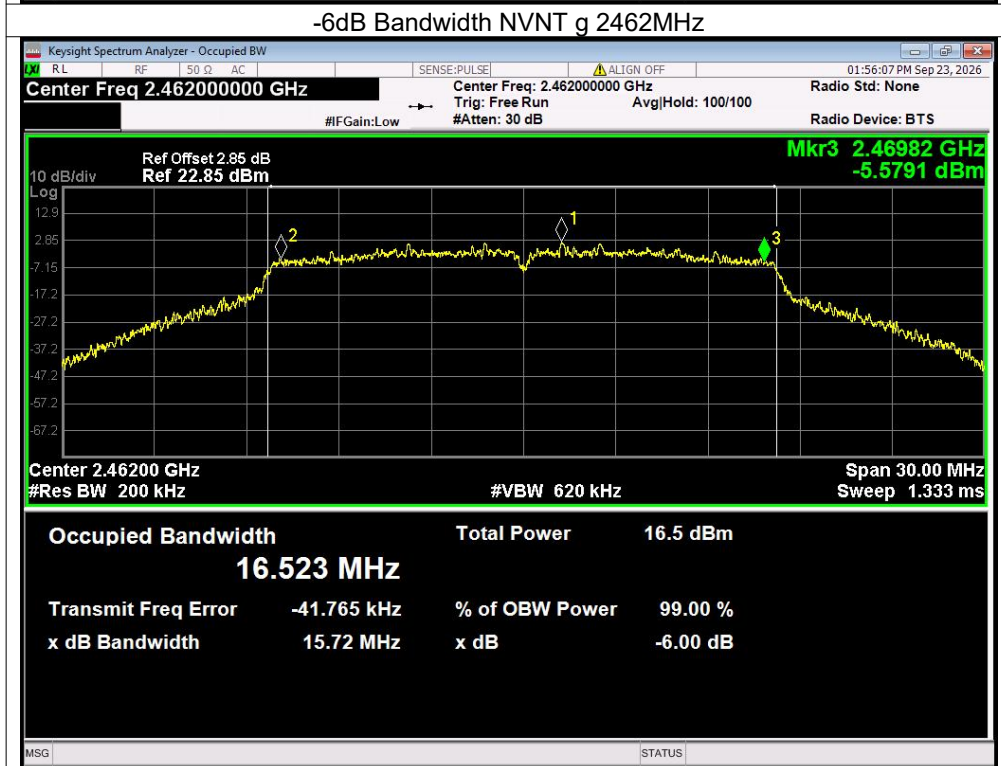
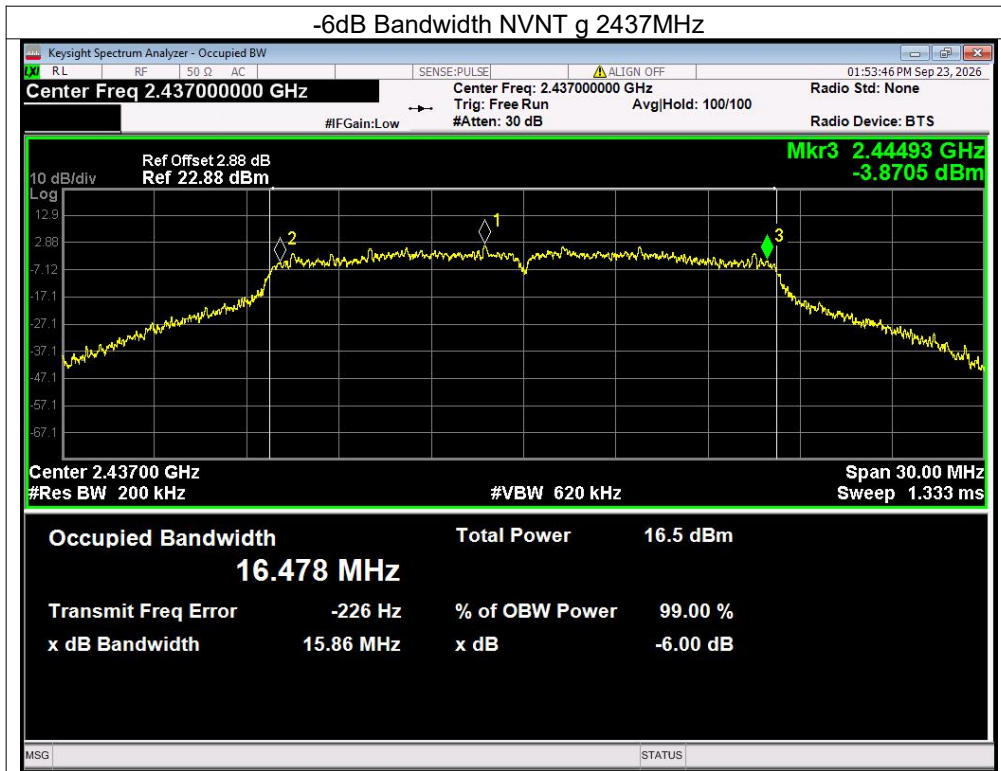


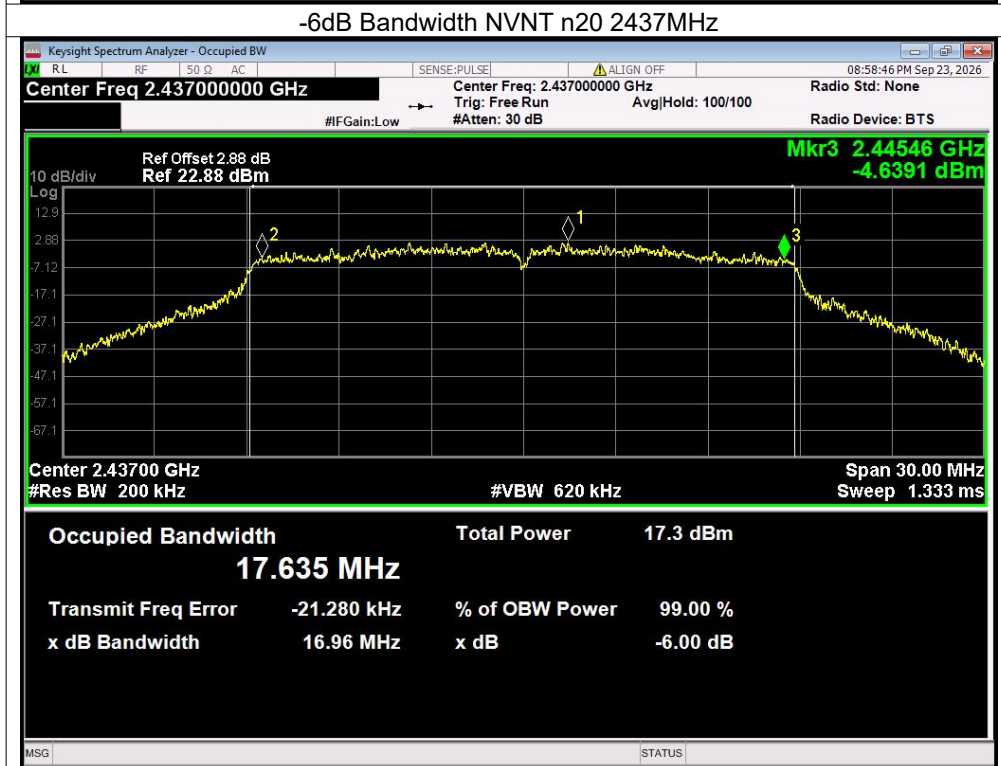
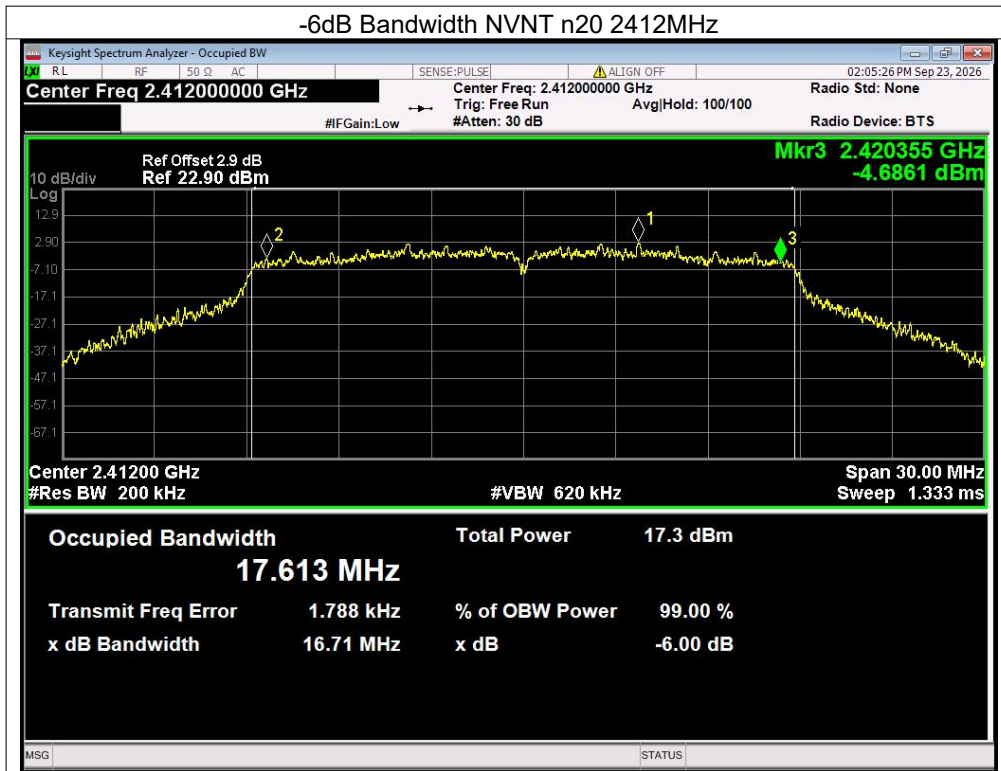


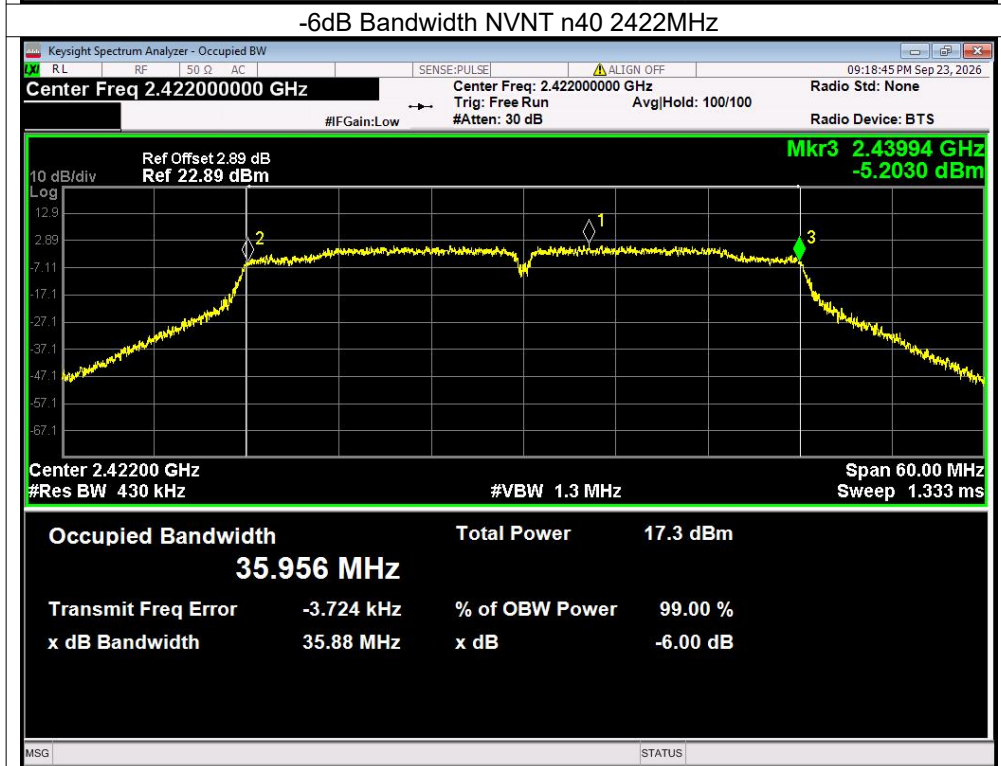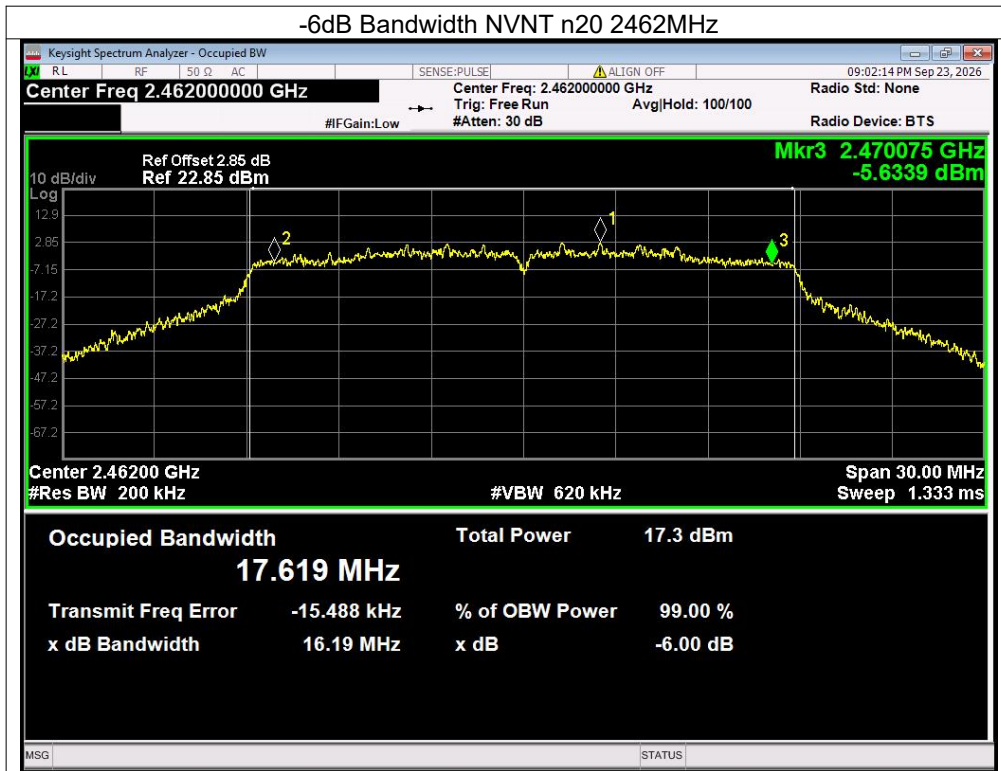

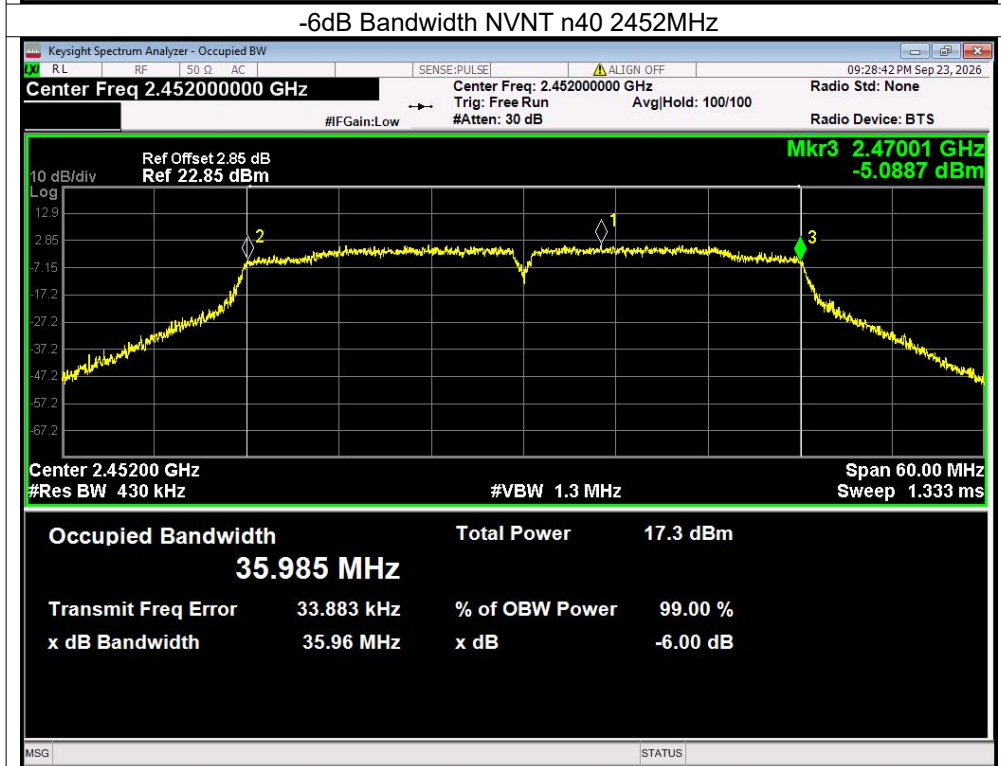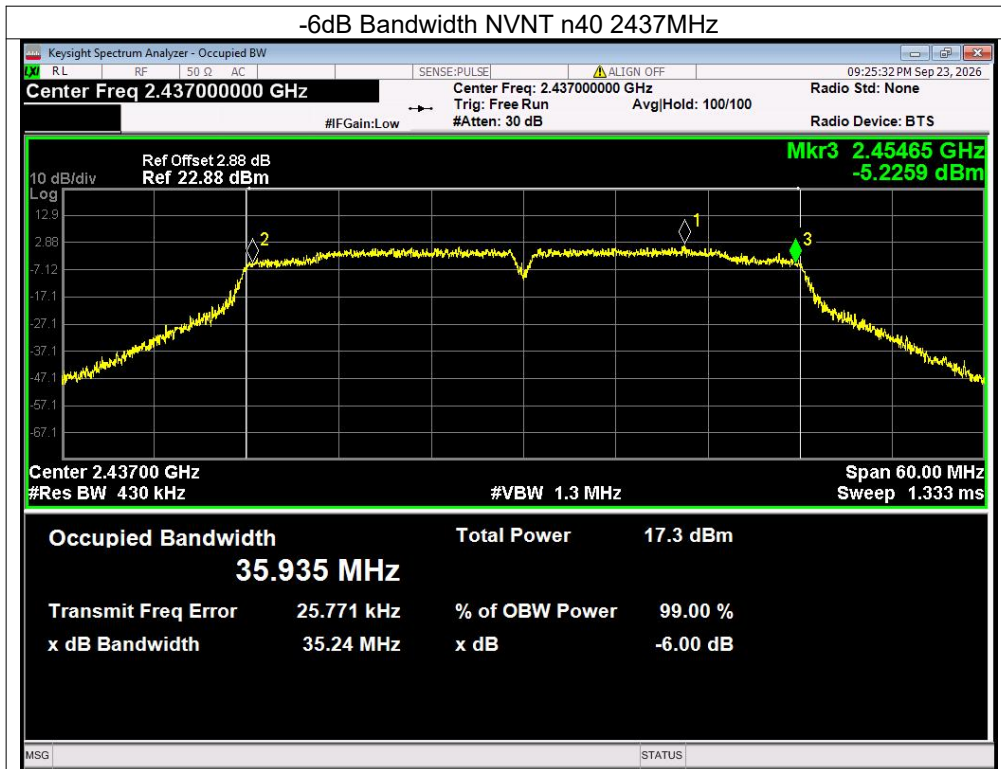

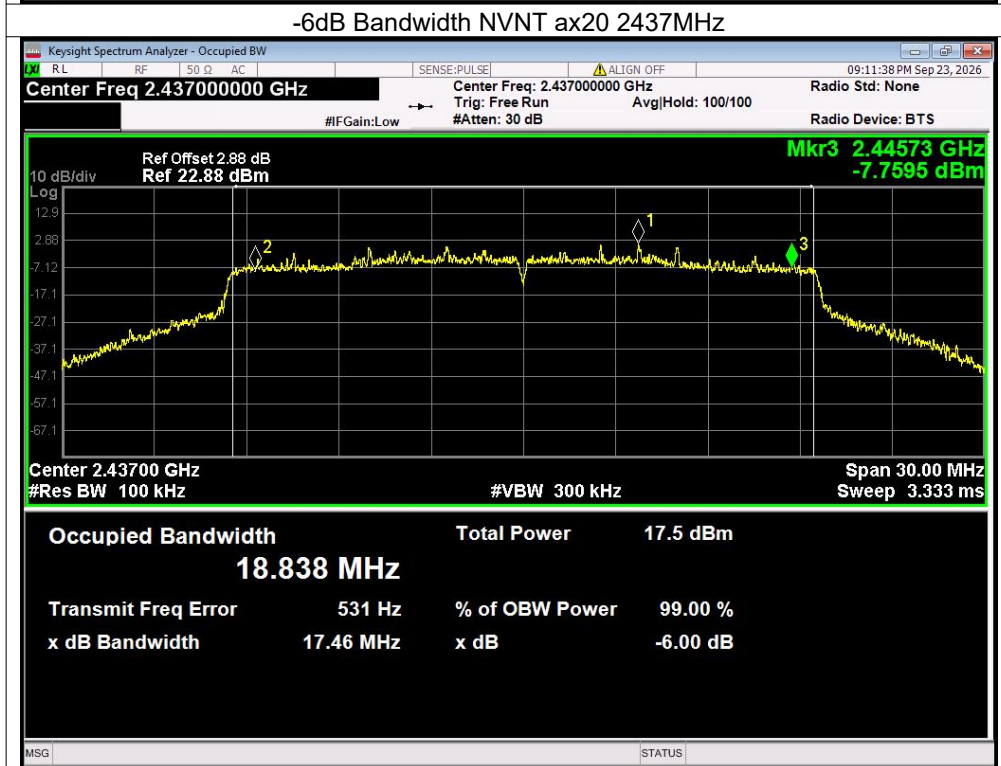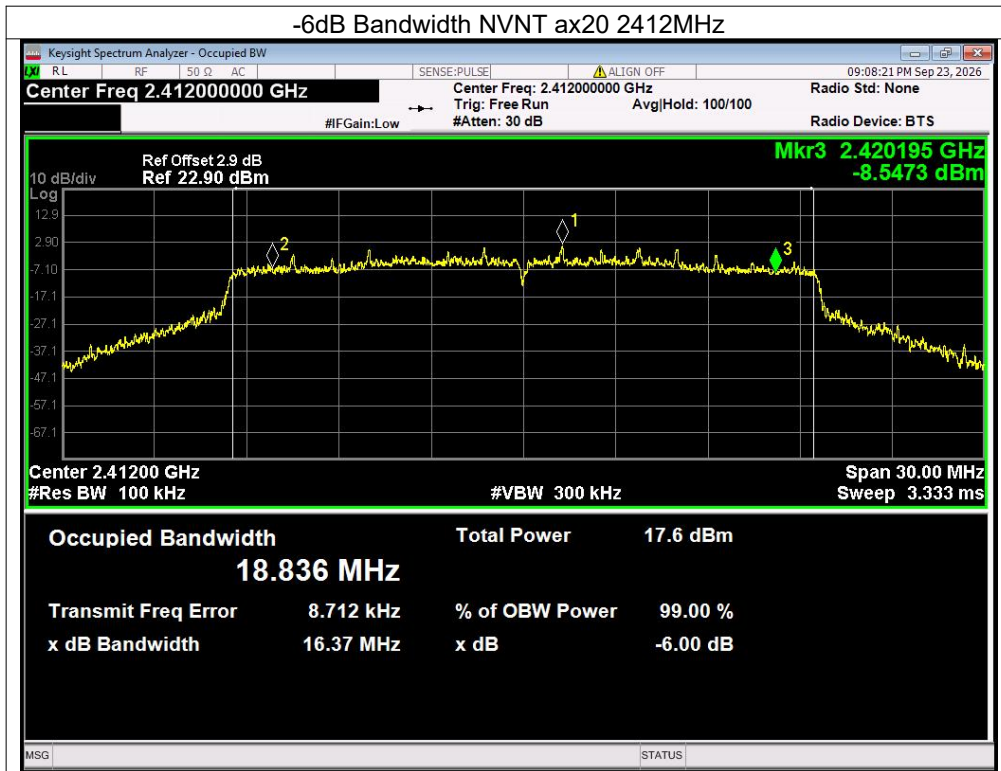

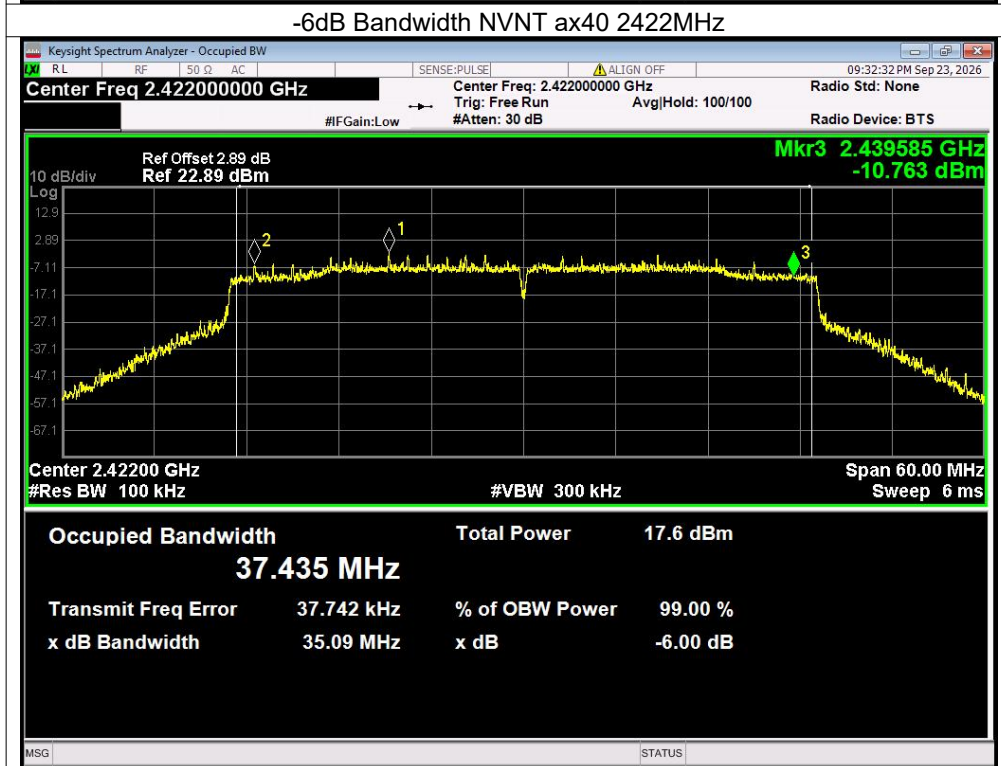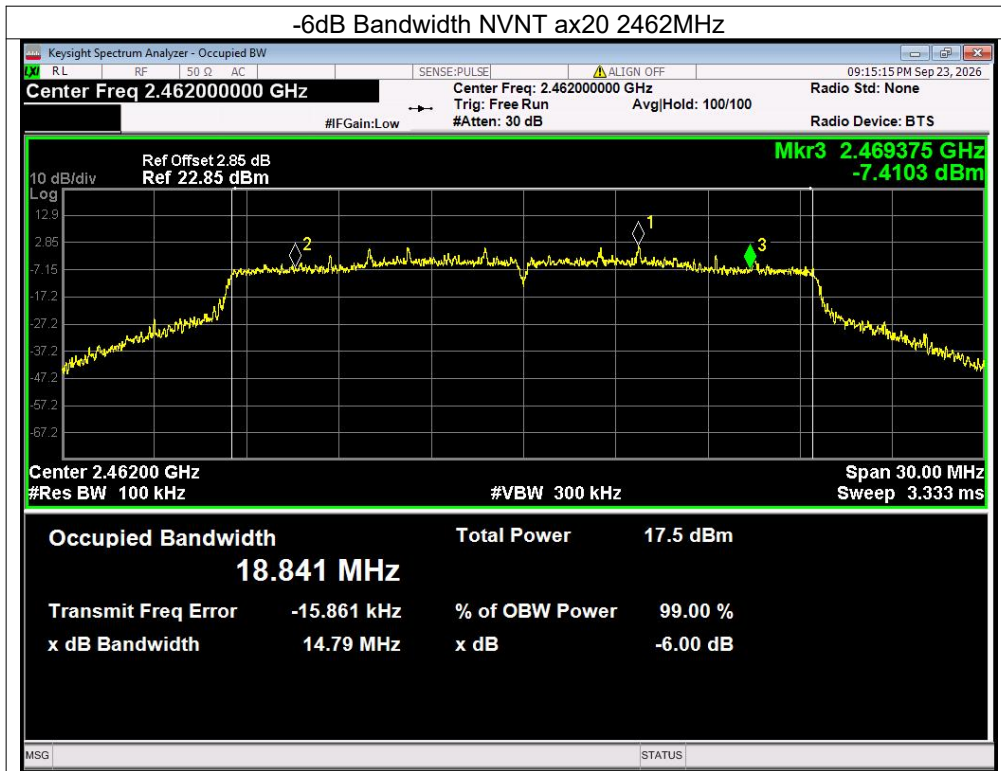

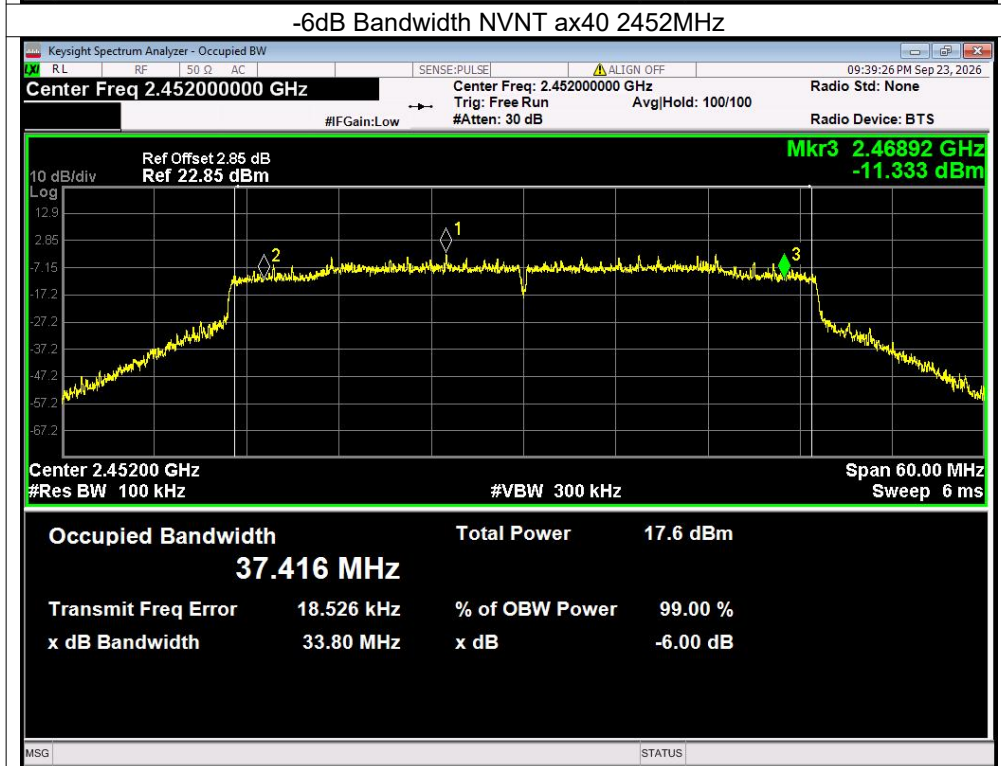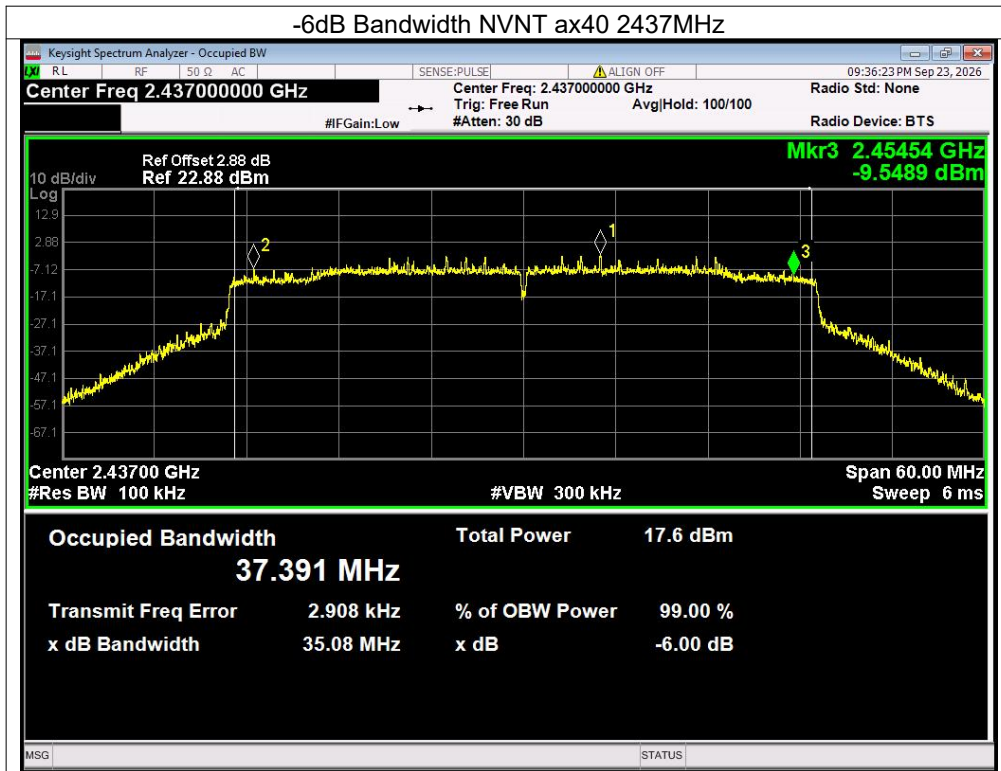



Maximum Power Spectral Density Level

Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	-11.3	<=8	Pass
b	2437	-11.24	<=8	Pass
b	2462	-11.46	<=8	Pass
g	2412	-13.19	<=8	Pass
g	2437	-13.87	<=8	Pass
g	2462	-12.16	<=8	Pass
n20	2412	-12.14	<=8	Pass
n20	2437	-13.17	<=8	Pass
n20	2462	-12.69	<=8	Pass
n40	2422	-15.77	<=8	Pass
n40	2437	-15.79	<=8	Pass
n40	2452	-16.12	<=8	Pass
ax20	2412	-12.66	<=8	Pass
ax20	2437	-13.92	<=8	Pass
ax20	2462	-14.27	<=8	Pass
ax40	2422	-16.2	<=8	Pass
ax40	2437	-17.23	<=8	Pass
ax40	2452	-16.49	<=8	Pass

